

From the bottom board (2x4 header, mounted underneath)




OLED (SSD1306 0.96", I2C 0x3C)

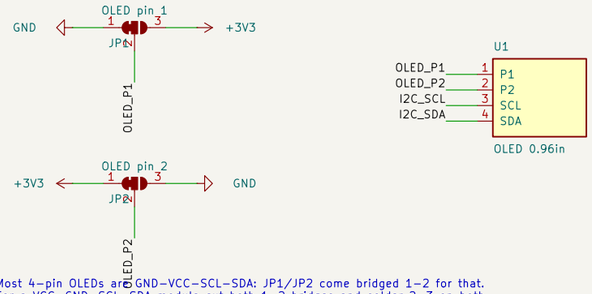


Most 4-pin OLEDs are GND-VCC-SCL-SDA: JP1/JP2 come bridged 1-2 for that.
For a VCC-GND-SCL-SDA module cut both 1-2 bridges and solder 2-3 on both.

Encoder (EC11 with push)



C and S2 to GND; A, B and the switch use the ESP32's
internal pull-ups. Mounting lugs to GND.

Decoupling and mounting

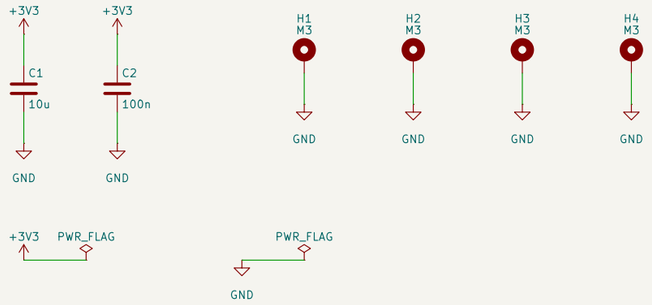

Mates with samplooler-bottom through J1 (header on the underside)
OLED, encoder and the opening for the joystick

Samplooler

Sheet: /
File: samplooler-top.kicad_sch

Title: Samplooler top board: panel

Size: A3	Date: 2026-09-25	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1