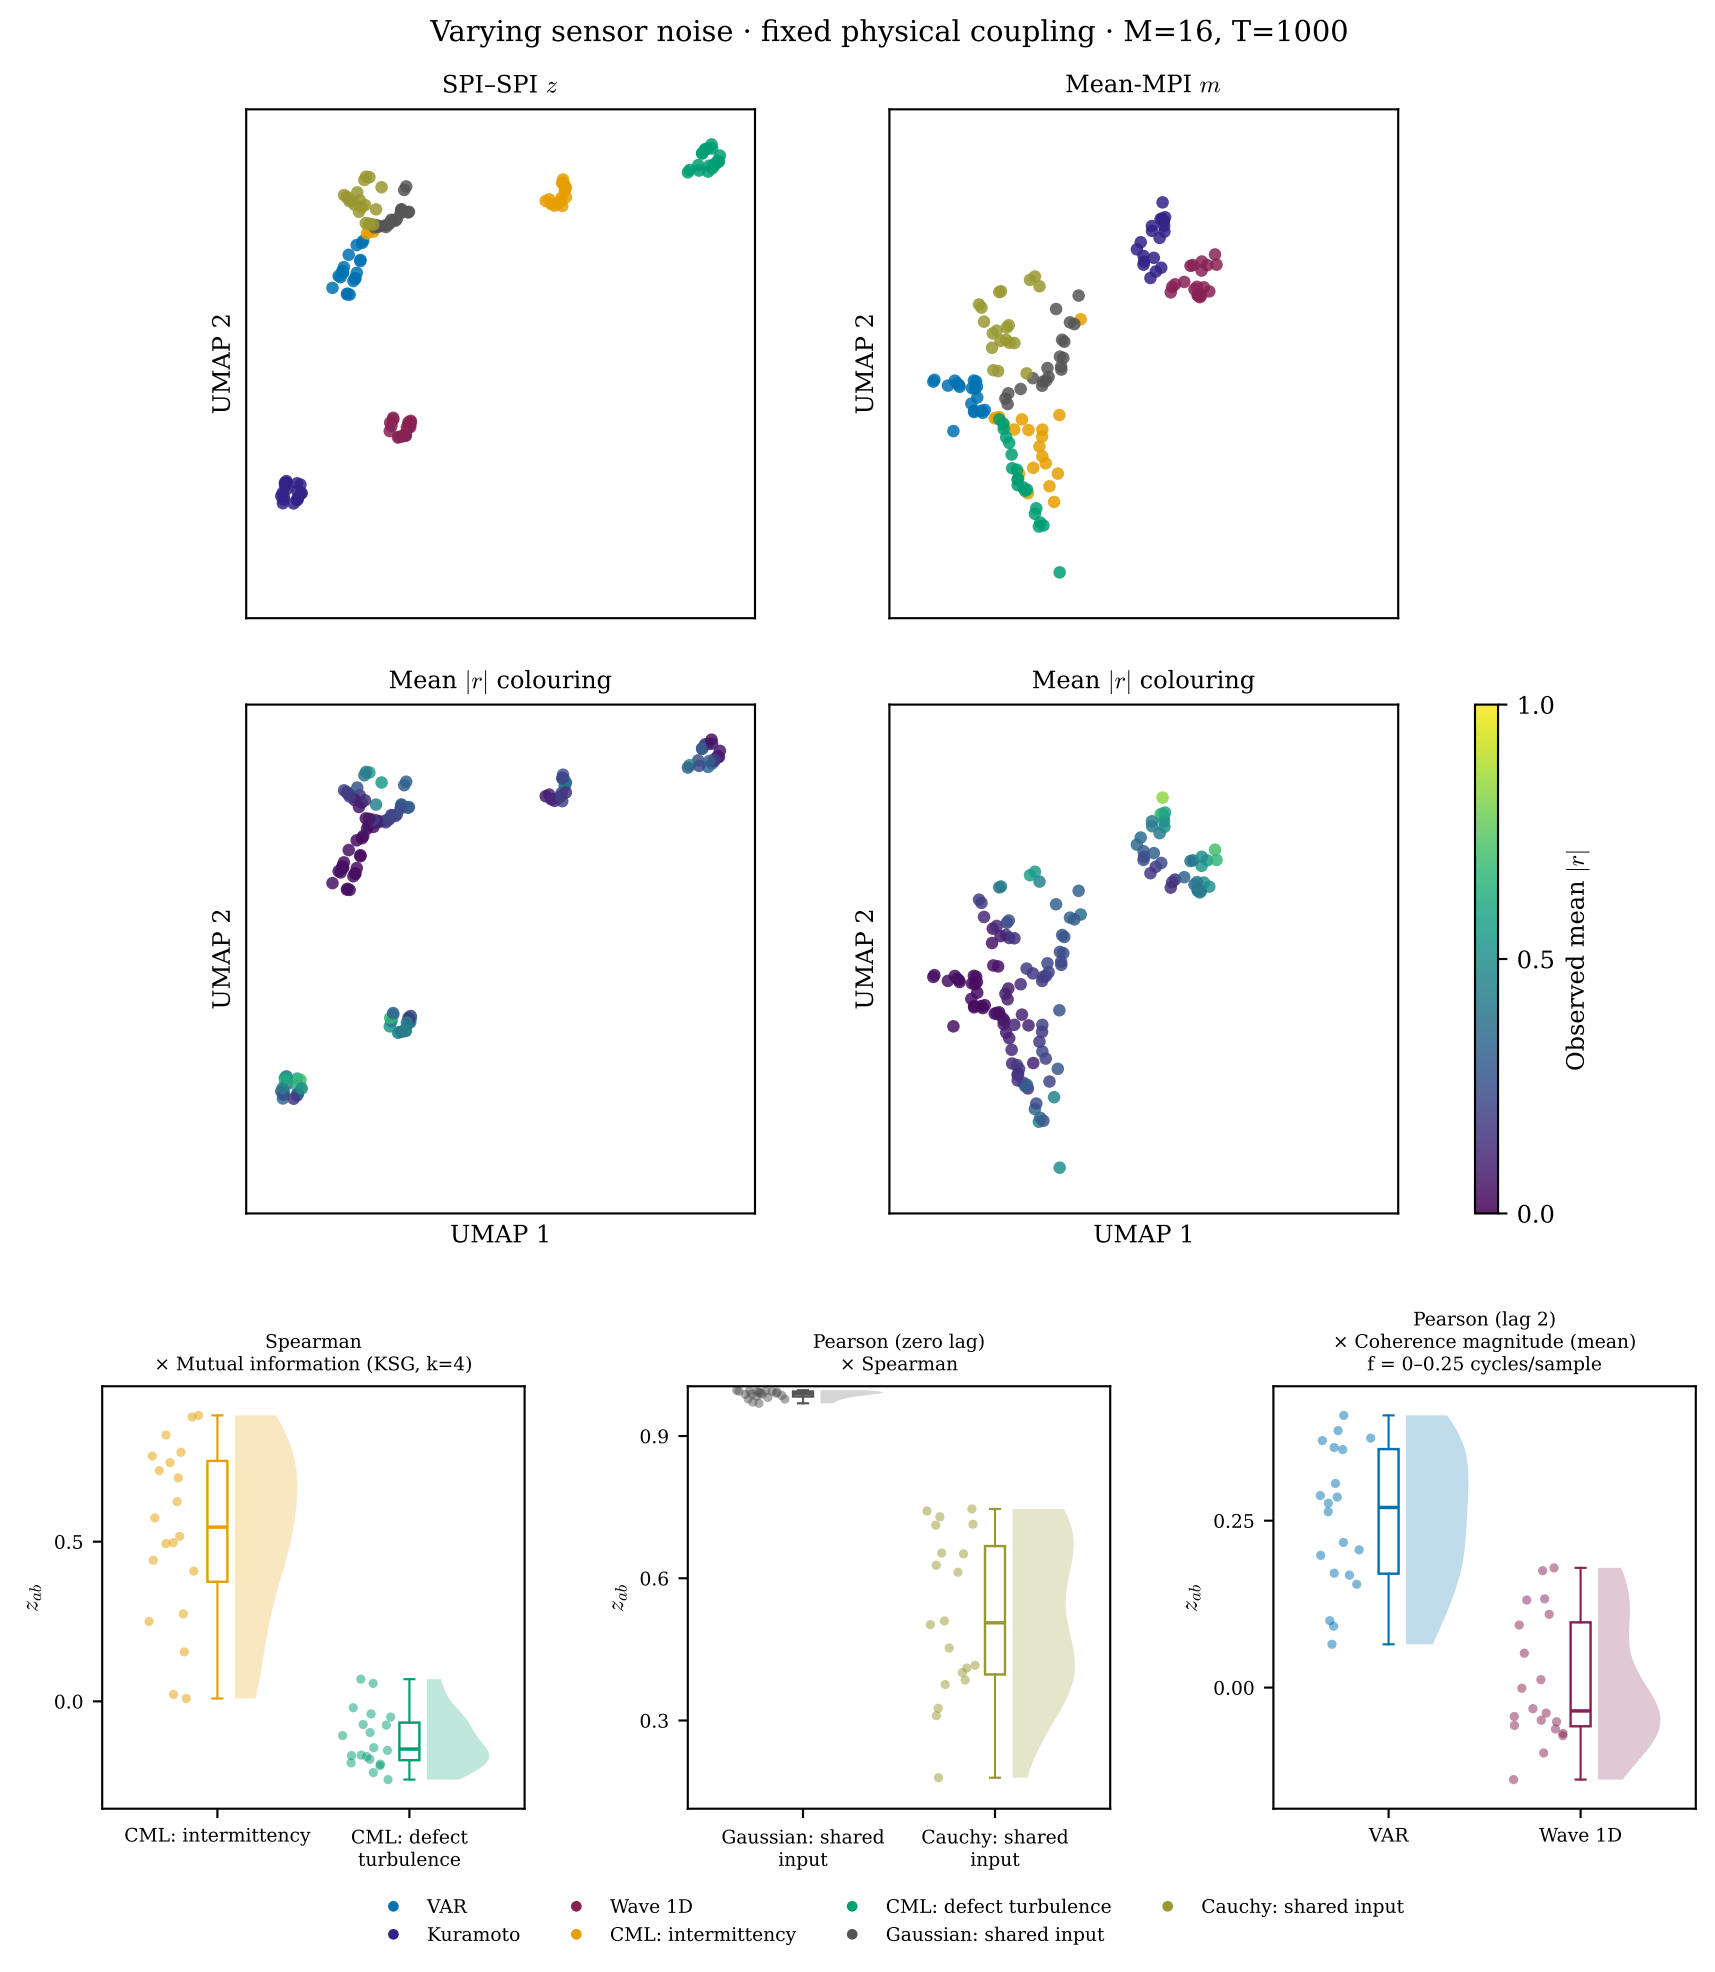

Varying sensor noise · fixed physical coupling · M=16, T=1000
SPI–SPI z
Mean-MPI m
Mean $|r|$ colouring
Mean $|r|$ colouring
UMAP 2
UMAP 2
UMAP 2
UMAP 2
UMAP 1
UMAP 1
Observed mean $|r|$
1.0
0.5
0.0
Spearman
× Mutual information (KSG, k=4)
Pearson (zero lag)
× Spearman
Pearson (lag 2)
× Coherence magnitude (mean)
f = 0–0.25 cycles/sample
z_{ab}
0.5
0.0
0.9
0.6
0.3
0.25
0.00
CML: intermittency
CML: defect turbulence
Gaussian: shared input
Cauchy: shared input
VAR
Wave 1D
VAR
Kuramoto
CML: intermittency
CML: defect turbulence
Gaussian: shared input
Cauchy: shared input