ComplianceHub™

The DDS


Coming Soon
ComplianceHub™
Document Management
Document Development
Risk Management
Training Management
EPA Management
A TAUS PRODUCT
Admin Page
Log Out
DMS
DDS
RMS
TMS
EPAMS

Document Development System (DDS)

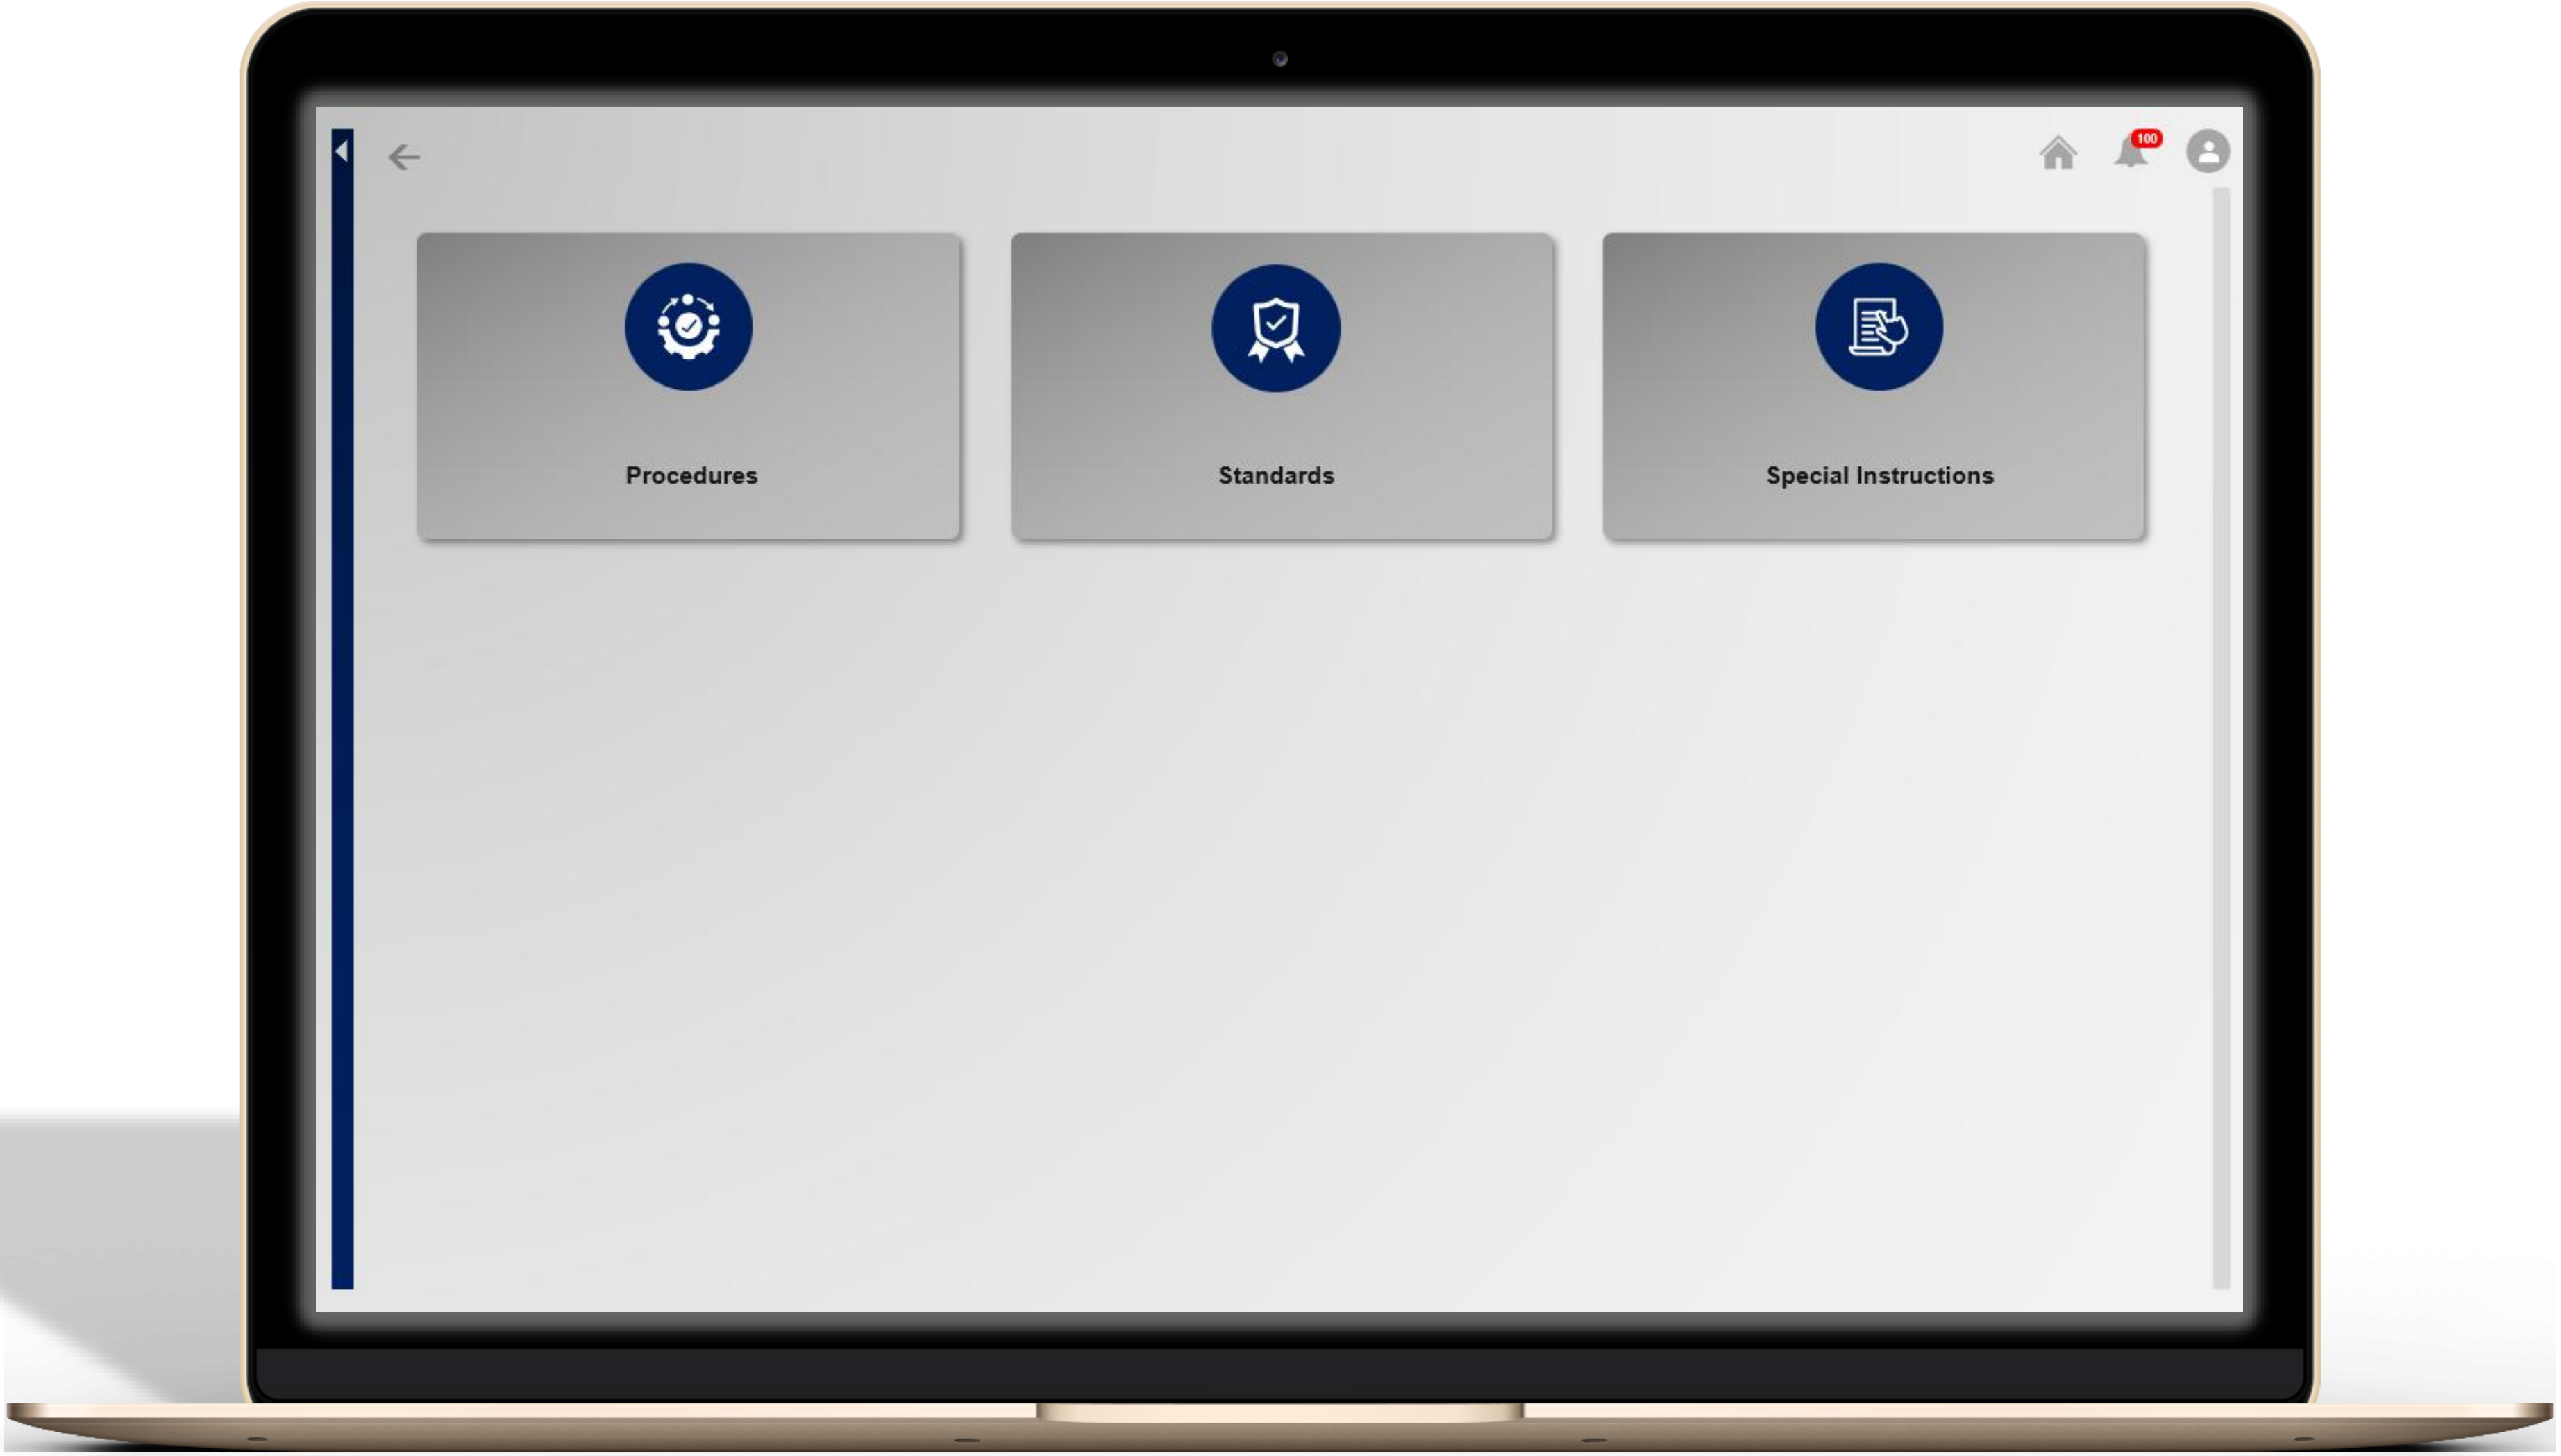

Document Development System Description

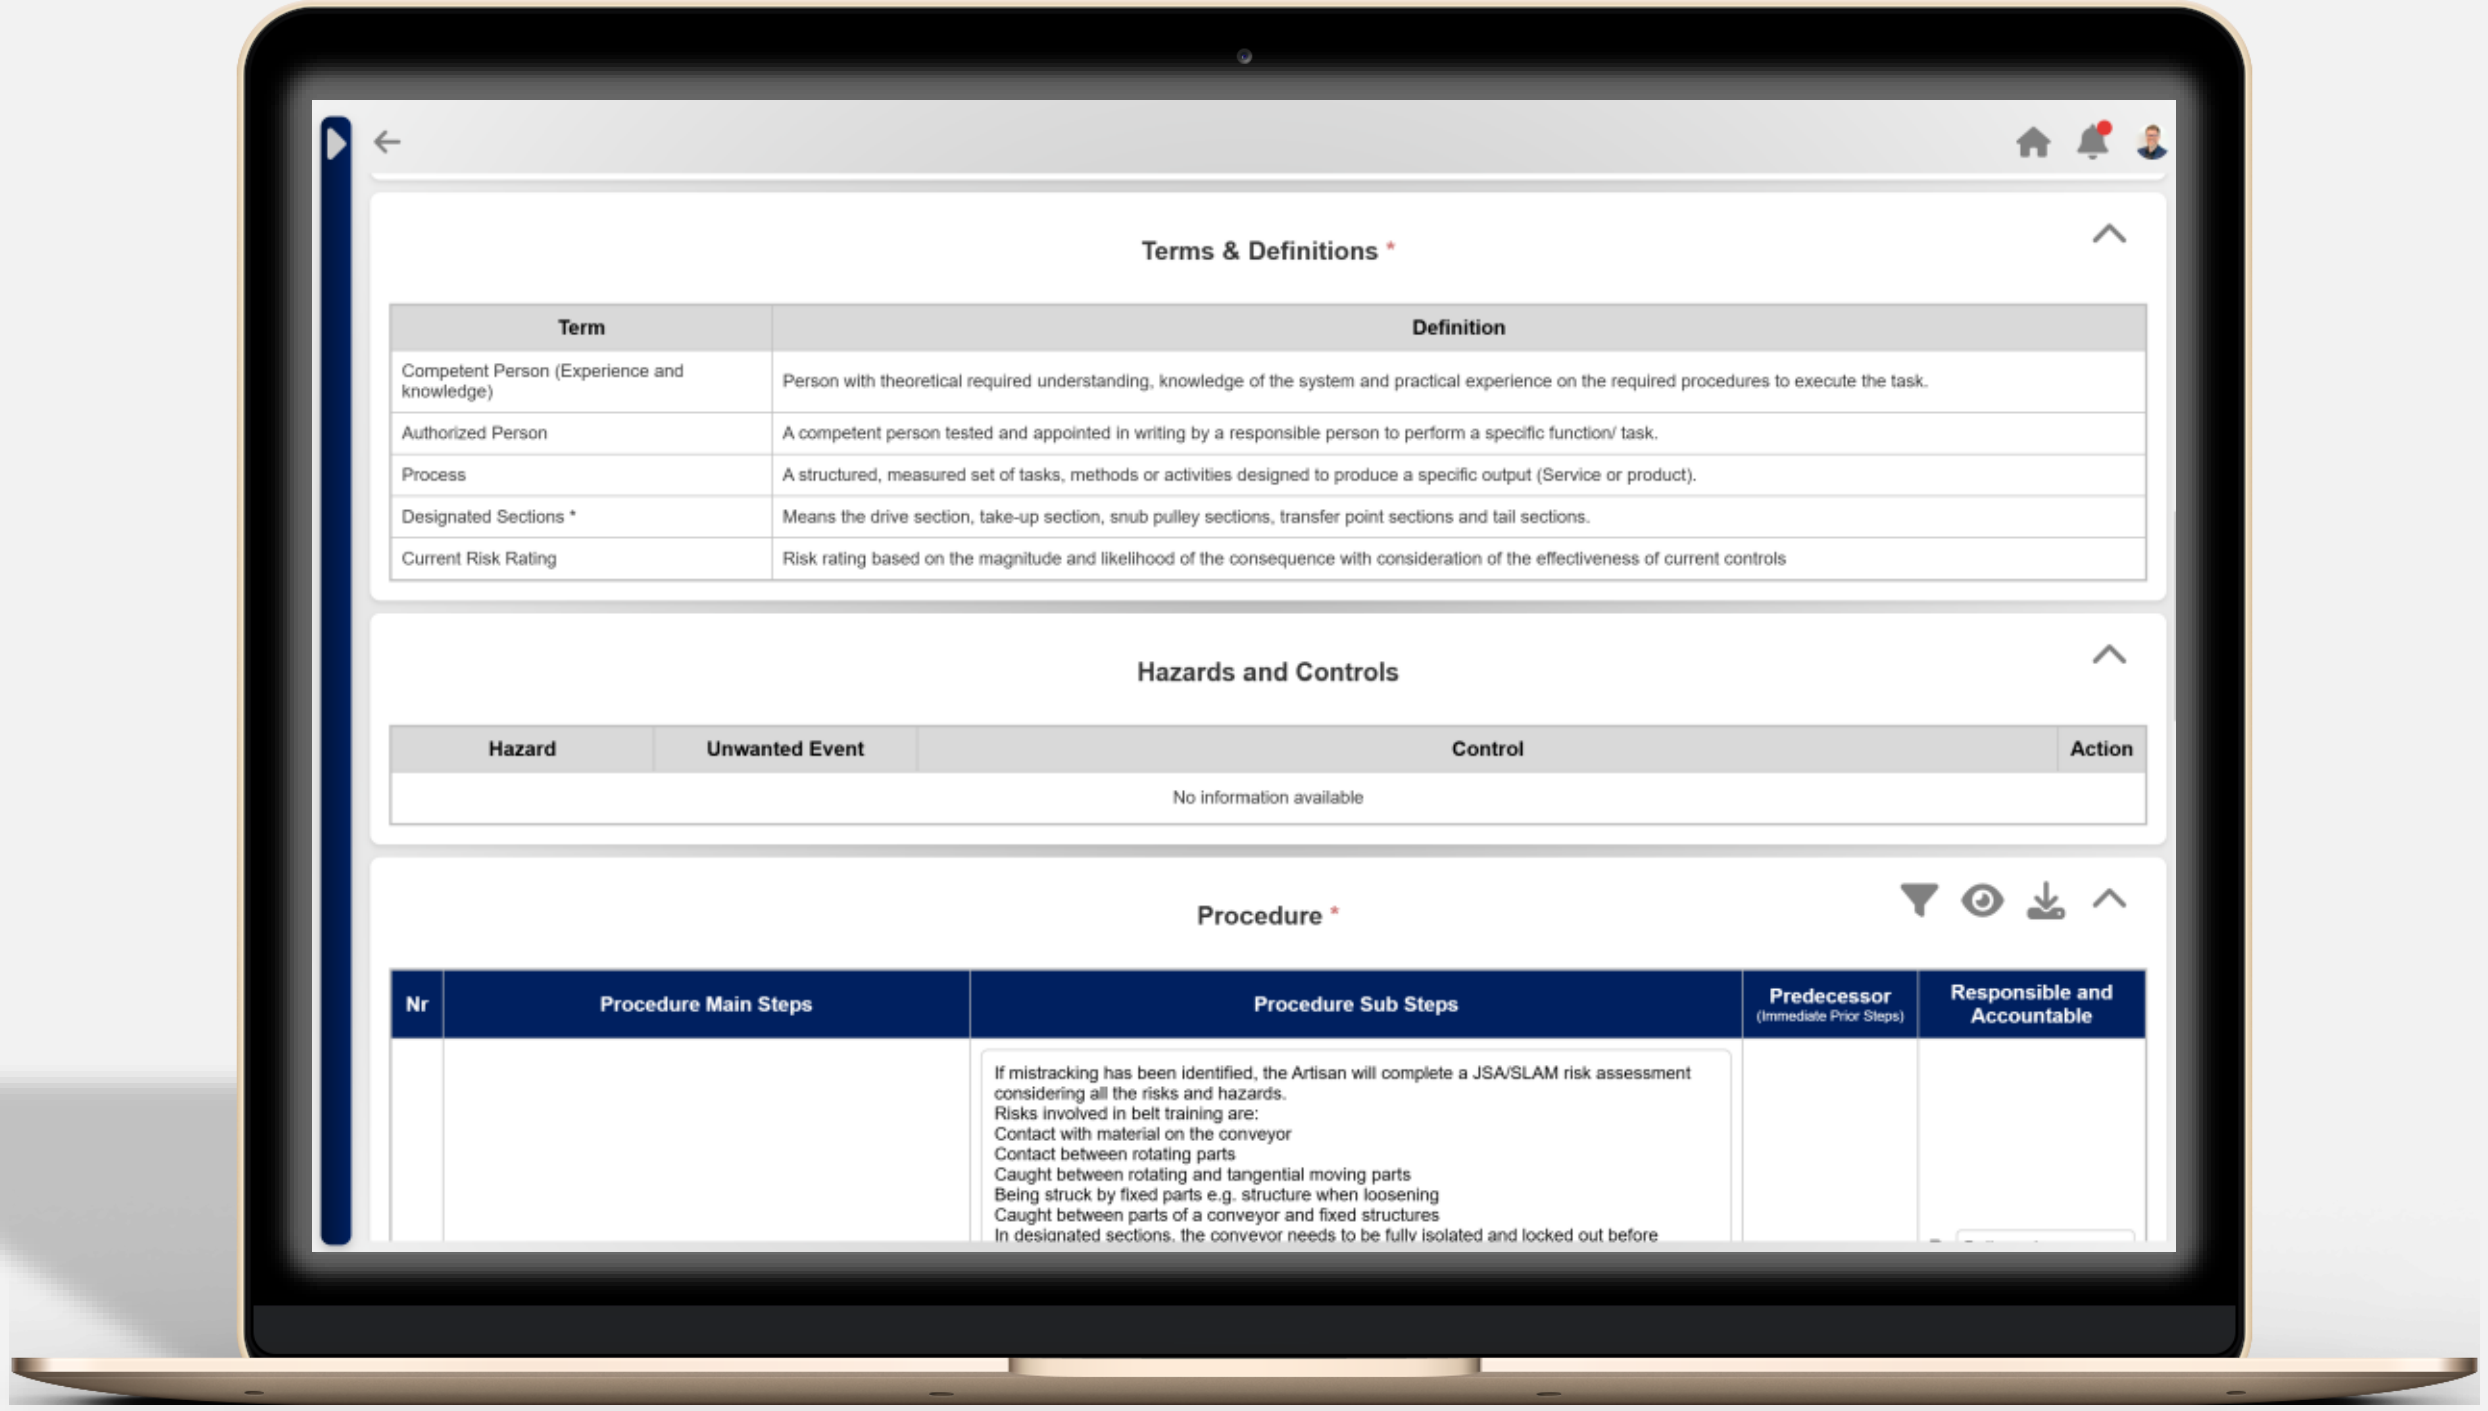

Seamless Document Development & Updates:
Enables fast development and updates of professional documents using client specific templates.

Streamlined Editing and Collaboration:
Approved users can collaboratively add content and make live edits, reducing development cycle time.

Automated Flow Charts for Procedures:
For documents classified as procedures, the system automatically generates flow charts to visually represent each step.

Pre-approved Standard Information:
Standard elements such as PPE requirements, tools, abbreviations, and definitions are stored in a shared library, minimizing duplication and promoting consistency.

Client-Specific Output Format:
Finalized documents are published directly into the client's Word templates, preserving their layout, branding, and formatting standards.

AI-Powered Language Assistance (Optional):
Integrated with integrated with OpenAI's GPR4.O to allow users to rewrite or refine sections of documents, improving clarity, grammar, and tone where needed, only if the client enables this functionality.

Example: DDS Procedure Output

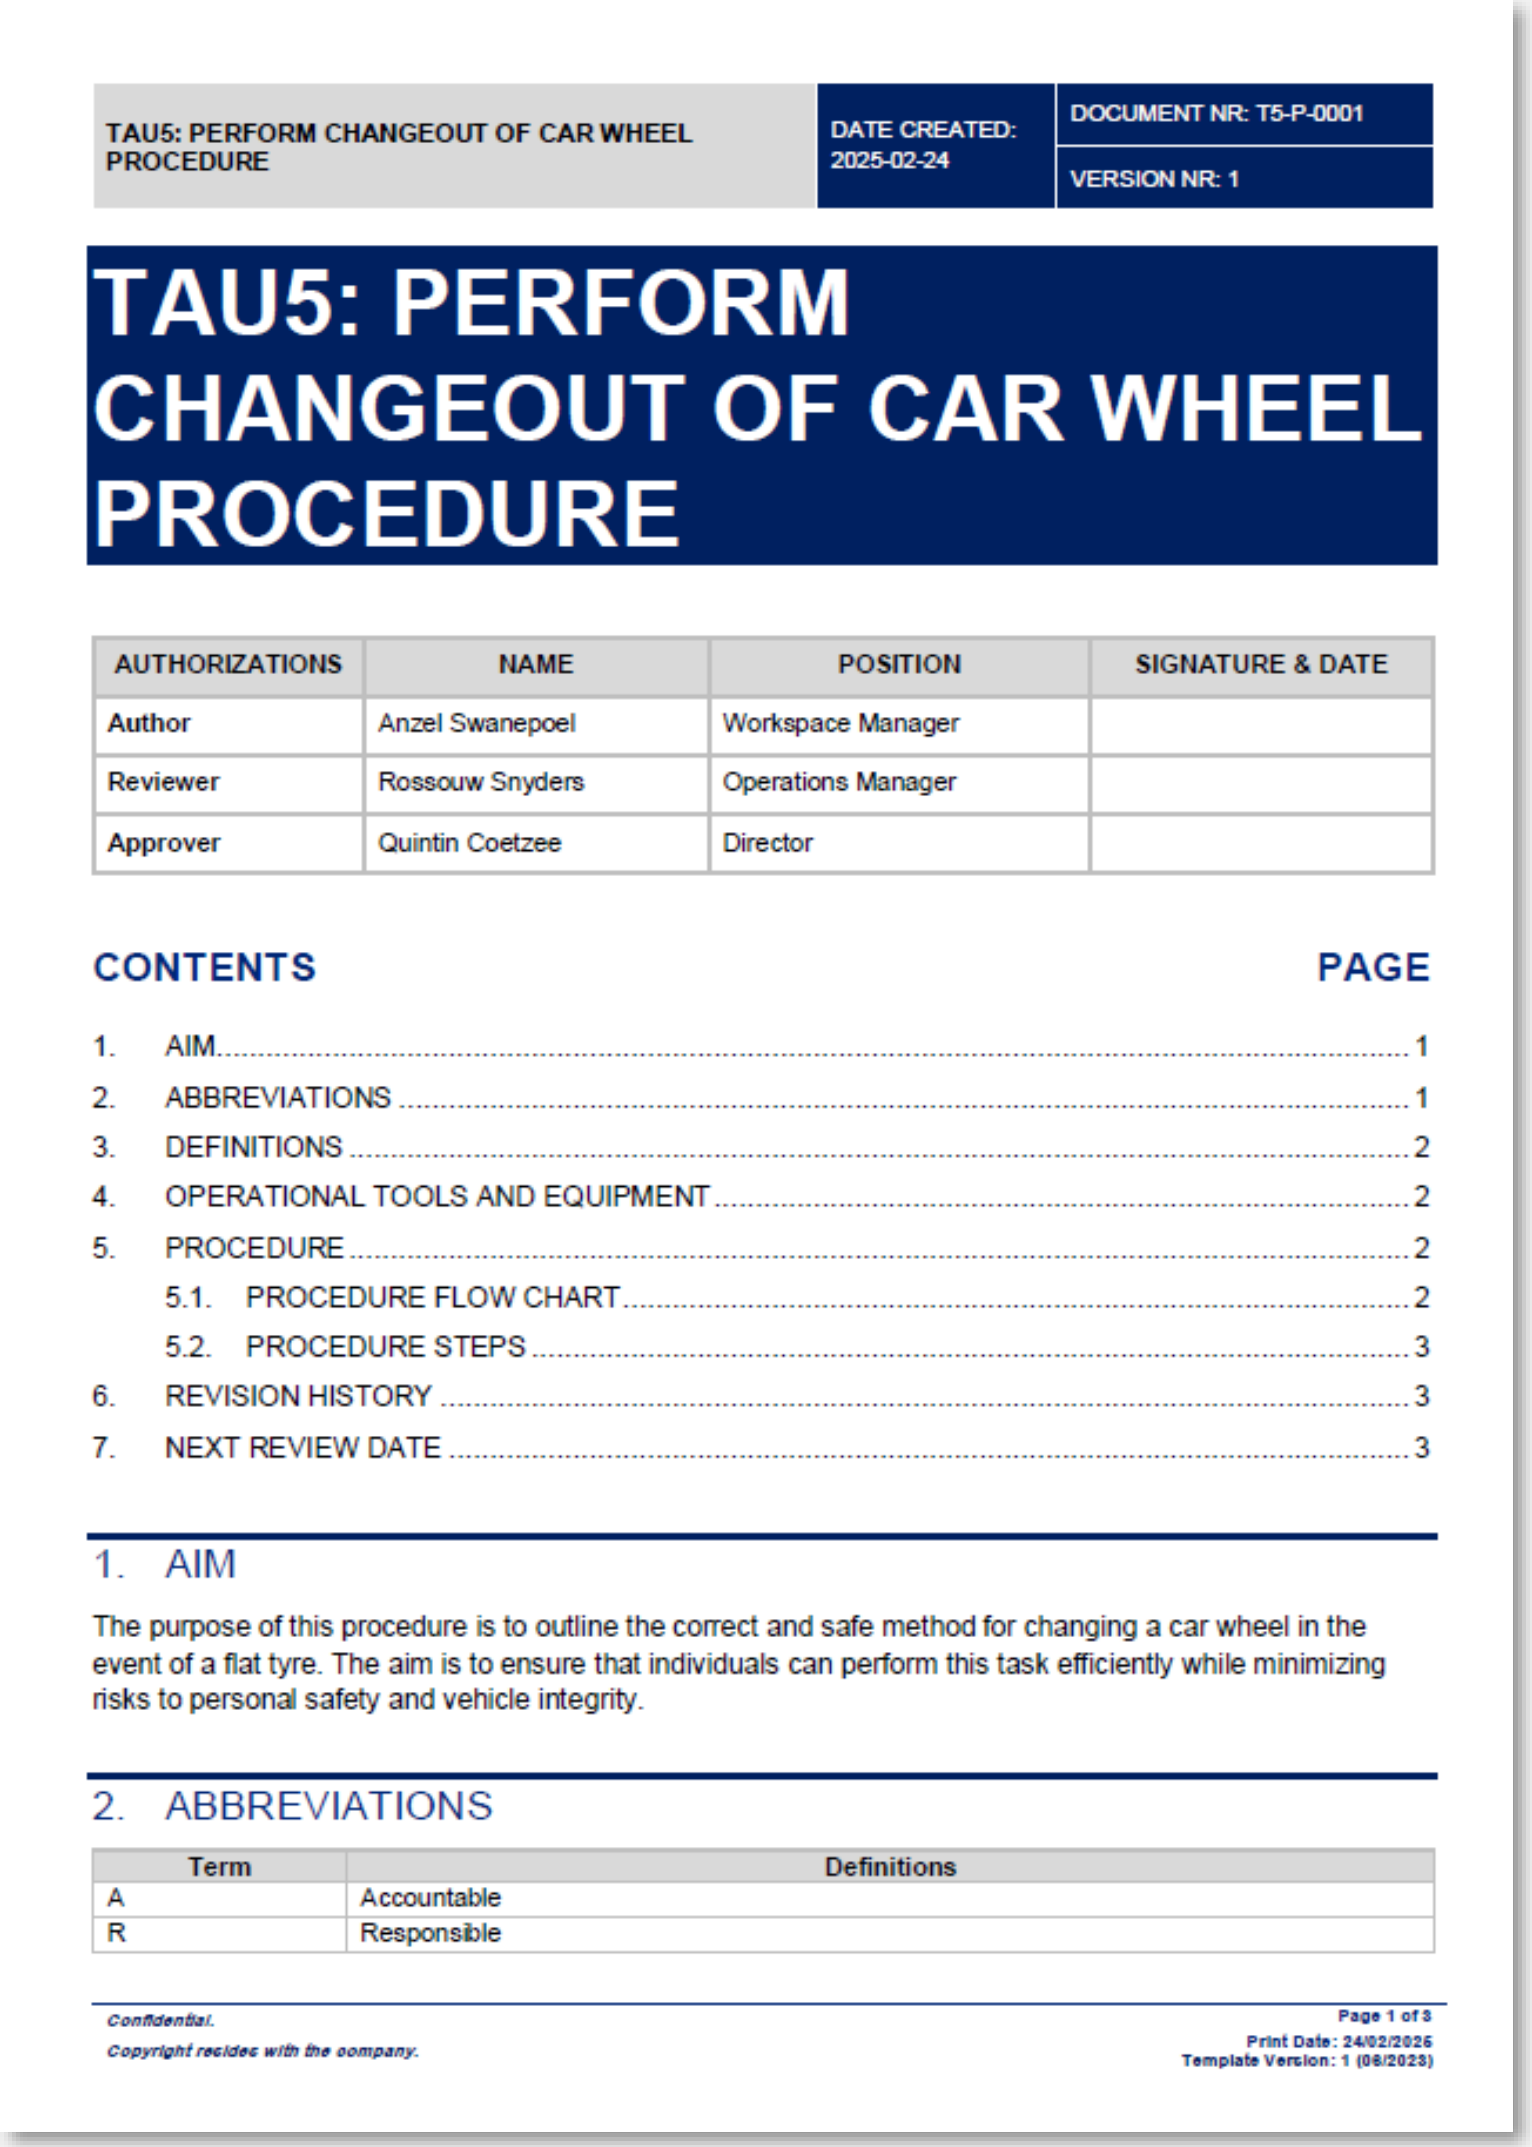

TAU5: PERFORM CHANGEOUT OF CAR WHEEL PROCEDURE	DATE CREATED: 2025-02-24	DOCUMENT NR: T5-P-0001 VERSION NR: 1

TAU5: PERFORM CHANGEOUT OF CAR WHEEL PROCEDURE

AUTHORIZATIONS	NAME	POSITION	SIGNATURE & DATE
Author	Anzel Swanepoel	Workspace Manager	
Reviewer	Rossouw Snyders	Operations Manager	
Approver	Quintin Coetzee	Director	

CONTENTS **PAGE**

1. AIM

The purpose of this procedure is to outline the correct and safe method for changing a car wheel in the event of a flat tyre. The aim is to ensure that individuals can perform this task efficiently while minimizing risks to personal safety and vehicle integrity.

2. ABBREVIATIONS

Term	Definitions
A	Accountable
R	Responsible

Confidential.
Copyright resides with the company.
Page 1 of 3
Print Date: 24/02/2025
Template Version: 1 (06/2023)

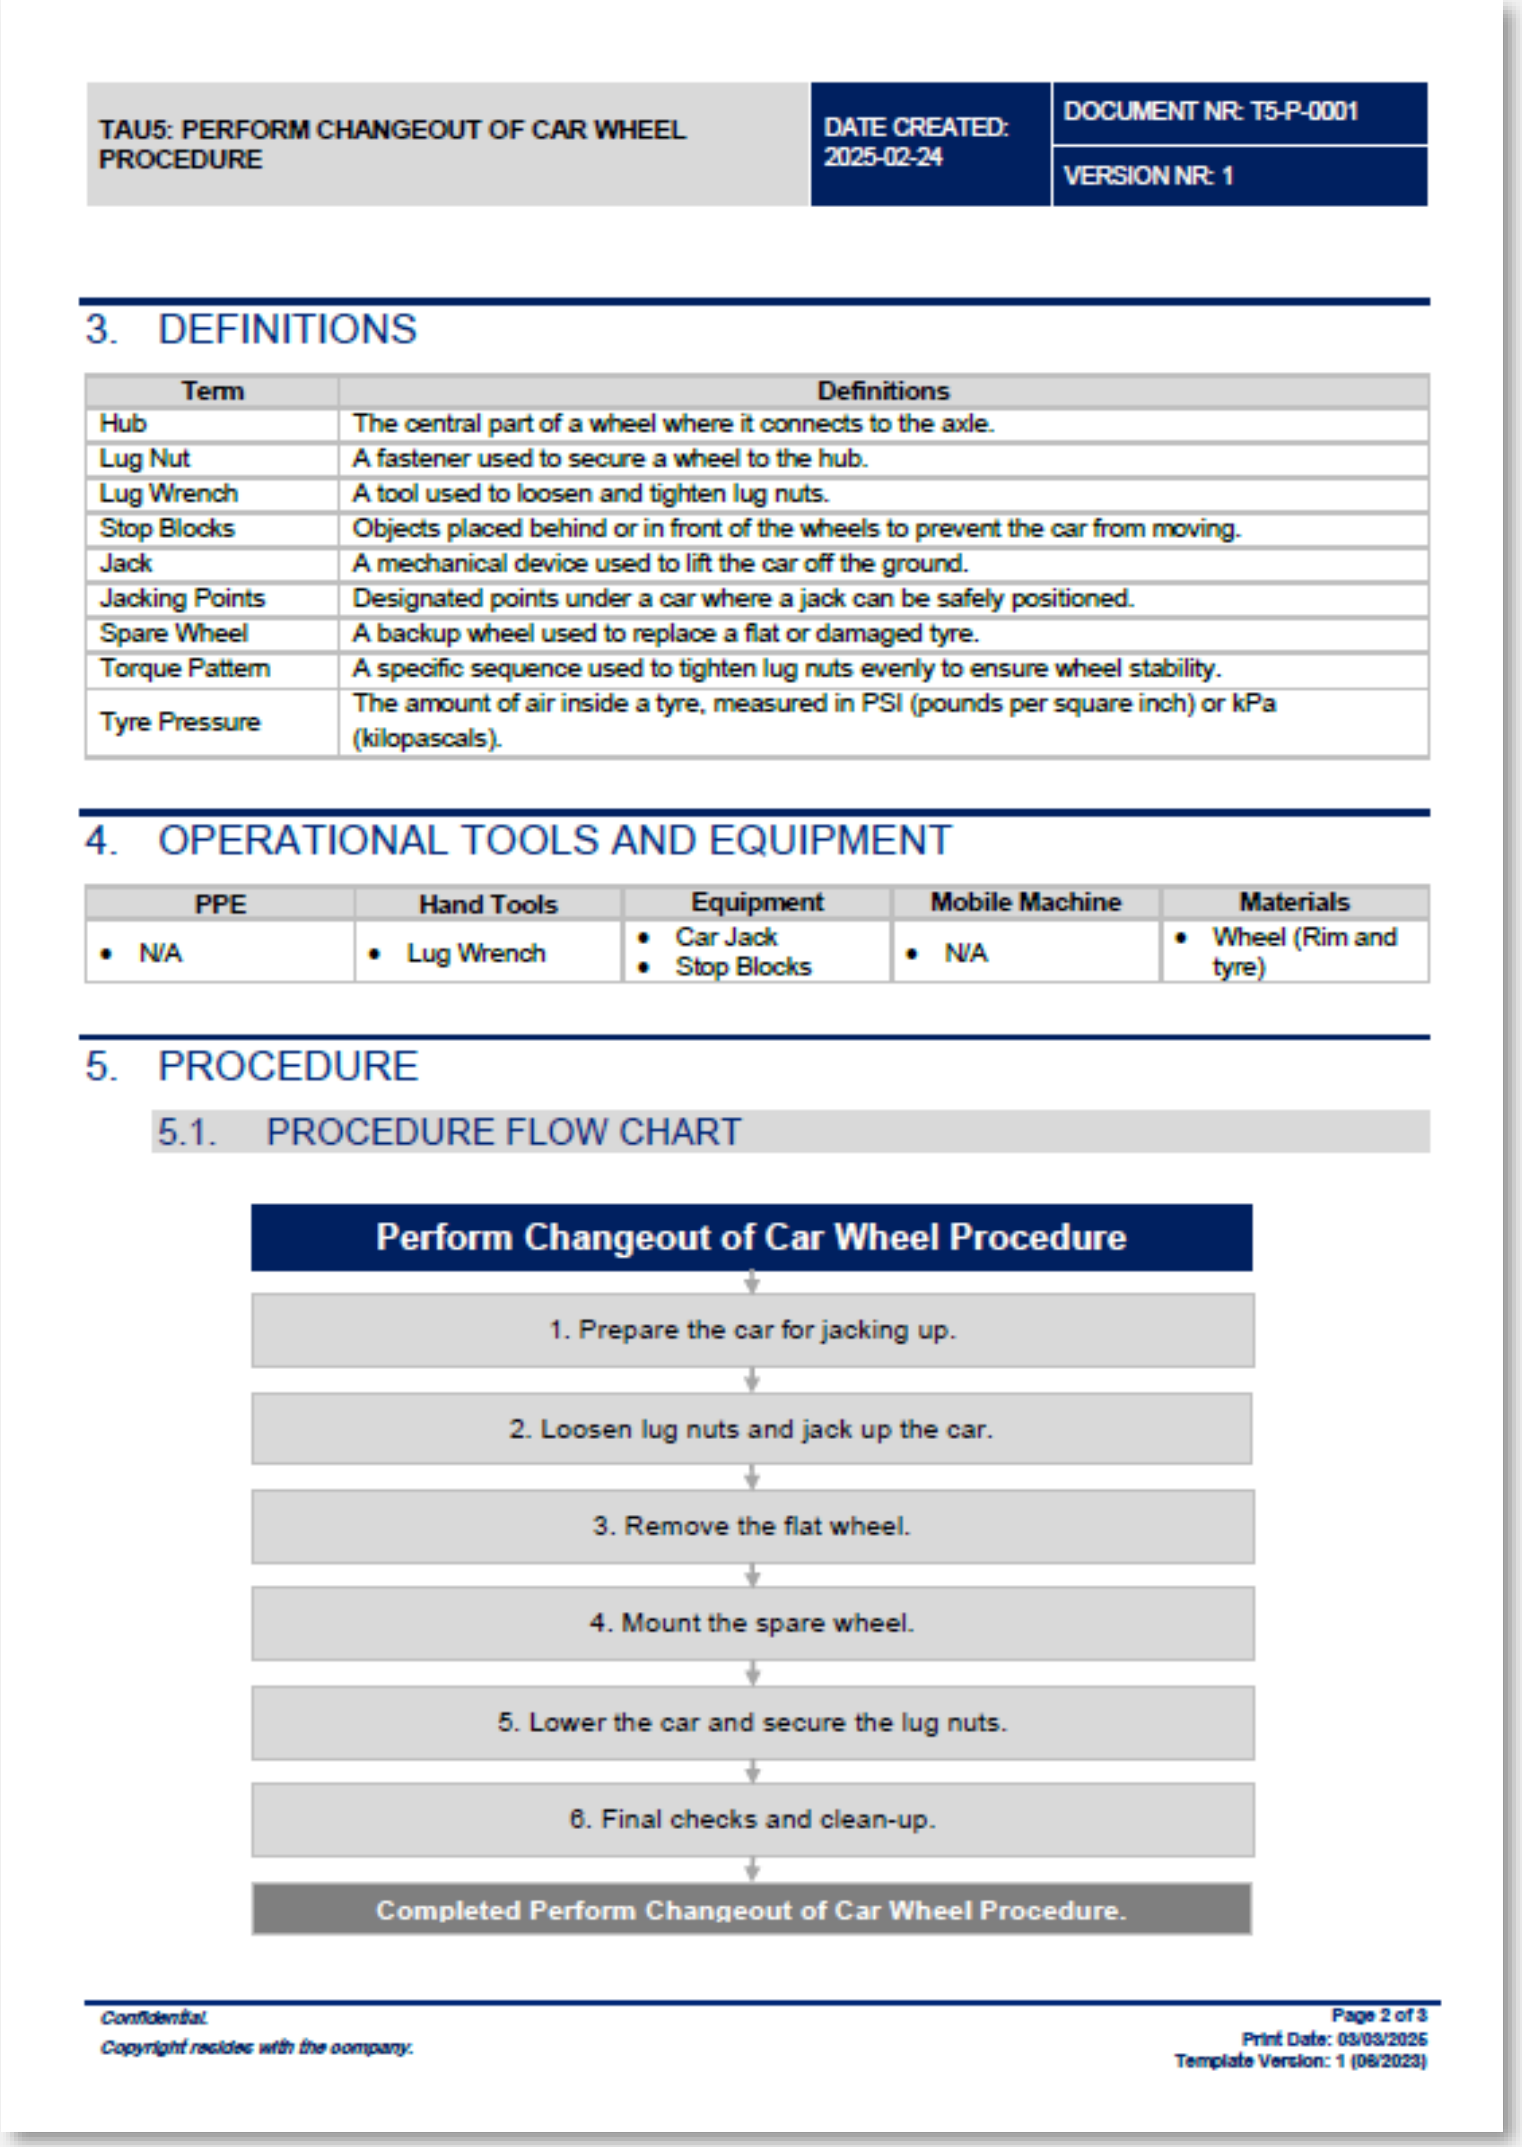

TAU5: PERFORM CHANGEOUT OF CAR WHEEL PROCEDURE	DATE CREATED: 2025-02-24	DOCUMENT NR: T5-P-0001 VERSION NR: 1

3. DEFINITIONS

Term	Definitions
Hub	The central part of a wheel where it connects to the axle.
Lug Nut	A fastener used to secure a wheel to the hub.
Lug Wrench	A tool used to loosen and tighten lug nuts.
Stop Blocks	Objects placed behind or in front of the wheels to prevent the car from moving.
Jack	A mechanical device used to lift the car off the ground.
Jacking Points	Designated points under a car where a jack can be safely positioned.
Spare Wheel	A backup wheel used to replace a flat or damaged tyre.
Torque Pattern	A specific sequence used to tighten lug nuts evenly to ensure wheel stability.
Tyre Pressure	The amount of air inside a tyre, measured in PSI (pounds per square inch) or kPa (kilopascals).

4. OPERATIONAL TOOLS AND EQUIPMENT

PPE	Hand Tools	Equipment	Mobile Machine	Materials
• N/A	• Lug Wrench	• Car Jack • Stop Blocks	• N/A	• Wheel (Rim and tyre)

5. PROCEDURE

5.1. PROCEDURE FLOW CHART

Perform Changeout of Car Wheel Procedure
1. Prepare the car for jacking up.
2. Loosen lug nuts and jack up the car.
3. Remove the flat wheel.
4. Mount the spare wheel.
5. Lower the car and secure the lug nuts.
6. Final checks and clean-up.

Completed Perform Changeout of Car Wheel Procedure.

Confidential.
Copyright resides with the company.
Page 2 of 3
Print Date: 03/03/2025
Template Version: 1 (06/2023)

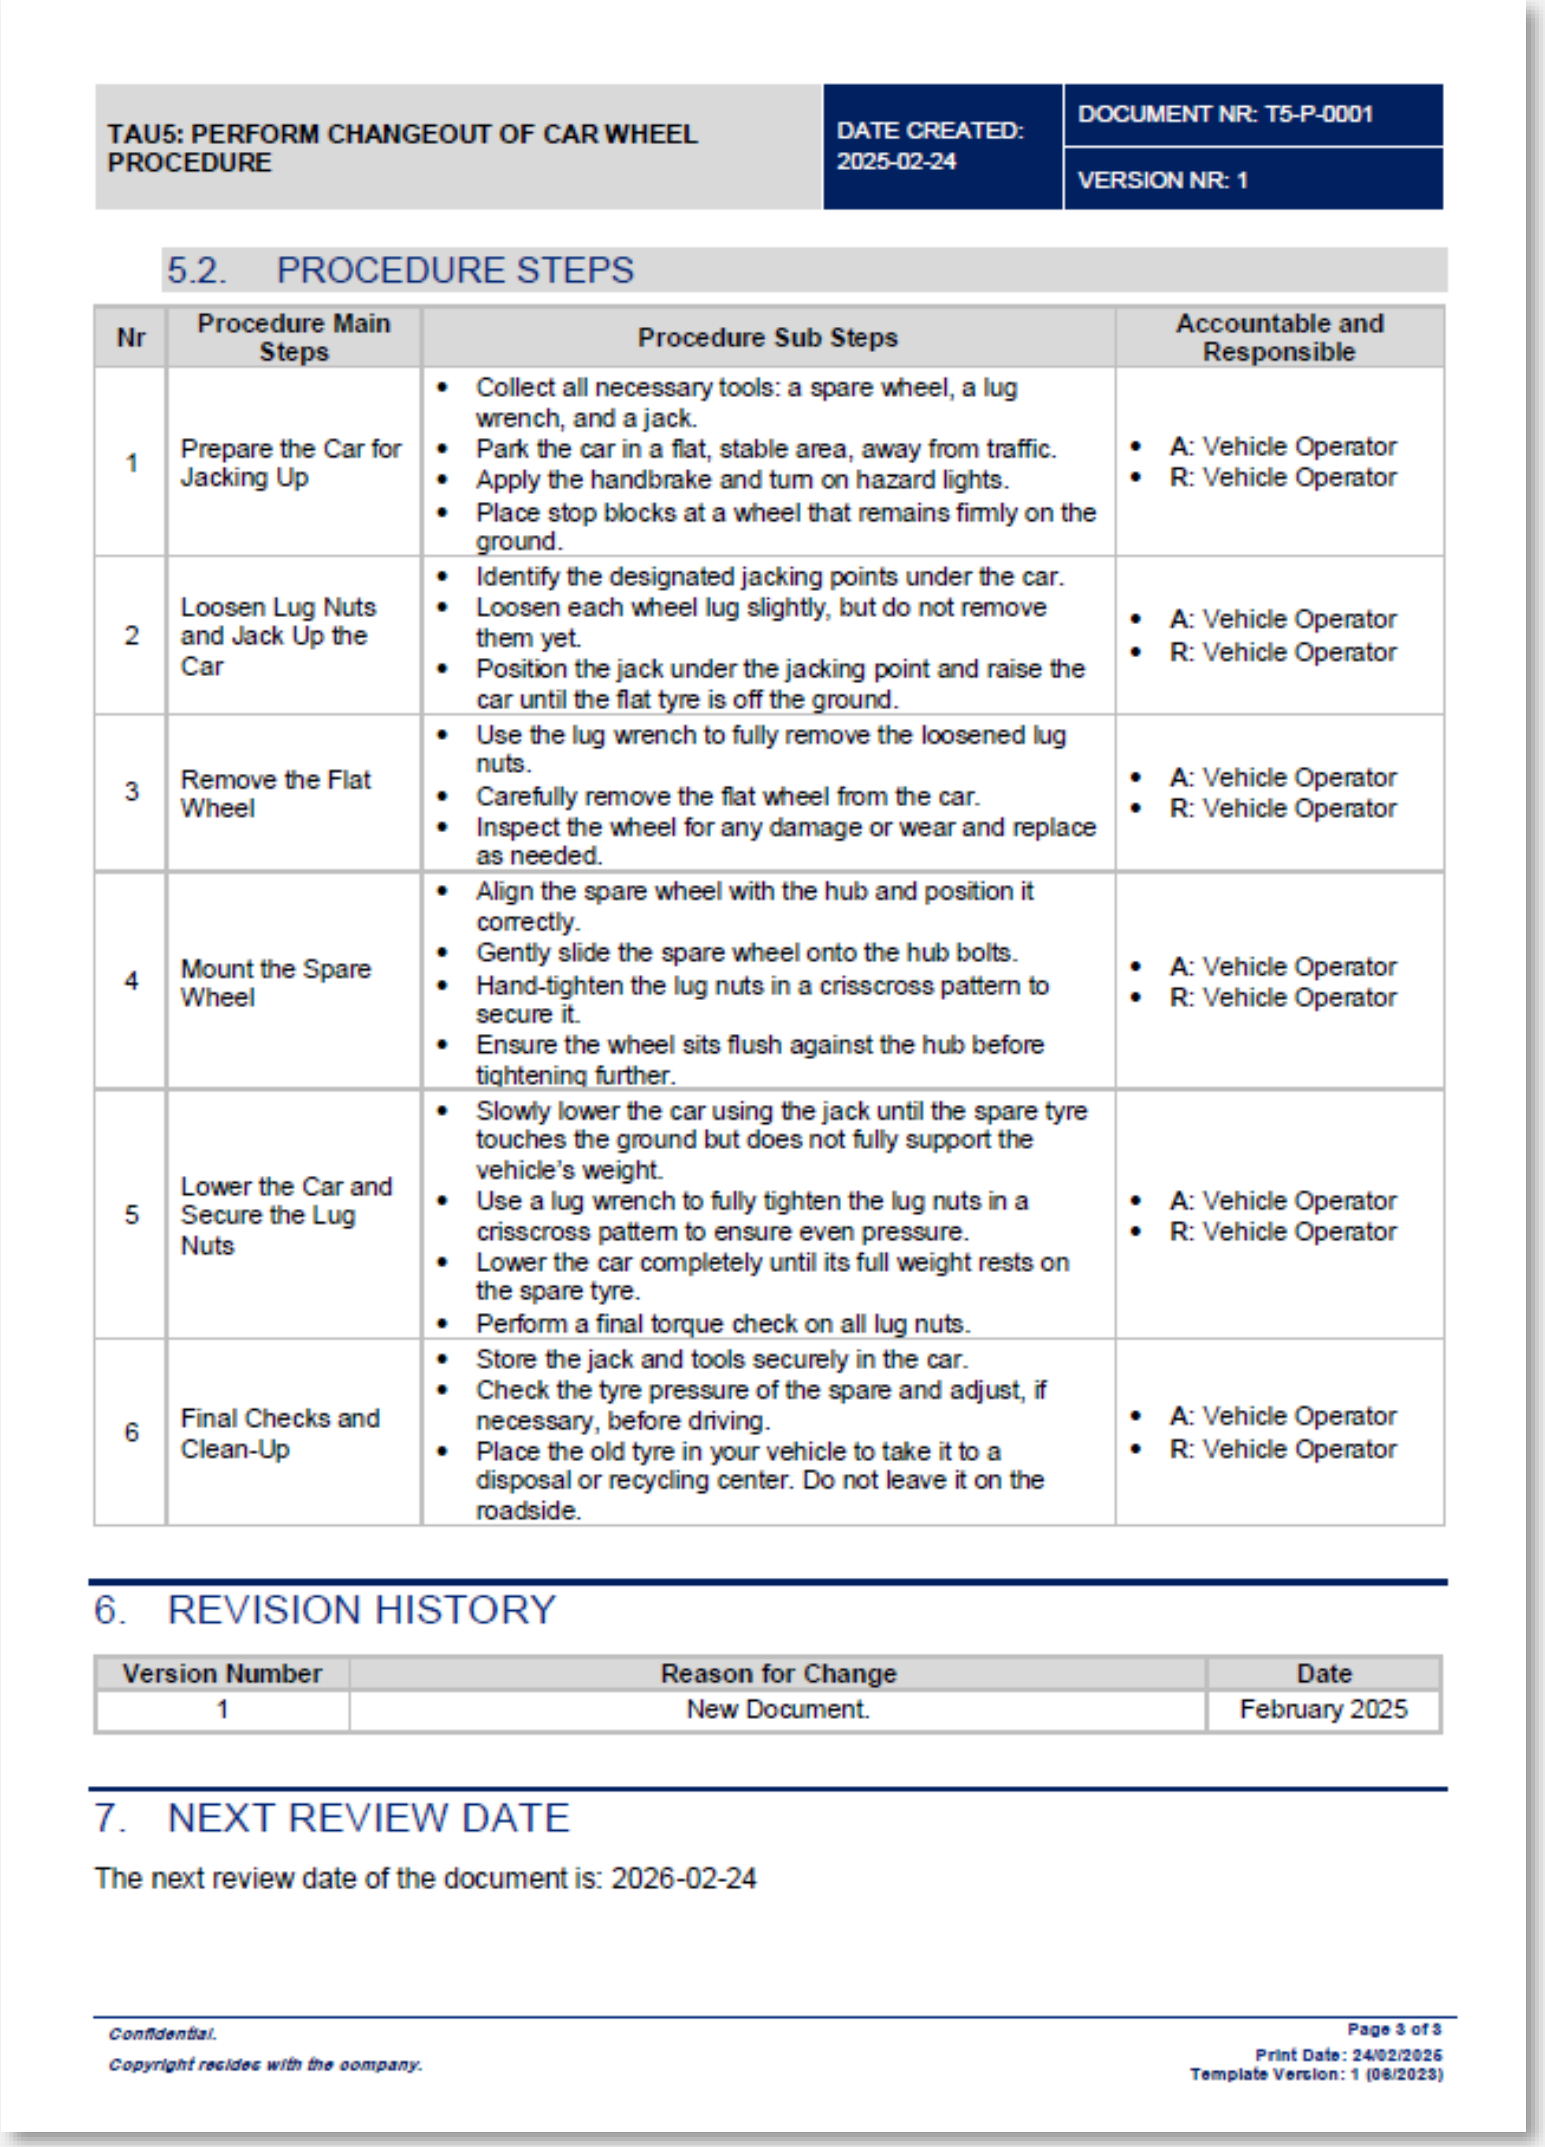

TAU5: PERFORM CHANGEOUT OF CAR WHEEL PROCEDURE	DATE CREATED: 2025-02-24	DOCUMENT NR: T5-P-0001 VERSION NR: 1

5.2. PROCEDURE STEPS

Nr	Procedure Main Steps	Procedure Sub Steps	Accountable and Responsible
1	Prepare the Car for Jacking Up	• Collect all necessary tools: a spare wheel, a lug wrench, and a jack. • Park the car in a flat, stable area, away from traffic. • Apply the handbrake and turn on hazard lights. • Place stop blocks at a wheel that remains firmly on the ground.	• A: Vehicle Operator • R: Vehicle Operator
2	Loosen Lug Nuts and Jack Up the Car	• Identify the designated jacking points under the car. • Loosen each wheel lug slightly, but do not remove them yet. • Position the jack under the jacking point and raise the car until the flat tyre is off the ground.	• A: Vehicle Operator • R: Vehicle Operator
3	Remove the Flat Wheel	• Use the lug wrench to fully remove the loosened lug nuts. • Carefully remove the flat wheel from the car. • Inspect the wheel for any damage or wear and replace as needed.	• A: Vehicle Operator • R: Vehicle Operator
4	Mount the Spare Wheel	• Align the spare wheel with the hub and position it correctly. • Gently slide the spare wheel onto the hub bolts. • Hand-tighten the lug nuts in a crisscross pattern to secure it. • Ensure the wheel sits flush against the hub before tightening further.	• A: Vehicle Operator • R: Vehicle Operator
5	Lower the Car and Secure the Lug Nuts	• Slowly lower the car using the jack until the spare tyre touches the ground but does not fully support the vehicle's weight. • Use a lug wrench to fully tighten the lug nuts in a crisscross pattern to ensure even pressure. • Lower the car completely until its full weight rests on the spare tyre. • Perform a final torque check on all lug nuts.	• A: Vehicle Operator • R: Vehicle Operator
6	Final Checks and Clean-Up	• Store the jack and tools securely in the car. • Check the tyre pressure of the spare and adjust, if necessary, before driving. • Place the old tyre in your vehicle to take it to a disposal or recycling center. Do not leave it on the roadside.	• A: Vehicle Operator • R: Vehicle Operator

6. REVISION HISTORY

Version Number	Reason for Change	Date
1	New Document.	February 2025

7. NEXT REVIEW DATE

The next review date of the document is: 2026-02-24

Confidential.
Copyright resides with the company.
Page 3 of 3
Print Date: 24/02/2025
Template Version: 1 (06/2023)