


2


1

1. Material must be 6061-T6 aluminium
2. Side cuts must allow provided beams to sit within a 6 in diameter profile
3. Side holes must allow for bolts to thread into provided beams  
If needed a #29 drill can be used to widen holes
4. Break all edges
5. Axial through hole drilling operations will be finished by hand
6. Axial through holes must allow provided wire to pass through


B

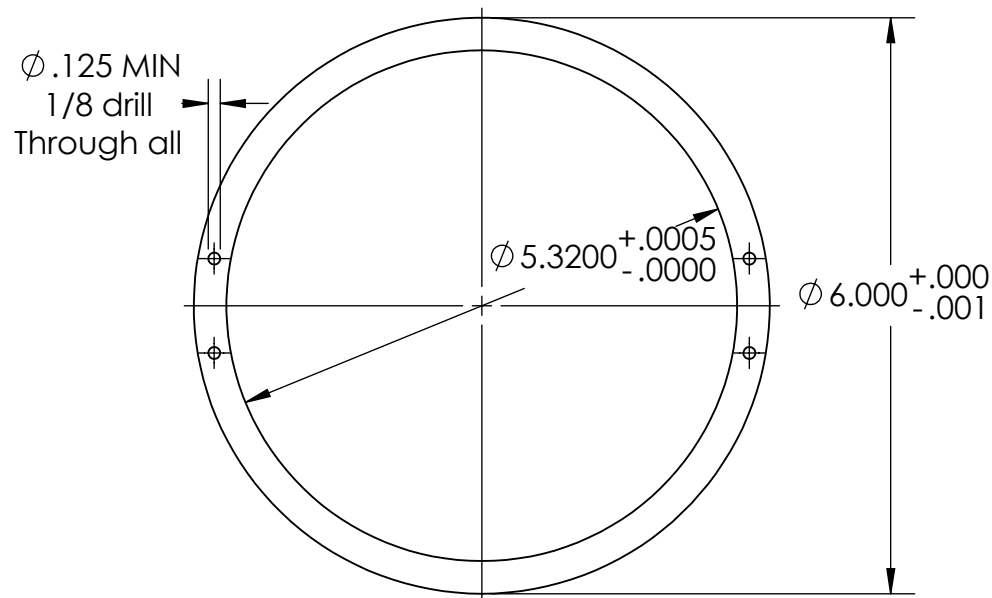

B

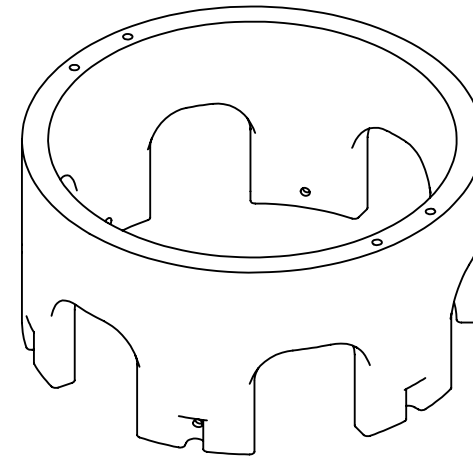

A

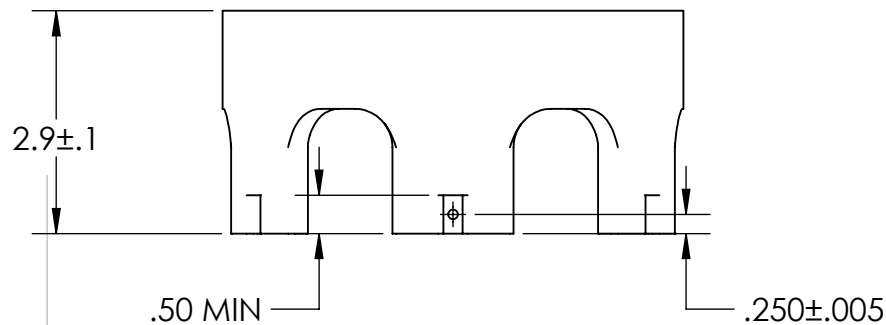

A

TITLE:

copvringv2

If an untoleranced portion is in question:  
Contact design representative at  
williamalexander3.1415@gmail.com

SCALE: 1:2.5

Quantity: 2

MATERIAL: 6061-T6

2

1