



Main interconnect

3 typical reference electrodes (E0-E2)


select one of E0-E2 and place respective R0-R2 for reference half-cell selection

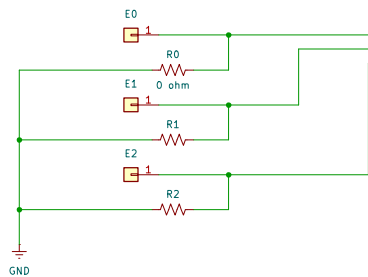

4E conductivity cell

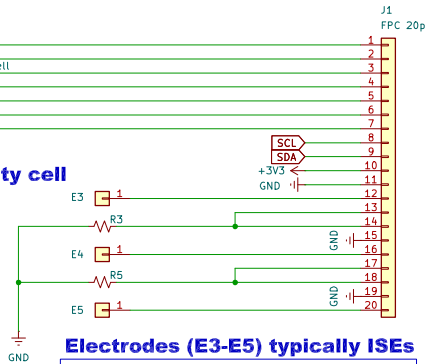

Qwiic Connector





Electrodes (E3-E5) typically ISEs

E4 & E5 are thermally pumped by R4 & R5 respectively.

Temperature Sensor

TMP119 (ADDR: 0x49)



<https://github.com/williamapardis/electrodePCB>

William Pardis

Sheet: /

File: electrodePCB.kicad_sch

Title: electrodePCB

Size: A4

KiCad E.D.A. 9.0.1

Date:

Rev: rE

Id: 1/1