Selvedge pant pattern

Front and back example, shaped like the website reference pattern.

TEST DRAFT 32″ waist · 40″ seat · 42″ total length

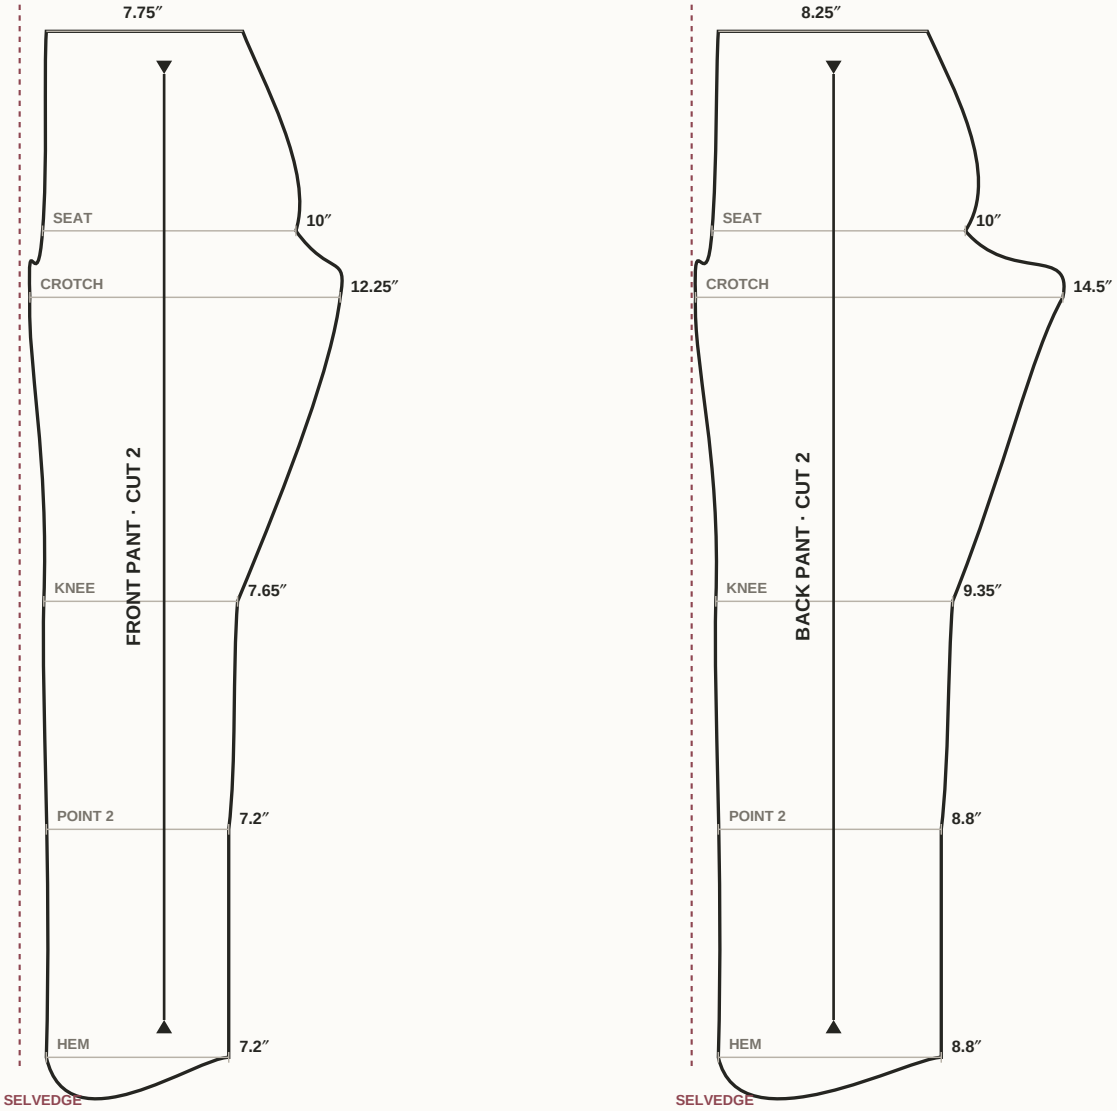

GUIDE

Align the marked outseam with the selvedge. Grainlines run lengthwise.

Use the horizontal marks for seat, crotch, knee, point 2, and hem levels.

Cut two front and two back panels, mirrored. Add the calculator's allowances.

Panel outseam 40½″. The separate 1½″ band makes the 42″ total length.

Curves are illustrative and pass through the website's calculated stations.

This drawing is reduced to fit. It is not a full-size cutting template.

Calculator guide lines: seat 7■″ · crotch 10½″ · knee 22½″ · point 2 31½″ · hem 40½″ below band attachment.