


Minnow AUV - general arrangement (mm)

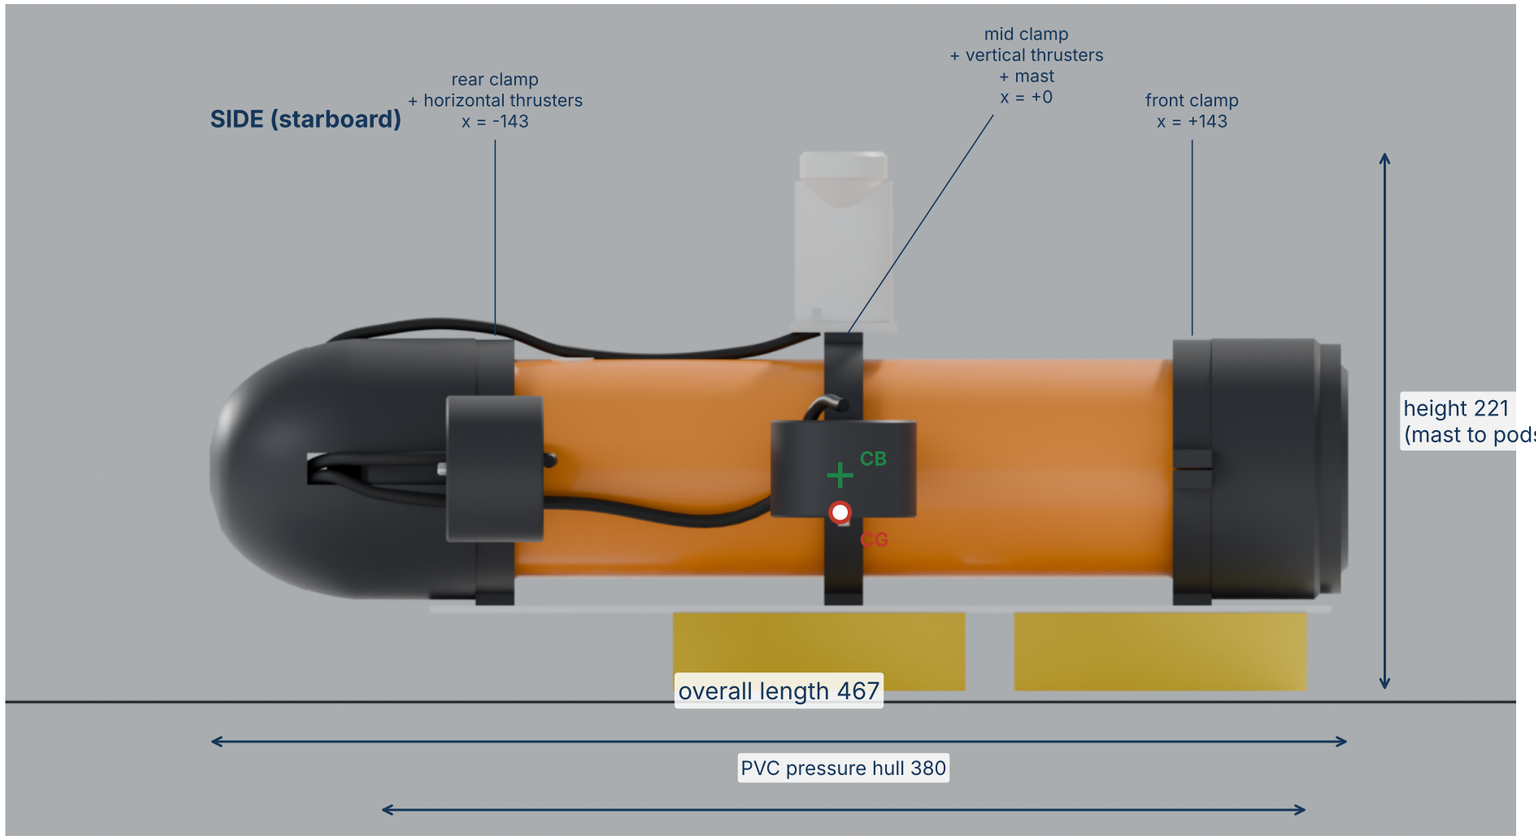

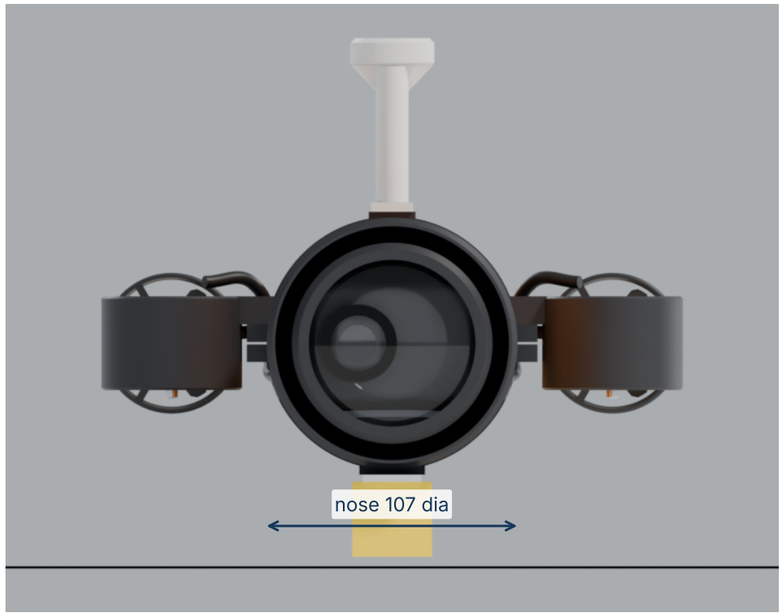

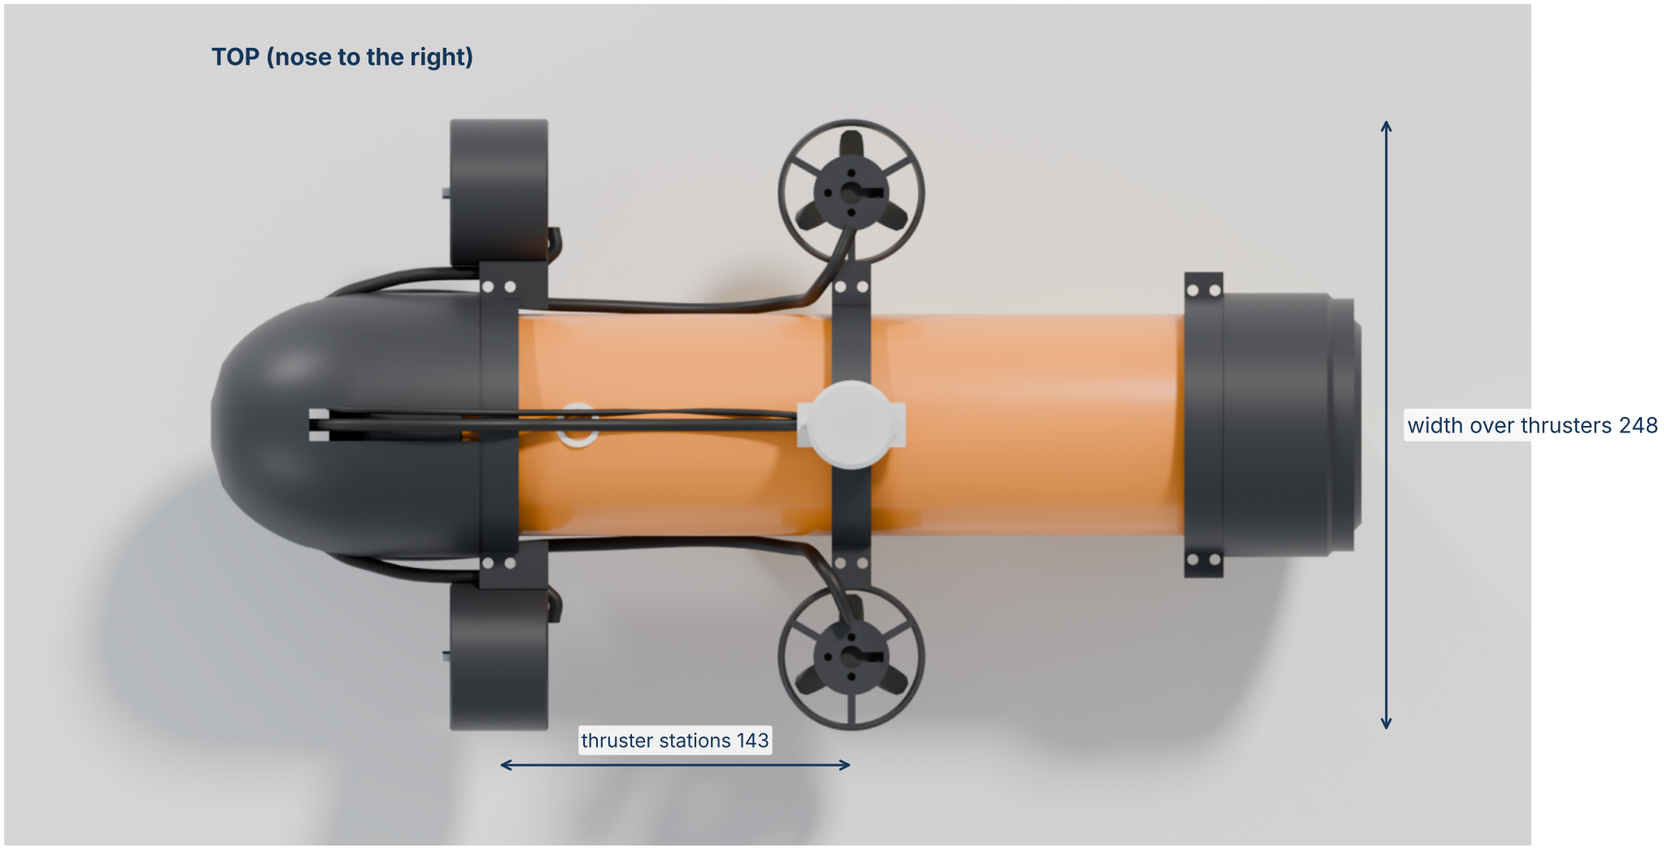

Item	Value
Mass ready to dive	3.35 kg
Displacement	3.40 L
Lead ballast (2 pods)	579 g
Reserve buoyancy	45 g (floats when off)
BG (stability)	15.2 mm
Pressure hull	PVC-U 90 × 4.3 mm, L 380
End-cap O-rings	4 × 3.53 mm CS, 20% squeeze
Camera window	80 × 8 mm cast acrylic
Thrusters	4 x A2212 in 54 mm ducts, 51 mm props
Design depth	10 m (test to 5 m first)