



SAKY STEEL 飒飒金属



Professional Production
Alloy Bar/Sheet/Strip/Pipe/Flange/Wire



Main Products Introduction

1.Company Interview	P4-P6
2.Inconel Alloy (Inconel 600/601/625/718/X-750/690)	P7-P12
3.Incoloy Alloy (Incoloy 800/800H/800HT/825/A-286/925)	P13-P17
4.Pure Nickel Alloy (Nickel 200/201)	P18
5.Monel Alloy (Monel 400/K-500)	P19-P20
6.Hastelloy Alloy (Hastelloy C276 C22 B2 X)	P21-P23
7.Precision Alloy (1J50/1J79/1J85/4J32/Kovar/Invar36)	P24-P26
8.904L/Alloy 20	P27-P28
9.DUPLEX STEEL (253MA/254SMO/2205/2507/Z100)	P29-P35
10.Quality Insurance	P36-P38
11.Service & Support	P39-P46



Company Interview

公司概况





Saky Steel Co.,Ltd is located in Jiangsu Province. The company was founded in 1995. Now the company covers totally 220,000 square meters . The company has a total employee of 150 out of whom 120 are professionals .The company has been continually expanding itself ever since it's founded .Now the company is a ISO9001:2000 certified company and has been continually awarded by the local government .The company through investment steel smelting and forging factory resume stability, a wide range of available res-ources. Saky steel specializes in the production of high-temperature alloys, corrosion-resistant alloys, precision alloys, nickel-based welding wire, high-resistance electrothermal alloys, heat-resistant steel. Available: wire, strip, bar, sheet, pipe, forging and other products. Products are widely used in civil nuclear power, aerospace, petrochemical, industrial electric furnaces, power station boilers, ships, machinery, electronic equipment and other industries

The company's main equipment includes 1T vacuum melting furnace, 100KG and 200KG vacuum induction furnace, 2T intermediate frequency pre-supplement furnace, 1T medium frequency induction furnace, 35KG to 4T electroslog remelting furnace more than 30 sets, 3 tons of electro-hydraulic hammer 1 set , 1.75T forged air 2 sets of hammers, 2 sets of 1T forged air hammers, and equipment for cold rolling and wire drawing.

Our company developed international markets more than 20 years,and established long partnership with Europe and America,South America ,Australia, Middle East ,Southeast Asia. etc . We will be on the basic of advanced anage-ment and service concept to provide high quality products and perfect service for all over the manufacturing enterp-rise. We welcome customers from all over the world to cooperate with us.

QUALIFICATION CERTIFICATES

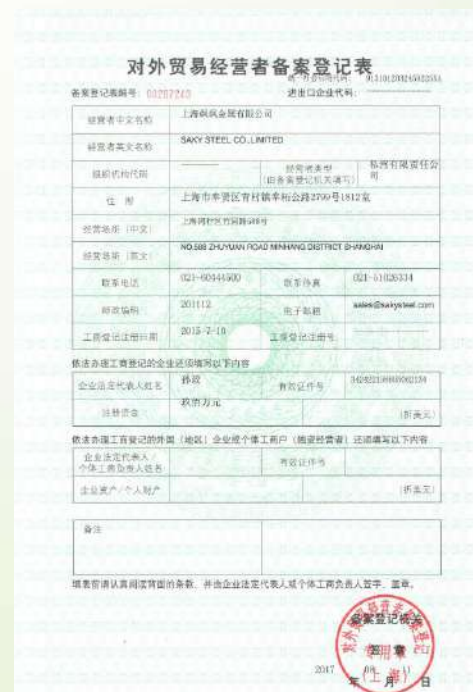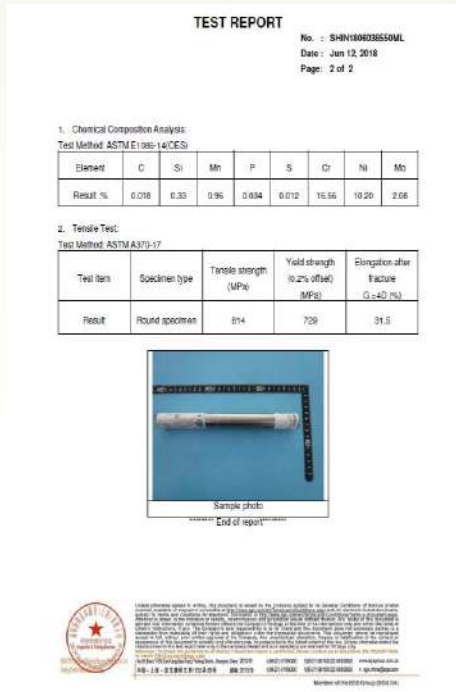

Factory workshop



INCONEL 600



Inconel 600 alloy is a nickel-chromium iron-based solid solution strengthening alloy with good high temperature corrosion resistance and oxidation resistance, excellent hot and cold processing and welding performance, satisfactory thermal strength and high plasticity below 700 degrees Celsius. The alloy is widely used in heaters, distillers, and condensers in acid-preventing processes; rolling furnace walls, furnace components and trays in the heat treatment industry; rosin-acid processing equipment in pulp manufacturing.

INCONEL 600 SPECIFICATIONS

Grade	UNS	W.Nr
INCONEL 600	N06600	2.4816

INCONEL 600 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Cu	P	S
INCONEL 600	Min	72	14	6						
	Max		17	10	0.15	1	0.5	0.5	0.015	0.015

INCONEL 600 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
85 000 (585Mpa)	35 000 (240Mpa)	30(min)

The condition and diameter: Hot worked, Rounds, Over 76.2mm ,base on ASTM B166.

INCONEL 600 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B166	ASTM B166	ASTM B168	ASTM B166	ASTM B167 ASTM B163 ASTM B516 ASTM B517

INCONEL 601



Inconel 601 has good high temperature strength and retains its ductility after long service exposure, and good hot corrosion resistance under oxidizing conditions. Inconel 601 is used for industrial furnaces; heat-treating equipment such as baskets, muffles and retorts; petrochemical and other process equipment and gas-turbine components.

INCONEL 601 SPECIFICATIONS

Grade	UNS	W.Nr
INCONEL 601	N06601	2.4851

INCONEL 601 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Cu	S
INCONEL 601	Min	58	21	Bal.					
	Max	63	25		0.1	1.0	0.5	1	0.015

INCONEL 601 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
80 000 (550Mpa)	30 000 (205Mpa)	30(min)

INCONEL 601 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B166	ASTM B166	ASTM B168	ASTM B166	ASTM B167 ASTM B163 ASTM B516 ASTM B517

INCONEL 625



Inconel 625 has a high level of pitting and crevice corrosion resistance to chloride contaminated media, such as sea water, neutral salts and brines. Inconel 625 is used in chemical processing, aerospace and marine engineering oil & gas, pollution control equipment and nuclear reactors.

INCONEL 625 SPECIFICATIONS

Grade	UNS	AWS
INCONEL 625	N06625	ERNiCrMo-3

INCONEL 625 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Cu	P	S	Mo	Al	Nb+ Ta	Ti
INCONEL 625	Min	58.0	20.0								8.0		3.15	
	Max		23.0	5.0	0.10	0.50	0.50	0.50	0.015	0.015	10.0	0.40	4.15	0.40

INCONEL 625 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B166	ASTM B166	ASTM B168	AWS A5.14/A5.14M	ASTM B167 ASTM B163 ASTM B516 ASTM B517

INCONEL 718



Inconel 718 has excellent corrosion resistance at high and low temperatures and good resistance to stress-corrosion cracking and pitting corrosion. Inconel 718 has good performance in hostile environment containing H₂S, CO₂, chlorides, sulfides and free sulfur at selected temperatures. Inconel 718 is commonly used for cryogenic storage tanks, downhole shafts and wellhead parts.

INCONEL 718 SPECIFICATIONS

Grade	UNS	W.Nr
INCONEL 718	N07718	2.4668

INCONEL 718 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Mo	Cu	Al	S
INCONEL 718	Min	50	17	Bal				2.8		0.20	
	Max	55	21		0.08	0.35	0.35	3.3	0.30	0.80	0.015

INCONEL 718 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
18500(1275Mpa)	150,000(1034Mpa)	12(min)

The condition and diameter: Hot worked, Rounds, Over 76.2mm ,base on ASTM B166.

INCONEL 718 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B637	ASTM B637	ASTM B670	ASTM5832

INCONEL X-750



Inconel Alloy® X-750 is a nickel-chromium austenitic alloy similar to Alloy 600 but made precipitation-hardenable by additions of aluminum and titanium. It has good resistance to corrosion and oxidation along with high tensile and creep-rupture properties at high temperatures to 1300° F (700° C). This material has excellent relaxation resistance and is non-magnetic. It has good elevated temperature strength properties to 1300°F (700° C) and oxidation resistance to 1800°F (983°C). Inconel X 750 is resistant to a wide variety of industrial corrosives under both oxidizing and reducing conditions. This alloy also has excellent resistance to chloride stress corrosion cracking in the fully age hardened condition.

INCONEL X-750 SPECIFICATIONS

Grade	UNS	W.Nr
INCONEL X-750	N07750	2.4669

INCONEL X-750 Chemical Composition

Grade	%	Ni	Cr	Ti	C	Mn	Si	Cu	Fe	Al	S
INCONEL X-750	Min	70.0	14	2.25					5.0	0.4	
	Max		17	2.75	0.08	1.00	0.50	0.5	9.0	1.0	0.01

INCONEL X-750 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
965Mpa	620Mpa	8(min)

INCONEL X-750 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B637	ASTM B637	AMS 5542 AMS 5598	AMS 5698 AMS 5699

INCONEL 690



INCONEL® alloy 690 (UNS N06690/W. Nr. 2.4642) is a high-chromium nickel alloy having excellent resistance to many corrosive aqueous media and high- temperature atmospheres. In addition to its corrosion resistance, alloy 690 has high strength, good metallurgical stability, and favorable fabrication characteristics.

INCONEL 690 SPECIFICATIONS

Grade	UNS	W.Nr
INCONEL 690	N06690	2.4642

INCONEL 690 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Cu	S
INCONEL 690	Min	58.0	27.0	7.0					
	Max		31.0	11.0	0.05	0.5	0.5	0.50	0.015

INCONEL 690 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
585Mpa	240Mpa	30(min)

INCONEL 690 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B166	ASTM B564	ASTM B168	ASTM B163 ASTM B829

INCOLOY 800



Alloy 800, 800H, and 800HT are nickel-iron-chromium alloys with good strength and excellent resistance to oxidation and carburization in high-temperature exposure. These nickel steel alloys are identical except for the higher level of carbon in alloy 800H/HT and the addition of up to 1.20 percent aluminium and titanium in alloy 800HT. 800 was the first of these alloys and it was slightly modified into 800H. This modification was to control carbon (.05-.10%) and grain size to optimize stress rupture properties. In heat treatment applications 800HT has further modifications to the combined titanium and aluminium levels (.85-1.20%) to ensure optimum high temperature properties. Alloy 800H/HT was intended for high temperature structural applications. The nickel content makes the alloys highly resistant to both carborisation and to embrittlement from precipitation of sigma phase.

INCOLOY 800 SPECIFICATIONS

Grade	UNS	W.Nr
INCOLOY 800	N08800	1.4876

INCOLOY 800 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Ti	Cu	Al	S
INCOLOY 800	Min	30	19	39.5				0.15	
	Max	35	23		0.10	0.15-0.60	-	0.60	-

INCOLOY 800 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
517Mpa	207Mpa	30(min)

INCOLOY 800 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B408	ASTM B564	ASTM B409	ASTM B407 ASTM B514

INCOLOY 800H/800HT



Alloy 800, 800H, and 800HT are nickel-iron-chromium alloys with good strength and excellent resistance to oxidation and carburization in high-temperature exposure. These nickel steel alloys are identical except for the higher level of carbon in alloy 800H/HT and the addition of up to 1.20 percent aluminium and titanium in alloy 800HT. 800 was the first of these alloys and it was slightly modified into 800H. This modification was to control carbon (.05-.10%) and grain size to optimize stress rupture properties. In heat treatment applications 800HT has further modifications to the combined titanium and aluminium levels (.85-1.20%) to ensure optimum high temperature properties. Alloy 800H/HT was intended for high temperature structural applications. The nickel content makes the alloys highly resistant to both carborisation and to embrittlement from precipitation of sigma phase.

INCOLOY 800H/800HT SPECIFICATIONS

Grade	UNS	W.Nr
INCOLOY 800H	N08810	1.4958
INCOLOY 800HT	N08811	1.4959

INCOLOY 800/800HT Chemical Composition

Grade	Ni	Cr	Fe	Mn	Si	Ti	Cu	Al	S
Incoloy 800H	30-35	19-23	39.5	<1.5	<1.0	0.15-0.6	<0.75	0.15-0.6	0.015
Incoloy 800HT	30-35	19-23	39.5	<1.5	<1.0	0.15-0.6	<0.75	0.15-0.6	0.015

INCOLOY 800H/800HT Mechanical Properties: (Minimum value at 20 °C)

GRADE	Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %
Incoloy 800H	448MPa	172MPa	30(min)
Incoloy 800HT	448MPa	172MPa	30(min)

INCOLOY 800H/800HT Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B408	ASTM B564	ASTM B409	ASTM B408	ASTM B407 ASTM B514

INCOLOY 825



Alloy 825 (UNS N08825) is an austenitic nickel-iron-chromium alloy with additions of molybdenum, copper and titanium. It was developed to provide exceptional corrosion resistance in both oxidizing and reducing environments. The alloy is resistant to chloride stress-corrosion cracking and pitting. The addition of titanium stabilizes Alloy 825 against sensitization in the as-welded condition making the alloy resistant to intergranular attack after exposure to temperatures in a range that would sensitize unstabilized stainless steels. The fabrication of Alloy 825 is typical of nickel-base alloys, with material being readily formable and weldable by a variety of techniques

INCOLOY 825 SPECIFICATIONS

Grade	UNS	W.Nr
INCOLOY 825	N08825	2.4858

INCOLOY 825 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mn	Si	Mo	Cu	Ti	Al	S
INCOLOY 825	Min	38	19.5	22.0				2.5	1.5	0.6		
	Max	46	23.5		0.05	1.0	0.50	3.5	3.0	1.2	0.20	0.03

INCOLOY 825 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
586	241	30(min)

INCOLOY 825 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B425	ASTM B564	ASTM B409	ASTM B408	ASTM B407 ASTM B514

INCOLOY A286



Incoloy Alloy® A-286 (sometimes referred to as A286 stainless steel) is a nickel and iron-based, austenitic superalloy that is useful for applications requiring high strength and corrosion resistance up to 1300°F (704°C), and for lower stress applications at higher temperatures. The mechanical properties of this alloy are developed by suitable solution annealing and precipitation hardening treatments.

This alloy has excellent high temperature oxidation resistance and is designed to maximize creep and stress rupture properties, with some reduction in strength. A-286 material can attain high strength levels when aged after cold work, and has wide applications in high temperature fasteners and springs.

INCOLOY A286 SPECIFICATIONS

Grade	UNS	W.Nr
INCOLOY A286	S66286	1.4980

INCOLOY A286 Chemical Composition

Grade	%	Ni	Cr	Mo	B	P	C	Ti	Si	Mn	V	Fe	Al	S
INCOLOY A286	Min	24	13.5	1.0	0.001			1.90			0.1	Bal.		
	Max	27	16	1.5	0.01	0.025	0.08	2.35	1.0	2.0	0.5		0.40	0.025

INCOLOY A286 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %
1034	827	20(min)

INCOLOY A286 Standards

Bar	Forging
ASTM B638	ASTM B638

INCOLOY 925



Alloy 925 is a precipitation-hardenable Nickel-Iron-Chromium Alloys with additions of Molybdenum, Copper, Titanium and Aluminium, supplied in the solution annealed condition and an aged condition. Alloy 925 has excellent corrosion resistance consistent with Alloy 825. High levels of nickel ensure protection against stress corrosion cracking, whilst the additional molybdenum and copper resist reducing environments, in the same way that Chromium resists oxidising environments. Molybdenum enhances resistance to pitting and crevice corrosion, lifting the Pitting Resistance Equivalent number (PREN) to above 26. With such a balanced composition, Alloy 925 is particularly suited to down-hole applications in sour gas wells , but can also be used in less aggressive applications as it resists general, pitting, crevice and stress corrosion cracking in most aqueous environments where chloride or sulphide ions may be present.

INCOLOY 925 SPECIFICATIONS

Grade	UNS
INCOLOY 925	N09925

INCOLOY 925 Chemical Composition

Grade	%	Ni	Cr	Fe	Mo	Cu	Ti	Al	Mn	Si	C	S
INCOLOY 925	Min	42	19.5	Bal.	2.5	1.5	0.9	0.4	0.5	0.5		
	Max	46	22.5		3.5	3.0	1.9	1.0	1.0	1.0	0.03	0.03

INCOLOY 925 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
965	690	25(min)

INCONEL 925 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B166	ASTM B564	ASTM B168	ASTM B163 ASTM B829

Nickel 200/201



Nickel 200 and 201 plate offer outstanding corrosion resistance to caustic soda and other alkalis. They perform best in reducing environments but can also be used under oxidizing conditions when a passive oxide film is formed. They are used in aerospace, chemical and petrochemical processing, food processing, and marine and water treatment applications. Nickel 200 and 201 are both highly ductile across a wide temperature range and can be easily welded and processed by standard shop fabrication practices.

Nickel 200/ Nickel 201 SPECIFICATIONS

Grade	UNS	W.Nr
Nickel 200	N02200	2.4061/2.4060
Nickel 200	N02201	2.4066/2.4060

Nickel 200/Nickel 201 Chemical Composition

GRADE	Ni	Fe	C	Mn	Si	Cu	S
Nickel 200	99.0	≤0.4	-	≤0.35	≤0.35	≤0.25	≤0.01
Nickel 201	99.0	≤0.4	≤0.02	≤0.35	≤0.35	≤0.25	≤0.01

Nickel 200/Nickel 201 Mechanical Properties: (Minimum value at 20 °C)

GRADE	Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %
Nickel 200	380	105	40(min)
Nickel 201	345	103	40(min)

Nickel 200/Nickel 201 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B160	ASTM B564	ASTM B162	ASTM B166	ASTM B161 ASTM B163 ASTM B751 ASTM B725

Monel 400



Alloy 400 (UNS N04400) is a solid-solution alloy that can be hardened only by cold working. It has high strength and toughness over a wide temperature range and excellent resistance to many corrosive environments. Alloy 400 is widely used in many fields, especially marine and chemical processing. Typical applications are valves and pumps; pump and propeller shafts; marine fixtures and fasteners; electrical and electronic components; springs; chemical processing equipment; gasoline and fresh water tanks; crude petroleum stills, process vessels and piping; boiler feedwater heaters and other heat exchangers; and deaerating heaters.

MONEL 400 SPECIFICATIONS

Grade	UNS	W.Nr
MONEL 400	N04400	2.4360

MONEL 400 Chemical Composition

Grade	%	Ni	Fe	C	Mn	Si	Cu	S
MONEL 400	Min	63.0					28	
	Max		2.5	0.3	2	0.5	34	0.024

MONEL 400 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
480	170	35(min)

MONEL 400 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B164	ASTM B564	ASTM B127	ASTM B164	ASTM B165 ASTM B725

MONEL K500



Monel® K500 is a nickel-copper alloy with age hardening properties imparted by alloying additions of aluminum and titanium. Its basic composition is similar to that of Monel®400 but the alloying additions make it age hardenable under controlled conditions of temperature and time. This alloy can be delivered in the annealed, stress equalized, hot finished or age-hardened conditions

MONEL K500 SPECIFICATIONS

Grade	UNS	W.Nr
MONEL K500	N05500	2.4375

MONEL K500 Chemical Composition

Grade	%	Ni	Al	Fe	C	Ti	Mn	Si	Cu	S
MONEL K500	Min	63	2.3			0.35			27.0	
	Max		3.15	2.0	0.18	0.85	1.5	0.5	33.0	0.01

MONEL K500 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
965	690	20(min)

MONEL K500 Standards

Bar
ASTM B865

Hastelloy X



Hastelloy® X is a high temperature and corrosion resistant nickel-based solid solution strengthened alloy. This alloy has outstanding resistance to oxidation at high temperatures and possesses exceptional strength at elevated temperatures. This alloy exhibits good formability, weldability, and machinability. Alloy X is non-magnetic. It has high strength up to 1500°F (816°C) and good oxidation resistance up to 2200°F (1204°C). This alloy is especially resistant to carburization and nitriding, conditions which cause failure in some high temperature alloys. It is used extensively in high temperature jet engine and chemical processing applications and is highly resistant to stress corrosion cracking in petrochemical applications.

Hastelloy X SPECIFICATIONS

Grade	UNS	W.Nr
Hastelloy X	N06002	2.4665

Hastelloy X Chemical Composition

Grade	%	Ni	Cr	Fe	Mo	C	Mn	Si	W	Co	S
Hastelloy X	Min	Bal.	20.5	17.0	8.0	0.05			0.2	0.5	
	Max		23	20.0	10.0	0.15	1.0	1.0	1.0	2.5	0.03

Hastelloy X Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %
660	240	35(min)

Hastelloy X Standards

Bar	Pipe	Sheet/Strip	Wire
ASTM B572	ASTM B622 ASTM B619 ASTM B626	ASTM B435	ASTM B164

HASTELLOY C22



Alloy C22, is a versatile austenitic nickel-chromium-molybdenumtungsten alloy with enhanced resistance to pitting, crevice corrosion and stress corrosion cracking. The high chromium content provides good resistance to oxidizing media while the molybdenum and tungsten content give good resistance to reducing media. This nickel alloy also has excellent resistance to oxidizing aqueous media including wet chlorine and mixtures containing nitric acid or oxidizing acids with chlorine ions.

Alloy C22 has resistance to oxidizing acid chlorides, wet chlorine, formic and acetic acids, ferric and cupric chlorides, sea water, brine and many mixed or contaminated chemical solutions, both organic and inorganic. This nickel alloy also offers optimum resistance to environments where reducing and oxidizing conditions are encountered in process streams. This is beneficial in multi-purpose plants where such “upset” conditions occur frequently.

Hastelloy C22 SPECIFICATIONS

Grade	UNS	W.Nr
Hastelloy C22	N06022	/

Hastelloy C22 Chemical Composition

Grade	%	Ni	Cr	Cu	C	Mo	P	Si	Mn	S
Hastelloy C22	Min		20			12.5				
	Max	bal.	22.5	-	0.010	14.5	0.02	0.08	0.50	0.02

Hastelloy C22 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
690	310	45(min)

Hastelloy C22 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B574				

HASTELLOY C276



C276 is a nickel-molybdenum-chromium superalloy with an addition of tungsten designed to have excellent corrosion resistance in a wide range of severe environments. The high chromium, molybdenum and tungsten contents make the alloy especially resistant to pitting and crevice corrosion in reducing environments while chromium conveys resistance to oxidizing media. The low carbon content minimizes carbide precipitation during welding to maintain corrosion resistance in as-welded structures. This nickel alloy is resistant to the formation of grain boundary precipitates in the weld heat-affected zone, thus making it suitable for most chemical process application in an as welded condition. Alloy C276 is widely used in the most severe environments such as mixed acid chemical processing, pollution control, pulp and paper production, industrial and municipal waste treatment, and recovery of sour oil and gas.

Hastelloy C276 SPECIFICATIONS

Grade	UNS	W.Nr
Hastelloy C276	N10276	2.4819

Hastelloy C276 Chemical Composition

Grade	%	Ni	Cr	Mo	Fe	W	Co	C	Mn	Si	V	P	S
Hastelloy C276	Min	Bal.	14.5	15	4	3							
	Max		16.5	17	7	4.5	2.5	0.01	1	0.08	0.35	0.04	0.03

Hastelloy C276 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
690	283	40(min)

Hastelloy C276 Standards

Bar	Forging	Sheet/Strip	Wire	Pipe
ASTM B574	ASTM B564	ASTM B575		ASTM B622 ASTM B619 ASTM B626



Precision Alloy(1J50/1J79/1J85/4J32)

Soft magnetic alloys are nickel-iron alloys that contain from about 35 to 81% of nickel. These alloys are using in applications requiring the following characteristics: high permeability, high saturation magnetostriction, low hysteresis-energy loss low eddy-current loss in alternating flux, low curie temperature, constant permeability with changing temperature.

They are used for instrument transformers, radar pulse transformers, transducers, shielding, tape recorder head laminations and so on.

1J50/1J79/1J85/4J32 Chemical Composition

GRADE	C	P	S	Mo	Mn	Ni	Co	Si	Cu	Fe
1J50	≤0.03	≤0.02	≤0.02		0.15-0.3	49-50.5		0.75-1.6	≤0.2	Bal.
1J79	≤0.03	≤0.02	≤0.02	3.8-4.1	0.6-1.1	78.5-80		0.3-0.5	≤0.2	Bal.
1J85	≤0.03	≤0.02	≤0.02	4.8-5.2	0.3-0.6	79-81		0.15-0.3	≤0.2	Bal.
4J32	≤0.03	≤0.02	≤0.02		0.2-0.6	31.5-33	3.2-4.2	≤0.02	0.4-0.8	Bal.

1J50/1J79/1J85/4J32 Mechanical Properties: (Minimum value at 20 °C)

GRADE	Tensile Strength, min, psi (MPa)	HARDNESS HV	Elongation in 2 in. or 50 mm or 4D, min,%
1J50	≥530	≤155	≥35
1J79	≥560	≤205	≥35
1J85	≥560	≤205	≥35

INCONEL 690 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM B166	ASTM B564	ASTM B168	ASTM B163 ASTM B829

KOVAR 4J29



Kovar is a nickel–cobalt ferrous alloy compositionally identical to Fernico, designed to be compatible with the thermal expansion characteristics of borosilicate glass in order to allow direct mechanical connections over a range of temperatures. It finds application in electroplated conductors entering glass envelopes of electronic parts such as vacuum tubes (valves), X-ray and microwave tubes and some lightbulbs.

The name Kovar is often used as a general term for Fe–Ni alloys with these particular thermal expansion properties. Note the related particular Fe–Ni alloy Invar which exhibits minimum thermal expansion.

KOVAR 4J29 SPECIFICATIONS

Grade	GB/T	ASTM	UNS	W.Nr
KOVAR 4J29	4J29	F15	K94610	1.3981

KOVAR 4J29 Chemical Composition

Grade	%	Ni	Cr	Fe	C	Nn	Si	P	Mo	Co	Cu	S
KOVAR 4J29	Min	28.5		Bal.						16.8		
	Max	29.5	0.2		0.03	0.5	0.3	0.02	0.20	17.8	0.2	0.02

KOVAR 4J29 Coefficient of linear expansion

GRADE	Coefficient of linear expansion $\alpha/10^{-6}$. K-1 $\alpha/10^{-6}$. K-1		
Kovar	200-300°C	20-400°C	20-450°C
	/	4.6-5.2	5.1-5.5

INVAR 36/4J36



Invar, also known generically as FeNi36 (64FeNi in the US), is a nickel–iron alloy notable for its uniquely low coefficient of thermal expansion. Like other nickel/iron compositions, Invar is a solid solution; that is, it is a single-phase alloy, consisting of around 36% nickel and 64% iron. Invar is used where high dimensional stability is required, such as precision instruments, clocks, seismic creep gauges, television shadow-mask frames, valves in motors, and antimagnetic watches. In land surveying, when first-order (high-precision) elevation leveling is to be performed, the leveling rods used are made of Invar, instead of wood, fiberglass, or other metals.

INVAR 36 SPECIFICATIONS

Grade	GB/T	UNS	W.Nr
INVAR 36	4J36	K93600	1.3912

INVAR 36 Chemical Composition

Grade	%	Ni	Fe	C	Mn	Si	P	S
INVAR 36	Min	35	Bal.		0.2			
	Max	37		0.05	0.6	0.3	0.02	0.02

INVAR 36 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
490	240	42(min)

904L



904L is an austenitic alloy designed for a middle to high level of corrosion resistance. The alloy contains high levels of chromium and nickel with additions of molybdenum and copper to provide added corrosion resistance. The high nickel (25%) and molybdenum (4.5%) contents of 904L provide good resistance to chloride stress corrosion cracking, general and chloride pitting corrosion resistance above the levels of 316 and 317 stainless. The copper addition provides added resistance to hot phosphoric acid and dilute sulfuric acid.

904L SPECIFICATIONS

Grade	UNS	W.Nr
904L	N08904	1.4539

904L Chemical Composition

Grade	%	Ni	Cr	Fe	C	Mo	P	Mn	Si	Cu	S
904L	Min	23	19	Bal.		4				1	
	Max	28	23		0.02	5	0.045	2	1	2	0.035

904L Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
490	220	35(min)

904L Standards

Bar	Forging	Sheet/Strip	Pipe	Wire
ASTM A276	/	ASTM B625	ASTM B677 ASTM B673	AWS A5.9 ER385

ALLOY 20



Alloy 20 was designed specifically to withstand sulfuric acid. Its nickel, chromium, molybdenum and copper levels all provide excellent general corrosion resistance. Restricted carbon plus columbium stabilization permits welded fabrications to be used in corrosive environments, normally without post-weld heat treatment. At 33% nickel, Alloy 20 has practical immunity to chloride stress corrosion cracking. This alloy is often chosen to solve SCC problems, which may occur with 316L stainless.

ALLOY 20 SPECIFICATIONS

Grade	UNS	W.Nr
ALLOY 20	N08020	2.4660

ALLOY 20 Chemical Composition

Grade	%	Ni	Cr	C	P	Mo	Mn	Si	Cu	S
ALLOY 20	Min	32	19			2			3	
	Max	38	21	0.07	0.045	3	2	1	4	0.035

ALLOY 20 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
550	240	30(min)

ALLOY 20 Standards

Bar	Forging	Sheet/Strip	Wire
ASTM A276	ASTM B462	ASTM B463	ASTM B471

DUPLEX Steel 253 SMA



253 MA* is an austenitic chromium-nickel steel alloyed with nitrogen and rare earth metals. The grade is characterized by: High creep strength; Very good resistance to isothermal and, above all, cyclic oxidation; Very good resistance to combustion gases; Good structural stability at high temperatures; Good weldability; The grade can be used at temperatures up to about 1150° C (2100° F)

DUPLEX Steel 253 SMA SPECIFICATIONS

Grade	UNS	ASTM	W.Nr
253SMA	S30815	F45	1.4835

DUPLEX Steel 253 SMA Chemical Composition

Grade	%	Ni	Cr	P	C	Cu	Mo	Mn	Si	Ce	S
253 SMA	Min	10.0	20.0		0.05				1.40	0.03	
	Max	12.0	22.0	0.040	1.0			0.80	2.00	0.08	0.030

DUPLEX Steel 253 SMA Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min,%
600Mpa	310Mpa	40(min)

DUPLEX Steel 253 SMA Standards

Bar	Forging	Sheet/Strip	FLANGE	Welded Pipe	Seamless Pipe
ASTM A276 ASTM A479 EN 10088-3	ASTM A473	ASTM A240	ASTM A182	ASTM A249 ASTM A269 ASTM A312 ASTM A358 ASTM A409	ASTM A269 ASTM A213 ASTM A312 NFA 49-217 EN 10216-5

DUPLEX Steel 254 SMO



254 SMO is a high-alloy austenitic stainless steel developed for use in seawater and other aggressive chloride-bearing media. The steel is characterized by the following properties: Excellent resistance to pitting and crevice corrosion, PRE = $\geq 42.5^*$; High resistance to general corrosion; High resistance to stress corrosion cracking; Higher strength than conventional austenitic stainless steels; Good weldability

*The PRE is defined as, in weight-%, $PRE = \%Cr + 3.3 \times \%Mo + 16 \times \%N$

DUPLEX Steel 254 SMO SPECIFICATIONS

Grade	UNS	ASTM	W.Nr
254SMO	S31254	F44	SMO254

DUPLEX Steel 254 SMO Chemical Composition

Grade	%	Ni	Cr	P	C	Mn	Si	N	S
254SMO	Min	17.5	19.5					0.18	
	Max	18.5	20.5	0.030	0.020	1.00	0.80	0.25	0.010

DUPLEX Steel 254 SMO Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %
650Mpa	300Mpa	35(min)

DUPLEX Steel 254 SMO Standards

Bar	Forging	Sheet/Strip	Fitting	Welded Pipe	Seamless Pipe
ASTM A276 ASTM A479 EN 10088-3	ASTM A473	ASTM A240	ASTM A182	ASTM A249 ASTM A269 ASTM A312 ASTM A358 ASTM A409	ASTM A269 ASTM A213 ASTM A312 NFA 49-217 EN 10216-5

Duplex steel 2205



2205 is a duplex stainless steel, with a chemical composition of nearly equal proportions of austenite and ferrite. This combination allows the alloy to be stronger and tougher than standard austenitic steels. Duplex stainless steels like 2205 also maintain good weldability in their thickest sections, and they are much more resistant to stress corrosion cracking than standard austenitic steels.

Duplex steel 2205 SPECIFICATIONS

Grade	ASTM	UNS	W.Nr
2205	F51	S31803	1.4462

Duplex steel 2205 Chemical Composition

GRADE	%	Ni	Cr	Fe	C	P	N	Mn	Si	Mo	S
S31803	Min	4.5	21.0	Bal.			0.08			2.5	
	Max	6.5	23.0		0.03	0.03	0.2	2.0	1	3.5	0.02

Duplex steel S31803 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %	Brinell Hardness Max
620Mpa	448Mpa	25(min)	290

Duplex steel 2205 Standards

Bar	Forging	Sheet/Strip	Flange
ASTM A276 ASTM A479	ASTM A182	ASTM A240	ASTM A182

Duplex steel 2205



2205 is a duplex stainless steel, with a chemical composition of nearly equal proportions of austenite and ferrite. This combination allows the alloy to be stronger and tougher than standard austenitic steels. Duplex stainless steels like 2205 also maintain good weldability in their thickest sections, and they are much more resistant to stress corrosion cracking than standard austenitic steels.

Duplex steel 2205 SPECIFICATIONS

Grade	ASTM	UNS	W.Nr
2205	F60	S32205	1.4462

Duplex steel 2205 Chemical Composition

GRADE	%	Ni	Cr	Fe	C	P	N	Mn	Si	Mo	S
S32205	Min	4.5	22.0	Bal.			0.14			3.0	
	Max	6.5	23.0		0.03	0.03	0.2	2.0	1	3.5	0.02

Duplex steel S32205 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %	Brinell Hardness Max
655Mpa	450Mpa	25(min)	290

Duplex steel 2205 Standards

Bar	Forging	Sheet/Strip	Flange
ASTM A276 ASTM A479	ASTM A182	ASTM A240	ASTM A182



THE DIFFERENCE BETWEEN S31803 AND S32205

Duplex stainless steels account for >80% of the consumption of duplex, super duplex and hyper duplex grades. Developed in the 1930's for application in paper and pulp manufacture, duplex alloys are based around a 22% Cr composition and the mixed austenitic:ferritic microstructure that delivers desirable mechanical properties.

Compared with the generic 304/316 austenitic stainless steels, the family of duplex grades will typically have twice the strength and provide a significant uplift in corrosion resistance. Increasing the chromium content of stainless steels will increase their pitting corrosion resistance. However, the Pitting Resistance Equivalent Number (PREN) that infers an alloys resistance to pitting corrosion also includes a number of other elements in its formula. This subtlety can be used to explain how the difference between UNS S31803 and UNS S32205 developed and whether it matters.

Following the development of duplex stainless steels, their initial specification was captured as UNS S31803. However, a number of the leading manufacturers were consistently producing this grade to the upper end of the allowable specification. This reflected their desire to maximise the corrosion performance of the alloy, aided by the development of the AOD steelmaking process that allowed tighter control of composition. In addition, it also allowed the level of nitrogen additions to be influenced, rather than just present as a background element. Therefore, the highest performing duplex grade sought to maximise the levels of chromium (Cr), molybdenum (Mo) and nitrogen (N). The difference between a duplex alloy whose composition meets the bottom of the specification, versus one that hits the top of the specification can be several points based upon the formula $PREN = \%Cr + 3.3 \%Mo + 16 \%N$.

In order to differentiate the duplex stainless steel produced at the top end of the composition range, a further specification was introduced, namely UNS S32205. Duplex stainless steel made to the S32205 (F60) caption will fully meet the S31803 (F51) caption, whereas the reverse is not true. Therefore S32205 can be dual-certified as S31803.

	C	Si	Mn	P	S	Cr	Ni	Mo	N
S31803	0.03 max	1.00 max	2.00 max	0.03 max	0.02 max	21.0 -23.0	4.5 – 6.5	2.5 – 3.5	0.08 – 0.20
S32205	0.03 max	1.00 max	2.00 max	0.03 max	0.02 max	22.0 -23.0	4.5 – 6.5	3.0 – 3.5	0.14 – 0.20

SAKY Alloy stock a comprehensive range of duplex stainless steel as the preferred distribution partner of Sandvik. We stock S32205 in sizes from 5/8" up to 18" diameter in round bar, with most of our stock being in the Sanmac® 2205 grade, which adds 'enhanced machinability as standard' to the other properties. In addition, we also stock a range of S32205 hollow bar from our UK warehouse, and plate up to 3" from our Portland, USA warehouse.

DUPLEX Steel 2507



Alloy 32750 is a super duplex stainless steel supplied in the solution annealed condition. As a super duplex stainless steel, it combines the desirable aspects of both austenitic and ferritic grades. The higher chromium, molybdenum and nitrogen contents result in a Pitting Resistance Equivalent number (PREN) of >41, providing pitting and crevice corrosion resistance superior to austenitic and duplex stainless steels in almost all corrosive media, and a Critical Pitting Temperature exceeding 50° C.

Supplied in the annealed condition, it achieves yield strengths of 80ksi (550Mpa), greater than most austenitic and duplex stainless steel grades. It cannot be hardened by heat treatment but can be strengthened by cold working. It also exhibits a low coefficient of thermal expansion and higher heat conductivity than austenitic steels and is suitable for working temperatures up to 300° C. Alloy 32750 is listed in NACE MR 0175 for sour service and having gained ASME Approval for Pressure Vessel applications it can be used in a wide variety of applications.

DUPLEX Steel 2507 SPECIFICATIONS

Grade	ASTM	UNS	W.Nr
2507	F53	S32750	1.4410

DUPLEX Steel 2507 Chemical Composition

Grade	%	Ni	Cr	Mo	C	Mn	N	Si	P	S
2507	Min	6.0	24.5	3.0			0.24	0.8		
	Max	8.0	26.0	5.0	0.03	1.2	0.32	1.0	0.035	0.02

DUPLEX Steel 2507 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %	Brinell Hardness Max
800Mpa	550Mpa	15(min)	310

DUPLEX Steel 2507 Standards

Bar	Forging	Sheet/Strip	Flange
ASTM A276 ASTM A479	ASTM A182	ASTM A240	ASTM A182

DUPLEX Steel Z100



Alloy 32760 is a super duplex stainless steel supplied in the hot worked and solution annealed condition. As a super duplex stainless steel, it combines the desirable aspects of both austenitic and ferritic grades. The higher chromium, molybdenum and nitrogen contents result in a Pitting Resistance Equivalent number (PREN) of >40, providing pitting and crevice corrosion resistance superior to austenitic and duplex stainless steels in almost all corrosive media, and a Critical Pitting Temperature exceeding 50° C nb. versions of the PREN formula also include W as a positive influence on overall pitting resistance.

DUPLEX Steel Z100 SPECIFICATIONS

Grade	ASTM	UNS	W.Nr
Z100	F55	S32760	1.4501

DUPLEX Steel Z100 Chemical Composition

Grade	%	Ni	Cr	Mo	S	Mn	N	Si	P
S32760	Min	6.0	24.0	3.0			0.2		
	Max	8.0	26.0	4.0	0.01	1.0	0.3	1.0	0.030

DUPLEX Steel Z100 Mechanical Properties: (Minimum value at 20 °C)

Tensile Strength, min, psi (MPa)	Yield Strength (0.2 % offset), min, psi (MPa)	Elongation in 2 in. or 50 mm or 4D, min, %	Brinell Hardness Max
860Mpa	720Mpa	16(min)	335

DUPLEX Steel Z100 Standards

Bar	Forging	Sheet/Strip	Flange
ASTM A276 ASTM A479	ASTM A182	ASTM A240	ASTM A182



Quality Insurance

质量保障

Quality Insurance



1. Original Material Test Certificate(MTC) available with each order.

SAKY STEEL CO., LIMITED
No.588 PuTao Road, MinHang District, Shanghai China 201112
DATE:2013/05/08

CERTIFICATE OF QUALITY

Delivery address: 4/F No.588 ZhuYuan Road, MinHang District, Shanghai China

Customer: [REDACTED]

Requirement: Stainless Steel Square Bar

Product: Stainless Steel Square Bar

Specification: ASTM A479

Grade: 316L

PI number: [REDACTED] PO number: [REDACTED]

Heat treatment: Cold drawn

Marking of supplier: SAKY STEEL GROUP CO., LIMITED

Line	Pack No	Heat No	Size (mm)	Quantity (package)	Weight (kg)	Type	Finish	Edge
1	1-10	SAKY713	32x32x3000	12	15000	316L	Bright	--

Heat No.	C%	Si%	Mn%	P%	S%	Cr%	Ni%	N%	Mo%	Cu%
SAKY713	0.02	0.53	1.18	0.017	0.015	16.23	10.06	--	2.2	--

Line	Mechanical Properties				
	T*S (N/mm2)	Y*S (N/mm2)	HRB	HB	Elongation (%)
1	528	--	--	--	45

We certify that the above mentioned products comply with the terms of the order contract

Remarks: [REDACTED]

Company Seal: [REDACTED]

QC PASS

www.sakysteel.com

SAKY STEEL CO., LIMITED
No.588 PuTao Road, MinHang District, Shanghai China 201112
DATE:2014/03/05

CERTIFICATE OF QUALITY

Delivery address: 6/F No.400 PuTao Road, MinHang District, Shanghai China

Customer: [REDACTED]

Requirement: Stainless steel round bar

Product: Stainless steel round bar

Specification: SUS

Grade: 304

PI number: [REDACTED] PO number: [REDACTED]

Heat treatment: Cold drawn

Marking of supplier: SAKY STEEL CO., LIMITED

Line	Pack No	Heat No	Size (mm)	Quantity (package)	Weight (kg)	Type	Finish	Edge
1	1-10	SAKY1280	20x6000	40	150542	304	Bright	--

Heat No.	C%	Si%	Mn%	P%	S%	Cr%	Ni%	N%	Mo%	Cu%
SAKY1280	0.015	0.58	1.32	0.017	0.005	18.23	8.12	--	--	--

Line	Mechanical Properties				
	T*S (N/mm2)	Y*S (N/mm2)	HRB	HB	Elongation (%)
1	539	--	--	--	43

We certify that the above mentioned products comply with the terms of the order contract

Remarks: [REDACTED]

Company Seal: [REDACTED]

QC PASS

www.sakysteel.com

SAKY STEEL CO., LIMITED
No.588 PuTao Road, MinHang District, Shanghai China 201112
DATE:2014/04/14

CERTIFICATE OF QUALITY

Delivery address: No.588 PuTao Road, MinHang District, Shanghai China 201112

Customer: [REDACTED]

Requirement: Stainless Steel Round Bar

Product: Stainless Steel Round Bar

Specification: ASTM

Grade: 17-4PH

PI number: [REDACTED] PO number: [REDACTED]

Heat treatment: Hot Rolled

Marking of supplier: SAKY STEEL CO., LIMITED

Line	Pack No	Heat No	Size	Quantity (package)	Weight (kg)	Type	Finish	Edge
1	1-10	SAKY823	10"	10	10895	17-4 PH	Bright	--

Heat No.	C%	Si%	Mn%	P%	S%	Cr%	Ni%	Nb+Ta %	Mo%	Cu%
SAKY823	0.031	0.68	0.52	0.021	0.019	15.63	3.12	0.223	--	3.11

Line	Mechanical Properties				
	T*S (N/mm2)	Y*S (N/mm2)	HRB	HB	Elongation (%)
1	545	815	--	262	42

We certify that the above mentioned products comply with the terms of the order contract

Remarks: [REDACTED]

Company Seal: [REDACTED]

QC PASS

www.sakysteel.com

SAKY STEEL CO., LIMITED
No.588 PuTao Road, MinHang District, Shanghai China 201112
DATE:2013/03/05

CERTIFICATE OF QUALITY

Delivery address: No.588 PuTao Road, MinHang District, Shanghai China 201112

Customer: [REDACTED]

Requirement: Stainless Steel Hex Bar

Product: Stainless Steel Hex Bar

Specification: ASTM A276

Grade: SS321

PI number: [REDACTED] PO number: [REDACTED]

Heat treatment: Hot Rolled

Marking of supplier: SAKY STEEL CO., LIMITED

Line	Pack No	Heat No	Size (mm)	Quantity (package)	Weight (kg)	Type	Finish	Edge
1	1-18	SAKY451	100x5000	18	18352	321	Bright	--

Heat No.	C%	Si%	Mn%	P%	S%	Cr%	Ni%	N%	Mo%	Ti%
SAKY451	0.038	0.61	1.24	0.018	0.017	17.24	9.11	--	--	0.23

Line	Mechanical Properties				
	T*S (N/mm2)	Y*S (N/mm2)	HRB	HB	Elongation (%)
1	668	--	--	--	32

We certify that the above mentioned products comply with the terms of the order contract

Remarks: [REDACTED]

Company Seal: [REDACTED]

QC PASS

www.sakysteel.com

SGS

[illegible]

Member of the BOS Group (BOS SA)

[illegible]

www.sakysteel.com

b. AQI Quality Inspection



Service & Assurance Support

服务&支持

Quality Test Inspection



Excellent quality, as we are your sincere, consistent, never change. Sakysteel Passed ISO9001 international quality system certification, formed a perfect quality control and control combine to truly realize the quality control

Throughout the whole production. Our raw materials from Baosteel, TISCO, Zhang Pu and domestic famous enterprises. Sakysteel began from the selection of raw materials to the pursuit of high quality. Sakysteel established quality inspection center equipped with physical and chemical composition(OES,ICP-OES) ,ultrasonic detector(PT), Hardness testing(HRC HB HV), Mechanical Properties (Tensile, Yield (ksi) Elongation), Grain size Inspection, Nonmetallic inclusion Inspection(A+B+C+D), Low power microscopic tissue detection etc. Inspection and Testing of qualified products, product quality certificate issued to ensure commitment: "Customer satisfaction is the only measure of product quality and service quality".



Rockwell Hardness



Brinell Hardness



Spectrograph



5100 ICP-OES



C S Analyzer




Tensile Yield(ksi) Elongation




Penetration Testing



Ultrasonic Testing

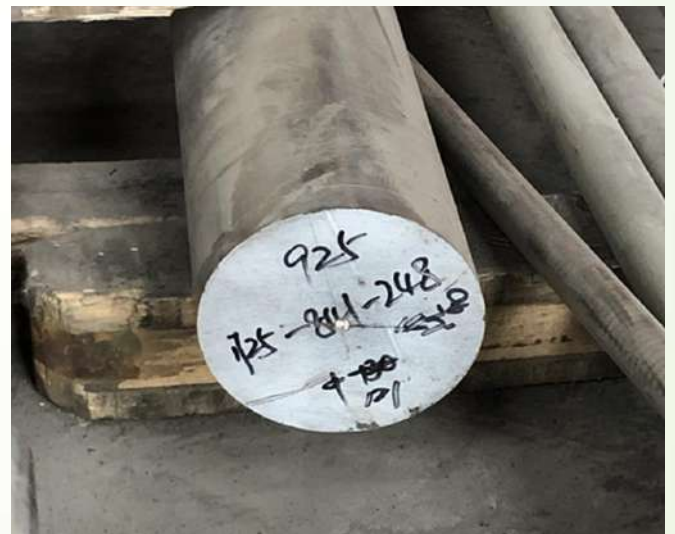

Export—Alloy Products

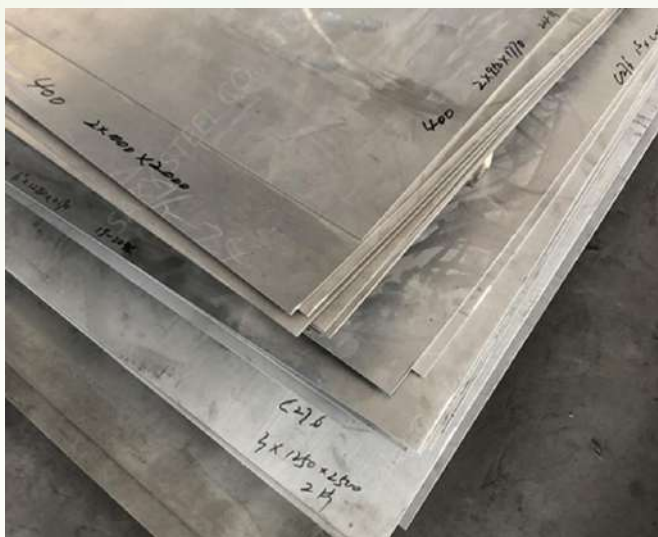



Export—Alloy Products



Export Packaging—Alloy Products



SAKY STEEL CO.,LIMITED (飒飒金属)

Email: sales@sakysteel.com

Tel :86 21 60446500/60444500

Fax: 86 21 51026334

Mob:86 13764965049

Website: www.sasaalloy.com

Address: No.139 Hengxi Road,Minhang District Shanghai China

Factory Address: DaiNan Technology Park Xing Hua City Jiangsu Province China