Camera

Multimedia Techniques & Applications

Yu-Ting Wu

(this slides are borrowed from Prof. Yung-Yu Chuang)

Outline

- Overview and fundamentals
- Color imaging
- Camera image processing
- Computational cameras

Outline

- **Overview and fundamentals**
- Color imaging
- Camera image processing
- Computational cameras

Camera Trial

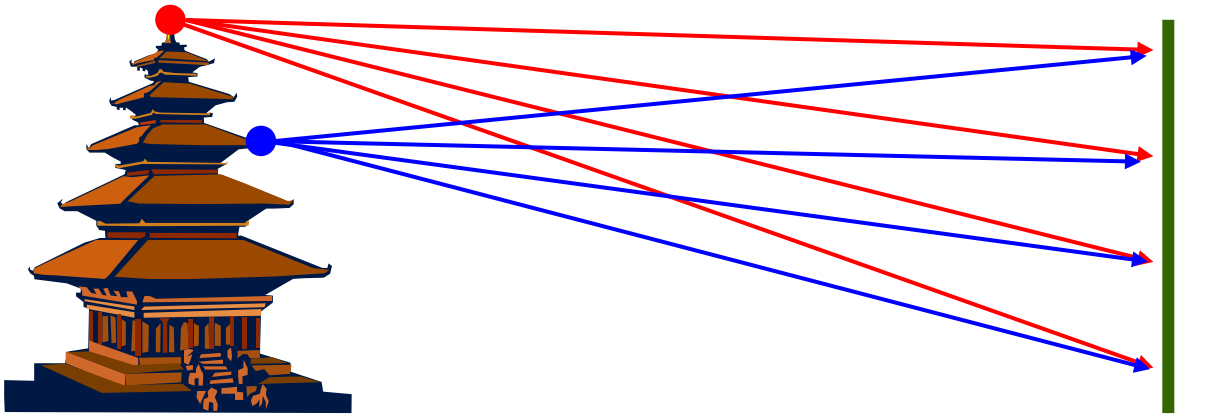

Put a piece of film in front of an object

Pinhole Camera

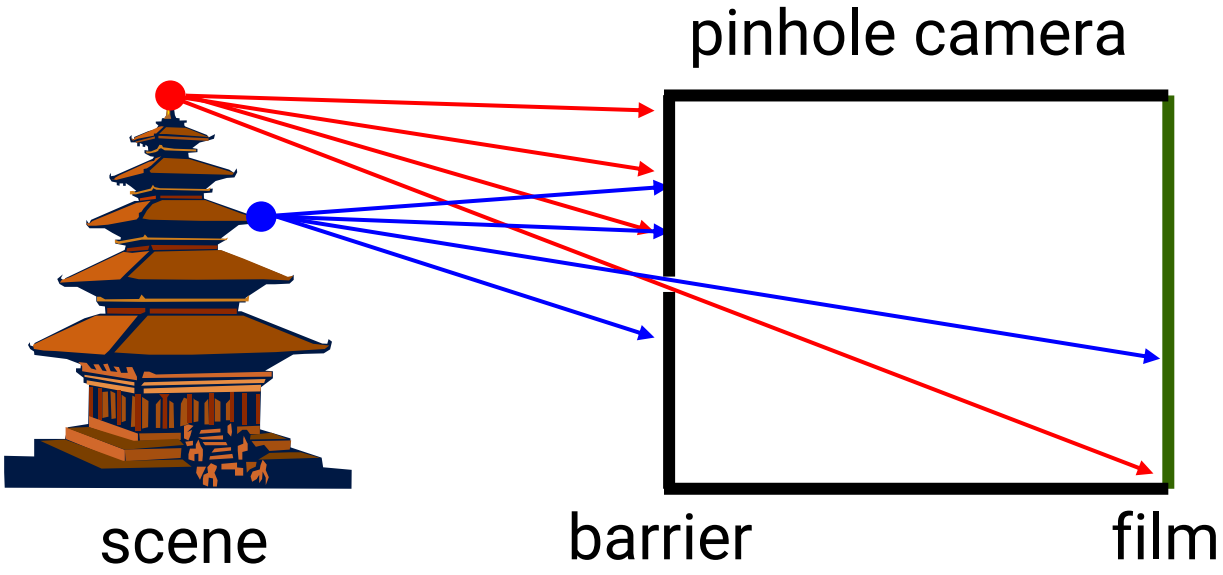

Add a barrier to block off most of the rays

- It reduces blurring
- The pinhole is known as the **aperture**
- The image is inverted

Shrinking the Aperture

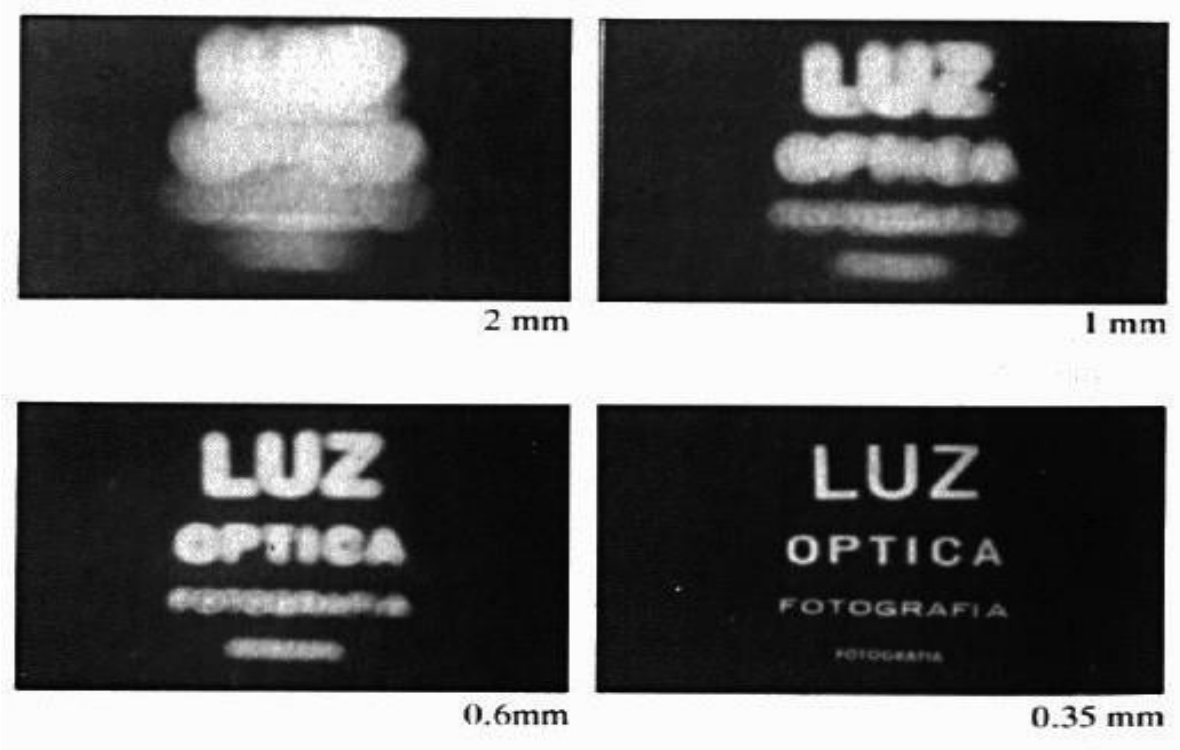

Why not make the aperture as small as possible?

- Less light gets through
- Diffraction effect

Shrinking the Aperture (cont.)

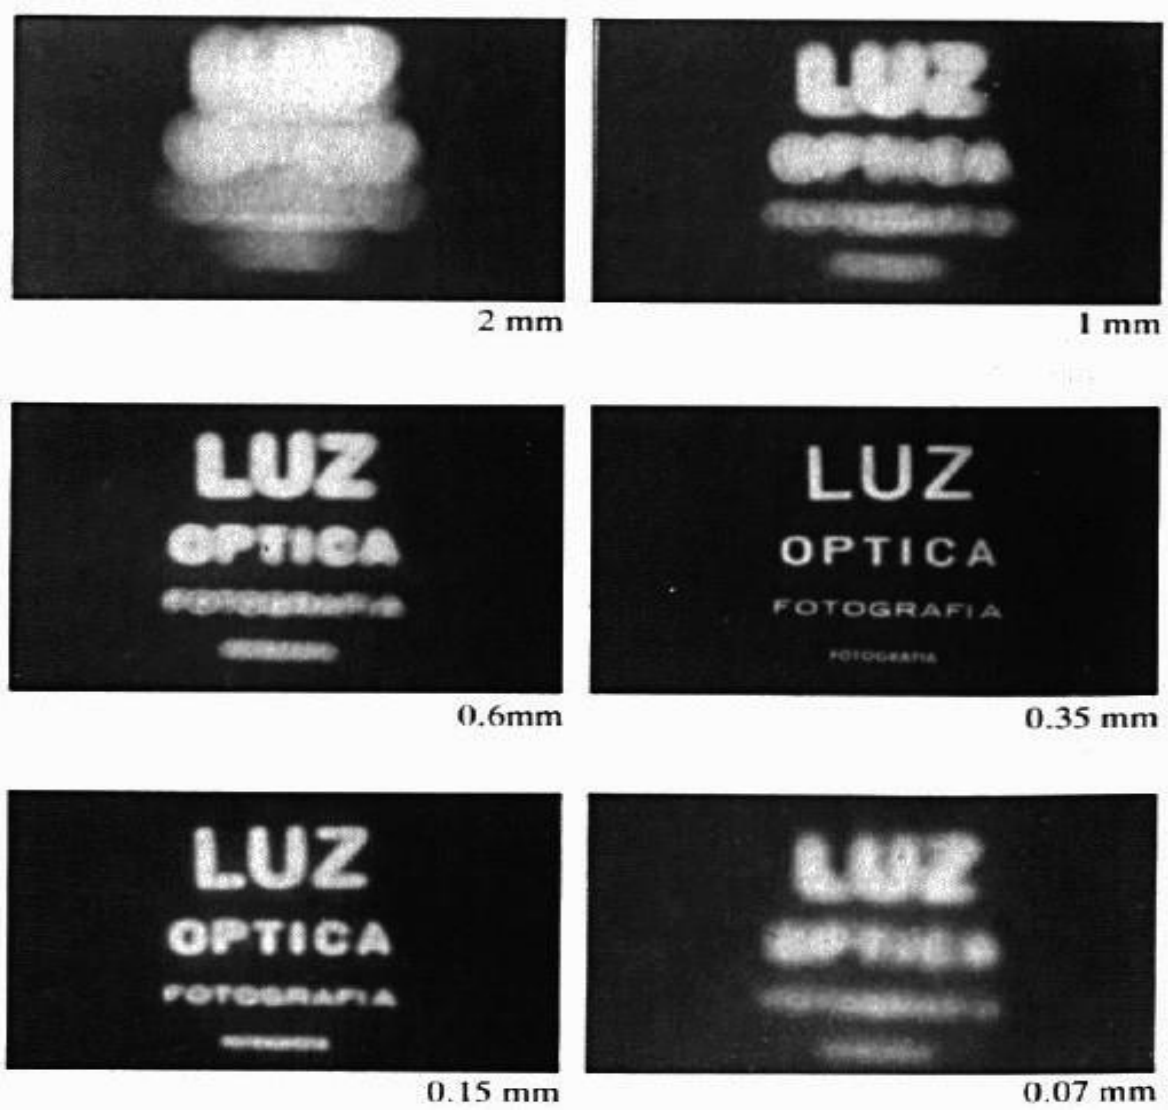

Adding a Lens

scene



lens

film

Lenses

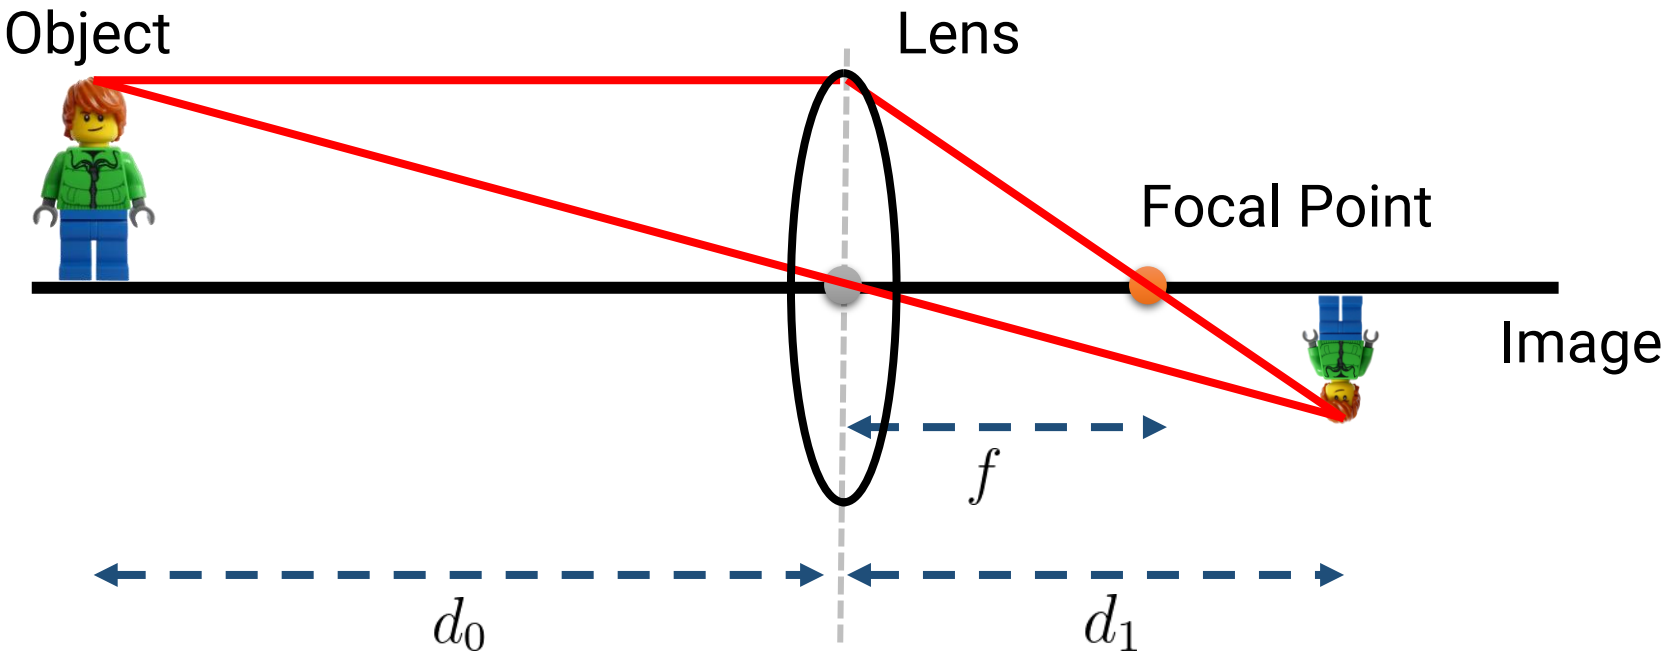

Thin lens equation: $\frac{1}{d_o} + \frac{1}{d_i} = \frac{1}{f}$

Thin Lens Formula

$$y'/y = D'/D$$

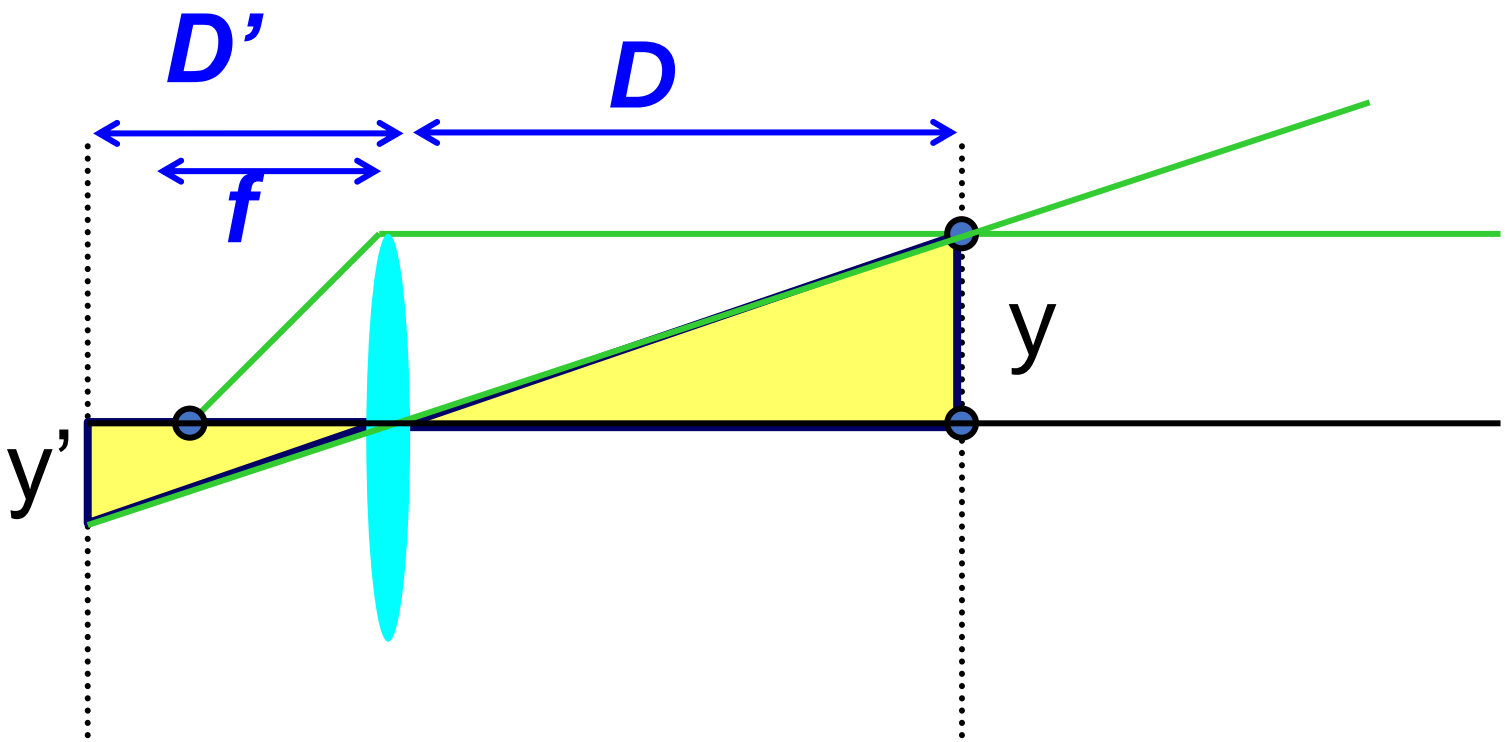

Thin Lens Formula (cont.)

$$y'/y = D'/D$$
$$y'/y = (D'-f)/f$$

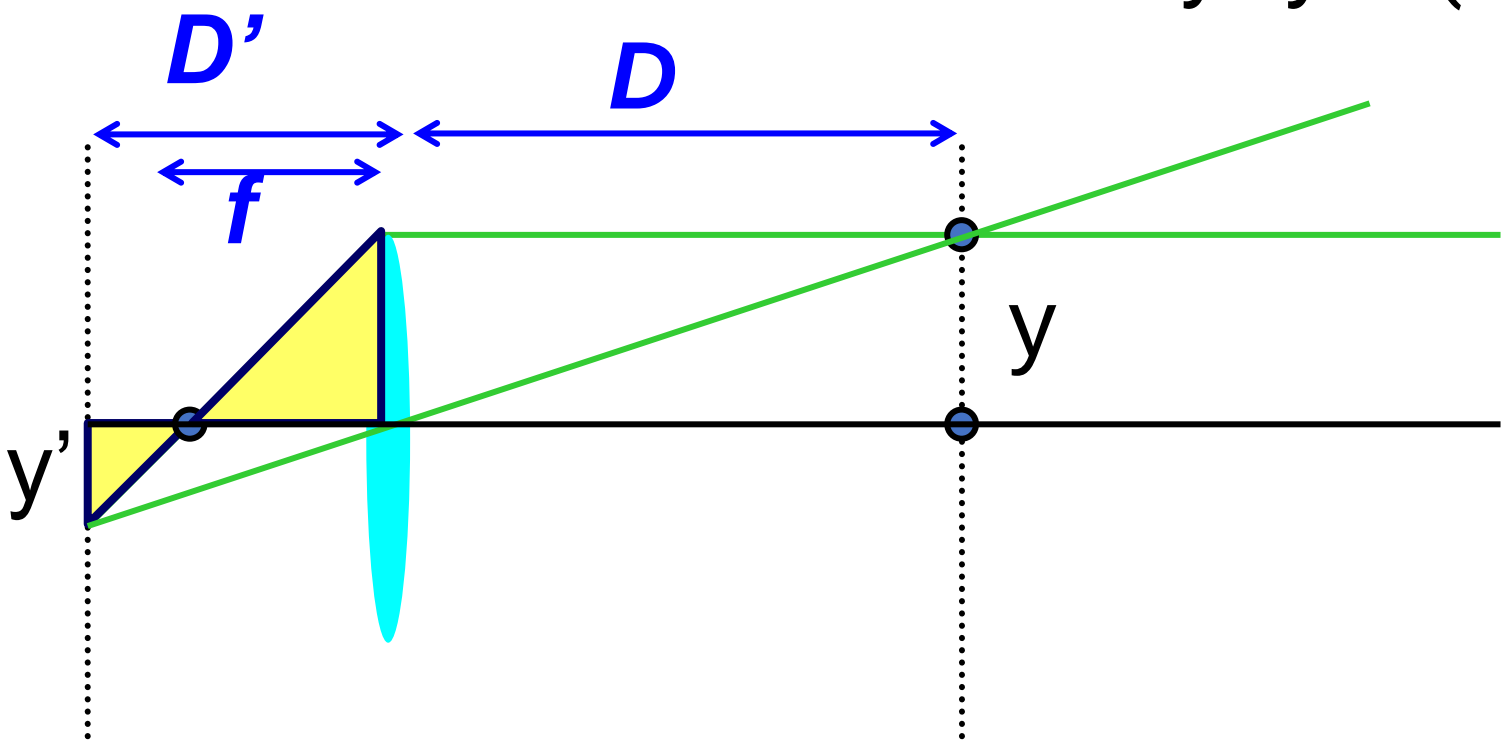

Thin Lens Formula (cont.)

$$\frac{1}{D'} + \frac{1}{D} = \frac{1}{f}$$

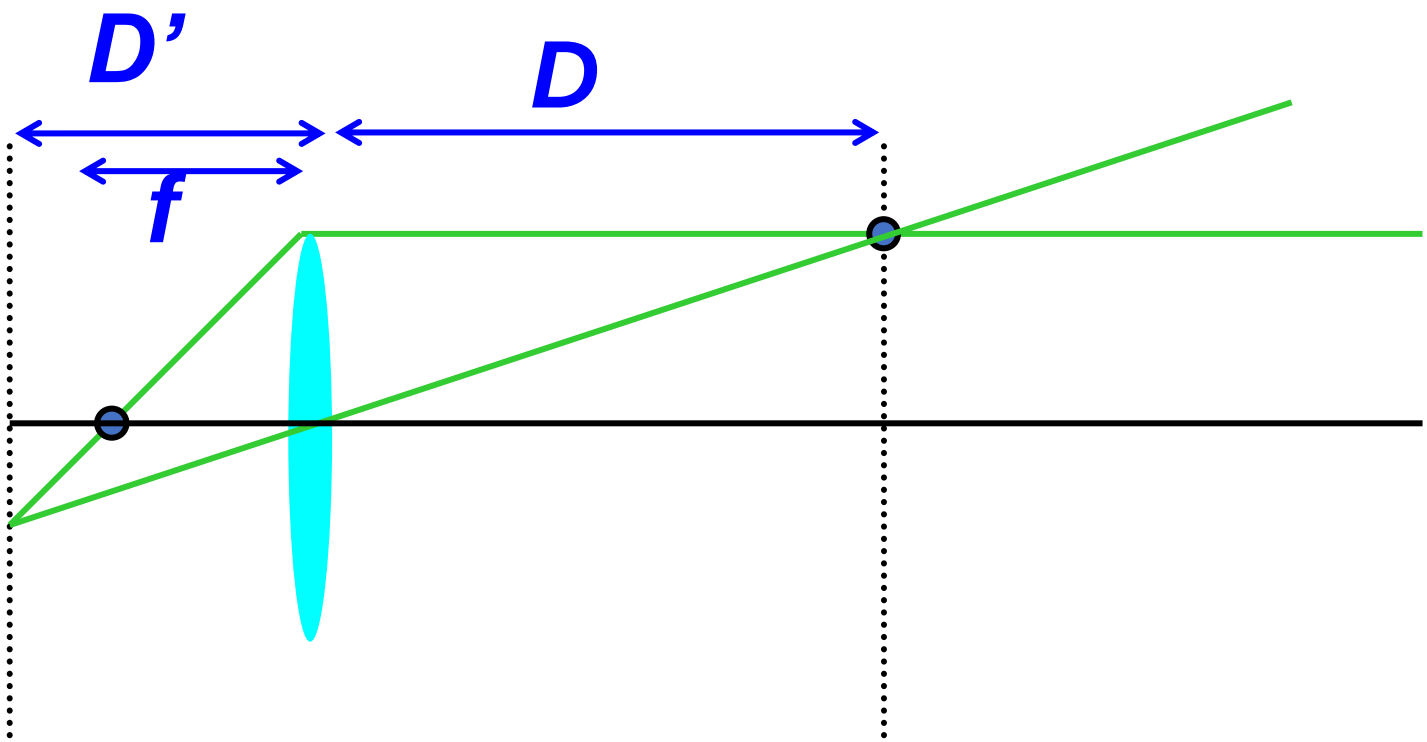

Adding a Lens (cont.)

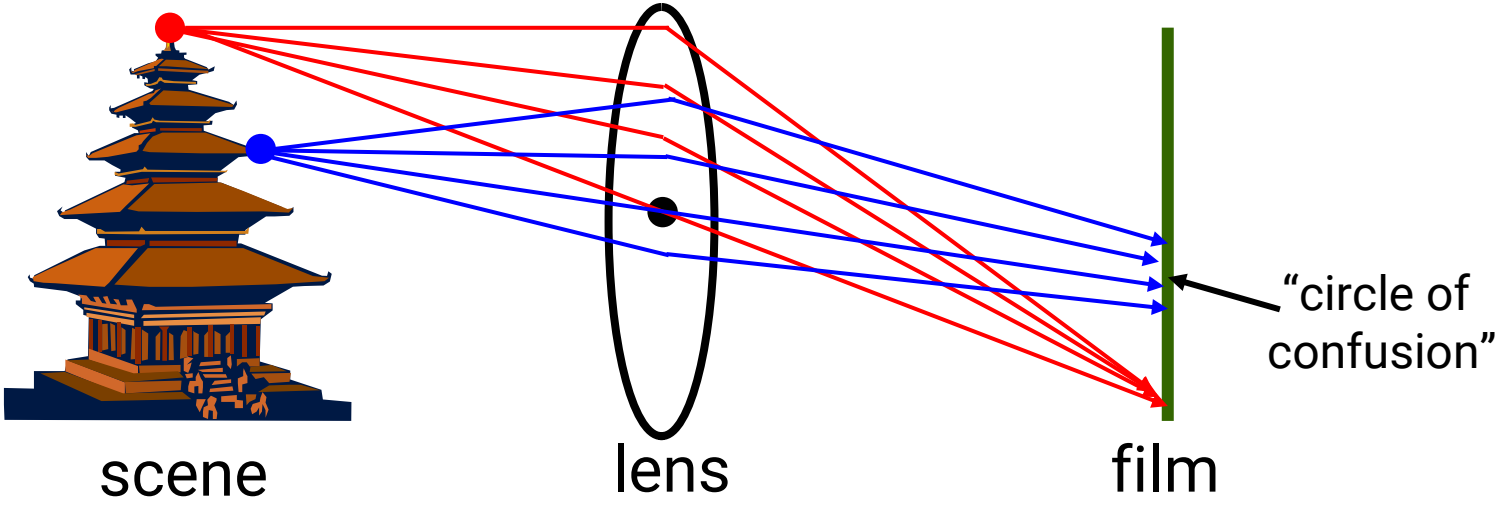

A lens focuses light onto the film

- There is a specific distance at which objects are "in focus"
- Other points are projected to a "circle of confusion" in the image

Zoom Lens

200mm

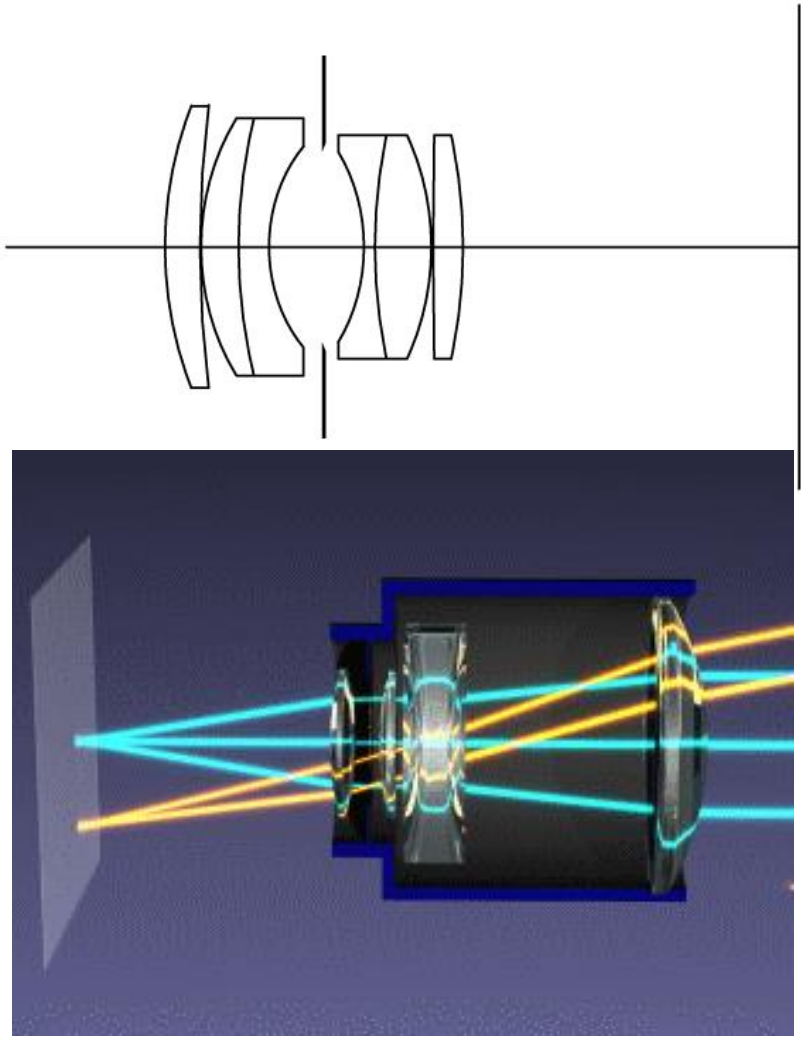

Nikon 28-200mm zoom lens.

Focal Length in Practice

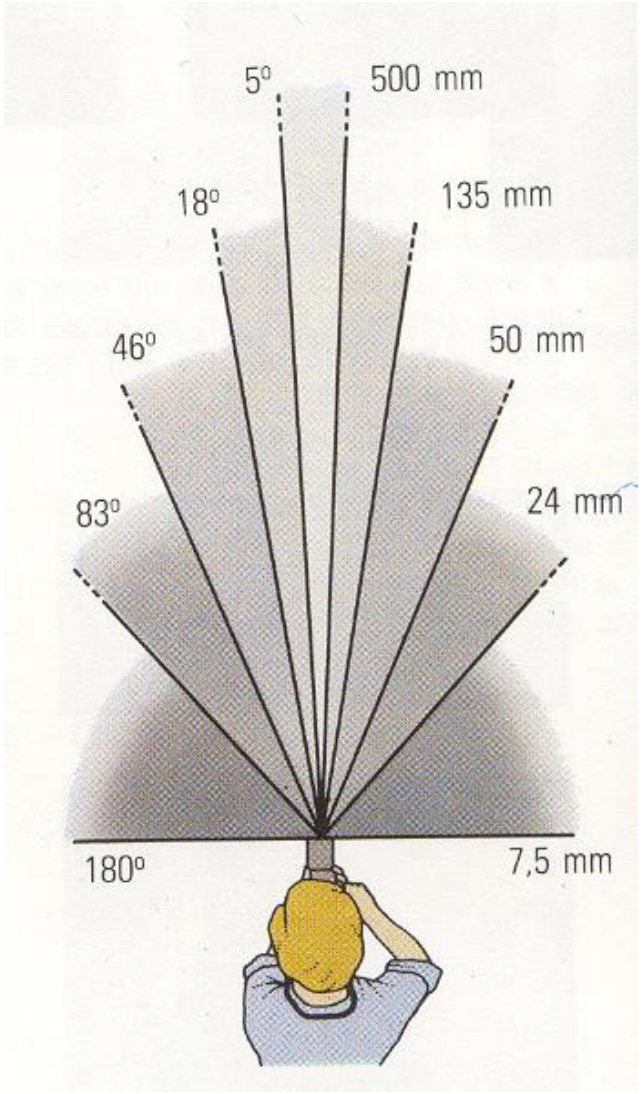

24mm

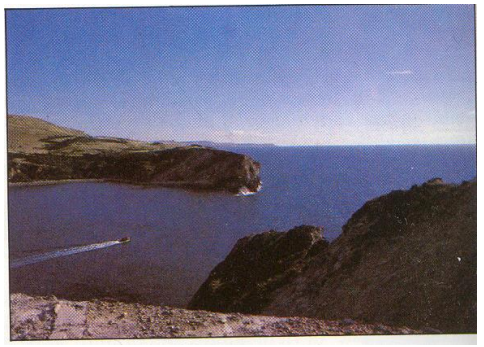

50mm

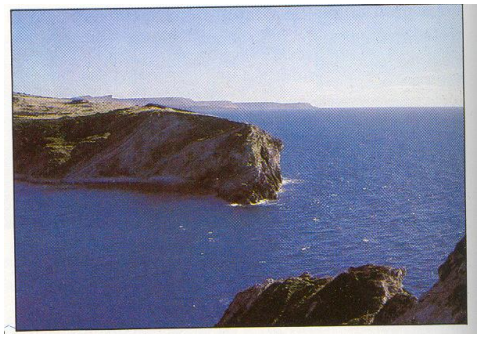

135mm

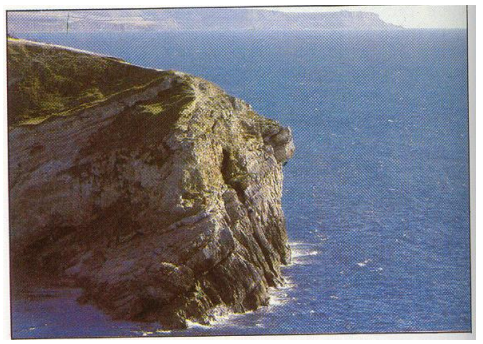

Problems with Lens

- Radial distortion of the image
  - Caused by imperfect lenses
  - Deviation is most noticeable for rays that pass through the edge of the lens

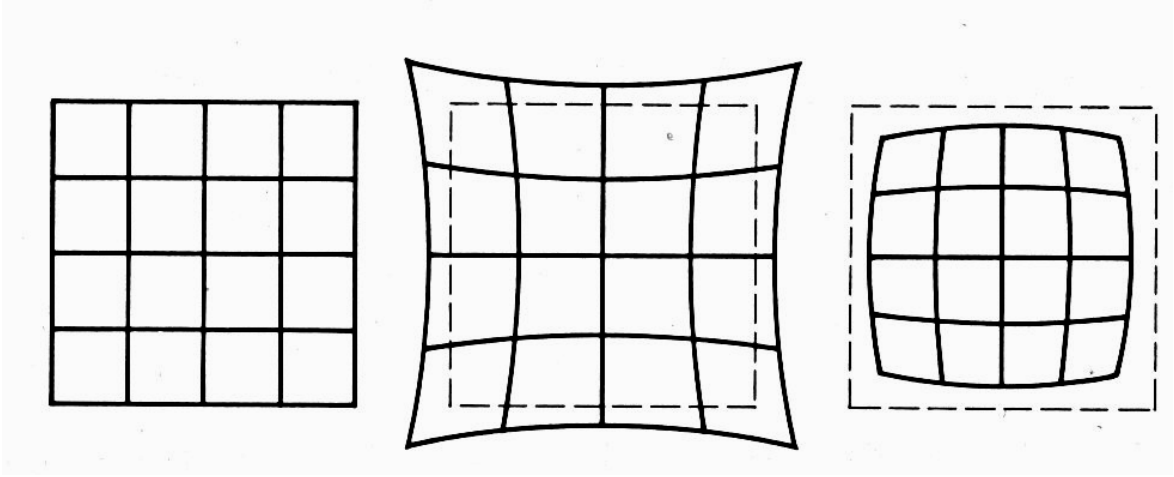

no distortion pin cushion barrel

Problems with Lens (cont.)

- Correcting radial distortion

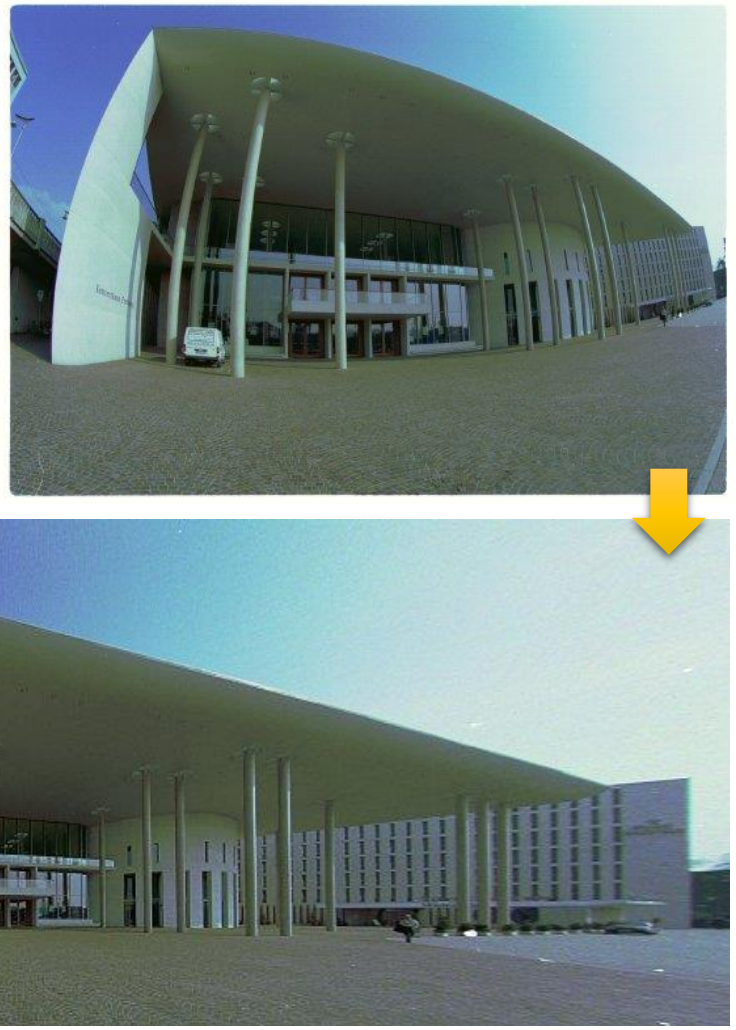

Problems with Lens (cont.)

- Vignetting

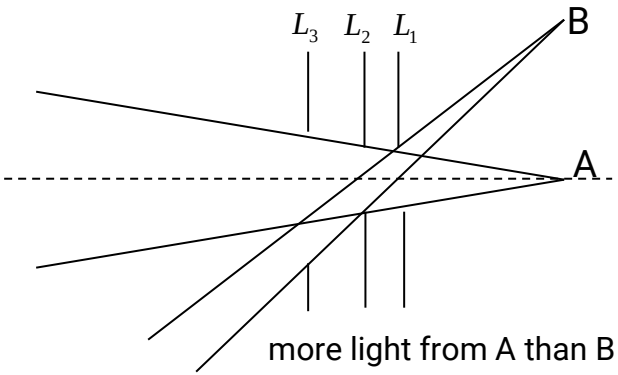

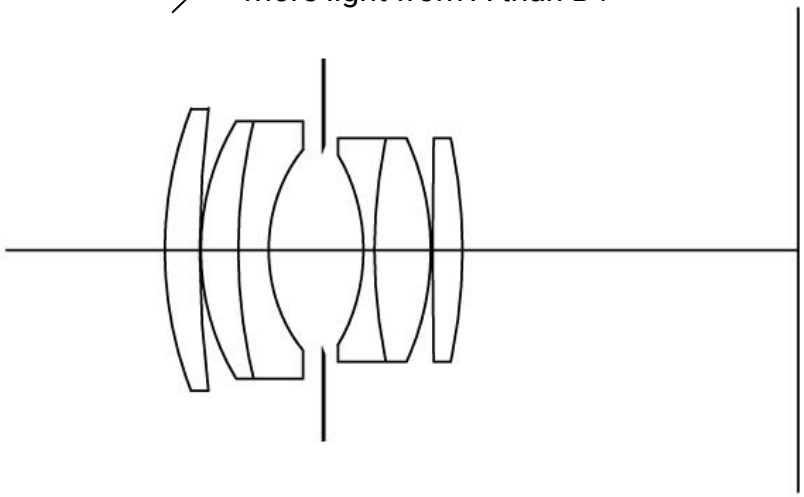

Problems with Lens (cont.)

- Vignetting

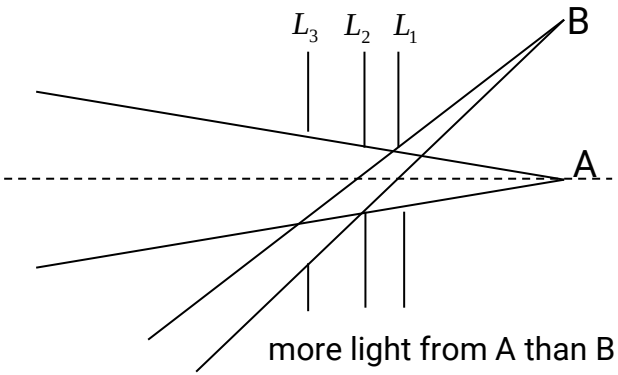

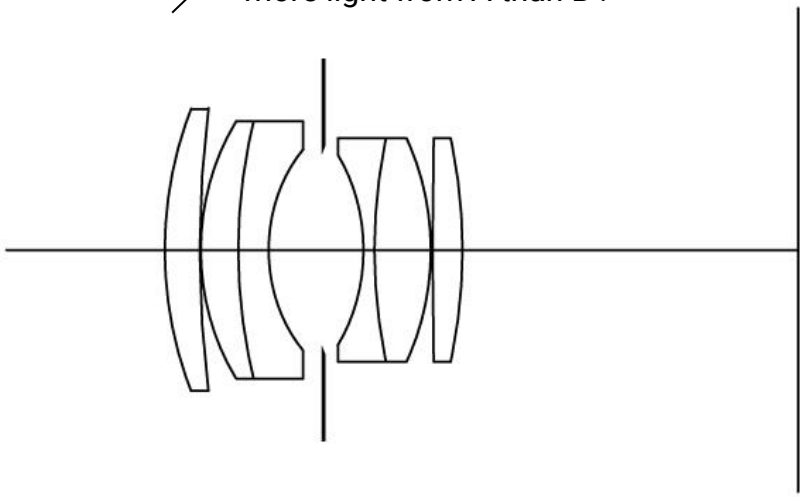

original corrected

Goldman & Chen, ICCV 2005

Chromatic Aberration

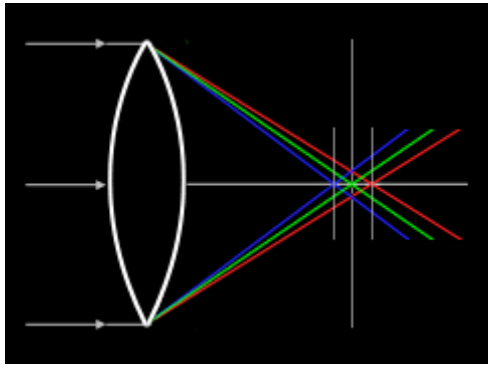

Lens has different refractive indices for different wavelengths.

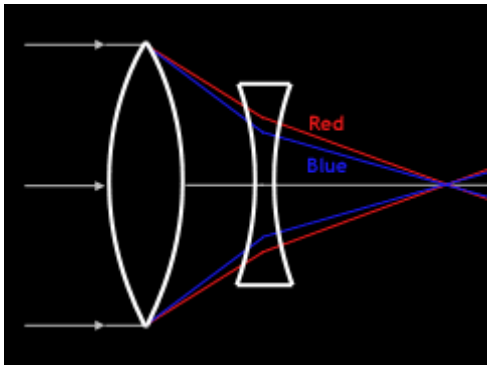

Special lens systems using two or more pieces of glass with different refractive indexes can reduce or eliminate this problem.

Exposure

- **Exposure = aperture + shutter speed**
  - **Aperture** of diameter D restricts the range of rays (aperture may be on either side of the lens)
  - **Shutter speed** is the amount of time that light is allowed to pass through the aperture

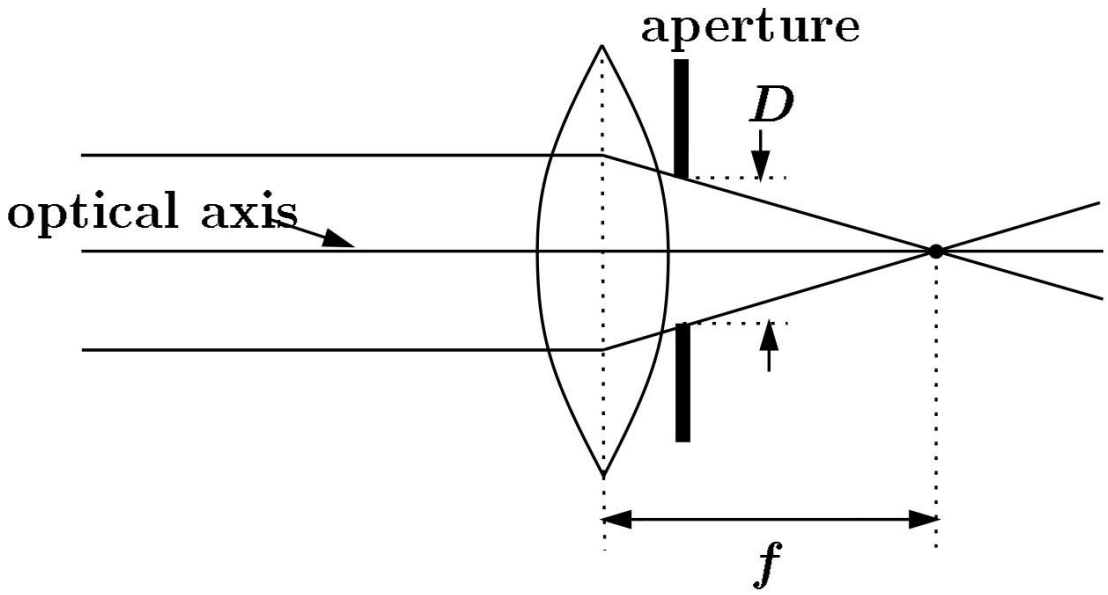

Exposure (cont.)

- **Aperture (in f stop)**

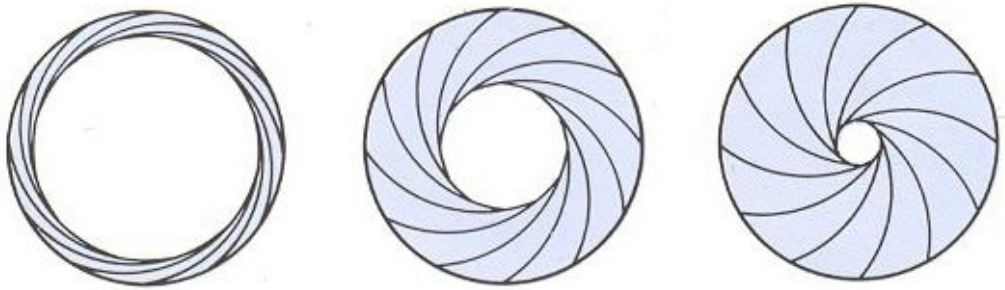

- **Shutter speed (in fraction of a second)**

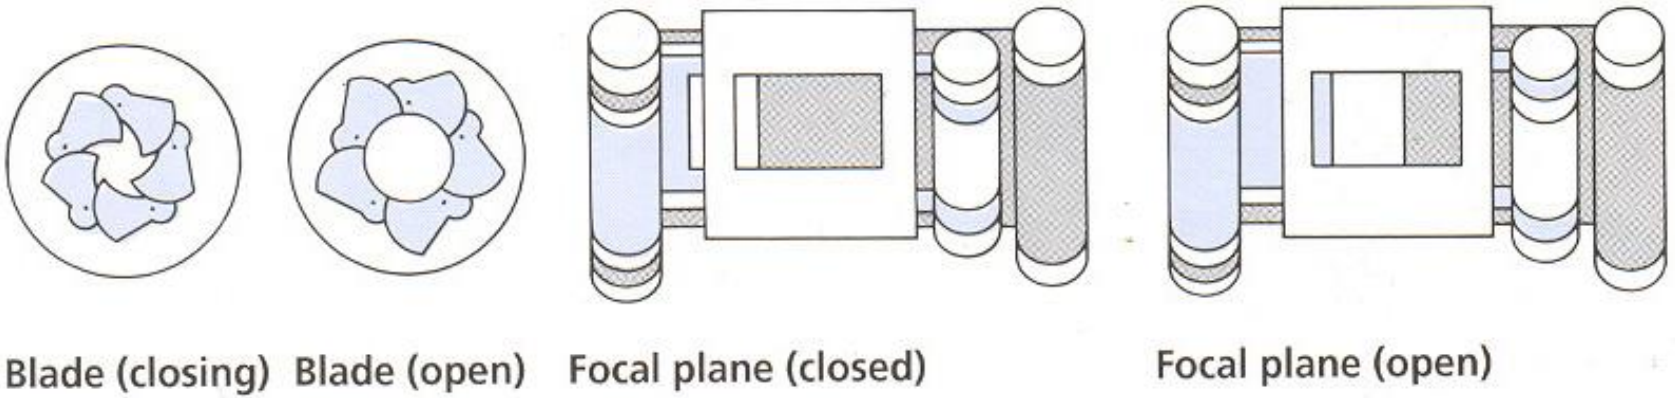

Effect of Shutter Speeds

- Slow shutter speed ➔ more light, but more **motion blur**

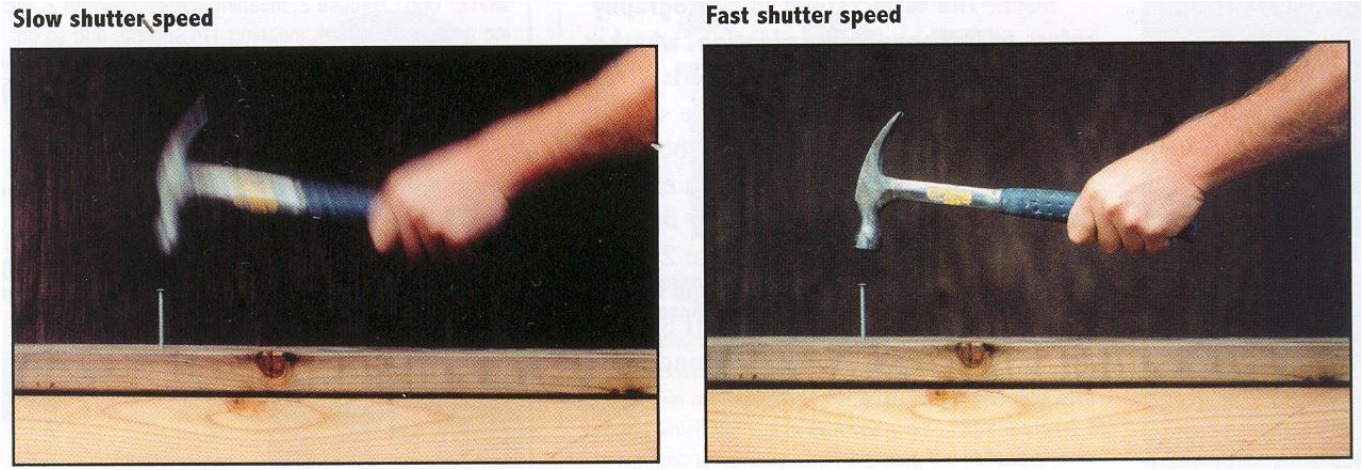

- Faster shutter speed freezes motion


1/125 sec.

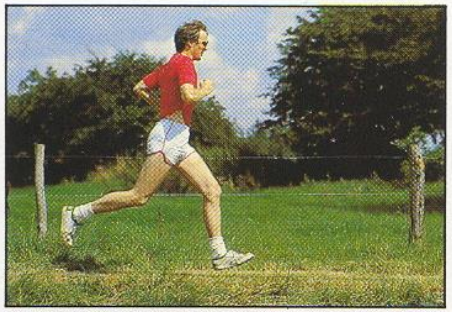
1/250 sec.

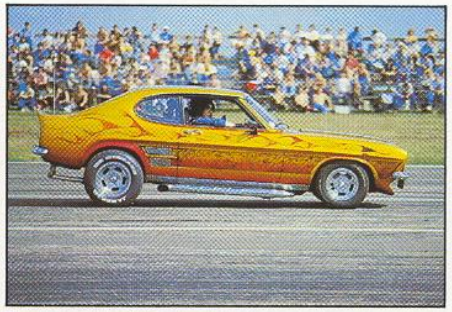
1/500 sec.

1/1000 sec.

Effect of Shutter Speeds (cont.)

- Light trail

Aperture

- Aperture is the diameter of the lens opening, usually specified by **f-stop**, f/D, a fraction of the focal length

- When a change in f-stop occurs, the light is either doubled or cut in half.
- Lower f-stop, more light (larger lens opening)
- Higher f-stop, less light (smaller lens opening)

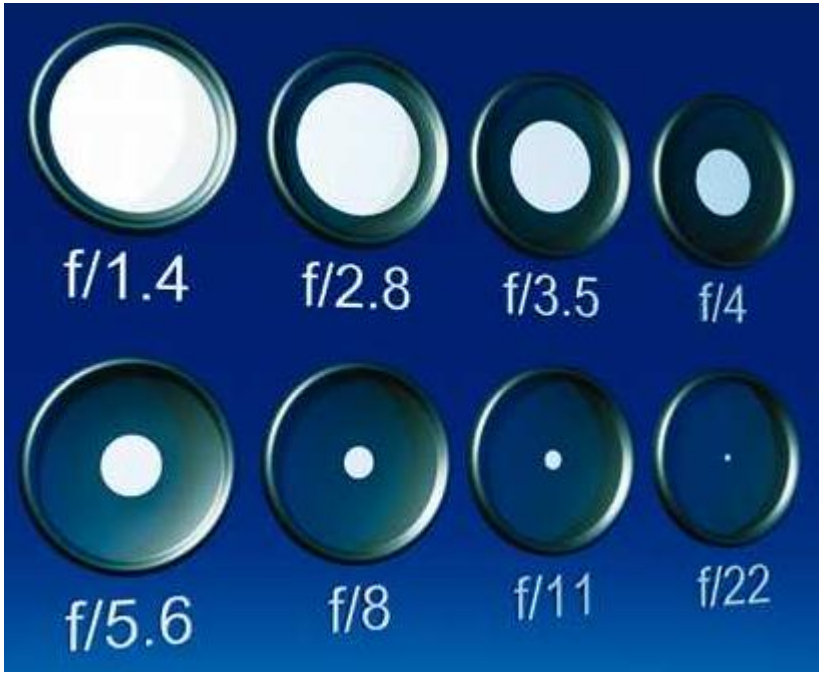

Depth of Field

- Changing the aperture size affects the **depth of field**
  - A smaller aperture increases the range in which the object is approximately in focus

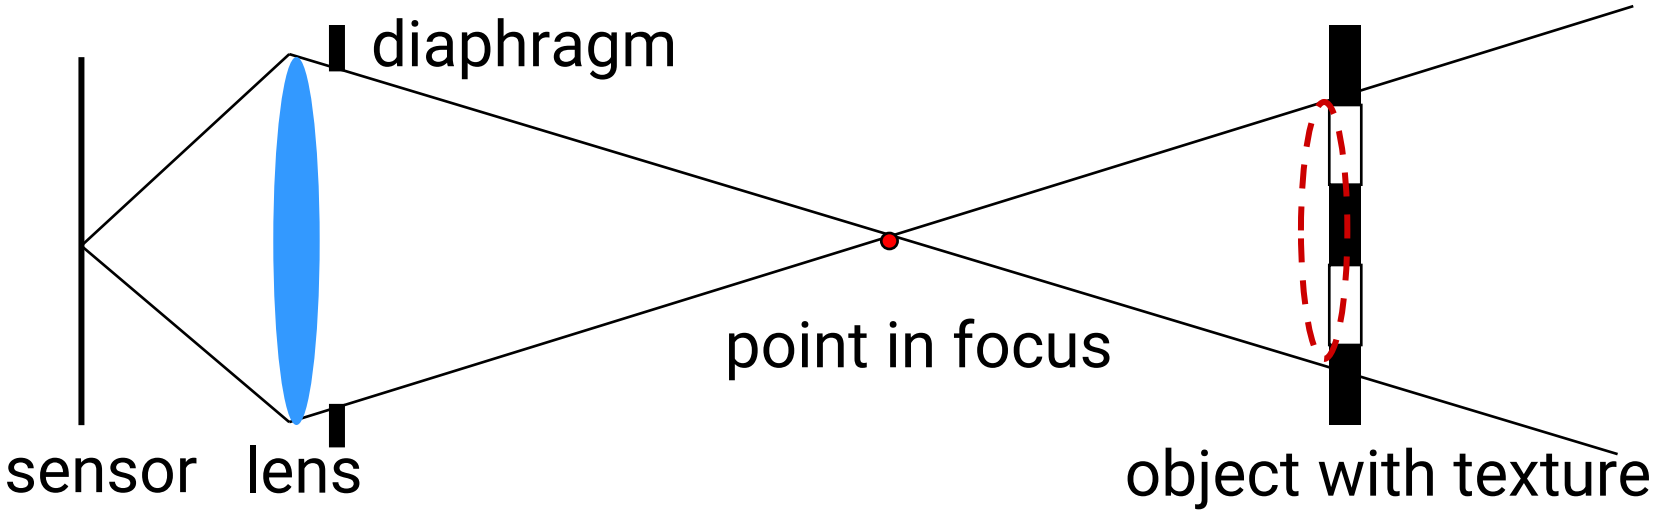

Depth of Field (cont.)

- Changing the aperture size affects the **depth of field**
  - A smaller aperture increases the range in which the object is approximately in focus

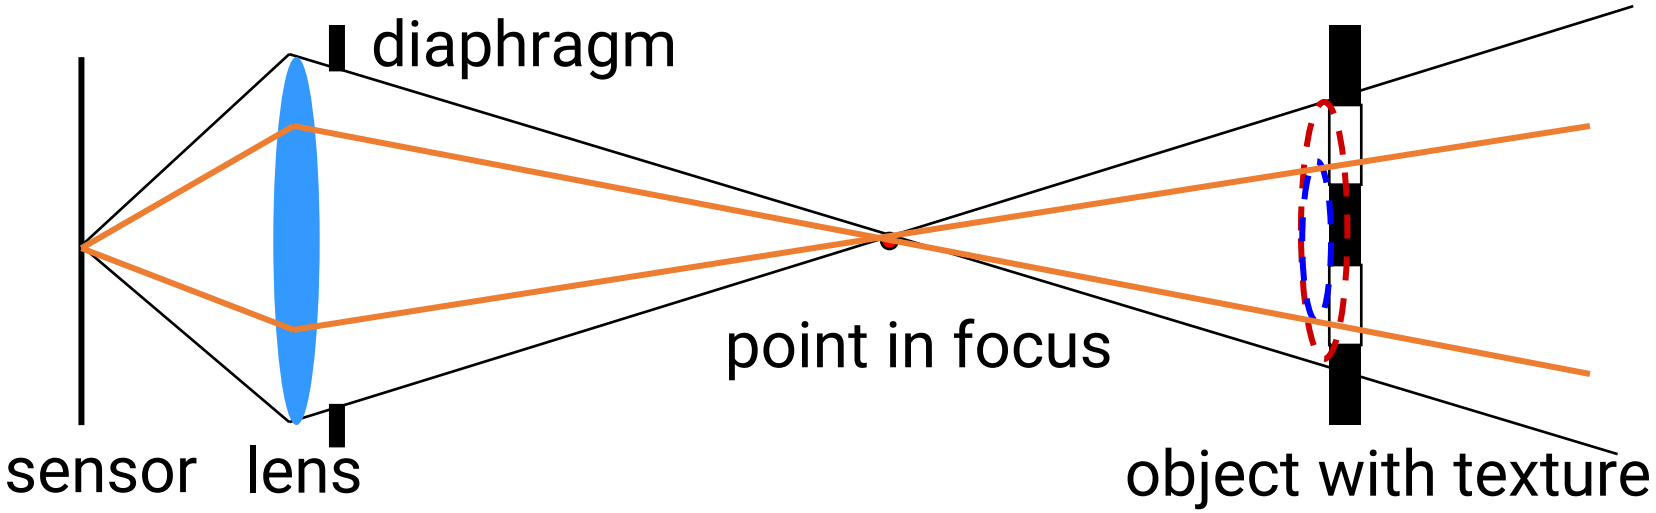

Depth of Field (cont.)

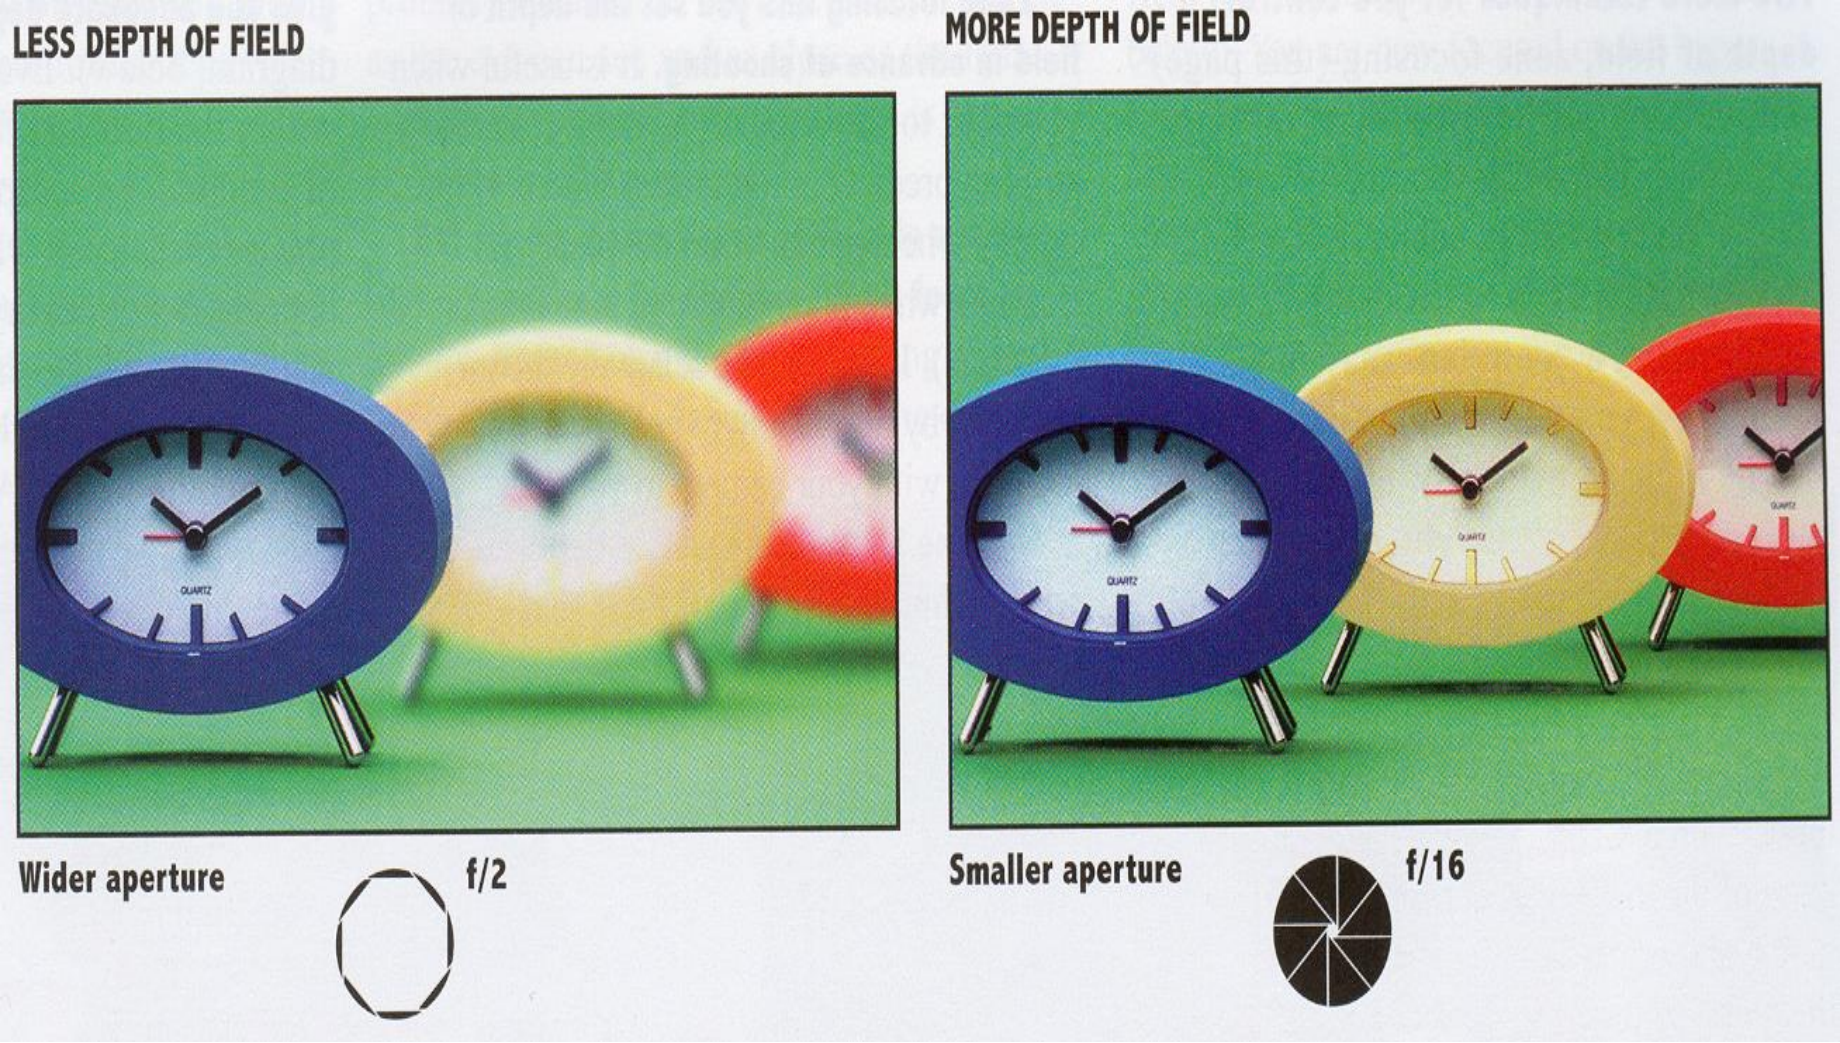

Aperture and Shutter Speed

- The same exposure is obtained with an exposure twice as long and an aperture area half as big

Aperture and Shutter Speed (cont.)

- Assume we know how much light we need
- We have the choice of an infinity of shutter speed/aperture pairs

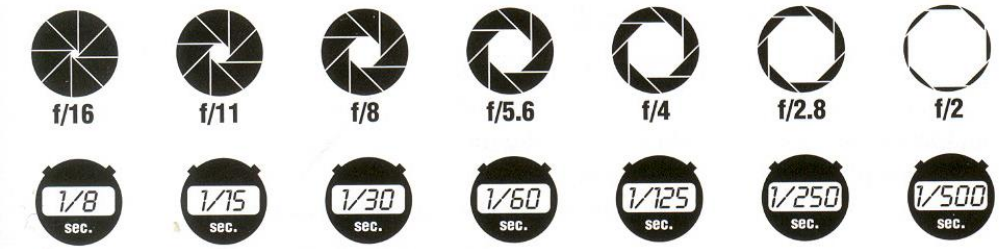

- What will guide our choice of a shutter speed?
  - Freeze motion vs. motion blur, camera shake
- What will guide our choice of an aperture?
  - Depth of field, the diffraction limit

Exposure and Metering

- The camera metering system measures how bright the scene is
- In **aperture priority** mode, the photographer sets the aperture, the camera sets the shutter speed
- In **shutter-speed** priority mode, the photographers set the shutter speed and the camera deduces the aperture
- In **program mode**, the camera decides both exposure and shutter speed
- In **manual mode**, the user decides everything (but can get feedback)

Exposure and Metering (cont.)

- **Aperture priority**
  - Direct depth of field control
  - Cons: can require impossible shutter speed (e.g., with f/1.4 for a bright scene)
- **Shutter speed priority**
  - Direct motion blur control
  - Cons: can require impossible aperture (e.g., when requesting a 1/1000 speed for a dark scene)
- **Program**
  - Almost no control, but no need for neurons
- **Manual**
  - Full control, but takes more time and thinking

Sensitivity

- Third variable for exposure
- Linear effect (200 ISO needs half the light as 100 ISO)
- Digital photography: trade sensitivity for noise

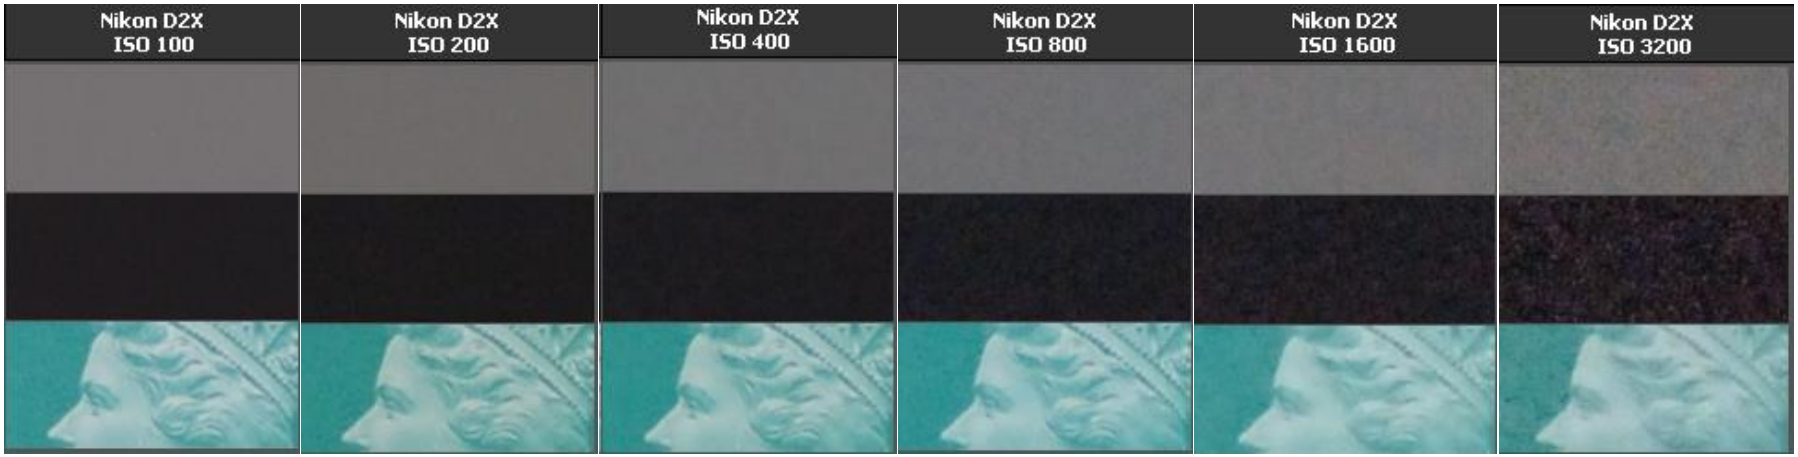

Demo

- https://camerasim.com/camerasim-free-web-app/

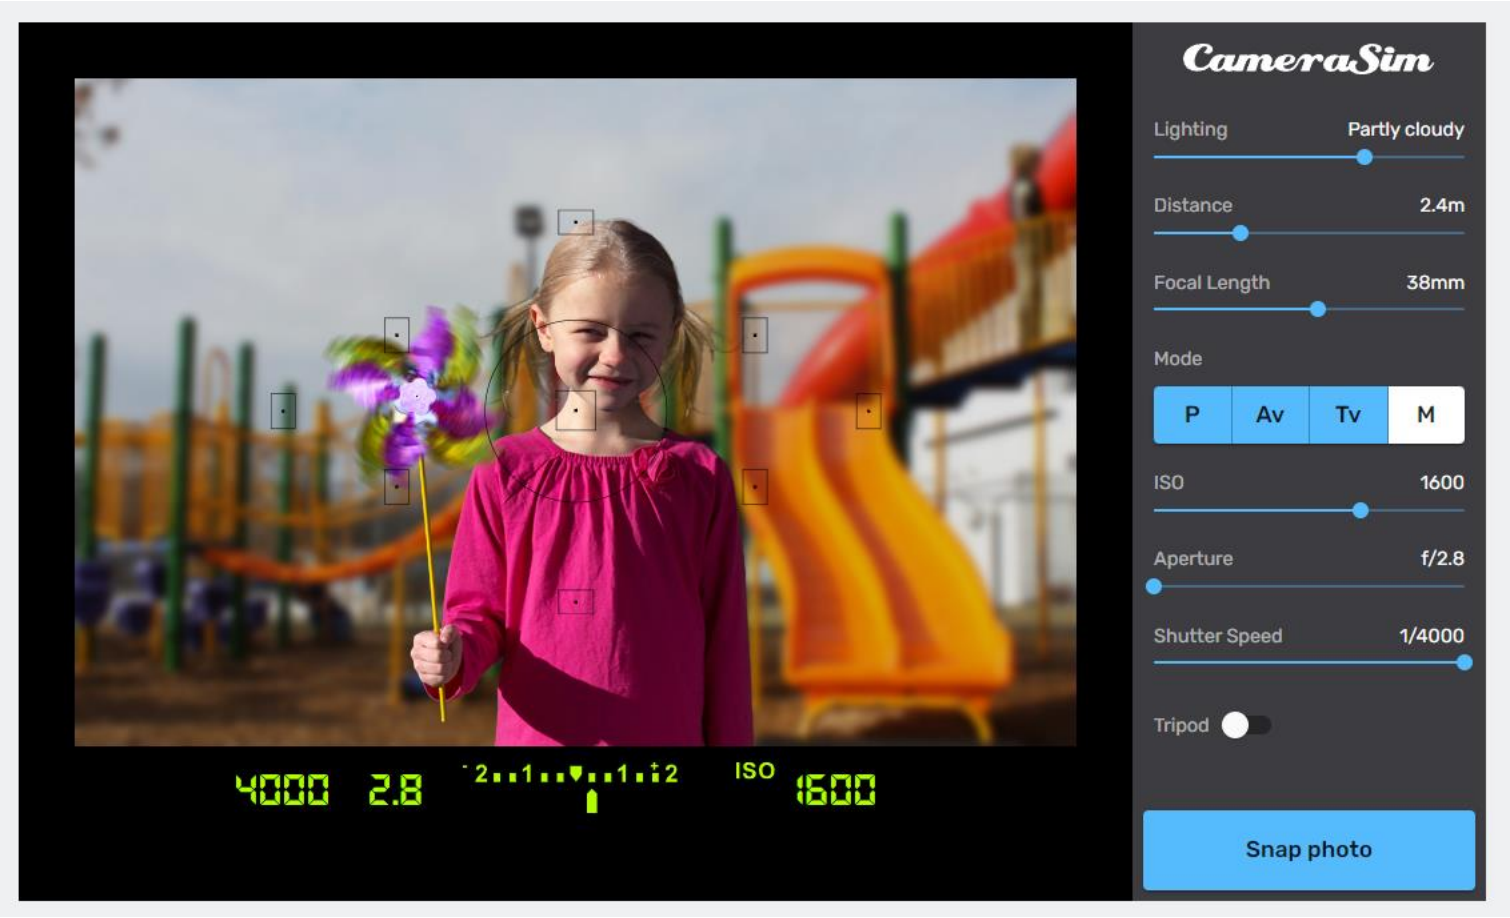

Film Camera

scene

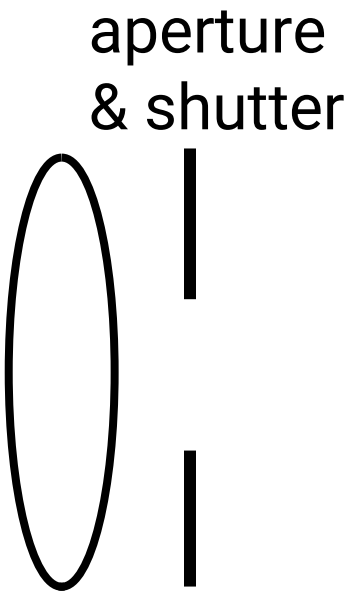

lens &
motor

film

Digital Camera

scene

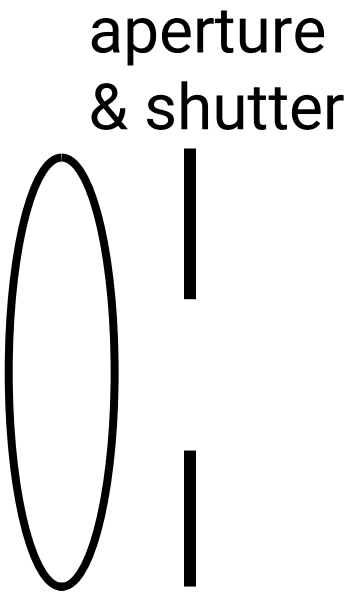

lens &
motor

sensor
array

- A digital camera replaces film with a sensor array
- Each cell in the array is a light-sensitive diode that converts photons to electrons

CCD v.s. CMOS

- CCD is less susceptible to noise (special process, higher fill factor)
- CMOS is more flexible, less expensive (standard process), less power consumption

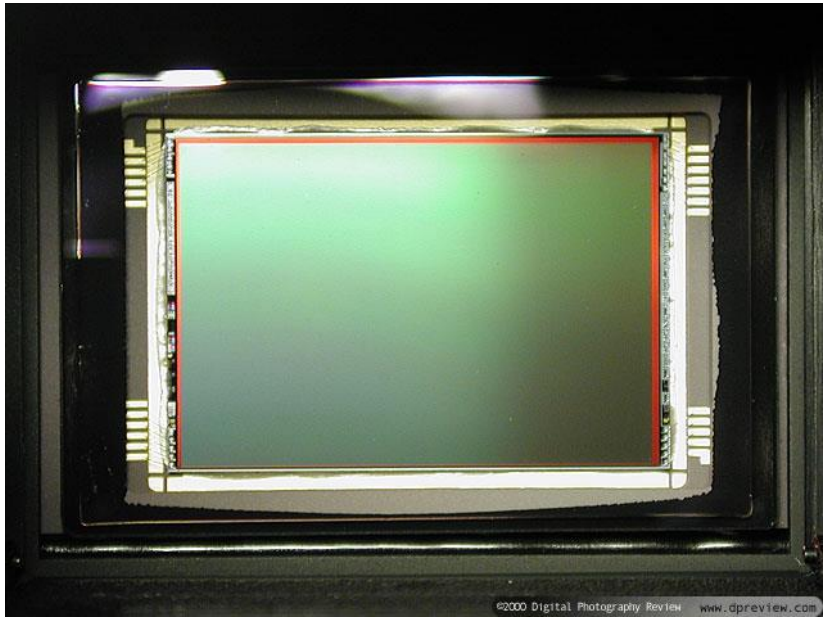

CCD

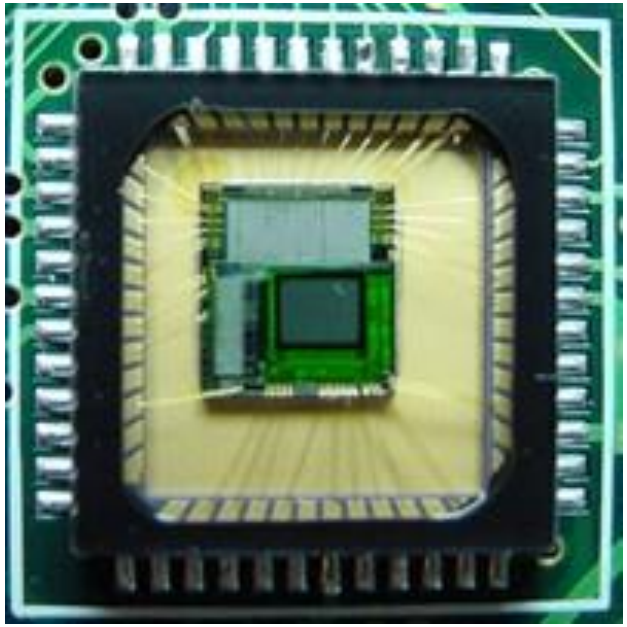

CMOS

SLR (Single-Lens Reflex)

- Reflex (R in SLR) means that we see through the same lens used to take the image.
- Not the case for compact cameras

SLR View Finder

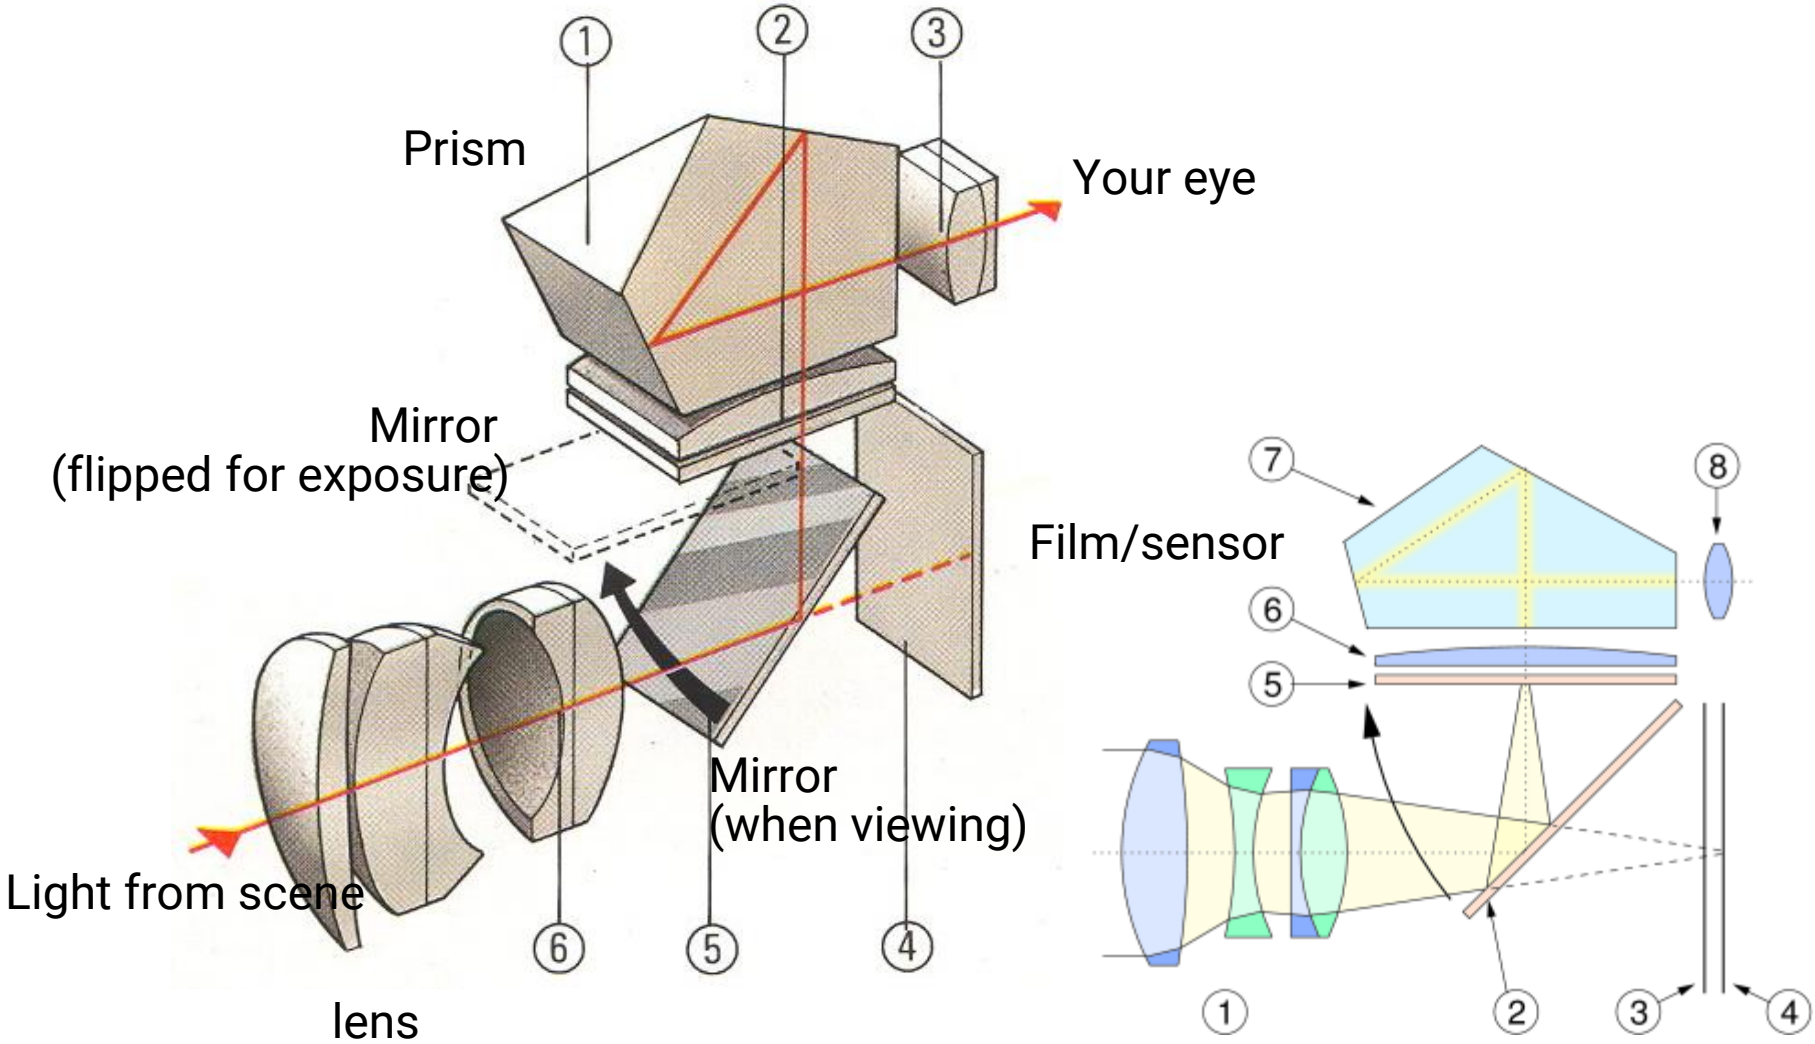

Outline

- Overview and fundamentals
- **Color imaging**
- Camera image processing
- Computational cameras

Color

- So far, we've only talked about monochrome sensors. **Color imaging** has been implemented in several ways:
  - Field sequential
  - Multi-chip
  - Color filter array
  - X3 sensor

Field Sequential

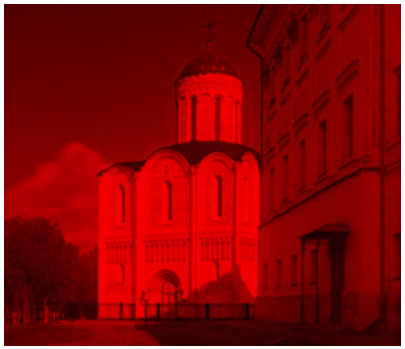

Field Sequential (cont.)

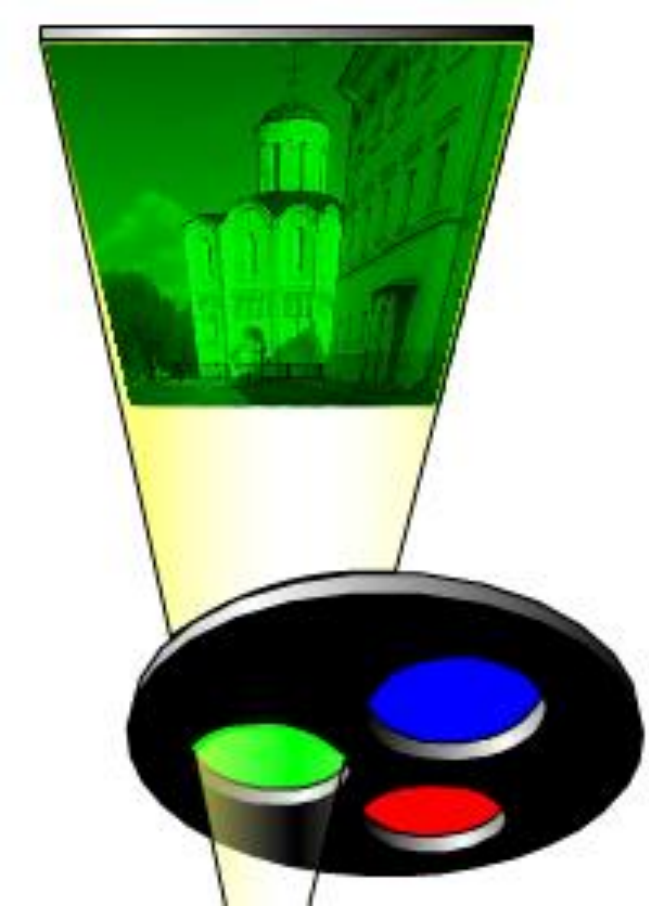

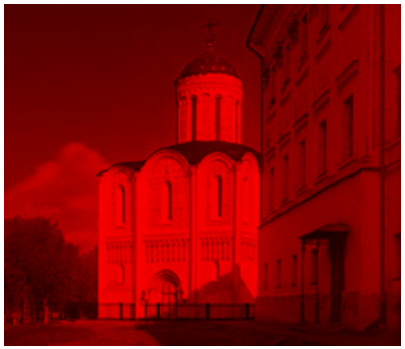

Field Sequential (cont.)

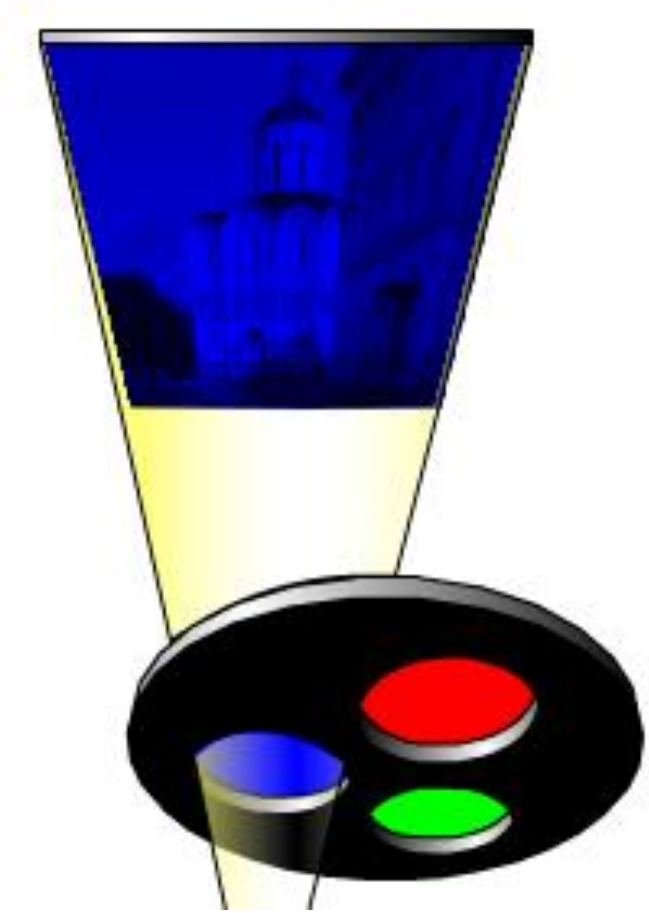

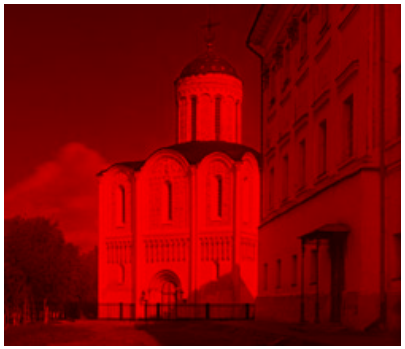

Prokudin-Gorskii (early 1900's)

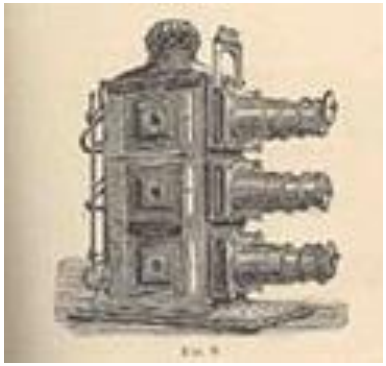

lantern projector

http://www.loc.gov/exhibits/empire/

Prokudin-Gorskii (early 1900's)

Multi-chip

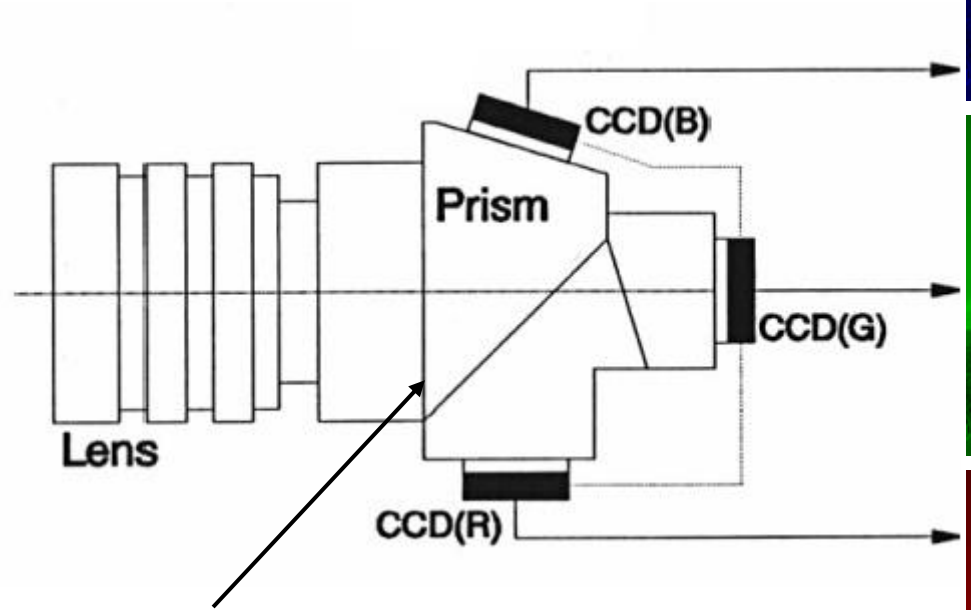

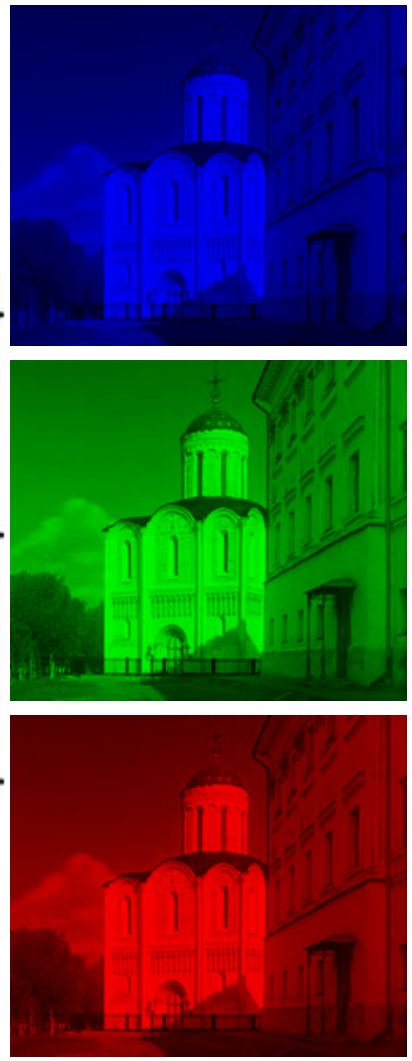

wavelength dependent

Color Filter Array

- Color filter arrays (CFAs) / color filter mosaics

R	G	B
R	G	B
R	G	B
R	G	B

R	G	B	G
R	G	B	G
R	G	B	G
R	G	B	G

Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G
Ye	G	Cy	G

Stripes

Cy	W	Ye	G
Ye	G	Cy	W
Cy	W	Ye	G
Ye	G	Cy	W

G	Mg	G	Mg
Cy	Ye	Cy	Ye
Mg	G	Mg	G
Cy	Ye	Cy	Ye

R	G	R	G
G	B	G	B
R	G	R	G
G	B	G	B

Mosaics

Kodak DCS620x

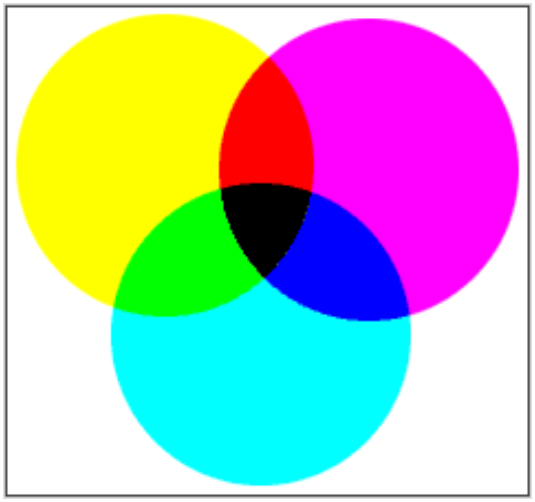

Color Filter Array (cont.)

- Color filter arrays (CFAs) / color filter mosaics

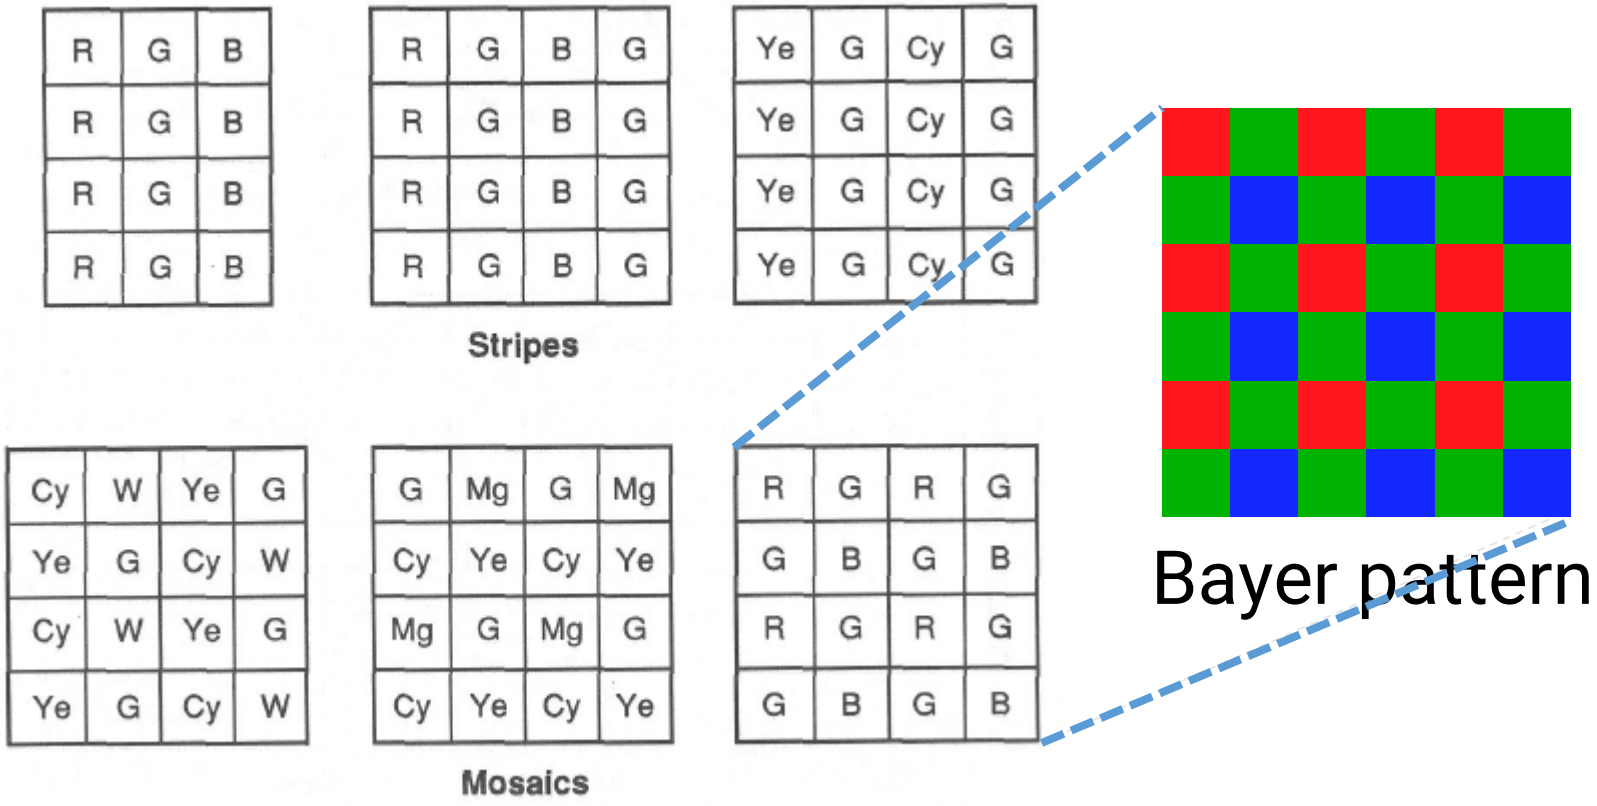

Bayer's Pattern

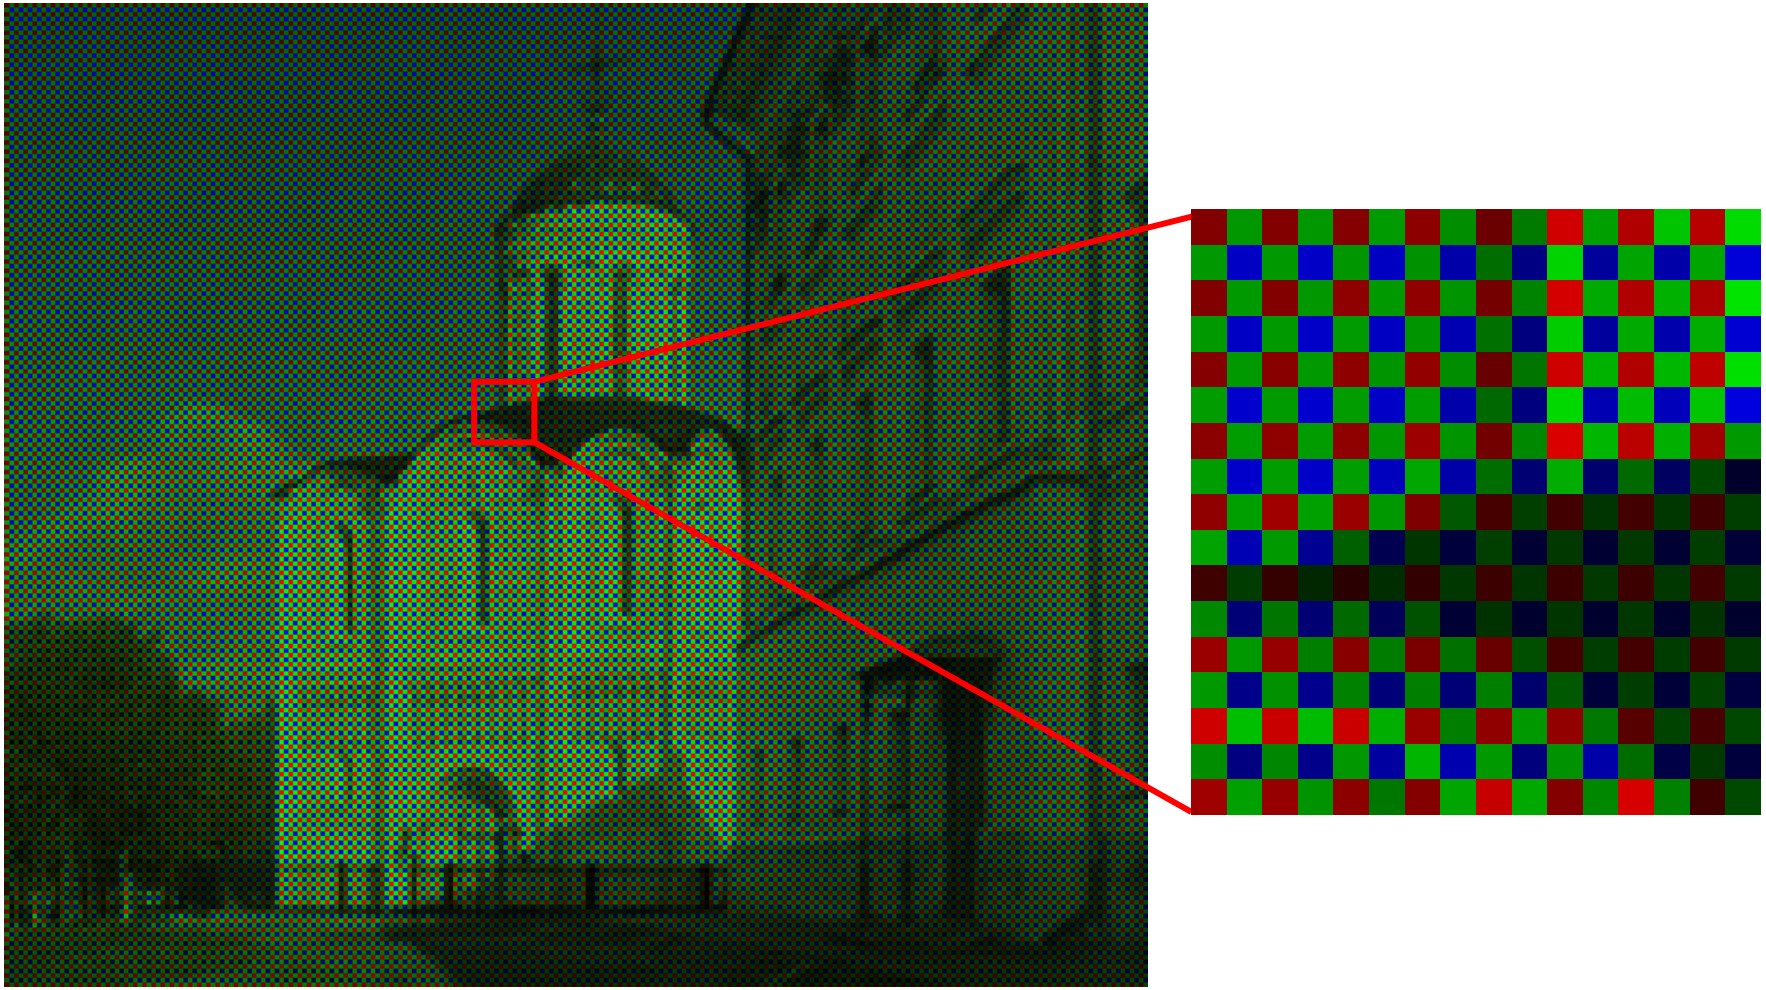

Demosaicking CFA

R 11	G 12	R 13	G 14	R 15	G 16	R 17
G 21	B 22	G 23	B 24	G 25	B 26	G 27
R 31	G 32	R 33	G 34	R 35	G 36	R 37
G 41	B 42	G 43	B 44	G 45	B 46	G 47
R 51	G 52	R 53	G 54	R 55	G 56	R 57

bilinear interpolation

$$G_{44} = (G_{34} + G_{43} + G_{45} + G_{54})/4$$

$$R_{44} = (R_{33} + R_{35} + R_{53} + R_{55})/4$$

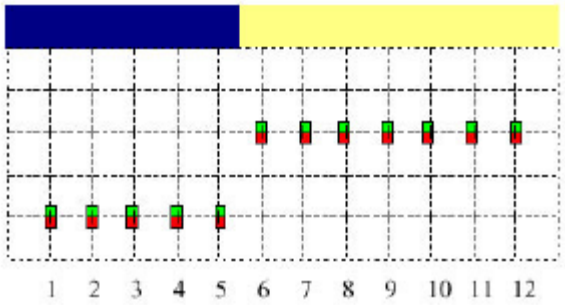

original

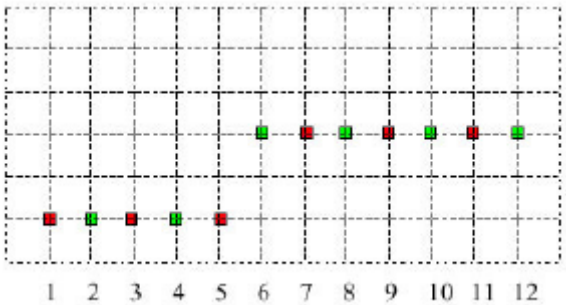

input

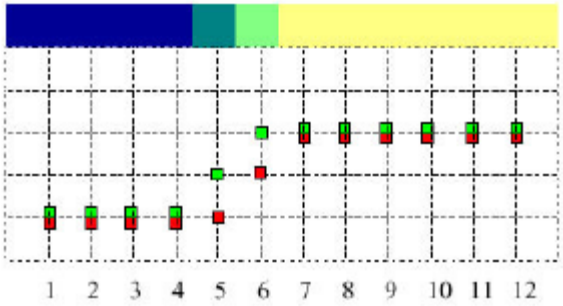

linear interpolation

Demosaicking CFA (cont.)

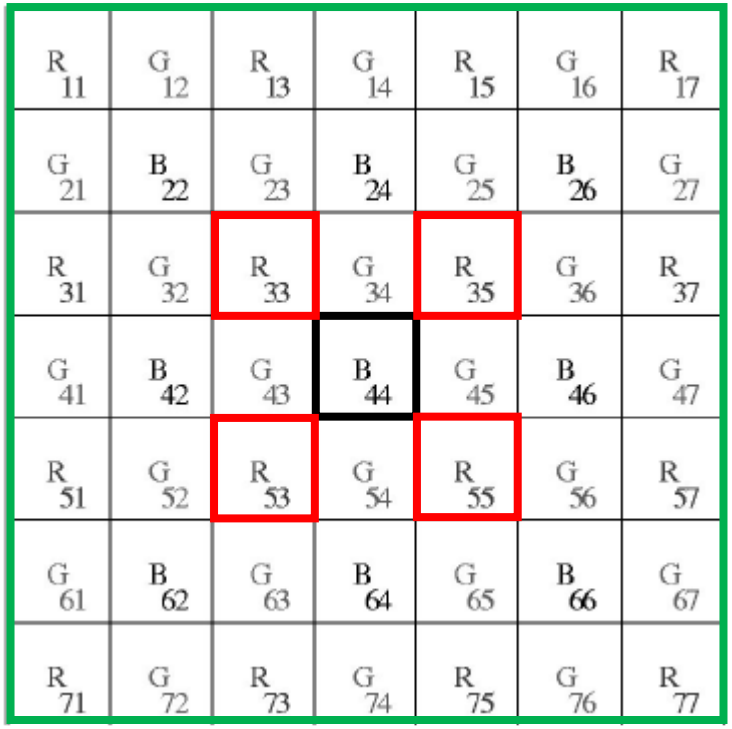

Constant hue-based interpolation (Cok)

Hue: $(R/G, B/G)$

Interpolate G first

$$R_{44} = \mathbf{G}_{44} \frac{\frac{R_{33}}{\mathbf{G}_{33}} + \frac{R_{35}}{\mathbf{G}_{35}} + \frac{R_{53}}{\mathbf{G}_{53}} + \frac{R_{55}}{\mathbf{G}_{55}}}{4}$$

$$B_{33} = \mathbf{G}_{33} \frac{\frac{B_{22}}{\mathbf{G}_{22}} + \frac{B_{24}}{\mathbf{G}_{24}} + \frac{B_{42}}{\mathbf{G}_{42}} + \frac{B_{44}}{\mathbf{G}_{44}}}{4}$$

Demosaicking CFA (cont.)

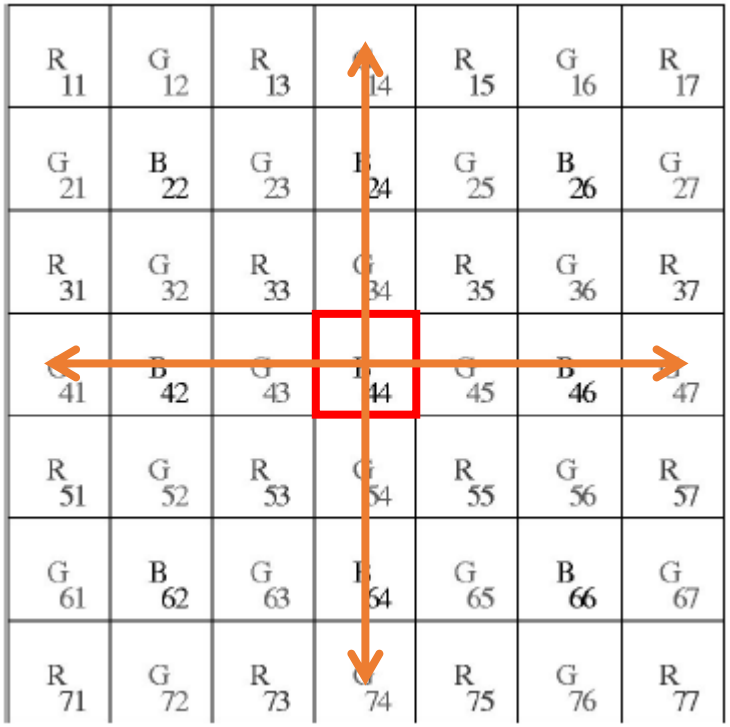

Gradient-based interpolation (LaRoche-Prescott)

1. Interpolation on G

$$\alpha = \text{abs}[(B_{42} + B_{46})/2 - B_{44}]$$

$$\beta = \text{abs}[(B_{24} + B_{64})/2 - B_{44}]$$

$$\mathbf{G}_{44} = \begin{cases} \dfrac{G_{43} + G_{45}}{2} & \text{if } \alpha < \beta \\ \dfrac{G_{34} + G_{54}}{2} & \text{if } \alpha > \beta. \\ \dfrac{G_{43} + G_{45} + G_{34} + G_{54}}{4} & \text{if } \alpha = \beta \end{cases}$$

Demosaicking CFA (cont.)

R 11	G 12	R 13	G 14	R 15	G 16	R 17
G 21	B 22	G 23	B 24	G 25	B 26	G 27
R 31	G 32	R 33	G 34	R 35	G 36	R 37
G 41	B 42	G 43	B 44	G 45	B 46	G 47
R 51	G 52	R 53	G 54	R 55	G 56	R 57
G 61	B 62	G 63	B 64	G 65	B 66	G 67
R 71	G 72	R 73	G 74	R 75	G 76	R 77

Gradient-based interpolation (LaRoche-Prescott)

2. Interpolation of color differences

$$R_{34}=\frac{(R_{33}-\mathbf{G}_{33})+(R_{35}-\mathbf{G}_{35})}{2}+G_{34},$$

$$R_{43}=\frac{(R_{33}-\mathbf{G}_{33})+(R_{35}-\mathbf{G}_{35})}{2}+G_{43},$$

$$R_{44}=\frac{(R_{33}-\mathbf{G}_{33})+(R_{35}-\mathbf{G}_{35})+(R_{53}-\mathbf{G}_{53})+(R_{55}-\mathbf{G}_{55})}{4}+G_{44}.$$

Demosaicking CFA (cont.)

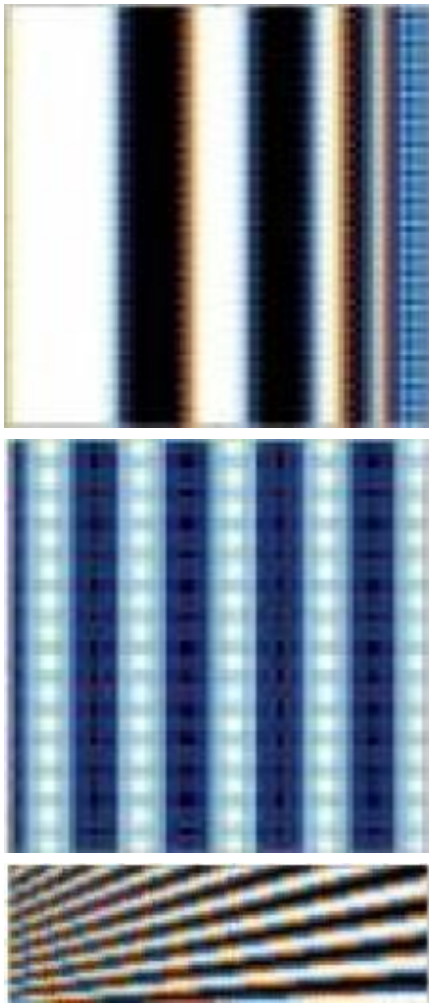

bilinear

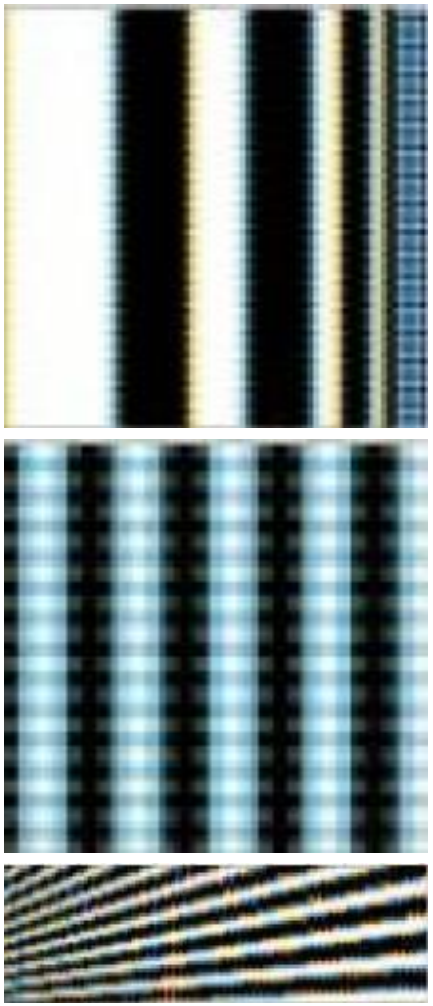

Cok

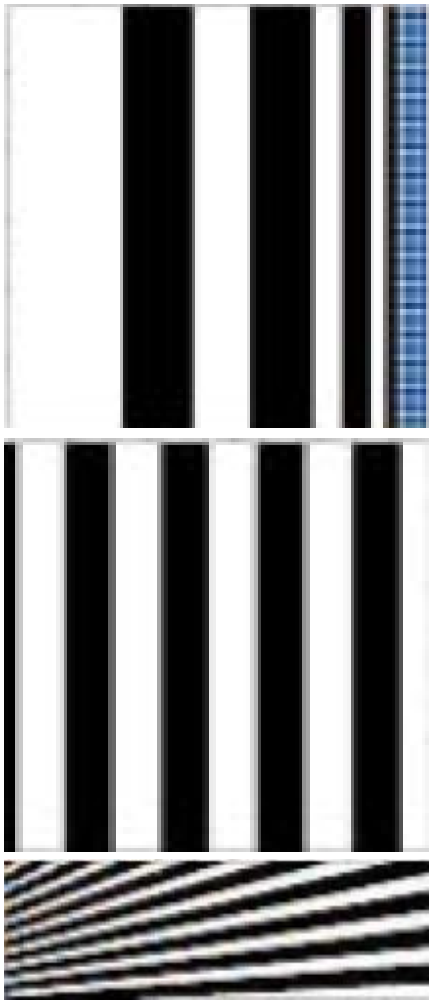

LaRoche

Demosaicking CFA (cont.)

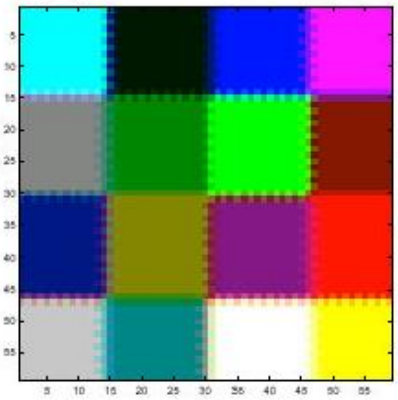

Bilinear

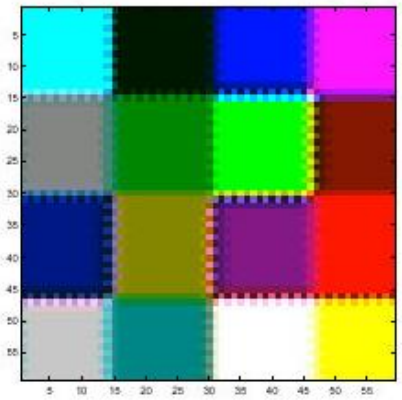

Cok

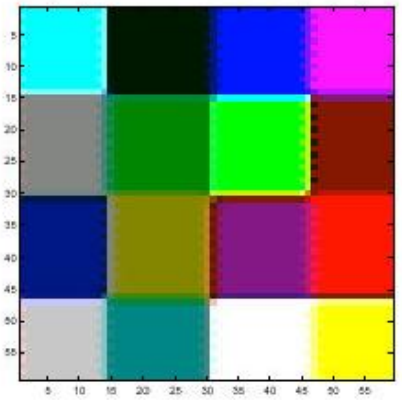

LaRoche

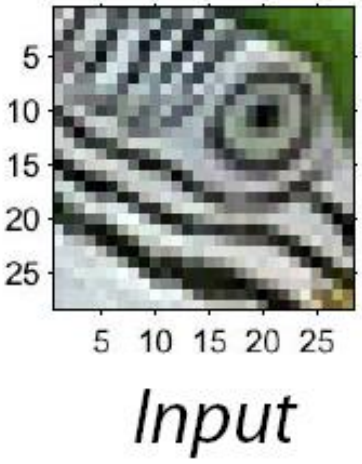

Input

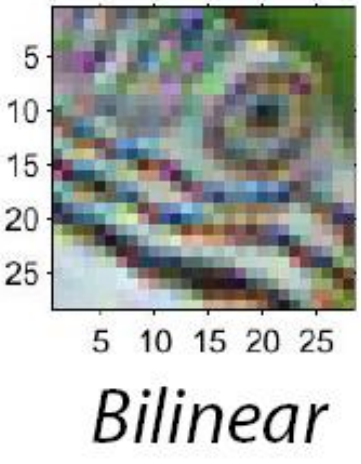

Bilinear

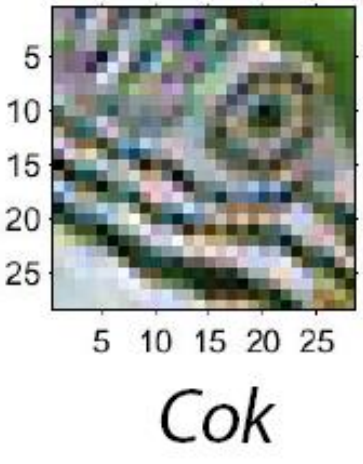

Cok

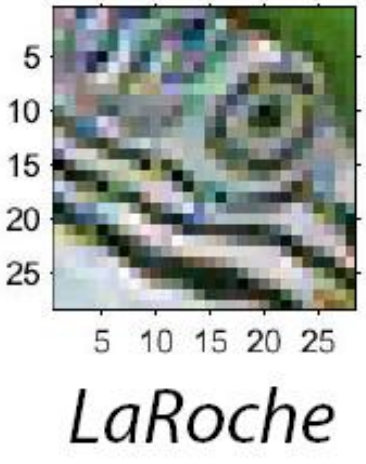

LaRoche

Demosaicking CFA (cont.)

- Deep learning approach

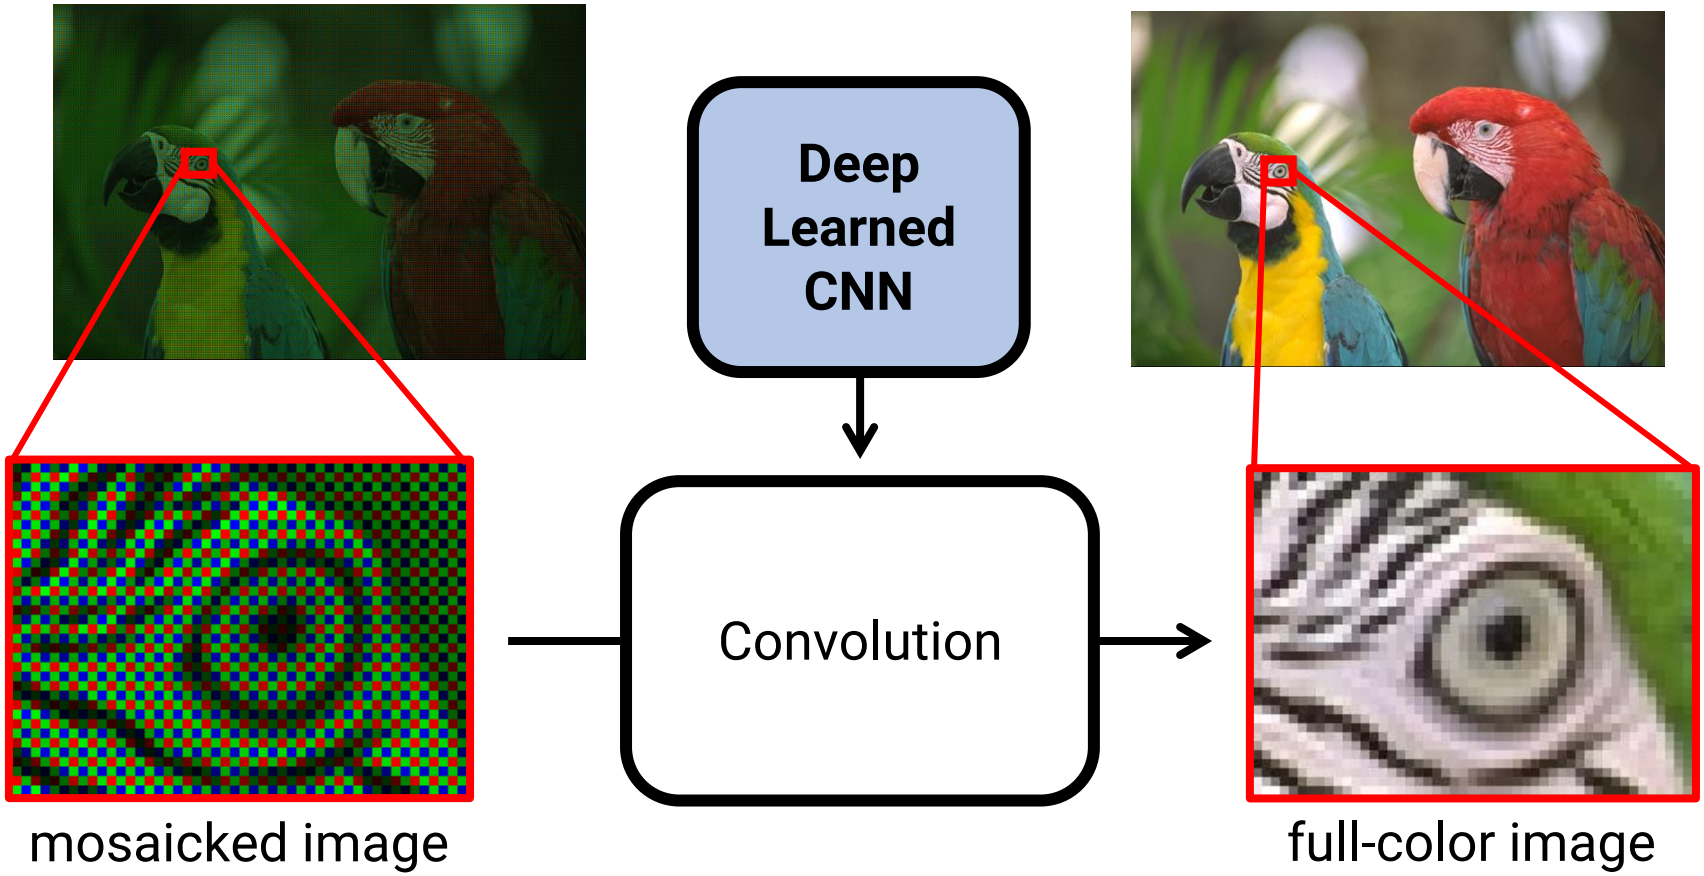

Foveon X3 sensor

- light penetrates to different depths for different wavelengths
- Multilayer CMOS sensor gets 3 different spectral sensitivities

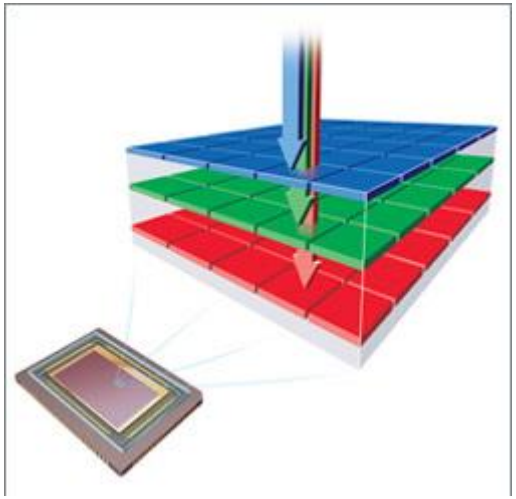

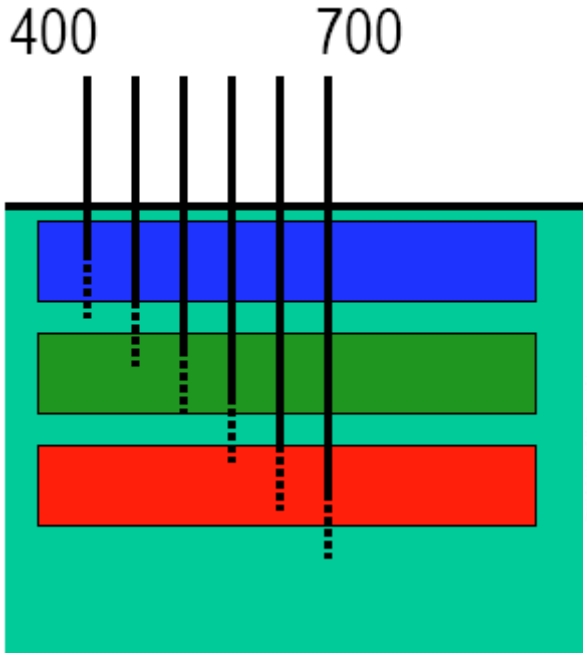

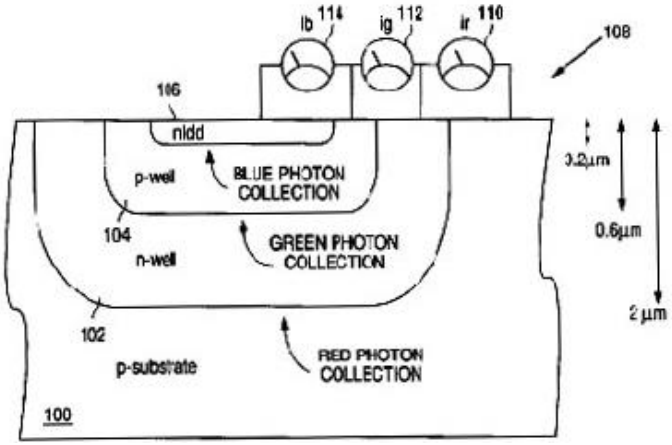

Color Filter Array

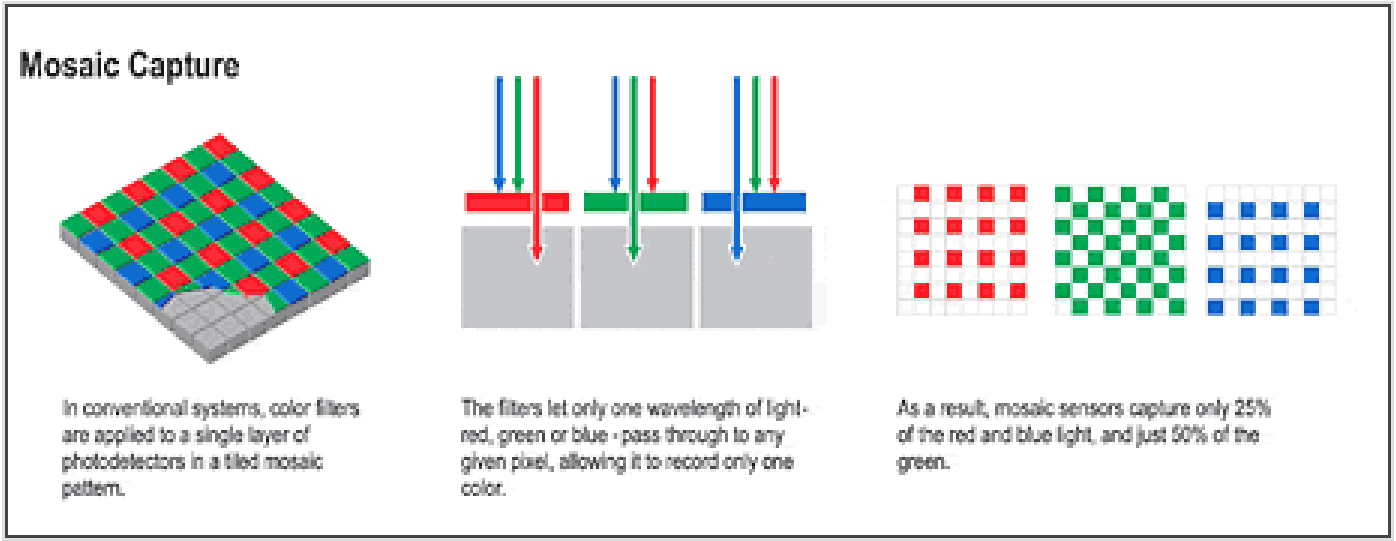

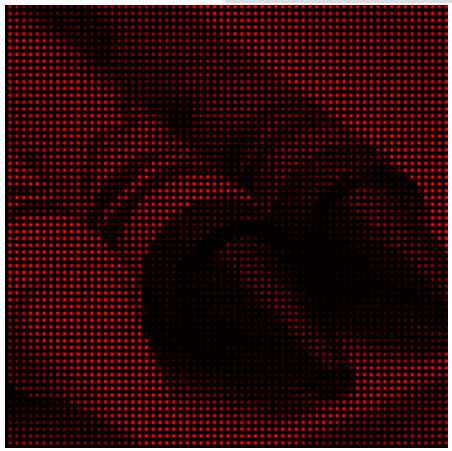

red

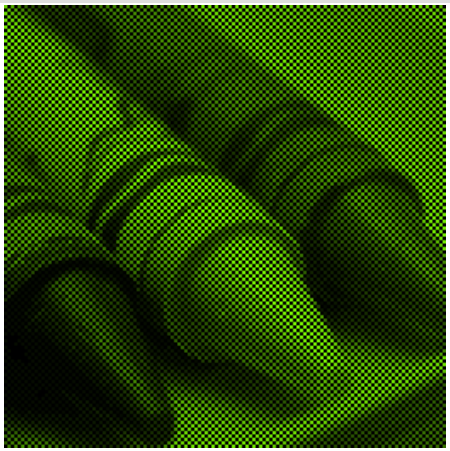

green

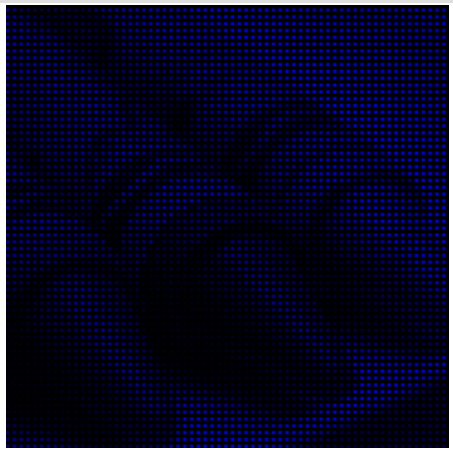

blue

output

X3 Technology

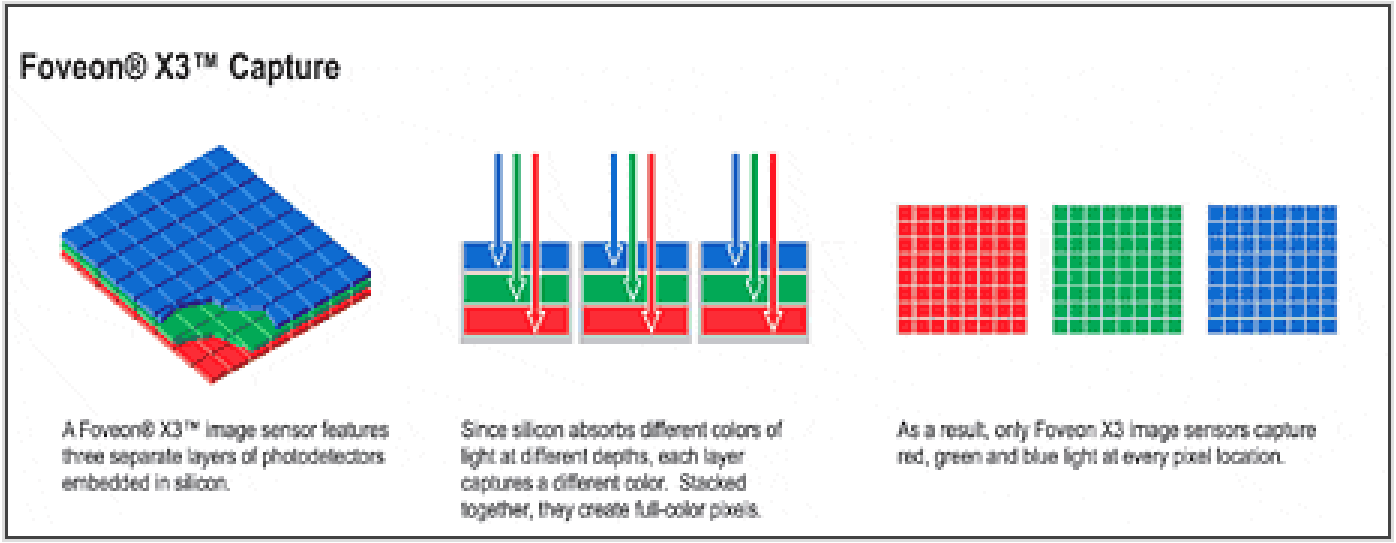

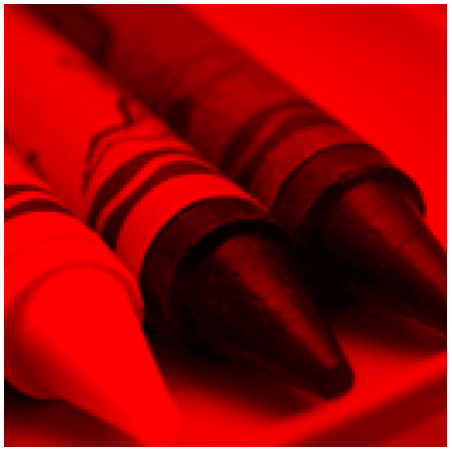
red


green

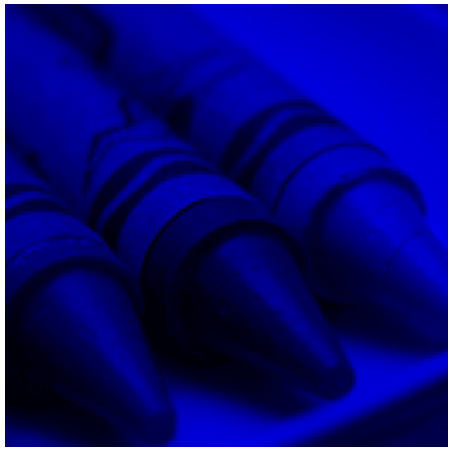
blue


output

Foveon X3 sensor

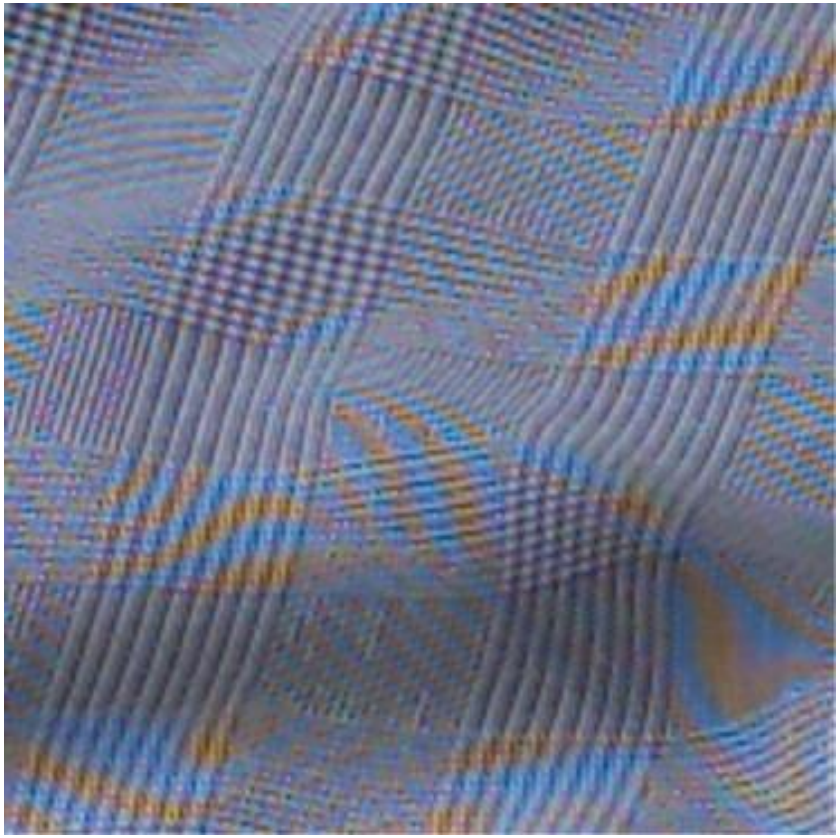

Bayer CFA

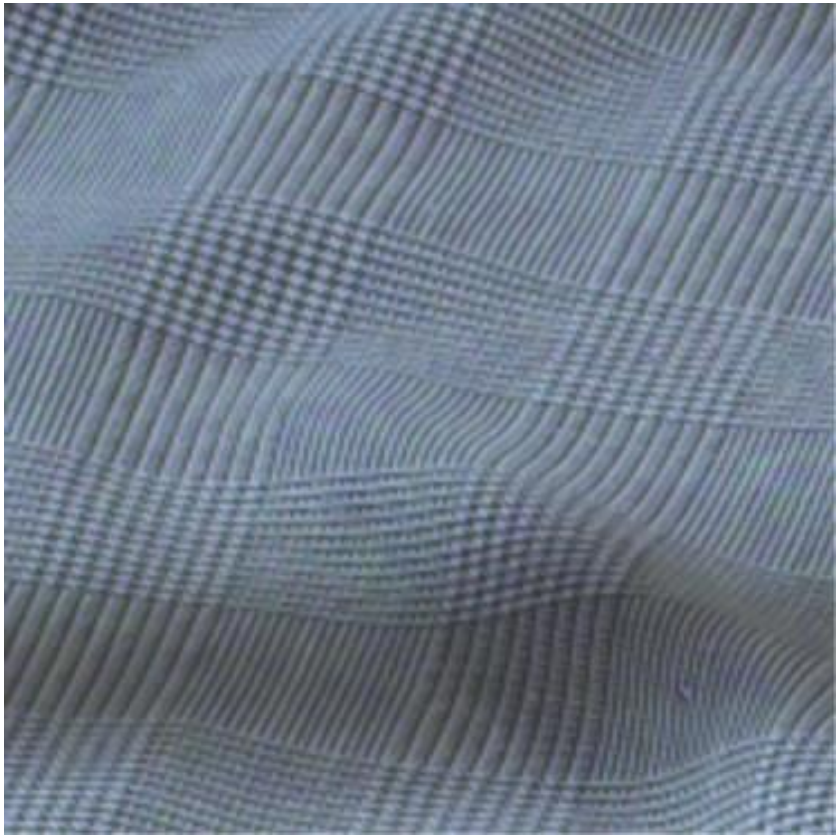

X3 sensor

Camera with X3

Sigma SD10, SD9

Polaroid X530

Sigma SD9 vs Canon D30

Outline

- Overview and fundamentals
- Color imaging
- **Camera image processing**
- Computational cameras

White Balance

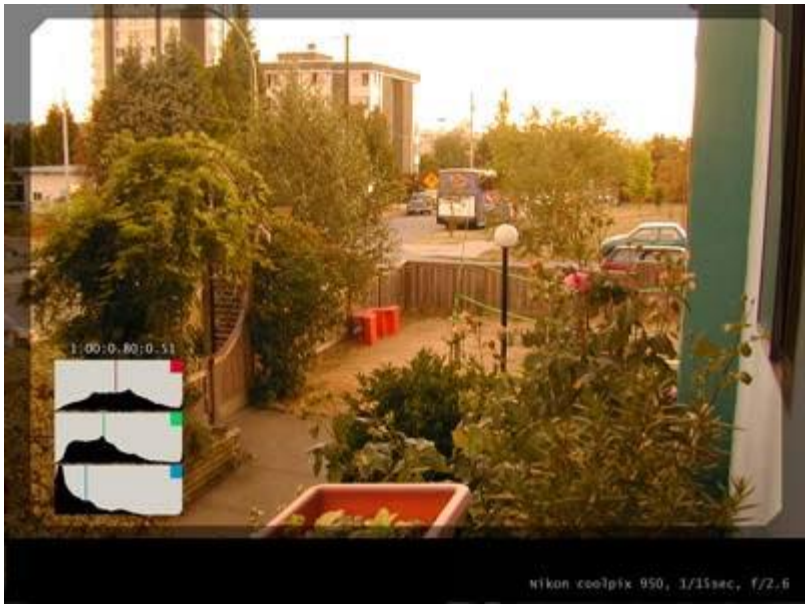

warmer +3

automatic white balance

White Balance (cont.)

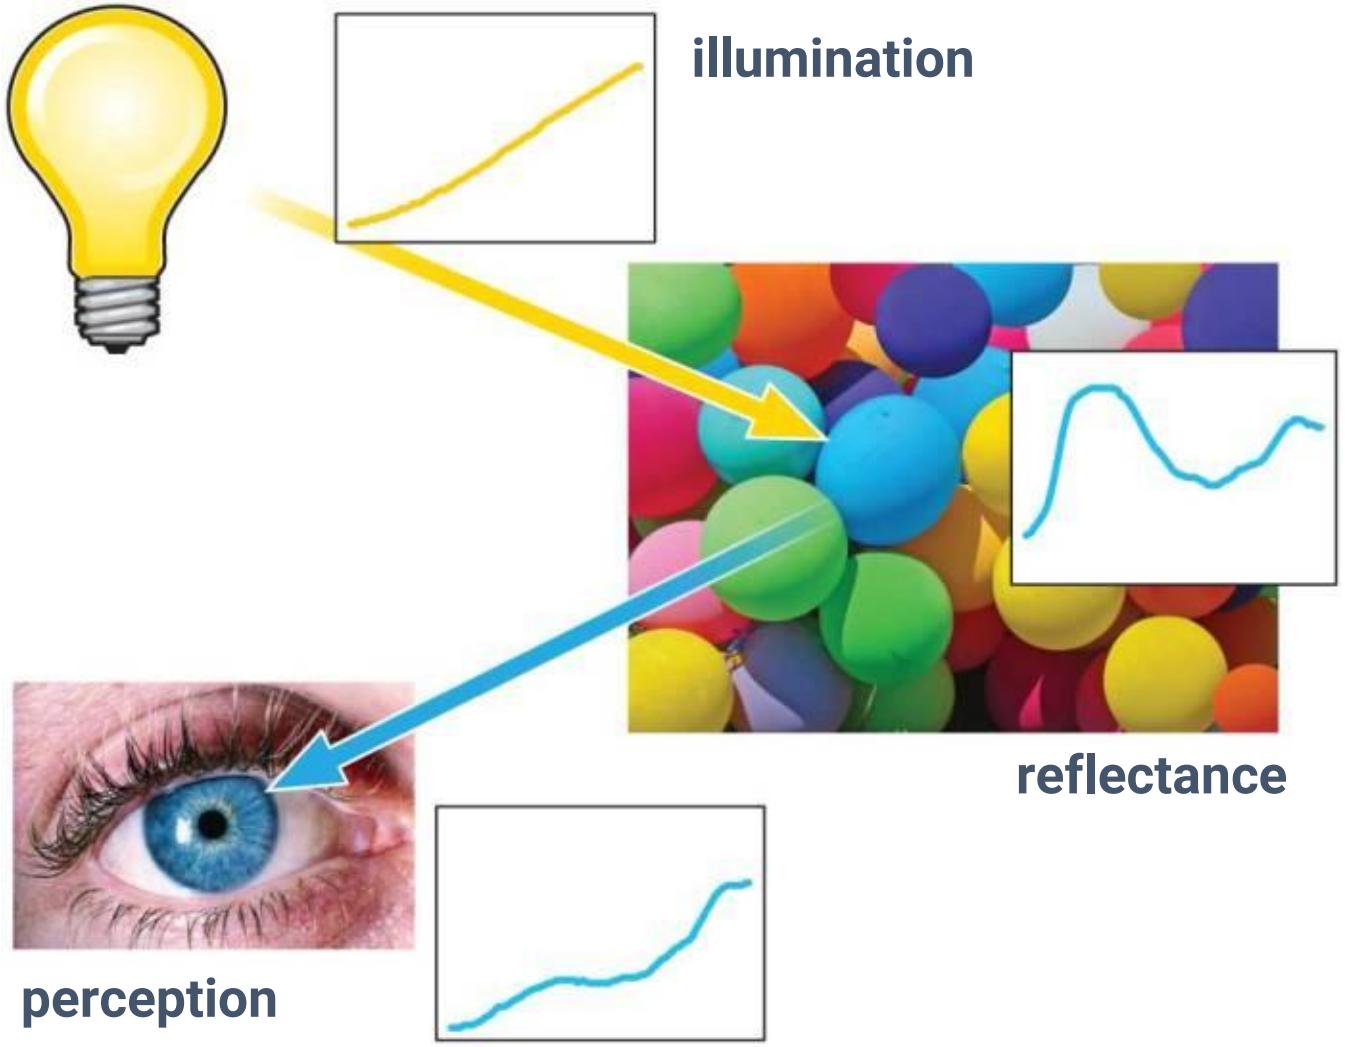

Color Constancy

What color is the dress?

Color Constancy (cont.)





Human Vision is Complex

Outline

- Overview and fundamentals
- Color imaging
- **Computational cameras**

Computational Cameras

Light-field Camera

Lytro Illum

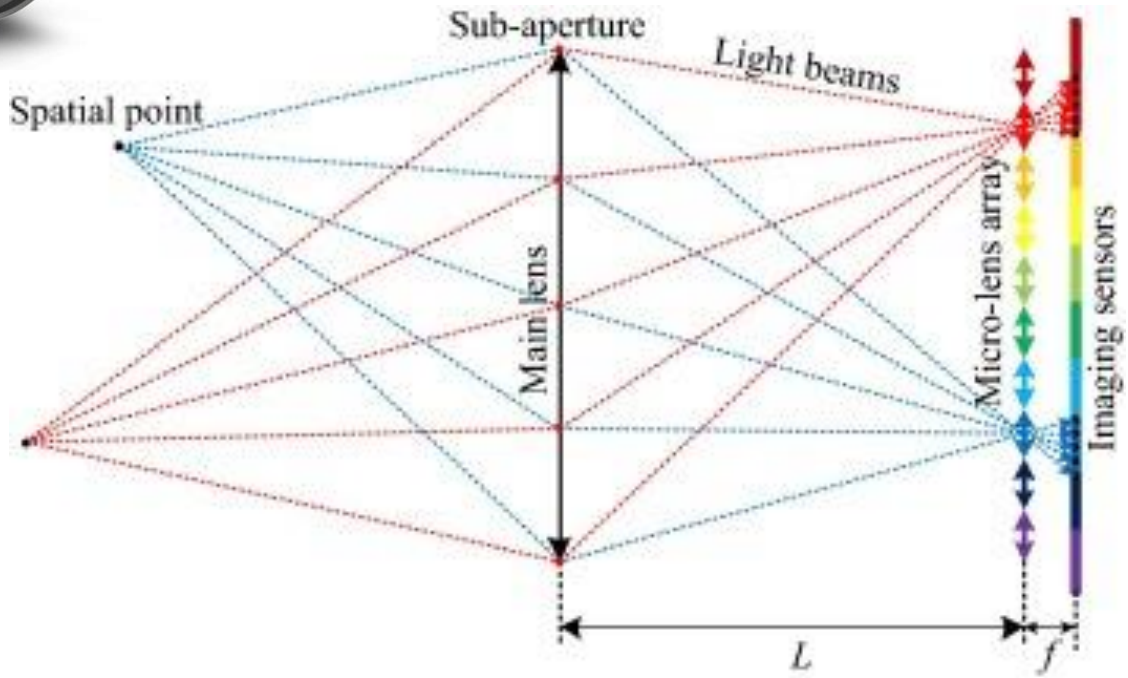

Light-field Camera (cont.)

RGB-D Camera

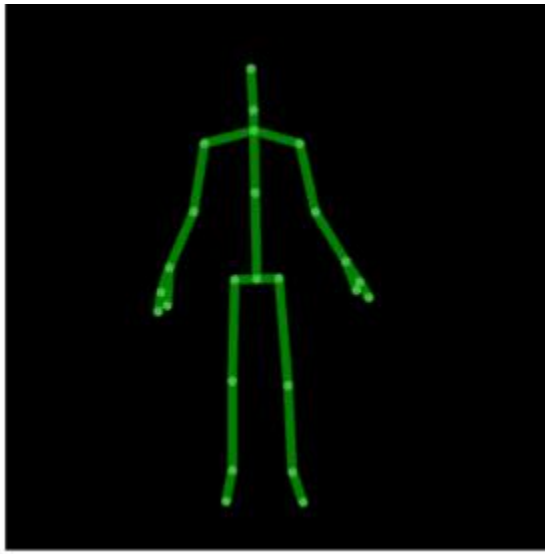

RGB-D Camera

Egocentric (First-Person) Vision

Input: *Egocentric video of the camera wearer's day*

1:00 pm 2:00 pm 3:00 pm 4:00 pm 5:00 pm 6:00 pm

Output: *Storyboard summary of important people and objects*

References

- http://www.howstuffworks.com/digital-camera.htm
- http://electronics.howstuffworks.com/autofocus.htm
- Ramanath, Snyder, Bilbro, and Sander. Demosaicking Methods for Bayer Color Arrays, Journal of Electronic Imaging, 11(3), pp306-315.
- Rajeev Ramanath, Wesley E. Snyder, Youngjun Yoo, Mark S. Drew, Color Image Processing Pipeline in Digital Still Cameras, IEEE Signal Processing Magazine Special Issue on Color Image Processing, vol. 22, no. 1, pp. 34-43, 2005.
- http://www.worldatwar.org/photos/whitebalance/index.mhtml
- http://www.100fps.com/


END OF PRESENTATION
ANY QUESTIONS?