TEENSY 4.1 (i.MX RT1062, 600 MHz) - two 1x24 sockets; every edge pin used

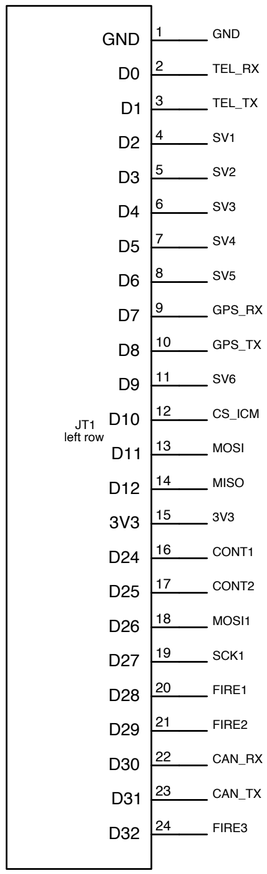

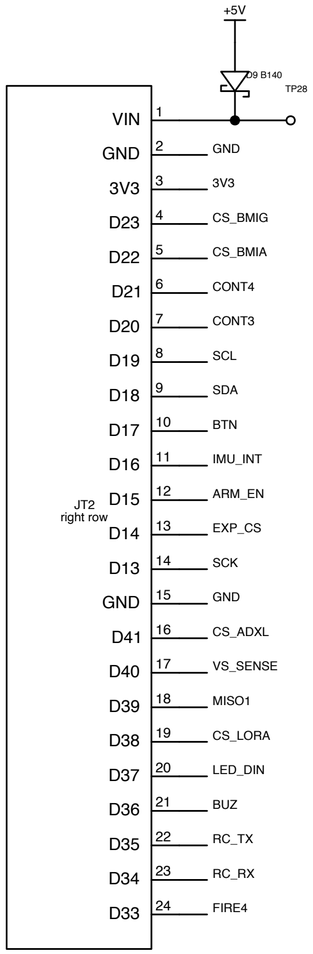

CONNECTORS

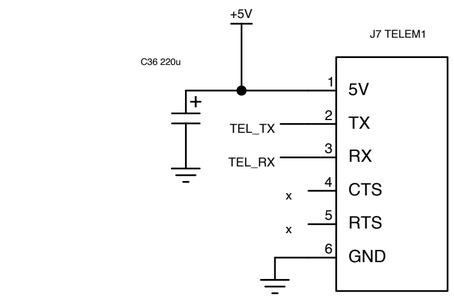



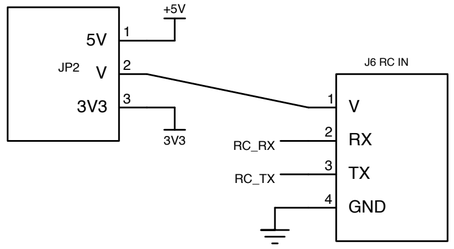

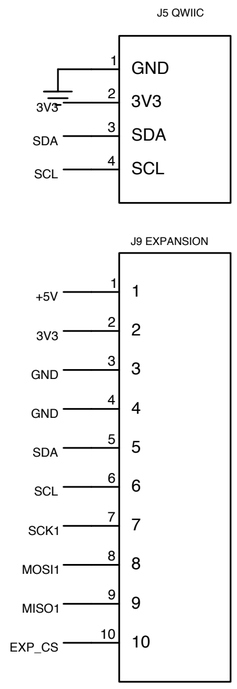

CAN-FD (CAN3)

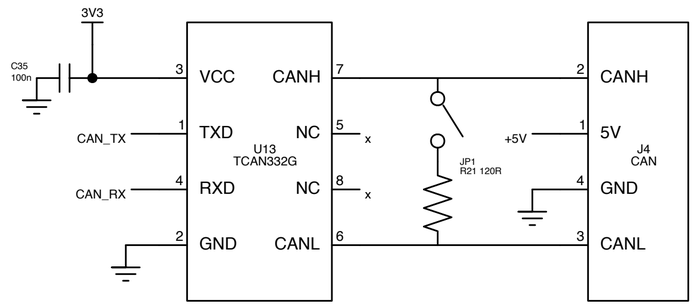

LoRa BEACON - RFM95W 915 MHz (SPI1)

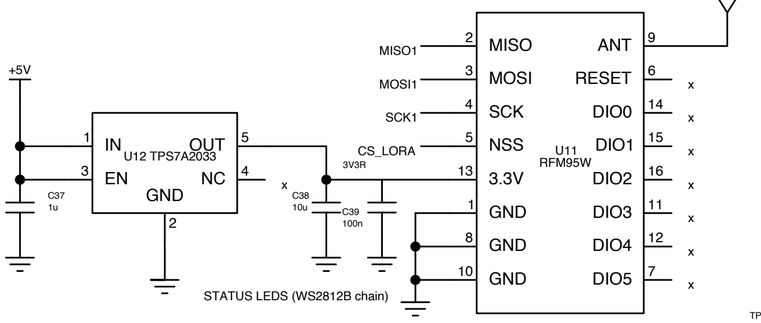

STATUS LEDS (WS2812B chain)

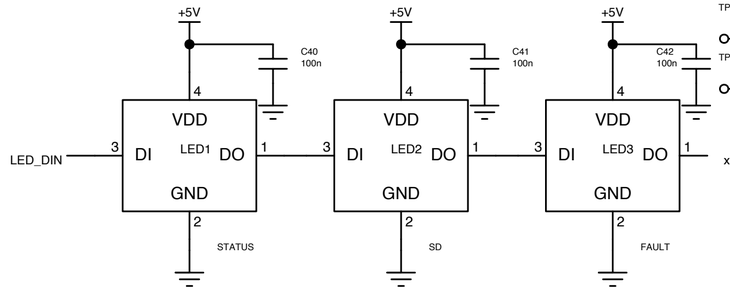

UI

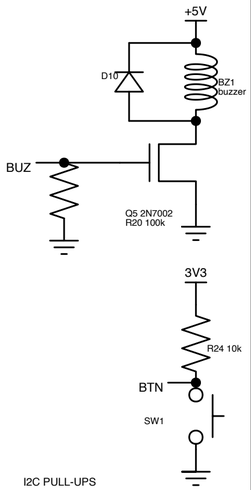

COMPUTE + I/O	
TWILIGHT-FC REV A (cad_bench/projects/twilight_fc.py)	
Teensy 4.1 pin numbers in the boxes	
SHEET 2 / 4	REV A
DATE 2026-11-05	SIZE A3