TEENSY 4.1 (i.MX RT1062, 600 MHz) - two 1x24 sockets; every edge pin used

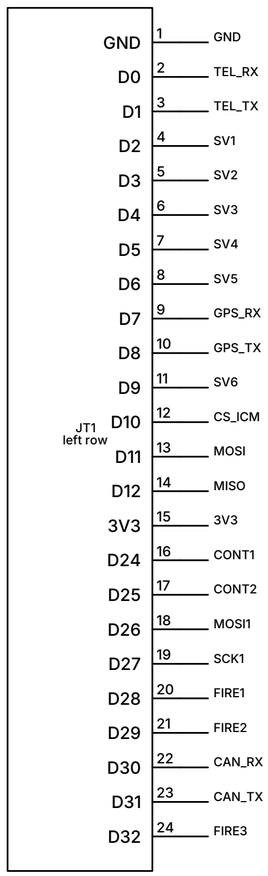

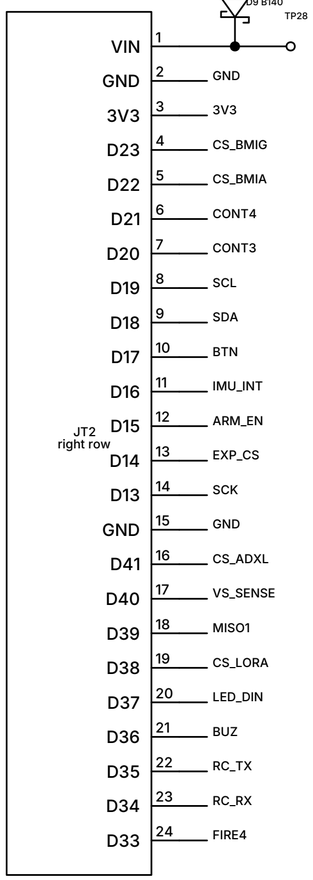



CONNECTORS





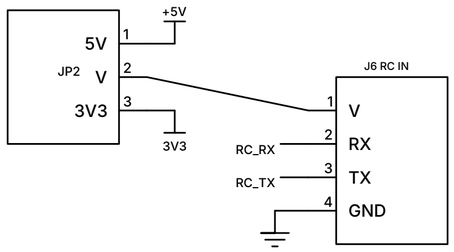



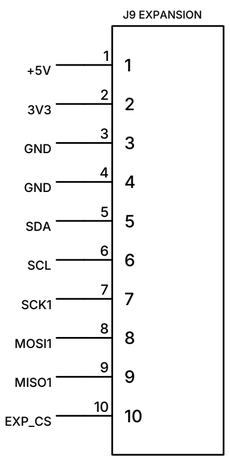

CAN-FD (CAN3)

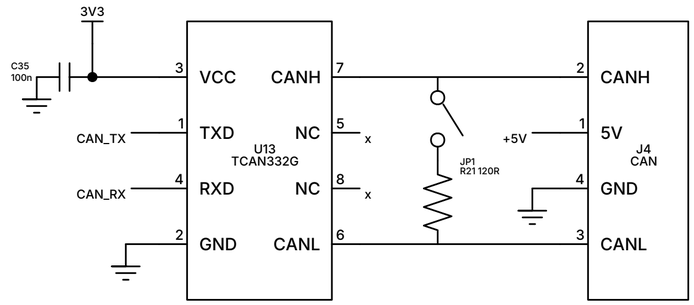

UI

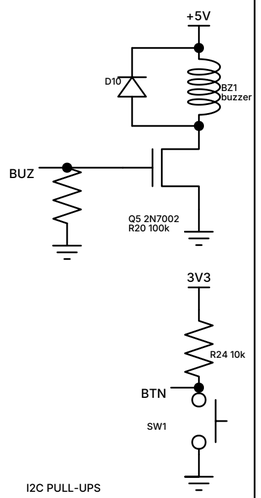

I2C PULL-UPS



LoRa BEACON - RFM95W 915 MHz (SPI1)

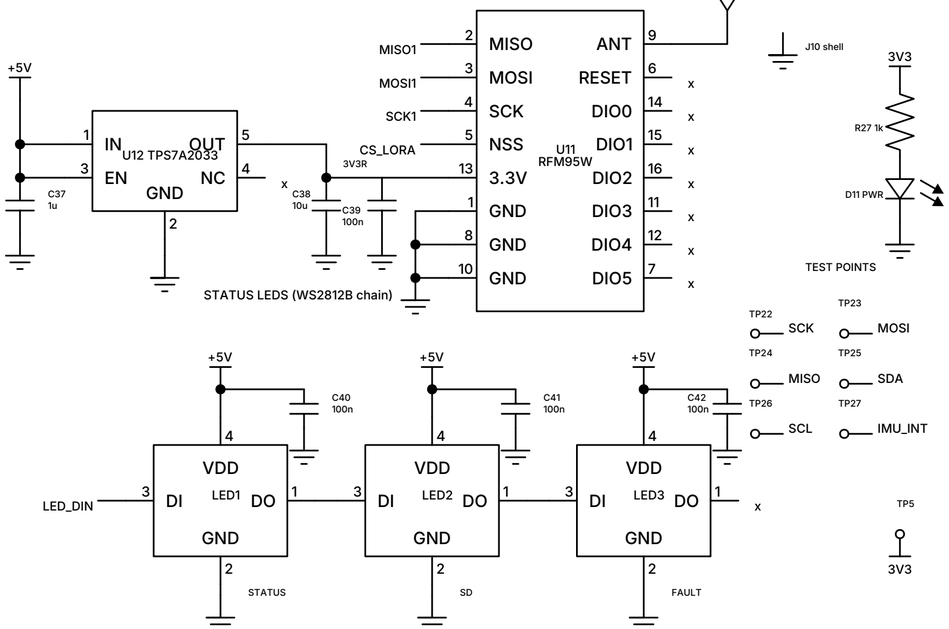

COMPUTE + I/O

TWILIGHT-FC REV A (cad_bench/projects/twilight_fc.py)

Teensy 4.1 pin numbers in the boxes

SHEET 2 / 4	REV A
DATE 2026-10-12	SIZE A3