

Flume Notes: 2025.03.27

- Grew site called "Flume"
- Need a name for project
- Put time w/ time zone (i.e. EDT)
- Need large bucket to get samples so everything comes from 1 source
- Bottle caps for DIC (GC + TOC samples)
- Labels w/ Room for Date, Time, Site, Type sample
- Leave room on AIK sample for $\times 10^2$ & Salinity

YSI Values for flume sample: DO % = 127.2 SPC/C = 12268/9341
set temp, $\times 10^2$ from DO mg/L = 13.47 Sal = 7.16
Flume data when downloaded

Flow Rate @ ~ 0.5 LPM

- Downloaded RAD7 - flume data

DOCK NOTES:

LICOR: $\text{CH}_4 = 11950$ ppb $\text{CO}_2 = 160$ ppm

CO_2 scout: 12.4 $\text{CO}_2 = 107$ ppm P = 1020

* NOT ON
logger
currently

- Downloaded RAD7 - DOCK Data

DO % = 121

DO mg/L = 12.28

SPC/C = 17324/12729 } BUCKET
Sal = 10.17

- FLOW RATE @

DO % = 129.6

DO mg/L = 13.67

SPC/C = 17430/12557 } Actual
Sal = 10.29 Water

April 3, 2025 Sampling ~~DOCK~~ DOCK, Flume

protocol notes:

- Have 2.5-3 gallon bucket to use for all samples. Rinse 3x then gently fill to brim $\rightarrow$ time of sample, note CO_2 / CH_4 .
- Before sampling turn on YSI probe 10 min then calibrate for DO %.
- Take YSI ~~meas~~ meas ~~1st~~ 1st, then DIC, sulfates, sulfides then rest of parameters

DOCK 3 April 2025 @ 13:00

L. CO₂ $\text{CO}_2 = 154 \text{ ppm}$ Scout = ATM meas. (123 previous)

$\text{CH}_4 = 15133 \text{ ppb}$ $T = 15.6$

YSI bucket: Sal = 10.19

DO % = 104.1

DO mg/l = 10.78

SPC/C = 14772 / 11822

$T = 14.2$

Flume April 3, 2025 @ 14:43

Scout [$\times \text{CO}_2 = 2100$, $T = 15.4$]

YSI:

DO % = 91.4

mg/l = 8.40

SPC/C = 16331 / 13526

Sal = 9.61

$T = 16$

14:00 EDT - low tide
air = 80°C breezy

22.3°C
51.4 DO %
3.83 DO mg/L
15407 spc μ S/cm
15569 C μ S/cm
9.63 sal ppt
7.33 pH
-57.3 pH mV


TA ✓
DOC ✓
DICEX ✓
DIC ✓✓
NUTR ✓
SO₄/H₂S ✓

Setup RAB7 & v'd system

02/25/99

15:00 EDT
21.7°C
109.4 DO %
9.15 DO mg/L
17465 spc μ S/cm
16368 C μ S/cm
10.31 sal
8.98 pH
-147.7 pH

TA ✓
DOC ✓
DICEX ✓
DIC ✓✓
NUTR ✓
SO₄/H₂S ✓
Setup RAB
& v'd sys.

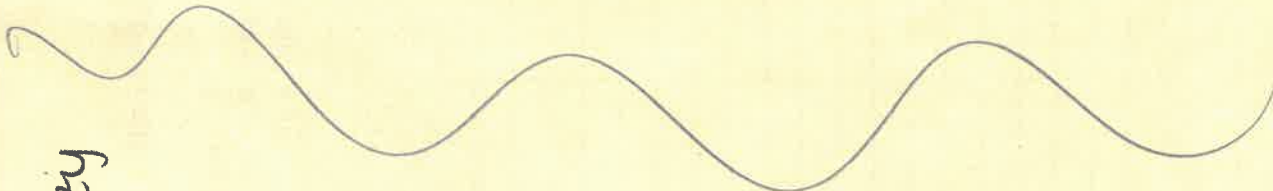

COMPASS Synoptic Aquatroll calibration sheet

Maintenance schedule

Troll Protocol

Calibrate

Every 3 months

pH sol./junction

As needed

Change DO cap

2 years / if damaged

[illegible]