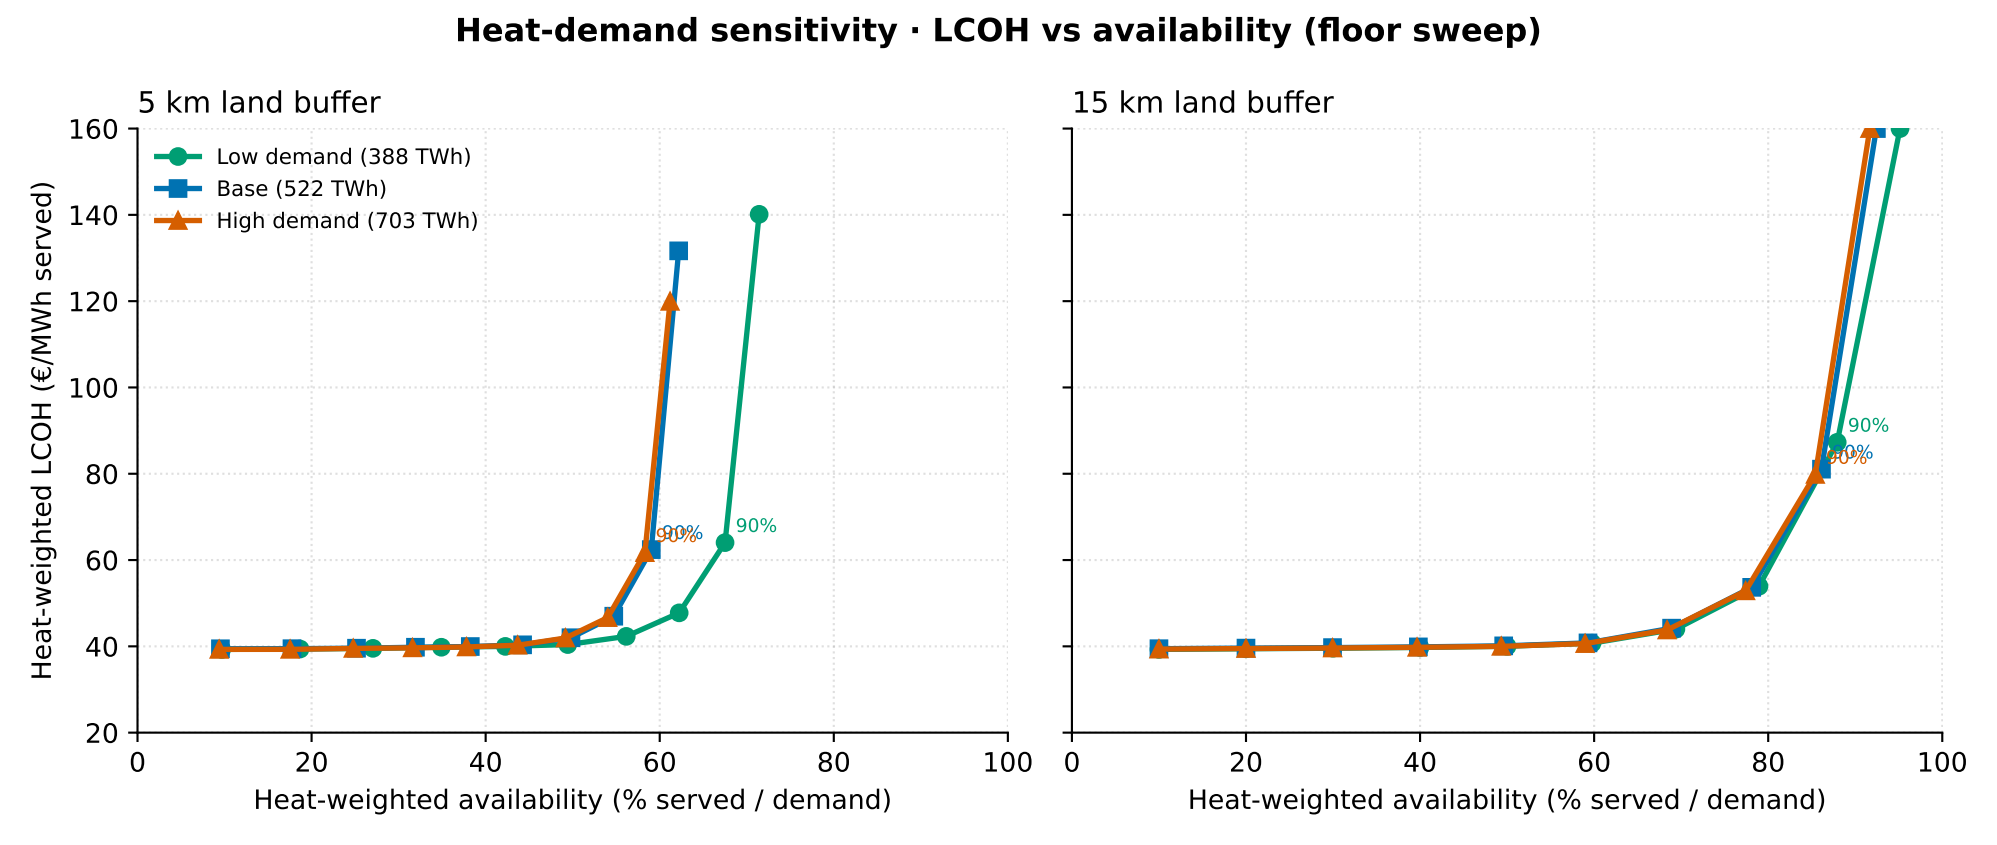
Heat-demand sensitivity · LCOH vs availability (floor sweep)
5 km land buffer
15 km land buffer
Low demand (388 TWh)
Base (522 TWh)
High demand (703 TWh)
Heat-weighted LCOH (€/MWh served)
Heat-weighted availability (% served / demand)
90%
90%
90%
90%
90%