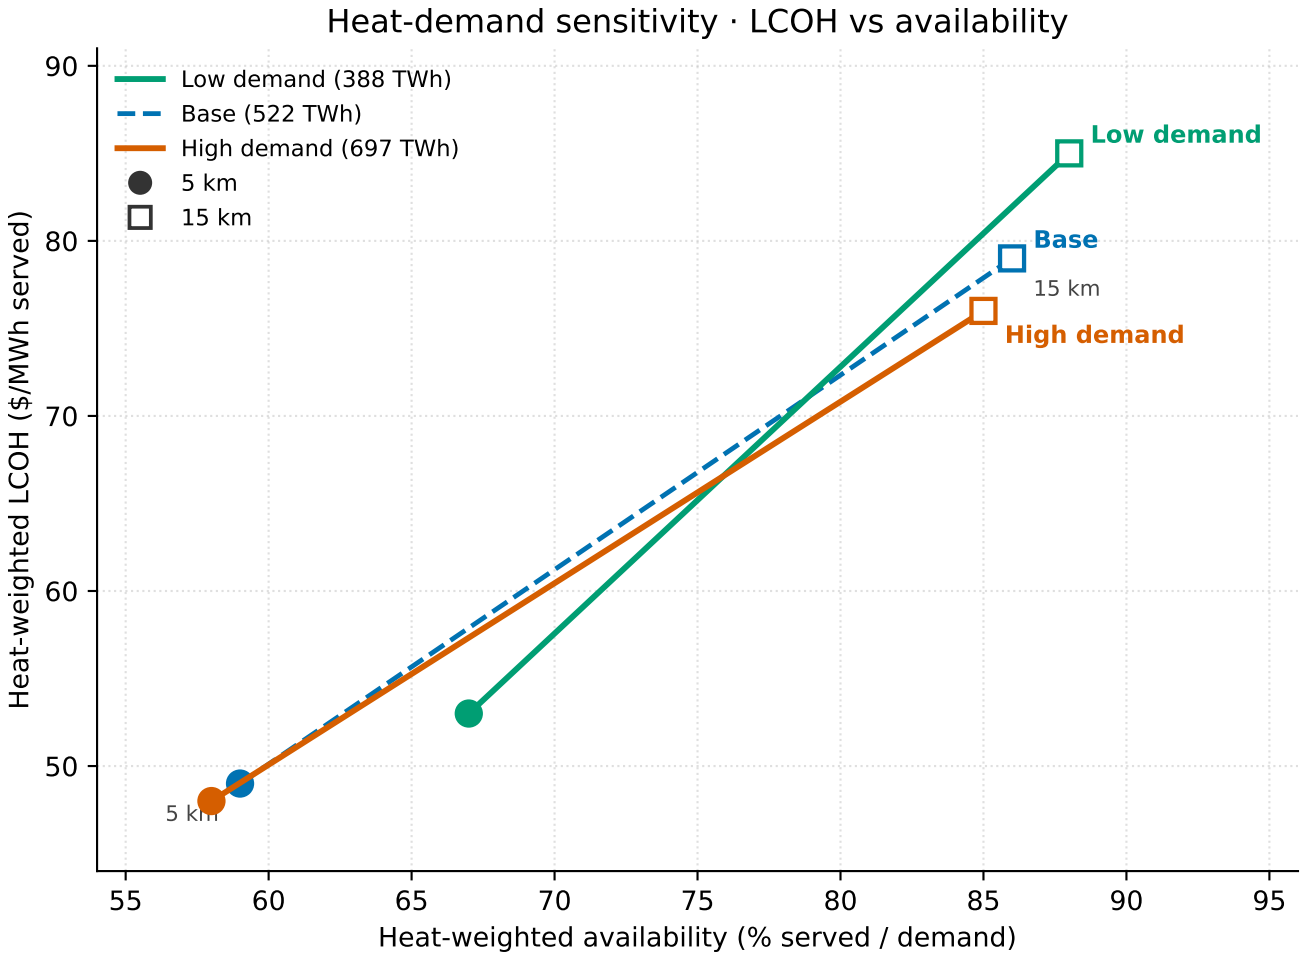
Heat-demand sensitivity · LCOH vs availability
Low demand (388 TWh)
Base (522 TWh)
High demand (697 TWh)
5 km
15 km
Low demand
Base
15 km
High demand
5 km
Heat-weighted LCOH ($/MWh served)
Heat-weighted availability (% served / demand)
90
80
70
60
50
55
60
65
70
75
80
85
90
95