



Network Management and O&M



Foreword

- The ever expanding network and increasing network devices present a significant challenge in managing networks effectively and providing high-quality network services.
- There are many network management and O&M methods, of which this course describes some of the most common.



Objectives

- On completion of this course, you will be able to:
 - Understand basic concepts of network management and O&M.
 - Master common network management and O&M methods.
 - Describe basic functions of network management and O&M.
 - Understand the fundamentals of SNMP.
 - Understand Huawei iMaster NCE and related technologies.



Contents

- 1. Basic Concepts of Network Management and O&M**
2. SNMP Fundamentals and Configuration
3. Network Management Based on Huawei iMaster NCE




What Is Network Management and O&M?

- Network management and O&M plays an important role on a communications network. It ensures that devices work properly and the communications network runs properly to provide efficient, reliable, and secure communications services.

The network administrator manages and maintains the network for stable operation.


Network administrator

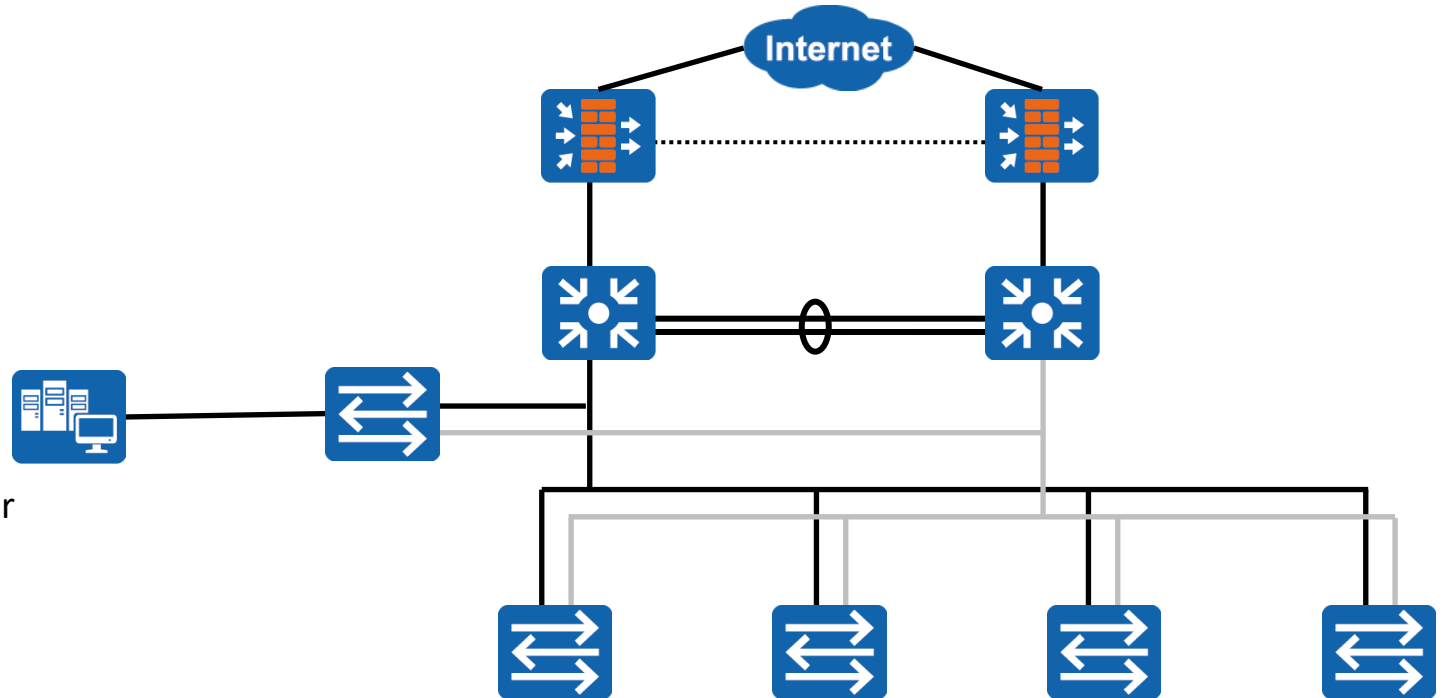

Common enterprise network architecture



Basic Network Management Functions

Configuration
management

Performance
management

Fault
management

Security
management

Accounting
management


OSI defines five functional models for network management:

- Configuration management: monitors network configuration information so that network administrators can generate, query, and modify hardware and software running parameters and conditions, and configure services.
- Performance management: manages network performance so that the network can provide reliable, continuous, and low-latency communication capabilities with as few network resources as possible.
- Fault management: ensures that the network is always available and rectifies faults as soon as possible.
- Security management: protects networks and systems from unauthorized access and attacks.
- Accounting management: records the network resource usage of users, charges users, and collects statistics on network resource usage.




Network Management Modes

Traditional Network Management and O&M

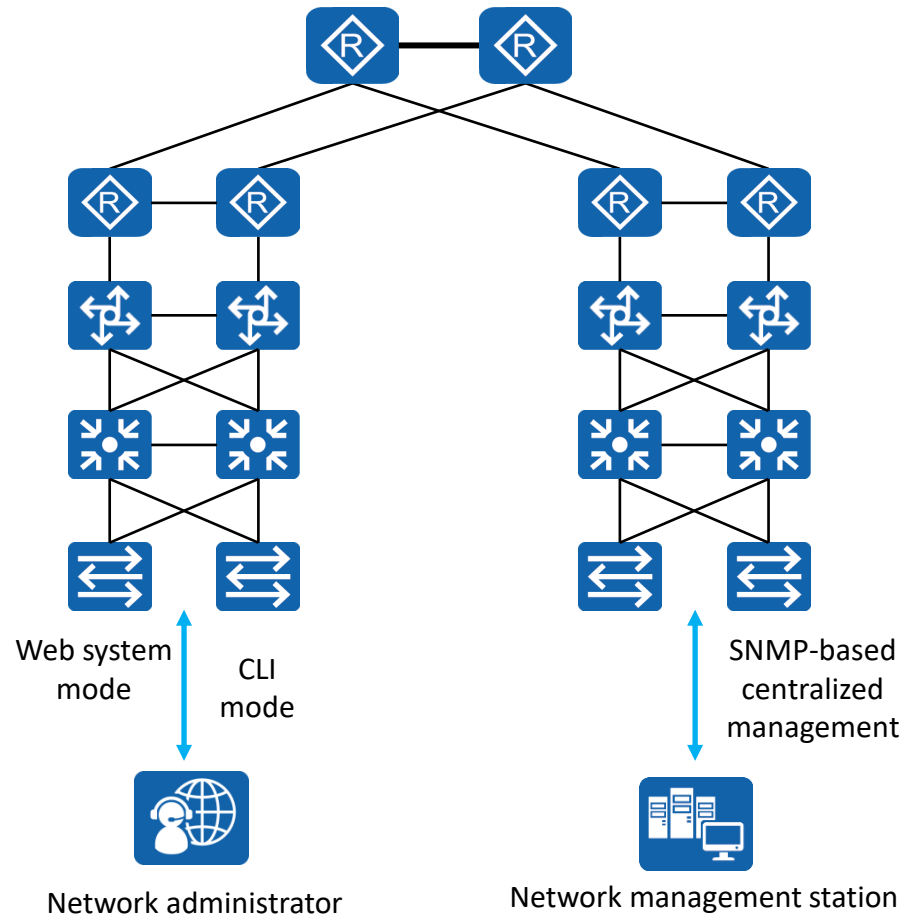

iMaster NCE-based Network Management and O&M

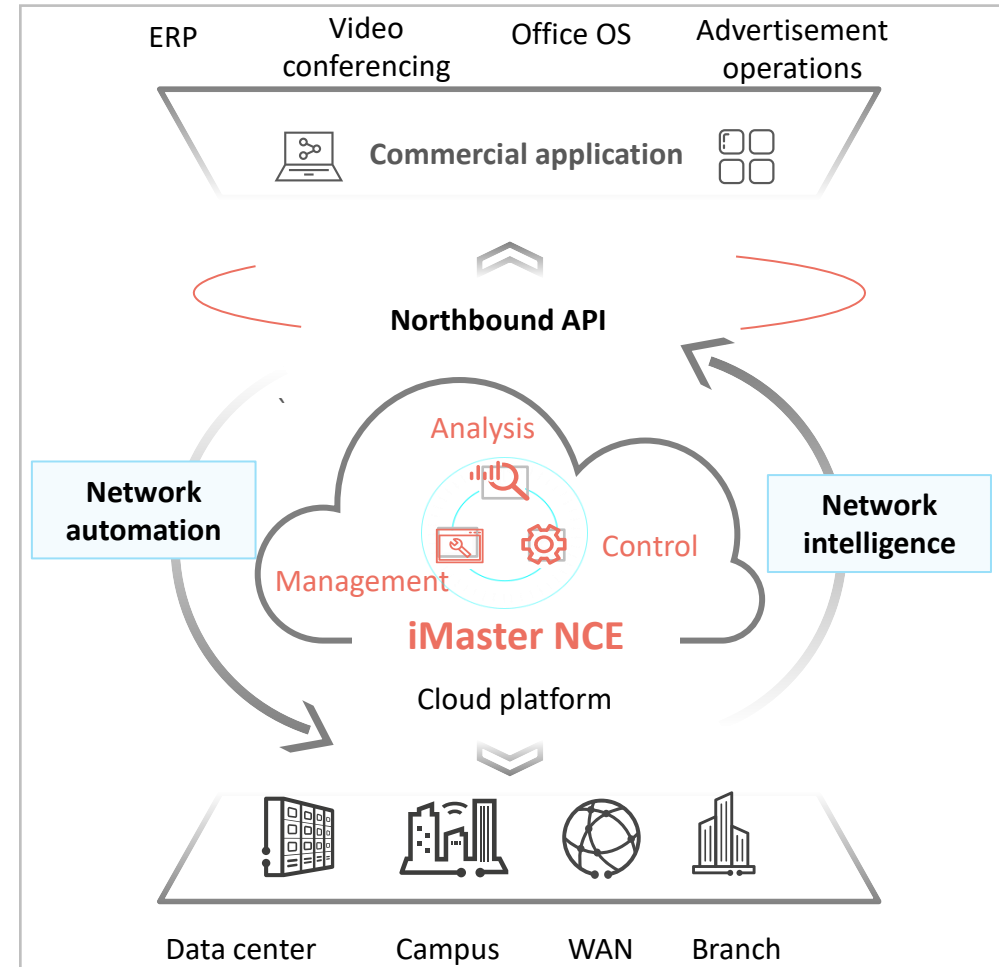




Contents

1. Basic Concepts of Network Management and O&M
- 2. Traditional Network Management**
3. Network Management Based on Huawei iMaster NCE



Management Through the CLI or Web System


- When the network scale is small, the CLI and web system are generally used for network management.
 - Network administrators can log in to a device through HTTPS, Telnet, or the console port to manage the device.
 - These network management modes do not require any program or server to be installed on the network, and the cost is low.
 - Network administrators must have a good master of network knowledge and vendor-specific network configuration commands.
 - These modes have great limitations when the network scale is large and the network topology is complex.

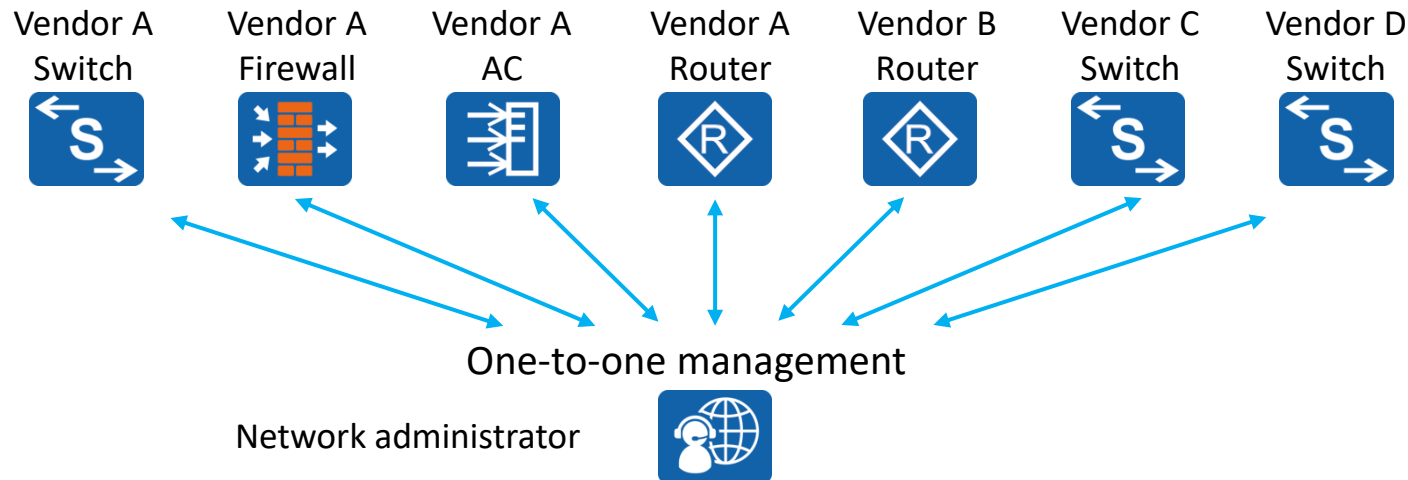



SNMP-based Centralized Management


- SNMP is a standard network management protocol widely used on TCP/IP networks. It provides a method for managing NEs through a central computer that runs network management software, that is, a network management station.

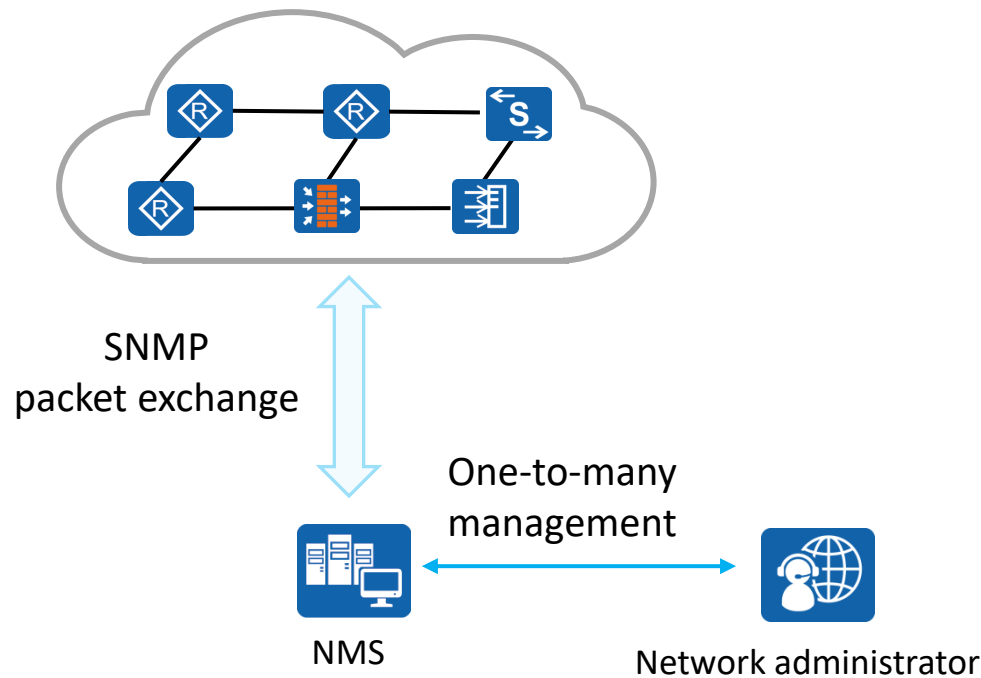

- Network administrators can use the NMS to query information, modify information, and troubleshoot faults on any node on the network, improving work efficiency.
- Network devices of different types and vendors are managed in a unified manner.




Typical SNMP Architecture

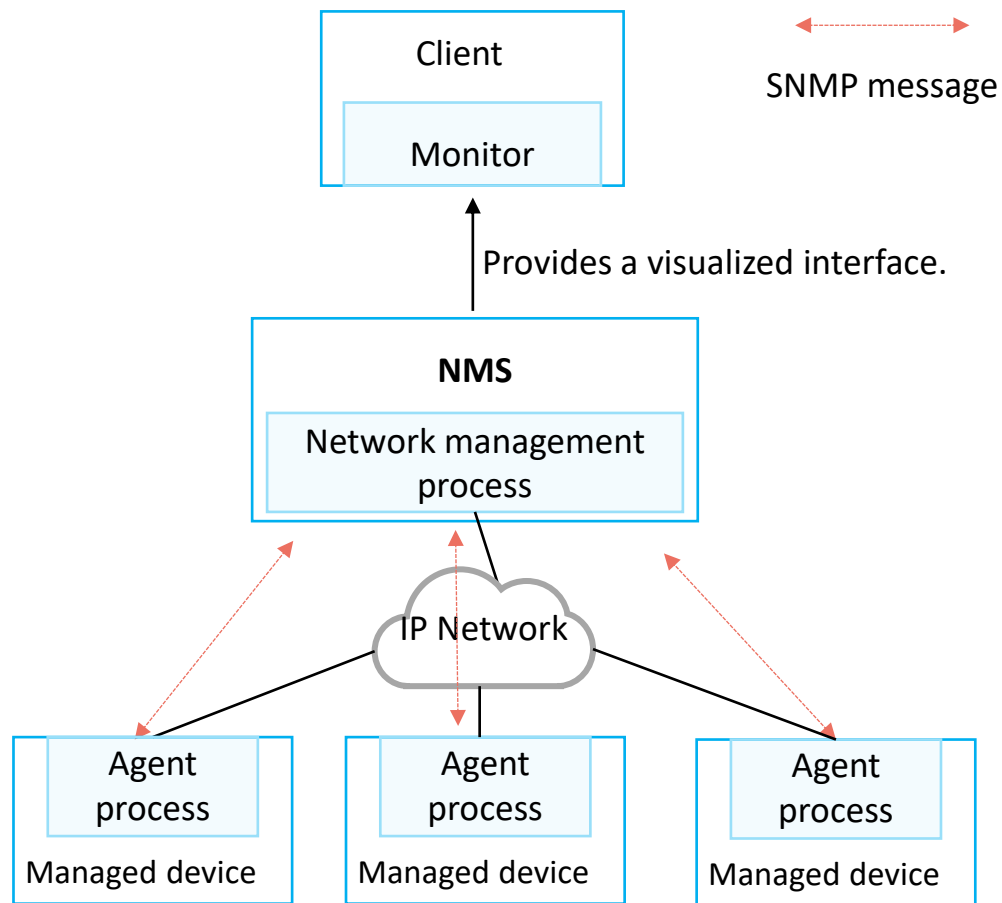

- On a network where SNMP is used for network management, a network management system (NMS) functions as a network management center and runs management processes. Each managed device needs to run an agent process. The management process and agent process communicate with each other through SNMP messages.
- An NMS is a system that uses SNMP to manage and monitor network devices. The NMS software runs on NMS servers.
- Managed devices are devices that are managed by the NMS on the network.
- The agent process runs on managed devices to maintain the information data of the managed devices, respond to the request from the NMS, and report the management data to the NMS that sends the request.




SNMP Message Exchange

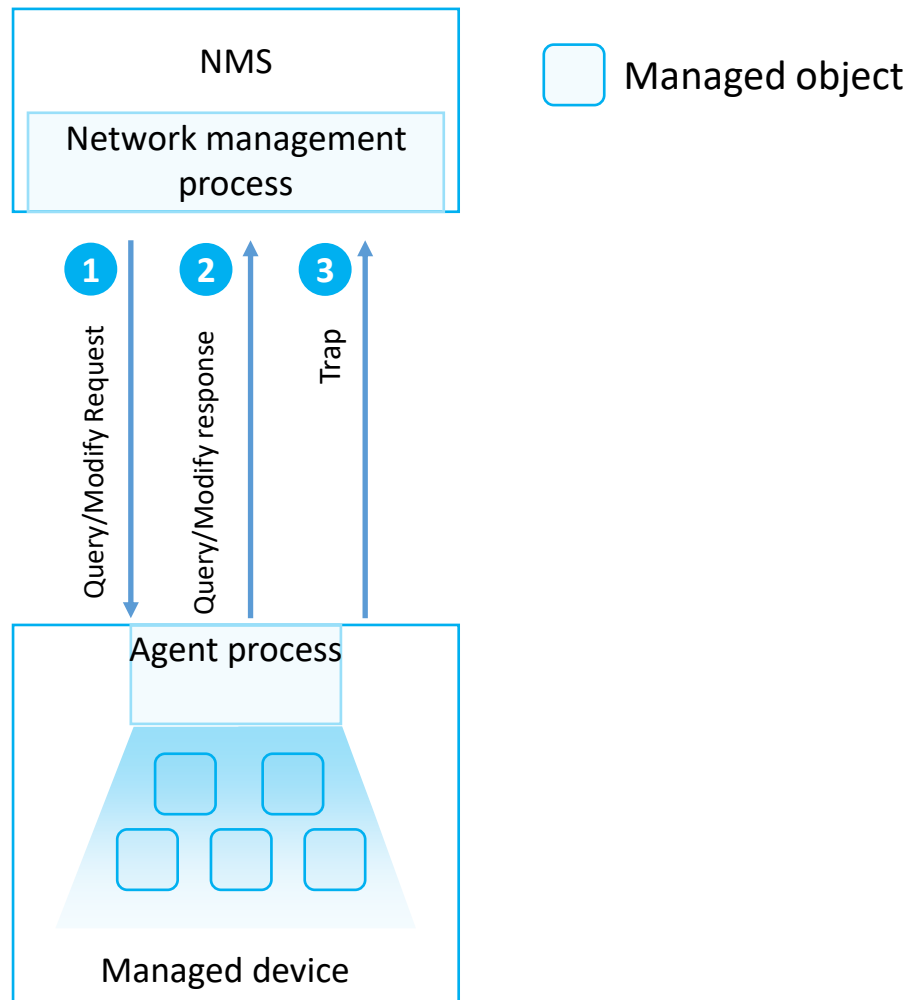

- The NMS and managed devices exchange messages in the following modes:
 - The NMS sends a request for modifying or querying configuration information to a managed device through SNMP. The agent process running on the managed device responds to the request from the NMS.
 - The managed device can proactively report traps to the NMS so that the network administrator can detect faults in a timely manner.
- Managed object: Each device may contain multiple managed objects. A managed object can be a hardware component or a set of parameters configured on the hardware or software (such as a routing protocol).
- SNMP uses management information bases (MIBs) to describe a group of objects of a manageable entity.



MIB

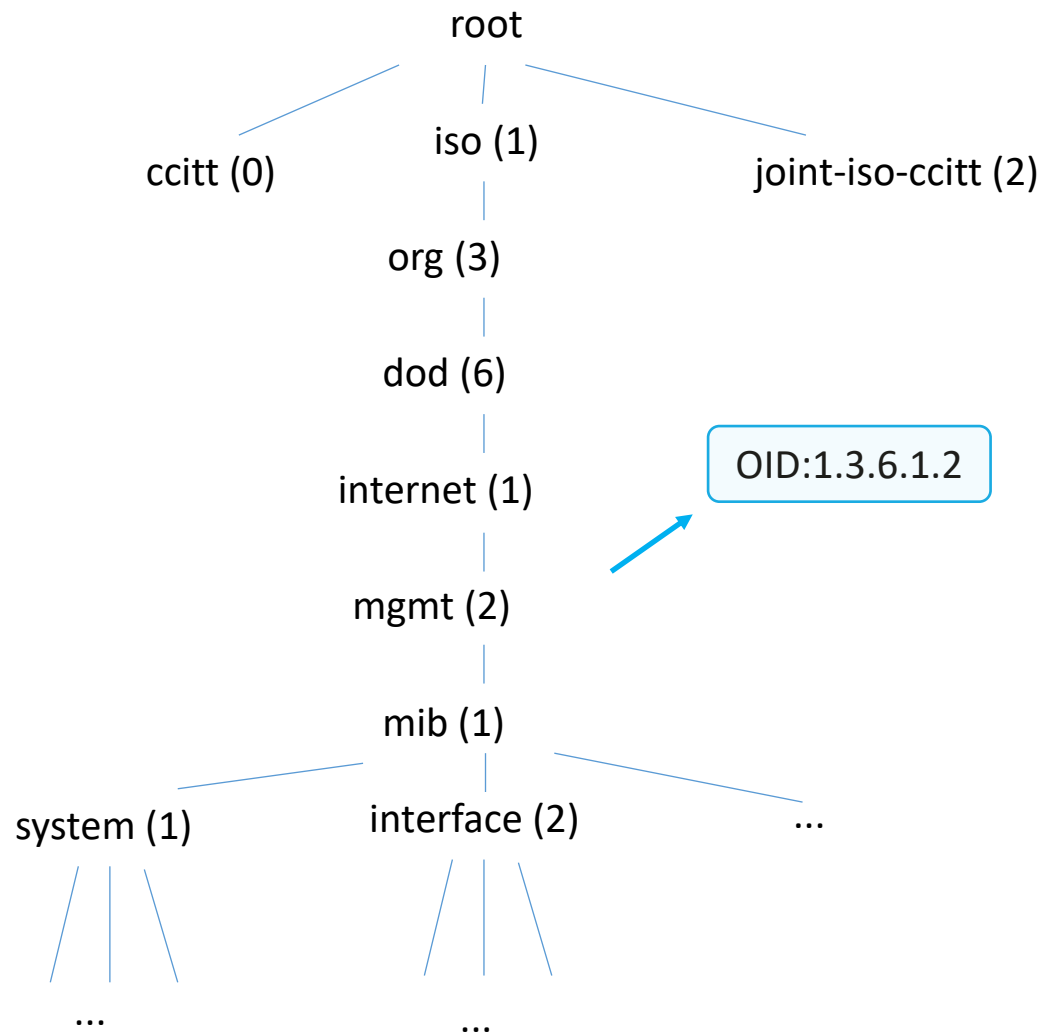

- A MIB is a database containing the variables that are maintained by managed devices. (The variables can be queried or set by the agent processes.) The MIB defines the attributes of managed devices in the database.
 - Object identifier (OID) of an object
 - Status of an object
 - Access permission of an object
 - Data types of an object
- A MIB provides a structure that contains data on all NEs that may be managed on the network. Because the data structure is similar to the tree structure, a MIB is also called an object naming tree.



Common MIB Objects

- Objects used for query or modification:


OID	Object Name	Data Type	Maximum Access	Description
1.3.6.1.2.1.2.1	ifNumber	Integer	read-only	Number of network interfaces in the system (regardless of the current interface status)
1.3.6.1.4.1.2011.5.25.41.1.2.1.1.3	hwIpAdEntNetMask	IpAddress	read-create	Subnet mask of an IP address

- Objects used for alarm notification:

OID	Object Name	Bound Variable	Description
3.6.1.6.3.1.1.5.3	linkDown	ifIndex ifAdminStatus ifOperStatus ifDesc	It is detected that one of the communication links in the ifOperStatus object has entered the down state from another state (but not the notPresent state). The original state is indicated by the value of ifOperStatus.




SNMP Management Model

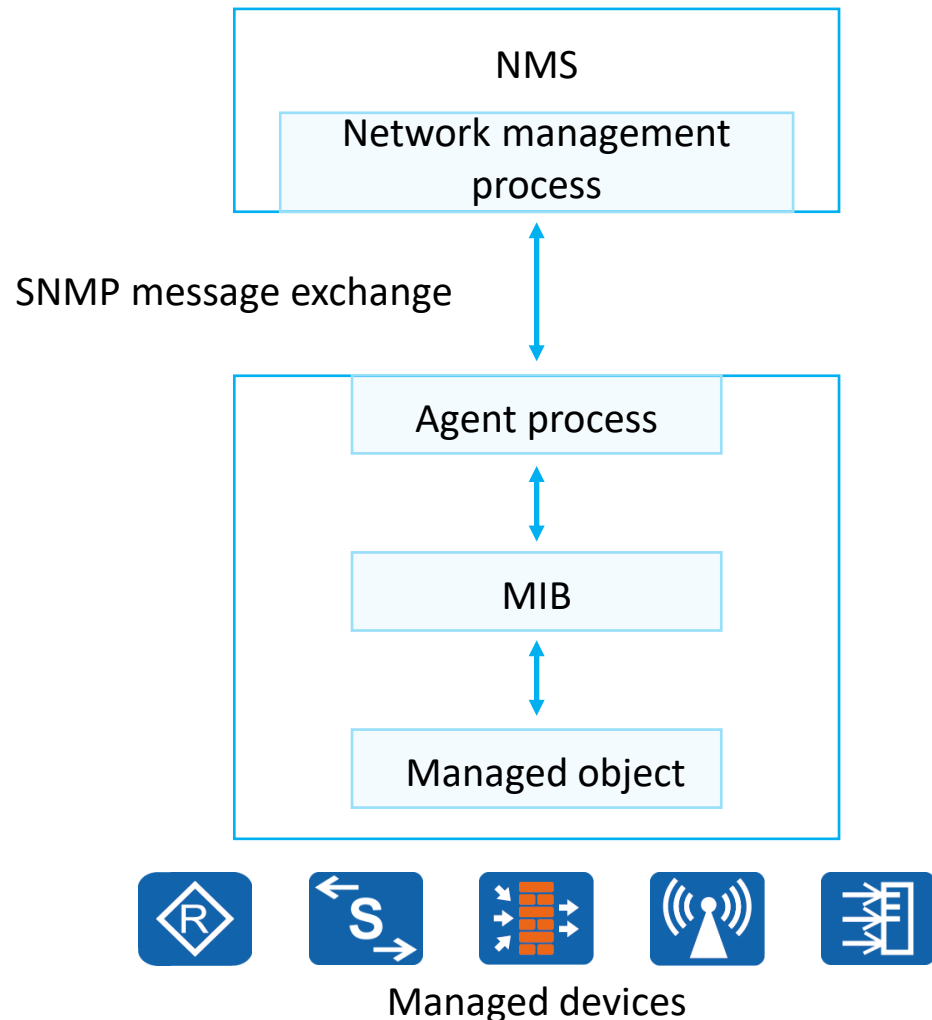

- Query/Modify operation:
 - The NMS sends an SNMP request message to an agent process.
 - The agent process searches the MIB on the device for information to be queried or modified and sends an SNMP response message to the NMS.
- Trap operation:
 - If the trap triggering conditions defined for a module are met, the agent process sends a message to notify the NMS that an event or trap has occurred on a managed object. This helps network administrators promptly process network faults.




SNMPv1

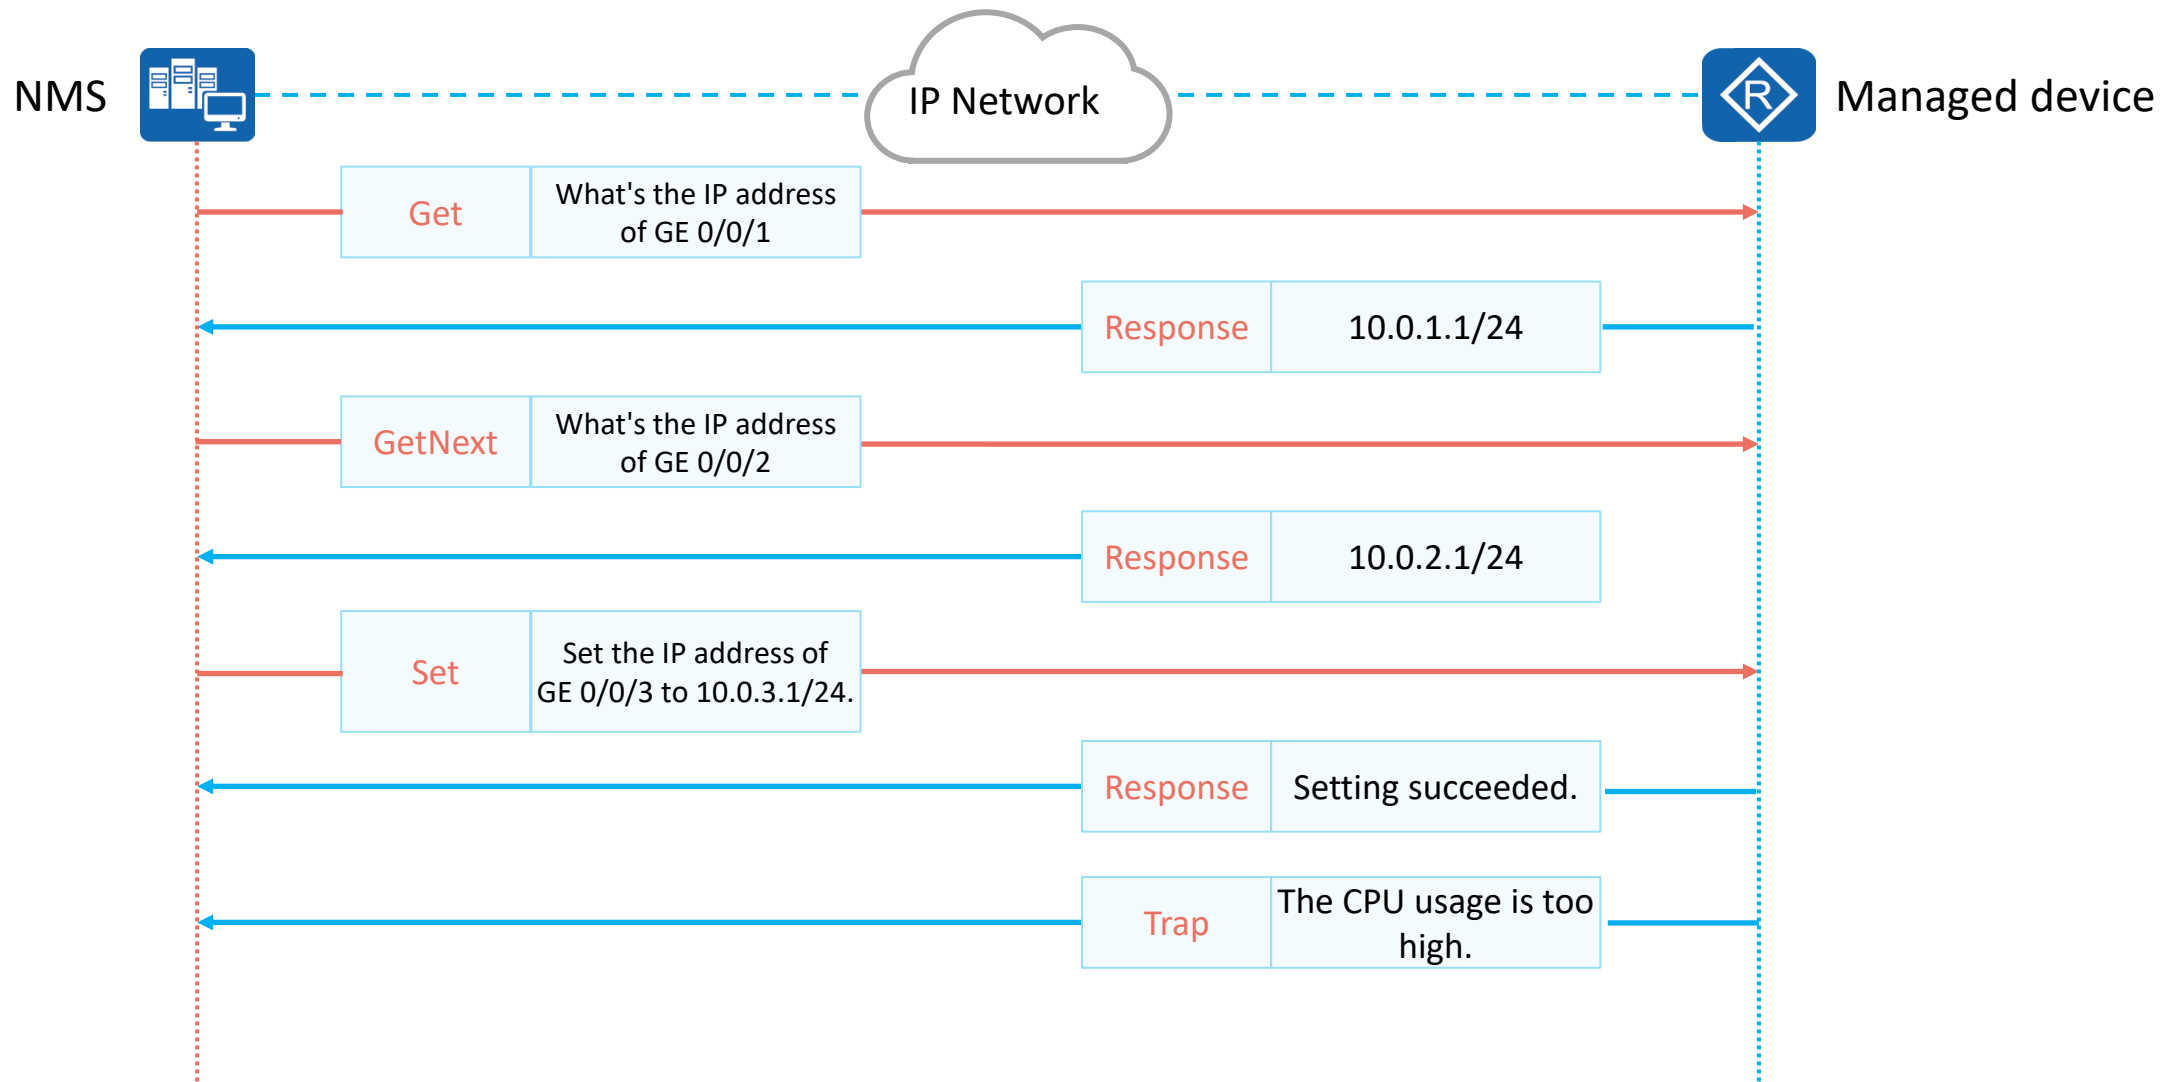




SNMPv2c

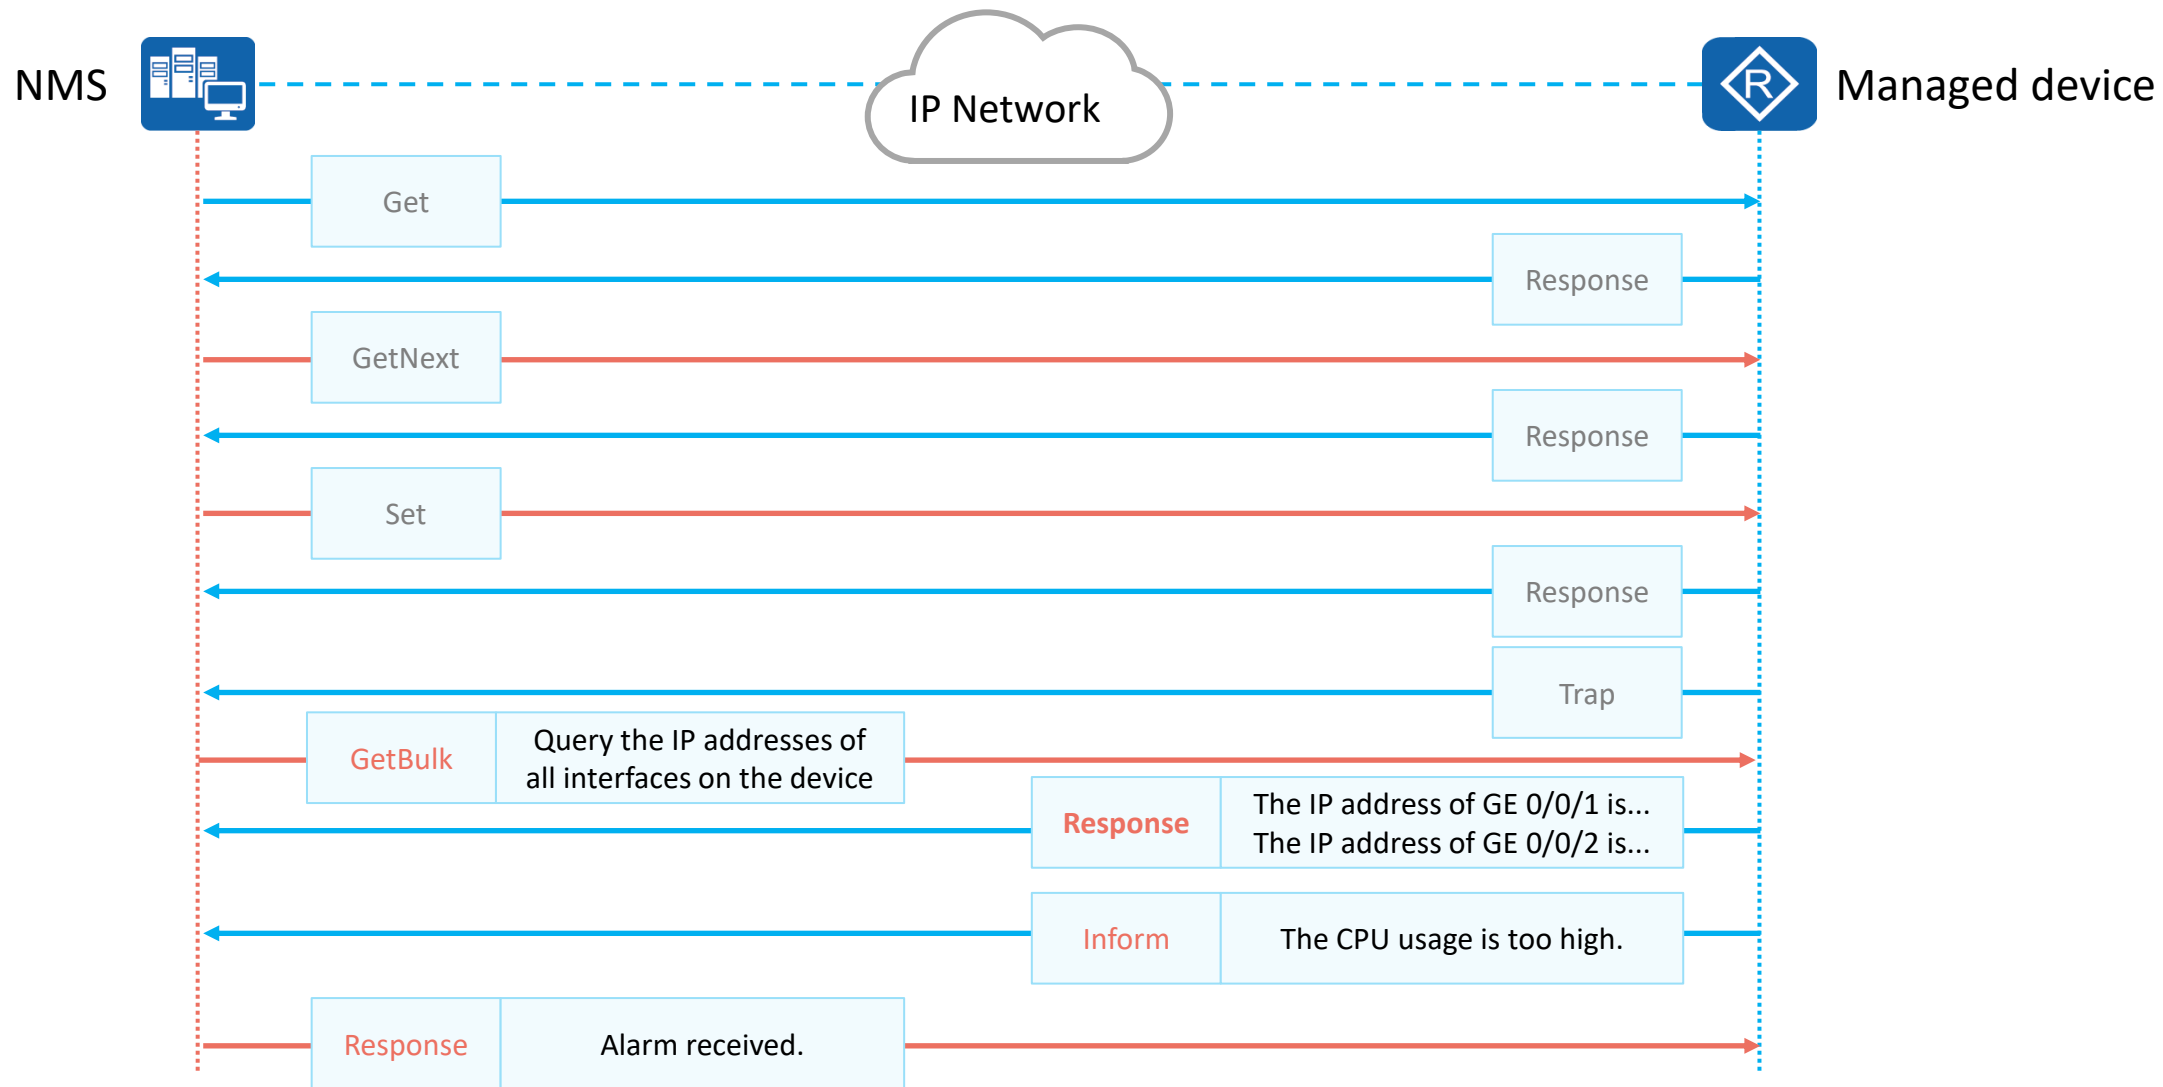



SNMPv3

- SNMPv3 has the same working mechanism as SNMPv1 and SNMPv2c, but adds header data and security parameters.
- SNMPv3 messages can be authenticated and encrypted.
- SNMPv3 is applicable to networks of various scales and has high security.

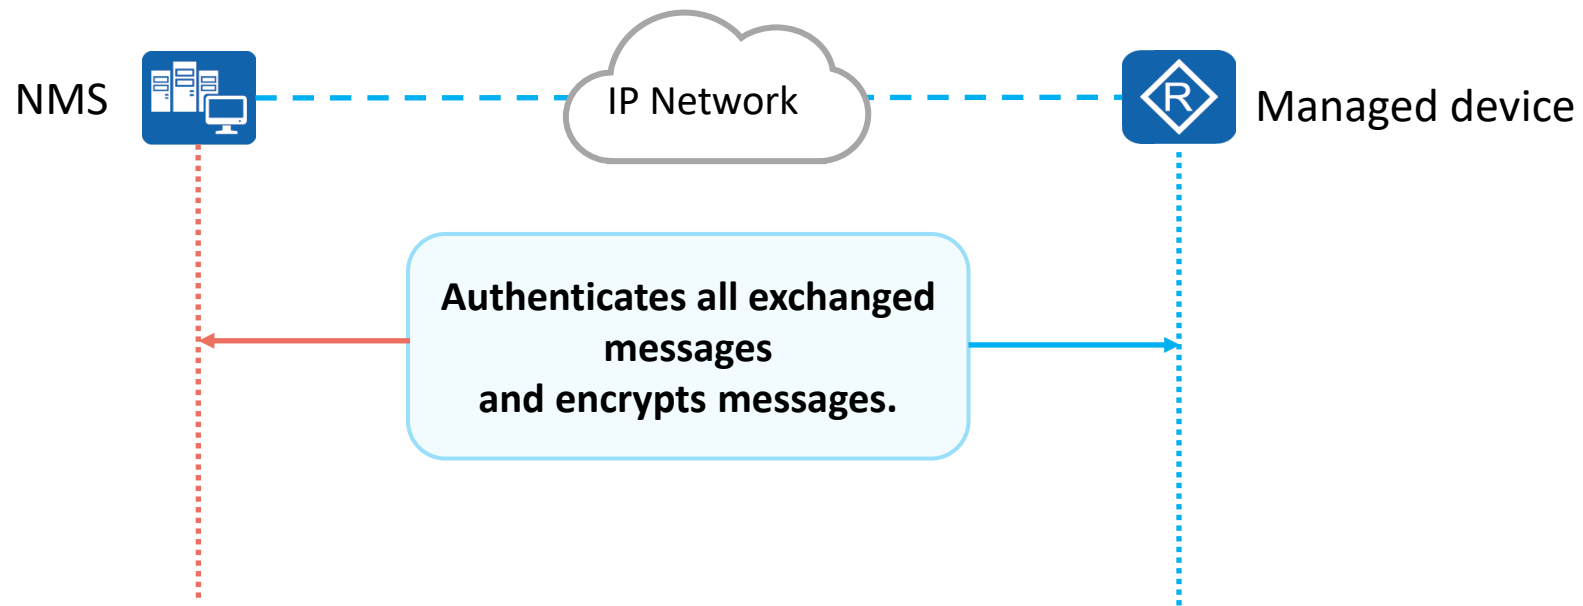



SNMP Summary

- SNMP has the following advantages:
 - Simplicity: SNMP is applicable to networks that require high speed and low cost because it uses a polling mechanism and provides basic network management functions. Moreover, SNMP uses UDP to exchange data and therefore is supported by most products.
 - Convenience: SNMP allows management information exchange between arbitrary devices on a network, so that a network administrator can query information and locate faults on any device.
- SNMPv1 applies to small-scale networks where security requirements are not high or the network environment is safe and stable, such as campus networks and small-sized enterprise networks.
- SNMPv2c applies to medium- and large-sized networks where security requirements are not high or the network environment is safe, but a large volume of traffic exists and traffic congestion may occur.
- SNMPv3 is the recommended version and applies to networks of various scales, especially those networks that have high security requirements and allow only authorized administrators to manage network devices.



Basic SNMP Configuration (1)

1. Enable the SNMP agent function.

```
[Huawei] snmp-agent
```

2. Set the SNMP version.

```
[Huawei] snmp-agent sys-info version [v1 | v2c | v3]
```

You can configure the SNMP version as required. However, the protocol version used on the device must be the same as that used on the NMS.

3. Create or update MIB view information.

```
[Huawei] snmp-agent mib-view view-name { exclude | include } subtree-name [mask mask]
```

4. Add a new SNMP group and map users in this group to the SNMP view.

```
[Huawei] snmp-agent group v3 group-name { authentication | noauth | privacy } [ read-view view-name | write-view view-name | notify-view view-name ]
```

This command is used to create an SNMP group of the SNMPv3 version and specify the authentication and encryption mode and one or more of read-only view, read-write view, and notification view. It is a mandatory command on networks that require high security.



Basic SNMP Configuration (2)

5. Add a user to the SNMP group.

```
[Huawei] snmp-agent usm-user v3 user-name group group-name
```

6. Configure an authentication password for an SNMPv3 user.

```
[Huawei] snmp-agent usm-user v3 user-name authentication-mode { md5 | sha | sha2-256 }
```

7. Configure the SNMPv3 user encryption password.

```
[Huawei] snmp-agent usm-user v3 user-name privacy-mode { aes128 | des56 }
```

8. Set parameters for the device to send traps.

```
[Huawei] snmp-agent target-host trap-paramsname paramsname v3 securityname securityname { authentication | noauthnopriv | privacy }
```



Basic SNMP Configuration (3)

9. Configure the target host of traps.

```
[Huawei] snmp-agent target-host trap-hostname hostname address ipv4-address trap-paramsname paramsname
```

10. Enable all trap functions.

```
[Huawei] snmp-agent trap enable
```

Note that this command is used only to enable the device to send traps. This command must be used together with the **snmp-agent target-host** command. The **snmp-agent target-host** command specifies the device to which traps are sent.


11. Configure the source interface that sends traps.

```
[Huawei] snmp-agent trap source interface-type interface-number
```

Note that a source IP address must have been configured for the interface that sends traps.



SNMP Configuration Example (Network Device Side)

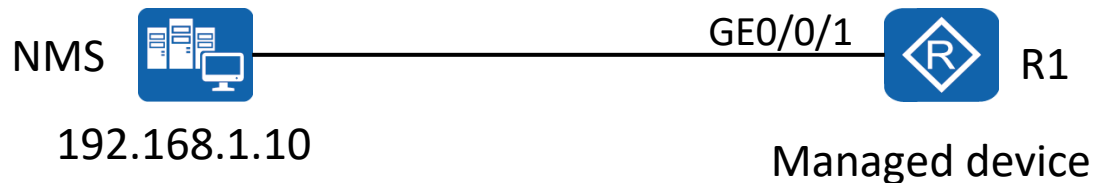

- Enable SNMP on R1 and set the SNMP version to SNMPv3.
- Set the SNMPv3 group name to **test** and encryption authentication mode to **privacy**.
- Create an SNMPv3 user named **R1** and set the authentication and encryption passwords to **HCIA-Datacom123**.
- Create a trap parameter named **param** and set securityname to **sec**.
- Set the IP address of the SNMP target host to 192.168.1.10.
- Enable the trap function and specify GE 0/0/1 as the source interface that sends traps.

R1configuration:

```
[R1]snmp-agent
[R1]snmp-agent sys-info version v3
[R1]snmp-agent group v3 test privacy
[R1]snmp-agent usm-user v3 R1 test authentication-mode md5
HCIA@Datacom123 privacy-mode aes128 HCIA-Datacom123
[R1]snmp-agent target-host trap-paramsname param v3
securityname sec privacy
[R1]snmp-agent target-host trap-hostname nms address
192.168.1.10 trap-paramsname param
[R1]snmp-agent trap source GigabitEthernet 0/0/1
[R1]snmp-agent trap enable
Info: All switches of SNMP trap/notification will be open.
Continue? [Y/N]:y
```




Contents

1. Basic Concepts of Network Management and O&M
2. Traditional Network Management
- 3. Network Management Based on Huawei iMaster NCE**



Transformation and Challenges of the Network Industry


- With the advent of the 5G and cloud era, innovative services such as VR/AR, live streaming, and autonomous driving are emerging, and the entire ICT industry is booming. At the same time, the traffic of the entire network also increases explosively. Huawei Global Industry Vision (GIV) predicts that the amount of new data will reach 180 ZB by 2025. Moreover, the dynamic complexity of services makes the entire network more complex.
- Such challenges can only be overcome by constructing automated and intelligent network systems centered on user experience.

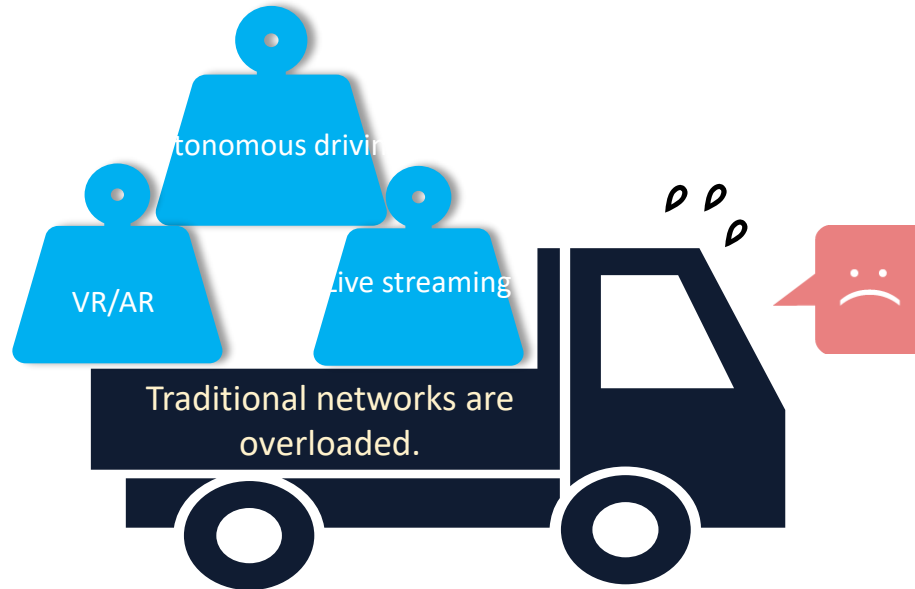



Huawei iMaster NCE

- Huawei iMaster NCE is a network automation and intelligence platform that integrates management, control, analysis, and AI functions.

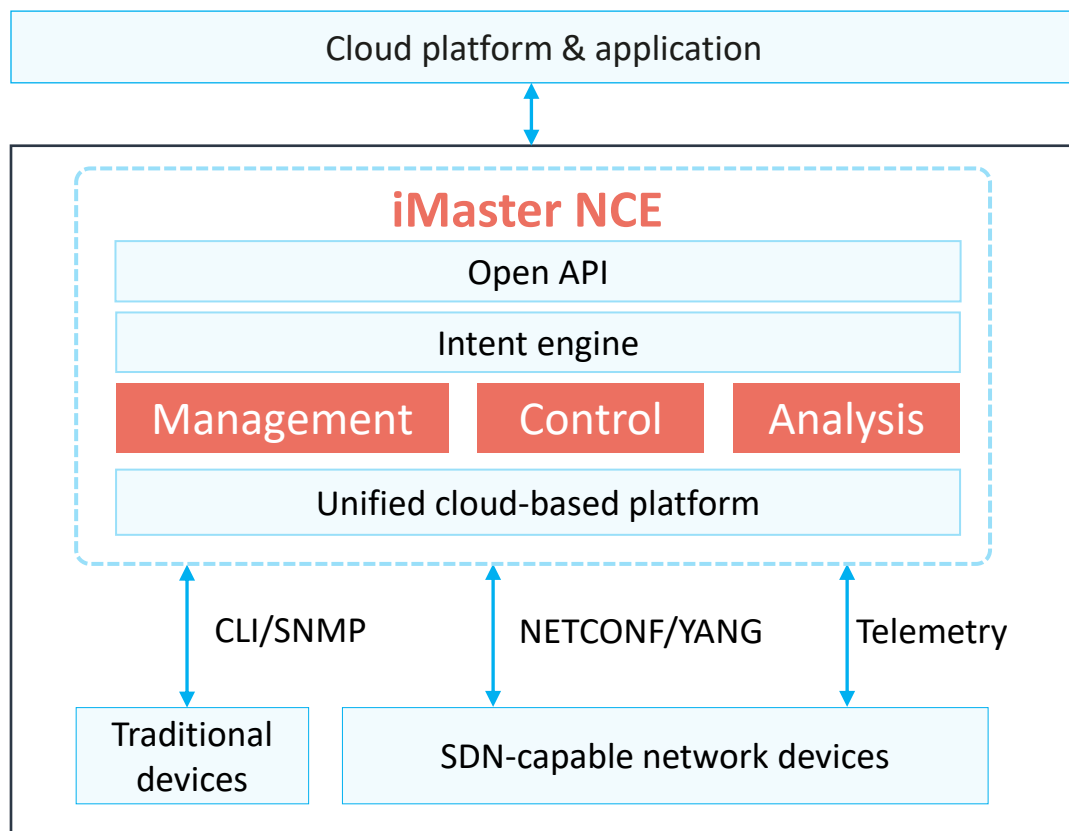


- In terms of management and control, iMaster NCE allows you to:
 - Manage and control traditional devices through traditional technologies such as CLI and SNMP.
 - Manage and control SDN-capable networks through NETCONF (based on the YANG model).
- iMaster NCE collects network data through protocols such as SNMP and telemetry, performs intelligent big data analysis based on AI algorithms, and displays device and network status in multiple dimensions through dashboards and reports, helping O&M personnel quickly detect and handle device and network exceptions and ensuring normal running of devices and networks.



NETCONF Overview

- NETCONF provides a network device management mechanism. You can use NETCONF to add, modify, or delete configurations of network devices, and obtain configurations and status of network devices.

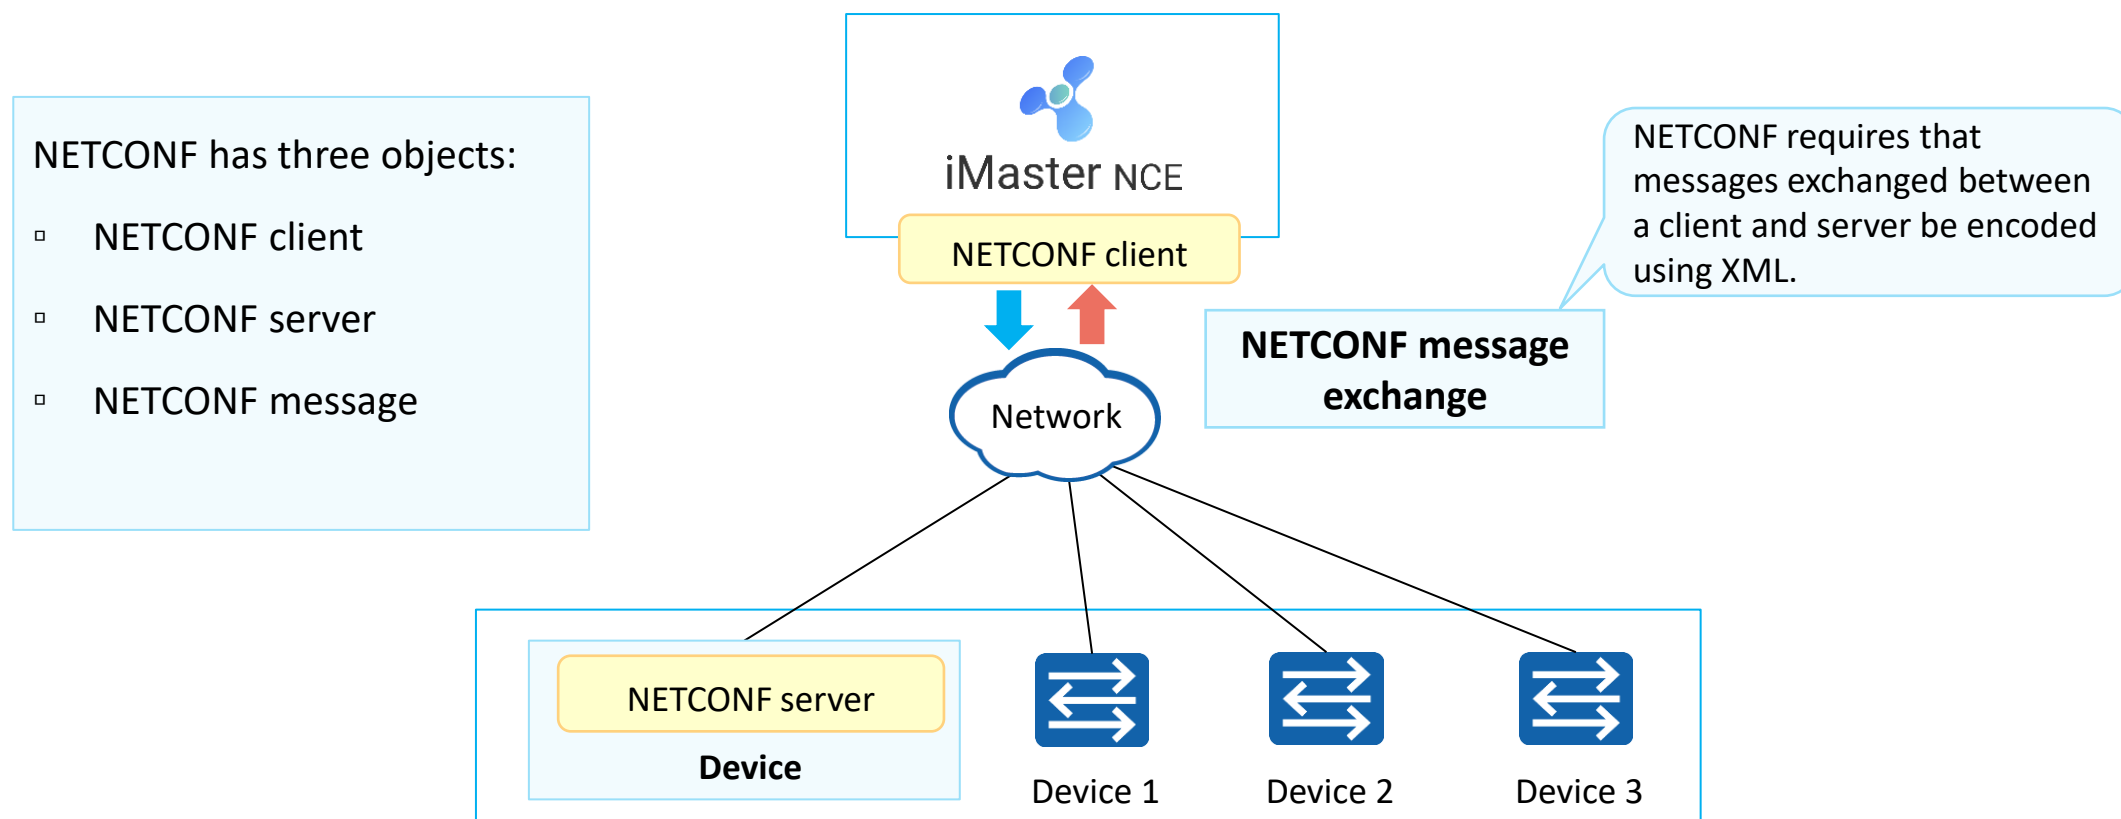




NETCONF Advantages

Function	NETCONF	SNMP	CLI
Interface type	Machine-machine interface: The interface definition is complete and standard, and the interface is easy to control and use.	Machine-to-machine interface	Man-machine interface
Operation efficiency	High: Object-based modeling is supported. Only one interaction is required for object operations. Operations such as filtering and batch processing are supported.	Medium	Low
Scalability	Proprietary protocol capabilities can be extended.	Weak	Moderate
Transaction	Supports transaction processing mechanisms such as trial running, rollback upon errors, and configuration rollback.	Not supported	Partially supported
Secure transmission	Multiple security protocols: SSH, TLS, BEEP/TLS, and SOAP/HTTP/TLS	Only SNMPv3 supports secure transmission.	SSH



Typical NETCONF Interaction

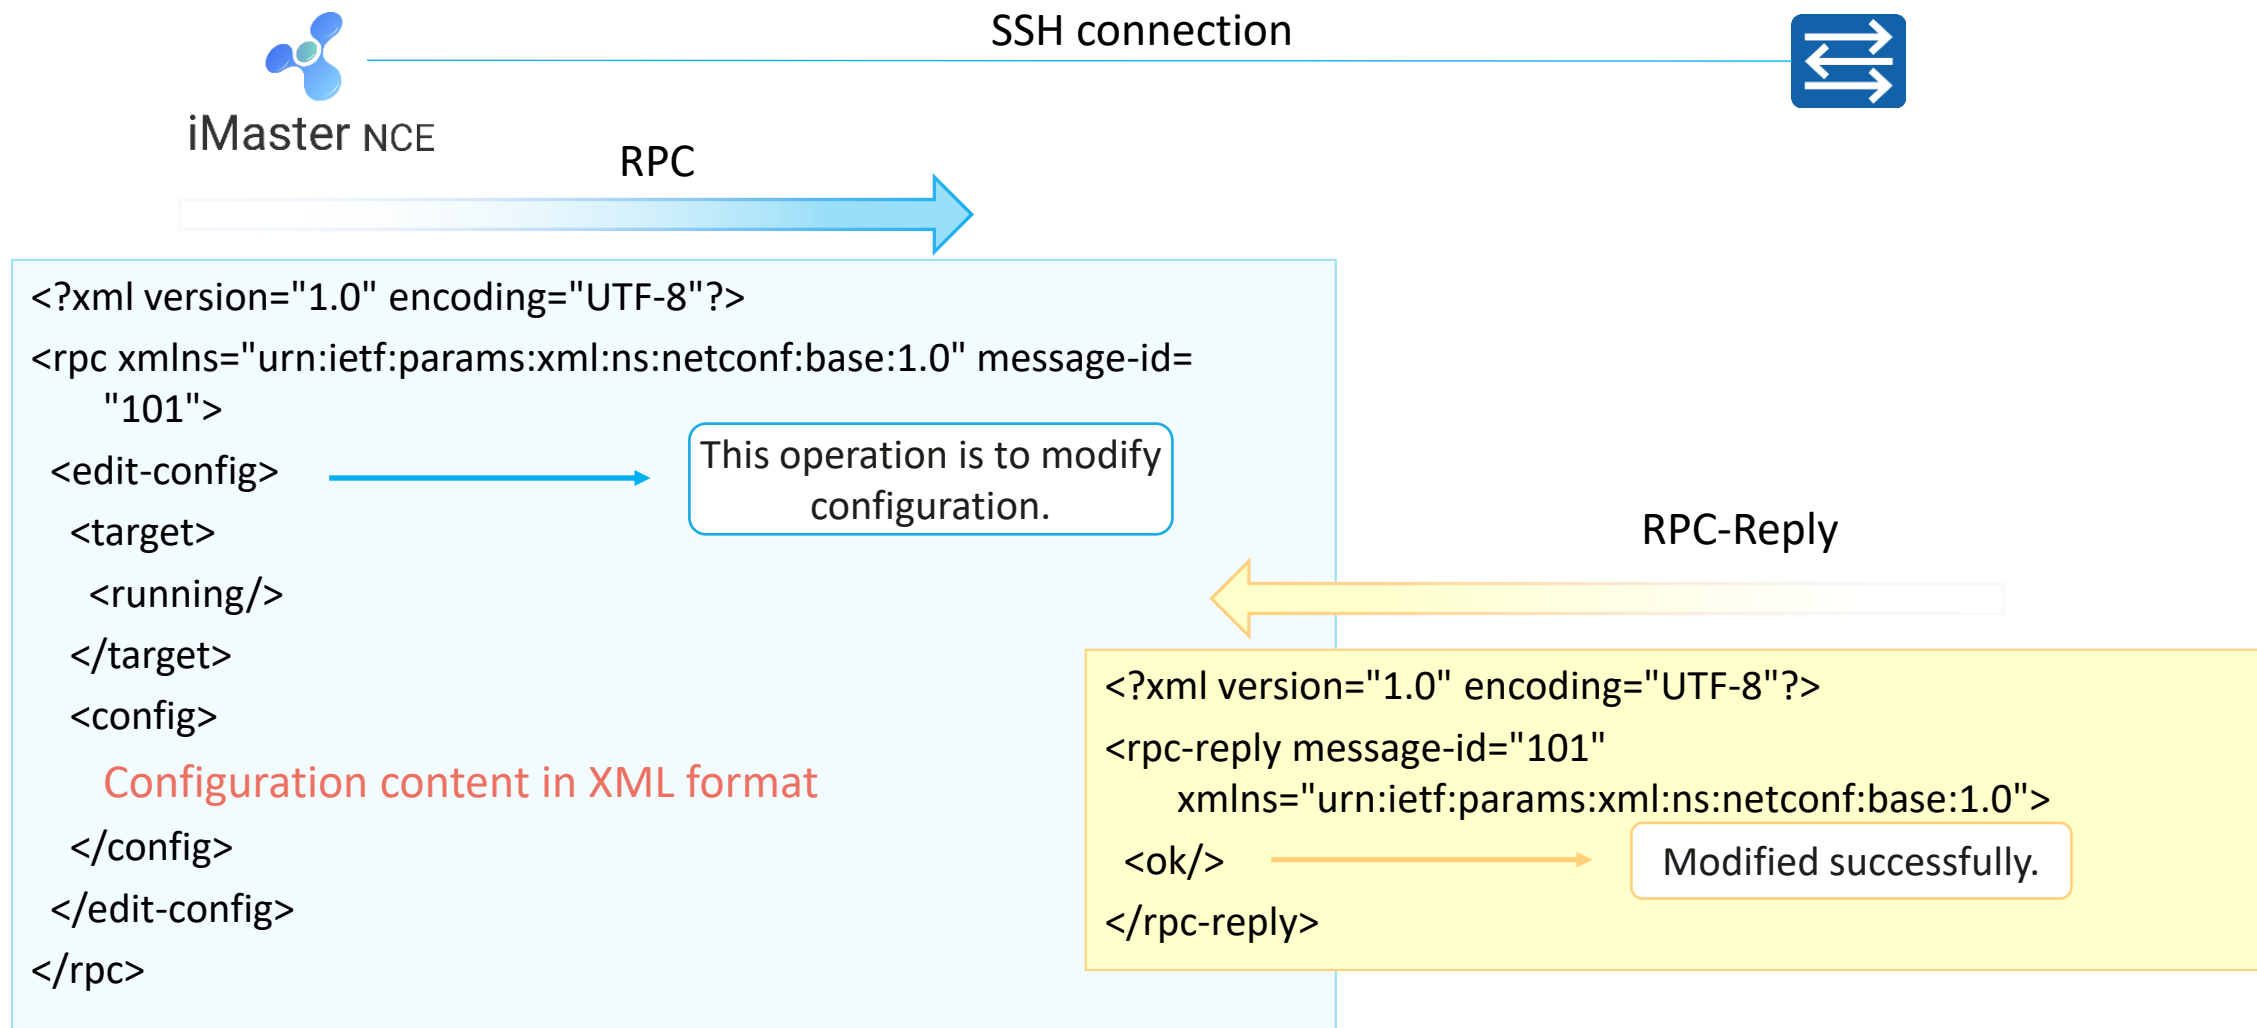



YANG Language Overview

- Yet Another Next Generation (YANG) is a data modeling language that standardizes NETCONF data content.
- The YANG model defines the hierarchical structure of data and can be used for NETCONF-based operations. Modeling objects include configuration, status data, remote procedure calls, and notifications. This allows a complete description of all data exchanged between a NETCONF client and server.

A model is an abstraction and expression of things.

A data model is an abstraction and expression of data features.

Name, gender, height,
weight, age, skin color...



Person



Interface, routing
protocol, IP address,
routing table...

Router



YANG and XML (1)

- A YANG file is loaded on the NETCONF client (such as the NMS or SDN controller).
- The YANG file is used to convert data into XML-format NETCONF messages before they are sent to the device.

```
list server {  
  key "name";  
  unique "ip port";  
  leaf name {  
    type string;  
  }  
  leaf ip {  
    type inet:ip-address;  
  }  
  leaf port {  
    type inet:port-number;  
  }  
}
```

YANG file

+

```
name="smtp"  
ip=192.0.2.1  
port=25
```

```
name="http"  
ip=192.0.2.1  
port=
```

```
name="ftp"  
ip=192.0.2.1  
port=
```

Data

=

```
<server>  
  <name>smtp</name>  
  <ip>192.0.2.1</ip>  
  <port>25</port>  
</server>  
<server>  
  <name>http</name>  
  <ip>192.0.2.1</ip>  
</server>  
<server>  
  <name>ftp</name>  
  <ip>192.0.2.1</ip>  
</server>
```

XML



YANG and XML (2)

- A YANG file is loaded on the NETCONF server (such as a router or switch).
- The YANG file is used to convert received XML-format NETCONF messages into data for subsequent processing.

```
<server>
  <name>smtp</name>
  <ip>192.0.2.1</ip>
  <port>25</port>
</server>
<server>
  <name>http</name>
  <ip>192.0.2.1</ip>
</server>
<server>
  <name>ftp</name>
  <ip>192.0.2.1</ip>
</server>
```

XML

+

```
list server {
  key "name";
  unique "ip port";
  leaf name {
    type string;
  }
  leaf ip {
    type inet:ip-address;
  }
  leaf port {
    type inet:port-number;
  }
}
```

YANG file

=

```
name="smtp"
ip=192.0.2.1
port=25
```

```
name="http"
ip=192.0.2.1
port=
```


```
name="ftp"
ip=192.0.2.1
port=
```

Data



Telemetry Overview

- Telemetry, also called network telemetry, is a technology that remotely collects data from physical or virtual devices at a high speed.
- Devices periodically send interface traffic statistics, CPU usage, and memory usage to collectors in push mode. Compared with the traditional pull mode, the push mode provides faster and more real-time data collection.

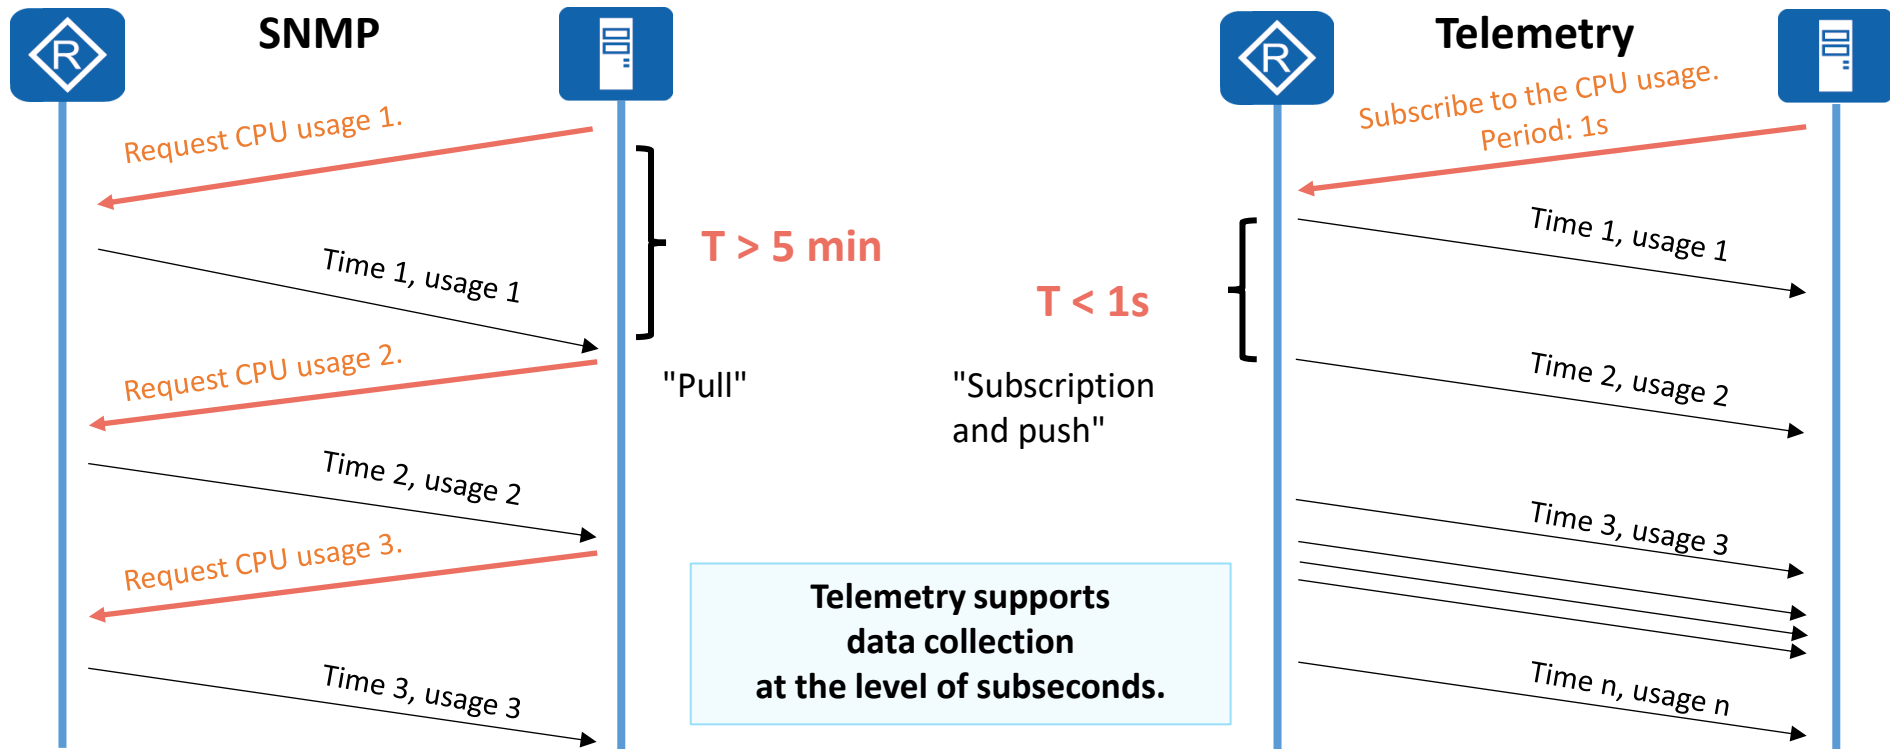



Quiz

1. (Single) On an SNMP-based network, which of the following runs the management process to manage the managed devices? ()
 - A. NMS
 - B. Agent process
 - C. MIB
 - D. SNMP

2. (Single) In SNMPv1, which of the following operations is used by a managed device to report traps? ()
 - A. Get-Request
 - B. Set-Request
 - C. Trap
 - D. Response



Quiz

3. YANG is a data modeling language. ()
 - A. True
 - B. False
4. Telemetry supports data collection at the level of subseconds. ()
 - A. True
 - B. False



Summary

- With the development of network technologies, more and more network management and O&M methods are available. The common methods are as follows:
 - CLI mode or web system
 - SNMP
 - Huawei iMaster NCE's intelligent O&M platform (covering management, control, and analysis)

The background of the slide features a blue-tinted image of a modern office interior. In the foreground, several groups of business professionals are silhouetted against the bright light coming from large windows. They appear to be in various stages of collaboration, some looking at documents or devices. The windows in the background offer a view of a dense urban skyline with numerous skyscrapers. The overall atmosphere is professional and forward-looking.

Thank You
www.huawei.com