

wirenboard

Manufacturer of Automation Equipment

2026

Wiren Board 8

Versatile programmable automation controller
with open source Linux-based software

Hardware

- Quad-core ARM Cortex-A53 1.5 GHz
- Up to 4 GB LPDDR4 RAM
  and up to 64 GB eMMC



Embedded Software

- Debian Linux OS with root access:
  modify any settings
  and install third-party applications
- Wiren Board software for various tasks
- Custom firmware images can be built
  with your own or our software
- **Wiren Board Cloud –** remote management
  and inventory service

4G (LTE) modem

Primary or backup communication channel

- 2 Nano SIM slots
- SMS messaging
- 2G/3G/4G (up to 150 Mbps)

Interfaces & communications

- 1 x microSD slot, up to 60 MB/s
- 2 x Ethernet 10/100
- 1 x USB Host
- Wi-Fi 802.11n (AP, client), 2.4 & 5 GHz
- Bluetooth 4.2 + BLE
- 2 x RS-485: Modbus RTU and other protocols
- 2 x 1-Wire / DI
- 4 x AI / DI / DO


Power

- 9 to 48 VDC
- Backup power input
- Optional PoE 802.3af or Passive PoE
- Built-in backup power modules

Industrial versions (-40 to +75 °C)

ARM Cortex-A53 1.5 GHz, 4 GB LPDDR4 RAM, eMMC 64 GB — 528 €

It fits your needs

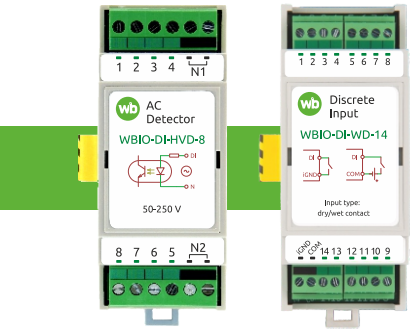

WBIO I/O Modules

Stackable modules allow adding up to 128 additional I/O ports to the controller


- Digital and analog inputs/outputs
- Mechanical and solid state relays
- Mains voltage detectors


starting at 36 €

Backup power modules

Built-in UPS.
Powers the controller, extension modules, WBIO and devices connected to USB and Vout terminals.

39 €

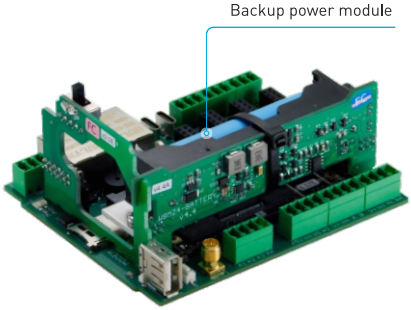

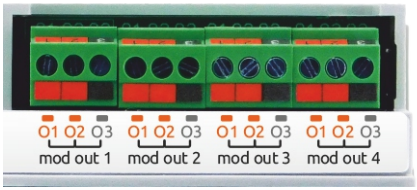


Terminals for connecting external devices to extension modules


Extension modules

Four extension modules can be installed in slots inside the controller housing

- Additional inputs and outputs
- eBUS, KNX, OpenTherm, Z-Wave, Zigbee, GPS



4G modem



Zigbee



KNX



RS-232

Wiren Board 8M

Universal modular controller for automation, running its own open-source Linux-based software



Interfaces and communications

- 1 x microSD slot, up to 50 MB/s
- 2 x Ethernet 10/100
- 1 x USB Host
- Wi-Fi 802.11n (AP, client), 2.4 & 5 GHz
- Bluetooth 4.2 + BLE
- 2 x RS-485: Modbus RTU and other protocols
- 2 x 1-Wire / DI
- 4 x AI / DI / DO
- RTC with ±0.5 seconds per day accuracy

Embedded Software

- Debian Linux OS with root access: modify any settings and install third-party applications
- Wiren Board software for various tasks
- Custom firmware image can be built with your own or our software
- **Wiren Board Cloud –** remote management and inventory service

Power

- 9 to 48 VDC
- Backup power input

Package includes

- 2G/3G/4G (LTE) Modem with 2 Nano SIM Slots
- 4 RS-485 modules with galvanic isolation
- Supercapacitor backup power module

Hardware


- Quad-core ARM Cortex-A53 1.5 GHz
- Up to 4 GB LPDDR4 RAM and up to 64 GB eMMC

Industrial versions (-40 to +75 °C)

ARM Cortex-A53 1.5 GHz, 4 GB LPDDR4 RAM, eMMC 64 GB

572 €

Interface Converters

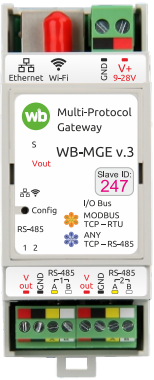


WB-MGE v.3

The Swiss Army knife for Modbus

An all-in-one device for any Modbus-related task

- TCP–Serial bridge and Modbus RTU ⇄ Modbus TCP gateway
- Sniffer and master emulator
- Caching multi-master
- PoE power supply with power management
- Modern web interface with a mobile version
- 2 RS-485 ports, Wi-Fi, Ethernet
- WBIO module support
- RS-485 line repeater

88 €

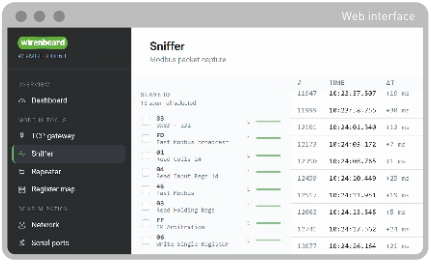


Modbus sniffer and master emulator

Decodes and displays Modbus traffic, and lets you send messages manually

Open-source firmware

The firmware's open-source code lets you add your own custom functions:
github.com/wirenboard/wb-mge

Modbus RTU ⇄ TCP gateway




Converts Modbus TCP packets to Modbus RTU and back

RS-485 line repeater




Relays packets between RS-485 ports: line extension, branching, and noise immunity

Caching multi-master

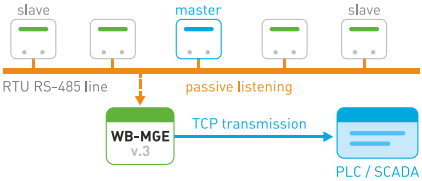

Passively listens to the existing RTU line and responds to TCP requests — a non-invasive way to connect to live systems

Sniffer and master emulator

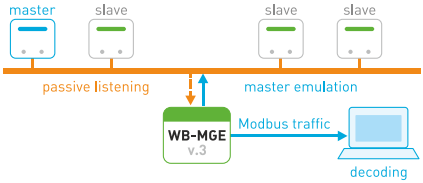

Decodes the line's Modbus traffic and lets you manually send requests as a master

Internal extension modules



Wiren Board controllers can be easily customized for specific tasks with extension and input-output modules.

Extension modules are small circuit boards designed to be installed inside the controller. They expand the functionality of the controller by adding additional interfaces.

Wiren Board 8 features four slots for connecting extension modules.

Interfaces

WBE2-I-RS232	RS-232 Interface	13 €
WBE2-I-KNX	KNX TP Interface	90 €
WBE2-I-RS485-ISO	Additional isolated RS-485 interface	22 €
WBE2-I-1-WIRE	Additional 1-Wire interface	13 €
WBE2-I-EBUS, WBE2-I-OPENTHERM	Control of electric and gas boilers via the eBUS and OpenTherm protocols	117 €
WBE2-HDMI	The WBE2-HDMI extension module adds an HDMI output with a micro-HDMI connector to Wiren Board 8.5	28 €

Digital Inputs

WBE2-DI-DR-3	3 dry contact inputs	13 €

Digital Outputs

WBE2-DO-R6C-1	1 relay output (SPDT)	13 €
WBE2-DO-SSR-2	2 SSR outputs	13 €
WBE2-DO-R3A-1	1 normally open relay output	10 €

Wireless

WBE2R-R-GPS	GPS/GLONASS module with precise time signal	34 €
WBE2R-R-ZIGBEE v.2	Zigbee interface (2.4 GHz), Z-Stack 3.x	53 €
WBE2R-R-ZWAVE-ZWAY	7th generation Z-Wave chip	140 €

Power modules

WBP-ACTIVE-POE	IEEE 802.3af, 802.3at PoE power module	42 €


Backup power modules

WBMZ4-SUPERCAP	Supercapacitor-based backup power supply module	39 €
WBMZ4-BATTERY	Li-ion battery backup module	39 €
WBMZ6-BATTERY	Li-ion battery backup module for Wiren Board 8.5	39 €
WBMZ6-SUPERCAP	Supercapacitor-based backup power module for Wiren Board 8.5	39 €

Modems

WBC2-4G	Supports 2G, 3G, 4G (Cat.4 LTE)	59 €

WBIO Modules

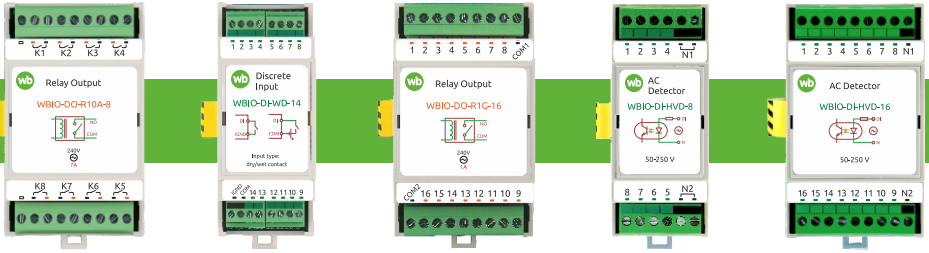

WBIO-DO-R10A-8	8 outputs with mechanical relays (SPST) 7 A	51 €
WBIO-DO-SSR-8	8 digital outputs with low-voltage solid-state relays (optocouplers, SPST, up to 30 V, 400 mA)	36 €
WBIO-DO-R1G-16	16 mechanical relay outputs (SPST, 1 A), combined into two groups	90 €
WBIO-DI-HVD-8	8 channels for mains voltage detection (230V AC)	44 €
WBIO-DI-HVD-16	16 channels for mains voltage detection (230V AC)	66 €
WBIO-DI-WD-14	14 universal digital inputs 2 operation modes: dry contact and 12/24 V voltage presence	45 €

Demo kit

The demo suitcase is a pre-assembled and pre-configured set of equipment. It is designed for demonstrating Wiren Board devices to end customers or for quick self-study of the hardware and software.

The demo suitcase includes detailed documentation: a complete wiring diagram, a power supply diagram, and a comprehensive description of various scenarios.

Use cases and features:

- Climate control
- Ventilation and air conditioning control
- Lighting control
- Water and electricity meter reading
- Multi-tariff electricity metering
- Water leak protection
- Equipment failure alerts
- Uninterrupted operation during power outages

It can be used to show:

- Building services management in stores and warehouses
- Control of data center equipment, base stations and transformer substations
- Home and residential complex automation



1246 €

Supported hardware

Modbus RTU (RS-485)

- Sensors, I/O and lighting control modules
- Wide variety of industrial I/O modules and other devices manufactured by: S+S, Advantech, ICP-DAS, and others

KNX (EIB)

- Supports both KNX TP and KNX/IP
- Wide selection of KNX devices for residential and commercial automation
- The controller works as a KNX IP Gateway
- ETS project import support

1-Wire (DS18B20)

- Inexpensive and reliable digital temperature sensors
- Used in underfloor heating systems, boilers and climate controls
- Measures temperatures from -55°C to +125°C with an accuracy of ±0.5°C

M-Bus, DLMS/COSEM Meters

- M-Bus master interface
- Electricity, heat and gas meters
- Support for DLMS/COSEM protocol based meters

Z-Wave

- Certified software package with Z-Wave Plus support
- Over 1000 compatible wireless devices

Zigbee

- Operation via zigbee2mqtt bridge
- Wide range of compatible wireless devices

Other

- Boilers with eBUS and OpenTherm protocols
- Curtain motors Akko AM82, Dooya DT82, WinDeco, Somfy SDN
- Lighting equipment with the DALI-2 protocol

User Interfaces

Wiren Board controller web interface



Dashboard




History




MQTT channels



Scan Interface




Device Configuration




Live equipment layout diagram

Third party software

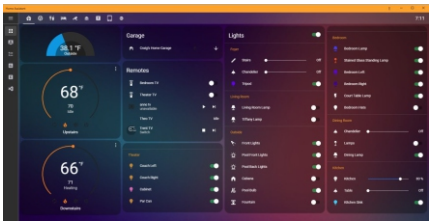

Home Assistant

Universal and flexible software platform for creating professional home and industrial automation and building services monitoring

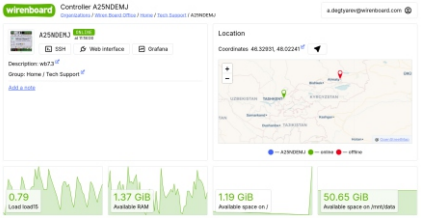



Wiren Board Cloud

Remote administration service

More on pages 11–12







Rapid SCADA, Zabbix, Grafana and other monitoring software


Wiren Board Cloud

remote administration and monitoring service for controllers

Remote access to Wiren Board controllers without a public IP address, NAT configuration or third-party VPN tunnels. Connect to any site from a browser on a computer or smartphone.

Features

- Web UI and SSH right in the browser
- Access to web services on the controller
- Metrics and dashboards in Grafana
- Fleet inventory: software versions, groups, descriptions
- No limit on controllers and organizations
- Two-factor authentication
- No VPN needed — resilient to accidental tunnel blocking
- On-premise version for your own server

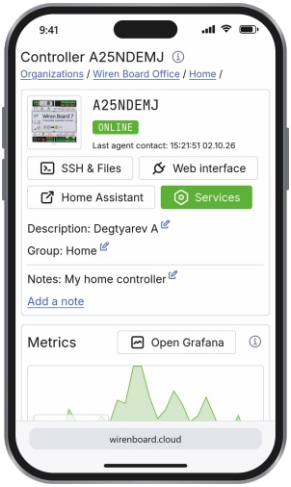

Secure tunnel without a public IP




The controller itself opens an outgoing TLS connection to the cloud. No port forwarding on the router and no static external address on site are required.

Web services access

Web interfaces of applications on the controller — Node-RED, Home Assistant, Zigbee2MQTT — and of your own services open via a direct SSL-encrypted link, with no VPN or port forwarding. Up to 20 web services per controller.

Monitoring and inventory

telemetry, fleet records and handover of sites

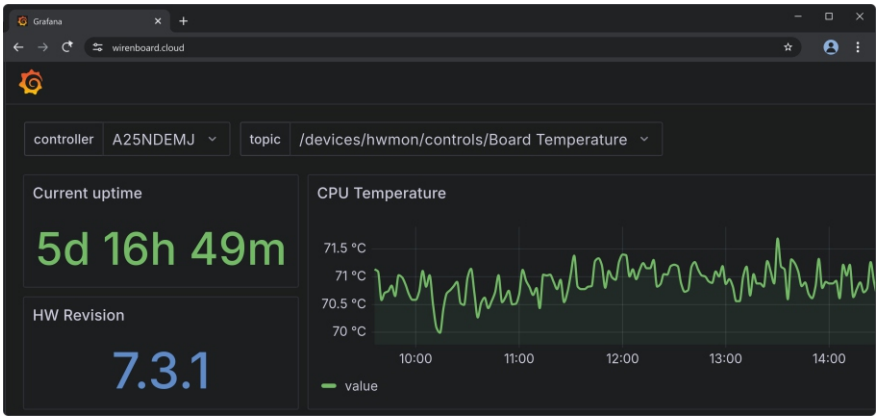

Controller metrics in Grafana

Telemetry in Grafana

Collect and visualize any parameters: indoor climate, energy metering, alarms and system metrics. Monitoring dashboards tailored to each site and a measurement archive of up to 30 days.

Inventory and unified records

A registry of all sites: controllers linked to branches, responsible engineers, commissioning notes, software versions and update history.

Organizations and site handover

The integrator sets up a controller in their own organization and, once the site is delivered, hands it over to the client in a couple of clicks — or keeps it under a service contract.

Cloud service, as well as on-premise
with anonymized metrics sent to Wiren Board

free


On-premise: fully isolated network
with no internet access


from 294 € /month

WB-MAP Multi-Circuit Energy Meters

WB-MAP multi-circuit energy meters are designed for energy management, industrial metering and power quality monitoring.

These devices occupy significantly less space in the electrical cabinet compared to traditional energy meters. Split-core current transformers used by WB-MAP meters are installed on existing wires without requiring reassembly of the electrical cabinet.

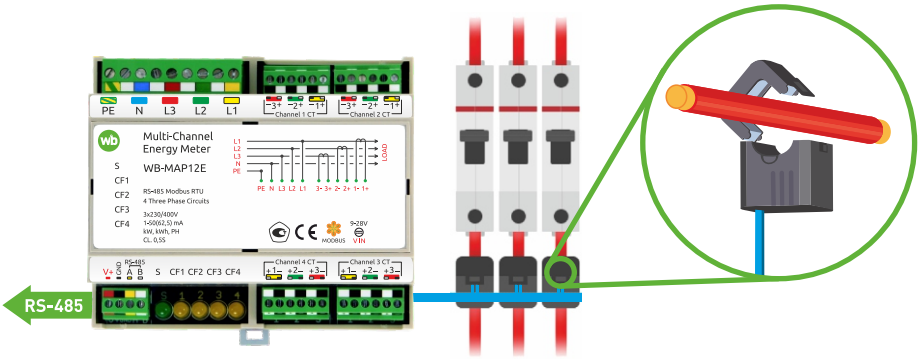



WB-MAP3E

- Measurement of peak current and voltage values over an adjustable interval
- Can be powered directly from phase voltage
- Accuracy class 0.5S
- DIN rail housing, 3 modules

81€


current transformers not included



WB-MAP3EV

- Measures real-time voltage parameters, peak voltage values, and phase angles between phases
- Three-phase voltmeter with Modbus
- DIN rail housing, 2 modules

62€



WB-MAP6S

- Multi-channel single-phase meter for 6 circuits with Modbus RTU
- For apartments, hotels, and offices
- Accuracy class 0.5S
- DIN rail housing, 3 modules

62 €


current transformers not included



WB-MAP3ET

- Built-in current transformers
- Measurement of voltage, current, and power
- Can be powered directly from phase voltage
- Measurement of active, reactive, and apparent power and energy
- Accuracy class 0.5S
- DIN rail housing, 3 modules

97 €



WB-MAP12E


- Replaces 4 three-phase or 12 single-phase meters
- Can be powered directly from phase voltage
- Measurement of peak current and voltage values
- Accuracy class 0.5S
- DIN rail housing, 6 modules

210 €


current transformers not included


Current Transformers



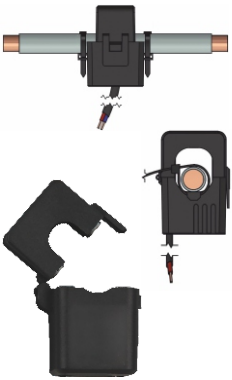

- Split-core current transformers rated up to 400 A
- Clip onto the cable
- For use with WB-MAP meters

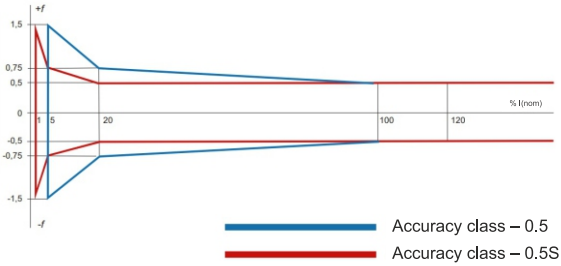



WB-CT309 v.2

Current transformer strip with three solid-core transformers for use with WB-MAP energy meters. CTs are arranged in 1 DIN module increments

- Accuracy class: 0.5S
- Maximum current: 125 A
- Cable diameter: up to 9.5 mm
- Dimensions: 70 x 28 x 30 mm (without mounting brackets)

17 €

Split-core

KCT-6	Split-core current transformer, rated 20 A	8 €
ZEMCTK05-14	Split-core current transformer, rated 80 A	8 €
ZEMCTK04-13	Split-core current transformer, rated 140 A	10 €
CTSA024	Split-core current transformer, rated 200 A	25 €
CTSA035	Split-core current transformer, rated 400 A	39 €

Solid-core

ZMCT205D	Solid-core current transformer, rated 8 A	2 €
ZMCT102w	Solid-core current transformer, rated 20 A	2 €
ZMCT134	Solid-core current transformer, rated 40 A	3 €
ZMDCT21	Solid-core current transformer, rated 100 A	4 €

DC Current Sensors

HSTS016L-D05	Split-core DC current sensor, rated 30 A	27 €
HSTS016L-D07	Split-core DC current sensor, rated 100 A	27 €

WB-MR relay modules


WB-MR relay modules are controlled via Modbus RTU. They are used for switching various load types: lighting, ventilation, heated floors, switching power supplies and other equipment.


The series includes modules with different numbers of channels and load capacities. The series includes specialized modules designed for direct control of loads with high inrush currents (up to 500 A) eliminating the need for a separate contactor. These are ideal for LED lighting, incandescent lamps and other demanding applications.

Most modules in the series feature digital inputs that can be used either for direct control of relay channels or as general purpose inputs.

When used with switches, the inputs can recognize four types of presses: short, long, double, and short followed by long. Each press type can be assigned a specific action for one or multiple outputs.

Modules feature a safe mode that determines module behavior if connection with the controller is lost.

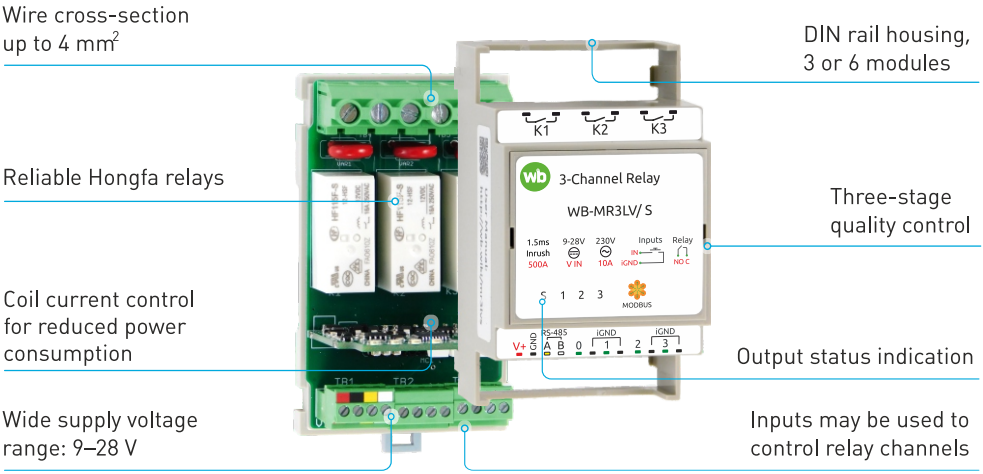




WB-MR6C v.2

Designed for direct control of LED, incandescent and fluorescent lighting and other loads

- 6 relay channels 10 A 230 V AC
- High inrush current up to 80 A
- Continuous current 16 A
- 7 isolated inputs
- DIN rail housing, 3 modules

62 €




WB-MR6C v.3

WB-MR6C v.2 module version with built-in power supply

- Advanced safe-mode settings
- Relay emulation with normally closed contacts
- DIN rail housing, 3 modules

74 €




WB-MRWL3

Direct control (without contactor) of groups of socket outlets

- 3 relays 20 A 230 V AC
- Continuous current 26 A
- 4 isolated inputs
- DIN rail housing, 3 modules

64 €



WB-MR6CU v.2

Compact relay module without inputs

- 6 relay channels 10 A 230 V AC
- High inrush current up to 80 A
- Continuous current 16 A
- DIN rail housing, 2 modules

58 €




WB-MRM2-mini v.2

Flush-mounted module for installation
in junction and wall switch boxes

- 2 relay channels 10 A
- Inrush current up to 80 A
- NO and NC configurations
- 2 digital inputs
- Small size: 52 x 22 x 20 mm

36 €




WB-MRWM2

Designed for controlling power outlets, motors
and heaters with power consumption measurement

- 2 relay channels 20 A 230 V AC
- 2 isolated inputs
- Measures active power
of the load and input voltage
- DIN rail housing, 3 modules

74 €




WB-MRPS6/S

Six high-power relay outputs

- 6 independent relay channels rated 10 A 230 V AC
- High inrush current up to 500 A
- Ideal for lighting and PSU control
- DIN rail housing, 3 modules

74 €



WB-MR3LV & WB-MR6LV

For switching LED lamps, power supplies (PSUs)
and other high-power loads without intermediate contactors

- 3 or 6 independent relay channels 10 A 230 V AC
- High inrush current up to 500 A (1.5 ms)
- Continuous current 16 A
- 4 & 7 isolated inputs
- Models with normally open and changeover contacts
- DIN rail housing, 3 or 6 modules

WB-MR3LV/S
3 relays
dry contact inputs
58 €

WB-MR6LV/S
6 relays
dry contact inputs
87 €



WB-MSW v.4

Wall mount 8-in-1 environment sensor with Modbus RTU for residential and office spaces

- Temperature and humidity
- Light level
- Noise level
- CO_2 concentration
- Built-in buzzer and status LEDs
- Motion sensor
- Air quality (VOC)
- IR control for home appliances

64 € temperature and humidity

+ 12 € Light & IR blaster

+ 5 € Noise level

+ 8 € Motion sensor

+ 36 € Air quality


+ 53 € CO_2 concentration

zigbee 210 €

Zigbee version in full configuration

Modbus 175 €

Modbus version in full configuration




WB-MS v.2

Wall multisensor with Modbus RTU, for wall or DIN rail mounting

- Temperature and humidity
- Light level
- Air quality (VOC)
- Supports up to two external 1-Wire temperature sensors
- 1-Wire inputs can be used as pulse or digital inputs

46 € Temperature and humidity

Signal converters




WB-M1W2 v.3

Built-in module with two dry contact inputs

- For installation in wall switch boxes, cable ducts and other tight places
- Up to 40 DS18B20 temperature sensors can be connected (20 per input)
- Each input can operate in two modes: 1-Wire or pulse counting and press detection
- Dimensions: 34 x 20 x 17 mm

24 €



WB-MAI6

12 inputs for analog sensors

- RTD sensors Pt 100, Pt 1000, etc. 2- and 3-wire connection
- K-type thermocouples, NTC thermistors
- Sensors with output 0–10 V, 1–10 V, ±50 mV, 4–20 mA, 0–20 mA, 0–5 mA
- DC voltage measurement up to 30 V in the basic configuration
- DC voltage measurement up to 60 V using WB-VDIV voltage divider
- DIN rail housing, 3 modules

WB-VDIV 21 €

WB-MAI6 83 €



WB-MAI2-mini / CC


Two-channel 0–20 mA analog input module with Modbus RTU

- Designed for installation in junction boxes
- Dimensions: 57 x 18 x 12 mm

27 €

Lighting control modules

The modules support direct control from switches and remote control via RS-485 Modbus RTU




WB-DALI3

Three-channel gateway with an RS-485 interface for controlling devices via the DALI-2 protocol (IEC 62386)

- 3 independent DALI lines
- 7 digital inputs for connecting pushbuttons
- Operating temperature range: -40 to +60 °C
- DIN rail housing, 3 modules

154 €



WB-MDM3

Dimmer for LED and incandescent lamps.
3 channels, up to 300 W per channel

- Trailing and leading edge dimming
- 6 isolated digital inputs with freely programmable logic
- Control via switches and Modbus
- Overload protection
- DIN rail housing, 3 modules

99 €




WB-LED

4-channel dimmer for controlling LED strips:
RGB, RGB+W, CCT (tunable-white) or W (white)

- 4 channels, up to 48 V DC, up to 5 A per channel
- PWM frequency from 100 Hz to 24 kHz, adjustable in settings
- Programmable digital inputs
- Short circuit and overheat protection
- DIN rail housing, 2 modules

48 €




WB-AMPLED

4-channel amplifier for LED strip dimming

- 4 channels, 10 A each, up to 48 V
- 4 inputs for control signals
- Built-in overheat protection
- DIN rail housing, 2 modules

44 €



WB-MA04

4-channel analog control module for lighting and other equipment

- 4 outputs 0–10 V DC and PWM
- 3 digital inputs
- DIN rail housing, 2 modules

62 €

IR blaster



WB-MIR v.3

Programmable IR blaster module

- Stores up to 80 IR commands in internal memory
- Programming and control via RS-485 interface using Modbus RTU protocol
- External IR transmitter with a 3.5 mm jack
- External 1-Wire temperature sensor or can be used as a digital input
- Small size: 34 x 20 x 17 mm

39 €

Other devices



WB-BUSHUB

Passive RS-485 bus splitter

- Pluggable 4-pin terminal blocks
- Two bus segments with 7 branches each
- Supports RS-485 bus, isolated ground, power supply, etc.
- DIN rail housing, 2 modules (35 x 90 x 36 mm)

30 €




WB-T120

Terminator for the RS-485 bus

- Resistance: 120 Ω ±5%
- Maximum wire cross-section that can be clamped: 2.5 mm^2

5 €



WB-USB485

RS-485 interface converter
for device control

- 12 V output, up to 400 mA
- Short circuit protection
- Supported without drivers on Windows, Linux, macOS, and Android

33 €



WB-MAO4-20mA

Four 0–20 mA outputs for air damper actuators, frequency converters, and other industrial equipment control

- 4 x 0–20 mA outputs, 4 digital inputs
- DIN rail housing, 2 modules

77 €




WB-MCM8HV

AC Voltage Detection Module, > 150 V AC

- Isolated group of 8 digital inputs
- Configurable debounce time
- Press type recognition and counting
- RS-485 Modbus RTU
- 2-module DIN rail enclosure

52 €

Meter reading devices




WB-MCM8

Reads 8 meters with pulse outputs

- 8 pulse inputs for dry contact or open collector outputs
- Compatible with water, electricity and gas meters
- Monitors current status, pulse frequency and total pulse count for each input
- DIN rail housing, 2 modules

45 €

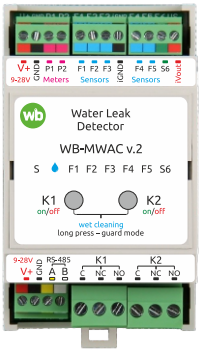

WB-MWAC v.2

Automatically shuts off water when leak sensors are triggered and monitors two water meters with pulse output

- 2 pulse inputs
- Retains pulse count even during power outages
- 6 isolated universal inputs for leak sensors and control buttons
- 2 changeover relays for connecting motorized shut-off valves
- 2 buttons for local control of shut-off valves
- “Floor cleaning” mode
- LEDs: alarm, input status and valve position
- Works standalone and via RS-485 Modbus RTU
- DIN rail housing, 3 modules

97 €



Pulse water meters



Water leak sensors




Motorized shut-off valves

Refrigeration controller cards


Our network cards provide an RS-485 interface with Modbus RTU support for Danfoss, Carel and Eliwell refrigeration controllers.

You can connect freezers, refrigerated display cases and other commercial refrigeration equipment to SCADA or a controller with Modbus RTU support to remotely monitor their status and performance as well as control key functions such as defrosting, adjusting temperature setpoints and more.

WB-REF-DF-ERC21	For Danfoss controllers: ERC 211, ERC 213, ERC 214	24 €
WB-REF-DF-178A	For Danfoss controllers: EKC 202D, EKC 202B, EKC 204A1 / AK-CC	47 €
WB-REF-U	For Carel controllers: BASIC, EASY, pRack, µC2SE, pCO2, µGEO Eliwell ID / ID Plus	47 €

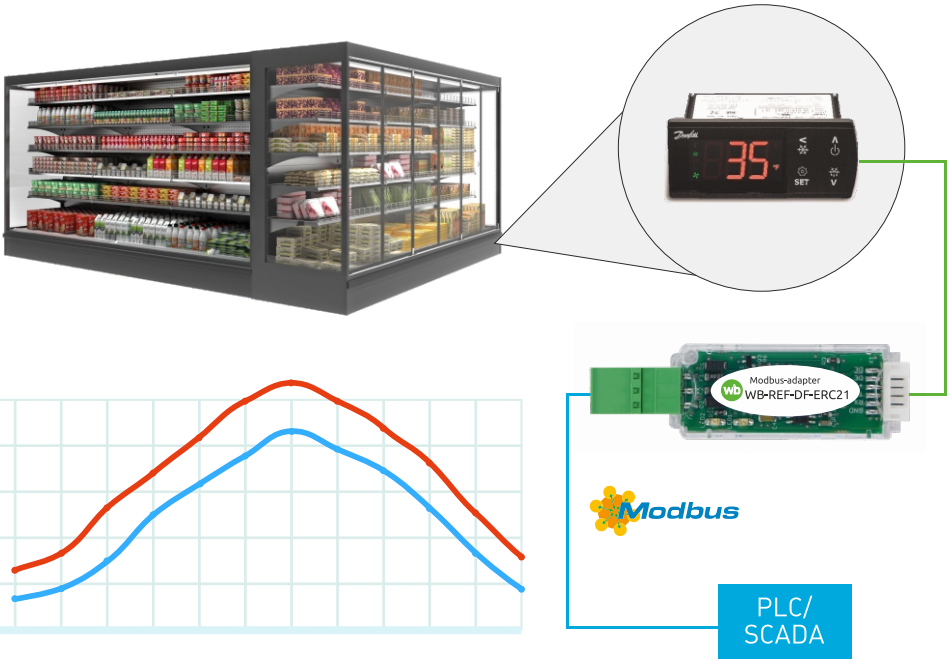

Backup power

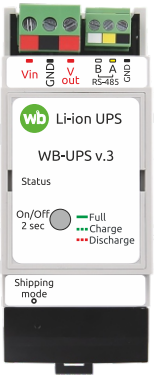


WB-UPS v.3

Lithium-ion battery uninterruptible power supply (2x18650)

- Operating ambient temperature: -20 to +45 °C
- Rated / peak power: 15 W / 20 W
- Backup time at 15 W load: 60 minutes
- Status indicator
- Power supply and batteries integrated in a single enclosure
- DIN rail housing

85 €

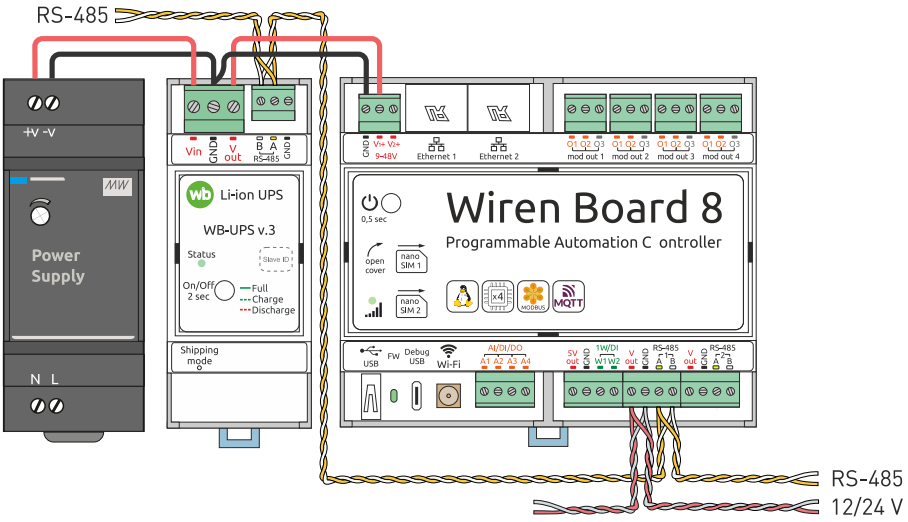

Example connection of the WB-UPS v.3 uninterruptible power supply

Industry and Agriculture



Remote Monitoring of Industrial Facilities

Many automation systems suffer from vendor lock-in and proprietary protocols.

Wiren Board equipment has an open architecture and is used by companies that operate within the paradigm of open standards and vendor independence.

The Wiren Board controller and modules enable low-level supervisory control of industrial facilities: they collect sensor and meter readings and transmit them to the server.

Greenhouse Automation and Vertical Farming



To get a plentiful harvest, plants require a precisely controlled microclimate, including temperature, humidity levels in the air and soil, light and CO2 concentration.

The Wiren Board controller is used to automate lighting and watering, control temperature and CO2 levels in vertical farming systems. The choice of Wiren Board equipment is driven by its reliability, flexible implementation and strong technical support.



Pharmaceutical Warehouse Climate Monitoring

Wiren Board equipment forms the backbone of the monitoring system used by pharmaceutical distributors to track storage and transportation conditions.

The system operates 24/7. In case of an emergency, responsible employees receive notifications.

A log of all sensor readings is saved, and if necessary, an audit of employee actions is available.

Residential and Commercial Real Estate



Remote Monitoring of Residential Complexes and Condominiums

Wiren Board equipment is used in townhouses and residential estates.

Wiren Board modules control the lighting of building facades, courtyards, and common areas. Depending on project needs, a Wiren Board controller is installed in each apartment or floor, where it manages lighting, power sockets and climate settings, monitors security, and collects utility meter readings.

Control of Bank Branch Infrastructure



Wiren Board controllers, I/O modules and sensors are used to monitor and manage building systems in 2,900 bank offices.

Our solution ensures a comfortable indoor climate and lighting.

Resource monitoring helps identify inefficiencies and cut utility costs by up to 30%.



Fast-Food Restaurant Telemetry

Telemetry of building services and equipment is an important part of the digitalization of the fast food industry. This growing trend not only enhances operational efficiency, but also reduces costs.

Wiren Board offers unique solutions for grocery and fast food retail automation, including climate sensors, energy meters, refrigeration controller cards, and high-power relay modules for lighting control. The Wiren Board controller runs an open operating system and provides extensive integration capabilities with third-party supervisory control platforms.

About us

Wiren Board is an international group of companies that designs and manufactures industrial automation and monitoring electronics. Since 2013, we have been developing reliable solutions for industrial and building automation. Our R&D department and production facilities are located in Astana and Yerevan.

Our mission is to make industrial automation more accessible for all customers by offering high-quality, flexible, and open solutions. Our core products include Linux-based controllers, I/O modules, sensors and meters supporting Modbus, Zigbee and Z-Wave protocols.

Wiren Board devices are used in both industrial and home automation. They monitor climate conditions in the data centers, supermarkets, offices, apartments and large residential complexes. Additionally our equipment operates in oil extraction sites and telecommunications infrastructure and industrial facilities, integrating seamlessly with various cloud platforms for remote control and monitoring. Today Wiren Board is a team of over 150 highly skilled professionals, including electronic engineers, software developers, QA specialists, and production engineers.

We manufacture hundreds of thousands of high-tech devices annually. To ensure the outstanding product quality we directly oversee, manage and perform all critical stages of the production process, from component sourcing and functional testing to final assembly. Every device undergoes rigorous individual testing using state-of-the-art automated equipment and fully complies with European and international standards.











Contacts

Automation Technologies, LLC
010017, Kazakhstan, Astana, Turan 11
+7 706 430 6619

Export sales department: info@wirenboard.com

November 2026

wirenboard.com/en