

Garden Room Roof

Roof construction
created on 30.7.2026

Thermal protection

$U = 0,12 \text{ W/(m}^2\text{K)}$

GEG 2020/24 Bestand*: $U < 0,24 \text{ W/(m}^2\text{K)}$



Moisture proofing

Dries 57 days

Condensate: 86 g/m^2




Heat protection

Temperature amplitude damping: 43

phase shift: 11,7 h

Thermal capacity inside: $37 \text{ kJ/m}^2\text{K}$

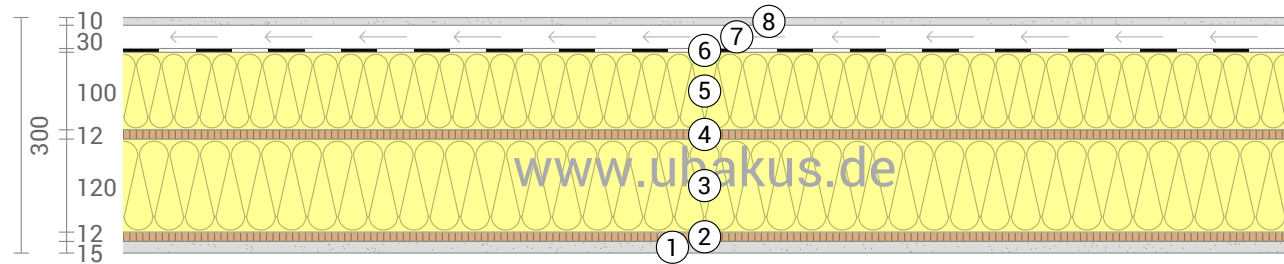

- ① Fermacell Powerpanel HD (15 mm)
- ② OSB-Platte (12 mm)
- ③ Rigid Foam, PUR (120 mm)
- ④ OSB-Platte (12 mm)

- ⑤ Therma™ TR27 Flachdachplatte (100 mm)
- ⑥ Foil, EPDM
- ⑦ Rear ventilated level (30 mm)
- ⑧ Aluminium (10 mm)

Bauteil im Ubakus-Editor bearbeiten

Klicken Sie auf unten stehende Schaltfläche oder scannen Sie den QR-Code um dieses Bauteil im Ubakus-Editor zu öffnen:

Edit calculation



Inside air : 20,0°C / 50%
Outside air: -5,0°C / 80%
Surface temperature.: 19,3°C / -4,9°C

sd-value: 45,1 m

Thickness: 30,0 cm
Weight: 66 kg/m²
Heat capacity: 51 kJ/m²K