

Garden Room Roof

Roof construction
created on 3.8.2026

Thermal protection

 $U = 0,13 \text{ W}/(\text{m}^2\text{K})$

GEG 2020/24 Bestand*: $U < 0,24 \text{ W}/(\text{m}^2\text{K})$


Moisture proofing

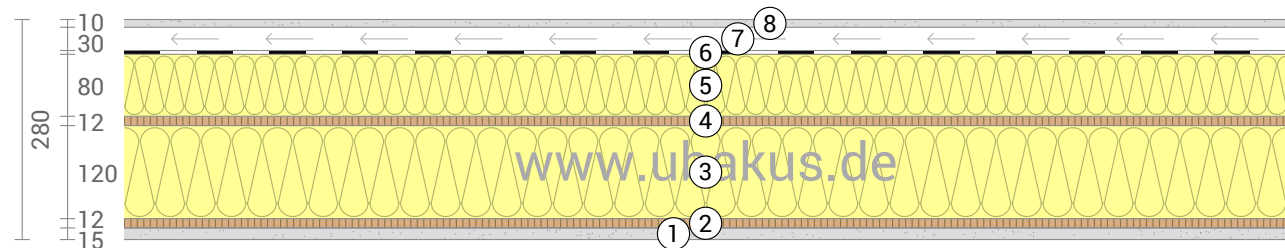
Dries 59 days

Condensate: 97 g/m²


Heat protection

Temperature amplitude damping: 35

phase shift: 11,3 h

Thermal capacity inside: 36 kJ/m²K


- ① Fermacell Powerpanel HD (15 mm)
- ② OSB-Platte (12 mm)
- ③ Rigid Foam, PUR (120 mm)
- ④ OSB-Platte (12 mm)

- ⑤ Therma™ TR27 Flachdachplatte (80 mm)
- ⑥ Foil, EPDM
- ⑦ Rear ventilated level (30 mm)
- ⑧ Aluminium (10 mm)

Bauteil im Ubakus-Editor bearbeiten

Klicken Sie auf unten stehende Schaltfläche oder scannen Sie den QR-Code um dieses Bauteil im Ubakus-Editor zu öffnen:

[Edit calculation](#)


Inside air : 20,0°C / 50%
Outside air: -5,0°C / 80%
Surface temperature.: 19,2°C / -4,9°C

sd-value: 43,7 m

Thickness: 28,0 cm
Weight: 65 kg/m²
Heat capacity: 50 kJ/m²K