


Prepare your live ISO USB


Go to [here](#) and pick your closest mirror to download the ISO, then burn into a USB. Plug your USB into computer and boot the live ISO, it will automatic login to install Arch, then follow the steps below to install your own [Arch Linux](#).

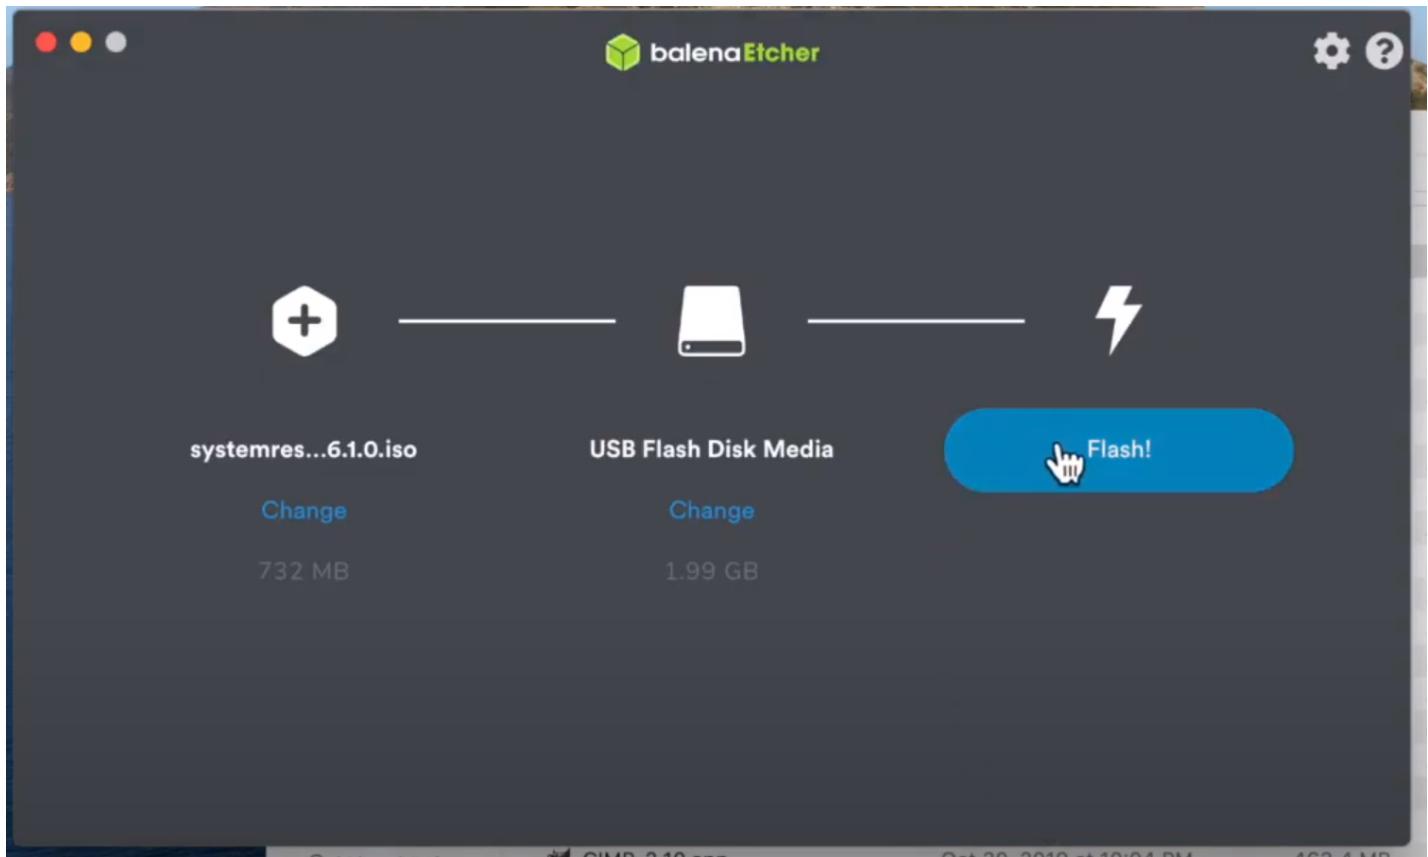

After that, reboot into your live ISO USB to continue the installation.


Use [VirtualBox](#) to boot live ISO


Actually, you can run the installation process inside [VirtualBox](#). Here is the step-by-step walk through:

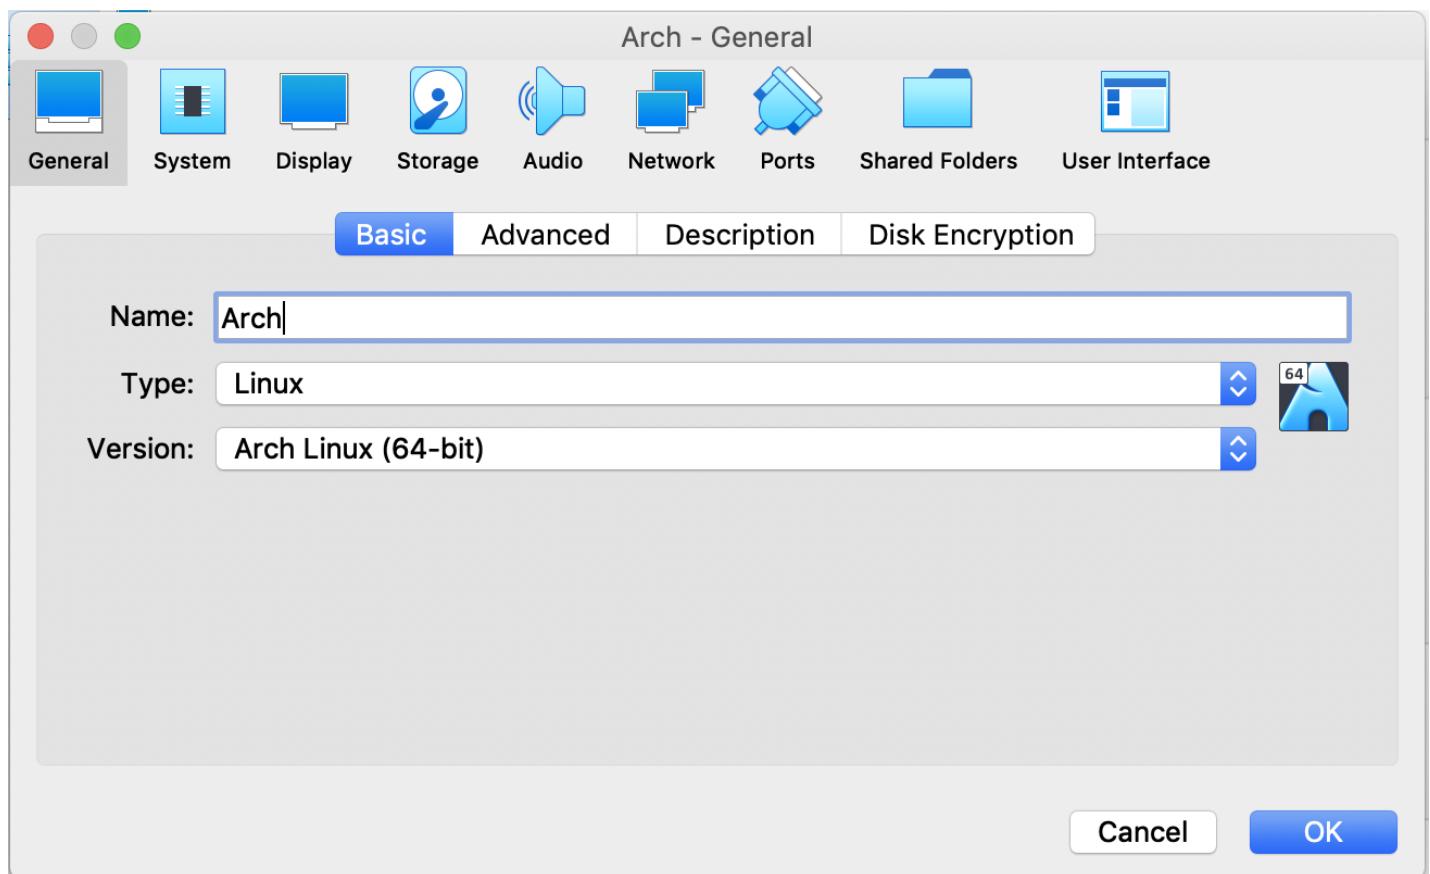


As you boot from the live ISO, so you don't any harddrive at all.


And make sure check the **Enable EFI!!!**

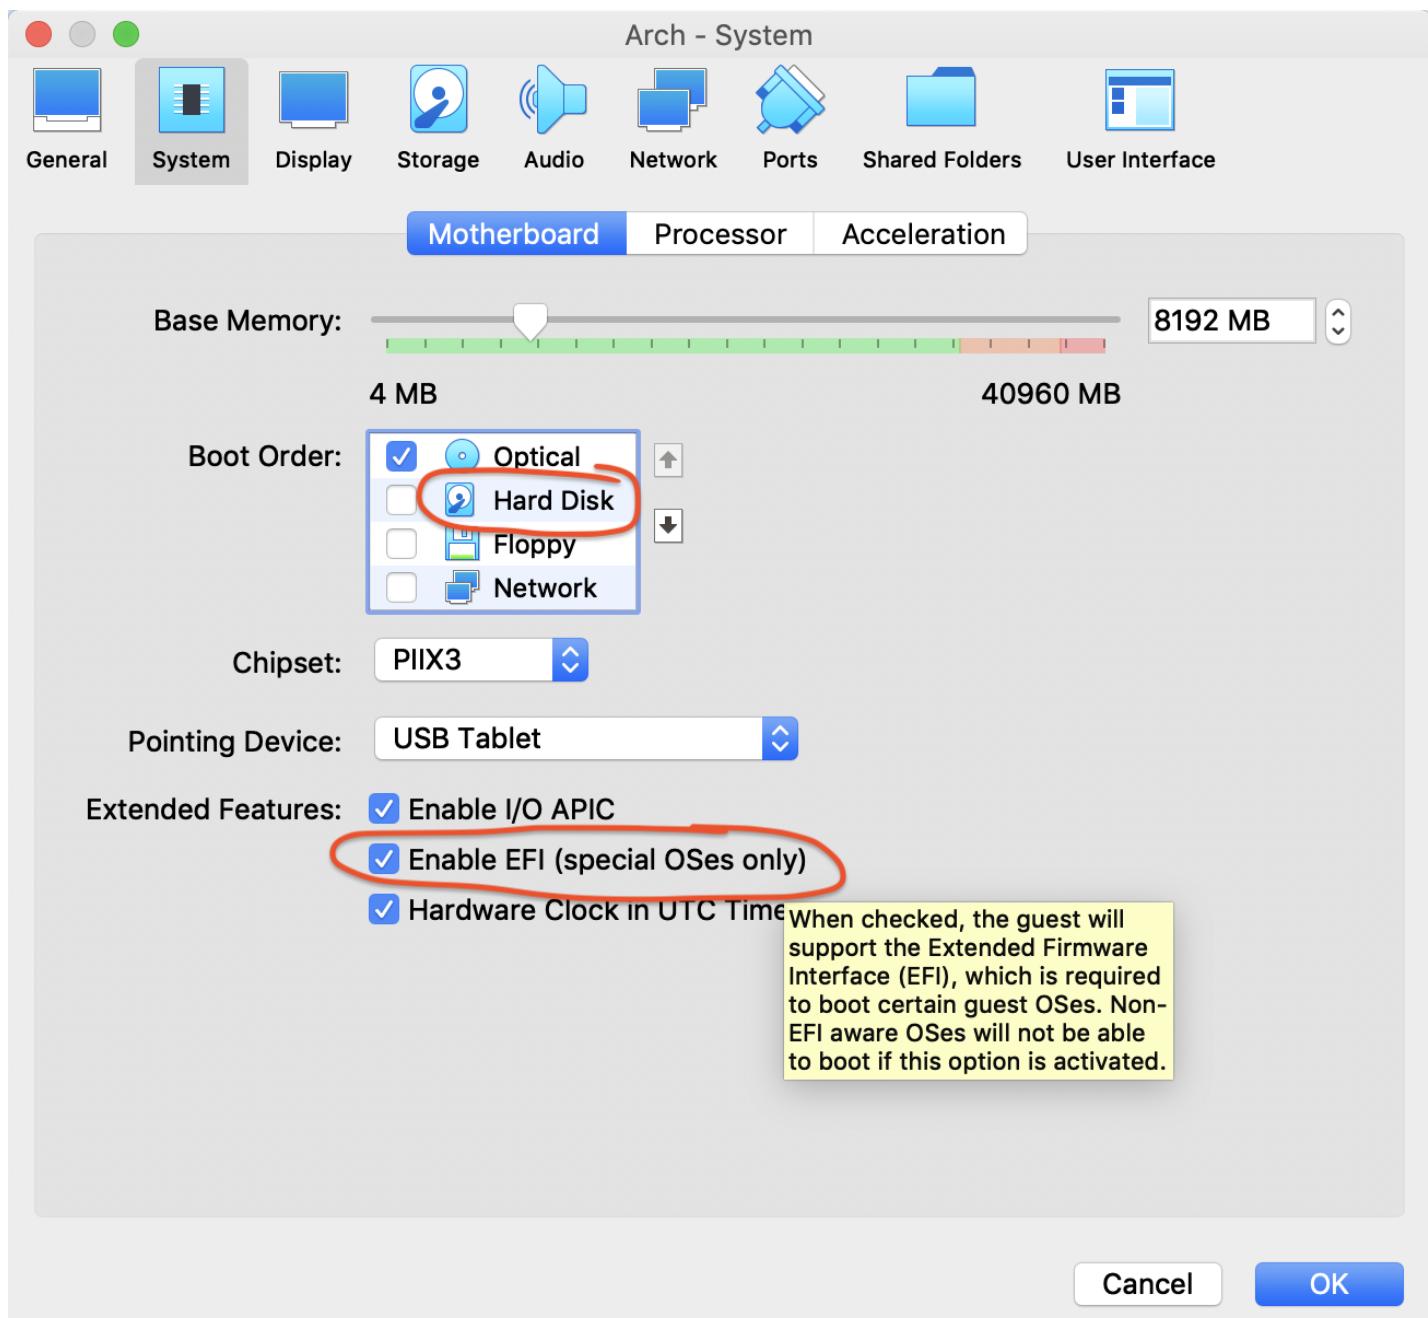

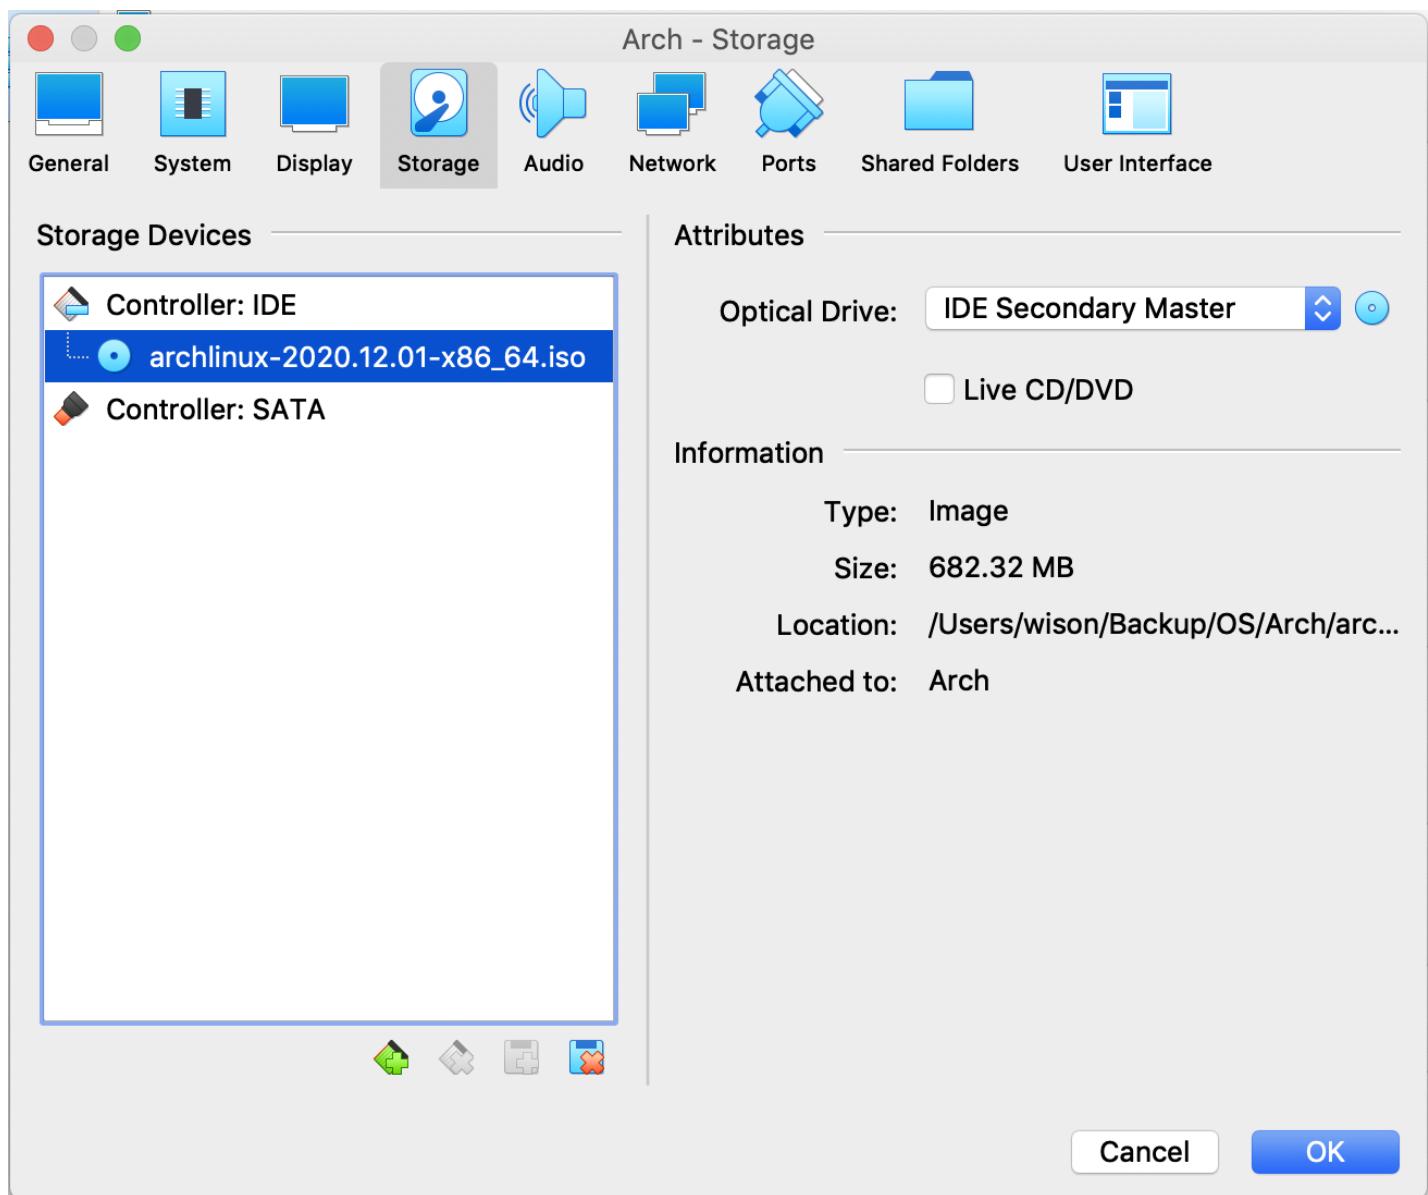


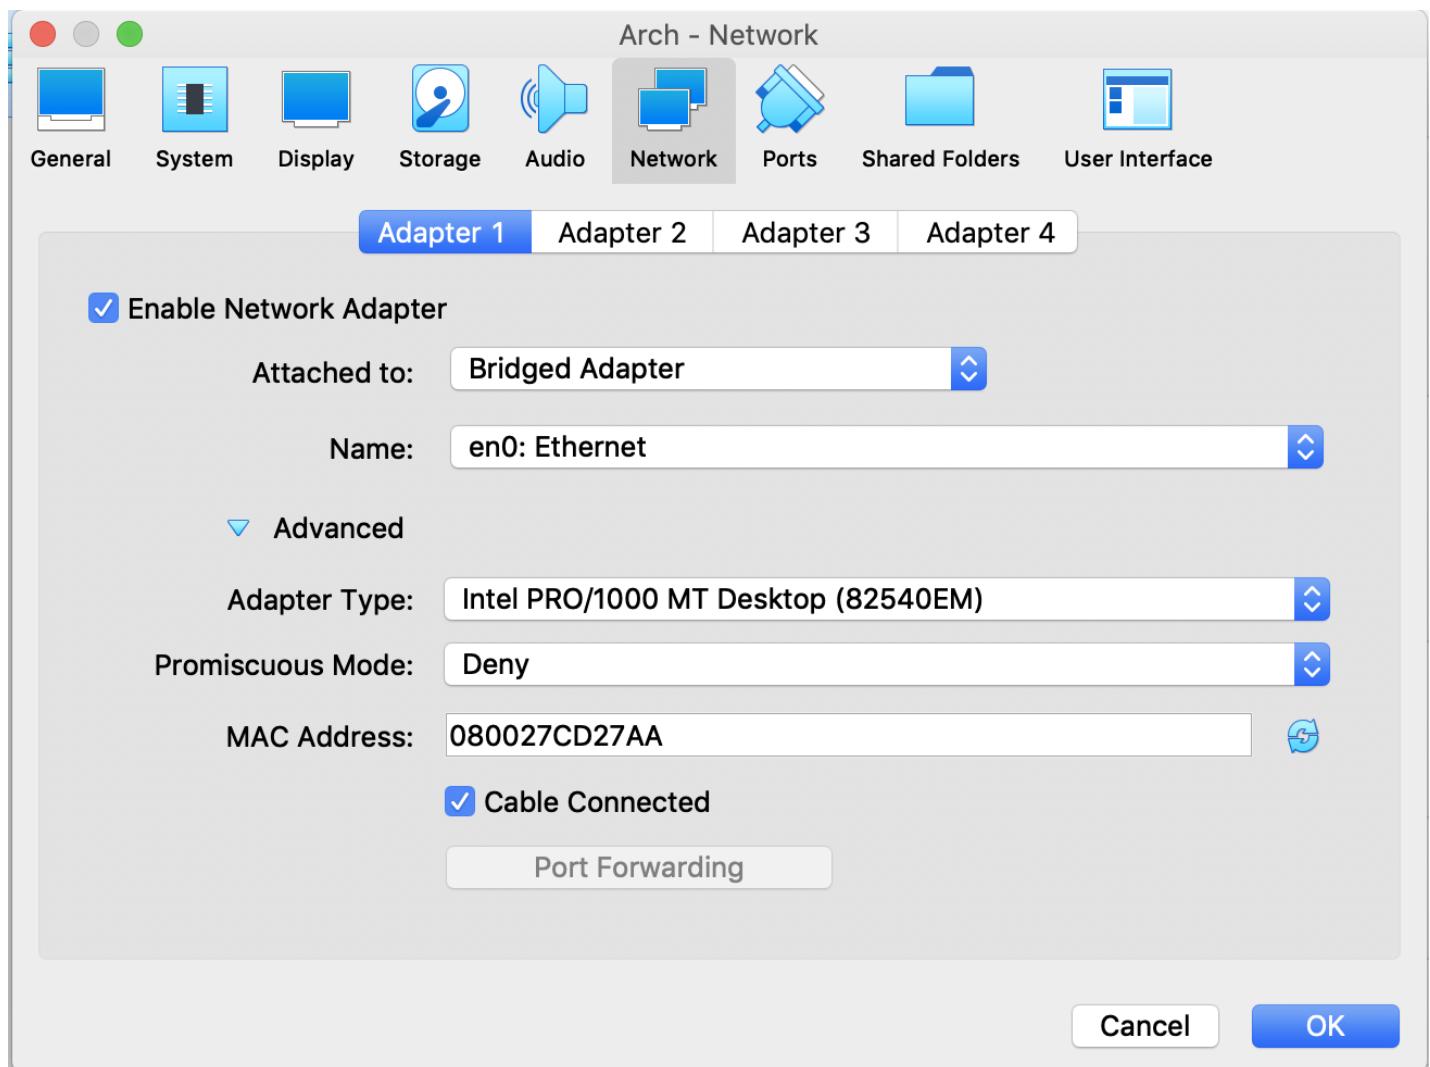



If you want to install to USB, add your USB here:

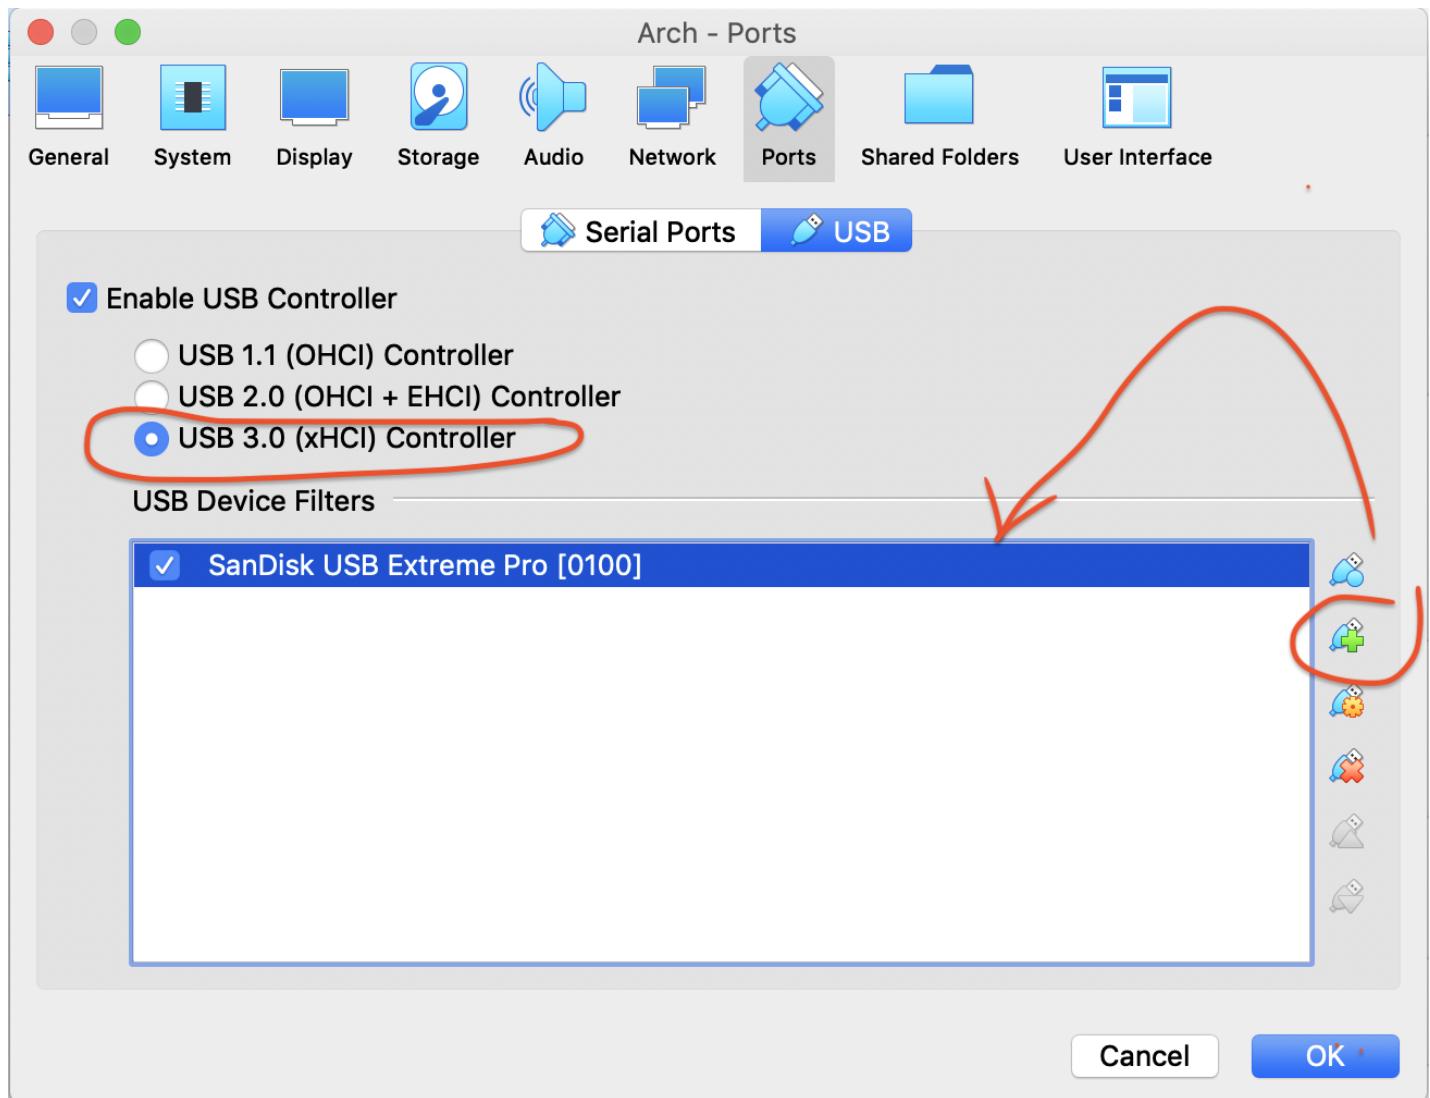

Now, you can run the virtual machine:

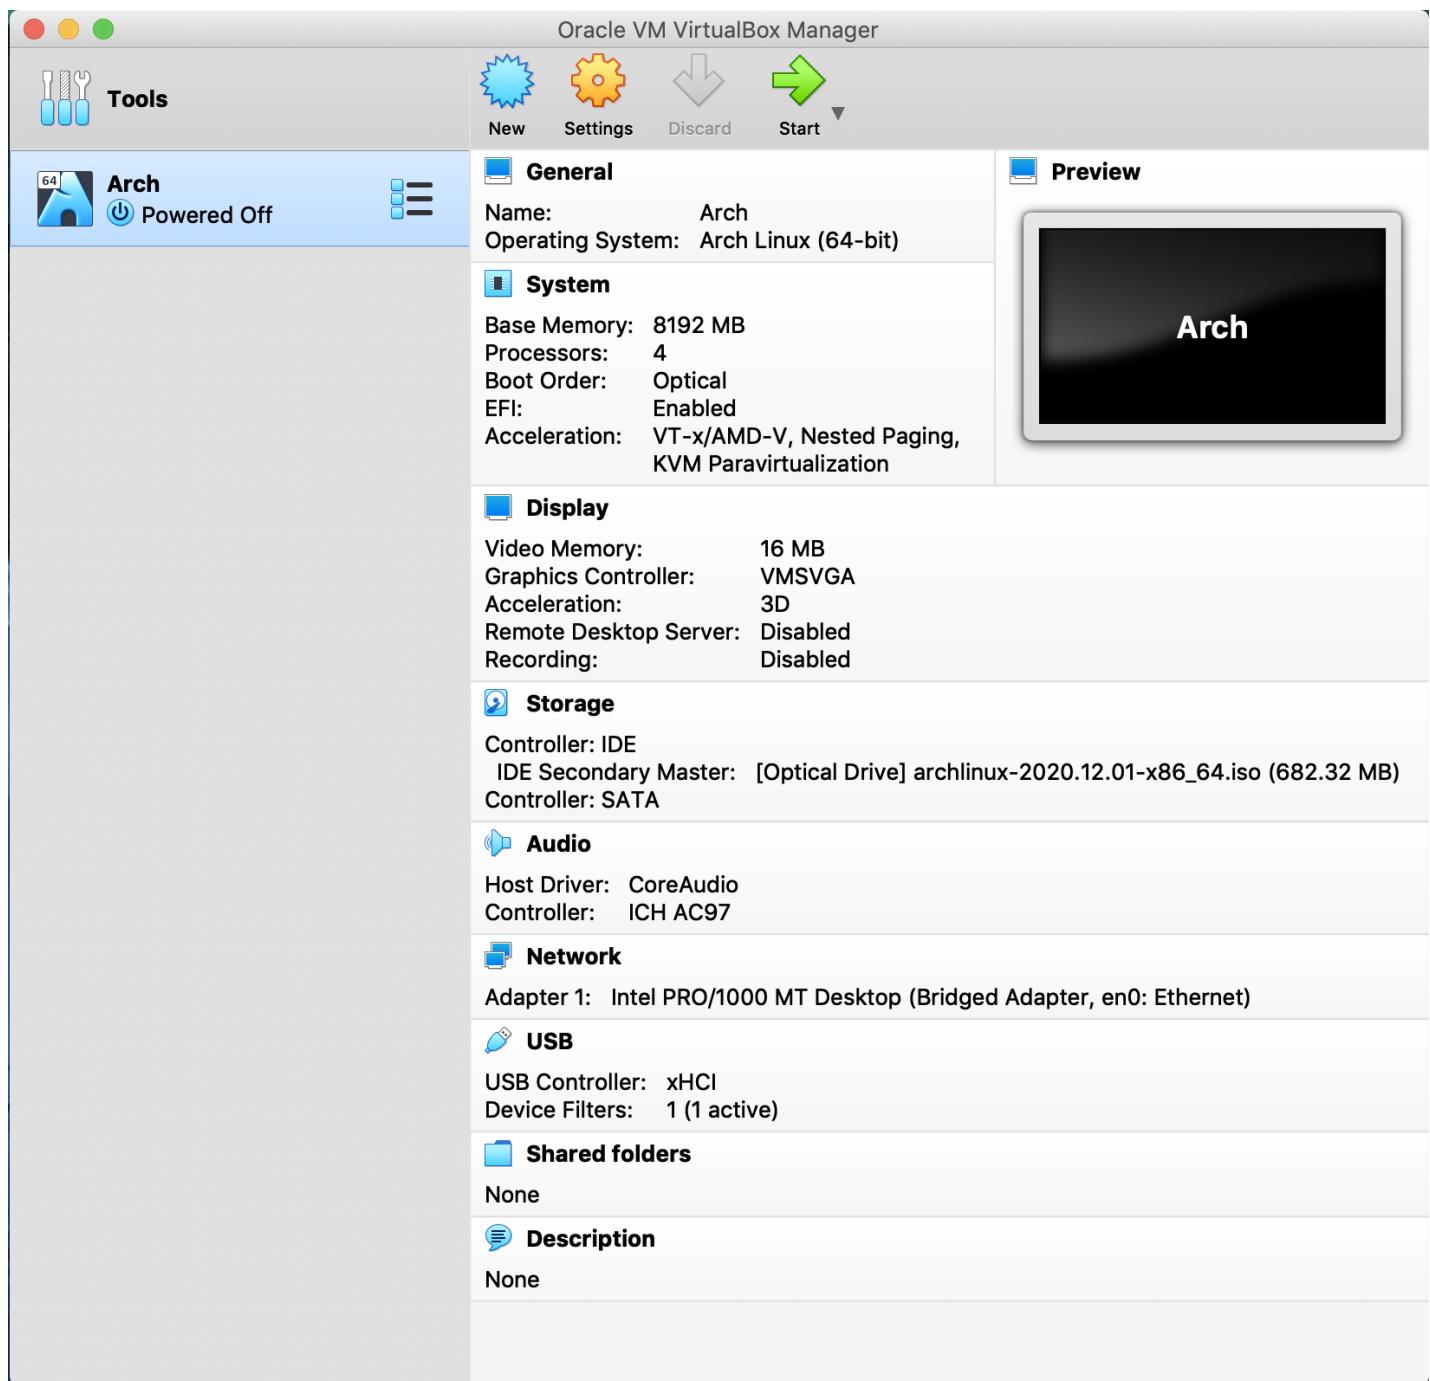

Of course, you can open this book side-by-side which is more easy to walk through step-by-step

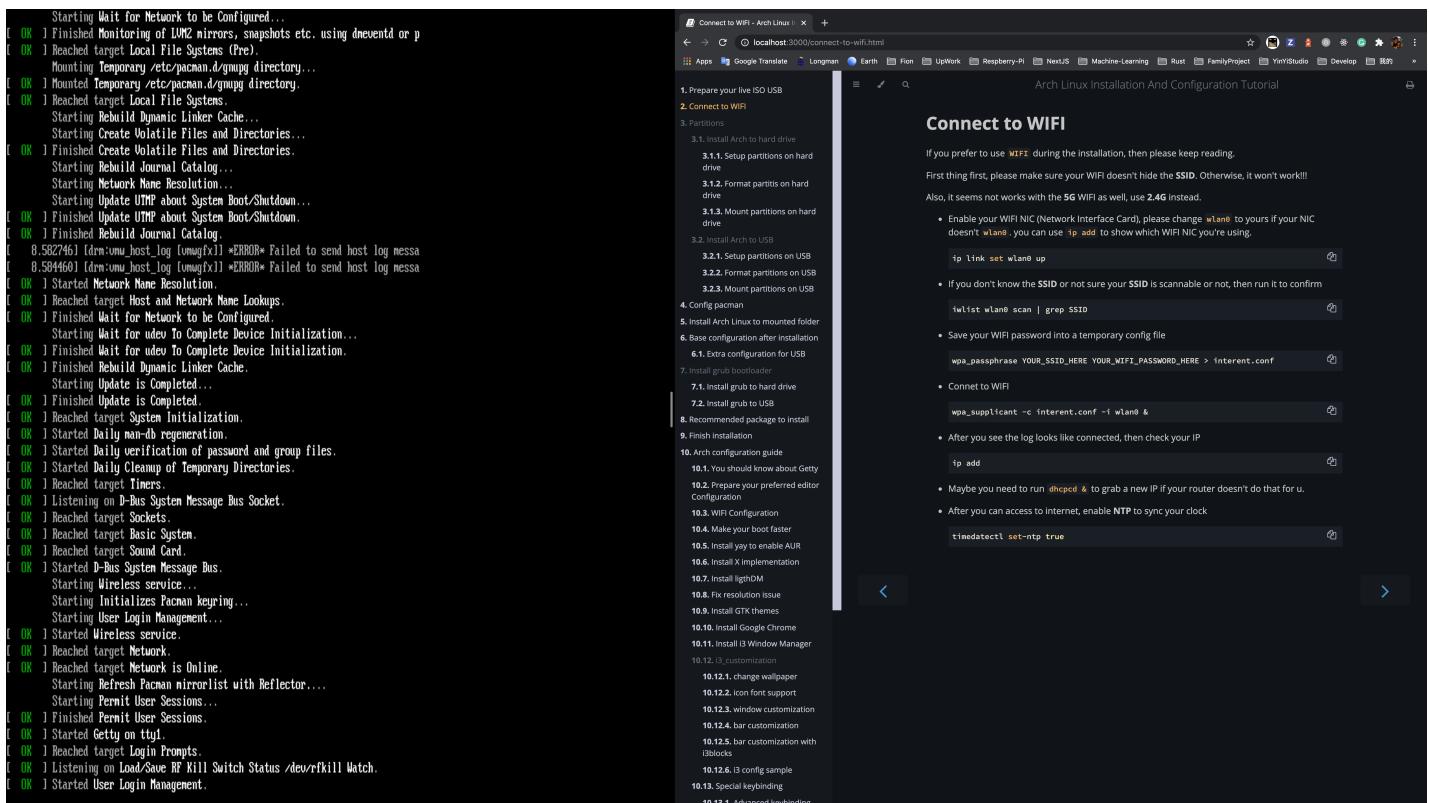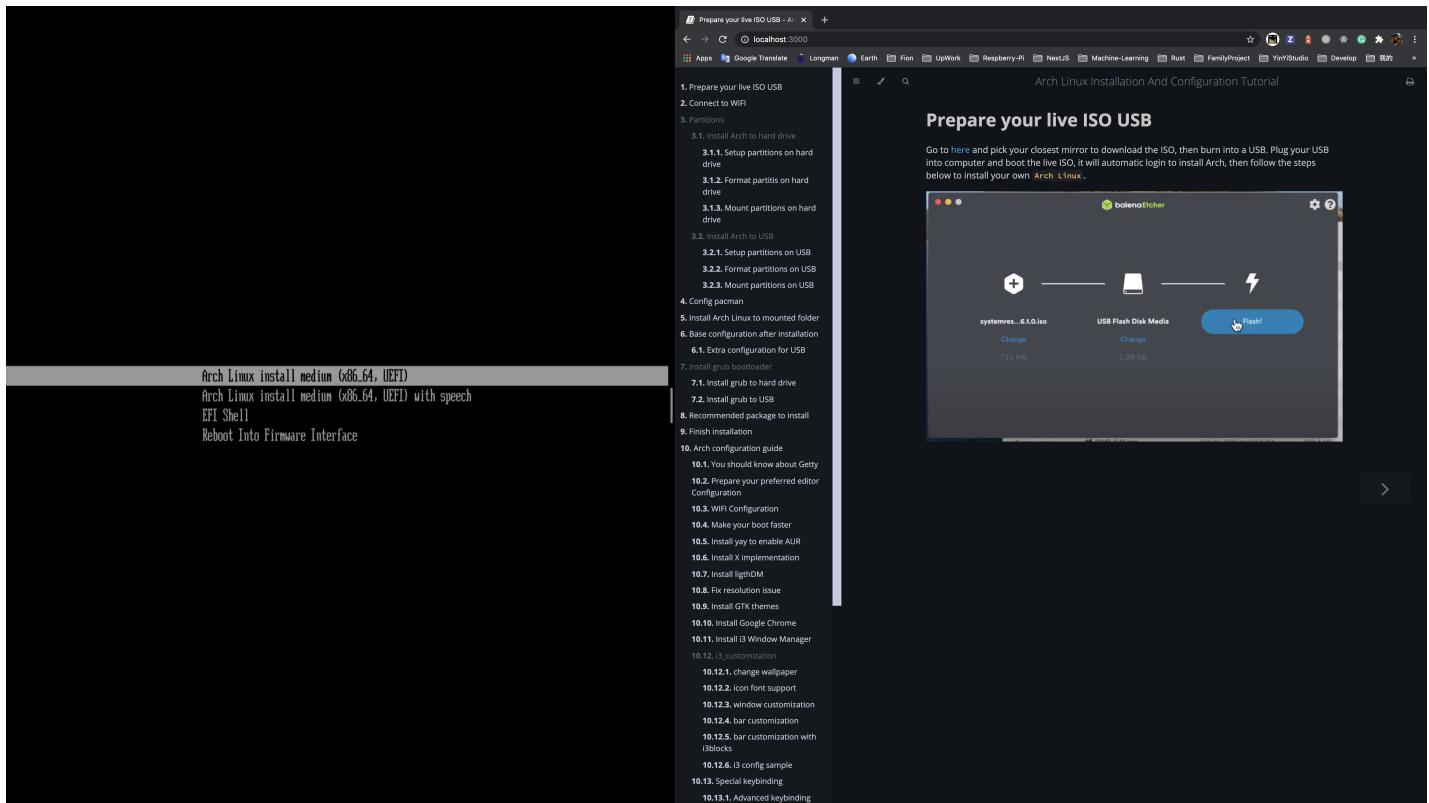

```
root@archiso - # fdisk /dev/sda -l
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250065376 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes * 512 bytes
I/O size (minimum/optimal): 512 bytes * 512 bytes
Disk identifier type: gpt
Disk identifier: 0C105395-1045-2345-0F25-0E32A0F4957D
root@archiso - # fdisk /dev/sda

Welcome to fdisk (util-linux 2.36.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250065376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes * 512 bytes
I/O size (minimum/optimal): 512 bytes * 512 bytes
Disklabel type: gpt
Disk identifier: 0C105395-1045-2345-0F25-0E32A0F4957D

Command (m for help):
```

Setup partitions on USB - Arch Linux Installation And Configuration Tutorial

Setup partitions on USB

If you want to install the entire Arch Linux on a portable USB drive, please keep reading.

- List your installation target disk by running `fdisk -l`. The following example supposes that your disk is `/dev/sdx`, change the X to your own one!!
- To confirm your `boot mode`:

```
ls /sys/firmware/efi/efivars
```

If the command shows the directory without error, then the system is booted in `UEFI` mode. If the directory does not exist, the system may be booted in `BIOS` (or `CSM`) mode.

- Detail about `BIOS` and `UEFI`

Basically, there are two different systems implemented today that motherboards use to communicate between an operating system and their firmware. There is the standard (legacy) `BIOS` (basic input/output system), and there is the newer `UEFI` (unified extensible firmware interface). Although `UEFI` was implemented on some top-end machines in the early 2000s, any computer more than six or seven years old is probably only going to be able to boot up in `BIOS` mode. Newer machines, on the other hand, will often be capable of booting in both `UEFI` mode and `BIOS` mode. Many times a preferred boot mode can be selected from the BIOS menu on such machines. Current Apple computers only recognize `UEFI`.

Both `BIOS` and `UEFI` require different particular partition schemes in order to boot. If the motherboard is set to boot in `UEFI` mode only and the inserted boot media does not have the correct partition scheme for `UEFI`, the boot will fail; the same goes for an attempted `BIOS` boot.

Connect to WiFi

If you prefer to use **WIFI** during the installation, then please keep reading.

First thing first, please make sure your WIFI doesn't hide the **SSID**. Otherwise, it won't work!!!

Also, the steps below seems not works with the **5G** WIFI if you use encrypted password, use **2.4G** instead.

For the **5G** network and hidden SSID, it works after you install **netctl**, plz read the details in **WIFI Configuration** chapter.

- Enable your WIFI NIC (Network Interface Card), please change `wlan0` to yours if your NIC doesn't `wlan0`. you can use `ip add` to show which WIFI NIC you're using.

```
ip link set wlan0 up
```

- If you don't know the **SSID** or not sure your **SSID** is scannable or not, then run it to confirm

```
iwlist wlan0 scan | grep SSID
```

- Save your WIFI password into a temporary config file

```
wpa_passphrase YOUR_SSID_HERE YOUR_WIFI_PASSWORD_HERE > interent.conf
```

- Connect to WIFI

```
wpa_supplicant -c interent.conf -i wlan0 &
```

- After you see the log looks like connected, then check your IP

```
ip add
```

- Maybe you need to run `dhcpcd &` to grab a new IP if your router doesn't do that for u.
- After you can access to internet, enable **NTP** to sync your clock

```
timedatectl set-ntp true
```

Setup partitions on hard drive

If you want to install the entire **Arch Linux** on any computer hard drive, please keep reading.

- List your installation target disk by running `fdisk -l`. The following example supposes that your disk is `/dev/sdX`, change the `X` to your own one!!!
- To confirm your **boot mode**:

```
ls /sys/firmware/efi/efivars
```

If the command shows the directory without error, then the system is booted in **UEFI** mode. If the directory does not exist, the system may be booted in **BIOS** (or **CSM**) mode.

- Detail about **BIOS** and **UEFI**

Basically, there are two different systems implemented today that motherboards use to communicate between an operating system and their firmware. There is the standard (legacy) **BIOS** (basic input/output system), and there is the newer **UEFI** (unified extensible firmware interface). Although **UEFI** was implemented on some top-end machines in the early 2000s, any computer more than six or seven years old is probably only going to be able to boot up in **BIOS** mode. Newer machines, on the other hand, will often be capable of booting in both **UEFI** mode and **BIOS** mode. Many times a preferred boot mode can be selected from the BIOS menu on such machines. Current Apple computers only recognize **UEFI**.

Both **BIOS** and **UEFI** require different particular partition schemes in order to boot. If the motherboard is set to boot in **UEFI** mode only and the inserted boot media does not have the correct partition scheme for **UEFI**, the boot will fail; the same goes for an attempted **BIOS** boot. This is one place I believe some of the USB installation guides out there fail: they often only describe how to create a USB boot device that uses only one mode. It is possible, however, to setup a USB drive that will have a partition scheme allowing it to boot in both modes and still use the same persistent installation of Linux. This guide will setup such a scheme in the partitioning and formatting sections below.

On most newer machines, you will be presented with the option to boot in either **BIOS** or **UEFI** mode from your bootable USB. This means the machine recognizes the **UEFI** boot media, but it does not always mean the machine is actually set to boot in **UEFI** mode, and selecting the **UEFI** boot option may fail. Selecting a mode that the motherboard is not set to boot in will not damage anything or touch any of the other drives on the machine, the boot will simply fail and one can reboot in the other mode. The USB stick created with this guide has been able to boot on every (about a dozen) desktop and laptop, new and old, **BIOS** and **UEFI**, machine that I have tried it on.

- Follow the steps below to setup your Arch Linux partition:
 - Run `fdisk /dev/sdX`
 - Delete all existing partitions

```
# First, make sure you use `d` to delete all existing partitions!!!
# First, make sure you use `d` to delete all existing partitions!!!
# First, make sure you use `d` to delete all existing partitions!!!
`d` // Untill all partitions are be deleted!
```

- Create new partition table

```
# As I confirmed my boot mode is **`UEFI`**, then I should use `GPT` partition.
# Press `g` to create a new empty `GPT` partition table, it will remove all your exists partitions.
# After pressing `g`, you should be able to see something like below:
#
# "Created a new GPT dislabel (GUID: xxxxxxxxxx)."
`g`
```

- Create **512MB** ESP (EFI System Partition) which will be mounted to **/boot** and hold the bootloader

```
`n`
`1` or just `Enter` to use partition no `1`
`Enter` to use the default start sector
`+512M` to set this partition size to `512MB`
# If success, you should see `Created a new partition 1 of type
`Linux filesystem` and of size 512 MiB.
```

- Create SWAP partition:

```
`n`
`3`, set this partition no to `3` rather than `2`, then when you print the partition table, it shows as the last partition which is more easy to read.
`Enter` to use the default start sector
`+8G` to use 8GB as SWAP, usually, should set to equal to your RAM amout or 1.5 time of your RAM amount.
# If success, you should see `Created a new partition 3 of type
`Linux filesystem` and of size 8 MiB.
```

- Finally, create the Linux root partition which will be mount to **/root**

```
`n`  
`Enter` to use partition no `2`  
`Enter` to use the default start sector  
`Enter` to use all the left spaces  
# If success, you should see 'Created a new partition 2 of type  
'Linux filesystem' and of size XXXX MiB.
```

- Then you can print the partition table by pressing **p** to have a look if you want
- The last step is press **w** to write all changes into the disk!!!

```
w
```

Format partitions on hard drive

```
# The boot partition has to be 'FAT' format  
mkfs.fat -F32 /dev/sdX1

# The root partition, we use 'EXT4' format  
mkfs.ext4 /dev/sdX2

# Swap partition  
mkswap /dev/sdX3

# Enable SWAP partition  
swapon /dev/sdX3
```

Mount partitions on hard drive

Before installing **Arch Liunx** to the hard drive, you need to mount the **Arch Linux root partition** and **Arch Linux boot partition**, then you can use **pacmanc** to install the newer Linux filesystem to the mounted folder.

You can run **fdisk -l /dev/sdX** to print the partition table again if you forgot.

```

mount /dev/sdX2 /mnt
mkdir /mnt/boot
mount /dev/sdX1 /mnt/boot

# You can `ls` to confirm
ls -lht /mnt/boot
ls -lht /mnt

# You can run `df -Th` to confirm both partitions are using the correct
format before you do the real installation.
df -Th | grep \/mnt
/dev/sdX2    ext4      /mnt
/dev/sdX1    vfat      /mnt/boot

```

Setup partitions on USB

If you want to install the entire **Arch Linux** on a portable USB driver, please keep reading.

- List your installation target disk by running **fdisk -l**. The following example supposes that your disk is **/dev/sdX**, change the **X** to your own one!!!
- To confirm your **boot mode**:

```
ls /sys/firmware/efi/efivars
```

If the command shows the directory without error, then the system is booted in **UEFI** mode. If the directory does not exist, the system may be booted in **BIOS** (or **CSM**) mode.

- Detail about **BIOS** and **UEFI**

Basically, there are two different systems implemented today that motherboards use to communicate between an operating system and their firmware. There is the standard (legacy) **BIOS** (basic input/output system), and there is the newer **UEFI** (unified extensible firmware interface). Although **UEFI** was implemented on some top-end machines in the early 2000s, any computer more than six or seven years old is probably only going to be able to boot up in **BIOS** mode. Newer machines, on the

other hand, will often be capable of booting in both **UEFI** mode and **BIOS** mode. Many times a preferred boot mode can be selected from the BIOS menu on such machines. Current Apple computers only recognize **UEFI**.

Both **BIOS** and **UEFI** require different particular partition schemes in order to boot. If the motherboard is set to boot in **UEFI** mode only and the inserted boot media does not have the correct partition scheme for **UEFI**, the boot will fail; the same goes for an attempted **BIOS** boot. This is one place I believe some of the USB installation guides out there fail: they often only describe how to create a USB boot device that uses only one mode. It is possible, however, to setup a USB drive that will have a partition scheme allowing it to boot in both modes and still use the same persistent installation of Linux. This guide will setup such a scheme in the partitioning and formatting sections below.

On most newer machines, you will be presented with the option to boot in either **BIOS** or **UEFI** mode from your bootable USB. This means the machine recognizes the **UEFI** boot media, but it does not always mean the machine is actually set to boot in **UEFI** mode, and selecting the **UEFI** boot option may fail. Selecting a mode that the motherboard is not set to boot in will not damage anything or touch any of the other drives on the machine, the boot will simply fail and one can reboot in the other mode. The USB stick created with this guide has been able to boot on every (about a dozen) desktop and laptop, new and old, **BIOS** and **UEFI**, machine that I have tried it on.

- Follow the steps below to setup your Arch Linux partition:

We will setup a USB which compatible with both **BIOS** and **UEFI**!!!

- Run **fdisk /dev/sdX**
- Delete all existing partitions

```
# First, make sure you use `d` to delete all existing partitions!!!
# First, make sure you use `d` to delete all existing partitions!!!
# First, make sure you use `d` to delete all existing partitions!!!
`d` // Untill all partitions are be deleted!
```

- Create new partition table

```
# As I confirmed my boot mode is **`UEFI`**, then I should use `GPT`  
partition.  
# Press `g` to create a new empty `GPT` partition table, it will  
remove all  
# your exists partitions.  
# After pressing `g`, you should be able to see something like  
below:  
#  
# "Created a new GPT dislabel (GUID: xxxxxxxxxx)."  
`g`
```

```
root@archiso ~ # fdisk /dev/sda

Welcome to fdisk (util-linux 2.36.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Command (m for help): d
Partition number (1-3, default 3):

Partition 3 has been deleted.

Command (m for help): d
Partition number (1,2, default 2):

Partition 2 has been deleted.

Command (m for help): d
Selected partition 1
Partition 1 has been deleted.

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 0C185395-1045-2345-8F25-8E32ADF4957D

Command (m for help): g
Created a new GPT disklabel (GUID: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69).

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69

Command (m for help):
```

- Create **10MB MBR** partition

```
`n`  
`1` or just `Enter` to use partition no `1`  
`Enter` to use the default start sector  
`+10M` to set this partition size to `10M`  
#  
# If success, you should see `Created a new partition 1 of type  
# `Linux filesystem` and of size 10 MiB.  
  
# If it asks you "Partition #X contains a YYYY signature, Do you  
want to  
# remove the signature", then press 'Y' to remove the previous  
partition  
# signature.  
#  
# We need to change the partition type from `Linux filesystem` to  
`BIOS BOOT`.  
# Before that you can press `l` to list all supported partition  
types:  
`t`  
`4`,  
  
# Finally, press `p` to confirm the result, it should look like this  
#  
# /dev/sdX1    (ignore the sector numbers there) 10M BIOS boot
```

```
Command (m for help): n
Partition number (1-128, default 1):
First sector (2048-250085342, default 2048):
Last sector, +/-sectors or +/-size{K,M,G,T,P} (2048-250085342, default 250085342): +10M

Created a new partition 1 of type 'Linux filesystem' and of size 10 MiB.
Partition #1 contains a vfat signature.

Do you want to remove the signature? [Y]es/[N]o: y

The signature will be removed by a write command.

Command (m for help): t
Selected partition 1
Partition type or alias (type L to list all): 4
Changed type of partition 'Linux filesystem' to 'BIOS boot'.

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69

Device      Start    End Sectors Size Type
/dev/sda1    2048   22527   20480  10M BIOS boot

Filesystem/RAID signature on partition 1 will be wiped.

Command (m for help):
```

- Create **512MB** ESP (EFI System Partition) which will be mounted to **/boot** and hold the bootloader

```

`n`
`2` or just `Enter` to use partition no `2`
`Enter` to use the default start sector
`+512M` to set this partition size to `512MB`
#
# If success, you should see `Created a new partition 2 of type
# `Linux filesystem` and of size 512 MiB.

# We need to change the partition type from `Linux filesystem` to
# `EFI System`. Before that you can press `l` to list all supported
# partition types:
`t`
`2` to make sure select the 512MB partition
`1` which means `EFI System`

# Finally, press `p` to confirm the result, it should look like this
#
# /dev/sdX1      (ignore the sector numbers there) 10M  BIOS boot
# /dev/sdX2      (ignore the sector numbers there) 512M  EFI System

```

```

Command (m for help): n
Partition number (2-128, default 2):
First sector (22528-250085342, default 22528):
Last sector, +/sectors or +/-size{K,M,G,T,P} (22528-250085342, default 250085342): +512M

Created a new partition 2 of type 'Linux filesystem' and of size 512 MiB.

Command (m for help): t
Partition number (1,2, default 2): 2
Partition type or alias (type L to list all): 1

Changed type of partition 'Linux filesystem' to 'EFI System'.

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69

Device      Start      End Sectors  Size Type
/dev/sda1    2048    22527   20480   10M  BIOS boot
/dev/sda2   22528  1071103 1048576 512M  EFI System

Filesystem/Raid signature on partition 1 will be wiped.

```

- Finally, create the linux root partition which will be mounted to **/** and hold the entire Linux system

```
`n`  

`3` or just `Enter` to use partition no `3`  

`Enter` to use the default start sector  

`Enter` to use all the left spaces  

# If success, you should see `Created a new partition 3 of type  

# `Linux filesystem` and of size XXXX GiB.  

# Finally, press `p` to confirm the result, it should look like this  

#  

# /dev/sdX1  (ignore the sector numbers there) 10M BIOS boot  

# /dev/sdX2  (ignore the sector numbers there) 512M EFI System  

# /dev/sdX3  (ignore the sector numbers there) XXXG Linux  

filesystem
```

```
Command (m for help): n
Partition number (3-128, default 3):
First sector (1071104-250085342, default 1071104):
Last sector, +/sectors or +/-size{K,M,G,T,P} (1071104-250085342, default 250085342):

Created a new partition 3 of type 'Linux filesystem' and of size 118.7 GiB.

Command (m for help): p
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69

Device      Start      End    Sectors   Size Type
/dev/sda1    2048    22527    20480    10M BIOS boot
/dev/sda2    22528  1071103   1048576   512M EFI System
/dev/sda3  1071104 250085342 249014239 118.7G Linux filesystem

Filesystem/Raid signature on partition 1 will be wiped.

Command (m for help): w
The partition table has been altered.
Calling ioctl() to re-read partition table.
Syncing disks.

root@archiso ~ # _
```

- The last step is press **w** to write all changes into the disk!!!

```
`w`
```

Format partitions on USB

Do not format the **/dev/sdX1** partition. This is the **BIOS/MBR** partition!!!

Do not format the **/dev/sdX1** partition. This is the **BIOS/MBR** partition!!!

Do not format the **/dev/sdX1** partition. This is the **BIOS/MBR** partition!!!

```
# List block device, can help you to type correctly.  
lsblk  
  
# The `EFI` boot partition has to be `FAT` format  
mkfs.fat -F32 /dev/sdX2  
  
# The root partition, we use `EXT4` format  
mkfs.ext4 /dev/sdX3
```

```

root@archiso ~ # fdisk /dev/sda -l
Disk /dev/sda: 119.25 GiB, 128043712512 bytes, 250085376 sectors
Disk model: Extreme Pro
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 177BAE3B-6B1B-B34B-A4D1-CE2175AF9B69

Device      Start      End    Sectors   Size Type
/dev/sda1    2048    22527    20480    10M BIOS boot
/dev/sda2    22528  1071103   1048576   512M EFI System
/dev/sda3  1071104 250085342 249014239 118.7G Linux filesystem
root@archiso ~ # lsblk
NAME  MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
loop0  7:0      0 559.5M  1 loop /run/archiso/sfs/airootfs
sda    8:0      1 119.3G  0 disk 
└─sda1  8:1      1    10M  0 part 
└─sda2  8:2      1    512M 0 part 
└─sda3  8:3      1 118.7G 0 part 
sr0    11:0     1 682.3M 0 rom  /run/archiso/bootmnt
root@archiso ~ # mkfs.fat -F32 /dev/sda2
mkfs.fat 4.1 (2017-01-24)
root@archiso ~ #
root@archiso ~ # mkfs.ext4 /dev/sda3
mke2fs 1.45.6 (20-Mar-2020)
Creating filesystem with 31126779 4k blocks and 7782400 inodes
Filesystem UUID: 5533cb44-1bfc-4302-9c1a-7f37e6e38397
Superblock backups stored on blocks:
      32768, 98304, 163840, 229376, 294912, 819200, 884736, 1605632, 2654208,
     4096000, 7962624, 11239424, 20480000, 23887872

Allocating group tables: done
Writing inode tables: done
Creating journal (131072 blocks): done
Writing superblocks and filesystem accounting information: done

root@archiso ~ #

```

Mount partitions on USB

Before installing **Arch Liunx** to the USB, you need to mount the **Arch Linux root partition** and **Arch Linux boot partition**, then you can use **pacmanc** to install the newer Linux filesystem to the mounted folder.

You can run **fdisk -l /dev/sdX** to print the partition table again if you forgot.

```

mount /dev/sdX3 /mnt
mkdir /mnt/boot
mount /dev/sdX2 /mnt/boot

# You can `ls` to confirm
ls -lht /mnt/boot
ls -lht /mnt

# You can run `df -Th` to confirm both partitions are using the correct
format before you do the real installation.
df -Th | grep \/mnt
/dev/sdX3    ext4      /mnt
/dev/sdX2    vfat      /mnt/boot

```

```

root@archiso ~ # mount /dev/sda3 /mnt
root@archiso ~ # mkdir /mnt/boot
root@archiso ~ # mount /dev/sda2 /mnt/boot
root@archiso ~ # ll /mnt/boot
total 0
root@archiso ~ # ll /mnt
total 20
drwxr-xr-x 2 root root 4096 Jan  1 1970 boot
drwx----- 2 root root 16384 Dec 22 01:21 lost+found
root@archiso ~ #
root@archiso ~ # df -Th | grep \/mnt
/dev/sda3    ext4      117G   61M  111G   1% /mnt
/dev/sda2    vfat     511M  4.0K  511M   1% /mnt/boot
root@archiso ~ #

```

Config pacman

- Enable the **Color** output

```
vim /etc/pacman.conf
```

```
# Search and enable `Color` line, save and exit
```

- Setup mirror

Open [mirror list](#) to search your native country and click on it, you should be able to see the **Mirror URL**. In this tutorial, I just pick **New Zealand** as an example.

It looks like this:

```
# Make sure to copy your country mirror URL here
http://mirror.fsmg.org.nz/archlinux/
https://mirror.fsmg.org.nz/archlinux/
http://mirror.smith.geek.nz/archlinux/
https://mirror.smith.geek.nz/archlinux/
```

Then `vim /etc/pacman.d/mirrorlist` and replace all contents with the below settings:

```
# Make sure change to your country mirror URL!!!
# The syntax looks like below:
#
# Server = YOUR_MIRROR_URL/$repo/os/$arch

# New Zealand
Server = http://mirror.fsmg.org.nz/archlinux/$repo/os/$arch
Server = https://mirror.fsmg.org.nz/archlinux/$repo/os/$arch
Server = http://mirror.smith.geek.nz/archlinux/$repo/os/$arch
Server = https://mirror.smith.geek.nz/archlinux/$repo/os/$arch
```

Install Arch Linux to mounted folder

Keep in mind that:

The current **Arch Linux** you've already login is boot from the **Live ISO**, it just a **tool** for you to install another brand new **Arch Linux** to your hard drive or USB which located at `/mnt` and `/mnt/boot`.

That means there will be an entirely brand new **Arch Linux** in your `/mnt` folder!!!

Now, use the **pacstrap(8)** script to install the base package, Linux kernel and firmware for common hardware:

```
# `/mnt` is where all packages will be installed to!!!
pacstrap /mnt base linux linux-firmware
```

```
Not setting net/ipv4/conf/all/rp_filter (explicit setting exists).
Not setting net/ipv4/conf/default/rp_filter (explicit setting exists).
Not setting net/ipv4/conf/all/accept_source_route (explicit setting exists).
Not setting net/ipv4/conf/default/accept_source_route (explicit setting exists).
Not setting net/ipv4/conf/all/promote_secondaries (explicit setting exists).
Not setting net/ipv4/conf/default/promote_secondaries (explicit setting exists).
( 6/12) Creating temporary files...
( 7/12) Reloading device manager configuration...
Running in chroot, ignoring request.
( 8/12) Arming ConditionNeedsUpdate...
( 9/12) Rebuilding certificate stores...
(10/12) Updating module dependencies...
(11/12) Updating linux initcpios...
==> Building image from preset: /etc/mkinitcpio.d/linux.preset: 'default'
 -> -k /boot/vmlinuz-linux -c /etc/mkinitcpio.conf -g /boot/initramfs-linux.img
==> Starting build: 5.9.14-arch1-1
 -> Running build hook: [base]
 -> Running build hook: [udev]
 -> Running build hook: [autodetect]
 -> Running build hook: [modconf]
 -> Running build hook: [block]
==> WARNING: Possibly missing firmware for module: xhci_pci
 -> Running build hook: [filesystems]
 -> Running build hook: [keyboard]
 -> Running build hook: [fsck]
==> Generating module dependencies
==> Creating gzip-compressed initcpio image: /boot/initramfs-linux.img
==> Image generation successful
==> Building image from preset: /etc/mkinitcpio.d/linux.preset: 'fallback'
 -> -k /boot/vmlinuz-linux -c /etc/mkinitcpio.conf -g /boot/initramfs-linux-fallback.img -S autodetect
==> Starting build: 5.9.14-arch1-1
 -> Running build hook: [base]
 -> Running build hook: [udev]
 -> Running build hook: [modconf]
 -> Running build hook: [block]
==> WARNING: Possibly missing firmware for module: aic94xx
==> WARNING: Possibly missing firmware for module: wd719x
==> WARNING: Possibly missing firmware for module: xhci_pci
 -> Running build hook: [filesystems]
 -> Running build hook: [keyboard]
 -> Running build hook: [fsck]
==> Generating module dependencies
==> Creating gzip-compressed initcpio image: /boot/initramfs-linux-fallback.img
==> Image generation successful
(12/12) Reloading system bus configuration...
Running in chroot, ignoring command 'try-reload-or-restart'
pacstrap /mnt base linux linux-firmware 22.29s user 7.74s system 35% cpu 1:23.92 total
root@archiso ~ #
```

```
root@archiso ~ # ll /mnt
total 72
lrwxrwxrwx 1 root root    7 Sep  2 22:30 bin -> usr/bin
drwxr-xr-x 2 root root 4096 Jan  1 1970 boot
drwxr-xr-x 2 root root 4096 Dec 22 01:30 dev
drwxr-xr-x 34 root root 4096 Dec 22 01:31 etc
drwxr-xr-x 2 root root 4096 Sep  2 22:30 home
lrwxrwxrwx 1 root root    7 Sep  2 22:30 lib -> usr/lib
lrwxrwxrwx 1 root root    7 Sep  2 22:30 lib64 -> usr/lib
drwx----- 2 root root 16384 Dec 22 01:21 lost+found
drwxr-xr-x 2 root root 4096 Sep  2 22:30 mnt
drwxr-xr-x 2 root root 4096 Sep  2 22:30 opt
dr-xr-xr-x 2 root root 4096 Dec 22 01:30 proc
drwxr-x--- 3 root root 4096 Dec 22 01:31 root
drwxr-xr-x 2 root root 4096 Dec 22 01:30 run
lrwxrwxrwx 1 root root    7 Sep  2 22:30 sbin -> usr/bin
drwxr-xr-x 4 root root 4096 Dec 22 01:31 srv
dr-xr-xr-x 2 root root 4096 Dec 22 01:30 sys
drwxrwxrwt 2 root root 4096 Dec 22 01:30 tmp
drwxr-xr-x 8 root root 4096 Dec 22 01:31 usr
drwxr-xr-x 12 root root 4096 Dec 22 01:31 var
root@archiso ~ #
```

After that, generate the `fstab` file, the `-U` flag means use **UUID** to identify the device.

As if you're installing to the USB, then the USB will be plugged into a different machine which causes different `/dev/XXX` labels.

```
genfstab -U /mnt >> /mnt/etc/fstab
```

```
root@archiso ~ # genfstab -U /mnt >> /mnt/etc/fstab
root@archiso ~ #
root@archiso ~ # cat /mnt/etc/fstab
# Static information about the filesystems.
# See fstab(5) for details.

# <file system> <dir> <type> <options> <dump> <pass>
# /dev/sda3
UUID=5533cb44-1bfc-4302-9c1a-7f37e6e38397      /
          ext4        rw,relatime   0 1

# /dev/sda2
UUID=9F6B-FA2D      /boot      vfat        rw,relatime,fmask=0022,dmask=0022,codepage=437,iocharset=iso8859-1,short
name=mixed(utf8,errors=remount-ro)
```

Base configuration after installation

Keep in mind that:

The current **Arch Linux** you've already login is boot from the **Live ISO**, it just a **tool** for you to install another brand new **Arch Linux** to your hard drive or USB which located at **/mnt** and **/mnt/boot**.

Right now, you need to config the newer **Arch Linux** you just installed, that's why you need to use **arch-chroot** to change linux root environment into the **/mnt** folder!!!

After running **arch-chroot** command, you will be inside the newly installed **Arch Linux**.

- Change root into the new **Arch Linux**

```
arch-chroot /mnt
```

- Choose timezone

```
# ln -sf /usr/share/zoneinfo/YOUR_REGION/YOUR_CITY /etc/localtime  
  
# For example:  
ln -sf /usr/share/zoneinfo/Pacific/Auckland /etc/localtime
```

- Generate **/etc/adjtime**

```
hwclock --systohc
```

- Sync **pacman** and install **vim**

Before we continue, we need to install **vim** for the newer installed **Arch Linux**, then we can edit any configuration file.

In the newer installed **Arch Linux**, the **/etc/pacman.d/mirrorlist** should be copied from the **Live Arch**, we can confirm that by running:

```
cat /etc/pacman.d/mirrorlist
```

```
[root@archiso ~]# cat /etc/pacman.d/mirrorlist
#####
##### Arch Linux mirrorlist generated by Reflector #####
#####

# With:      reflector @/etc/xdg/reflector/reflector.conf
# When:     2020-12-22 00:58:21 UTC
# From:      https://www.archlinux.org/mirrors/status/json/
# Retrieved: 2020-12-22 00:57:46 UTC
# Last Check: 2020-12-22 00:23:49 UTC

# New Zealand
Server = http://mirror.fsmg.org.nz/archlinux/$repo/os/$arch
Server = https://mirror.fsmg.org.nz/archlinux/$repo/os/$arch
Server = http://mirror.smith.geek.nz/archlinux/$repo/os/$arch
Server = https://mirror.smith.geek.nz/archlinux/$repo/os/$arch
[root@archiso ~]#
```

Then sync the `pacman` database and make sure it's up-to-date:

```
[root@archiso ~]# pacman -Syu
:: Synchronizing package databases...
core is up to date
extra is up to date
community is up to date
:: Starting full system upgrade...
    there is nothing to do
[root@archiso ~]#
```

Then, let's do `pacman -S vim`:

```
[root@archiso ~]# pacman -S vim
resolving dependencies...
looking for conflicting packages...

Packages (3) gpm-1.20.7.r38.ge82d1a6-3  vim-runtime-8.2.1989-3  vim-8.2.1989-3

Total Download Size:  8.22 MiB
Total Installed Size: 34.03 MiB

:: Proceed with installation? [Y/n]
:: Retrieving packages...
gpm-1.20.7.r38.ge82d1a6-3-x86_64          140.5 KiB  4.58 MiB/s 00:00  [#####
vim-runtime-8.2.1989-3-x86_64            6.4 MiB   51.7 MiB/s 00:00  [#####
vim-8.2.1989-3-x86_64                  1766.2 KiB  57.5 MiB/s 00:00  [#####
(3/3) checking keys in keyring
(3/3) checking package integrity
(3/3) loading package files
(3/3) checking for file conflicts
(3/3) checking available disk space
:: Processing package changes...
(1/3) installing vim-runtime
Optional dependencies for vim-runtime
    sh: support for some tools and macros [installed]
    python: demoserver example tool
    gawk: mve tools upport [installed]
(2/3) installing gpm
(3/3) installing vim
Optional dependencies for vim
    python2: Python 2 language support
    python: Python 3 language support
    ruby: Ruby language support
    lua: Lua language support
    perl: Perl language support
    tcl: Tcl language support
:: Running post-transaction hooks...
(1/2) Reloading system manager configuration...
Running in chroot, ignoring command 'daemon-reload'
(2/2) Arming ConditionNeedsUpdate...
[root@archiso ~]# _
```

Enable the `color`:

```
vim /etc/pacman.conf

# Search and enable `Color` line, save and exit
```

- Localization

`vim /etc/locale.gen` and uncomment `en_US.UTF-8 UTF-8` line and other needed `locales`.

```
#en_SG ISO-8859-1
en_US.UTF-8 UTF-8
#en_US ISO-8859-1
```

Then, generate the locale settings:

```
locale-gen
```

```
[root@archiso ~]# locale-gen
Generating locales...
en_US.UTF-8... done
Generation complete.
[root@archiso ~]# _
```

`echo "LANG=en_US.UTF-8" > /etc/locale.conf`:

```
[root@archiso ~]# echo "LANG=en_US.UTF-8" > /etc/locale.conf
[root@archiso ~]# cat /etc/locale.conf
LANG=en_US.UTF-8
[root@archiso ~]# _
```

`vim /etc/vconsole.conf` and add your custom keybinding (if needed):

```
# Add my custom settings below (`Caps_Lock` works like `Escape`) to
# `/etc/vconsole.conf`.
# Save and exit.

KEYMAP=us
keycode 9 = Escape
keycode 66 = Escape
```

Change to `KEYMAP=colemak` if you use `colemak` keyboard layout!!!

- Hostname and host settings
 - `vim /etc/hostname`, set to your hostname.
 - `vim /etc/hosts` with the base settings like below:

```
127.0.0.1      localhost
::1            localhost
127.0.1.1      YOUR_HOSTNAME_HERE.localdomain  YOUR_HOSTNAME_HERE
```

- Set root password

```
passwd
```

Extra configuration for USB

- RAM disk image

In order to boot the Linux Kernel persistently off of a USB device, some adjustments may be necessary to the initial RAM disk image. We need to ensure that block device support is properly loaded before any attempt at loading the filesystem. This is not always the way a RAM disk image is configured in a generic Linux installation, and I suspect this may one of the failure points in other Linux USB installations out there.

So we need to make some changes to `/etc/mkinitcpio.conf`:

```
# Editr the config
vim /etc/mkinitcpio.conf

# And ensure the `block` hook comes before the `filesystems` hook
# and directly after the `udev` hook like the following:
HOOKS=(base udev block filesystems keyboard fsck)

# Save it and exit.
```

```
## NOTE: If you have /usr on a separate partition, you MUST include the
##       usr, fsck and shutdown hooks.
HOOKS=(base udev block filesystems keyboard fsck)
```

Now, regenerate the initial RAM disk image with the changes made:

```
mkinitcpio -p linux
```

```
[root@archiso /]# mkinitcpio -p linux
==> Building image from preset: /etc/mkinitcpio.d/linux.preset: 'default'
  -> -k /boot/vmlinuz-linux -c /etc/mkinitcpio.conf -g /boot/initramfs-linux.img
==> Starting build: 5.9.14-arch1-1
  -> Running build hook: [base]
  -> Running build hook: [udev]
  -> Running build hook: [block]
==> WARNING: Possibly missing firmware for module: aic94xx
==> WARNING: Possibly missing firmware for module: wd719x
==> WARNING: Possibly missing firmware for module: xhci_pci
  -> Running build hook: [filesystems]
  -> Running build hook: [keyboard]
  -> Running build hook: [fsck]
==> Generating module dependencies
==> Creating gzip-compressed initcpio image: /boot/initramfs-linux.img
==> Image generation successful
==> Building image from preset: /etc/mkinitcpio.d/linux.preset: 'fallback'
  -> -k /boot/vmlinuz-linux -c /etc/mkinitcpio.conf -g /boot/initramfs-linux-fallback.img -S autodetect
==> Starting build: 5.9.14-arch1-1
  -> Running build hook: [base]
  -> Running build hook: [udev]
  -> Running build hook: [block]
==> WARNING: Possibly missing firmware for module: aic94xx
==> WARNING: Possibly missing firmware for module: wd719x
==> WARNING: Possibly missing firmware for module: xhci_pci
  -> Running build hook: [filesystems]
  -> Running build hook: [keyboard]
  -> Running build hook: [fsck]
==> Generating module dependencies
==> Creating gzip-compressed initcpio image: /boot/initramfs-linux-fallback.img
==> Image generation successful
[root@archiso /]# _
```

- Network interface names

Arch Linux's basic service manager, **systemd**, assigns network interfaces predictable names based on the actual device hardware. This is great for just about any other type of install, but can pose some problems for the portable USB installation we're going for.

To ensure that the ethernet and wifi interfaces will always be respectively named **eth0** and **wlan0**, revert the Arch Linux USB back to traditional device naming:

```
ln -s /dev/null /etc/udev/rules.d/80-net-setup-link.rules
```

- Journal configuration

A default installation of Arch Linux is setup with **systemd** to continuously journal various information about current processes and write that data to storage on disk. For a persistent bootable installation on a flash memory device, however, we can change some options in **journald.conf** to enable journal keeping entirely in RAM (thus reducing writes to the flash device). To control where journal data is stored.

```
# Editr the config
vim /etc/systemd/journald.conf

# To switch journal data storage to RAM, set the storage variable to
# `volatile` by ensuring the following line is uncommented:
Storage=volatile

# As an additional precaution, to ensure the operating system doesn't
# overfill RAM with journal data, set the max-use variable like below:
SystemMaxUse=16M

# Save it and exit
```

```
# See journald.conf(5) for details.

[Journal]
Storage=volatile
#Compress=yes
#Seal=yes
#SplitMode=uid
#SyncIntervalSec=5m
#RateLimitIntervalSec=30s
#RateLimitBurst=10000
SystemMaxUse=16M
#SystemKeepFree=
#
```

- Mount options

Modern filesystems are able to record various metadata (last accessed, last modified, user rights, etc.) about their files. A default filesystem mount generally keeps track of as much as this information as possible. For a persistent bootable

operating system on a flash memory device, however, we should limit some of this record keeping in order to reduce writes to the flash device.

Using the **noatime** mount option in **fstab** will disable the record keeping of file access times: **no writes will occur when a file is read, only when it is modified.**

To disable record keeping of file access times for the bootable USB:

vim /etc/fstab

```
# Static information about the filesystems.
# See fstab(5) for details.

# <file system> <dir> <type> <options> <dump> <pass>
# /dev/sda3
UUID=5533cb44-1bfc-4302-9c1a-7f37e6e38397           /          ext4      rw,noatime     0 1

# /dev/sda2
UUID=9F6B-FA2D           /boot        vfat      rw,noatime,fmask=0022,dmask=0022,codepage=437,iocharset=iso8859-1,shortname=mixed,utf8,errors=remount-ro   0 2

::s/relatime/noatime/q
9,1
All
```

Install **grub** to hard drive

Make sure you're in the `New Arch Linux` root environment. If not, please run `arch-chroot /mnt` to go inside it.

```
# `intel-ucode` is for the bootloader to know Intel CPU architecture,
# you need to change to your CPU one.
#
# Optionally, you can install `os-prober` if you want `grub` to detect exists
# OS.
# For example, you want `grub` to handle multi OS boot situation.
pacman -S grub efibootmgr intel-ucode

# Generate then grub config
mkdir /boot/grub
grub-mkconfig > /boot/grub/grub.cfg

# Install CPU specified `grub`, you can run `uname -m` to confirm your CPU
# architecture.
# For example, to install `x86_64` architecture and `EFI`.
grub-install --target=x86_64-efi --efi-directory=/boot

# After that, it will generate `/boot/EFI/arch/grubx64.efi`!!!

```

Install **grub** to USB

Make sure you're in the **New Arch Linux** root environment. If not, please run **arch-chroot /mnt** to go inside it.

To enable booting the USB in both modes (**BIOS**, **UEFI**), two bootloaders will need to be installed.

- Install the following packages:

```
# `intel-ucode` and `amd-ucode` is for the bootloader to know Intel CPU
# architecture, you need to change to your CPU one.
#
# As we install to USB, then we needs to have `microcode` for both
# manufacturer processors
#
# Optionally, you can install `os-prober` if you want `grub` to detect
# exists OS.
# For example, you want `grub` to handle multi OS boot situation.
pacman -S grub efibootmgr intel-ucode amd-ucode
```

```
[root@archiso ~]# pacman -S grub efibootmgr intel-ucode amd-ucode
resolving dependencies...
looking for conflicting packages...

Packages (5) efivar-37-4  amd-ucode-20201218.646f159-1  efibootmgr-17-2  grub-2:2.04-8  intel-ucode-20201118-1

Total Download Size:  9.57 MiB
Total Installed Size: 36.84 MiB

:: Proceed with installation? [Y/n]
:: Retrieving packages...
grub-2:2.04-8-x86_64          6.7 MiB 31.7 MiB/s 00:00 [########################################] 100%
efivar-37-4-x86_64           110.5 KiB 0.00 B/s 00:00 [########################################] 100%
efibootmgr-17-2-x86_64       27.4 KiB 0.00 B/s 00:00 [########################################] 100%
amd-ucode-20201218.646f159-1-any 24.0 KiB 0.00 B/s 00:00 [########################################] 100%
intel-ucode-20201118-1-any    2.7 MiB 33.3 MiB/s 00:00 [########################################] 100%
(5/5) checking keys in keyring
(5/5) checking package integrity
(5/5) loading package files
(5/5) checking for file conflicts
(5/5) checking available disk space
:: Processing package changes...
(1/5) installing grub
Generate your bootloader configuration with:
  grub-mkconfig -o /boot/grub/grub.cfg
Optional dependencies for grub
  freetype2: For grub-mkfont usage
  fuse2: For grub-mount usage
  dosfstools: For grub-mkrescue FAT FS and EFI support
  efibootmgr: For grub-install EFI support [pending]
  libisoburn: Provides xorriso for generating grub rescue iso using grub-mkrescue
  os-prober: To detect other OSes when generating grub.cfg in BIOS systems
  mtools: For grub-mkrescue FAT FS support
(2/5) installing efivar
(3/5) installing efibootmgr
(4/5) installing intel-ucode
(5/5) installing amd-ucode
:: Running post-transaction hooks...
(1/1) Arming ConditionNeedsUpdate...
[root@archiso ~]# _
```

- Setup **bootloader**:

- View the current block devices to determine the target USB device:

```
lsblk
```

Make sure that **/dev/sdX** block device is the USB you're installing to !!!

All the command below, the **/dev/sdX** below means the USB driver itself, not to any partition. So please DO NOT add any number at the end!!!

```
# `/dev/sdX` is correct
# `/dev/sdXn` is NOT correct
```

- Setup **GRUB** for **MBR/BIOS** booting mode (replace the **X** to your real device letter)

```
grub-install --target=i386-pc --boot-directory /boot /dev/sdX
```

```
[root@archiso /]# lsblk
NAME  MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
loop0   7:0    0 559.5M  1 loop
sda     8:0    1 119.3G  0 disk
└─sda1  8:1    1   10M  0 part
└─sda2  8:2    1   512M  0 part /boot
└─sda3  8:3    1 118.7G  0 part /
sr0     11:0   1 682.3M  0 rom
[root@archiso /]# grub-install --target=i386-pc --boot-directory /boot /dev/sda
Installing for i386-pc platform.
Installation finished. No error reported.
```

- Setup **GRUB** for **UEFI** booting mode

```
# Install CPU specified `grub`, you can run `uname -m` to confirm
your CPU architecture.
# Install `x86_64` architecture and `EFI`.
grub-install --target=x86_64-efi --efi-directory /boot --boot-
directory /boot --removable
```

```
[root@archiso /]# grub-install --target=x86_64-efi --efi-directory /boot --boot-directory /boot --removable
Installing for x86_64-efi platform.
Installation finished. No error reported.
[root@archiso /]# _
```

- Generate a **GRUB** configuration:

```
grub-mkconfig -o /boot/grub/grub.cfg
```

```
# After that, it will generate something important below:
# /boot/EFI/BOOT/BOOTX64.EFI
# /boot/grub/x86_64-efi/
# /boot/grub/i386-pc/
```

```
[root@archiso /]# grub-mkconfig -o /boot/grub/grub.cfg
Generating grub configuration file ...
Found linux image: /boot/vmlinuz-linux
Found initrd image: /boot/intel-ucode.img /boot/amd-ucode.img /boot/initramfs-linux.img
Found fallback initrd image(s) in /boot: initramfs-linux-fallback.img
done
[root@archiso /]#
```

```
[root@archiso ~]# ls -lht /boot/EFI/BOOT/
total 128K
-rwxr-xr-x 1 root root 128K Dec 22 15:50 BOOTX64.EFI
[root@archiso ~]# _
```

```
[root@archiso ~]# ls -lht /boot/grub
total 64K
-rwxr-xr-x 1 root root 5.1K Dec 22 15:51 grub.cfg
drwxr-xr-x 2 root root 20K Dec 22 15:50 x86_64-efi
drwxr-xr-x 2 root root 4.0K Dec 22 15:50 locale
drwxr-xr-x 2 root root 4.0K Dec 22 15:47 fonts
-rwxr-xr-x 1 root root 1.0K Dec 22 15:47 grubenv
drwxr-xr-x 2 root root 20K Dec 22 15:47 i386-pc
drwxr-xr-x 3 root root 4.0K Dec 22 15:47 themes
[root@archiso ~]#
```

Recommended package to install

All the packages below are optional but recommended which can make your life a bit easier before you install any DE (**Desktop Environment**) or WM (**Window Manager**).

Make sure you're in the **New Arch Linux** root environment. If not, please run **arch-chroot /mnt** to go inside it.

- Networking
 - **netctl** - A CLI and profile-based network manager.
 - **ifplugd** - a daemon which will automatically configure your Ethernet device when a cable is plugged in and automatically unconfigure it if the cable is pulled.
 - And the based WIFI support CLI.

```
pacman -S netctl ifplugd iw wpa_supplicant dhpcd
```

Copy the example ethernet profile to **/etc/netctl/**:

```
cp /etc/netctl/examples/ethernet-dhcp /etc/netctl/eth0-dhcp
```

```
[root@archiso /]# cp /etc/netctl/examples/ethernet-dhcp /etc/netctl/eth0-dhcp
[root@archiso /]# cat /etc/netctl/eth0-dhcp
Description='A basic dhcp ethernet connection'
Interface=eth0
Connection=ethernt
IP=dhcp
#DHCPClient=dhcpcd
#DHCPReleaseOnStop=no
## for DHCPv6
#IP6=dhcp
#DHCP6Client=dhclient
## for IPv6 autoconfiguration
#IP6=stateless
[root@archiso /]#
```

Enable **ifplugd** to automatically connect to any available wired network:

```
systemctl enable netctl-ifplugd@eth0.service
```

```
[root@archiso /]# systemctl enable netctl-ifplugd@eth0.service
Created symlink /etc/systemd/system/sys-subsystem-net-devices-eth0.device.wants/netctl-ifplugd@eth0.service → /usr/lib/systemd/system/netctl-ifplugd@.service.
[root@archiso /]# _
```

Enable network time synchronization:

```
systemctl enable systemd-timesyncd.service
```

```
# You can check your time setting by command `timedatectl`
timedatectl
#      Local time: Wed 2014-09-24 21:19:26 CST
#      Universal time: Wed 2014-09-24 13:19:26 UTC
#            RTC time: Wed 2014-09-24 13:19:26
#      Timezone: Asia/Shanghai (CST, +0800) // time zone you setted
#      NTP enabled: yes // if you enable systemd-timesyncd success here
# will be yes, otherwise you need use `systemctl status systemd-
#timesyncd.service` to check it
#NTP synchronized: yes
# RTC in local TZ: no
#      DST active: n/a
```

For the **WIFI** configuration, please go to **Configuration** chapter.

- Video drivers

To support most common **GPUs**, install all five basic open source video drivers:

```
pacman -S xf86-video-amdgpu xf86-video-ati xf86-video-intel xf86-video-nouveau xf86-video-vesa
```

```
[root@archiso ~]# pacman -S xf86-video-amdgpu xf86-video-ati xf86-video-intel xf86-video-nouveau xf86-video-vesa
resolving dependencies...
looking for conflicting packages...
warning: dependency cycle detected:
warning: libglvnd will be installed before its mesa dependency

Packages (33) db-5.3.28-5 gdbm-1.18.1-3 libdrm-2.4.103-2 libedit-20191231_3.1-2 libglvnd-1.3.2-1 libomxil-bellagio-0.9.3-3
libpciaccess-0.16-2 libunwind-1.3.1-2 libx11-1.7.0-2 libxau-1.0.9-3 libxcb-1.14-1 libxdamage-1.1.5-3
libxdmcp-1.1.3-3 libxext-1.3.4-3 libxfixes-5.0.3-4 libxshmfence-1.3-2 libxvmc-1.0.12-3 libxxf86vm-1.1.4-4
llvm-libs-11.0.0-4 lm_sensors-3.6.0-2 mesa-20.3.1-1 perl-5.32.0-3 pixman-0.40.0-1
vulkan-icd-loader-1.2.162-1 wayland-1.18.0-2 xcbproto-1.14.1-3 xcb-util-0.4.0-3 xorgproto-2020.1-1
xf86-video-amdgpu-19.1.0-2 xf86-video-ati-1:19.1.0-2 xf86-video-intel-1:2.99.917+913+g9236c582-1
xf86-video-nouveau-1.0.16-2 xf86-video-vesa-2.5.0-1

Total Download Size:    62.41 MiB
Total Installed Size:  270.98 MiB

:: Proceed with installation? [Y/n]
```

- Touchpad support

Install support for standard notebook touchpads:

```
pacman -S xf86-input-synaptics
```

- Battery support

Install support for checking battery charge and state:

```
pacman -S acpi tlp
```

Enable the service

```
systemctl enable tlp.service
```

- Build tools if you needed

```
pacman -S base-devel man
```

- Basic editor and shell if you needed

```
pacman -S vim fish
```

- Basic ssh tool if you needed

```
pacman -S openssh
```

Finish installation

Below are the final steps to finish the **Arch Linux** installation.

Make sure you're in the **New Arch Linux** root environment. If not, please run **arch-chroot /mnt** to go inside it.

- Add a new user and assign it to the **sudo** group

```
# Add new user
useradd -m -G wheel YOUR_USER_NAME

# Set password
passwd YOUR_USER_NAME

# Install `sudo`
pacman -S sudo

# Enable `wheel` group for `sudo` command
visudo

# Enable the below line:
# %wheel ALL=(ALL) ALL
#
# Save and exit.
```

```
## Uncomment to allow members of group wheel to execute any command
%wheel ALL=(ALL) ALL
```

- Exit and shutdown

```
# Exit current Arch root.  
exit  
  
# Unmount all mounted folders and sync  
umount /mnt/boot /mnt && sync  
  
# Shutdown, all done:)  
shutdown -h now
```

Arch configuration guide

Before starting, recommended that login with your new user (not the `root` user) to finish all the steps below.

You should know about Getty

What is `Getty`?

After reboot, you will see a default terminal login prompt which prints with `tty1`, that's the `getty`.

In Arch Linux, `agetty` is the default `getty`, it prompts for a login name and invokes the `/bin/login` command.

You can press `Ctrl+Alt+F1 ~ F6` to switch between `tty1 ~ tty6`.

The `tty7` (`Ctrl+Alt+F7`) is for the `X` which means your `DE` (Desktop Environment) or `WM` (Window Manager).

More information from [here](#)

Tips:

- Sometimes, when you do a wrong configuration to your `DE` or `WM`, even the `DM` (Display Manager which works like a graphical login prompt), then you can switch another `tty` and login to fix it, very handy.
- How to change `tty` fonts:

```
# All fonts stay in this folder
ls -lht /usr/share/kbd/consolefonts

# Set the TTY font
setfont FONT_FILE_NAME_HERE
```

Prepare your preferred editor Configuration

Before to edit a lot of configuration files, you better to prepare your personal preferred editor and shell environment before continuing.

For example, if you prefer the pre-installed `vim`, then you need to install `gvim` to enable the `clipboard` feature which makes your life a bit easier.

```
# It will ask you to remove the `vim-minimal` as a conflict, just says `Y`
sudo pacman -S gvim
```

Let's do it:)

WIFI Configuration

Right now, the newer `Arch Linux` can connect via `ethernet` NIC, but how about `wireless` NIC?

- Copy the WIFI config from example and named it as `wlan0-dhcp`

```
cd /etc/netctl
sudo cp -rvf examples/wireless-wpa ./wlan0-dhcp
```

- Edit `wlan0-dhcp` to change your WIFI `SSID` and `KEY` (encrypted password in HEX string)

```

sudo vim wlan0-dhcp

# Change the `ESSID` to your WIFI `SSID`

# Go to the bottom, run the command below to read the
# `wpa_passphrase` result into current file.
:r !wpa_passphrase YOUR_SSID_HERE YOUR_WIFI_PASSWORD_TEXT_HERE | grep psk

# After that, you should get something like below:
# #psk="xxxxxx"
# psk="XXXXXX" // That's encrypted WIFI PASS in HEX string
#
# So you need to copy that "XXXX" hex string and make it looks like below
# to set the `Key` value.
# Make sure the value start with `\"` and then follow your HEX string
Key=\"XXXXXX

# Finally, enable the `Hidden=yes` line if your SSID is hidden.
# Then save and exit

```

Pay attention:

For connecting to the **5G** network, you need to match 2 conditions below:

- You have to use unencrypted (plaintext) password to fill the **Key** field.
- The **5G** network needs to pick the **channel** to **40**.

Otherwise, it won't work!!!

- Start connecting to WIFI

Any file located at **/etc/netctl** folder is call **profile**, you can run the **netctl start PROFILE_NAME** to start any profile-based network configuration:

```
sudo netctl start wlan0-dhcp
```

If start fail, then run **sudo netctl status wlan0-dhcp** to read the detail error.

- Connect to WIFI when computer boots

You can create a `systemd` service to connect to WIFI automatic when computer boots

```
sudo netctl reenable wlan0-dhcp
```

But this is not recommended if you're installing the **Arch Linux** to **USB**, as not all computers always have the `wlan0`. In the case which doesn't have the `wlan0` NIC, then the booting process will keep waiting before time out, it will waste a couple of seconds.

For solving this, you can add a script to start `wlan0-dhcp` profile into a script which will be added to `lightdm`, that will be perfect.

- Run the script to list all available networks

- Install `node` if you don't have it yet:

```
sudo pacman --sync --refresh nodejs-lts-erbium
```

- Create the `~/scripts/scan-ssid.js` with the following content:

```

const {execSync} = require('child_process')

// Run the `iw` command to do a WIFI scan
const cmd = `iw dev wlan0 scan | grep -e "freq:" -e "SSID:"`
let cmdResult = ''
try {
    cmdResult = execSync(cmd)
        .toString()
        .replace(/\t/g, '')
    // console.log(`cmdResult: ${cmdResult}`)
}
catch (error) {
    if (error.message && error.message.indexOf('Network is down') !== -1) {
        console.log(`Your WIFI interface is down, plz run the command
the below and try again: \n\nsudo ip link set wlan0 up\n`)
    }

    console.error(error)
    return;
}

// Format the result
const resultList = []

let lastWifiInfo = {freq: '', ssid: ''}
const tempArr = cmdResult.split('\n')
.forEach((tempString, index, arrRef) => {
    const isSsid = index % 2 == 1

    if (isSsid) {
        let fixedSsid = tempString.replace('SSID: ', '').trim()
        lastWifiInfo.ssid = Boolean(fixedSsid == '') ? 'Unknown'
: fixedSsid
        resultList.push(lastWifiInfo)
    } else {
        let freqStr = tempString.replace('freq: ', '').trim()
        let is5G = Boolean(parseInt(freqStr, 10) > 5100)
        // console.log(`freqStr: ${freqStr}, is5G: ${is5G}`)
    }
})

```

```

        lastWifiInfo = {freq: '', ssid: ''}
        lastWifiInfo.freq = is5G ? `5G` : `2.4G`
    }
})

let resultTable = `\\n[ Available WIFI networks ]` +
`\\n-----\\n` +
resultList.map(wifiInfo => `${wifiInfo.ssid} -` +
`${wifiInfo.freq}`) +
.join(`\\n`) + `\\n`

console.log(resultTable)

```

- Run the script like below:

```
sudo node --harmony ~/scripts/scan-ssid.js
```

If you didn't up the `wlan0` interface, it will print out the error like below:

```
N | wison | /home/wison/scripts ↵ sudo node --harmony ./scan-ssid.js
command failed: Network is down (-100)
Your WIFI inferace is down, plz run the command the below and try again
:
sudo ip link set wlan0 up
```

Then just run `sudo ip link set wlan0 up`, wait for a few seconds, then re-run the script command again. And it should print out like below:

```
N | wison | /home/wison/scripts ↵ sudo node --harmony ./scan-ssid.js
[ Available WIFI networks ]
-----
SPARK-XYV5A6 - 2.4G
SPARK-GPW4M - 2.4G
vodafoneED4642 - 2.4G
B818_99B8 - 2.4G
NetComm 0114 - 2.4G
SPARK-GPW4M-5G - 5G
Unknown - 2.4G
\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00 - 2.4G
\x00\x00\x00\x00\x00\x00\x00\x00 - 2.4G
\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00 - 2.4G
SPARK-R29D34-5G - 5G
SPARK-R29D34 - 2.4G
B818_99B8 - 5G
vodafone365B44 - 2.4G
Trustpower_2.4GHz_1371 - 2.4G
HUAWEI-URV3AD - 2.4G
vodafone1B8998 - 2.4G
```

Make your boot faster

By default, **grub** will wait for around **5** second before select the default boot option.

But we can change it in **/etc/default/grub**.

sudo vim /etc/default/grub to change some settings to reduce the timeout

```
GRUB_TIMEOUT=0
GRUB_TIMEOUT_STYLE=hidden
```

Save and exit.

Then run the command below to re-generate the grub configuration file:

```
sudo grub-mkconfig -o /boot/grub/grub.cfg
```

Now, reboot to take effect.

A tips for changing the resolution for the **GRUB**:

You can change the following settings to `/etc/default/grub`

```
# Try 1024x768x32 first, if fail, then fallback to auto resolution
GRUB_GFXMODE=1024x768x32,auto
```

Install or update kernel

First you need to check the current linux kernel you can install by running:

```
pacman --sync --search linux | grep core/linux

# [ The current kernel installed ]

# core/linux 5.10.5.arch1-1 [installed]
# core/linux-api-headers 5.8-1 [installed]
# core/linux-docs 5.10.5.arch1-1
# core/linux-firmware 20201218.646f159-1 [installed]
# core/linux-headers 5.10.5.arch1-1 [installed]

# [ The LTS (Long Term Support) kernel ]

# core/linux-lts 5.4.87-1
# core/linux-lts-docs 5.4.87-1
# core/linux-lts-headers 5.4.87-1
```

If you need to install driver (webcam driver, usb driver), then you have to install `headers`. Otherwise, you don't need that.

After you confirm you ready need that, then pick the one you like to install:

```
# Install the latest kernel and headers
sudo pacman --sync --refresh linux linux-headers

# Install the latest LTS kernel and headers
sudo pacman --sync --refresh linux-lts linux-headers-lts
```

Optionally, you can list all installed kernels in the `grub` bootloader UI, then you can pick which one you want to boot into.

This just optaional, you don't need to do that if don't need it

`sudo vim /etc/default/grub` with the following settings:

```
GRUB_DISABLE_SUBMENU=y
GRUB_DEFAULT=saved
GRUB_SAVEDEFAULT=true
```

Then re-generate the grub configuration:

```
sudo grub-mkconfig -o /boot/grub/grub.cfg
```

Reboot.

Install **yay** to enable AUR

What is AUR?

AUR stands for Arch User Repository. It is a community-driven repository for Arch-based Linux distributions users. It contains package descriptions named **PKGBUILDS** that allow you to compile a package from source with **makepkg** and then install it via **pacman** (package manager in Arch Linux).

How to enable **AUR** installation:

```
mkdir ~/temp && cd ~/temp

pacman -S --needed git base-devel
git clone https://aur.archlinux.org/yay.git
cd yay
makepkg -si

cd ~/temp && rm -rf yay
```

If you want to change or add any mirror server to **/etc/pacman.d/mirrorlist**, you can go to [here](#)

Install X implementation

The **X** Window System (**X11**, or simply **X**) is a windowing system for bitmap displays, common on Unix-like operating systems. It provides the basic framework for a GUI environment:

- Drawing
- Moving windows

- Interact with mouse and keyboard

It's **Client, Server** architecture

How to install a **X** implementation?

```
sudo pacman -S xorg xorg-server
```

More information from [here](#)

Install **lightDM** as Display Manager

- What is **Display Manager**?

A display manager, or login manager, is typically a graphical user interface that is displayed at the end of the boot process in place of the default shell.

- We will install one of the implementation which is called: **LightDM**

LightDM is a cross-desktop **Display Manager** (also known as a **Login Manager**). Its key features are:

- Cross-desktop - supports different desktop technologies.
- Supports different display technologies (X, Mir, Wayland ...).
- Lightweight - low memory usage and high performance.
- Supports guest sessions.
- Supports remote login (incoming - XDMCP, VNC, outgoing - XDMCP, pluggable).
- Comprehensive test suite.
- Low code complexity.

[Here](#) has more detail information.

- Installation

```
# `lightdm-webkit2-greeter` is one of the lightdm greeter which will
explain below
sudo pacman -S lightdm lightdm-webkit2-greeter
```

- Change the default **greeter**

A **greeter** just like a graphical login prompt, you can install any one you like.

By default, all installed **greeter** are located in **/usr/share/xgreeters**

```
ls -lth /usr/share/xgreeters/
# lightdm-webkit2-greeter.desktop
```

By default, **lightdm** will use **lightdm-gtk-greeter** but you can change it any time in **/etc/lightdm/lightdm.conf**

If you add new **greeter**, then get the name in **/usr/share/xgreeters** and change in **/etc/lightdm/lightdm.conf** like below:

```
[Seat:*]
#
# ...
# For example, we just installed this one
greeter-session=lightdm-webkit2-greeter
#
# ...
```

- Enable the **lightdm** service when booting

```
sudo systemctl enable lightdm.service
```

- Restart the **lightdm** service when booting

After you change the greeter or another settings, you need to restart the service to take effect. Pay attention that this command will logout the current session, make sure save all docs before you do that

```
sudo systemctl restart lightdm.service
```

If you want to change setting very often and don't want to be forced to logout, then you can open another **tty** (Ctrl+Alt+F1 ~ F6) and run the command above, then

back the **lightdm** will refresh in the **tty7** which more convenience.

- Install new theme for the **lightdm-webkit2-greeter**

It's super easy to add a different theme based on **lightdm-webkit2-greeter**, for example, install this one:

```
yay -Sy lightdm-webkit-theme-aether
```

After a theme be installed, it saves in **/usr/share/lightdm/themes**

```
ls -lht /usr/share/lightdm/themes
# lightdm-webkit-theme-aether
```

So, you need to change the theme name in **/etc/lightdm/lightdm-webkit2-greeter.conf** like below:

```
webkit_theme = lightdm-webkit-theme-aether
```

Save it and logout to take effect.

- Troubleshooting

If you can't start the **lightdm** or **lightdm-webkit2-greeter** (which includes can't see the webkit2 themes), plz double check all configurations to see whether you put the wrong spelling there, as around 90% chance is that:)

If yes, then switch another **tty** to fix it and restart **lightdm** again:

```
sudo systemctl restart lightdm.service
```

If you make sure NO wrong spelling in the configuration file, then switch to another **tty** and run the command below to see whether some helpful error to figure out what's happening there:

```
/usr/bin/lightdm-webkit2-greeter --help
```

My personal very bad luck experience, it causes by missing the correct version of `icu` package to be installed. I think that's because I installed `lightdm-webkit-theme-aether` via `yay` which always use the latest package, but my `Arch Linux` use another older package. That's why no matter what I had tried, it still doesn't work. After I run `sudo pacman -Syc` to upgrade all installed package. It works...:)

Fix resolution issue

In some high `DPI` screens (e.g. Apple Retina Screen), you will see a very high resolution but with tiny small fonts which you even can see what's that.

For that case, you can add the settings below to `~/.Xresources`:

```
# -----
-- 
# The settings below will affect the screen DPI (Dots Per Inch)
#
# Based on the wiki (https://wiki.archlinux.org/index.php/HiDPI "X Resources" section, it says:
#
# For `Xft.dpi`, using the integer multiples 96 usually works best. For example:
#
# 96 - 100% scaling
# 144 - 150% scaling
# 192 - 200% scaling
# 288 - 300% scaling
# -----
-- 
# Xft.dpi: 96
Xft.dpi: 192
# Xft.dpi: 144
# Xft.dpi: 288
```

Install GTK themes

After installing `X` implementation, it's optional to install different `GTK themes`. Those themes can make the GUI application looks more nice.

GTK (The GIMP Toolkit) was initially made by the **GNU** Project for GIMP, but it is now a very popular toolkit with bindings for many languages.


- Install themes and configuration tools

```
sudo pacman -Sy lxappearance materia-gtk-theme
```

After installing, all the themes are located in `/usr/share/themes/`

- Run the configuration tool to pick the theme you like

```
lxappearance
```

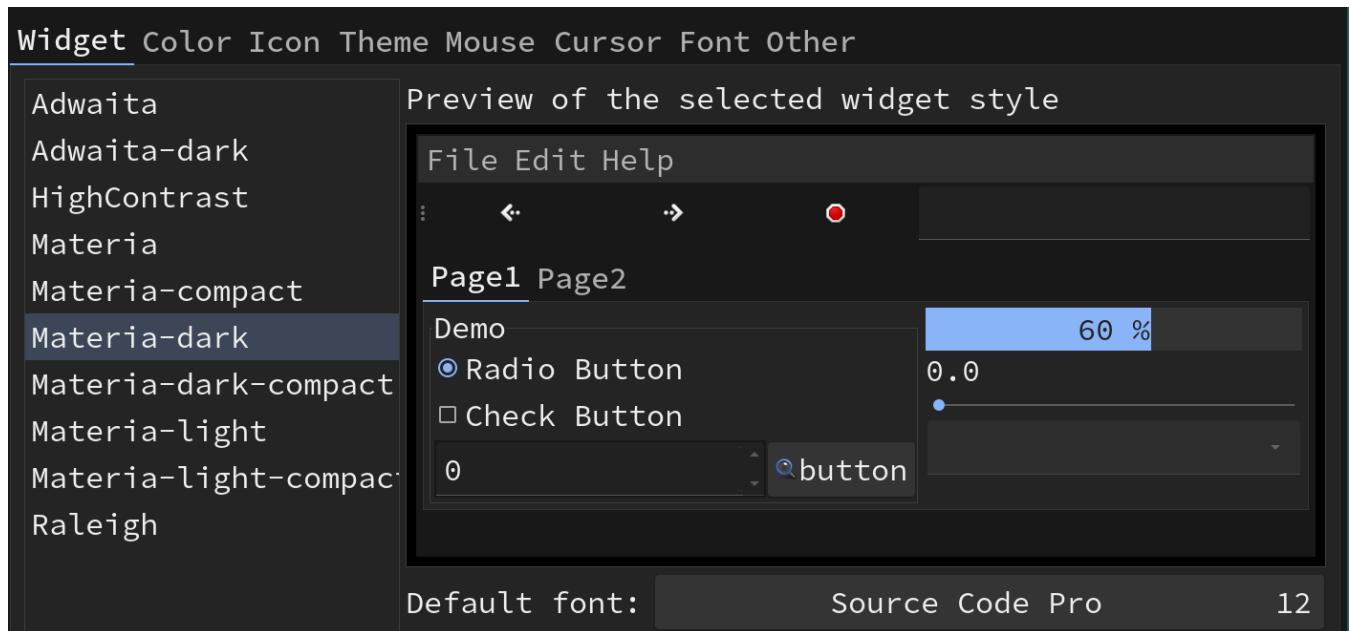

The **Materia-dark** + **Source Code Pro** font would be a nice choice.

You can find more GTK themes at [here](#).

Install Google Chrome

- Install via **yay**

```

pacman -S --needed git base-devel
mkdir ~/temp && cd ~/temp
git clone https://aur.archlinux.org/yay.git
cd yay
makepkg -si
cd ~/temp && rm -rf yay

yay -S google-chrome

```

- Apply the selected theme in `lxappearance`:

- Open `chrome` with this url: `chrome://settings/?search=theme`
- Then choose `Use GTK+`

- Install `xdg-utils` and set `Chrome` as the default browser

```

sudo pacman -Sy xdg-utils

# Set `chrome` as the default browser
xdg-settings set default-web-browser google-chrome.desktop

# Query to confirm
xdg-settings get default-web-browser

```

Tips: All installed GUI application links located in `/usr/share/applications/`.

- Optional choice: `vimium` extension if you're `vim` user:)

Open `Chrome web store` and search `vimium` and install it, enjoy the super convenience.

The screenshot shows the Chrome Web Store interface. In the search bar at the top left, the word "vimium" is typed. To the right of the search bar, there is a green ribbon banner with the word "ADDED". Below the search bar, the word "Extensions" is displayed in large, bold letters. Underneath "Extensions", there is a navigation link "« Home". On the left side of the page, there is a sidebar with the following categories and links:

- Extensions
- Themes
- Features**
- Runs Offline
- By Google

On the right side of the page, the Vimium extension is listed. It features a blue circular logo with a white "V" and the text "Vimium" in a large, bold font, followed by the subtitle "the hacker's browser". Below the logo, it says "Offered by: Ilya Sukhar, Phil Crosby, Stephen Blott". A short description reads "The Hacker's Browser. Vimium provides keyboard shor...". A rating of "★★★★★ 4,756 Productivity" is shown.

The screenshot shows a Vimium help overlay window titled "Vimium Help". The window lists various keyboard shortcuts categorized into sections: "Navigating the page", "Using the omnibar", "Using find", "Navigating history", "Manipulating tabs", and "Safety".

Navigating the page	Using the omnibar
<code>j, <C-e></code> Scroll down	<code>o</code> Open URL, bookmark or history entry
<code>k, <C-y></code> Scroll up	<code>O</code> Open URL, bookmark or history entry in a new tab
<code>gg</code> Scroll to the top of the page	<code>b</code> Open a bookmark
<code>G</code> Scroll to the bottom of the page	<code>B</code> Open a bookmark in a new tab
<code>d</code> Scroll a half page down	<code>T</code> Search through your open tabs
<code>u</code> Scroll a half page up	Using find
<code>h</code> Scroll left	<code>/</code> Enter find mode
<code>l</code> Scroll right	<code>n</code> Cycle forward to the next find match
<code>r</code> Reload the page	<code>N</code> Cycle backward to the previous find match
<code>yy</code> Copy the current URL to the clipboard	Navigating history
<code>p</code> Open the clipboard's URL in the current tab	<code>H</code> Go back in history
<code>P</code> Open the clipboard's URL in a new tab	<code>L</code> Go forward in history
<code>i</code> Enter insert mode	Manipulating tabs
<code>v</code> Enter visual mode	<code>t</code> Create new tab
<code>gi</code> Focus the first text input on the page	<code>J, gT</code> Go one tab left
<code>f</code> Open a link in the current tab	<code>K, gt</code> Go one tab right
<code>F</code> Open a link in a new tab	<code>^</code> Go to previously-visited tab
<code>gf</code> Select the next frame on the page	<code>g0</code> Go to the first tab
<code>gF</code> Select the page's main/top frame	<code>g\$</code> Go to the last tab
	<code>yt</code> Duplicate current tab
	<code><a-p></code> Pin or unpin current tab
	<code><a-m></code> Mute or unmute current tab
	<code>x</code> Close current tab
	<code>X</code> Restore closed tab

Install i3 Window Manager

A window manager (**WM**) is system software that controls the placement and appearance of windows within a windowing system in a graphical user interface (GUI). It can be part of a desktop environment (**DE**) or be used standalone.

We will install a **Tiling** window manager which calls **i3**.

- How to install

```
sudo pacman -Sy i3 dmenu

# It will ask you what selection you want like below:
#
# 1) i3-gaps 2) i3-wm 3) i3block 4) i3lock 5) i3status
#
# Enter a selection (default=al): // Just enter to access all of them!!!
```

Then we need one more component from **AUR**:

```
yay -Sy i3exit
```

Component	Description
i3-gaps	Provides a gap between different tiling windows.
i3-wm	The core component.
i3block	Defines blocks for your i3bar status line.
i3lock	Improved screenlocker based upon XCB and PAM.
i3status	Generates status bar to use with i3bar, dzen2 or xmobar.
i3exit	A easy to do shutdown , reboot , lock in i3 environment.

- Let **lightdm** to start **i3**

After finishing install the **i3**, the new **X** session already been added to **/usr/share/xsessions**.

What you need to do just add that **i3.desktop** to **/etc/lightdm/lightdm.conf** like below:

```
user-session=i3

# Logout to take effect
i3exit logout
```

- How to run some scripts or programs when **i3** reload?

Add the setting below to your `~/.config/i3/config`

```
# Run the command without delay
exec_always YOUR_COMMAND_HERE

# Sleep 1 second then run the command
exec_always sleep 1; YOUR_COMMAND_HERE
```

change wallpaper

```
sudo pacman -S feh
```

Download wallpaper you like and then add the following setting to `~/.config/i3/config`

```
exec_always feh --bg--file YOUR_WALLPAPER_FULL_PATH_FILE_NAME
```

Restart **i3** then you should be able to see the new wallpaper.

icon font support

```
sudo pacman -S ttf-font-awesome
```


After that, open <https://fontawesome.com/cheatsheet> and copy any icon, then you can paste into any configuration file directly. You need to relogin to take effect.

window customization

- How to get the **Window Class**

Open the (application) window you want to get the class string name, and then open your terminal app side by side, then run `xprop`.

Right now, you can see the cursor become a `cross`, then click on the window, then you will get the result like below:

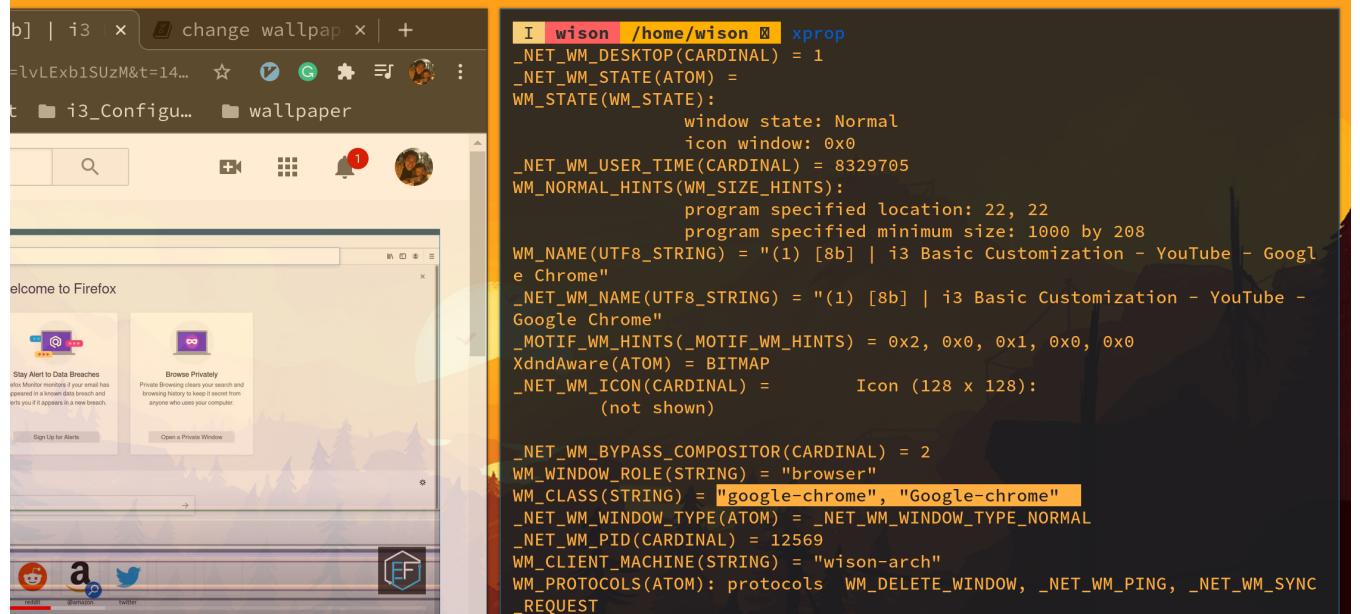

The highlight part is the `window class` string value, you can pick any one of them and assign to the `i3` configuration file to apply the window customization:

```
for_window [class="(i)google-chrome"] border pixel 1
# for_window [class="Skype"] floating enable border normal
# for_window [class="(i)virtualbox"] floating enable border normal
```

- Apply color setting to window

Replace all colors you want and reload `i3` to take effect.

```

# Window colors

set $bg_color          #E66B17
set $ibg_color          #551E22
set $border_color        #E66B17
set $text_color          #FFFFFF
set $itext_color         #000000
set $ubg_color           #000000

#                                     border      background      text
# indicator
client.focused           $border_color   $bg_color       $text_color
$bg_color
client.focused_inactive  $ibg_color     $ibg_color     $itext_color
$ibg_color
client.unfocused          $ibg_color     $ibg_color     $itext_color
$ibg_color
client.urgent              $ubg_color     $ubg_color     $text_color
$ubg_color
# client.placeholder        #000000  #0c0c0c  #ffffff  #000000  #0c0c0c

```

bar customization

Preview:



- Copy the template to your home folder like below:

```
cp -rvf /etc/i3status.conf ~/.config/i3/i3status.conf
```

- Indicate the config file in `~/.config/i3/config`

```
status_command i3status --config ~/.config/i3/i3status.conf
```

That means run the `i3status --config ~/.config/i3/i3status.conf` command and get back the standard output as the status bar content.

- Here is the `i3status.config` sample with comment

You need to restart `i3` to take effect after changing this file.

The icon below you can copy from <https://fontawesome.com/cheatsheet>

```
general {  
    # `false` to use the bar color by default  
    colors = false  
    # All commands refresh interval in seconds  
    interval = 2  
}  
  
order += "wireless _first_"  
order += "ethernet _first_"  
order += "battery 0"  
order += "disk /"  
order += "memory"  
order += "volume master"  
order += "tztime local"  
  
wireless _first_ {  
    format_up = "¤ %essid"  
    format_down = ""  
}  
  
ethernet _first_ {  
    format_up = "¤d(%speed)"  
    format_down = ""  
}  
  
battery 0 {  
    format = "¤ %status %percentage"  
    format_down = "¤"  
    status_bat = ""  
    status_chr = "¤"  
    status_full = "¤ "  
}  
  
disk "/" {  
    # format = "¤ %avail"  
    format = "¤ [ %free / %total ]"  
    prefix_type = "custom"  
}  
  
memory {
```

```
        format = "%used / %total"
        memory_used_method = "memavailable"
    }

volume master {
    format = "%volume"
    format_muted = "%"
    device = "default"
    mixer = "Master"
    mixer_idx = 0
}

tztime local {
    format = "%Y-%m-%d %H:%M:%S "
}
```

- Extra **bar** customization with comment

```
#  
=====  
  
# i3 status control  
#  
# Start i3bar to display a workspace bar (plus the system information  
i3status  
# finds out, if available)  
#  
=====  
  
set $bar_bg_color          #1C1C1CD9  
set $bar_text_color         #FFFFFFCC  
set $bar_itext_color        #616161  
set $bar_ws_bg_color        #551E22  
set $bar_ws_bg_color_2      #E66B17  
set $bar_separator_color    #E66B17  
  
bar {  
    # Run the `i3status` command and get back the standard output as the  
    bar content  
    status_command i3status --config ~/.config/i3/i3status.conf  
  
    # Bar transparent effect  
    # Even enabled this flag, you still need to apply the "transparency  
    hex" value to  
    # the bar color for getting the real transparency effect. You can  
    find the hex code  
    # from here:  
    # https://gist.github.com/lopspower/03fb1cc0ac9f32ef38f4  
    i3bar_command i3bar --transparency  
  
    # Stay on the top/bottom  
    position    top  
  
    # Render to the primary screen only  
    output     primary  
  
    # Hide the application icon tray area (which always stay on the most-  
    right)
```

```

tray_output none
# tray_output primary

#
font pango:SourceCodePro 10
# font pango:monospace 10

# The separator
# separator_symbol    "/" "
separator_symbol      "  "

# Workspace
workspace_buttons yes
workspace_min_width 25
# strip_workspace_numbers yes
# binding_mode_indicator no
colors {
    background   $bar_bg_color
    statusline   $bar_text_color
    separator    $bar_separator_color

    focused_workspace  $bar_ws_bg_color_2    $bar_ws_bg_color_2
    $bar_text_color    $bar_ws_bg_color_2
    active_workspace   $bar_ws_bg_color_2    $bar_ws_bg_color_2
    $bar_itext_color   $bar_ws_bg_color_2
    inactive_workspace $bar_ws_bg_color      $bar_ws_bg_color
    $bar_itext_color   $bar_ws_bg_color
    urgent_workspace   $bar_ws_bg_color      $bar_ws_bg_color
    $bar_text_color    $bar_ws_bg_color
}
}

```

bar customization with i3blocks

i3status is simple, but you can get more flexible status output with **i3blocks**, as **i3blocks** allows you to run different script/program for each part you want to display on the status bar.

For example:

You can customize the output with different status and icon based on the `acpi -b` program result:

```
# Run `acpi -b` when charging
Battery 0: Charging, 72%, 00:31:20 until charged

# Run `acpi -b` when discharging
Battery 0: Discharging, 71%, 03:36:05 remaining
```

So, you can use different awesome font icon to show different status.

Let's step-by-step to make that happen.

- Use `i3blocks` as the `status line command`

Copy the configuration template to your home folder like below:

```
cp -rvf /etc/i3blocks.conf ~/.config/i3
```

`vim ~/.config/i3/config` and change the line below:

```
bar {
    # Run the `i3block` command and get back the standard
    # output as the bar content
    status_command i3blocks -c ~/.config/i3/i3blocks.conf
}
```

Reload `i3`, the new status content should be display on the right-top on your screen.

- Configuration

`i3blocks.conf` is super simple, plz have a look:

```
[test]
# You can define any property you want, and the property will become the
# environment variable in the `command` line
my_var="(You look great today:)"

# The command you want to run, the result will show to the status bar
command=echo "OMG $my_var"

# Command running interval settings:
# `once`: only run once, then never run
# `x`: run per `x` second to refresh the content
interval=once
```

That's it, super simple!!!:)

i3 config sample with comment

Here is the fully comment **i3** configuration sample file:

```
# =====
# Set `$mod` to `Mod4` (WinKey or CmdKey)
# =====
set $mod Mod4
set $alt Mod1

# =====
# This font is widely installed, provides lots of unicode glyphs, right-to-left
# text rendering and scalability on retina/hidpi displays (thanks to pango).
# font pango:DejaVu Sans Mono 8
# =====
font pango:SourceCodePro 11

# =====
# Start up programs
# =====

# XSS-lock grabs a logind suspend inhibit lock and will use i3lock to lock
# the screen before suspend. Use logindctl lock-session to lock your screen.
exec --no-startup-id xss-lock --transfer-sleep-lock -- i3lock --nofork

# NetworkManager is the most popular way to manage wireless networks on
# Linux,
# and nm-applet is a desktop environment-independent system tray GUI for it.
exec --no-startup-id nm-applet

# Load my custom keymapping
exec_always sleep 1; xmodmap ~/.Xmodmap

# Load compton renderer
exec_always compton

# Load chinese input method
exec_always fcitx

# Load wallpaper
exec_always feh --bg-fill ~/Photos/wallpaper/6.png
# exec_always feh --bg-fill ~/Photos/wallpaper/8.png

# =====
# Audio and volume control
# =====
# Use pactl to adjust volume in PulseAudio.
set $refresh_i3status killall -SIGUSR1 i3status
bindsym XF86AudioRaiseVolume exec --no-startup-id pactl set-sink-volume
@DEFAULT_SINK@ +5% && $refresh_i3status
bindsym XF86AudioLowerVolume exec --no-startup-id pactl set-sink-volume
@DEFAULT_SINK@ -5% && $refresh_i3status
bindsym XF86AudioMute exec --no-startup-id pactl set-sink-mute @DEFAULT_SINK@
```

```
toggle && $refresh_i3status
bindsym XF86AudioMicMute exec --no-startup-id pactl set-source-mute
@DEFAULT_SOURCE@ toggle && $refresh_i3status

# =====
# Screen brightness control
# =====
bindsym XF86MonBrightnessUp exec --no-startup-id ~/scripts/mac-light-
controller Screen +
bindsym XF86MonBrightnessDown exec --no-startup-id ~/scripts/mac-light-
controller Screen -
bindsym XF86KbdBrightnessUp exec --no-startup-id ~/scripts/mac-light-
controller Keyboard +
bindsym XF86KbdBrightnessDown exec --no-startup-id ~/scripts/mac-light-
controller Keyboard -

# =====
# Special key mapping
# =====

# `cmd+c` -> `ctrl+c` (Copy)
bindsym --release $mod+c exec --no-startup-id xdotool key --clearmodifiers
ctrl+c

# `cmd+v` -> `ctrl+v` (Paste)
bindsym --release $mod+v exec --no-startup-id xdotool key --clearmodifiers
ctrl+v

# `cmd+f` -> `ctrl+f` (Find)
bindsym --release $mod+f exec --no-startup-id xdotool key --clearmodifiers
ctrl+f

# `cmd+t` -> `ctrl+t` (Open new tab)
bindsym --release $mod+t exec --no-startup-id xdotool key --clearmodifiers
ctrl+t

# `cmd+w` -> `ctrl+w` (Close current tab)
bindsym --release $mod+w exec --no-startup-id xdotool key --clearmodifiers
ctrl+w

# =====
# Window Navigation (Vim style)
# =====

set $up k
set $down j
set $left h
set $right l
```

```
# Change window focus by HJKL
bindsym $mod+$left focus left
bindsym $mod+$down focus down
bindsym $mod+$up focus up
bindsym $mod+$right focus right

# Change window focus by arrow key
bindsym $mod+Left focus left
bindsym $mod+Down focus down
bindsym $mod+Up focus up
bindsym $mod+Right focus right

# Move focused window by HJKL
bindsym $mod+Shift+$left move left
bindsym $mod+Shift+$down move down
bindsym $mod+Shift+$up move up
bindsym $mod+Shift+$right move right

# Move focused window by arrow key
bindsym $mod+Shift+Left move left
bindsym $mod+Shift+Down move down
bindsym $mod+Shift+Up move up
bindsym $mod+Shift+Right move right

# split in horizontal orientation
# bindsym $mod+h split h

# split in vertical orientation
# bindsym $mod+v split v

# kill focused window
bindsym $mod+q kill

=====
# Resize window
# =====
# resize window (you can also use the mouse for that)
set $resize_unit 5
mode "resize" {
    # These bindings trigger as soon as you enter the resize mode

    # Pressing left will shrink the window's width.
    # Pressing right will grow the window's width.
    # Pressing up will shrink the window's height.
    # Pressing down will grow the window's height.
    bindsym $left      resize shrink width $resize_unit px or
$resize_unit ppt
    bindsym $down      resize grow height $resize_unit px or
$resize_unit ppt
    bindsym $up       resize shrink height $resize_unit px or
```

```
$resize_unit ppt
    bindsym $right      resize grow width $resize_unit px or $resize_unit
ppt

# back to normal: Enter or Escape
bindsym Return mode "default"
bindsym Escape mode "default"
}
bindsym Shift+$mod+r mode "resize"

# =====
# Layout control
# =====

# Toggle fullscreen on current focused window
bindsym Control+$mod+f fullscreen toggle

# use Mouse+$mod to drag floating windows to their wanted position
floating_modifier $mod

# toggle tiling / floating
bindsym $mod+Shift+space floating toggle

# change container layout (stacked, tabbed, toggle split)
# bindsym $mod+s layout stacking
# bindsym $mod+w layout tabbed
# bindsym $mod+e layout toggle split
bindsym $mod+e layout toggle tabbed split

# =====
# Workspace control
# =====

# Workspace name 1 ~ 10
set $ws1 "1"
set $ws2 "2"
set $ws3 "3"
set $ws4 "4"
set $ws5 "5"
set $ws6 "6"
set $ws7 "7"
set $ws8 "8"
set $ws9 "9"
# set $ws10 "10"

# Switch to workspace
bindsym $mod+1 workspace number $ws1
bindsym $mod+2 workspace number $ws2
```

```

bindsym $mod+3 workspace number $ws3
bindsym $mod+4 workspace number $ws4
bindsym $mod+5 workspace number $ws5
bindsym $mod+6 workspace number $ws6
bindsym $mod+7 workspace number $ws7
bindsym $mod+8 workspace number $ws8
bindsym $mod+9 workspace number $ws9
# bindsym $mod+0 workspace number $ws10

# Move focused window to particular workspace
bindsym $mod+Shift+1 move container to workspace number $ws1
bindsym $mod+Shift+2 move container to workspace number $ws2
bindsym $mod+Shift+3 move container to workspace number $ws3
bindsym $mod+Shift+4 move container to workspace number $ws4
bindsym $mod+Shift+5 move container to workspace number $ws5
bindsym $mod+Shift+6 move container to workspace number $ws6
bindsym $mod+Shift+7 move container to workspace number $ws7
bindsym $mod+Shift+8 move container to workspace number $ws8
bindsym $mod+Shift+9 move container to workspace number $ws9
bindsym $mod+Shift+0 move container to workspace number $ws10

# =====
# Program launch shortcuts
# =====

# Terminal
bindsym $mod+Return exec alacritty

# Browser
set $browser google-chrome-stable
bindsym $mod+b exec $browser

# Open file manager
# bindsym $mod+f exec "pcmanfm --new-win $(pwd) &"

# Open ranger
bindsym $mod+r exec alacritty --command ranger

# Take screenshot
bindsym --release $alt+$mod+p exec "scrot -s ~/Screenshots/screenshot-$(date +%F_%T).png -e 'xclip -selection c -t image/png < $f'"
bindsym Control+$mod+p exec "scrot ~/Screenshots/screenshot-$(date +%F_%T).png -e 'xclip -selection c -t image/png < $f'"

# start dmenu (a program launcher)
#
# There also is the (new) i3-dmenu-desktop which only displays applications
# shipping a .desktop file. It is a wrapper around dmenu, so you need that
# installed.

```

```
# bindsym $mod+d exec --no-startup-id i3-dmenu-desktop
# bindsym $mod+d exec dmenu_run
# bindsym $mod+d exec dmenu_run
bindsym $alt+space exec --no-startup-id i3-dmenu-desktop

# reload the configuration file
# bindsym $mod+Shift+c reload
# restart i3 inplace (preserves your layout/session, can be used to upgrade
i3)
# bindsym $mod+Shift+r restart
# exit i3 (logs you out of your X session)
bindsym $mod+Shift+e exec "i3-nagbar -t warning -m 'You pressed the exit
shortcut. Do you really want to exit i3? This will end your X session.' -B
'Yes, exit i3' 'i3-msg exit'"

# Toggle `screenkey`
bindsym $mod+s exec --no-startup-id ~/scripts/toggle-screenkey.sh

# Launch WxWork
bindsym $mod+w exec --no-startup-id ~/scripts/wechat_work.sh

# =====
# Force some launch programs open in floating mode or control window open
style
# =====

# Make sure dialog window not outside of screen!
floating_maximum_size 1920 x 1080

for_window [class="(i)google-chrome"] border pixel 1
for_window [class="(i)vlc"] border pixel 1
for_window [title="SimpleScreenRecord"] floating enable border pixel 1
for_window [class="wxwork.exe"] floating enable border pixel 1

# for_window [window_type="dialog"] floating enable border pixel 1
# for_window [class="Skype"] floating enable border normal
# for_window [class="(i)virtualbox"] floating enable border normal

# =====
# Display styles control
# =====

# Thin border
# for_window [class="^.*"] border 1pixel
# new_window 1pixel

# With gaps
gaps inner 10
```

```

# Window colors

# Orange and red theme
# set $bg_color          #E66B17
# set $ibg_color          #551E22

# Green theme
# set $bg_color          #5DAC81
# set $ibg_color          #6A8372

set $bg_color          #5DAC81
set $ibg_color          #6A8372
set $border_color        #5DAC81
set $text_color          #1C1C1C
set $itext_color         #000000
set $ubg_color           #000000

#                                     border      background      text
indicator
client.focused           $border_color   $bg_color       $text_color
$bg_color
client.focused_inactive  $ibg_color     $ibg_color     $itext_color
$ibg_color
client.unfocused          $ibg_color     $ibg_color     $itext_color
$ibg_color
client.urgent              $ubg_color     $ubg_color     $text_color
$ubg_color
# client.placeholder        #000000  #0c0c0c  #ffffff  #000000  #0c0c0c

# =====
# i3 status control
#
# Start i3bar to display a workspace bar (plus the system information
i3status
# finds out, if available)
# =====

set $bar_bg_color          #1C1C1CD9
set $bar_text_color         #FFFFFFFC
set $bar_itext_color        #616161
set $bar_ws_bg_color        #6A8372
set $bar_ws_bg_color_2      #5DAC81
set $bar_separator_color    #5DAC81

bar {
    # Run the `i3block` command and get back the standard output as the bar
content
    status_command i3status -c ~/.config/i3/i3status.conf
    # status_command i3blocks -c ~/.config/i3/i3blocks.conf

    # Bar transparent effect
}

```

```
# Even enabled this flag, you still need to apply the "transparency hex"
value to
# the bar color for getting the real transparency effect. You can find
the hex code
# from here:
# https://gist.github.com/lopspower/03fb1cc0ac9f32ef38f4
i3bar_command i3bar --transparency

# Stay on the top/bottom
position    top

# Render to the primary screen only
output   primary

# Hide the application icon tray area (which always stay on the most-
right)
# tray_output none
tray_output primary

#
font pango:SourceCodePro 10
# font pango:monospace 10

# The separator
# separator_symbol    "|"
separator_symbol    "¤"

# Workspace
workspace_buttons yes
workspace_min_width 25
# strip_workspace_numbers yes
# binding_mode_indicator no
colors {
    background    $bar_bg_color
    statusline    $bar_text_color
    separator    $bar_separator_color

    focused_workspace    $bar_ws_bg_color_2    $bar_ws_bg_color_2
$bar_text_color    $bar_ws_bg_color_2
    active_workspace    $bar_ws_bg_color_2    $bar_ws_bg_color_2
$bar_itext_color    $bar_ws_bg_color_2
    inactive_workspace $bar_ws_bg_color    $bar_ws_bg_color
$bar_itext_color    $bar_ws_bg_color
    urgent_workspace    $bar_ws_bg_color    $bar_ws_bg_color
$bar_text_color    $bar_ws_bg_color
}
}

# =====
# System control
```

```

# =====
set $mode_system System (l) Lock, (o) Logout, (r) Reboot, (Shift+s) Shutdown
mode "$mode_system" {
    bindsym l exec --no-startup-id i3exit lock, mode "default"
    bindsym o exec --no-startup-id i3exit logout, mode "default"
    bindsym r exec --no-startup-id i3exit reboot, mode "default"
    bindsym Shift+s exec --no-startup-id i3exit shutdown, mode "default"
    bindsym Return mode "default"
    bindsym Escape mode "default"
}

bindsym $mod+0 mode "$mode_system"

# =====
# Unknow purpose yet
# =====

# move the currently focused window to the scratchpad
bindsym $mod+Shift+minus move scratchpad

# Show the next scratchpad window or hide the focused scratchpad window.
# If there are multiple scratchpad windows, this command cycles through them.
bindsym $mod+minus scratchpad show

#####
# automatically start i3-config-wizard to offer the user to create a
# keysym-based config which used their favorite modifier (alt or windows)
#
# i3-config-wizard will not launch if there already is a config file
# in ~/.config/i3/config (or $XDG_CONFIG_HOME/i3/config if set) or
# ~/.i3/config.
#
# Please remove the following exec line:
#####
exec i3-config-wizard

```

Special keybinding

You need to install the utilities below:

- **xmodmap**: A utility for modifying keymaps and pointer button mappings in Xorg.
- **xev**: A utility which we need it to see the keycode for each key.

After that, run the commands below to generate a copy with the current **keyboard key code -> key symbol** mapping.

```
xmodmap -pke > ~/.Xmodmap
```

Inside that file, it contains the keybinding with the syntax like below:

```
keycode 9 = Escape NoSymbol Escape
```

Then you can search `keycode` or `key symbol` in that file and change the mapping. Just in case, if you will switch to different keyboard very often, then you should use `keycode` to set your own keybinding!!!

How to know the `keycode`? Just run `xev` and press any key, it prints out the hardware `keycode`.

Here is the some `keycode` you might interest in:

```
133 - Left Super/Win key, Left Command key (Apple Keyboard)
64 - Left Alt
37 - Left Control
66 - Caps_Lock
9 - Escape
```

Let's do a real example for mapping `Caps_Lock` to `Escape`

`vim ~/.Xmodmap` then find the `keycode 66` and replace the settings like below:

```
keycode 66 = Escape NoSymbol Escape
```

Save and exit.

How to load the `~/.Xmodmap` when `i3` reload?

`vim ~/.config/i3/config` and add the settings below:

```
# It will reload `~/.Xmodmap` every time when `i3` reload
exec_always sleep 1; xmodmap ~/.Xmodmap
```

And pay attention on that: Even the `Caps_Lock` key already mapped to `Escape`, but the caplock functionality still works!!!

So always tap **Caps_Lock** twice to make sure it doesn't switch uppercase mode!!!:)

Advanced keybinding

In **Arch Linux**, it uses the key combination below by default:

- **Control + c**: Copy
- **Control + v**: Paste
- **Control + f**: Find or search
- **Control + t**: Open new tab
- **Control + w**: Close current tab

But if you're a Mac user, then you will very difficult to deal with those settings. Is that possible to change that?

YES, you can use **xdotool** combine with **i3** keybinding to do that:

vim `~/.config/i3/config` and add the following settings:

```
# =====
# Special key mapping
# =====

# `cmd+c` -> `ctrl+c` (Copy)
bindsym --release $mod+c exec --no-startup-id xdotool key --clearmodifiers ctrl+c

# `cmd+v` -> `ctrl+v` (Paste)
bindsym --release $mod+v exec --no-startup-id xdotool key --clearmodifiers ctrl+v

# `cmd+f` -> `ctrl+f` (Find)
bindsym --release $mod+f exec --no-startup-id xdotool key --clearmodifiers ctrl+f

# `cmd+t` -> `ctrl+t` (Open new tab)
bindsym --release $mod+t exec --no-startup-id xdotool key --clearmodifiers ctrl+t

# `cmd+w` -> `ctrl+w` (Close current tab)
bindsym --release $mod+w exec --no-startup-id xdotool key --clearmodifiers ctrl+w
```

Switching keyboard in real-time

If you have multiple keyboards, how do you switch them in **Arch Linux** in real-time?

For example, you have different keyboards below:

- Apple keyboard (embedded in your MBP) or separated Apple wireless keyboard
- Varmilo mechanical keyboard

And you want to switch between them in real-time, how to do that?

Let's make some requirements for the switching task below:

- No matter switch to which keyboard, the **i3** configuration settings below no need to be changed:

```
#  
=====  
  
# Set '$mod' to `Mod4` (WinKey or CmdKey)  
#  
=====  
  
set $mod Mod4  
set $alt Mod1
```

- **Apple keyboard**

- Use **Super_L** (Left Command) key as the **i3** \$Mod key
- Use **Caps Lock** key as **Escape** key
- Use **Alt_L** (Left Alt) key as Mod1

- **Varmilo mechanical keyboard**

- Exchange the **Super_L** key and **Alt_L** key, as they're in a different position with **Apple Keyboard** and you don't like to change your pressing habit

- Use **Super_L** (Left Command) key as the **i3** \$Mod key
- Use **Caps Lock** key as **Escape** key
- Use **Alt_L** (Left Alt) key as Mod1

Let's do it.

- **Apple keyboard**

- Create **~/scripts/Xmodmap-for-apple-keyboard** from current keybinding:

```
xmodmap -pk > ~/scripts/Xmodmap-for-apple-keyboard
```

- Open **~/scripts/Xmodmap-for-apple-keyboard** and add some settings below:
 - Add to the beginning of the file:

```
clear lock  
clear mod1  
clear mod4
```

- Add to the bottom of the file:

```
add mod1 = Alt_L  
add mod4 = Super_L
```

- Edit the setting like below:

```
keycode 66 = Escape NoSymbol Escape
```

- Create **~/scripts/change-keybinding-for-apple-keyboard.sh** with the following settings:

```
#!/bin/bash  
cp -rvf ~/scripts/Xmodmap-for-apple-keyboard ~/.Xmodmap  
i3-msg restart
```

- Make it executable

```
chmod +x ~/scripts/change-keybinding-for-apple-keyboard.sh
```

- **Apple keyboard** for **colemak** keyboard layout

- Set to **colemak** layout before you continue:

```
setxkbmap us colemak
```

Right now, your keyboard key mapping should be load as **colemak**.

- Create **~/scripts/Xmodmap-colemak-for-apple-keyboard** from current keybinding:

```
xmodmap -pke > ~/scripts/Xmodmap-colemak-for-apple-keyboard
```

- Open **~/scripts/Xmodmap-for-apple-keyboard** and add some settings below:

- Add to the beginning of the file:

```
clear lock
clear mod1
clear mod4
```

- Add to the bottom of the file:

```
add mod1 = Alt_L
add mod4 = Super_L
```

- Edit the setting like below:

```
keycode 66 = Escape NoSymbol Escape
```

- Create **~/scripts/change-keybinding-for-apple-keyboard-colemak.sh** with the following settings:

```
#!/bin/bash
cp -rvf ~/scripts/Xmodmap-colemak-for-apple-keyboard ~/.Xmodmap
i3-msg restart
```

- Make it executable

```
chmod +x ~/scripts/change-keybinding-for-apple-keyboard-colemak.sh
```

- **Varmilo mechanical keyboard**

- Create `~/scripts/Xmodmap-for-varmilo-keyboard` from current keybinding:

```
xmodmap -pke > ~/scripts/Xmodmap-for-varmilo-keyboard
```

- Open `~/scripts/Xmodmap-for-varmilo-keyboard` and add some settings below:

- Add to the beginning of the file:

```
clear lock
clear mod1
clear mod4
```

- Add to the bottom of the file:

```
add mod1 = Alt_L
add mod4 = Super_L
```

- Edit the setting like below:

```
keycode 66 = Escape NoSymbol Escape
keycode 64 = Super_L NoSymbol Super_L
keycode 133 = Alt_L Meta_L Alt_L Meta_L
```

- Create `~/scripts/change-keybinding-for-varmilo-keyboard.sh` with the following settings:

```
#!/bin/bash
cp -rvf ~/scripts/Xmodmap-for-varmilo-keyboard ~/.Xmodmap
i3-msg restart
```

- Make it executable

```
chmod +x ~/scripts/change-keybinding-for-varmilo-keyboard.sh
```

After that, you can switch to any keyboard at anytime you want in real-time.

```
# For Apple keyboard  
~/scripts/change-keybinding-for-apple-keyboard.sh  
  
# For Apple keyboard colemak  
~/scripts/change-keybinding-for-apple-keyboard-colemak.sh  
  
# For Varmilo keyboard  
~/scripts/change-keybinding-for-varmilo-keyboard.sh
```

Install Ranger

- Install

```
sudo pacman -S ranger
```

During the installation process, it will list another optional packages you might needed:

```
# Optional dependencies for ranger
# atool: for previews of archives
# elinks: for previews of html pages
# ffmpegthumbnailer: for video previews
# highlight: for syntax highlighting of code
# libcaca: for ASCII-art image previews
# lynx: for previews of html pages
# mediainfo: for viewing information about media files
# odt2txt: for OpenDocument texts
# perl-image-exiftool: for viewing information about media files
# poppler: for pdf previews
# python-chardet: in case of encoding detection problems
# sudo: to use the "run as root"-feature
# transmission-cli: for viewing bittorrent information
# ueberzug: for previews of images
# w3m: for previews of images and html pages
```

You just pick what you want. For example:

```
sudo pacman -S ueberzug highlight mediainfo sudo poppler
```

- Generate your own configuration

You need to run the command below to generate a copy of the **ranger** rc configuration, it will saved to your **~/.config/ranger/rc.conf**.

```
ranger --copy-config=rc
```

- The normal daily keybinding you need to know (just in case if you're new to **ranger**)

Keybinding	Description
------------	-------------

Keybinding	Description
Basic	<i>Basic file and folder operations</i>
yy	Copy current file or folder, then you can to to any folder and paste it
dd	Cut current file or folder, then you can to to any folder and paste it
dD	Delete the file same with <code>rm -rf</code> , need to press enter to confirm
pp	paste the last copied file or folder to current folder
yp	(Yank full path), copy the full path with filename to clipboard
yd	(Yank dir), copy the full path WITHOUT filename to clipboard
yn	(Yank name), copy only the filename to clipboard
cw	(Change word), rename current file or folder
I	(Insert), rename, cursor position will be stopped at the beginning of the filename. <pre>:rename ranger-fzf-2.png</pre>
a	(append), rename, cursor position will be stopped at the end of the filename. <pre>:rename ranger-fzf-2.png</pre>
A	(append at the end), rename, cursor position will be stopped at the end of the extension name. <pre>:rename ranger-fzf-2.png</pre>
cw	(Change word), rename current file or folder
oc	Order/Sort by change time (latest to older)
oC	Order/Sort by change time (older to latest)
ot	Order/Sort by type
oT	Order/Sort by type (reversed)
on	Order/Sort by name
oN	Order/Sort by name (reversed)
Control+h	Toggle show hidden file
:mkdir xx	Create new folder
:touch xx	Create empty file

Keybinding	Description
Select	<i>Select/Mark mode</i>
va	Select all or unselect all
V	Toggle select mode, move your cursor to select file in select mode
Space	Toggle select mode for single file
Change folder	<i>Change folder quickly</i>
gh	Go home (to <code>\$HOME</code>)
ge	Go to <code>/etc</code>
gu	Go to <code>/usr</code>
gv	Go to <code>/var</code>
Shell	<i>Shell related operations</i>
du	Run <code>du</code> (disk usage) command on current folder and sort the result by size
#	Type your command to run in shell with current path, wait for press <code>enter</code> to return.
Shift+s	Open terminal with current folder/path. When you done, type <code>exit</code> to back to <code>ranger</code> .

- Add customization configuration if you needed

Here are some very useful settings maybe can help you, `vim` `~/.config/ranger/rc.conf` and pick what you want to try. You should search `set xxxx` and replace to the below settings.

```

# Only show 2 columns with 1:2 width
set column_ratios 2,4

# Change color themes
set colorscheme jungle

# Show both borders, looks comfortable for some people
# set draw_borders separators
# set draw_borders outline
# set draw_borders none
set draw_borders both

# Sync the folder name to window title
set update_title true

# Display `~` related to your home folder, save some display space
set tilde_in_titlebar true

# Show the relative line number. If you use this feature in `vim`, then
# you will like it, it can help u fast jump to the specified line
set line_numbers relative

# Just add any `go to XXX` keybinding for yourself, For example:
map gd cd ~/Downloads
# map gr cd ~/Rust
# map gs cd ~/Screenshots
# map gb cd ~/my-shell/backup
# map gp cd ~/xxx/yyy/zzz/...very deep path/YOUR_PROJECT_FOLDER

# Replace the default `du` command, as it doesn't sort by size by default
# map du shell -p du --max-depth=1 -h --apparent-size
map du shell -p du --max-depth=1 -h --apparent-size | sort -rh

```

More powerful features:

- Add **fuzzy finder** to **ranger**
 - First you need to install **fuzzy finder** by running **sudo pacman -S fzf**

- Add `~/.config/ranger/commands.py` with the following settings

```
from ranger.api.commands import Command

class fzf_select(Command):
    """
    :fzf_select

    Find a file using fzf.

    With a prefix argument select only directories.

    See: https://github.com/junegunn/fzf
    """

    def execute(self):
        import subprocess
        import os.path
        if self.quantifier:
            # match only directories
            command = "find -L . \( -path '*/\.*' -o -fstype 'dev' -o -fstype 'proc' \) -prune \
                       -o -type d -print 2> /dev/null | sed 1d | cut -b3- | fzf +m"
        else:
            # match files and directories
            command = "find -L . \( -path '*/\.*' -o -fstype 'dev' -o -fstype 'proc' \) -prune \
                       -o -print 2> /dev/null | sed 1d | cut -b3- | fzf +m"

        fzf = self.fm.execute_command(command,
                                      universal_newlines=True,
                                      stdout=subprocess.PIPE)
        stdout, stderr = fzf.communicate()
        if fzf.returncode == 0:
            fzf_file = os.path.abspath(stdout.rstrip('\n'))
            if os.path.isdir(fzf_file):
                self.fm.cd(fzf_file)
            else:
                self.fm.select_file(fzf_file)
```


- Add keybinding to `~/.config/ranger/rc.conf`

```
map <c-f> fzf_select
```

After that, open `ranger` and press `Control + f` and type any part of the file name, you got crazy fast search result:

```
arch-linux/installation-tutorial-book/book/images/blueman-assistant-2...
arch-linux/installation-tutorial-book/book/images/blueman-assistant-3...
arch-linux/installation-tutorial-book/book/images/blueman-assistant-1...
arch-linux/installation-tutorial-book/src/images/blueman-assistant-2.png
arch-linux/installation-tutorial-book/src/images/blueman-assistant-3.png
arch-linux/installation-tutorial-book/src/images/blueman-assistant-1.png
arch-linux/installation-tutorial-book/book/images/blueman-manager-1.png
arch-linux/installation-tutorial-book/book/images/blueman-manager-2.png
arch-linux/installation-tutorial-book/src/images/blueman-manager-1.png
> arch-linux/installation-tutorial-book/src/images/blueman-manager-2.png
10/803
> blueman
```

press `Enter` to go to the selected file:

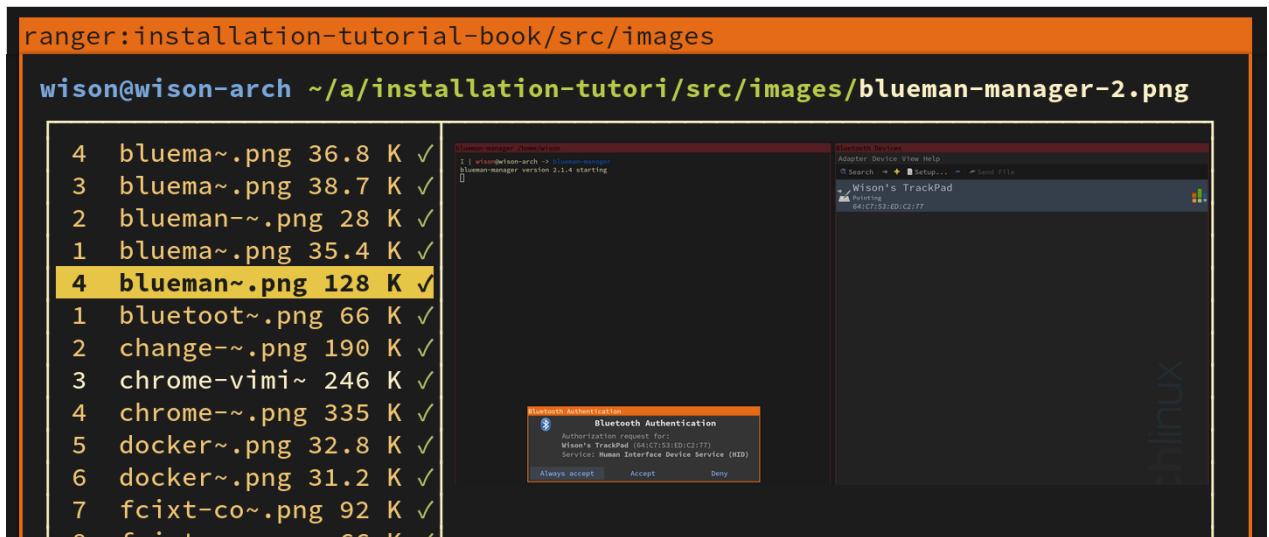

- Fast rename multiple selected files

`vim ~/.config/ranger/rc.conf`, and then replace the below keybinding to overwrite the default one:

```
map cw eval fm.execute_console("bulkrename") if
fm.thisdir.marked_items else fm.open_console("rename ")
```

After that, select all the files you want to rename together like below:

	File	Size	Status
5	blueman-assistant-1.png	36.8 K	✓
4	blueman-assistant-2.png	38.7 K	✓
3	blueman-assistant-3.png	28 K	✓
2	blueman-manager-1.png	35.4 K	✓
1	blueman-manager-2.png	128 K	✓
5	bluetoothctl.png	66 K	✓
1	change-playback-volume.png	190 K	✓
2	chrome-vimium-extension.fzf_file	246 K	✓
2	chrome-vimium-extension.vim_keybindings.png	225 K	✓

Then press **cw**, it will show your selected file name in your default editor.
Change it and save it, done.

```
1 blueman-assistant-1.png
  1 blueman-assistant-2.png
  2 blueman-assistant-3.png
  3 blueman-manager-1.png
  4 blueman-manager-2.png
```

About GPU

- Identify your graphics card:

```
lspci -v | grep -A1 -e VGA -e 3D

# It will print something like this:
#
# VGA compatible controller: Intel Corporation Crystalwell Integrated
# Graphics Controller (rev 08) (prog-if 00 [VGA controller])
# Subsystem: Apple Inc. Device 0147
```

So you can know that's a GPU integrated inside Intel CPU and 'Subsystem' show you the specific model for you to find the driver

- Install the video driver

```
# Driver - `xf86-video-BRAND_NAME_HERE`  
# OpenGL - `lib32-mesa` if that's Intel  
# OpenGL (multilib) - `mesa` if that's Intel  
sudo pacman -S xf86-video-intel mesa mesa-demos  
sudo pacman -Sy
```

[here](#) is the full list for all GPU brands.

After that, you can run the utilities below to check your OpenGL ability:


```
# Check the OpenGL version  
glxinfo | grep "OpenGL version"  
  
# Test the OpenGL render framerate  
glxgears
```

Fix sound issue

- Install the packages below:

```
sudo pacman -Sy pulseaudio alsa-utils  
  
# Reboot
```

- Run **alsamixer** and tune your sound setting
 - Press **F6** to choose your major audio playback device:

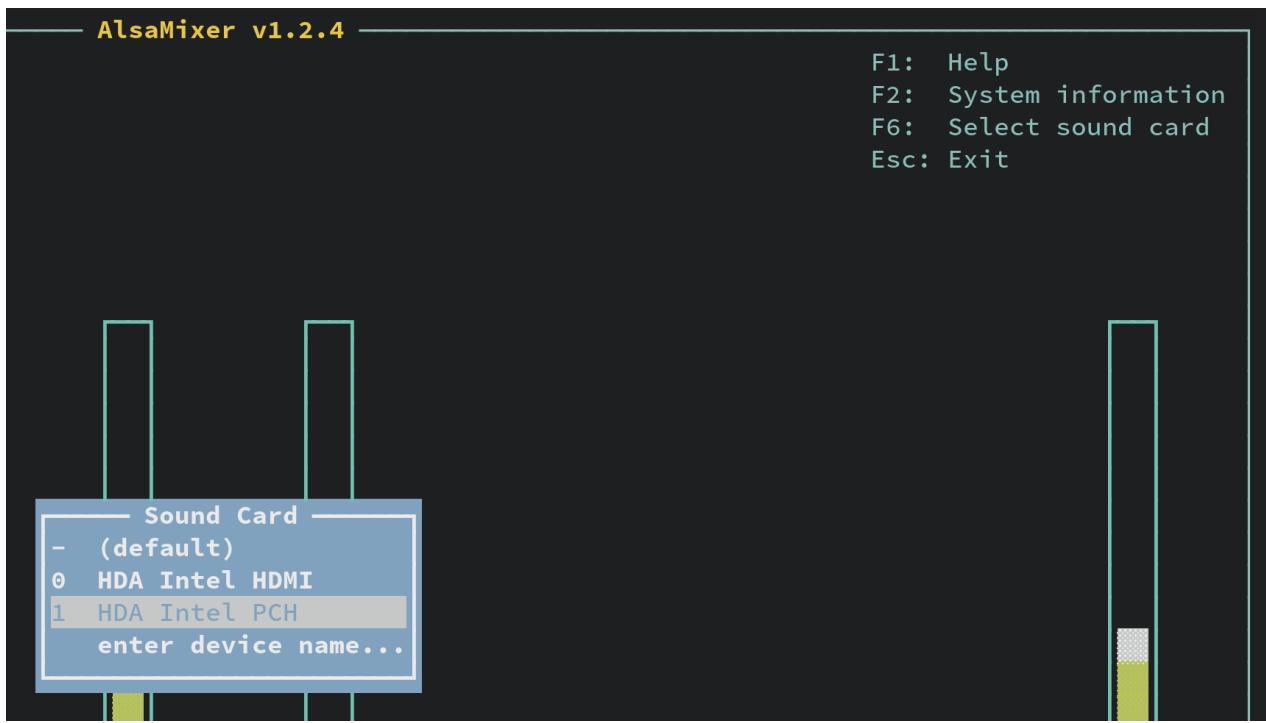

- After selecting your correct audio playback device, press **F3** to setup the **Playback** volume. Use left/right arrow key to switch item and use Up/Down arrow key to change the volume.



- You should be able to control with your **volume up/down** key on your keyboard

If you installed **i3**, by default it has the volume keybindings like below:

```

#
=====
# Audio and volume control
#
=====

# Use pactl to adjust volume in PulseAudio.
set $refresh_i3status killall -SIGUSR1 i3status
bindsym XF86AudioRaiseVolume exec --no-startup-id pactl set-sink-volume
@DEFAULT_SINK@ +10% && $refresh_i3status
bindsym XF86AudioLowerVolume exec --no-startup-id pactl set-sink-volume
@DEFAULT_SINK@ -10% && $refresh_i3status
bindsym XF86AudioMute exec --no-startup-id pactl set-sink-mute
@DEFAULT_SINK@ toggle && $refresh_i3status
bindsym XF86AudioMicMute exec --no-startup-id pactl set-source-mute
@DEFAULT_SOURCE@ toggle && $refresh_i3status


```

It should work out-of-the-box.

- Optionally, you can install **pavucontrol** GUI volume control app

```
sudo pacman -Sy pavucontrol
```

It looks like this:

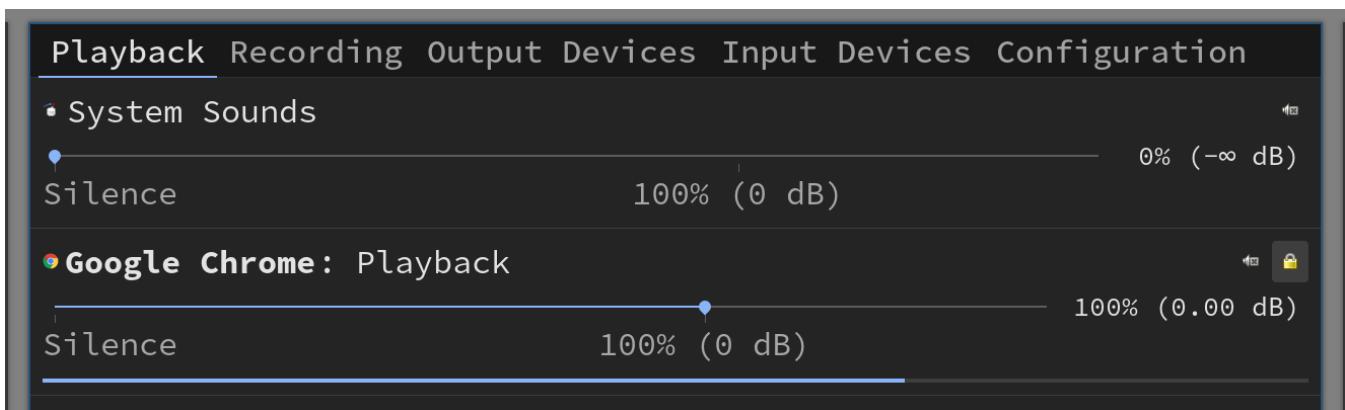

Fix webcam issues

- Check your **webcam** whether being detected

- If you got **v4l-utils**, then try to run:

```
v4l2-ctl --list-devices

# Cannot open device /dev/video0, exiting.
```

- If you got **vlc**, then just run:

```
vlc v4l2:// :input-slave=alsa:// :v4l-vdev="/dev/video0"
```

Or open **vlc** and choose **media --> Open Capture Device** and test it.

Basically, if you don't have **/dev/video0** device, then your webcam is not supported by the default kernel driver. So, you need to solve that manually.

- List your hardware and find the driver

First you need to know what webcam hardware you have on your computer by running:

```
sudo lspci -v | grep -e Cam -A18

# 04:00.0 Multimedia controller: Broadcom Inc. and subsidiaries 720p
FaceTime HD Camera
#           Subsystem: Broadcom Inc. and subsidiaries 720p FaceTime HD Camera
#           Flags: bus master, fast devsel, latency 0, IRQ 39
#           Memory at a0a00000 (64-bit, non-prefetchable) [size=64K]
#           Memory at 80000000 (64-bit, prefetchable) [size=256M]
#           Memory at a0900000 (64-bit, non-prefetchable) [size=1M]
#           Capabilities: [48] Power Management version 3
#           Capabilities: [58] MSI: Enable+ Count=1/1 Maskable- 64bit+
#           Capabilities: [68] Vendor Specific Information: Len=44 <?>
#           Capabilities: [ac] Express Endpoint, MSI 00
#           Capabilities: [100] Advanced Error Reporting
#           Capabilities: [13c] Device Serial Number 00-00-00-ff-ff-00-00-00
#           Capabilities: [150] Power Budgeting <?>
#           Capabilities: [160] Virtual Channel
#           Capabilities: [1b0] Latency Tolerance Reporting
#           Capabilities: [220] Physical Resizable BAR
#           Kernel driver in use: bdc-pci
#           Kernel modules: bdc_pci
```

For my case, even the kernel driver `bdc_pci` is loaded, but the webcam still not working. That means the default `bdc_pci` driver is not correct or not support the `Apple MacBook Pro FaceTime HD Camera` provided by `Boradcom Inc.`.

After that, you can go to [here](#) to find your webcam driver if it exists there.

- Install `linux-header` if you don't have it

before install driver, you better to check whether the `linux-headers` is installed or not by runing:

```
pacman --query | sort | grep linux
```

If you don't have `linuxXXX-headers` (`XXX` is you kernel version which you can get from `uname -sr`), then you need to install the `linux-headers` first.

```
sudo pacman -S linux-headers
```

Otherwise, you might get error like below during installing your webcam driver:

```
Unable to install module bcwc-pcie/r245.82626d4 for kernel *: Missing
kernel headers.
```

- Install your webcam driver

For my case, I will install the `bcwc-pcie-git` driver via [AUR](#).

```
yay -S bcwc-pcie-git
```

After that, the new module `facetimehd` will be installed and it conflicts with the `bdc_pci` module. So, you need to disable it by doing this:

`sudo vim /etc/modprobe.d/blacklist.conf` with the following settings:

```
blacklist bdc_pci
install bdc_pci /bin/false
```

Then next reboot, it will load the correct module to serve your webcam.

If you don't want to wait for the next reboot, then just do like this:

```
# Unload all of them
modprobe -r facetimehd
modprobe -r bdc_pci

# Then load the new module
modprobe facetimehd
```

Right now, it should work:

```
v4l2-ctl --list-devices

# Apple Facetime HD (PCI:0000:04:00.0):
#      /dev/video0
```

Support chinese

- Install chinese input method

```
sudo pacman -S fcitx fcitx-im fcitx-configtool
```

After finishing, it will create an auto start desktop link in here:

```
/etc/xdg/autostart/fcitx-autostart.desktop
```

- Add input method configuration file

Put the following settings into `~/.xprofile`:

```
export GTK_IM_MODULE=fcitx
export QT_IM_MODULE=fcitx
export XMODIFIERS="@im=fcitx"
```

- Auto start `fcitx` in your `i3` configuration

```
vim ~/.config/i3/config
```

 and add the following settings:

```
# Load chinese input method
exec_always fcitx
```

Make sure you reboot to take effect, or you can reboot after installing chinese fonts below.

- Install chinese fonts

```
yay -S wqy-bitmapfont wqy-microhei \
wqy-microhei-lite \
wqy-zenhei \
adobe-source-han-mono-cn-fonts \
adobe-source-han-sans-cn-fonts \
adobe-source-han-serif-cn-fonts
```

Now, relogin to take effect.

- Install extra input methods

If you need 仓颉、五笔等输入法

```
sudo pacman S fcitx-table-extra
```

If you need 搜狗拼音五笔混输

```
# SouGou PinYin (it includes WuBi)
yay -S fcitx-sogoupinyin
```

```
translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/picture/single-select-white.png' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/picture/single-select.png' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/picture/sogou130x130.png' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/picture/test.png' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/sogou-logo.png' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/resources/skin/经典酷黑/configtool/sogouImeService.qss' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/shell/dict/PCPYDict/scd/古诗词名句【官方推荐】.scel' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/shell/dict/PCPYDict/scd/成语俗语【官方推荐】.scel' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/shell/dict/PCPYDict/scd/行政区划【官方推荐】.scel' to UTF-8: Can't translate pathname 'opt/sogoupinyin/files/share/shell/dict/PCPYDict/scd/计算机词汇大全【官方推荐】.scel' to UTF-8=> Leaving fakeroot environment.
=> Finished making: fcitx-sogoupinyin 2.4.0.2732-1 (Wed 23 Dec 2020 03:02:56 PM NZDT)
=> Cleaning up...
[sudo] password for wison:
loading packages...
resolving dependencies...
looking for conflicting packages...


Packages (1) fcitx-sogoupinyin-2.4.0.2732-1

Total Installed Size: 290.62 MiB


:: Proceed with installation? [Y/n]
(1/1) checking keys in keyring
(1/1) checking package integrity
(1/1) loading package files
(1/1) checking for file conflicts
(1/1) checking available disk space
:: Processing package changes...
(1/1) installing fcitx-sogoupinyin
:: Running post-transaction hooks...
(1/2) Arming ConditionNeedsUpdate...
(2/2) Updating icon theme caches...
I | wison | /home/wison ⌛ dust -d1 /opt/sogoupinyin/
4.0K └── info
140K └── entries
286M └── files
287M └── sogoupinyin
```

- About the configuration

After re-login, you should be able to see the `fcixt-configtool` icon shows on the bottom-right of your screen. Click on it, it will show a menu like below:

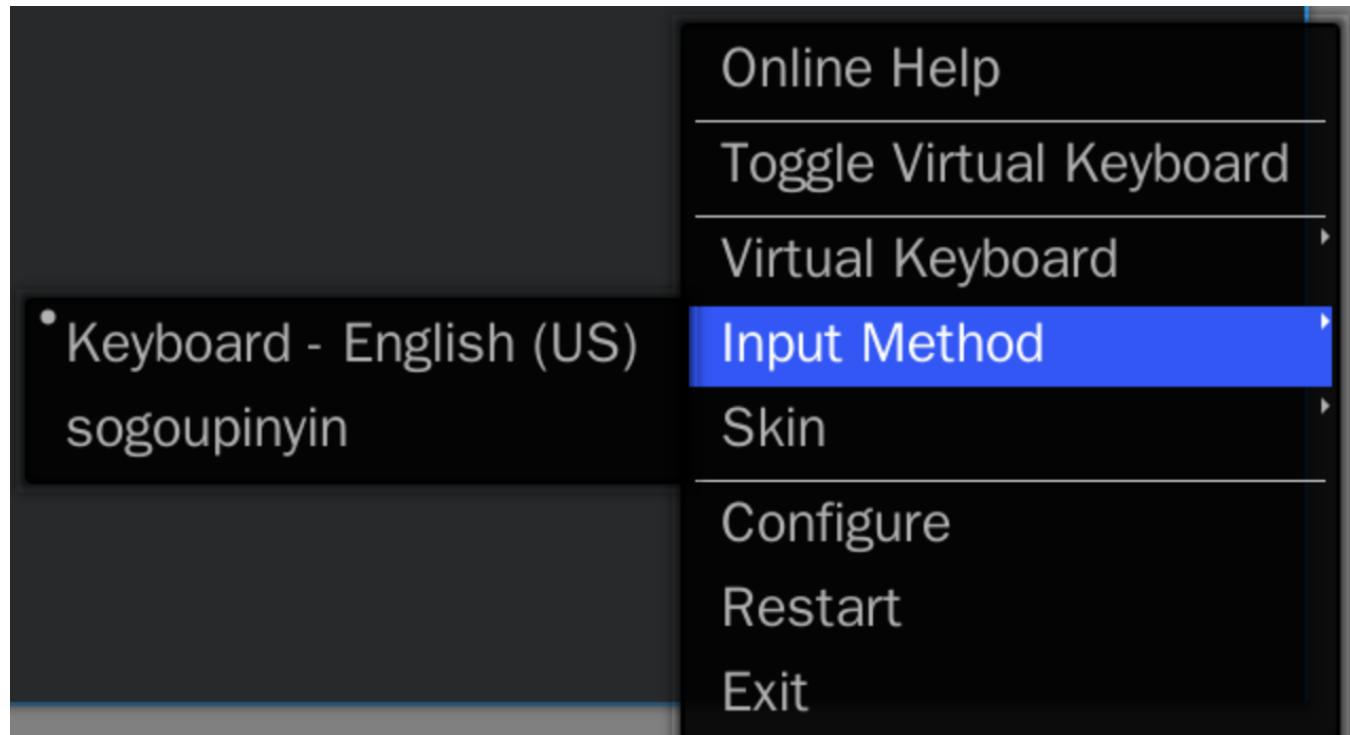

Click on `configure`, then you will see the configuration UI below:

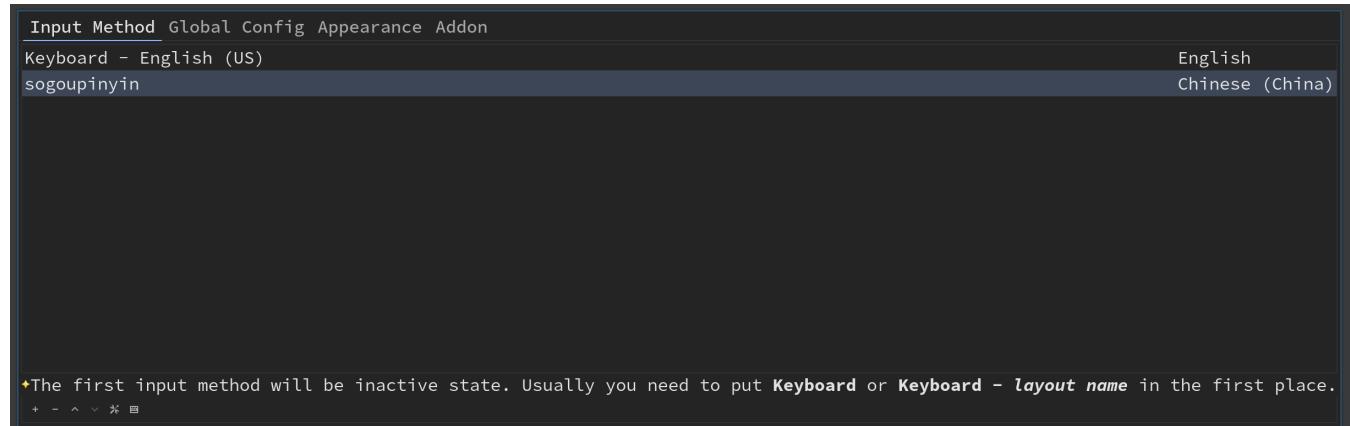


If you don't see your installed input method, then click the left-bottom button to add it.

The default shortcuts


- `Ctrl+Space`: Trigger input method. If you only install single input method (`fcitx-sogoupinyin`), then it works like toggle chinese input method.

- **Shift+Ctrl+f**: Switch between **Traditional Chinese** and **Simplified Chinese**.

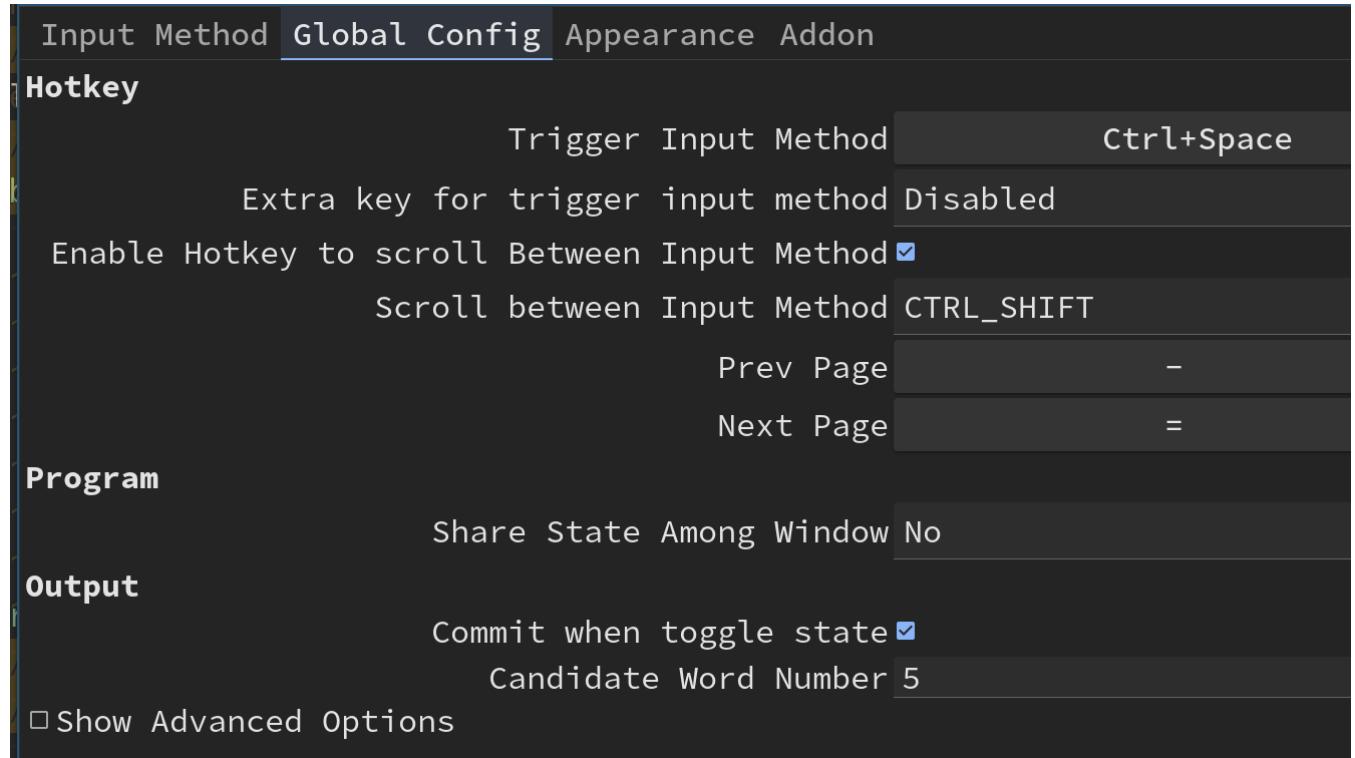

Press **Ctrl + Space**, you should able to see your input method, then you can configure it if you wanted:



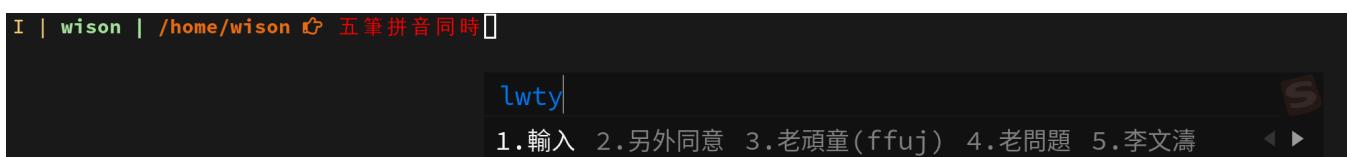

Install docker

- Installation

```
sudo pacman -S docker
```

What components are installed by default?

```
Packages (4) bridge-utils-1.7-1 containerd-1.4.3-1 runc-1.0.0rc92-1 docker-1:19.03.14-3
```

```
Total Download Size: 87.84 MiB
Total Installed Size: 375.75 MiB
```

- Handle `docker` as a service

- Query status

```
sudo systemctl status docker
```

- Start

```
sudo systemctl start docker
```

- Stop

```
sudo systemctl stop docker
```

- Enable auto start

```
sudo systemctl enable docker
```

- Disable auto start

```
sudo systemctl disable docker
```

Of course you can add the commands above to your shell configuration as an `alias` or `abbreviation`. For example, `fish` abbreviation sample:

```
abbr startdocker "sudo systemctl start docker"
abbr stopdocker "sudo systemctl stop docker"
```

- Run `docker` client without `sudo`

The `Docker` daemon binds to a `Unix socket` instead of a TCP port. By default that `Unix socket` is owned by the user `root` and other users can only access it using `sudo`. The `Docker` daemon always runs as the `root` user.

That means you have run `sudo docker COMMAND` rather than `docker COMMAND`!

If you don't want to preface the `docker` command with `sudo`, add your linux account to `docker` group. When the `Docker` daemon starts, it creates a `Unix socket` accessible by members of the `docker` group.

By default, the `docker` group will be created during the installation:

```
::: Running post-transaction hooks...
(1/4) Creating system user accounts...
Creating group docker with gid 972.
```

You can confirm that by running the command below:

```
cat /etc/group | grep docker
```

If it doesn't exists, then create it by yourself:

```
# Optional step!
sudo groupadd docker
```

Now, add your linux account into the `docker` group:

```
sudo usermod -aG docker $USER
```

You need to re-login to take effect.

After that, run `docker info` (after running `docker` service) to test the permission, should be ok already.

- Install `docker-compose`

```
sudo bash -c 'curl -L  
"https://github.com/docker/compose/releases/download/1.27.4/docker-  
compose-$(uname -s)-$(uname -m)" \  
-o /usr/bin/docker-compose && chmod +x /usr/bin/docker-compose'
```

Screen recording

- **screenkey**


- Install

```
sudo pacman -S screenkey
```

- Configuration

When you run **screenkey**, the last config will be saved to
~/.config/screenkey.json.

But DO NOT edit this file manually, you should use the startup parameters or
the **preference** menu in the tray icon to do that.

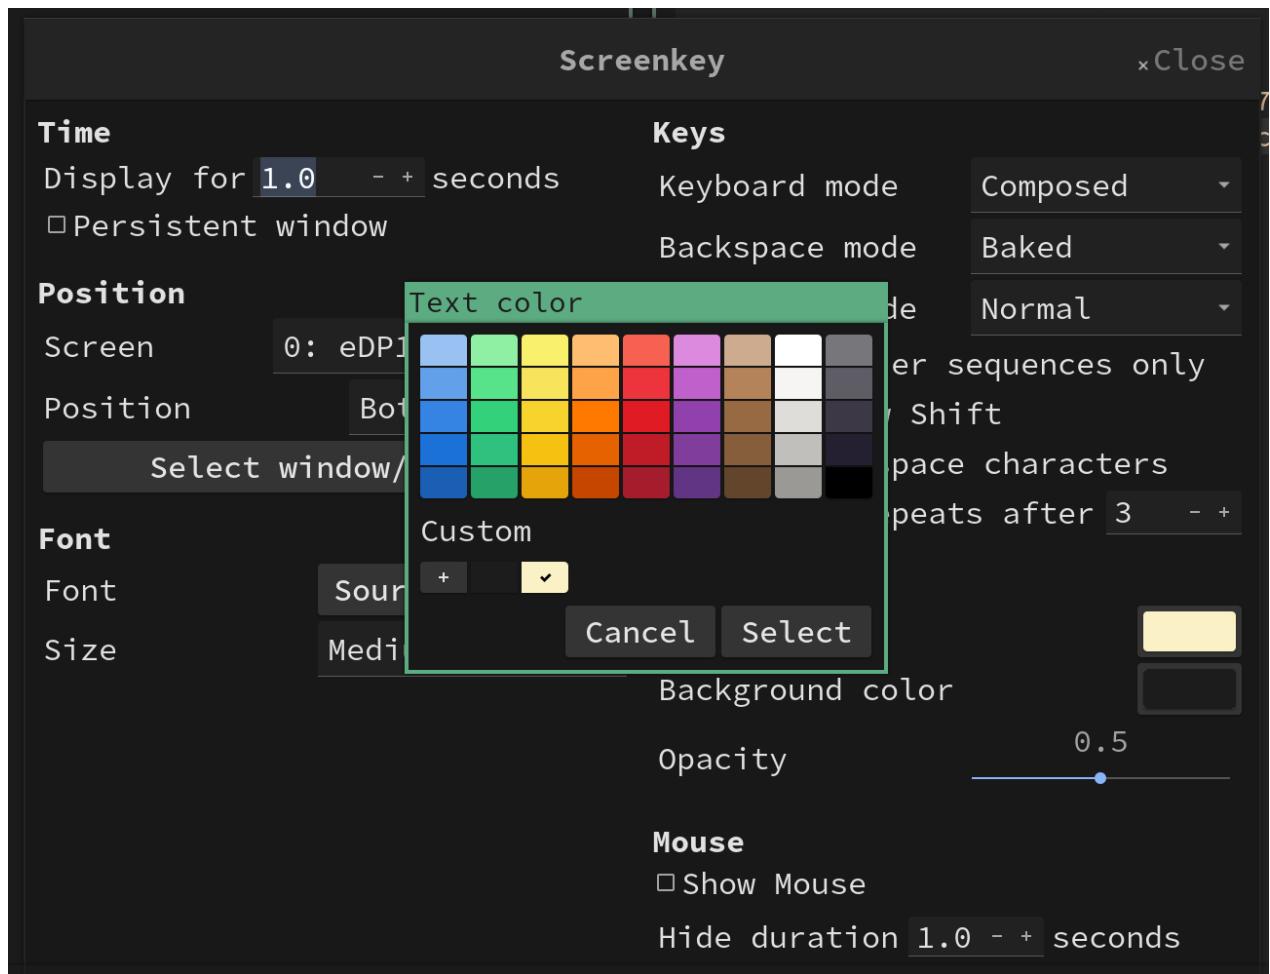

If you don't pass the `--no-systray`, then the tray icon will be shown.

- About the `color` settings

```

11 {
10   "no_systray": false,
9    "timeout": 1.0,
8    "recent_thr": 0.1,
7    "compr_cnt": 3,
6    "ignore": [],
5    "position": "bottom",
4    "persist": false,
3    "font_desc": "Source Code Pro",
2    "font_size": "medium",
1    "font_color": "#ffcc00"
  
```

```
1     "font_color": "#1e1e1e1e1e1e1e1e",
12    "bg_color": "#1c1c1c1c1c1c1c",
1     "opacity": 0.5,
2     "key_mode": "composed",
3     "bak_mode": "baked",
4     "mods_mode": "normal",
5     "mods_only": false,
6     "multiline": false,
7     "vis_shift": false,
8     "vis_space": false,
9     "geometry": null,
10    "screen": 0,
11    "start_disabled": false,
12    "mouse": false,
13    "button_hide_duration": 1
14 }
```

~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~

```
~  
~  
N... SPELL .config/screenkey.json  
"./.config/screenkey.json" 26L, 603B
```

As you can see above, the `R, G, B` value will be `double`!!! If you don't double, then `screenkey` won't run!!!

- `i3` keybinding for toggling `screenkey`

`vim ~/scripts/toggle-screenkey.sh` with the following content:

```
#!/bin/bash

KILL_RESULT=$(killall -v screenkey 2>&1)
PROCESS_NOT_FOUND_STR="no process found"
echo "KILL_RESULT: $KILL_RESULT"

if [[ $KILL_RESULT == *"$PROCESS_NOT_FOUND_STR"* ]]; then
    echo "'screenkey' started."
    screenkey --no-systray --timeout 1 \
        --opacity 0.5 \
        --no-whitespace \
        --font "Source Code Pro" \
        --font-size medium \
        --font-color "#FBFBF1F1C7C7" \
        --bg-color "#1C1C1C1C1C1C" &
else
    echo "Killed all 'screenkey'"
fi
```

`vim ~/.config/i3/config` and add the following settings:

```
# Toggle `screenkey`  
bindsym $mod+s exec --no-startup-id ~/scripts/toggle-screenkey.sh
```

- Simple screen recorder

```
sudo pacman -S simplescreenrecorder
```

Running wechat in docker

- Install

```
# Download the docker run script
curl "https://raw.githubusercontent.com/huan/docker-
wechat/master/dochat.sh" --output ~/scripts/dochat.sh

# Make it executable
chmod +x ~/scripts/dochat.sh
```

- Better to make an **alias** or **abbreviation** in your shell

For example in **fish** shell

```
# "DOCHAT_DEBUG=true": print out the debug info which can help if start
fail.

#
# "DOCHAT_DPI=192": for the display scale. Allows value below:
#      96  100%
#      120 125%
#      144 150%
#      192 200%
#
# "DOCHAT_SKIP_PULL=true": Don't pull latest docker image every time.
#
# For more detail informations, access here:
https://github.com/huan/docker-wechat
#
abbr startwechat "DOCHAT_DEBUG=true DOCHAT_SKIP_PULL=true DOCHAT_DPI=192
~/scripts/dochat.sh"
```

- Run it

```
# Make sure to run this command once to allow all users can access your X
xhost +
startwebchat
```

When you run it at the first time, it will pull the image then run it.

```
I [wison] /home/wison [ ] DOCHAT_SKIP_PULL=true/DOCHAT_DPI=192 ~/scripts/dochat.sh
total 0
I [wison] /home/wison [ ] dust -di ./cache
4.0K |   \obexd / ____| |__| ____| |
4.0K |   |uem\|-\ray|100\| /`| |
4.0K |   |l(e)a|-\pnl|t|1|0| (| | |
8.0K |---/y\yn/ \____|_|_|_\|_\|_\|_\|_
12K |   event-sound-cache.tdb.b419303d8d164dbca9721547fbacac42.x86_64-pc-linux-gnu
16K https://github.com/huan/docker-wechat
16K   dmenu_run
24K   ligh+-----+zer
40K   lig/dm      /
72K   gs/ramer-1.0  /
204K   f*on+on+g-----*
240K   .|ac|cache.wison|
732K   type|cri盒装
3.8M   yy | 微信
3.9M   m|sa+-----+
7.1M   n|d/-gyp      |
54M   g|/build      |
367M   g*-g*-enrome--*
438M   .cache
I [w] DoChat[daatfæt/] (Docker-weChat) is:google-chrome/
total 4.0K
drwx-- a Dockernimage 4.0K Dec 12 11:49 Default/
N [w] on for runningoPC Windows WeChatache/google-chrome/Default/
total 4.0K on your Linux desktop
drwx-- by one-lineof command 4.0K Dec 13 12:21 Cache/
drwx---- 3 wison wison 4.0K Dec 6 21:47 Storage/
Starting DoChat /daatfæt/ Dec 6 21:47 'Code Cache'/
I [wison] /home/wison [ ] dust -di ./cache/google-chrome/Default/
Unable to find image 'zixia/wechat:2.7.1.85' locally
2.7.1.85: Pulling from zixia/wechat
93956c6f8d9e:a Pull complete
46bddb84d1c5:f Pull complete
15fa85048576: Pull complete -> /var/cache/pacman/pkg/
8aa40341c4fa: Pull complete
1e85f9d3a0e2: Pull complete Dec 6 05:41 docker-1:19.03.14-3-x86_64.pkg.tar.zst
1e7ba6fed8ef: Downloading [=====>] 223.2MB/230MB
522c0a74c4cc: Download complete 8 23:33 yarn-1.22.10-1-any.pkg.tar.zst
bb6c04ebadfd: Download complete 7 08:37 runc-1.0.0rc92-1-x86_64.pkg.tar.zst
2d5b3070ed76: Downloading [=====>] 59.06MB/139MB
375ed383c7a8: Downloading [=====>] 45.36MB/49.22MB
```

After that, it should run:

Wine

What is Wine?

Wine is not an Emulator. It is a compatibility layer capable of running Windows applications. Wine translates Windows API into **POSIX** call on-the-fly, eliminating the performance and memory penalties of other methods and allowing you to cleanly integrate Windows applicants into your desktop.

- Install **wine** from **pacman**.

```
sudo vim /etc/pacman.conf and uncomment the lines below to enable the  
multilib:
```

```
[multilib]
Include = /etc/pacman.d/mirrorlist
```

Sync the database:

```
sudo pacman -Sy
```


Then install it:

```
sudo pacman -S wine winetricks
```


Run `winecfg` to create a default `C:/` in `$HOME/.wine/drive_c`. It will ask you to install some extra stuff, just click `cancel` for all of them, as it doesn't matter to run `wecaht`.

```
winecfg
```

For the first time, you might see the UI looks like below (very tiny font):

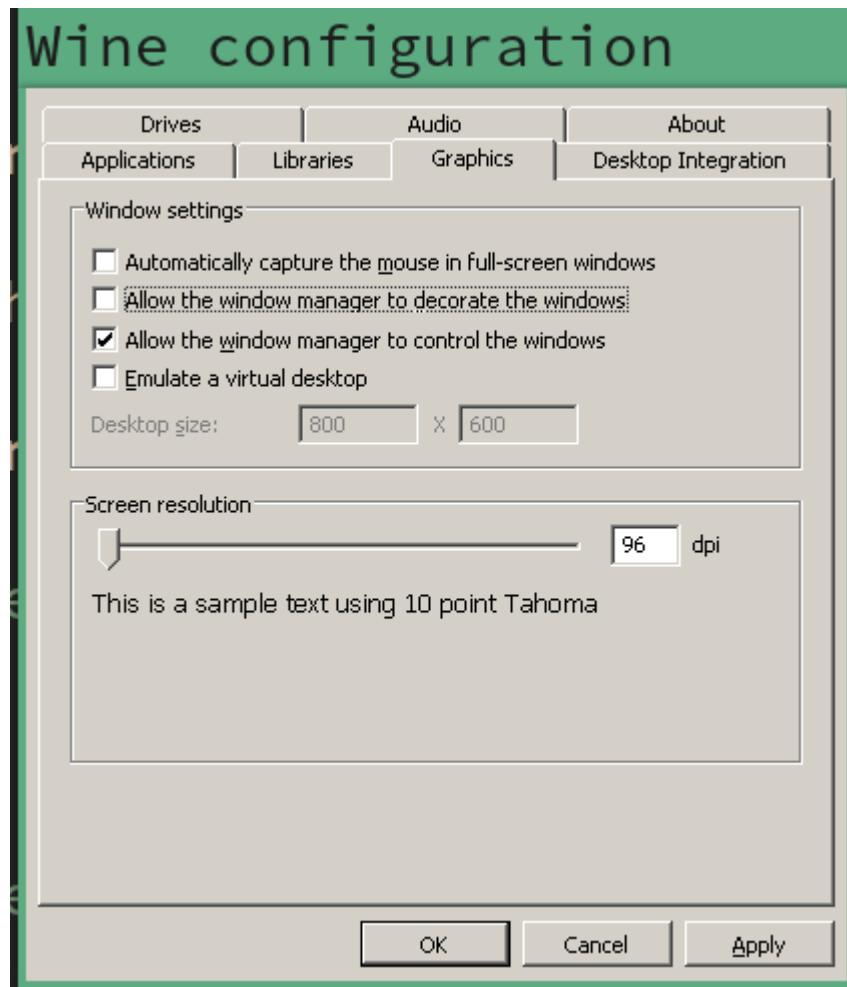

After you change the correct DPI, re-run `winecfg` again, it should look better:

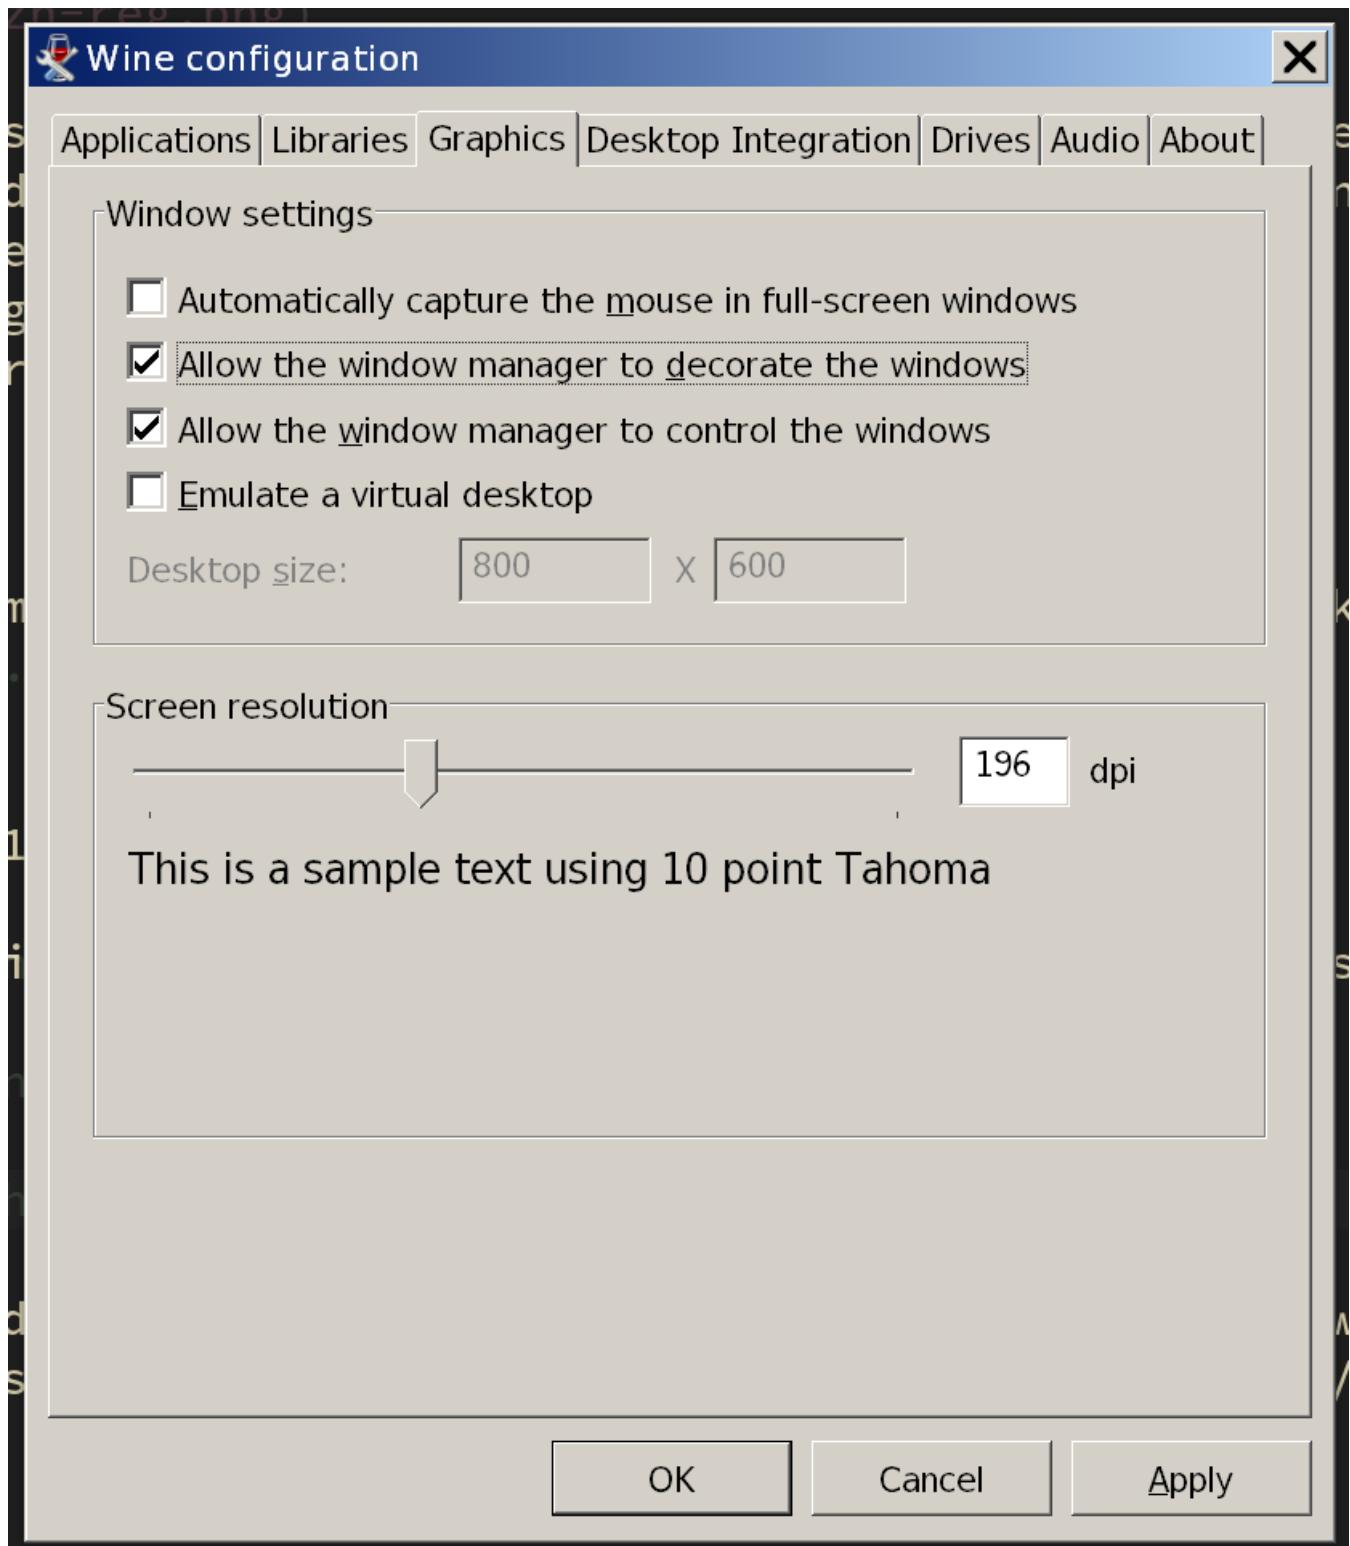

- Link Chinese fonts to your local font

Save the following content to a temporary file, you need to **import** it later, make sure NOT save into a **hidden** folder, as the **winecfg** program won't be able to see your **hidden** folder!!!

For example, save to `~/zh.reg`:

```
$ vim ~/zh.reg


# You can find the font name in `/usr/share/fonts`, just replace "wqy-
# microhei.ttc"
# to the one you like. e.g. "SourceHanSansCN-Medium.otf"

REGEDIT4
[HKEY_LOCAL_MACHINE\Software\Microsoft\Windows
NT\CurrentVersion\FontLink\SystemLink]
"Lucida Sans Unicode"="wqy-microhei.ttc"
"Microsoft Sans Serif"="wqy-microhei.ttc"
"Microsoft YaHei"="wqy-microhei.ttc"
"微软雅黑"="wqy-microhei.ttc"
"MS Sans Serif"="wqy-microhei.ttc"
"Tahoma"="wqy-microhei.ttc"
"Tahoma Bold"="wqy-microhei.ttc"
"SimSun"="wqy-microhei.ttc"
"Arial"="wqy-microhei.ttc"
"Arial Black"="wqy-microhei.ttc"
"宋体"="wqy-microhei.ttc"
"新細明體"="wqy-microhei.ttc"
```

Run the command below to import `zh.reg`:

```
wine regedit
```

Then click `Import Registry File` and choose your `zh.reg`:

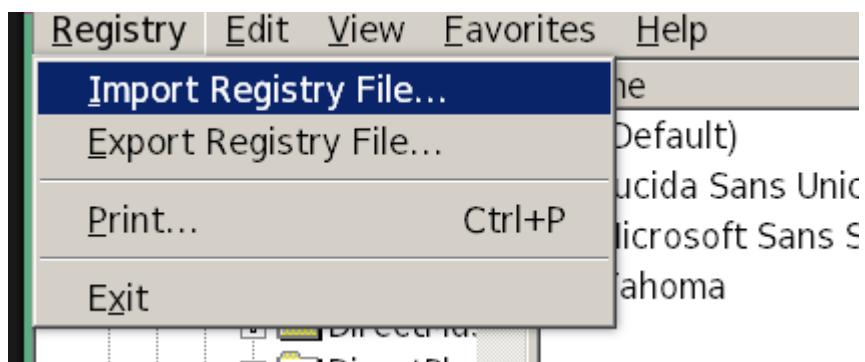

- Download **DLLs** by running **winetricks**

```
winetricks riched20
```

It will download the dependencies into `$HOME/.cache/winetricks` then install it into `$HOME/.wine/drive_c`.


Pay attention:

If you can't download `W2KSP4_EN.EXE` , then you can download it from:

http://www.mywindowspage.com/index.php/download/w2ksp4_en-exe/

After downloaded, move it into `$HOME/.cache/winetricks/wine2ksp4/``, and then run `winetricks riches20` again`

After installed the **DLLs**, if you run **winecfg** again, you should be able to see the **DLL** there:

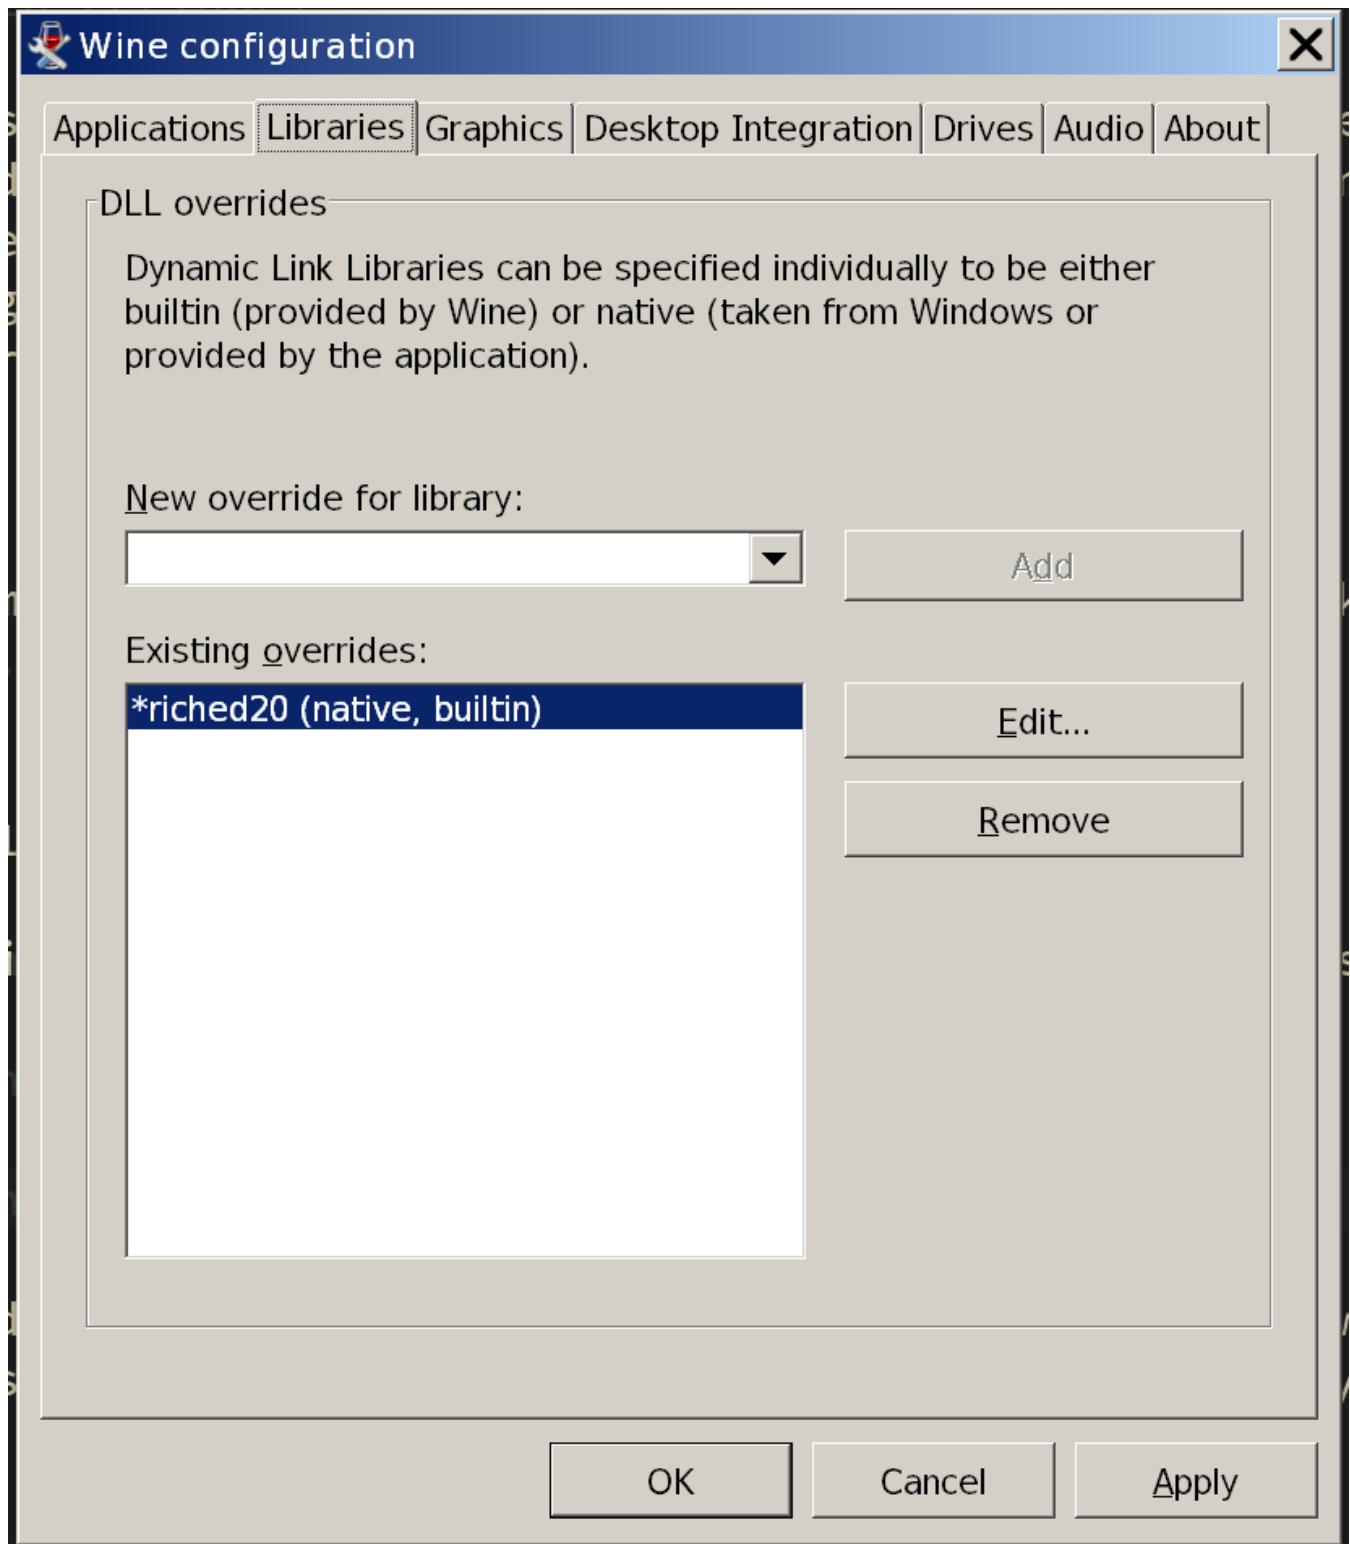

- Install **Wechat** or **WxWork**

Download the window version installation EXE from here, just pick the one you needed:


- [WxWork](#)



- o Wechat

After download, run the installation program you needed. Let's take the **WxWork** as example:

```
# If you need `WxWork'  
wine $HOME/Downloads/WE_CHAT_WORK_EXE_FILE_NAME_HERE
```

Then, you should be able to see the install UI like below:

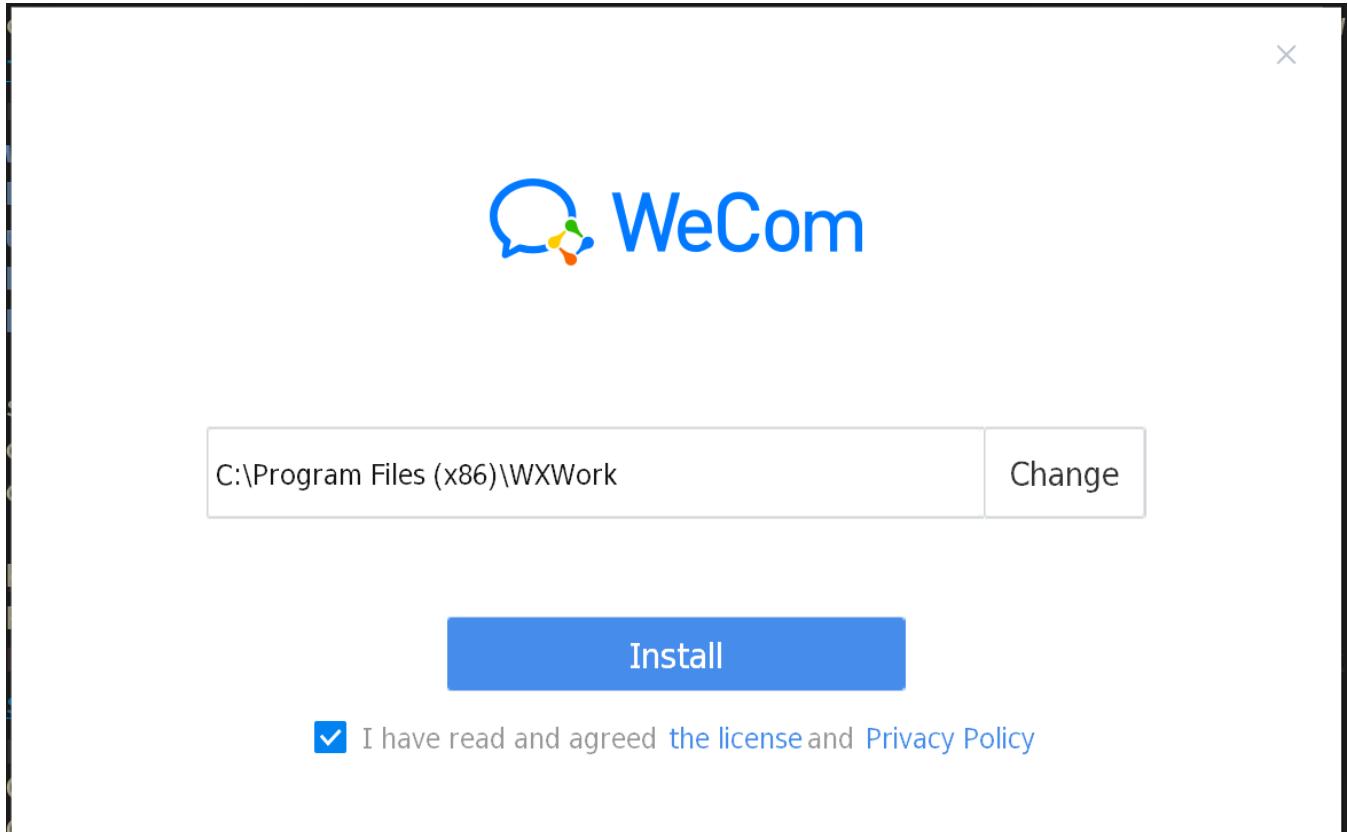

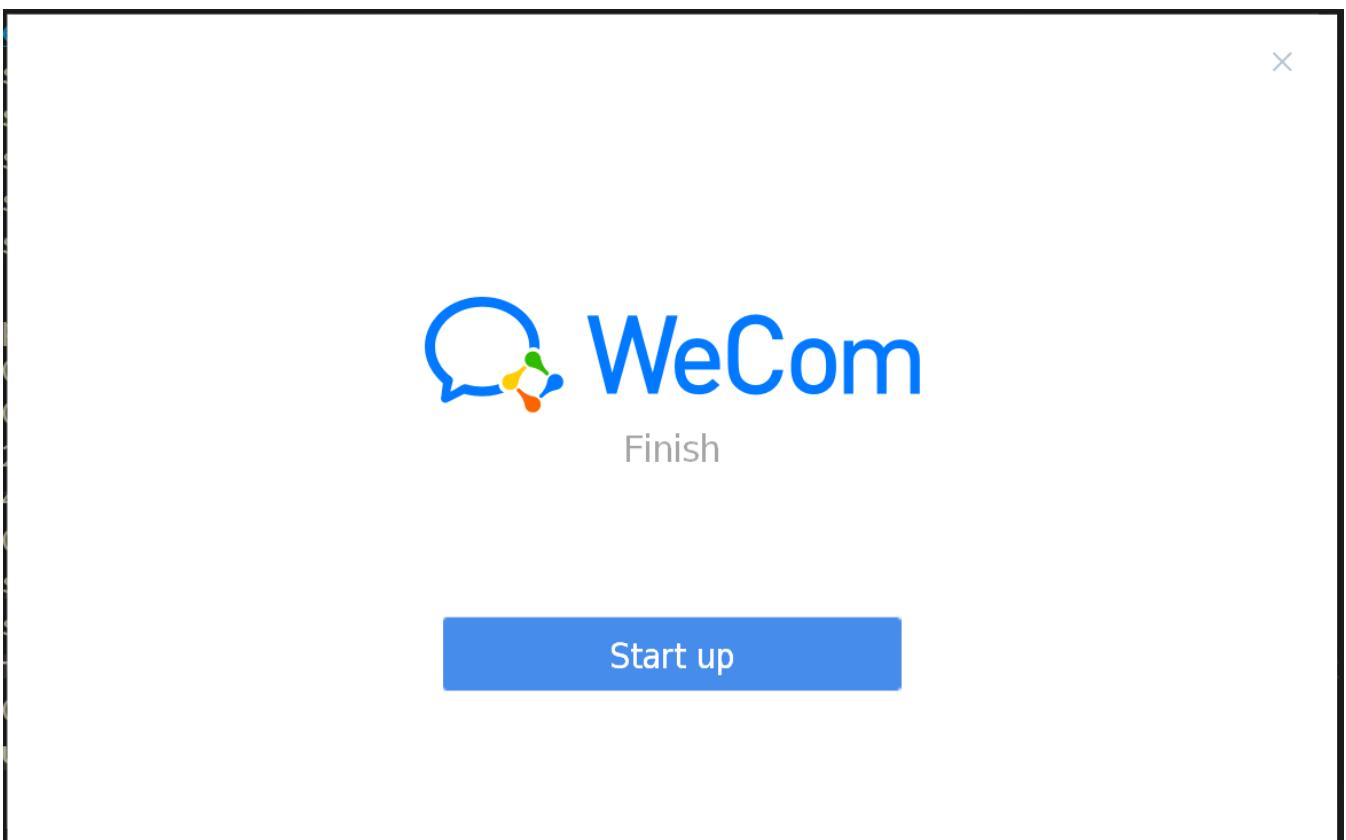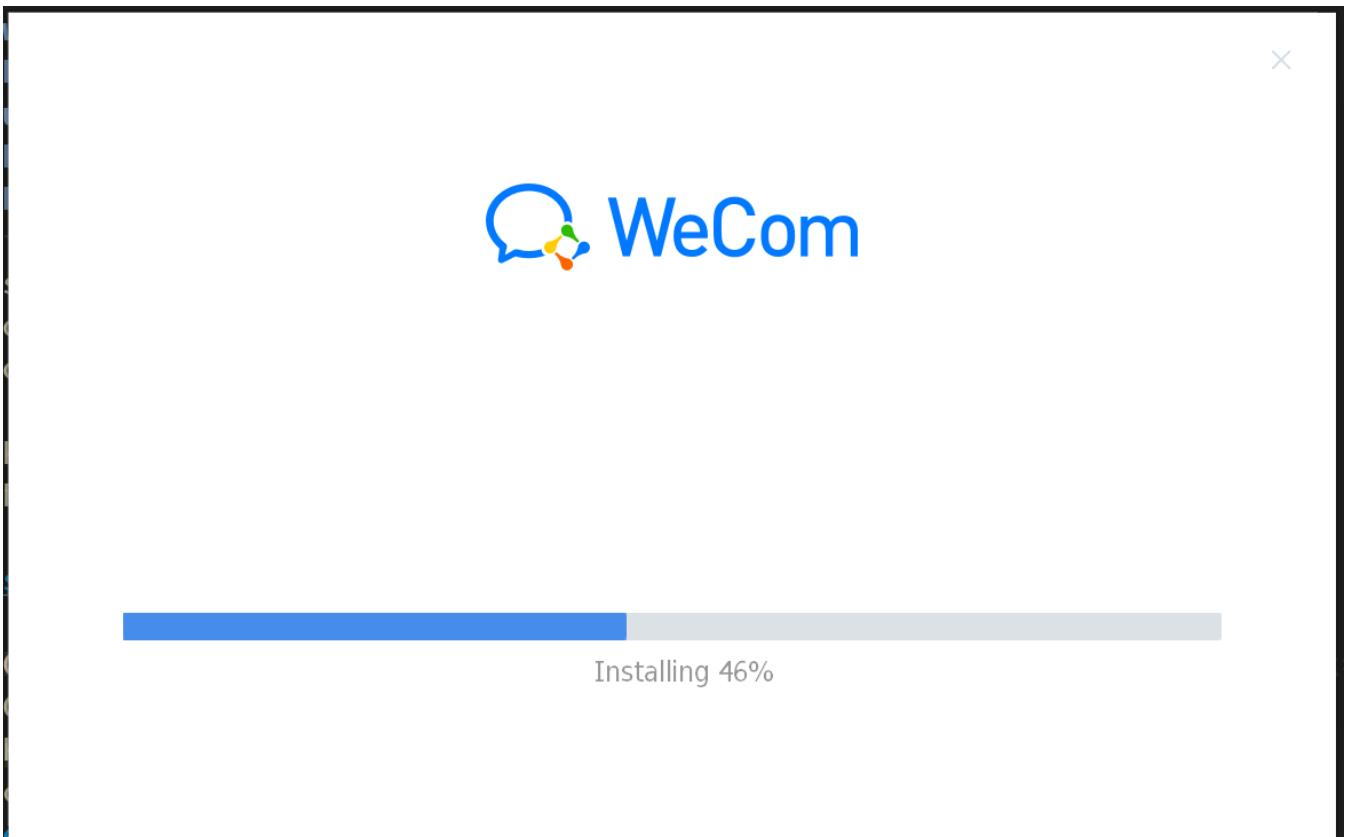



- How to use **i3** keybinding to lanuch **WxWork**
 - Create lanuch script

`vim ~/scripts/wechat_work.sh` with the following content:

If you change the default installation folder, then you should change to yours!!!

```
wine ~/.wine/drive_c/Program\ Files\ \|(x86\|)/WxWork/WxWork.exe &
```

Make it executable:

```
chmod +x ~/scripts/wechat_work.sh
```

- `i3` keybinding

`vim ~/.config/i3/config` and add the following keybinding to lanuch `WxWork`:

```
# Launch WxWork
bindsym $mod+w exec --no-startup-id ~/scripts/wechat_work.sh

# Enable the floating mode for `WxWork` window
for_window [class="wxwork.exe"] floating enable border pixel 1
```

A tips:

As `WxWork` runs in floating mode and its UI is bigger, for getting the better user experience, you might switch to a empty workspace to run the `WxWork`.

- How to remove `wine` and `winetricks` completely?

If you don't like it, walk through the steps below to remove them completely:

```
# Remove the package and all related dependencies
sudo pacman -Rsn wine winetricks

# Remove the entire `~/.wine`, as that's huge!!!
rm -rf ~/.wine

# Remove the cache as well
rm -rf ~/.cache/winetricks/
```

Install zoom

- Install


Download [zoom_x86_64.pkg.tar.xz](#) from [here](#)

After that, install it by running:

```
sudo pacman -U ./zoom_x86_64.pkg.tar.xz
```

- Fixed the UI font size

Mayb you will see the UI has very tiny font size like this:

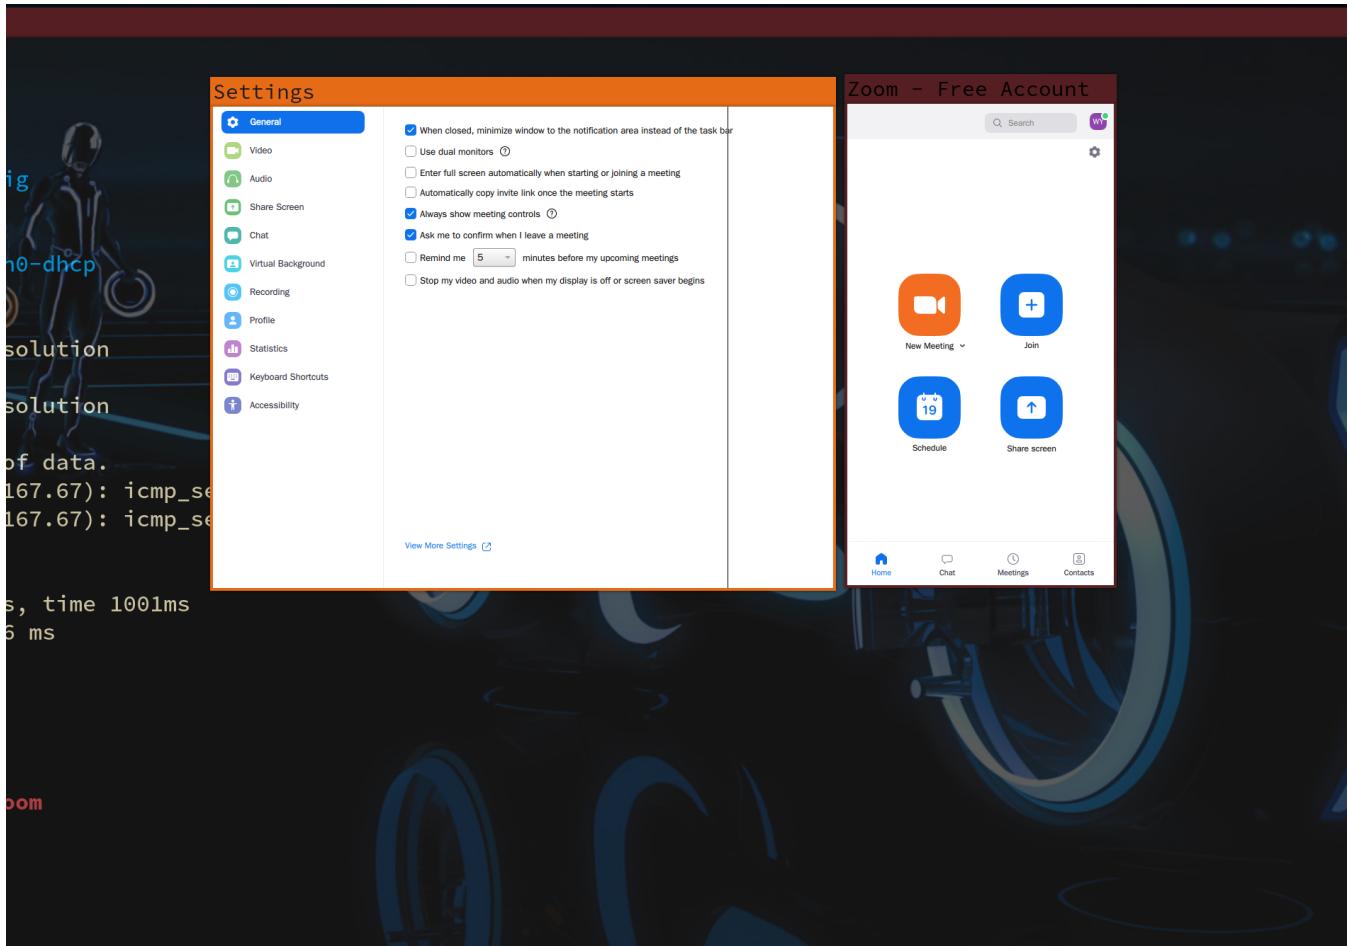

If that happens, then add the `QT_SCALE_FACTOR` environment var to fix that. You can try [1](#) or [2](#) even [3](#) to have a look.

- Add hotkey to **i3**

vim `~/scripts/startzoom.sh` with the following settings:

```
#!/bin/sh
QT_SCALE_FACTOR=2 zoom &
```

Change the **QT_SCALE_FACTOR** value to yours.

Then add the following settings to `~/.config/i3/config`

```
# Zoom
bindsym $mod+z exec --no-startup-id ~/scripts/startzoom.sh
```

About cleaning cache

After running **Arch Linux** for a while, you will notice that your disk free space keeps reducing and never stop, that should be a signal that you should clean your cache. Usually, it will save over **GB** disk space:)

```
# Show how much your cache hold the disk space
dust -d1 ~/.cache

# Clean yay cache and unneeded dependencies
yay -Sc
yay -Yc

# Clean pacman cache (it locates `/var/cache/pacman/pkg/`)
sudo pacman -Scc

# Clean yarn (if you installed)
yarn cache clean

# Clean google-chrome cache (sometimes, this folder is huge!)
rm -rf ~/.cache/google-chrome/Default

# After that, calculate again, it should get big improved.
dust -d1 ~/.cache
```

Backup and restore

- Backup

Create the backup script with following content:

```
#!/bin/bash
echo "Backup started at: $(date +'%Y-%m-%d_%H-%M-%S')"
BACKUP_FILE_NAME="arch-linux-$(date +'%Y-%m-%d_%H-%M-%S').img.gz"
echo "Backup file name: $BACKUP_FILE_NAME"
sudo dd if=/dev/disk2 bs=8m | gzip -c > $BACKUP_FILE_NAME
echo "Backup done at $(date +'%Y-%m-%d_%H-%M-%S')"
```

Of course, you need to change something above which match your real case:

- `BACKUP_FILE_NAME`, change to your prefer name (with path)
- `/dev/disk2`, change to your real dev name

In my case, I backup the **32GB** USB to **.img.gz**, it takes around **47 mins** and the compress size is **14GB**.

```
N [11:17:54] wison@Wisons-iMac /Users/wison
> vim ~/temp/backup-arch-linux.sh
N [11:18:29] wison@Wisons-iMac /Users/wison
> ~/temp/backup-arch-linux.sh
Backup started at: 2020-12-17_11-18-31
Backup file name: arch-linux-2020-12-17_11-18-31.img.gz
Password:
3666+0 records in
3666+0 records out
30752636928 bytes transferred in 2862.147033 secs (10744604 bytes/sec)
Backup done at 2020-12-17_12-06-16
I [12:06:16] wison@Wisons-iMac /Users/wison
```

14G 17 Dec 12:06 arch-linux-2020-12-17_11-18-31.img.gz

- Restore

Prepare your USB, and make sure the size should be equal or great than your original backup USB size.

Better to remove all the partitions before you restore, I think it can make sure the bootloader works fine. (not 100% sure)

Then create the restore script with the following content:

```
#!/bin/bash
echo "Restore started at: $(date +'%Y-%m-%d_%H-%M-%S')"
RESTORE_FILE_NAME="arch-linux-$(date +'%Y-%m-%d_%H-%M-%S').img.gz"
echo "Restore file name: $RESTORE_FILE_NAME"
sudo bash -c 'gunzip -c ${RESTORE_FILE_NAME} | sudo dd of=/dev/disk2
bs=8m'
echo "Restore done at $(date +'%Y-%m-%d_%H-%M-%S')"
```

Firewall

- Install

```
sudo pacman -Sy firewalld ipset
```

- About the **zone** and **service**

- What is a **zone**

Long story short, a zone just like a **folder** contains predefined firewall rules.

- Predefined **services**

A service is a combination of port and/or protocol rules.

- Available **zones**

Here only list the usual zone which user will use, for more details plz access the man page by running: **man firewalld.zones**.

- **drop**

The high secure option, no service open by default. Any incoming network packets are dropped, there is no reply. Only outgoing network connections are possible.

```
sudo firewall-cmd --info-zone=drop
#drop
# target: DROP
# icmp-block-inversion: no
# interfaces:
# sources:
# services:
# ports:
# protocols:
# forward: no
# masquerade: no
# forward-ports:
# source-ports:
# icmp-blocks:
# rich rules:
```

- **public** (The default zone)

For use in public areas. You do not trust the other computers on networks to not harm your computer. Only selected incoming connections are accepted.

```
sudo firewall-cmd --info-zone=home
#home
# target: default
# icmp-block-inversion: no
# interfaces:
# sources:
# services: dhcpcv6-client mdns samba-client ssh
# ports:
# protocols:
# forward: no
# masquerade: no
# forward-ports:
# source-ports:
# icmp-blocks:
# rich rules:
```

- Configuration

All configurations in `firewalld` separate in `runtime` and `permanent`, `runtime` means only take effect from now on, but will not exists after reboot. If you run the command without `--permanent`, that means only affect to the `runtime` configuration.

```
# List the default zone
firewall-cmd --get-default-zone

# List all available zones
firewall-cmd --get-zones

# List all enabled services under current zone ('public' by default)
sudo firewall-cmd --list-service
sudo firewall-cmd --list-service --permanent

# List all available services which you can add or remove
firewall-cmd --get-services

# Add the specified (enable) service to the current zone
sudo firewall-cmd --add-service SERVICE_NAME_HERE
sudo firewall-cmd --add-service SERVICE_NAME_HERE --permanent

# Remove the specified service to the current zone
sudo firewall-cmd --remove-service SERVICE_NAME_HERE
sudo firewall-cmd --remove-service SERVICE_NAME_HERE --permanent

# Usually, all setting commands are instantly.
# But you can reload all the rules at any time.
sudo firewall-cmd --reload
```

But you can config all the rules in a `GUI` tool:

```
sudo firewall-config
```

Change **DPI** by script

If you install **Arch Linux** to a **USB**, then you definitely need to change screen **DPI** when you switch between **iMac** and **MacBookPro**.

- **iMac (5K)**

- Create `~/scripts/Xresources-imac` with the following settings:

```
Xft.dpi: 144
```

- Create `~/scripts/change-dpi-for-imac.sh` with the following settings:

```
#!/bin/bash
cp -rvf ~/scripts/Xresources-imac ~/.Xresources
i3exit logout
```

- Make it executable

```
chmod +x ~/scripts/change-dpi-for-imac.sh
```

- **MacBookPro 2015**

- Create `~/scripts/Xresources-mbp-2015` with the following settings:

```
Xft.dpi: 192
```

- Create `~/scripts/change-dpi-for-mbp-2015.sh` with the following settings:

```
#!/bin/bash
cp -rvf ~/scripts/Xresources-mbp-2015 ~/.Xresources
i3exit logout
```

- Make it executable

```
chmod +x ~/scripts/change-dpi-for-mbp-2015.sh
```

- **MacBookPro 2012**

- Create `~/scripts/Xresources-mbp-2012` with the following settings:

```
Xft.dpi: 96
```

- Create `~/scripts/change-dpi-for-mbp-2012.sh` with the following settings:

```
#!/bin/bash
cp -rvf ~/scripts/Xresources-mbp-2012 ~/Xresources
i3exit logout
```

- Make it executable

```
chmod +x ~/scripts/change-dpi-for-mbp-2012.sh
```

After that, you can change to any screen DPI at anytime you want in real-time.

Pay attention: After you run the script, it will log you out to take effect!!!

```
# For iMac 5K Screen
~/scripts/change-dpi-for-imac.sh

# For MacBookPro 2015 screen
~/scripts/change-dpi-for-mbp-2015.sh

# For MacBookPro 2012 screen
~/scripts/change-dpi-for-mbp-2012.sh
```

Screen brightness control

The basic approach to control screen brightness

```
# Print out the current screen brightness
cat /sys/class/backlight/intel_backlight/brightness

# Print out the maximum screen brightness
cat /sys/class/backlight/intel_backlight/max_brightness

# Set the current screen brightness
sudo bash -c "echo 512 > /sys/class/backlight/intel_backlight/brightness"
```

For the iMac

Sometimes `acpi` doesn't work very well on `iMac`, for the case I met, the `iMac 5K` screen is very bright by default and can't control via the `/sys/class/backlight` file system path.

Even you can't control the brightness, but it's reduce the default brightness (at least not 100% brightness). For that purpose, you can disable the `acpi` brightness control for the `iMac` via the steps below:

- `sudo vim /etc/default/grub` and add the `acpi_backlight=none` settings like below:

```
# Assume `loglevel=3 quiet` is your original settings
GRUB_CMDLINE_LINUX_DEFAULT="loglevel=3 quiet acpi_backlight=none"
```

- Then re-generate the `GRUB` based on your new settings

```
sudo grub-mkconfig -o /boot/grub/grub.cfg
```

Build the `mac-light-controller` (it only work for `MacBookPro`)

- Pull from repo, build it

```
# Go into any folder you want
git clone https://github.com/wisonye/mac-light-controller.git
cd mac-light-controller
cargo clean && \
cargo build --release && \
strip ./target/release/mac-light-controller

# Move to any folder you want `i3` to launch from there (Optional)
mv ./target/release/mac-light-controller ~/scripts/
```

- Add keybinds to `i3` configuration file

`vim ~/.config/i3/config` and add the following settings:

```
#  
=====  
  
# Screen brightness control  
#  
=====  
  
bindsym XF86MonBrightnessUp exec --no-startup-id ~/scripts/mac-light-  
controller Screen +  
bindsym XF86MonBrightnessDown exec --no-startup-id ~/scripts/mac-light-  
controller Screen -  
bindsym XF86KbdBrightnessUp exec --no-startup-id ~/scripts/mac-light-  
controller Keyboard +  
bindsym XF86KbdBrightnessDown exec --no-startup-id ~/scripts/mac-light-  
controller Keyboard -
```

- Allow any linux account in `wheel` group can modify the backlight system file with `root` permission
 - `sudo vim /etc/udev/rules.d/90-backlight.rules` and add the following settings:

```
SUBSYSTEM=="backlight", ACTION=="add", \  
  RUN+="/bin/chgrp wheel /sys/class/backlight/%k/brightness", \  
  RUN+="/bin/chmod g+w /sys/class/backlight/%k/brightness"
```

- `sudo vim /etc/udev/rules.d/91-leds.rules` and add the following settings:

```
SUBSYSTEM=="leds", ACTION=="add", \  
  RUN+="/bin/chgrp wheel /sys/class/leds/%k/brightness", \  
  RUN+="/bin/chmod g+w /sys/class/leds/%k/brightness"
```

Of course, make sure your current linux account is in `wheel` group!!!

Reload `i3`, then press the screen brightness control key, it should work. You can run the script manually like below to test it if it doesn't work.

```
DEBUG=true ./target/release/mac-screen-brightness-controller -  
is_add_brightness: false  
total_steps: 10  
max_brightness: Some(1953)  
current_brightness: Some(1953)  
temp_step_value: 195  
new_brightness_value: 1758  
Set new brightness value '1758' successfully.
```

Trackpad support

- List your **Apple Trackpad** device

```
sudo libinput list-devices | grep Trackpad -A 17
```

```
# By default, this folder should empty if you didn't add any configuration
# manually
ls -lht /etc/X11/xorg.conf.d/

# If you installed `synaptics` (`xf86-input-synaptics`) and `libinput`
(`xf86-input-libinput`),
# then you should see result like this:
ls -lht /usr/share/X11/xorg.conf.d/

-rw-r--r-- 1 root root 1.4K Dec  2 08:51 10-quirks.conf
-rw-r--r-- 1 root root   92 May 19 2020 10-amdgpu.conf
-rw-r--r-- 1 root root 1.4K May 19 2020 40-libinput.conf
-rw-r--r-- 1 root root   92 May 17 2020 10-radeon.conf
-rw-r--r-- 1 root root 1.8K May 17 2020 70-synaptics.conf

# If match the above case, then create to soft link like this:
sudo ln -s /usr/share/X11/xorg.conf.d/40-libinput.conf
/etc/X11/xorg.conf.d/40-libinput.conf

# After restart the X, run the command below and you should some output
# like below:
grep -e "Using input driver 'libinput'" /var/log/Xorg.0.log

[ 5734.514] (II) Using input driver 'libinput' for 'Power Button'
[ 5734.579] (II) Using input driver 'libinput' for 'Video Bus'
[ 5734.633] (II) Using input driver 'libinput' for 'Power Button'
[ 5734.687] (II) Using input driver 'libinput' for 'Sleep Button'
[ 5734.729] (II) Using input driver 'libinput' for 'Apple Inc. Apple
Internal Keyboard / Trackpad'
[ 5734.887] (II) Using input driver 'libinput' for 'Broadcom Corp. Bluetooth
USB Host Controller'
[ 5734.927] (II) Using input driver 'libinput' for 'Broadcom Corp. Bluetooth
USB Host Controller'''
```

That proves your trackpad is using the **libinput** driver. So you can add the following setting to improve your trackpad experiences:

- Same scrolling experience within **MacOS**

`sudo vim /etc/X11/xorg.conf.d/40-libinput.conf`, then add the following settings to **libinput touchpad catchall** section.

- **Option "NaturalScrolling" "true"** - Reverse the scrolling direction
- **Option "Tapping" "on"** - Tap to click

Finally, it looks like this:

```
Section "InputClass"
    Identifier "libinput touchpad catchall"
    MatchIsTouchpad "on"
    MatchDevicePath "/dev/input/event*"
    Driver "libinput"
    Option "NaturalScrolling" "true"
    Option "Tapping" "on"
EndSection
```

Bluetooth support

- Install

```
sudo pacman bluez bluez-utils blueman
```

- Enable/start service

```
# If you want auto bluetooth service
sudo systemctl enable bluetooth.service

# You can restart it manually anytime you need input
sudo systemctl restart bluetooth.service
sudo systemctl status bluetooth.service
```

- Make sure **rfkill** not block your bluetooth adapter

rfkill a tool for enabling and disabling wireless device.

```
sudo rfkill list

# 0: hci0: bluetooth
#           Soft blocked: no
#           Hard blocked: no
```

The case above means no block at all, that's fine. If you see it's blocked, then run the command below to unblock:

```
sudo rfkill unblock bluetooth
```

- Scan and pair, then connect

First, turn off your bluetooth device which want to connect to. Run `bluetoothctl`, then follow the steps below to connect:

```
# Make sure turn on the bluetooth
power on

# Enable scan, after that, bluetooth devices show up there one by one
scan on

# Right now, turn on your bluetooth device, then wait for it to show up.
# Hopefully, it shows its name directly which you can confirm that's your
device.

# If it doesn't, only show the MAC ID, then copy that Id and run the
# command to confirm.
info XX:XX:XX:XX:XX:XX

# Once you confirm that your device, then do:
pair XX:XX:XX:XX:XX:XX

# After pairing, you can connect to it
connect XX:XX:XX:XX:XX:XX



# Optionally, you can trust it and it will auto connect next time
trust XX:XX:XX:XX:XX:XX

# Quit
quit
```


Below is the real example:

```
N | wison@wison-arch ~> bluetoothctl
Agent registered
[bluetooth]# devices
Device 64:C7:53:ED:C2:77 Wilson's TrackPad
[bluetooth]# connect 64:C7:53:ED:C2:77
Attempting to connect to 64:C7:53:ED:C2:77
[CHG] Device 64:C7:53:ED:C2:77 Connected: yes
Connection successful
[CHG] Device 64:C7:53:ED:C2:77 ServicesResolved: yes
[Wilson's TrackPad]# trust 64:C7:53:ED:C2:77
Changing 64:C7:53:ED:C2:77 trust succeeded
[Wilson's TrackPad]# []
```



- Alternatively, you can use the **blueman-assistant** to do that in GUI mode:

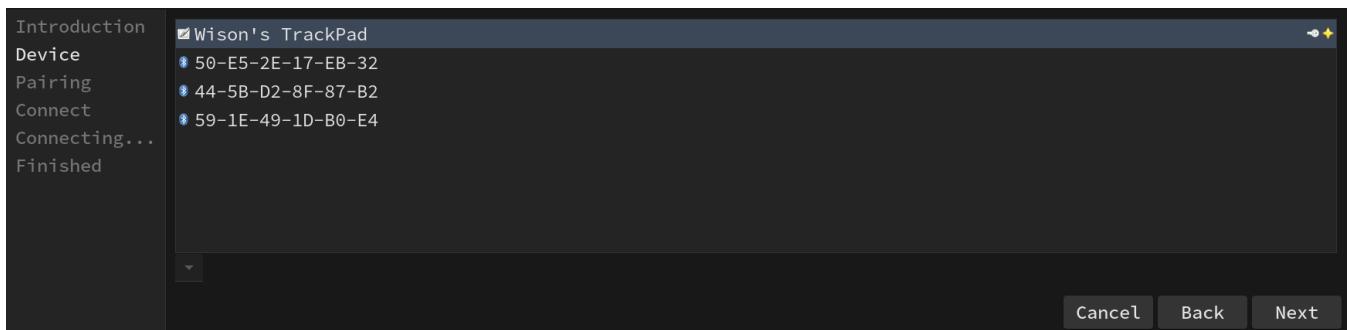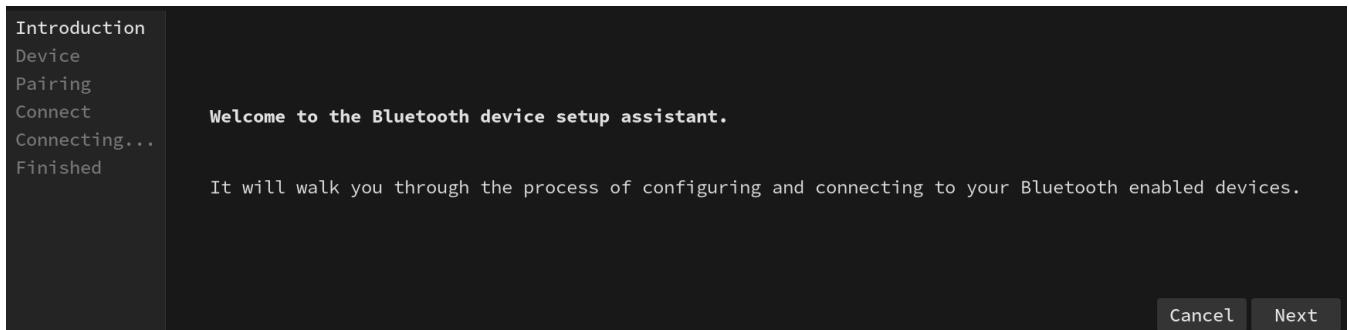

// Ignore the pair and connect steps.....

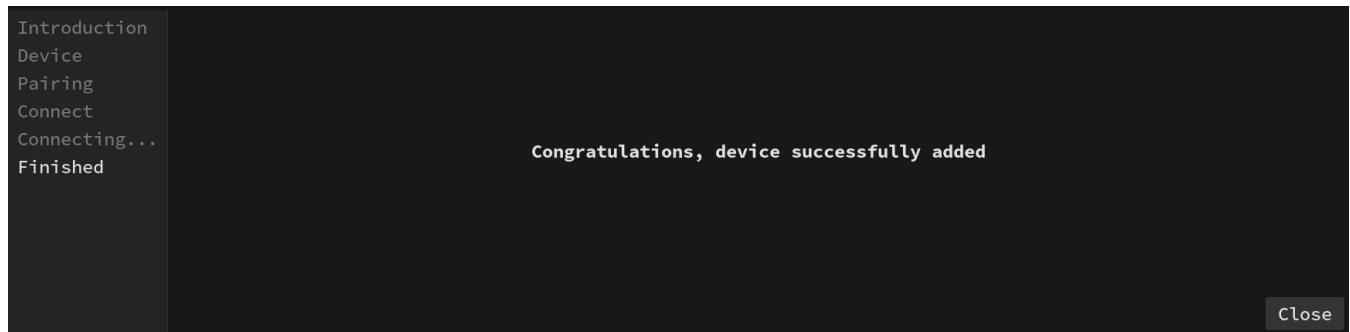

- Another option, you can use `blueman-manger` directly which is another GUI tool:

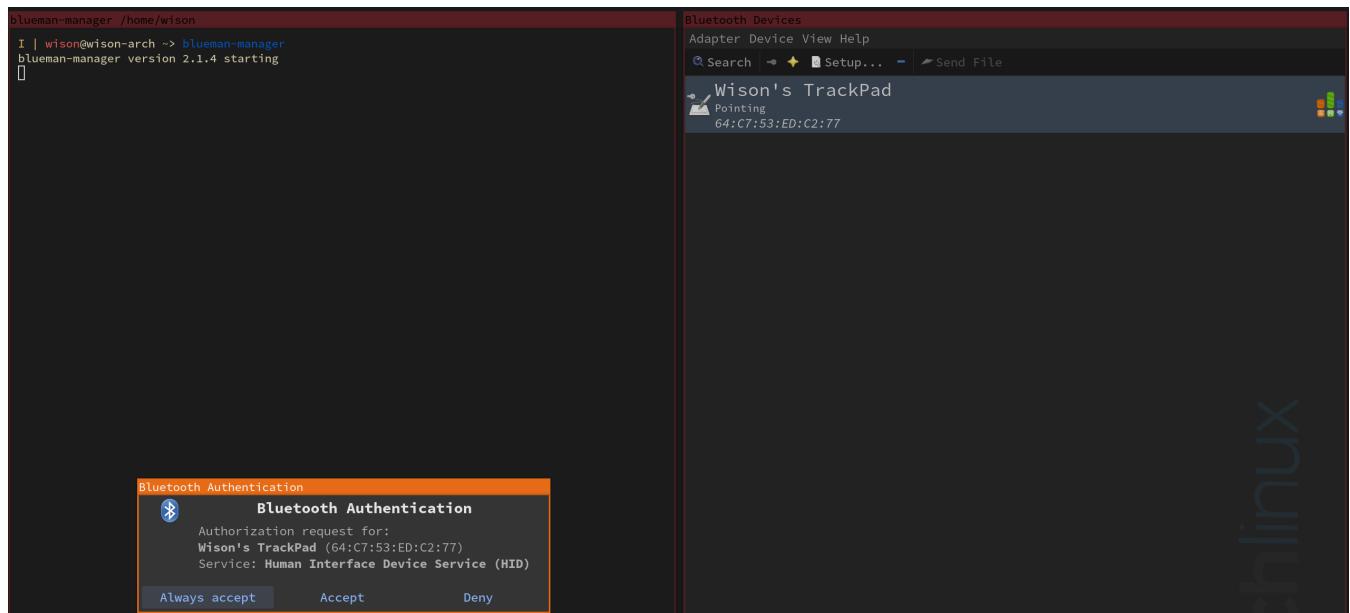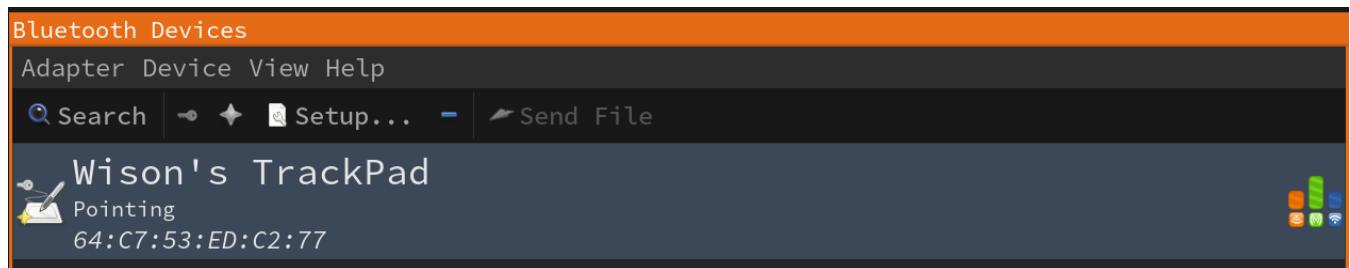

Access Apple File System

In 2017, Apple changed the default filesystem on their `macOS` (High Sierra and above) to `APFS`, the `Apple File System`. It replaced `HFS+`.

For safety reason, you can use `apfs-fuse` to mount your MacOS drive within the read-only mode.

- Install

```
sudo pacman -Sy fuse3 zlib bzip2 cmake
```

- Compile

```
git clone https://github.com/sgan81/apfs-fuse.git
cd apfs-fuse/
git submodule init
git submodule update

mkdir build && cd build
cmake ..
make
sudo make install
```

- Mount and umount

```
# Mount with `allow_other` (can access) option
# Plz replace the `sdXX` to your real device
sudo apfs-fuse -o allow_other /dev/sdXX /mnt
```

ranger:root/Users/wison
wison@wison-arch /mnt/root/Users/wison/Arch-linux

1 Applications	1
1 Arch-linux	5 =+
1 Arduino	16 =√
2 Assembly	6 =?
3 Backup	7
4 Desktop	37

installation-tutorial-book
pdf_version
README.md

```
# Unmount
sudo umount /mnt
```