


Product List

The components we provide





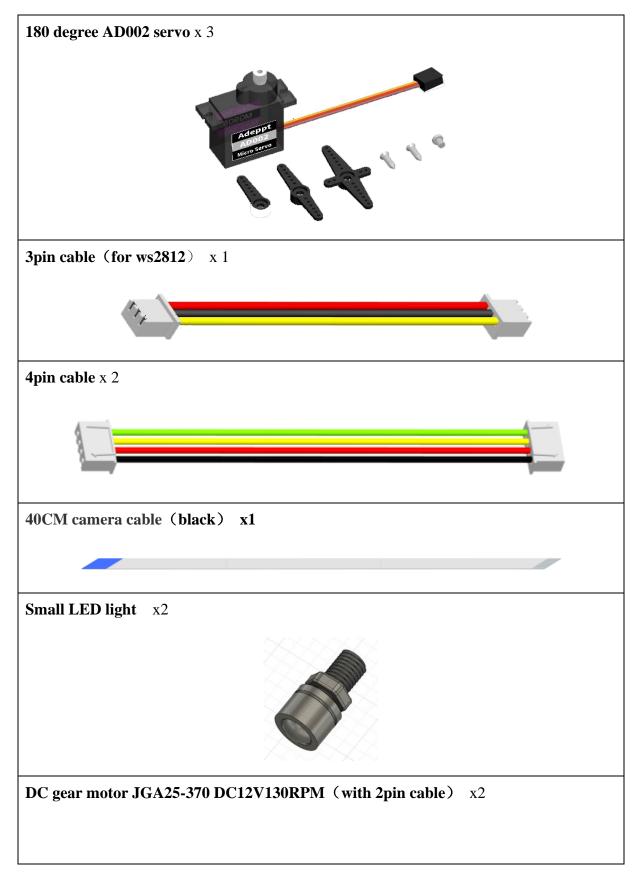





Internal 4mm coupling (with screws) X2



Big wheels x4



180 degree big servo x4




Inner 4mm long 22mm plastic tube x2





Red metal rocker x1 **OLED screen (anti-reverse connection interface)** x1ultrasonic module x1 Servo extension cable x2 Tracking module x1




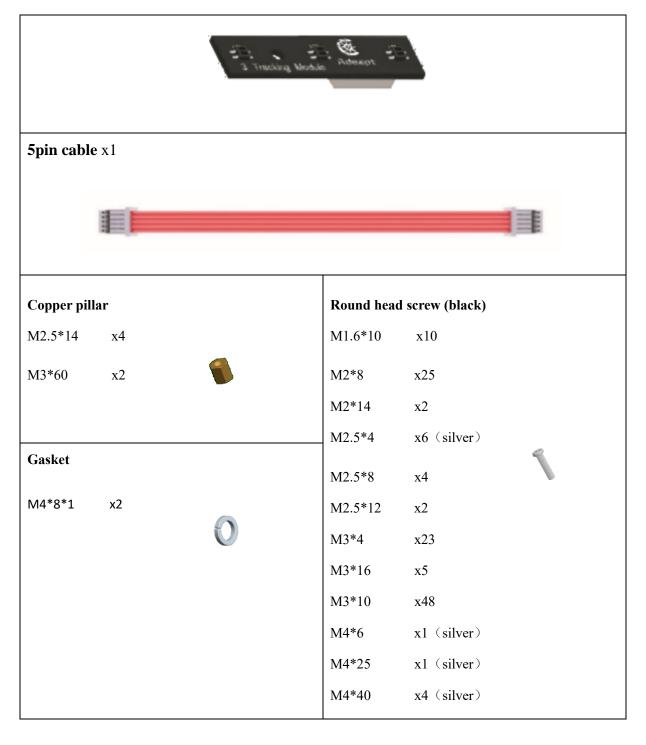




Double pass nylon column		Flat head screw
M3*15	x2	M3*6 x1
M3*20	x4	
M3*40	x3	
self-tapping screw		Hex nuts
M1.4*6	x5	M1.6 x10 (silver)
M1.7*6*6	x10	M2 x23 (silver)
		M3 x13 (silver)
		M4 x1 (silver)
Locknut		Mechanical parts bearings
M3	x11	MF84ZZ x2
M4	x1	
A set of aluminum alloy		
x1		x1



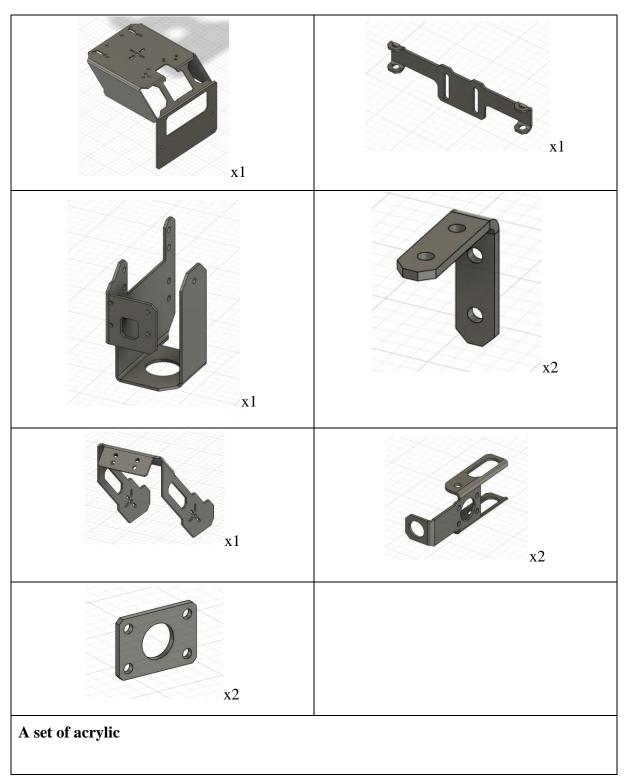




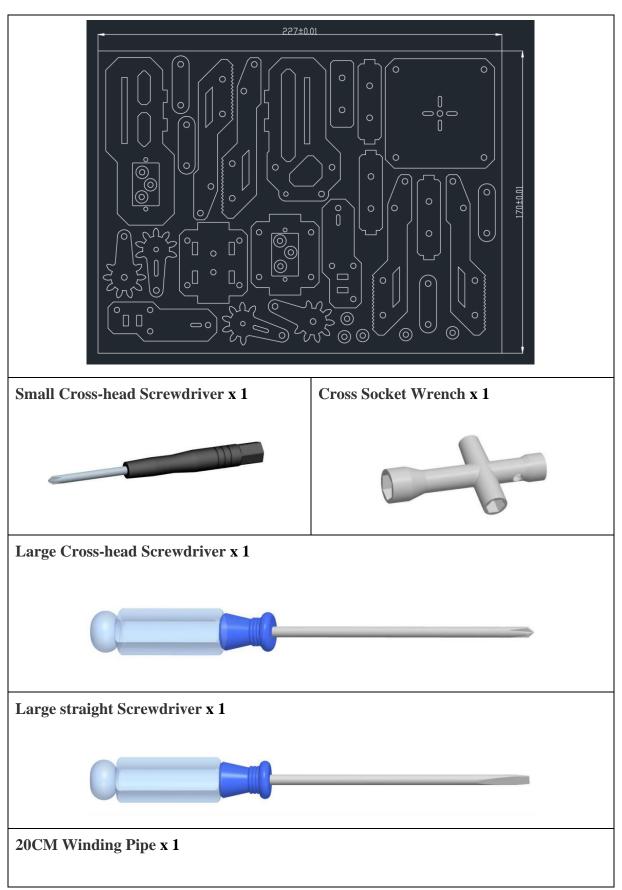



Self-prepared Parts

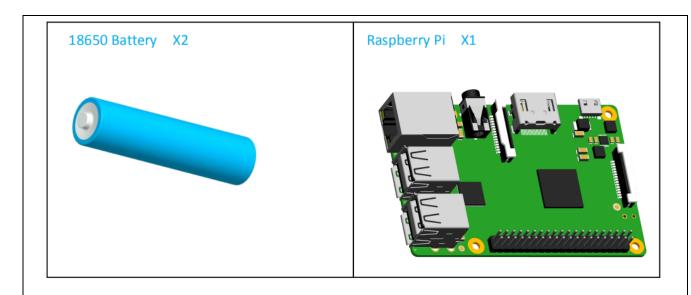

Choose an 18650 battery that supports a maximum output current of at least 4A or choose an 18650 battery with "high rate discharge".