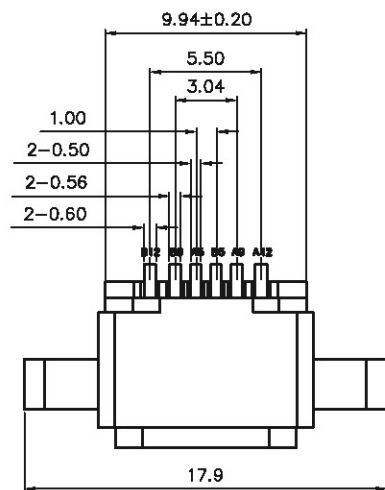
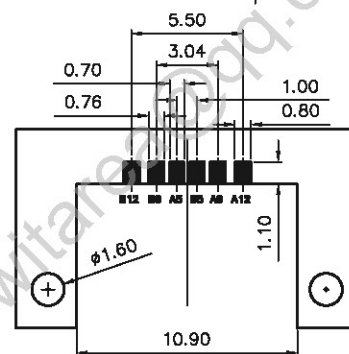

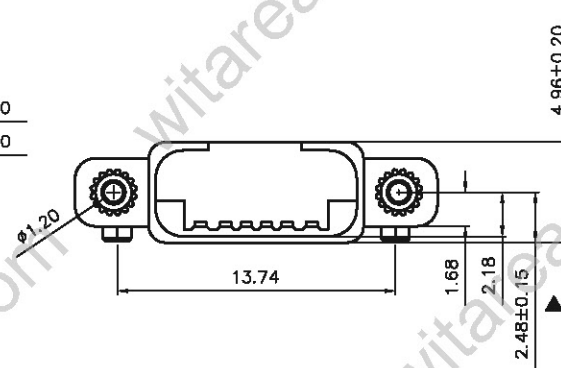
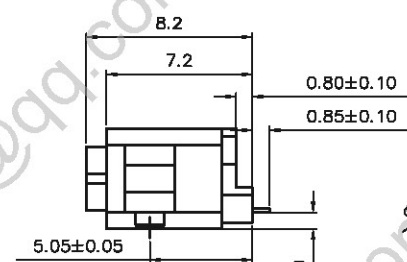
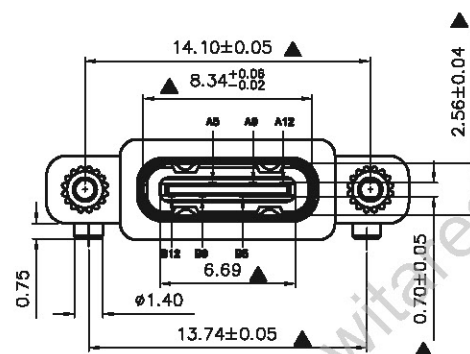
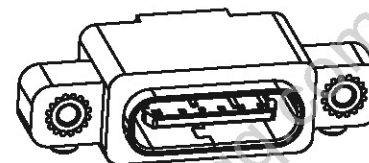
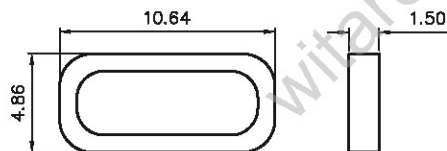


REV	ECN No.	DATE	REMARK
A	NEW	2018.09.22	NEW RELEASE
B	--	2019.05.30	变更螺母形状

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATERPROOF IP X7

O-RING FIGURE
RUBBER SR BLACKRECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

PART NO.:

SEE THE PART NUMBER CODE

深圳市纬域科技有限公司
SHENZHEN VITAREA TECHNOLOGY CO., LTDDRAWN BY
ANDY YANG
DATE
2019.05.30CHECKED BY
JAMES XIAO
DATE
2019.05.30APPROVED BY
JASON ZENG
DATE
2019.05.30

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	X.XXXX	± ---
	X.XXX	± 0.10
	X.XX	± 0.15
	X.X	± 0.25
AMF II AD	---	