

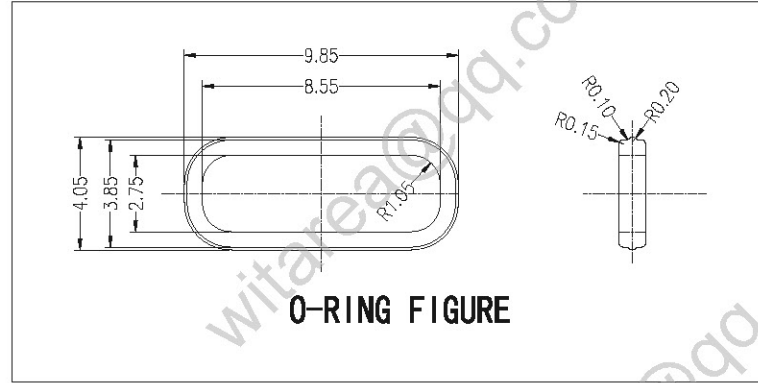
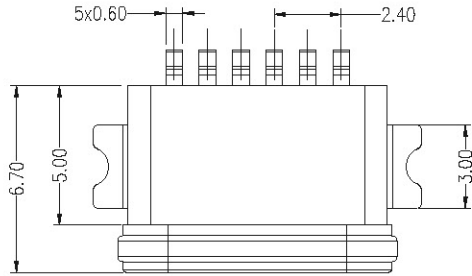
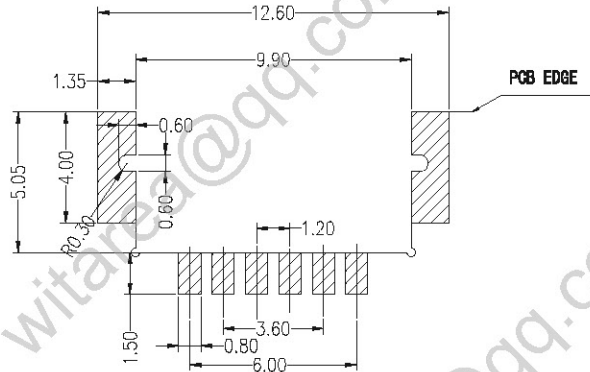
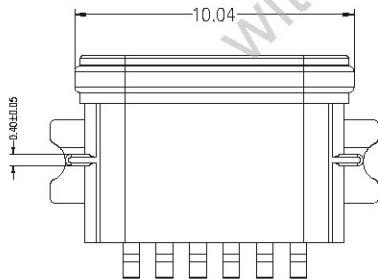



REV	ECN No.	DATE	REMARK
A0	NEW	2015.05.10	NEW RELEASE



- Note:
- Material:
 - Housing: LCP
 - Contact: C5191, t=0.20mm
 - Shell: Kirsite
 - ELECTRICAL:
 - CURRENT RATING: 3A
 - INITIAL CONTACT RESISTANCE: 40 MEGOHMS
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC MIN;
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 5~20N
 - UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)
 - FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES
 - OPERATING TEMPERATURE: -40°~80°.
 - WATERPROOF: IP-X7.

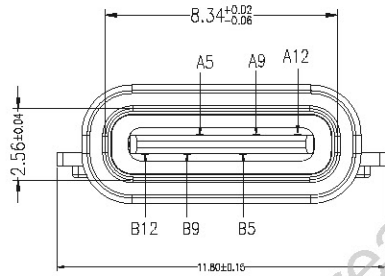

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED 0.8±0.05mm

TABLE:

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO.:
SEE THE PART NUMBER CODE

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
0	X.XXXX ± ---
1	X.XXX ± 0.10
2	X.XX ± 0.25
3	X.X ± 0.30
4	ANGULAR ± --°

深圳市纬域科技有限公司 SHENZHEN WITAREA TECHNOLOGY CO., LTD		DRAWN BY ANDY YANG	DATE 2015.05.10
TITLE TYPE C 2.0 6PIN RECEPTACLE ,MID-MOUNT, SINGLE ROW SMT,CH=0.8MM,L=6.7MM, IP67		CHECKED BY JAMES XIAO	DATE 2015.05.10
DWG.NO. W0026-6-MM1-W1	SHEET NO. 1 OF 1	APPROVED BY JASON ZENG	DATE 2015.05.10
DIMENSION STYLE MM ONLY	DESIGN UNITS METRIC	SCALE 1:1	THIRD ANGLE PROJECTION

frame size: A4	
----------------	--