
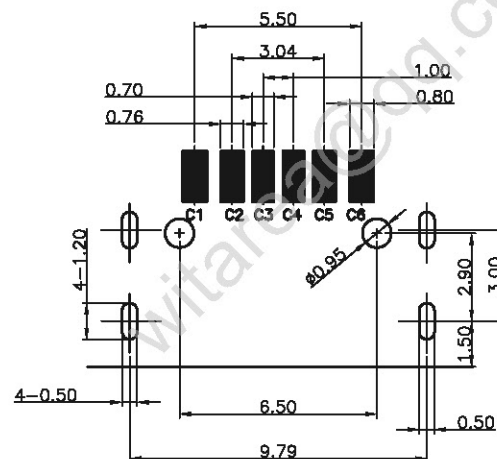
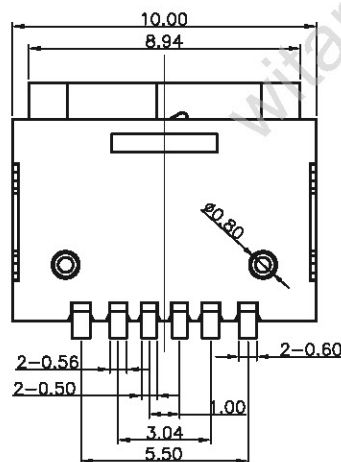
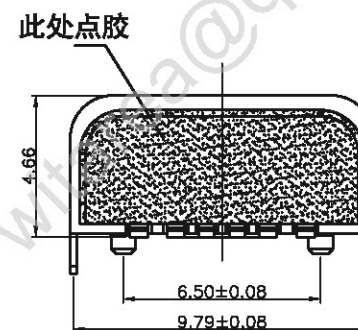
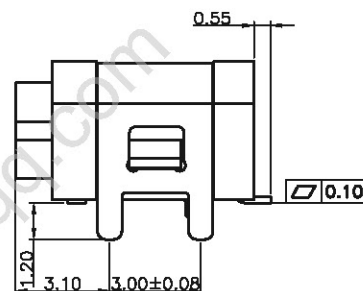
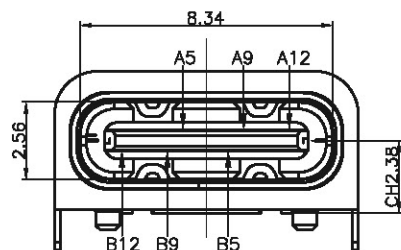
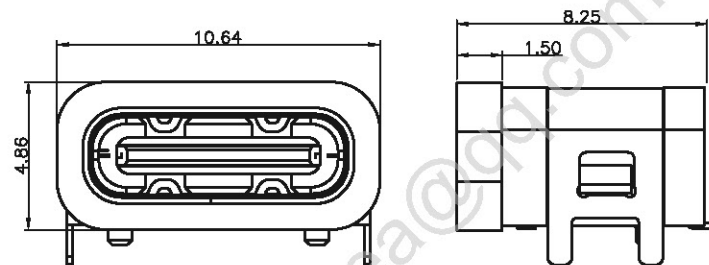


加防水圈示意图

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 30 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.
(防水等级 IPX7 1.0米深 30分钟)

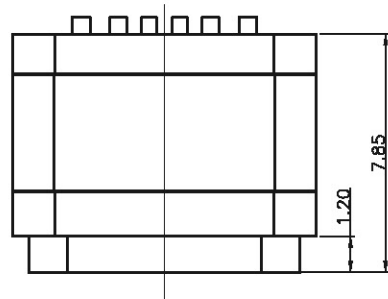

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

QUALITY SYMBOL $\nabla = 0$ $\Delta = 0$ $\blacktriangle = 0$	PART NO.:		深圳市纬域科技有限公司		DRAWN BY		DATE
	W0026-6-TM1-W2		SHENZHEN WITAREA TECHNOLOGY CO., LTD		ANDY YANG		2022.02.22
	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE TYPE C 2.0 6PIN RECEPTACLE, TOP-MOUNT, SINGLE ROW SMT, CH=2.38MM, L=7.85MM, IP67 WATERPROOF, REAR-POTTED		CHECKED BY		DATE
	X.XXXX	+ ---			JAMES XIAO		2022.02.22
	X.XXX	± 0.10			APPROVED BY JASON ZENG		DATE 2022.02.22
	X.XX	± 0.25					
X.X	± 0.30	DWG. NO.		SHEET NO.			
ANGULAR	± --°	W0026-6-TM1-W2		1 OF 1			
		DIMENSION STYLE		DESIGN UNITS		SCALE	
		MM ONLY		METRIC		1:1	
						THIRD ANGLE PROJECTION	

frame size: A4