
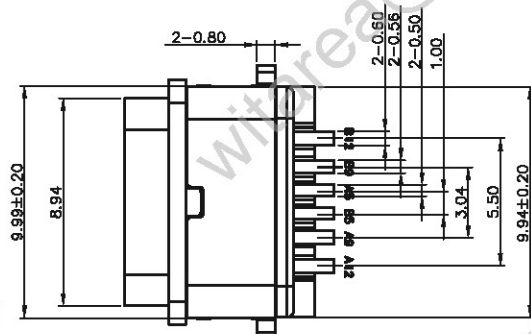


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$




REV	ECN No.	DATE	REMARK
A0	NEW	2018.11.05	

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

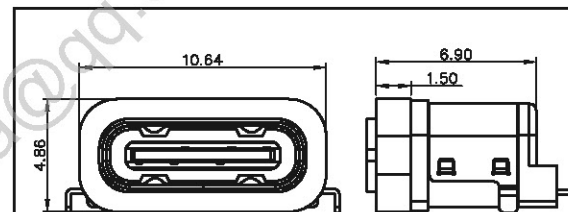

加防水圈示意图

5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MATERIAL NO.:

PART NUMBER CODE
W0026-6-MM1-W4

QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)
$\nabla = 0$	X.XXXX \pm ---
$\nabla = 0$	X.XXX \pm 0.10
$\nabla = 0$	X.XX \pm 0.25
$\nabla = 0$	X.X \pm 0.30
$\nabla = 0$	ANGULAR \pm ---

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO WITAREA TECHNOLOGY. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

深圳市纬域科技有限公司
SHENZHEN WITAREA TECHNOLOGY CO., LTD.

TITLE
TYPE C 2.0 6PIN RECEPTACLE, SINK 0.55MM, MID-MOUNT,
SINGLE ROW SMT, CH=1.68MM, L=8.2MM, IP67 WATERPROOF

DOCUMENT NO. W0026-6-MM1-W4
SHEET NO. 1 OF 1

DIMENSION STYLE
MM ONLY

DESIGN UNITS
METRIC

SCALE
5:1

THIRD ANGLE
PROJECTION

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME