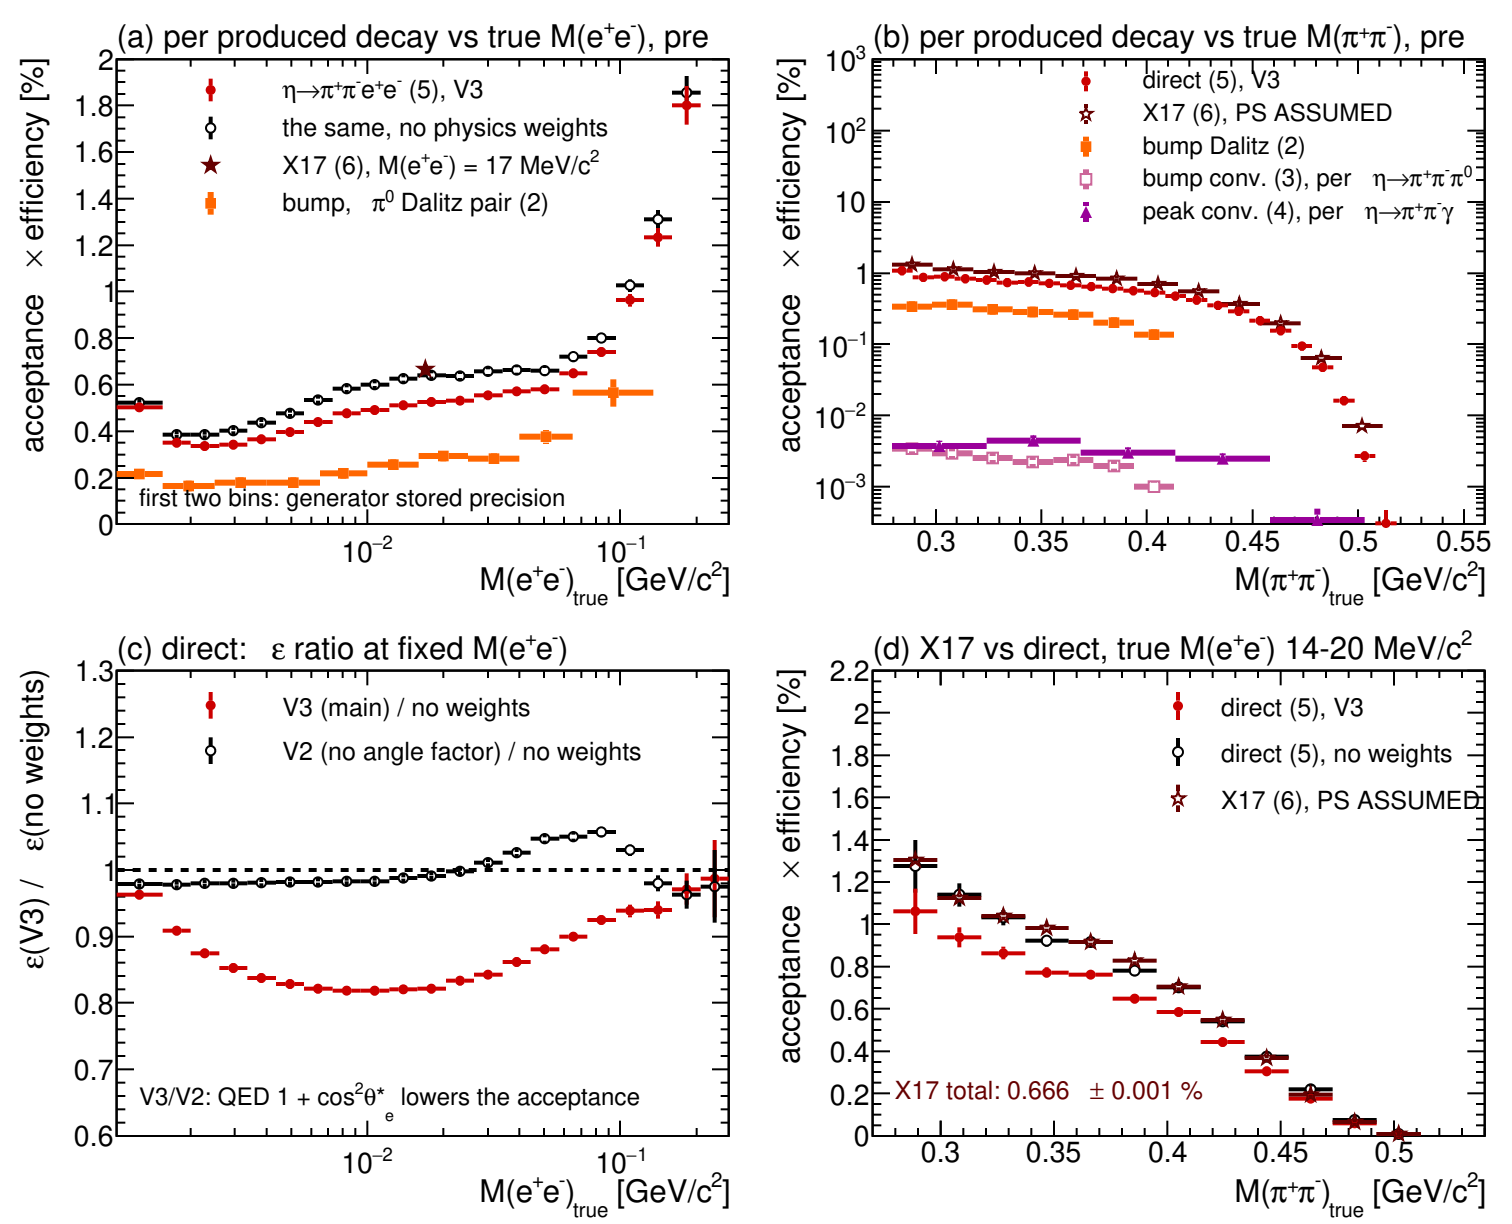
(a) per produced decay vs true M(e+e-), pre
η→π+π-e+e- (5), V3
the same, no physics weights
X17 (6), M(e+e-) = 17 MeV/c2
bump, π0 Dalitz pair (2)
first two bins: generator stored precision
acceptance × efficiency [%]
M(e+e-)true [GeV/c2]
(b) per produced decay vs true M(π+π-), pre
direct (5), V3
X17 (6), PS ASSUMED
bump Dalitz (2)
bump conv. (3), per η→π+π-π0
peak conv. (4), per η→π+π-γ
acceptance × efficiency [%]
M(π+π-)true [GeV/c2]
(c) direct: ε ratio at fixed M(e+e-)
V3 (main) / no weights
V2 (no angle factor) / no weights
V3/V2: QED 1 + cos2θ*e lowers the acceptance
ε(V3) / ε(no weights)
M(e+e-)true [GeV/c2]
(d) X17 vs direct, true M(e+e-) 14-20 MeV/c2
direct (5), V3
direct (5), no weights
X17 (6), PS ASSUMED
X17 total: 0.666 ± 0.001 %
acceptance × efficiency [%]
M(π+π-)true [GeV/c2]