
All I²C modules share GPIO4 SDA and GPIO5 SCL. Grounds are common; verify each breakout supply input before powering.
C1/C2 are optional. they might help if WiFi is unstable

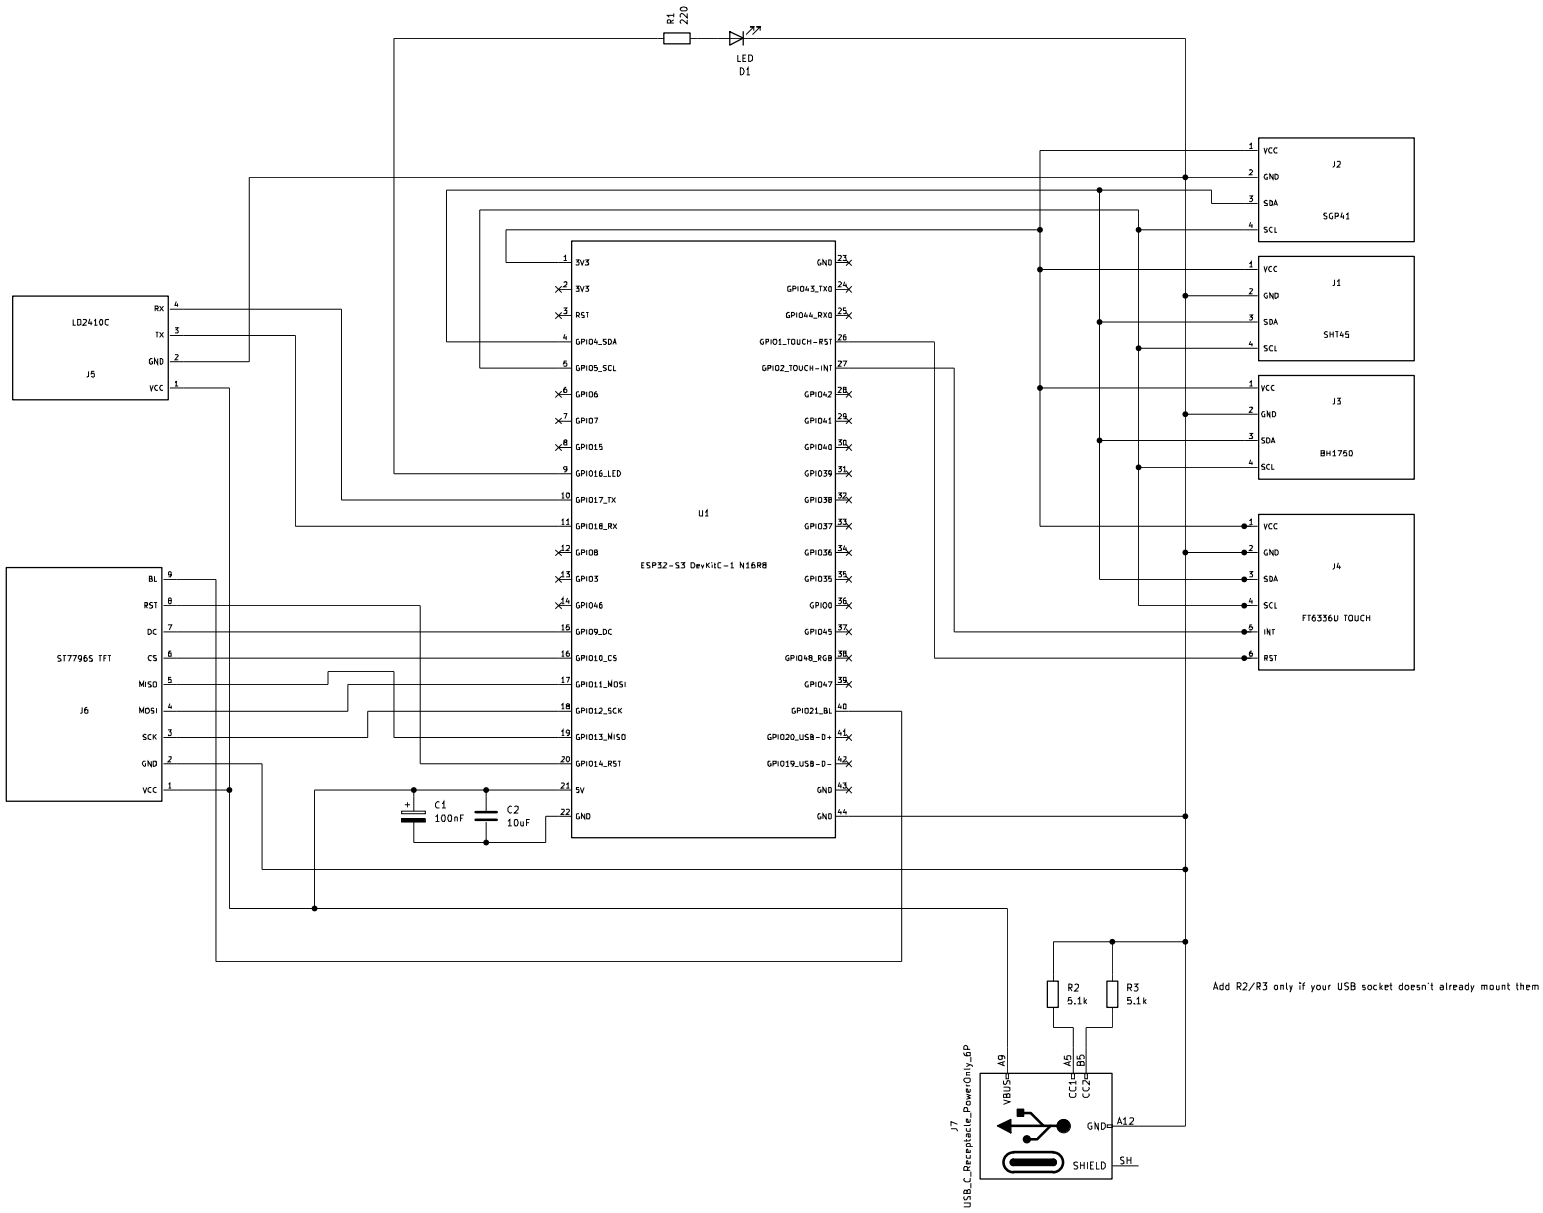

Add R2/R3 only if your USB socket doesn't already mount them