

BATTERY INPUT, FUSE, SWITCH, REVERSE-POLARITY PROTECTION




PACK CURRENT / VOLTAGE SENSE (10 mOhm shunt, was 100 mOhm)

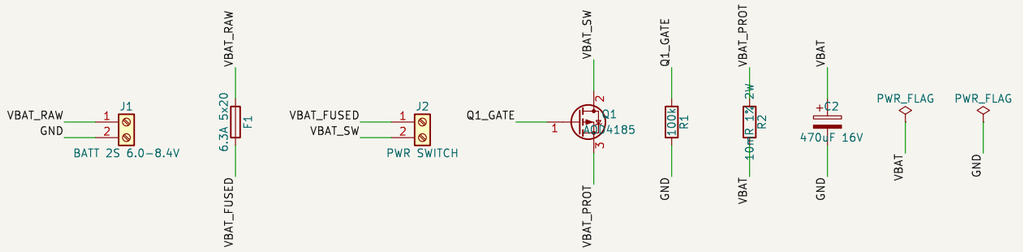


MOUNTING

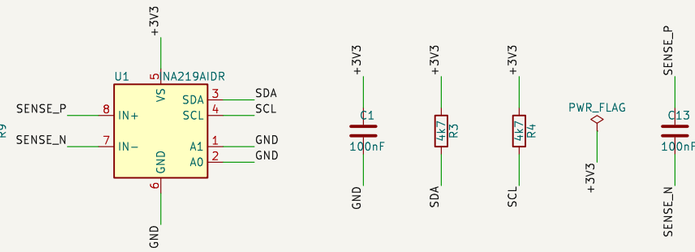


PAN SERVO SUPPLY 5 V / 3 A

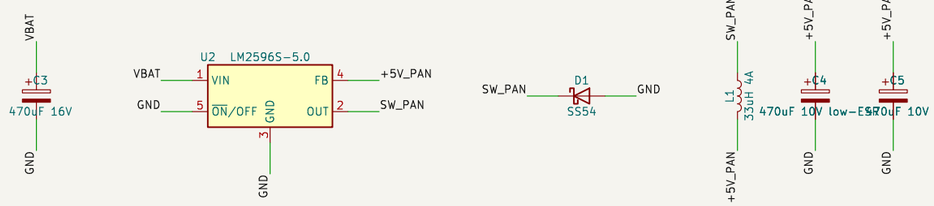


LOGIC 5 V (diode-isolated from the servo rail, own hold-up)

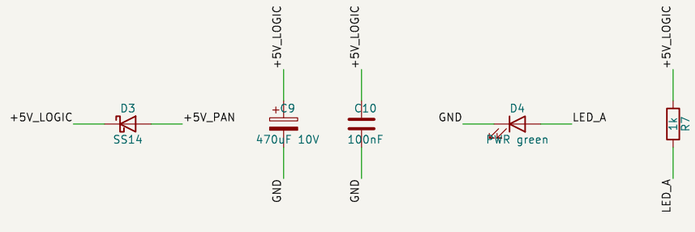


TEST POINTS

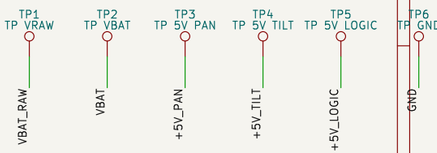


TILT SERVO SUPPLY 5 V / 3 A

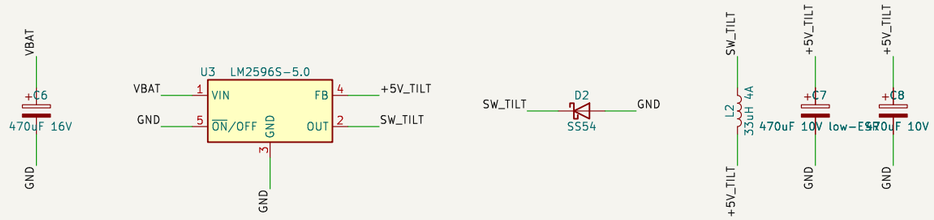


ESP32-C6-DevKitC-1 SOCKET






I2C EXPANSION



SERVO OUTPUTS, TILT LIMIT SWITCHES

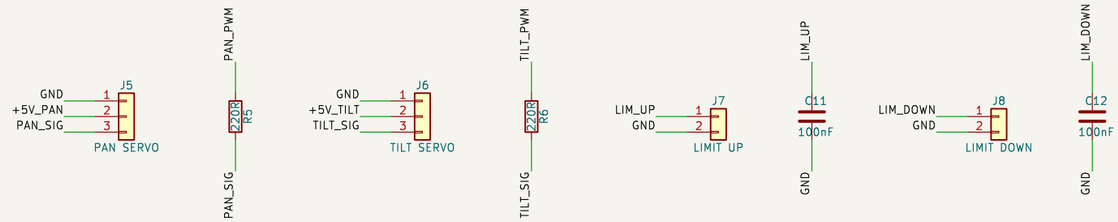

ESP32-C6-DevKitC-1 socket, INA219 + 10 mOhm shunt, limit switch inputs
2S Li-ion in, one 5 V / 3 A buck per servo, diode-isolated logic 5 V

Sheet: /
File: Tripod circuit.kicad_sch

Title: CamX Tripod Carrier Board

Size: A3	Date: 2026-10-08	**Rev: A**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1