Week 1 · Vessel Kinematics and the Otter Motion Model

USV Guidance, Navigation and Control (Graduate) · Department of Autonomous Vehicle System Engineering, Chungnam National University | revised 2026-09-04

ℹ Recordings of this semester's own classes

Every session of this course is recorded as it is given and posted to the playlist below. The written material here is the reference; the recording is the lecture, at the pace it was actually delivered. Use it to review a derivation, or to catch up on a missed week before the laboratory.

	Where
[충남대] 2026 센서신호처리 — this course, recorded live, 2026	playlist

★ Reference material — read this first

The five courses below are **taught by the instructor of this course** and are the assumed background for it. They run from the fundamentals down to the graduate material, so start wherever the gap is. Every frame, symbol and derivation used here is developed in them at length; anyone whose prerequisites are thin should work through them first, then return.

#	Course	Level	Lang.	Video	Slides and code
1	**Control Engineering** (제어공학) — the foundation: transfer functions, feedback, stability, root locus, PID	undergraduate	KO	playlist	drive
2	**Control System Design** (제어시스템설계) — design rather than analysis: specifications, loop shaping, discrete implementation	undergraduate	KO	playlist	drive
3	**Advanced Control Engineering** (제어공학특론) — reference frames, the 6-DOF equation of motion, rotation matrices and Euler angles, linearisation and trim, vehicle control design	graduate	EN	playlist	drive
4	**Sensor Signal Processing and Fusion** (센서신호처리 및 융합) — sensor models, noise, estimation and multi-sensor fusion	graduate	EN	playlist	drive
5	**Capstone Design** (캡스톤디자인) — a vehicle project carried end to end	undergraduate	KO	playlist	drive

Not fluent in MATLAB or Simulink yet? Do these before Part 2. Every laboratory in this course is Simulink, and the Onramp courses are free and take a few hours each.

Tool	Where to start
MATLAB	MATLAB Onramp · Core MATLAB Skills
Simulink	Simulink Onramp · instructor's Simulink lectures part 1 · part 2

✎ Getting the course files, and keeping them current (Windows)

The notes, models and scripts are kept in one Git repository that is updated through the semester. Clone it once; before every class, pull. A pull downloads only what has changed since the last one.

When	Where to run it	Command
once	PowerShell — installs Git for Windows	`winget install --id Git.Git -e`
once	the folder that will hold the course, e.g. `Documents`	`git clone https://github.com/wkyouncnu/Sensor-Signal-Processing-and-Fusion.git`
before every class	inside the cloned folder `Sensor-Signal-Processing-and-Fusion`	`git pull`

- `git pull` prints `Already up to date.` when nothing has changed, and otherwise lists the files it updated.
- The repository is private. When Git asks, sign in with the GitHub account the instructor has given access.
- Experiment on copies, not on the cloned files: copy a week's `WXX_simulink` folder elsewhere first, and a pull can never collide with local edits. If it already has, `git stash`, then `git pull`, then `git stash pop` sets the edits aside, updates, and puts them back.
- The MSS toolbox is not part of the repository. The weeks that simulate the Otter need it at `Tools\MSS` inside the cloned folder, and `_tools\mss_path.m` finds it there in either release layout — `Tools\MSS\VESSELS\otter.m` in the older releases, or `Tools\MSS\CRAFT\USV\models\otter.m` in the current master.
- **The two releases are not the same vessel.** The figures printed in these notes were measured with the older layout. Terminal surge speed agrees at 1.0286 m/s, but the current master turns 25.5 % faster under differential thrust, 0.1276 rad/s against 0.1017 rad/s. `mss_path` therefore prefers the older layout when both are present, and warns when only the newer one is available, so a reading that cannot reproduce is announced rather than silent.
- **A 118 MB folder disappears on the first pull after 2026-10-27.** `lectures\MSS-master` held a copy of MSS until then. It sat outside `Tools\MSS`, so no course script could reach it, and it only made cloning slower. Its removal is expected and is not a fault. Any file kept inside that folder must be moved elsewhere before pulling.

- **Course**: USV Guidance, Navigation and Control (Graduate)
- **Department**: Autonomous Vehicle System Engineering, Chungnam National University
- **This week**: ① the two reference frames and the twelve states ② the equation of motion and where each term comes from ③ an open-loop Simulink model whose settled speed is predicted on paper before it is measured

★ Before starting

- MATLAB R2024b with Simulink is installed and licensed.
- The MSS toolbox is present at `Tools/MSS`. Every script in this course adds it to the path itself; no installation is required.
- Verify with one command:

```
which otter
```

The expected reply names `Tools\MSS\VESSELS\otter.m`. If the reply is empty, the working directory is wrong.

Learning Outcomes

Upon completion of this week, the learner is able to:

1. State what each of the twelve states of `otter.m` represents, and in which reference frame it is expressed.
2. Convert an attitude between Euler angles and a unit quaternion with MSS `euler2q` and `q2euler`, and state where each representation is singular.
3. Write the 6-DOF equation of motion and identify which physical effect each term models.
4. Reduce that equation to the three horizontal degrees of freedom used for the remainder of the course, and justify what is discarded.
5. Predict the terminal surge speed of the vessel from the propeller curve and the linear damping coefficient, before running any simulation.
6. Explain why the sway force of this vessel is identically zero, and derive the Coriolis term that produces a non-zero sway *velocity* during a turn.
7. Rebuild the week's Simulink model from its builder script after breaking it.
8. Invert the actuator model of the twin-screw Otter by hand — a demanded surge force and yaw moment to two thrusts, and two thrusts to two shaft speeds — and state what saturation does to the delivered force.

Prerequisites and Setup

Item	Requirement
MATLAB	R2024b, with Simulink
Toolboxes	none beyond Simulink for this week; the optional Experiment 1-10c also needs Simulink 3D Animation and a transmitter with a USB joystick mode
MSS	`Tools/MSS`, added by the setup script
Course folder	`GradCourse/lectures/W01_simulink`
Expected duration	60 min theory, 60 min laboratory

Part 1 · Principle and experiment, section by section

Every section states what is being described, derives it, and then runs **the experiment that measures it**. The short ones are two lines in the Command Window; the long ones are the Simulink models of this week. Nothing in the text is quoted from anywhere but a run.

Part of a section	What it holds
the text	why the quantity is needed, the derivation, and the source it is checked against
Experiment N-x	the commands, the output actually obtained, and — where there is a figure — a table reading it back to the derivation

Sections 1-1 to 1-8 build the description of motion, and their experiments are short calculations that check it. Sections 1-9 to 1-13 run the Otter itself, and their experiments are the laboratory of this week.

Where this week goes

Thirteen sections is a lot to enter without a map. They answer four questions, in this order, and nothing later needs anything that has not already been answered.

	Question	Sections
1	**Where is the vessel, and which way is it pointing?** Two frames, three angles, and the matrix that converts between them	1-1 to 1-5
2	**What makes it move?** Forces and moments, and why a surface craft needs only three of the six	1-6, 1-7
3	**What exactly does `otter.m` compute?** The equation of motion term by term, the twelve states, and the propellers	1-8 to 1-10
4	**Three things worth being surprised by.** Surge is first order; the hull sways with no side force; a current moves the vessel without pushing it	1-11 to 1-13

The one idea the whole week rests on is in 1-4: body velocity is not the rate of change of position. Everything from the rotation matrix to the ocean current is a consequence of that sentence.

A reader short of time can go 1-1 → 1-3 → 1-4 → 1-9 and still follow the laboratory.

1-0. Setting up and running (15 min)

Step 1 — open the working folder

```
cd GradCourse/lectures/W01_simulink
W01_0_setup
```

Expected output:

```
  W01 setup complete
    configuration   base, 2 thrusters, rank(B) = 2
    manoeuvre       n0 = 60, dn = 3.5 rad/s
                    port 30..60 s, starboard 90..120 s
    n limits        -101.7 .. 103.9 rad/s
    current         0.00 m/s at 0 deg
    simulation      150 s at h = 0.02 s
```

- `W01_0_setup.m` is **the only file to edit this week**. Every Constant block in the model reads a variable defined there.

> **⚠ The model reads variables, not values**
>
> Changing a number inside a Simulink block instead of in `W01_0_setup.m` produces a model that behaves differently from the one the script describes. Edit the script.

Step 2 — the files of this week, in the order the sections use them

Order	File	Section	What it produces
0	`W01_0_setup.m`	1-0	the base workspace, so the model can be run from Simulink
1	`W01_1_build_openloop.m`	1-9	`W01_openloop.slx` and `img/W01_openloop.png`
2	`W01_C_terminal_speed.m`	1-11	`img/W01_result_speed.png`
3	`W01_D_the_manoeuvre.m`	1-12	`img/W01_result_track.png`
4	`W01_E_build_current.m`	1-13	`W01_current.slx` and `img/W01_current.png`
5	`W01_E_current_run.m`	1-13	`img/W01_result_current.png`
6	`W01_F_build_interactive.m`	1-10a	`W01_interactive.slx` and `img/W01_interactive.png`
7	`W01_F_button_check.m`	1-10a	the table of Experiment 1-10a — one headless run per button
8	`W01_G_build_rc.m`, `W01_G_rc_check.m`	1-10b	`W01_rc.slx`, `img/W01_rc.png` and the table of Experiment 1-10b
9	`W01_H_build_rc_usb.m`, `W01_H_usb_check.m`	1-10c	`W01_rc_usb.slx` and its table (optional hardware)
—	`W01_frames.m`	1-4	the table of §1-4; draws a figure and saves nothing

- **Each experiment is one script and one model.** Running it leaves exactly the numbers and the figures its section discusses, so a class can work through the week a page at a time.
- Experiments 1-11, 1-12 and 1-13 build the model they need if it is missing, so any one of them can be run first.
- The remaining files in the folder — `W01_vars.m`, `W01_read.m`, `W01_plot.m`, `W01_cur_plot.m`, `W01_animate.m`, `W01c_animate.m`, `W01i_animate.m`, `W01i_control.m` — are called **by** the scripts above and by the models. They are never run by hand.
- `W01_frames.m` is the script of Experiment 1-4: it prints the worked example of §1-4 and the four panels of its figure, and saves nothing. The same applies to the three-panel and drift-rose drawings inside `W01_cur_plot.m` — that file is still the current model's `StopFcn`, but Experiment 1-13 no longer calls those two drawings.
- The laboratory of the second hour lives in `W01_simulink/problems/` and `solutions/`, and is separate from these.

Step 3 — restore a model if it is broken

```
W01_1_build_openloop
```


- The model is generated by code, never drawn by hand. Any amount of experimentation can be undone with this one command, so the diagram can be dismantled freely.

1-1. Two reference frames

- Every quantity in this course belongs to exactly one of two frames. Naming which one is not pedantry; it is the difference between a model that steers and a model that does not.

The two reference frames

Position and attitude live in $\{n\}$. Velocities live in $\{b\}$. Confusing the two is the most common error in marine control code.

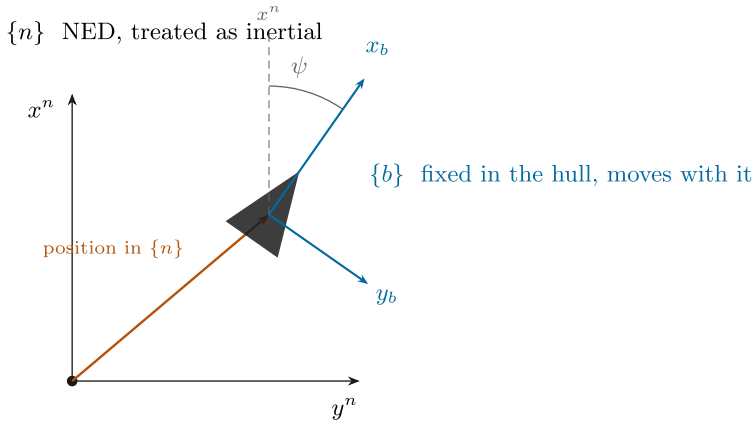

Both frames are right-handed with z pointing **down**. A positive yaw ψ turns the bow from North towards East — that is, clockwise seen from above. The body frame is the same frame, rotated by ψ and carried along with the hull; nothing else distinguishes them.

Reading the figure

Element	Meaning
x_n, y_n	North and East, fixed to the water
⊗ at o_n	z_n, Down, pointing into the page
x_b, y_b	forward and starboard, painted on the hull and turning with it
dashed grey	the vessel's position, a vector expressed in $\{n\}$
ψ	the heading, measured from North to x_b

Frame	Symbol	Origin	x	y	z
North-East-Down	$\{n\}$	a fixed point on the surface	North	East	Down
Body	$\{b\}$	a point fixed in the hull, `otter.m` uses the midship waterline	forward	starboard	down through the keel

- $\{n\}$ is treated as **inertial**: flat Earth, no rotation. For a two-metre vessel moving at three knots over a few hundred metres this is exact to far better than anything else in the model.
- $\{b\}$ **moves with the vessel**. It is the frame the sensors live in: a gyro measures p, q, r in $\{b\}$, an accelerometer measures acceleration in $\{b\}$, and a propeller pushes along x_b.
- Both frames put z **downward**. That is a marine convention and it has a consequence worth stating once: a positive yaw turns the bow from North towards East, which looks **clockwise** from above. Aerospace ENU conventions turn the other way, and mixing the two is a common source of a vessel that steers backwards.

★ The division of labour

Position and attitude are expressed in $\{n\}$. Velocities are expressed in $\{b\}$.

$$\boldsymbol{\eta} = [x \quad y \quad z \quad \phi \quad \theta \quad \psi]^\top \text{ in } \{n\}, \qquad \boldsymbol{\nu} = [u \quad v \quad w \quad p \quad q \quad r]^\top \text{ in } \{b\}$$

The whole of §1-2 to §1-5 exists to connect these two vectors. Nothing in those sections involves a mass or a force — it is geometry only, which is what the word **kinematics** means.

★ How the two position coordinates are written, everywhere in this course

In NED, **x is North and y is East**. This course writes them x^n and y^n, with the superscript naming the frame, in every week and in every figure:

$$\mathbf{p}^n = \begin{bmatrix} x^n \\ y^n \end{bmatrix}, \qquad \dot{\mathbf{p}}^n = \begin{bmatrix} \dot{x}^n \\ \dot{y}^n \end{bmatrix}.$$

Marine texts often write N and E instead, and that reads naturally when only one frame is in play. **This course does not**, for two reasons:

N is already taken	N is the **yaw moment** in $\boldsymbol{\tau} = [X \;\; Y \;\; N]^\top$, used from §1-7 onward and in every week after. One letter cannot be both a position and a moment in the same document
frames must be visible	By Week 5 three frames appear in one equation — $\{n\}$, $\{b\}$ and the path frame $\{p\}$ — and a symbol with no superscript cannot say which one it belongs to

This is Fossen's notation, so the Handbook and the lecture agree symbol for symbol. The **superscript** marks the frame; subscripts are already spoken for by components and coefficients, as in x_g, y_{pont} and N_r.

The MATLAB code writes `N` and `E` for these two, because an identifier has nowhere to put a superscript. That mapping is stated in each week's symbol table and is the only place the two spellings meet.

★ Three letters that are easy to overload, and the rule for each

A course this long runs out of letters. These three are the ones that would otherwise mean two things, and each follows `otter.m` 's own naming so that the document and the code never disagree.

Symbol	Means	Never means	Source
$\boldsymbol{\tau}$, τ_N	a **generalised force** — N for a force, N·m for a moment	a time constant	`otter.m` writes `tau` , `tau_damp` , `tau_crossflow` , all forces
T_u, T_{yaw}, T_{sway} — a **named** subscript	a **time constant**, in seconds	a thrust	`otter.m` writes `T_yaw = 1; % time constant in yaw (s)`
T, T_1, T_2 — bare, or a **numbered** subscript	a **thrust**, in newtons	a time constant	`otter.m` writes `Thrust(i)` for exactly this quantity

The one deliberate exception is Nomoto's second-order model in §4-2, where the literature's own T_1, T_2, T_3 are time constants. It is confined to a single callout, which says so on the spot.


Week 3's surge time constant was written τ_u until 2026-09-10 and is now T_u, in both the lecture and the scripts. If an older printout shows `tau_u = 1.1025 s` , it is the same number under the old name.

NED and ENU — the other convention

- Not everyone uses NED. Most robotics software — ROS, Gazebo, and the VRX simulator this course reaches at the end — uses **ENU**: x East, y North, z **Up**.

NED and ENU — the same world, two conventions

Marine and aerospace practice is NED. ROS, Gazebo and most robotics stacks are ENU. Crossing the boundary without converting is a classic field failure.

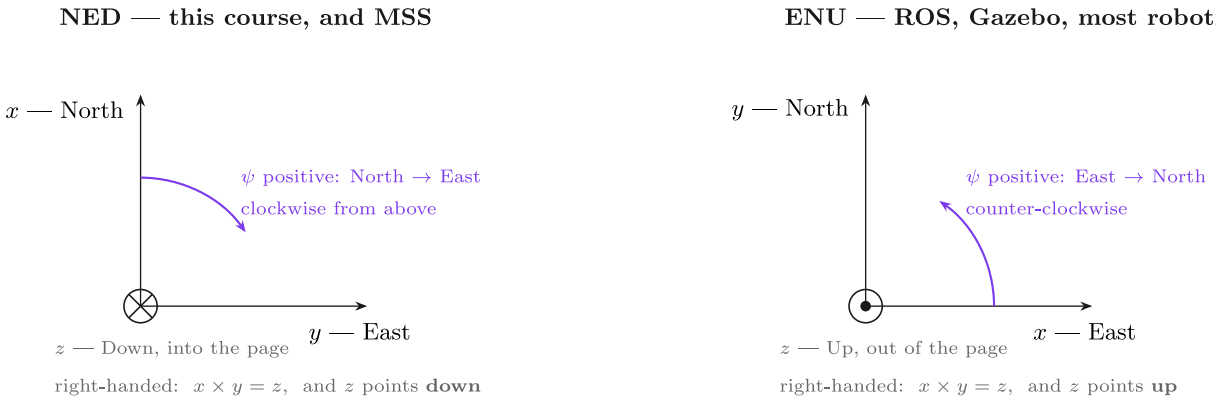

Converting. Swap the first two components and flip the third: $(x, y, z)_{\text{NED}} \leftrightarrow (y, x, -z)_{\text{ENU}}$. The swap alone would be a reflection; the flip makes it a proper rotation again, $\det = +1$. Both frames are right-handed — that is exactly why one cannot simply relabel the axes and move on.

Reading the figure

Element	Meaning
left panel	NED, used by this course, by MSS and by Fossen's Handbook
right panel	ENU, used by ROS, Gazebo and most robotics stacks
⊗ / ⊙	the third axis going into the page / out of it
orange arc	the sense in which a positive heading is measured

	NED	ENU
x	North	East
y	East	North
z	**Down**	**Up**
$\psi = 0$ points	North	East
positive ψ	North → East, clockwise from above	East → North, counter-clockwise

- The conversion is two operations:

$$\begin{bmatrix} x \\ y \\ z \end{bmatrix}_{\text{ENU}} = \underbrace{\begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & -1 \end{bmatrix}}_{\mathbf{T},\ \det \mathbf{T} = +1} \begin{bmatrix} x \\ y \\ z \end{bmatrix}_{\text{NED}}, \qquad \psi_{\text{ENU}} = 90^\circ - \psi_{\text{NED}}.$$

- Swapping the first two axes alone would be a **reflection**, $\det = -1$. Flipping the third restores $\det = +1$ and makes $\mathbf{T}$ a proper rotation — in fact a 180° turn about the axis $(1, 1, 0)/\sqrt{2}$.

> **✕ This is a field failure, not a textbook curiosity**
>
> A vessel whose autopilot is written in NED and whose simulator reports ENU turns the wrong way and drives to the mirror image of its waypoints. Nothing errors, nothing is `NaN`, and the track looks plausible until it is plotted against the plan. Convert at **one** place, at the boundary, and state which convention every interface uses.

1-2. Attitude — roll, pitch and yaw

- Three angles orient $\{b\}$ relative to $\{n\}$. Each is a rotation about one axis of the vessel.

Angle	Symbol	Rotation about	Positive sense	What it looks like
roll	ϕ	x_b, the fore-aft axis	starboard side goes down	the vessel leans in a turn
pitch	θ	y_b, the athwartships axis	bow goes **up**	the vessel trims by the stern
yaw	ψ	z_b, the vertical axis	bow swings towards starboard	the vessel changes heading

- The three collected together are the **Euler angles**:

$$\boldsymbol{\Theta} = [\phi \quad \theta \quad \psi]^\top .$$

> **✕ Pitch positive is bow-up, even though z points down**
>
> With z downward and a right-handed frame, a positive rotation about y_b carries z_b towards x_b — which lifts the bow. The sign feels wrong the first time and is correct. `otter.m` reports a small negative θ at rest, because the payload trims the vessel slightly by the bow.

1-3. The rotation matrix

- A rotation matrix answers one question: **the same physical vector, expressed in the other frame, has which components?**

$$\mathbf{v}^n = \mathbf{R}_b^n(\boldsymbol{\Theta})\,\mathbf{v}^b$$

- The superscript is the frame the answer is in; the subscript is the frame the input came from. Reading $\mathbf{R}_b^n$ as "from b to n" makes the index bookkeeping automatic, because adjacent indices cancel: $\mathbf{R}_1^n\mathbf{R}_2^1\mathbf{R}_b^2 = \mathbf{R}_b^n$.

The three elementary rotations

$$\mathbf{R}_x(\phi) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & c\phi & -s\phi \\ 0 & s\phi & c\phi \end{bmatrix}, \quad \mathbf{R}_y(\theta) = \begin{bmatrix} c\theta & 0 & s\theta \\ 0 & 1 & 0 \\ -s\theta & 0 & c\theta \end{bmatrix}, \quad \mathbf{R}_z(\psi) = \begin{bmatrix} c\psi & -s\psi & 0 \\ s\psi & c\psi & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

with $c\cdot = \cos(\cdot)$ and $s\cdot = \sin(\cdot)$. Each leaves its own axis alone — that is the column of ± 1 — and mixes the other two.


Composition, in the zyx order

The zyx Euler angles — one rotation at a time

The attitude $\boldsymbol{\Theta} = [\phi\ \theta\ \psi]^\top$ is not three independent tilts. It is an **ordered** product of three rotations, $\mathbf{R}(\boldsymbol{\Theta}) = \mathbf{R}_z(\psi)\,\mathbf{R}_y(\theta)\,\mathbf{R}_x(\phi)$, and each one turns about an axis of the triad the previous one left behind. Drawn here with $\psi = 40°$, $\theta = 20°$, $\phi = 30°$; the dashed square is the horizontal plane of $\{n\}$, kept in every panel so the tilt is readable.

start


$\{n\}$ — North, East, Down



Nothing has turned yet. The deck lies in the dashed plane and the triad is the chart's own: x^n North, y^n East, z^n Down.

after $\mathbf{R}_z(\psi)$


$\{1\}$ — turned about Down



Yaw acts about z^n, which is **Down** and not the deck normal. The deck is still level, so this rotation alone is the compass heading.

after $\mathbf{R}_y(\theta)$


$\{2\}$ — bow lifted

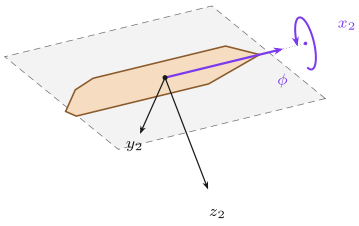

Pitch acts about y_1 — an axis produced by the first rotation, not about East. This is where the order starts to matter.

after $\mathbf{R}_x(\phi)$

$\{b\}$ — the body triad



Roll acts about x_2, the already-yawed and already-pitched fore-and-aft axis. Reordering the three gives a different attitude.

Reading the panels. The heavy coloured axis in each panel is the one the *next* rotation turns about; the coloured arc is a circle drawn in the plane perpendicular to it, and the dotted stub joins the arc's centre to that axis. An arc whose centre drifts off its axis is the classic way a figure like this goes wrong, so the geometry here is computed rather than drawn by eye.

Why the order is fixed. Rotations do not commute: $\mathbf{R}_z\mathbf{R}_y \neq \mathbf{R}_y\mathbf{R}_z$. The convention used throughout this course is zyx, so $\mathbf{R}(\boldsymbol{\Theta}) = \mathbf{R}_z(\psi)\mathbf{R}_y(\theta)\mathbf{R}_x(\phi)$ — Fossen (2021) *Handbook of Marine Craft Hydrodynamics and Motion Control*, 2nd ed., eq. (2.18), and MSS `Rzyx.m`, which `_tools/w01_euler_R.m` checks this drawing against.

These are angles, not rates. The body rates p, q, r of §1-4 are measured about the *body* axes of the last panel only. Turning them into $\dot{\boldsymbol{\Theta}}$ needs the matrix $\mathbf{T}_\Theta$ of §1-5, which is **not** a rotation and is singular at $\theta = \pm 90°$ — the reason a surface craft is safe with Euler angles and a submersible may not be.

Reading the figure

In the figure	Meaning
the deck plate	the vessel itself, drawn in the attitude reached so far
dashed grey square	the **horizontal plane of NED**, the same in all four panels. It is the ruler: the deck leaves it only once pitch and roll arrive
blue axis	the axis the **next** turn is about, with the turn drawn around it as a circle in the plane perpendicular to that axis
{n} → {1}	yaw ψ about z_n. The deck turns but stays flat in the plane
{1} → {2}	pitch θ about y_1, the **already-yawed** athwartships axis. The bow lifts out of the plane — with z_b down, positive θ is bow-up
{2} → {b}	roll ϕ about x_2, the **already-yawed and pitched** fore-aft axis. Positive ϕ puts starboard down

- The figure is drawn from the actual rotation matrices, not sketched: each panel's axes are the columns of that stage's matrix. The three axes have equal length in space, so their differing lengths on the page are foreshortening.
- The point the figure is making: **the second and third axes do not exist until the turns before them have happened.** y_1 is not y_n, and x_2 is neither x_n nor x_1.

$$\boxed{\mathbf{R}_b^n(\boldsymbol{\Theta}) = \mathbf{R}_z(\psi)\,\mathbf{R}_y(\theta)\,\mathbf{R}_x(\phi)}$$

- Written out:

$$\mathbf{R}_b^n = \begin{bmatrix} c\psi\,c\theta & -s\psi\,c\phi + c\psi\,s\theta\,s\phi & s\psi\,s\phi + c\psi\,c\phi\,s\theta \\ s\psi\,c\theta & c\psi\,c\phi + s\phi\,s\theta\,s\psi & -c\psi\,s\phi + s\theta\,s\psi\,c\phi \\ -s\theta & c\theta\,s\phi & c\theta\,c\phi \end{bmatrix}$$

- This is exactly what MSS builds in `Rzyx(phi, theta, psi)`, and what `otter.m` calls through `eulerang`.

> **⚠ The order is part of the definition**
>
> Matrix multiplication does not commute, so $\mathbf{R}_z\mathbf{R}_y\mathbf{R}_x \neq \mathbf{R}_x\mathbf{R}_y\mathbf{R}_z$. The same three numbers describe **different attitudes** under different conventions. Marine and aerospace practice is zyx; some robotics libraries default to something else. A stated convention is part of a stated attitude.

Three properties, and what each is worth

Property	Statement	Why it matters
orthogonal	$\mathbf{R}^\top\mathbf{R} = \mathbf{I}$	the inverse is the **transpose**: $\mathbf{R}_n^b = (\mathbf{R}_b^n)^{-1} = (\mathbf{R}_b^n)^\top$
unit determinant	$\det(\mathbf{R}) = +1$	it is a rotation, not a reflection
length-preserving	$\lVert\mathbf{R}\mathbf{v}\rVert = \lVert\mathbf{v}\rVert$	a change of frame never changes a speed

- Measured on $\phi = 10^\circ$, $\theta = 7^\circ$, $\psi = 50^\circ$ with the MSS implementation:

$$\det(\mathbf{R}) = 1.0000000000, \qquad \max\left|\mathbf{R}^\top\mathbf{R} - \mathbf{I}\right| = 2.2 \times 10^{-16}, \qquad \max\left|\mathbf{R}^{-1} - \mathbf{R}^\top\right| = 1.1 \times 10^{-16}.$$

> **✎ Never call `inv` on a rotation matrix**
>
> The transpose is exact, costs nothing, and cannot be ill-conditioned. Every guidance law in this course produces an error in $\{n\}$ and hands it to a controller working in $\{b\}$, so $(\mathbf{R}_b^n)^\top$ appears far more often than $\mathbf{R}_b^n$ itself.

The horizontal plane

- From Week 3 onward the vessel is treated as a 3-DOF craft and only the yaw rotation survives:

$$\mathbf{R}(\psi) = \begin{bmatrix} \cos\psi & -\sin\psi \\ \sin\psi & \cos\psi \end{bmatrix}, \qquad \begin{bmatrix} \dot{x}^n \\ \dot{y}^n \end{bmatrix} = \mathbf{R}(\psi) \begin{bmatrix} u \\ v \end{bmatrix}.$$

Experiment 1-3 · The three properties, on a real matrix (5 min)

What it measures. The three properties listed above, on one rotation matrix: that its inverse is its transpose, that its determinant is $+1$, and that it leaves lengths unchanged. No model and no simulation — the matrix is built by the MSS function every later week uses.

Opening and running.

```
W01_0_setup                                  % MSS 를 경로에 올린다 / puts MSS on the path
R = Rzyx(deg2rad(10), deg2rad(20), deg2rad(30))   % roll 10, pitch 20, yaw 30 deg
det(R)                                       % 1 이어야 한다 / must be 1
max(max(abs(R'*R - eye(3))))                 % 0 이어야 한다 / must be 0
v = [2; 0.5; 0];  [norm(v) norm(R*v)]        % 길이가 변하지 않는다 / the length is unchanged
```

Expected output:

```
det(R) = 1.000000000000000
max|R'R - I| = 2.220e-16
max|R^-1 - R'| = 1.110e-16
|v| = 2.061553   |R v| = 2.061553
```

Printed	Which property it checks	Why it matters later
$\det \mathbf{R} = 1$	a rotation, not a reflection	a frame drawn with -1 would have its axes mirrored, and every sign in the course would flip
$\lvert\mathbf{R}^{\top}\mathbf{R} - \mathbf{I}\rvert \approx 10^{-16}$	orthogonality	the inverse is free: going from NED back to the body needs no matrix inversion, only a transpose
$\lvert\mathbf{R}^{-1} - \mathbf{R}^{\top}\rvert \approx 10^{-16}$	the same property, stated as MATLAB would use it	`R'` is what the models write, and it is exact rather than merely accurate
$\lvert\mathbf{v}\rvert = \lvert\mathbf{R}\mathbf{v}\rvert$	length is preserved	a speed is the same speed in either frame; only its components change (§1-4)

What to try	What to watch
`R2 = Rzyx(0,0,deg2rad(30)); R2(1:2,1:2)`	the planar matrix above, the only one Weeks 3 to 5 use
`det(Rzyx(1,2,3))`	still 1: the properties hold at every attitude, not only at small angles

1-4. Body velocity is not the rate of change of position


- This is the single most important line of the week, and the one most often got wrong in code.

$$u \neq \dot{x}^n, \qquad v \neq \dot{y}^n.$$

- u and v are components **along axes that are themselves turning**. $\dot{x}^n$ and $\dot{y}^n$ are components along axes that never move. They coincide only at $\psi = 0$.

u and v are not the rate of change of position

A worked example. Heading $\psi = 30°$, body velocity $u = 2.0\,\text{m/s}$ forward and $v = 0.5\,\text{m/s}$ to starboard.

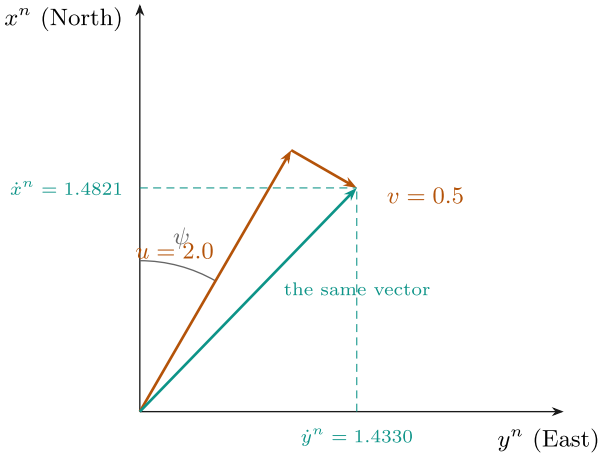

the arithmetic

$$\dot{x}^n = u\cos\psi - v\sin\psi$$

$$\dot{y}^n = u\sin\psi + v\cos\psi$$

$$\dot{x}^n = 2.0(0.8660) - 0.5(0.5000) = 1.4821\,\text{m/s}$$
$$\dot{y}^n = 2.0(0.5000) + 0.5(0.8660) = 1.4330\,\text{m/s}$$

the check that always works

$$\sqrt{2.0^2 + 0.5^2} = 2.0616$$
$$\sqrt{1.4821^2 + 1.4330^2} = 2.0616$$

A rotation changes the components, never the length.

orange: measured in $\{b\}$ by the vessel green: what the position actually does, in $\{n\}$

Neither $\dot{x}^n$ nor $\dot{y}^n$ equals u. Integrating u to get a north position is wrong at every heading except $\psi = 0$, and **it is wrong silently** — the number keeps looking plausible.

Reading the figure

Element	Meaning
orange	u and v, the components the vessel measures in $\{b\}$
green solid	the velocity itself — one physical vector, drawn once
green dashed	$\dot{x}^n$ and $\dot{y}^n$, the components that the position actually changes by
right-hand panel	the arithmetic, and the length check

- Worked out for $\psi = 30^\circ$, $u = 2.0$ m/s, $v = 0.5$ m/s:


$$\dot{x}^n = u\cos\psi - v\sin\psi = 2.0(0.8660) - 0.5(0.5000) = 1.4821 \text{ m/s},$$
$$\dot{y}^n = u\sin\psi + v\cos\psi = 2.0(0.5000) + 0.5(0.8660) = 1.4330 \text{ m/s}.$$

Quantity	Value
speed in $\{b\}$, $\sqrt{u^2 + v^2}$	**2.0616** m/s
speed in $\{n\}$, $\sqrt{(\dot{x}^n)^2 + (\dot{y}^n)^2}$	**2.0616** m/s

- The two agree because a rotation preserves length. **That equality is the cheapest available check on any frame conversion**, and it catches a transposed or mis-signed matrix immediately.

One velocity, read in two frames

- The worked example changes heading and sway at the same time, so it cannot show which of the two is responsible for what. The figure below separates them. Panels (1) to (3) hold $u = 1$ m/s and $v = 0$ and turn only the heading; panel (4) keeps the heading of panel (1) and adds a sway velocity.

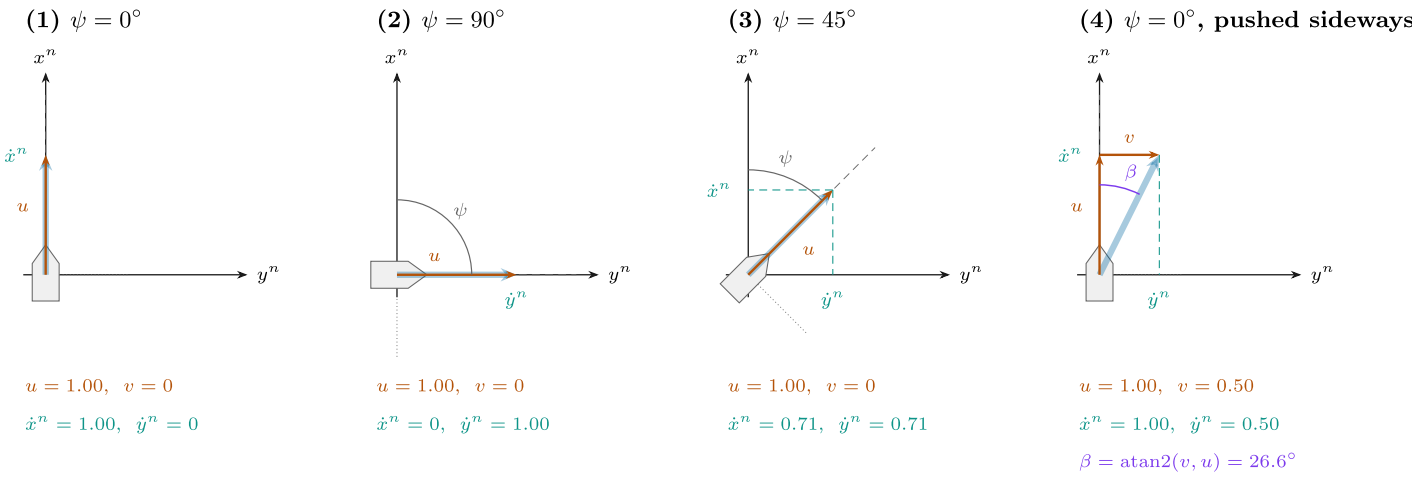

Reading the figure

Element	Meaning
orange	u and v, measured along the vessel's own axes. In (1) to (3) u lies exactly on the velocity, because $v = 0$
pale blue	the velocity itself — one vector, drawn once
green dashed	$\dot{x}^n$ and $\dot{y}^n$, the components of that vector along North and East — the same green as the figure above
grey dashed, grey dotted	the body axes: x_b through the bow, y_b to starboard
violet	the angle between where the bow points and where the vessel goes

Panel	Condition	u	v	$\dot{x}^n$	$\dot{y}^n$	Reading
(1)	$\psi = 0^\circ$	1.00	0	1.00	0	points north, goes north
(2)	$\psi = 90^\circ$	1.00	0	0	1.00	u unchanged, yet $\dot{x}^n$ is zero
(3)	$\psi = 45^\circ$	1.00	0	0.71	0.71	one u divided between two components
(4)	$\psi = 0^\circ$, pushed sideways	1.00	0.50	1.00	0.50	points north, goes north-east

- In (1), (2) and (3), u is 1.00 every time. Only the heading changed, and that alone changed $\dot{x}^n$ and $\dot{y}^n$. u and v are fixed to the hull and turn with it; $\dot{x}^n$ and $\dot{y}^n$ are fixed to the Earth and do not.
- Panel (4) is the converse. Its heading is that of panel (1), yet $\dot{y}^n$ is no longer zero, because the vessel is now moving sideways as well as forwards.

What the figure says

Four symbols, one arrow. u, v, $\dot{x}^n$ and $\dot{y}^n$ look like four different quantities, and they are two readings of a single velocity — one taken against axes that turn with the vessel, one against axes that stay with the Earth. The length check of the worked example holds in every panel: $\sqrt{u^2 + v^2} = \sqrt{(\dot{x}^n)^2 + (\dot{y}^n)^2} = 1.00$ in the first three and 1.118 in the fourth.

Panel (4) carries the idea the rest of the course depends on. The heading ψ says where the bow points. The direction the vessel actually travels is the **course**,

$$\chi = \operatorname{atan2}(\dot{y}^n, \dot{x}^n),$$

and in panels (1) to (3) the two coincide because $v = 0$. In panel (4) they part by

$$\chi - \psi = \beta = \operatorname{atan2}(v, u) = \operatorname{atan2}(0.50,\ 1.00) = 26.6^\circ,$$

which is the **crab angle**. §1-12 shows where a sway velocity comes from when no sway force is applied, and Week 5 has to steer a vessel along a path while its bow points β away from it. `W01_frames` prints the four rows of the table above.

> **✕ The symptom of getting this wrong**
>
> Integrating u to obtain a north position gives a track that is correct at $\psi = 0$, plausible at small headings, and increasingly wrong as the vessel turns — with no error, no warning and no `NaN`. Week 1's model is deliberately run at three different headings so that the failure would be visible if it were there.

Experiment 1-4 · One velocity, read in two frames (5 min)

What it measures. The worked example above and the four panels of the figure, computed rather than quoted: the two frames, the length check, and the crab angle.

Opening and running.

```
W01_0_setup
W01_frames                    % 표를 찍고 그림을 그린다 / prints the table and draws the figure
```

Expected output (the second table is the four panels):

```
§1-4  one velocity, read in two frames

  panel    psi      u      v   xn_dot   yn_dot      |V|      beta       chi
  ------------------------------------------------------------------------
      1      0   1.00   0.00   1.0000   0.0000   1.0000     0.000     0.000
      2     90   1.00   0.00   0.0000   1.0000   1.0000     0.000    90.000
      3     45   1.00   0.00   0.7071   0.7071   1.0000     0.000    45.000
      4      0   1.00   0.50   1.0000   0.5000   1.1180    26.565    26.565
```

Reading the output against the section.

Where to look	What is there	What it shows
the u column, panels 1 to 3	1.00 every time	u is measured along the hull, and the hull turning does not change it
the $\dot{x}^n$ column, panels 1 to 3	1.00, 0.00, 0.71	the same motion, read against axes that do not turn
the $\lvert V \rvert$ column	1.0000 three times	a rotation preserves length — the cheapest check on any frame conversion
panel 4 against panel 1	same ψ, different $\dot{y}^n$	sway, not heading, is what makes the vessel travel off its bow direction
the β and χ columns, panel 4	26.565°, equal to each other at $\psi = 0$	the crab angle: where the vessel goes is not where it points

What to try	What to watch
open `W01_frames.m` and change panel 4 to `v = -0.5`	β becomes -26.565°: sway to port carries the vessel to port of its bow
compare with the worked example printed first	$\psi = 30^\circ$, $u = 2$, $v = 0.5$ gives $\beta = 14.036^\circ$ and $\chi = 44.036^\circ$, and `atan2(yn_dot, xn_dot)` returns the same 44.036°

1-5. Angular velocity, and the matrix that is not a rotation


- First, what p, q and r are. Each is a rotation rate about **one axis of the hull**, and each is what a gyroscope bolted to that hull actually reports.

p, q and r — the three body angular rates

Each is measured about one axis of the **hull**, by a gyroscope bolted to the hull. All three are in rad/s and all three obey the right-hand rule.

p — roll rate


seen from astern, looking forward



the **starboard** side goes down;
$\dot{\phi} \approx p$ for a surface craft

q — pitch rate


seen from starboard, bow to the right



the bow goes **up** —
even though z points down

r — yaw rate

seen from above, bow upwards

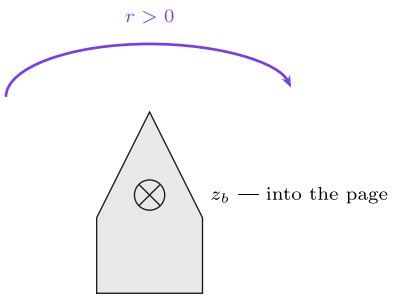

the bow swings to **starboard**;
$\dot{\psi} \approx r$ for a surface craft

Point the right thumb along the positive axis; the fingers curl in the positive direction of rotation. With z **down**, that makes a positive roll and a positive yaw look **clockwise** on these two views, while a positive pitch looks anticlockwise from starboard and lifts the bow. Both feel wrong once and then never again. The convention is SNAME (1950); Fossen (2021) Handbook §2.1, Table 2.1 states it in this form.

These are body rates, not Euler-angle rates: §1-5 gives the matrix $\mathbf{T}_\Theta$ that separates them, and it is **not** a rotation.

Reading the figure

Panel	Rate	About	Positive means
left	p	x_b	starboard side goes down
centre	q	y_b	the bow goes up
right	r	z_b	the bow swings to starboard

Symbol	Quantity	Unit	Measured by
p	roll rate	rad/s	gyro, x axis
q	pitch rate	rad/s	gyro, y axis
r	yaw rate	rad/s	gyro, z axis

- Now the conversion to Euler angle rates, and it is **not** a rotation matrix. The reason is short: p, q and r are measured about axes belonging to three **different** intermediate frames of §1-3, and those three axes are not mutually orthogonal.

$$\dot{\boldsymbol{\Theta}} = \mathbf{T}_\Theta(\boldsymbol{\Theta})\,\boldsymbol{\omega}^b_{b/n}, \qquad \mathbf{T}_\Theta(\boldsymbol{\Theta}) = \begin{bmatrix} 1 & s\phi\,t\theta & c\phi\,t\theta \\ 0 & c\phi & -s\phi \\ 0 & s\phi/c\theta & c\phi/c\theta \end{bmatrix}$$

with $t\theta = \tan\theta$. Component by component:

$$\dot{\phi} = p + q\,s\phi\,t\theta + r\,c\phi\,t\theta, \qquad \dot{\theta} = q\,c\phi - r\,s\phi, \qquad \dot{\psi} = \frac{q\,s\phi + r\,c\phi}{c\theta}.$$

Symbol	Quantity	Unit
p, q, r	body angular rates, measured by the gyro	rad/s
$\dot{\phi}, \dot{\theta}, \dot{\psi}$	Euler angle rates	rad/s
$\mathbf{T}_\Theta$	the map between them	dimensionless

- Measured with MSS `Tzyx` at $\phi = 10^\circ$, $\theta = 7^\circ$ and $[p, q, r] = [2, 5, 10]$ rad/s:

$$\dot{\boldsymbol{\Theta}} = [3.3158,\ 3.1876,\ 10.7968]^\top \ \text{rad/s}.$$

- Note that $\dot{\psi} = 10.7968 \neq r = 10$. **The yaw rate and the rate of change of heading are different numbers** whenever the vessel is rolled or pitched.

> **⚠ $\mathbf{T}_\Theta$ is singular at $\theta = \pm 90^\circ$**
>
> The $1/\cos\theta$ entries blow up: at $\theta = 89.9^\circ$ the largest entry of $\mathbf{T}_\Theta$ is already 573. This is **gimbal lock**, and it is a property of the Euler-angle representation, not of the vessel. A surface craft never approaches it, which is why this course uses Euler angles throughout. An AUV performing a vertical manoeuvre does approach it, and that is where quaternions earn their place.

> **ℹ Two simplifications that hold for this vessel, and are stated rather than assumed**
>
> For a surface craft ϕ and θ stay within a few degrees, so $\mathbf{T}_\Theta \approx \mathbf{I}$ and $\dot{\psi} \approx r$. Week 4 controls ψ by integrating r on exactly that basis. The twelve-state plant does **not** make the approximation; only the design equations do.

Unit quaternions — attitude without the singularity

- **Why a second representation.** The singularity of $\mathbf{T}_\Theta$ belongs to the three angles, not to the vessel. A four-parameter description of the same attitude, the **unit quaternion**, has no such point (Fossen 2021, §2.2.2).
- This course keeps Euler angles, because a surface craft never pitches near 90°. The quaternion is introduced because MSS uses it wherever that assumption fails — its inertial navigation filter `ins_mekf.m` and its attitude estimator `quest.m` — as strapdown inertial navigation generally does.
- The principle is Euler's rotation theorem: any change of attitude can be produced by a single rotation through an angle β about one fixed unit axis $\boldsymbol{\lambda}$. The quaternion stores that one rotation as the cosine and the sine of half its angle:

$$\mathbf{q} = \begin{bmatrix} \eta \\ \boldsymbol{\varepsilon} \end{bmatrix} = \begin{bmatrix} \cos(\beta/2) \\ \boldsymbol{\lambda} \sin(\beta/2) \end{bmatrix}, \qquad \boldsymbol{\varepsilon} = [\varepsilon_1 \quad \varepsilon_2 \quad \varepsilon_3]^\top, \qquad \mathbf{q}^\top \mathbf{q} = \eta^2 + \boldsymbol{\varepsilon}^\top \boldsymbol{\varepsilon} = 1$$

Symbol	Quantity	Note
$\mathbf{q}$	unit quaternion, from $\{b\}$ to $\{n\}$	bold — not the pitch rate q of the table above
η	scalar part	$\cos(\beta/2)$
$\boldsymbol{\varepsilon}$	vector part	$\boldsymbol{\lambda}\sin(\beta/2)$
β, $\boldsymbol{\lambda}$	angle and unit axis of the single equivalent rotation	$\boldsymbol{\lambda}^\top\boldsymbol{\lambda} = 1$. This β is Fossen's symbol and lives **only in this subsection**; from §1-12 onward, and in every later week, β is the crab angle $\mathbf{atan2}(v, u)$
$\mathbf{S}(\mathbf{a})$	skew-symmetric matrix, $\mathbf{S}(\mathbf{a})\,\mathbf{b} = \mathbf{a} \times \mathbf{b}$	MSS `Smtrx`

- Four numbers bound by one constraint leave three free — the same three degrees of freedom that $\boldsymbol{\Theta}$ carries. The unit norm is automatic, since $\cos^2 + \sin^2 = 1$.

> **✕ In MSS the scalar goes first**
>
> MSS stores $\mathbf{q} = [\eta \ \ \varepsilon_1 \ \ \varepsilon_2 \ \ \varepsilon_3]^\top$. ROS messages list the scalar last, as x, y, z, w. A quaternion copied between the two without reordering describes a different attitude, and nothing reports an error.

The rotation matrix, from the axis and the half-angle

- Start from the axis–angle form of a rotation (Fossen 2021, §2.2.2) and turn each trigonometric factor into half-angles, one operation per line:

$$
\begin{aligned}
\mathbf{R} &= \mathbf{I}_3 + \sin\beta\,\mathbf{S}(\boldsymbol{\lambda}) + (1-\cos\beta)\,\mathbf{S}^2(\boldsymbol{\lambda}) && \text{axis–angle form} \\
&= \mathbf{I}_3 + 2\sin\tfrac{\beta}{2}\cos\tfrac{\beta}{2}\,\mathbf{S}(\boldsymbol{\lambda}) + 2\sin^2\tfrac{\beta}{2}\,\mathbf{S}^2(\boldsymbol{\lambda}) && \sin\beta = 2\sin\tfrac{\beta}{2}\cos\tfrac{\beta}{2},\ \ 1-\cos\beta = 2\sin^2\tfrac{\beta}{2} \\
&= \mathbf{I}_3 + 2\cos\tfrac{\beta}{2}\,\mathbf{S}\left(\boldsymbol{\lambda}\sin\tfrac{\beta}{2}\right) + 2\,\mathbf{S}^2\left(\boldsymbol{\lambda}\sin\tfrac{\beta}{2}\right) && \mathbf{S}(\cdot)\ \text{is linear} \\
&= \mathbf{I}_3 + 2\eta\,\mathbf{S}(\boldsymbol{\varepsilon}) + 2\,\mathbf{S}^2(\boldsymbol{\varepsilon}) && \text{definition of } \eta \text{ and } \boldsymbol{\varepsilon}
\end{aligned}
$$

- Written out, with $\eta^2 + \boldsymbol{\varepsilon}^\top\boldsymbol{\varepsilon} = 1$ used on the diagonal:

$$
\mathbf{R}(\mathbf{q}) = \begin{bmatrix}
1-2(\varepsilon_2^2+\varepsilon_3^2) & 2(\varepsilon_1\varepsilon_2-\varepsilon_3\eta) & 2(\varepsilon_1\varepsilon_3+\varepsilon_2\eta) \\
2(\varepsilon_1\varepsilon_2+\varepsilon_3\eta) & 1-2(\varepsilon_1^2+\varepsilon_3^2) & 2(\varepsilon_2\varepsilon_3-\varepsilon_1\eta) \\
2(\varepsilon_1\varepsilon_3-\varepsilon_2\eta) & 2(\varepsilon_2\varepsilon_3+\varepsilon_1\eta) & 1-2(\varepsilon_1^2+\varepsilon_2^2)
\end{bmatrix}
$$

- Every entry is a product of two components. $\mathbf{R}(\mathbf{q})$ contains no trigonometric function at all.
- $\mathbf{R}(-\mathbf{q}) = \mathbf{R}(\mathbf{q})$, because every entry is quadratic in $\mathbf{q}$. The quaternion $-\mathbf{q}$ is the rotation by $2\pi-\beta$ about $-\boldsymbol{\lambda}$ — the same rotation, reached the other way round — so each attitude has exactly two quaternions.
- This is MSS `Rquat`, line for line:

```
% MSS, GNC/Rquat.m (2021 release) - LIBRARY/kinematics/Rquat.m in 2022 and later
% Author: Thor I. Fossen. MIT License.
tol = 1e-6;
if abs(norm(q)-1)>tol; error('norm(q) must be equal to 1'); end

eta = q(1);
eps = q(2:4);

S = Smtrx(eps);
R = eye(3) + 2*eta*S + 2*S^2;
```

- Measured by `_tools/verify_w01_theory.m` at $\phi = 10^\circ$, $\theta = 7^\circ$, $\psi = 50^\circ$, the attitude of §1-3:

Check	Result
$\mathbf{q}$ from `euler2q`	$[0.903424,\ 0.053141,\ 0.091883,\ 0.415403]^\top$
$\lVert\mathbf{q}\rVert - 1$	2.2×10^{-16}
$\max\lvert\mathbf{R}(\mathbf{q}) - \mathbf{R}_b^n(\boldsymbol{\Theta})\rvert$, `Rquat` against `Rzyx`	2.2×10^{-16}
$\max\lvert\mathbf{R}(-\mathbf{q}) - \mathbf{R}(\mathbf{q})\rvert$	0

Quaternion kinematics — the rate equation without a division

- The quaternion changes at half the product of $\mathbf{q}$ with the angular velocity written as a quaternion of zero scalar part (Fossen 2021, §2.2.2). The product of two quaternions, MSS `quatprod`, is

$$
\mathbf{q}_1 \otimes \mathbf{q}_2 = \begin{bmatrix}
\eta_1\eta_2 - \boldsymbol{\varepsilon}_1^\top\boldsymbol{\varepsilon}_2 \\
\eta_1\boldsymbol{\varepsilon}_2 + \eta_2\boldsymbol{\varepsilon}_1 + \mathbf{S}(\boldsymbol{\varepsilon}_1)\,\boldsymbol{\varepsilon}_2
\end{bmatrix}
$$

- Substituting $\mathbf{q}_2 = [0\ \ \boldsymbol{\omega}^\top]^\top$, with $\boldsymbol{\omega} = \boldsymbol{\omega}_{b/n}^b = [p\ \ q\ \ r]^\top$ the gyro rates of this section:

$$
\begin{aligned}
\dot{\mathbf{q}} &= \tfrac{1}{2}\,\mathbf{q} \otimes \begin{bmatrix} 0 \\ \boldsymbol{\omega} \end{bmatrix} && \text{the kinematic equation} \\
&= \tfrac{1}{2} \begin{bmatrix} \eta \cdot 0 - \boldsymbol{\varepsilon}^{\top}\boldsymbol{\omega} \\ \eta\,\boldsymbol{\omega} + 0 \cdot \boldsymbol{\varepsilon} + \mathbf{S}(\boldsymbol{\varepsilon})\,\boldsymbol{\omega} \end{bmatrix} && \text{product rule with } \eta_2 = 0,\ \boldsymbol{\varepsilon}_2 = \boldsymbol{\omega} \\
&= \underbrace{\tfrac{1}{2} \begin{bmatrix} -\boldsymbol{\varepsilon}^{\top} \\ \eta\,\mathbf{I}_3 + \mathbf{S}(\boldsymbol{\varepsilon}) \end{bmatrix}}_{\mathbf{T}_q(\mathbf{q})} \boldsymbol{\omega} && \text{factor out } \boldsymbol{\omega}
\end{aligned}
$$

$$
\mathbf{T}_q(\mathbf{q}) = \frac{1}{2} \begin{bmatrix} -\varepsilon_1 & -\varepsilon_2 & -\varepsilon_3 \\ \eta & -\varepsilon_3 & \varepsilon_2 \\ \varepsilon_3 & \eta & -\varepsilon_1 \\ -\varepsilon_2 & \varepsilon_1 & \eta \end{bmatrix}
$$

- This is MSS `Tquat` for a four-element input. Given a three-element $\boldsymbol{\omega}$ instead, `Tquat` returns the 4×4 matrix $\mathbf{T}_{\omega}$ with $\dot{\mathbf{q}} = \mathbf{T}_{\omega}\,\mathbf{q}$ — the same equation arranged the other way.

```
% MSS, GNC/Tquat.m (2021 release) – the branch taken when the input is q
% Author: Thor I. Fossen. MIT License.
eta  = u(1); eps1 = u(2); eps2 = u(3); eps3 = u(4);

T = 0.5 * [...
    -eps1 -eps2 -eps3
     eta  -eps3  eps2
     eps3  eta  -eps1
    -eps2  eps1  eta   ];
```

- Set beside $\mathbf{T}_{\Theta}$ of this section, with the largest entries measured by `verify_w01_theory` at $\phi = \psi = 0$:

	$\mathbf{T}_{\Theta}(\boldsymbol{\Theta})$, Euler angles	$\mathbf{T}_q(\mathbf{q})$, unit quaternion
entries	contain $1/\cos\theta$ and $\tan\theta$	$\pm\frac{1}{2}$ times a component of $\mathbf{q}$
where it fails	$\theta = \pm 90^{\circ}$	nowhere: $\mathbf{T}_q^{\top}\mathbf{T}_q = \frac{1}{4}\mathbf{I}_3$ for every unit $\mathbf{q}$
largest entry, $\theta = 0^{\circ}$	1.00	0.5000
largest entry, $\theta = 89^{\circ}$	57.30	0.3566
largest entry, $\theta = 89.9^{\circ}$	572.96	0.3539
work per step	trigonometric functions	products and sums only

- Measured: $\frac{1}{2}\,\mathbf{q} \otimes [0 \;\; \boldsymbol{\omega}^{\top}]^{\top}$ against `Tquat(q)*w` agrees to 3.5×10^{-18}; $\mathbf{T}_q^{\top}\mathbf{T}_q - \frac{1}{4}\mathbf{I}_3$ is 5.6×10^{-17}; and differentiating `euler2q` numerically along an Euler-angle path reproduces `Tquat(q)*w` to 2.4×10^{-9}, against $\|\dot{\mathbf{q}}\| = 5.68 \times 10^{-2}$.
- **The price is the constraint.** Once discretised, nothing in $\dot{\mathbf{q}} = \mathbf{T}_q\boldsymbol{\omega}$ holds $\mathbf{q}^{\top}\mathbf{q}$ at one. Forward Euler at $h = 0.02$ s for 100 s with $\boldsymbol{\omega} = [0.3,\ -0.2,\ 0.5]$ rad/s leaves $\|\mathbf{q}\| - 1 = 0.0997$, and `Rquat` refuses any quaternion more than 10^{-6} from unit length. Three remedies are in use:

Remedy	How	Where
renormalise after each step	$\mathbf{q} \leftarrow \mathbf{q}/\lVert\mathbf{q}\rVert$	the first line of `q2euler`
a restoring term in the equation	$\dot{\mathbf{q}} = \mathbf{T}_q(\mathbf{q})\boldsymbol{\omega} + \frac{\gamma}{2}\left(1 - \mathbf{q}^\top\mathbf{q}\right)\mathbf{q}$ with $\gamma \geq 0$; the norm error decays with time constant $1/\gamma$	Fossen (2021), §2.2.2
exact discretisation	$\mathbf{q}_{k+1} = \exp(\mathbf{T}_\omega h)\,\mathbf{q}_k$. $\mathbf{T}_\omega$ is skew-symmetric, so its exponential is orthogonal and keeps the norm	`ins_mekf.m`, line 157

Euler angles to a quaternion — `euler2q`

- The zyx order of §1-3, $\mathbf{R}_b^n = \mathbf{R}_z(\psi)\mathbf{R}_y(\theta)\mathbf{R}_x(\phi)$, carries over directly, because the quaternion product composes rotations in the same order as the matrices: $\mathbf{R}(\mathbf{q}_1 \otimes \mathbf{q}_2) = \mathbf{R}(\mathbf{q}_1)\,\mathbf{R}(\mathbf{q}_2)$, measured to 2.2×10^{-16}. Each elementary rotation is a half-angle about one coordinate axis (Fossen 2021, §2.2.3):

$$\mathbf{q} = \mathbf{q}_z(\psi) \otimes \mathbf{q}_y(\theta) \otimes \mathbf{q}_x(\phi), \qquad \mathbf{q}_x = \begin{bmatrix} \bar{c}_\phi \\ \bar{s}_\phi \\ 0 \\ 0 \end{bmatrix}, \quad \mathbf{q}_y = \begin{bmatrix} \bar{c}_\theta \\ 0 \\ \bar{s}_\theta \\ 0 \end{bmatrix}, \quad \mathbf{q}_z = \begin{bmatrix} \bar{c}_\psi \\ 0 \\ 0 \\ \bar{s}_\psi \end{bmatrix}$$

with the bar marking a **half** angle, $\bar{c}_\phi = \cos(\phi/2)$ and $\bar{s}_\phi = \sin(\phi/2)$ — not the $c\phi = \cos\phi$ of §1-3.

- The first product. Its cross term is $\mathbf{S}(\boldsymbol{\varepsilon}_z)\,\boldsymbol{\varepsilon}_y = [0 \;\; 0 \;\; \bar{s}_\psi]^\top \times [0 \;\; \bar{s}_\theta \;\; 0]^\top = [-\bar{s}_\psi\bar{s}_\theta \;\; 0 \;\; 0]^\top$, so

$$\mathbf{q}_z \otimes \mathbf{q}_y = \begin{bmatrix} \bar{c}_\psi\,\bar{c}_\theta \\ -\bar{s}_\psi\,\bar{s}_\theta \\ \bar{c}_\psi\,\bar{s}_\theta \\ \bar{s}_\psi\,\bar{c}_\theta \end{bmatrix}$$

- The second product, with $\mathbf{q}_x$, one component per line:

$$\begin{aligned} \eta &= \bar{c}_\psi\bar{c}_\theta\bar{c}_\phi + \bar{s}_\psi\bar{s}_\theta\bar{s}_\phi \\ \varepsilon_1 &= \bar{c}_\psi\bar{c}_\theta\bar{s}_\phi - \bar{s}_\psi\bar{s}_\theta\bar{c}_\phi \\ \varepsilon_2 &= \bar{s}_\psi\bar{c}_\theta\bar{s}_\phi + \bar{c}_\psi\bar{s}_\theta\bar{c}_\phi \\ \varepsilon_3 &= \bar{s}_\psi\bar{c}_\theta\bar{c}_\phi - \bar{c}_\psi\bar{s}_\theta\bar{s}_\phi \end{aligned}$$

- At the attitude of §1-3 the intermediate product is $[0.904617, \; -0.025800, \; 0.055329, \; 0.421830]^\top$, and the final one matches `euler2q` to 1.1×10^{-16}. The four lines are MSS `euler2q` exactly, with `cy` $= \bar{c}_\psi$, `cp` $= \bar{c}_\theta$ and `cr` $= \bar{c}_\phi$:

```
% MSS, GNC/euler2q.m (2021 release) – LIBRARY/kinematics/euler2q.m in 2022 and later
% Author: Thor I. Fossen. MIT License. Algorithm after NASA Mission Planning and
% Analysis Division, "Euler Angles, Quaternions, and Transformation Matrices".
cy = cos(psi * 0.5);
sy = sin(psi * 0.5);
cp = cos(theta * 0.5);
sp = sin(theta * 0.5);
cr = cos(phi * 0.5);
sr = sin(phi * 0.5);

q = [cy * cp * cr + sy * sp * sr
     cy * cp * sr - sy * sp * cr
     sy * cp * sr + cy * sp * cr
     sy * cp * cr - cy * sp * sr];

q = q/(q'*q);
```

- The last line divides by $\mathbf{q}^\top\mathbf{q}$, the **squared** norm. It changes nothing here, because the four lines already give a unit quaternion to round-off, but it is not a normaliser; `q/norm(q)` is.

A quaternion to Euler angles — `q2euler`

- The conversion back reads five entries of $\mathbf{R}(\mathbf{q})$ and inverts the zyx matrix written out in §1-3 (Fossen 2021, §2.2.4):

$$
\begin{aligned}
R_{31} &= -\sin\theta && \Longrightarrow && \theta &= -\arcsin R_{31} \\
\frac{R_{32}}{R_{33}} &= \frac{\cos\theta\,\sin\phi}{\cos\theta\,\cos\phi} && \Longrightarrow && \phi &= \operatorname{atan2}(R_{32},\, R_{33}) \\
\frac{R_{21}}{R_{11}} &= \frac{\sin\psi\,\cos\theta}{\cos\psi\,\cos\theta} && \Longrightarrow && \psi &= \operatorname{atan2}(R_{21},\, R_{11})
\end{aligned}
$$

- The entries come from $\mathbf{R}(\mathbf{q})$ above, and `atan2` keeps the correct quadrant because $\cos\theta > 0$ whenever $|\theta| < 90^\circ$. Euler to quaternion and back returns the starting angles to 6.4×10^{-15} degrees.
- **The singularity comes back here.** At $\theta = \pm 90^\circ$ the four entries R_{11}, R_{21}, R_{32} and R_{33} all vanish, `atan2(0,0)` has no meaning, and only the combination $\phi \mp \psi$ is defined. The quaternion never had the singularity; the angles it is converted into do. The working rule follows: integrate in $\mathbf{q}$, and convert to $\boldsymbol{\Theta}$ only to display or to command.
- The 2021 release this course runs:

```
% MSS, GNC/q2euler.m (2021 release)
% Author: Thor I. Fossen. MIT License.
q = q / norm(q);            % normalize q, handle round-off errors
R = Rquat(q);

phi = atan2(R(3,2),R(3,3));

if (abs( R(3,1 )) > 1)      % handle NaN due to round-off errors
    R(3,1) = sign(R(3,1));
else
    theta = -asin(R(3,1));
end

psi = atan2(R(2,1),R(1,1));
```

> ⚠ **The 2021 `q2euler` fails at $\theta = \pm 90^\circ$**
>
> When round-off pushes $|R_{31}|$ past one, the `if` branch clamps R_{31} and then **never computes** `theta`, and MATLAB stops with *Output argument "theta" not assigned*. `verify_w01_theory` meets $R_{31} = 1.0000000000000002$ on its fourth random attitude at $\theta = 90^\circ$. The revision of 2022-04-15 moves `theta = -asin(R(3,1));` below the `end`, so that it runs after the clamp. A surface craft never reaches this branch; an AUV script on the 2021 release can.

The MSS functions, and where each one lives

Function	Computes	Call	2021 release (this course)	2022 and later
`euler2q`	$\boldsymbol{\Theta} \to \mathbf{q}$, Fossen §2.2.3	`q = euler2q(phi,theta,psi)`	`GNC/euler2q.m`	`LIBRARY/kinematics/`
`q2euler`	$\mathbf{q} \to \boldsymbol{\Theta}$, Fossen §2.2.4	`[phi,theta,psi] = q2euler(q)`	`GNC/q2euler.m`	`LIBRARY/kinematics/`, round-off branch fixed
`Rquat`	$\mathbf{R}(\mathbf{q})$	`R = Rquat(q)`	`GNC/Rquat.m`	`LIBRARY/kinematics/`
`Tquat`	$\mathbf{T}_q(\mathbf{q})$, 4×3; or $\mathbf{T}_\omega(\boldsymbol{\omega})$, 4×4	`T = Tquat(q)`	`GNC/Tquat.m`	`LIBRARY/kinematics/`
`quatprod`	$\mathbf{q}_1 \otimes \mathbf{q}_2$	`q = quatprod(q1,q2)`	`GNC/quatprod.m`	`LIBRARY/kinematics/`
`quatern`	$\mathbf{blkdiag}(\mathbf{R}(\mathbf{q}),\ \mathbf{T}_q(\mathbf{q}))$, 7×6	`[J,J1,J2] = quatern(q)`	`GNC/quatern.m`	`LIBRARY/kinematics/`

	Euler angles Θ	**Unit quaternion $\mathbf{q}$**
parameters	three	four, bound by $\mathbf{q}^{\mathsf{T}}\mathbf{q} = 1$
singular	at $\theta = \pm 90^{\circ}$	never
one attitude is	one triple, within the angle ranges	two quaternions, $\mathbf{q}$ and $-\mathbf{q}$
readable at a glance	yes — roll, pitch, heading	no — an axis and a half-angle
numerical care	none	the norm must be restored
in this course	the plant and every controller: `otter.m` calls `eulerang` (line 200)	MSS's inertial navigation and attitude estimation, and any vehicle that pitches steeply

Experiment 1-5 · The singularity, and the quaternion that does not have it (5 min)

What it measures. The two claims of this section: that $\mathbf{T}_{\Theta}$ blows up as the pitch approaches 90° — $\mathbf{R}$ never does — and that a quaternion carries the same attitude through it, returning the original angles exactly.

Opening and running.

```
W01_0_setup
for th = [0 45 80 89 89.9]
    T = Tzyx(deg2rad(10), deg2rad(th));
    fprintf('  theta = %5.1f deg   largest |T| entry = %8.2f\n', th, max(max(abs(T))));
end
q = euler2q(deg2rad(10), deg2rad(20), deg2rad(30));   % 각도 -> 쿼터니언
[phi, theta, psi] = q2euler(q);                       % 다시 각도로 / and back
[rad2deg(phi) rad2deg(theta) rad2deg(psi)]
norm(q)
```

Expected output:

```
  theta =   0.0 deg   largest |T| entry =     1.00
  theta =  45.0 deg   largest |T| entry =     1.39
  theta =  80.0 deg   largest |T| entry =     5.67
  theta =  89.0 deg   largest |T| entry =    56.43
  theta =  89.9 deg   largest |T| entry =   564.25

ans =
   10.0000   20.0000   30.0000

ans =
     1
```

Reading the output against the section.

Where to look	What is there	What it shows
the first column of numbers	1.00, 1.39, 5.67, 56.43, 564.25	$\tan\theta$ in the matrix: every $10\times$ nearer to 90° multiplies the entries by about 10
the same column at $\theta = 0$	exactly 1.00	level, $\mathbf{T}_\Theta$ is the identity and the Euler rates are the gyro rates
the round trip	10, 20, 30 back to the digit	a quaternion loses nothing; it simply has no singular attitude to lose it at
$\lvert\mathbf{q}\rvert = 1$	exactly one	the constraint that replaces the third Euler angle's freedom

- The Otter never pitches steeply, so this course uses Euler angles throughout. A quadrotor or an AUV that can point straight up cannot, and §1-5 is where that choice is made rather than discovered.

What to try	What to watch
`Tzyx(deg2rad(10), deg2rad(90))`	MATLAB returns `Inf`: the matrix does not exist at the singularity, and no amount of numerical care recovers it
`max(max(abs(Rzyx(deg2rad(10), deg2rad(90), 0))))`	1 — the **rotation** matrix is perfectly well behaved at the same attitude. It is the rate conversion that fails, not the attitude

1-6. Kinematics and kinetics

- The word **dynamics** covers two different questions, and separating them is what makes the model tractable.

	Question	Depends on	Sections
kinematics	if the vessel moves like *this*, where does it end up?	geometry only — no mass, no force	§1-2 to §1-5
kinetics	what makes it move like that?	mass, added mass, damping, thrust	§1-7 onward

- The two are stacked, and the whole model is these two lines:

$$\underbrace{\dot{\boldsymbol{\eta}} = \mathbf{J}_\Theta(\boldsymbol{\eta})\,\boldsymbol{\nu}}_{\text{kinematics}}, \qquad \underbrace{\mathbf{M}\dot{\boldsymbol{\nu}} + \mathbf{C}(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{D}(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{g}(\boldsymbol{\eta}) = \boldsymbol{\tau}}_{\text{kinetics}}$$

$$\mathbf{J}_\Theta(\boldsymbol{\eta}) = \begin{bmatrix} \mathbf{R}_b^n(\boldsymbol{\Theta}) & \mathbf{0}_{3\times3} \\ \mathbf{0}_{3\times3} & \mathbf{T}_\Theta(\boldsymbol{\Theta}) \end{bmatrix}$$

- $\mathbf{J}_\Theta$ is just §1-3 and §1-5 stacked: $\mathbf{R}_b^n$ for the velocities, $\mathbf{T}_\Theta$ for the rates.


> **Why the split matters in practice**
>
> The kinematics is **exact** — it is geometry, and no coefficient in it was ever measured. Every uncertainty in a marine model lives in the kinetics: in $\mathbf{M}$, $\mathbf{C}$, $\mathbf{D}$ and $\boldsymbol{\tau}$. When a simulation disagrees with a trial, the kinematics is not the place to look.

1-7. Six degrees of freedom, four, and three

- A free rigid body has **six** degrees of freedom. Marine practice names them:

DOF	Motion	Linear or angular	State	Unit
1	surge	translation along x_b	u	m/s
2	sway	translation along y_b	v	m/s
3	heave	translation along z_b	w	m/s
4	roll	rotation about x_b	p	rad/s
5	pitch	rotation about y_b	q	rad/s
6	yaw	rotation about z_b	r	rad/s

- Each degree of freedom carries **three quantities that belong together**: the force or moment that drives it, the velocity that force produces, and the position that velocity integrates to.

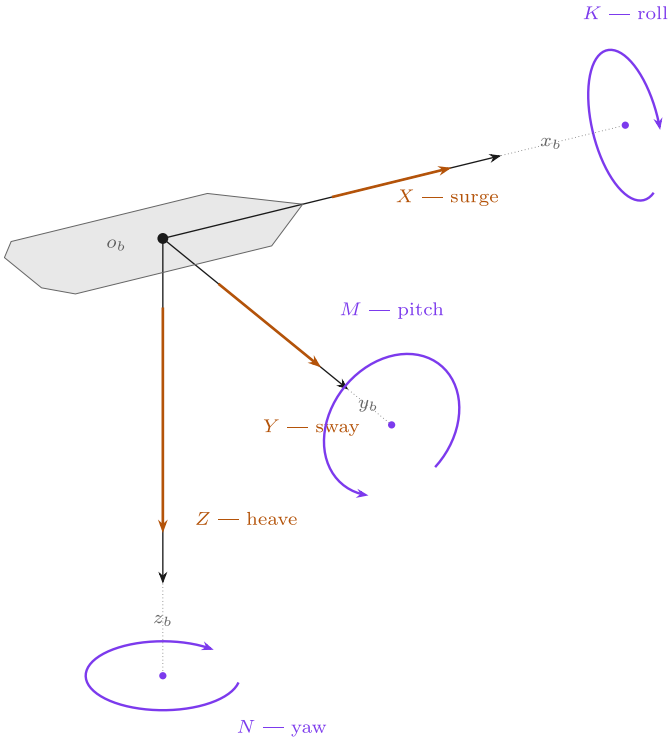

Six degrees of freedom

Each row is one direction the vessel can move. Read it across: a force produces a velocity, and integrating that velocity gives a position.

DOF	force / moment	lin. / ang. vel.	position / angle
1 surge	X	u	x
2 sway	Y	v	y
3 heave	Z	w	z
4 roll	K	p	ϕ
5 pitch	M	q	θ
6 yaw	N	r	ψ

Straight arrow = force. **Curved arrow** = moment, drawn as a circle in the plane perpendicular to its own axis, by the right-hand rule. The dotted stub joins each circle's centre to its own axis — an ellipse whose centre is off the axis is the classic way this picture goes wrong.

A surface craft is normally reduced to DOF 1, 2 and 6: surge, sway and yaw. Heave, roll and pitch remain in `otter.m` and appear in §1-12 as the reason M_{66} is not simply I_z.

In the figure	Meaning
straight orange arrow	a **force** along that body axis — X, Y, Z, in newtons
curved purple arrow	a **moment** about that body axis — K, M, N, in newton-metres. It is drawn as a circle lying in the plane **perpendicular to its own axis**, which is why the three ellipses look different: K is seen almost edge-on, N lies flat and parallel to the deck
dashed grey line	the body axis, continued out to the centre of its own moment ellipse. The centre sits **on** the axis — that is what "a moment about this axis" means
the table on the right	one row per degree of freedom, read across
$\{b\}$ and $\{n\}$	$\boldsymbol{\tau}$ and $\boldsymbol{\nu}$ are body-frame quantities. Only $\boldsymbol{\eta}$ is in NED — the point of §1-4

- Read one row at a time. A surge force X produces a surge velocity u; u then integrates to the north position x — but through the rotation matrix of §1-3, never directly.

- The right-hand rule fixes every sign at once. With z_b pointing **down**, a positive yaw moment N turns the bow to starboard, so ψ increases clockwise when seen from above.
- The three arrows on each axis also explain the naming: X, Y, Z are forces and K, M, N are moments, in the order surge–sway–heave–roll–pitch–yaw. That order is fixed and every marine text uses it.

The 6-DOF equation, written out

$$\mathbf{M}\dot{\boldsymbol{\nu}}_r + \mathbf{C}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{D}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{g}(\boldsymbol{\eta}) = \boldsymbol{\tau}, \qquad \boldsymbol{\nu} = [u\ v\ w\ p\ q\ r]^\top$$

with every matrix 6×6:

$$\mathbf{M} = \underbrace{\mathbf{M}_{RB}}_{\text{the hull}} + \underbrace{\mathbf{M}_A}_{\text{the water it drags}}, \qquad \mathbf{C} = \mathbf{C}_{RB} + \mathbf{C}_A, \qquad \mathbf{D} = \underbrace{\mathbf{D}_L}_{\text{linear}} + \underbrace{\mathbf{D}_{NL}(\boldsymbol{\nu}_r)}_{\text{quadratic}}$$

Term	What it is	Where it comes from
$\mathbf{M}_{RB}$	mass and inertia of the vessel	weighing and measuring it
$\mathbf{M}_A$	added mass — water accelerated with the hull	hydrodynamics; **not** a small correction
$\mathbf{C}_{RB}$, $\mathbf{C}_A$	Coriolis and centripetal	a consequence of writing $\boldsymbol{\nu}$ in a rotating frame
$\mathbf{D}$	damping — skin friction, then cross-flow drag	measured, or estimated from strip theory
$\mathbf{g}(\boldsymbol{\eta})$	restoring	weight and buoyancy acting at different points
$\boldsymbol{\tau}$	control force	**Bf**, §1-10 and Appendix A1

- $\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$ is the velocity **relative to the water**. Hydrodynamic forces feel relative velocity, not ground velocity. Dormant this week ($V_c = 0$); §1-13 shows exactly where it enters `otter.m`.

Reducing to 3 DOF

- Most vessels are not actuated in all six directions, so most control design is done on a reduced model. The standard reductions:

Model	States	Used for
1 DOF	u, or r, or p alone	speed controller, heading autopilot, roll damping
3 DOF horizontal	u, v, r	**DP, path following, trajectory tracking — ships and surface craft**
3 DOF longitudinal	u, w, q	diving and pitch control of a submersible
3 DOF lateral	v, p, r	turning and heading of a vessel that rolls
4 DOF	u, v, p, r	manoeuvring where **roll must be actively damped** — fins, rudders, anti-roll tanks
6 DOF	all	simulation, and control of a vehicle actuated in all six — an AUV

- The 3-DOF horizontal model keeps surge, sway and yaw:

$$\mathbf{M}\dot{\boldsymbol{\nu}} + \mathbf{C}(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{D}(\boldsymbol{\nu})\boldsymbol{\nu} = \boldsymbol{\tau}, \qquad \boldsymbol{\nu} = \begin{bmatrix} u \\ v \\ r \end{bmatrix}, \qquad \boldsymbol{\tau} = \begin{bmatrix} X \\ Y \\ N \end{bmatrix}$$

$$\mathbf{M} = \begin{bmatrix} m - X_{\dot{u}} & 0 & 0 \\ 0 & m - Y_{\dot{v}} & m x_g - Y_{\dot{r}} \\ 0 & m x_g - N_{\dot{v}} & I_z - N_{\dot{r}} \end{bmatrix}, \qquad \mathbf{D} = -\begin{bmatrix} X_u & 0 & 0 \\ 0 & Y_v & Y_r \\ 0 & N_v & N_r \end{bmatrix}$$

$$\mathbf{C}(\boldsymbol{\nu}) = \begin{bmatrix} 0 & 0 & -m\,(x_g r + v) \\ 0 & 0 & m u \\ m\,(x_g r + v) & -m u & 0 \end{bmatrix}$$

★ Reading these three matrices on the Otter

They are Fossen's general 3-DOF maneuvering matrices (Fossen 2021, *Handbook*, 2nd ed., the 3-DOF maneuvering model), and three of their symbols need pinning down before a number is put into them. The numbers below come from `otter.m` and are checked by `verify_constants` and `verify_w01_theory`.

Symbol in the matrix	Means here	Otter value
m	the **total** rigid-body mass — hull plus payload, $m + m_p$ in the table of §1-9	80.0 kg
I_z	yaw inertia about the **origin of** $\{b\}$, not about the CG. The table of §1-9 lists the CG value; the callout below it adds the transfer term	16.9779 kg·m² about the origin, against 15.1021 about the CG
$\mathbf{C}(\boldsymbol{\nu})$	as printed, only the **rigid-body** part $\mathbf{C}_{RB}$. `otter.m` adds the added-mass part $\mathbf{C}_A$ as well	—

The last row is why §1-12 finds $[\mathbf{C}\boldsymbol{\nu}]_2 = M_{11}\,ur = 85.50\,ur$ and not the $m\,ur = 80.00\,ur$ that the matrix above would give on its own: the extra $5.50\,ur = -X_{\dot{u}}\,ur$ is $\mathbf{C}_A$. `verify_w01_theory` prints the split, $80.00 + 5.50$.

With those readings the $(3,3)$ entry checks: $I_z - N_{\dot{r}} = 16.9779 + 25.6736 = 42.6515$ kg·m² $= M_{66}$.

- Note the structure: surge decouples from sway and yaw, while **sway and yaw stay coupled** through x_g — the centre of gravity being off the origin. Appendix A1 measures exactly that coupling on this vessel.
- $\mathbf{g}(\boldsymbol{\eta})$ disappears: a surface craft has no restoring force in surge, sway or yaw. Nothing pushes it back to a preferred heading or position.

★ What justifies dropping three degrees of freedom

Not convenience. Three conditions, and all three hold for the Otter:

1. **No actuation.** The propellers produce no heave, roll or pitch moment, so those motions cannot be commanded.
2. **Strong restoring.** Heave, roll and pitch are stiff, well-damped and self-righting: buoyancy pulls them back. They oscillate briefly and return. Surge, sway and yaw have no restoring force at all, so they integrate freely and must be controlled.
3. **Weak coupling.** The residual coupling into the horizontal plane is small compared with thrust and damping.

A model that keeps them anyway is not wrong, only larger. `otter.m` keeps all six for exactly that reason, and this week measures how small the discarded ones are, rather than assuming it.

> **When 4 DOF is the right answer**
>
> A ship with a high centre of gravity in a beam sea rolls enough that roll is no longer a fast, self-correcting nuisance. Adding the roll equation to the 3-DOF model gives 4 DOF, and that is the model used when rudder-roll damping or anti-roll tanks are designed. The Otter is a catamaran: wide, shallow, and stiff in roll. Three is enough.

Experiment 1-7 · Which three rows survive (5 min)

What it measures. Condition 1 of the callout above, on the vessel itself: with both propellers driven equally, `otter.m` is asked for $\dot{\boldsymbol{\nu}}$ and the six rows are read. Nothing is assumed — the discarded degrees of freedom are measured.

Opening and running. No model and no simulation: one call to the plant function, at a state chosen by hand.

```
W01_0_setup
x = zeros(12,1);  x(1) = 2.0;              % 2 m/s 로 직진 중 / running ahead at 2 m/s
xdot = otter(x, [80; 80], mp, rp, 0, 0);   % 양현 같은 회전수 / both propellers alike
xdot(1:6)'                                 % u v w p q r 의 시간변화율
```

Expected output:

```
ans =
   -0.1732         0   -0.0070         0   -0.0771         0
```

Reading the output against the three conditions.

Row	Value	What it says
$\dot{u}$	-0.1732	surge is alive: at 2 m/s the drag exceeds the thrust of 80 rad/s, so the vessel is still slowing towards its terminal speed (§1-11)
$\dot{v}, \dot{r}$	exactly 0	with equal propellers nothing drives sway or yaw — **condition 1**, no actuation, and no asymmetry to start them
$\dot{w}, \dot{q}$	-0.0070, -0.0771	not zero, but one to two orders below $\dot{u}$: the vessel is settling into its trim, pulled back by buoyancy — **condition 2**
$\dot{p}$	0.0000	a catamaran driven symmetrically has no reason to roll

- The discarded rows are **small, not absent**, and `otter.m` keeps all six so that the size can be read rather than assumed.

What to try	What to watch
`otter(x, [90; 60], mp, rp, 0, 0)` with `x(6) = 0.3`	turning: $\dot{v} = -0.2339$ and $\dot{r} = -0.9618$ — sway and yaw wake up together, which is the coupling §1-12 explains
`otter(x, [80; 80], 0, rp, 0, 0)` — the payload removed	the pitch row barely moves, -0.0711 against -0.0771: most of that trim belongs to the hull being driven, not to the 25 kg on board

1-8. The equation of motion, as `otter.m` implements it

- The 6-DOF equation of a marine craft in the form used throughout Fossen's Handbook:

$$\mathbf{M}\dot{\boldsymbol{\nu}}_r + \mathbf{C}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{D}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{g}(\boldsymbol{\eta}) = \boldsymbol{\tau}$$

Term	Name	What it models
$\mathbf{M} = \mathbf{M}_{RB} + \mathbf{M}_A$	mass	the hull's own inertia, plus the water accelerated with it
$\mathbf{C}(\boldsymbol{\nu}_r)$	Coriolis and centripetal	the apparent forces produced by describing motion in a rotating frame
$\mathbf{D}(\boldsymbol{\nu}_r)$	damping	linear skin friction, plus quadratic cross-flow drag
$\mathbf{g}(\boldsymbol{\eta})$	restoring	buoyancy and weight acting through different points
$\boldsymbol{\tau}$	control force	what the thrusters produce

- $\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$ is the velocity **relative to the water**. Hydrodynamic forces depend on relative velocity, not on ground velocity. This distinction is dormant this week, because the current is set to zero. §1-13 works it through line by line, Week 5 §5-5 pays for it with a permanent path error, and Week 8 adds wind and waves beside it.

> **★ The added mass is not a correction term**
>
> For the Otter, $-X_{\dot{u}} = 5.50$ kg against a hull-plus-payload mass of 80.0 kg, so the water contributes 6.4% of the effective surge inertia. In sway it contributes far more, $-Y_{\dot{v}} = 82.5$ kg against the same 80.0 kg. It is part of the model, not a refinement of it.

Term by term, against the source

- The equation above is not a description of `otter.m`; it **is** `otter.m`. Every symbol has one line of code, and the table below is the whole file in the order it executes. Line numbers refer to `Tools/MSS/VESSELS/otter.m`.

Line	Equation	`otter.m`
79–81	$u_c = V_c\cos(\beta_c - \psi)$, $v_c = V_c\sin(\beta_c - \psi)$, $\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$	`u_c = V_c*cos(beta_c-eta(6));` `nu_r = nu - [u_c v_c 0 0 0 0]';`
88	$\mathbf{I}_g$ about the origin, from the CG	`Ig = Ig_CG - m*Smtrx(rg)^2 - mp*Smtrx(rp)^2;`
103–109	$\mathbf{M}_{RB}$, $\mathbf{C}_{RB}$, moved from CG to CO	`MRB = H'*MRB_CG*H;` `CRB = H'*CRB_CG*H;`
112–119	$\mathbf{M}_A = -\operatorname{diag}(X_{\dot{u}}, \ldots, N_{\dot{r}})$	`MA = -diag([Xudot, Yvdot, Zwdot, Kpdot, Mqdot, Nrdot]);`
120	$\mathbf{C}_A(\boldsymbol{\nu}_r)$ from $\mathbf{M}_A$	`CA = m2c(MA, nu_r);`
124–126	$\mathbf{M} = \mathbf{M}_{RB} + \mathbf{M}_A$, $\mathbf{C} = \mathbf{C}_{RB} + \mathbf{C}_A$	`M = MRB + MA;` `C = CRB + CA;`
174–181	$\boldsymbol{\tau} = \mathbf{B}\mathbf{K}\mathbf{u}$, §1-10	`tau = [Thrust(1)+Thrust(2) 0 0 0 0 -l1*Thrust(1)-l2*Thrust(2)]';`
184–191	linear damping, $N_h = N_r(1 + 10\lvert r\rvert)r$	`Xh = Xu*nu_r(1);` … `Nh = Nr*(1+10*abs(nu_r(6)))*nu_r(6);`
194	quadratic cross-flow drag	`tau_crossflow = crossFlowDrag(L,B_pont,T,nu_r);`
197	trim, the ballast moment $\mathbf{g}_0$	`g_0 = [0 0 0 0 trim_moment 0]';`
200	$\mathbf{J}(\boldsymbol{\eta})$, the kinematic transform of §1-3	`J = eulerang(eta(4),eta(5),eta(6));`

The last line: from the equation to $\dot{\mathbf{x}}$

- Solving the equation of motion for the acceleration and stacking it on the kinematics gives the twelve-element derivative the integrator needs:

$$\dot{\mathbf{x}} = \begin{bmatrix} \dot{\boldsymbol{\nu}} \\ \dot{\boldsymbol{\eta}} \end{bmatrix} = \begin{bmatrix} \mathbf{M}^{-1}\left(\boldsymbol{\tau} + \boldsymbol{\tau}_{\text{damp}} + \boldsymbol{\tau}_{\text{cross}} - \mathbf{C}\boldsymbol{\nu}_r - \mathbf{G}\boldsymbol{\eta} - \mathbf{g}_0\right) \\ \mathbf{J}(\boldsymbol{\eta})\,\boldsymbol{\nu} \end{bmatrix}$$

```
xdot = [ M \ ( tau + tau_damp + tau_crossflow - C * nu_r - G * eta - g_0)
         J * nu ];
```

In the equation	In the code	Note
$\mathbf{M}^{-1}(\cdot)$	`M \ (...)`	a **solve**, never `inv(M)*(...)` — faster and better conditioned
$-\mathbf{C}\boldsymbol{\nu}_r$, $\boldsymbol{\tau}_{\text{damp}}$, $\boldsymbol{\tau}_{\text{cross}}$	evaluated at `nu_r`	forces feel the **water**
$\mathbf{J}(\boldsymbol{\eta})\boldsymbol{\nu}$	`J * nu`	position moves over the **ground**

> **★ The two velocities in one line are the whole of Week 1**
>
> The top block uses $\boldsymbol{\nu}_r$ and the bottom block uses $\boldsymbol{\nu}$. Everything §1-4 said about body velocity not being a position rate, and everything §1-13 will say about currents, is contained in that single asymmetry. If both blocks used the same velocity, a current could not move a vessel and a heading could not differ from a course.

- Note the sign convention: the code writes `tau + tau_damp` with $X_u < 0$, so the damping term is negative when $u > 0$ and the plus sign in the code is not a sign error. Fossen's textbook form moves $\mathbf{D}\boldsymbol{\nu}_r$ to the left-hand side instead. The two are the same equation.

Experiment 1-8 · The last line, checked against §1-4 (5 min)

What it measures. The kinematic half of the last line, $\dot{\boldsymbol{\eta}} = \mathbf{J}(\boldsymbol{\eta})\boldsymbol{\nu}$: that the position rates `otter.m` returns are the rotation matrix of §1-3 applied to the body velocity, and that they are the very numbers §1-4 worked by hand.

Opening and running. One call to the plant, at the state of the §1-4 example.

```
W01_0_setup
x = zeros(12,1);  x(1) = 2.0;  x(2) = 0.5;  x(12) = deg2rad(30);   % §1-4 의 상태
xdot = otter(x, [80; 80], mp, rp, 0, 0);
xdot(7:8)'                                    % 위치의 시간변화율 / the position rates
(Rzyx(x(10), x(11), x(12)) * x(1:3))'         % 같은 것을 손으로 / the same thing by hand
```

Expected output:

```
ans =
    1.4821    1.4330

ans =
    1.4821    1.4330    0.0000
```

Reading the output.

Where to look	What is there	What it shows
the two rows	identical to every digit, difference 0.00×10^0	the last line of `otter.m` is exactly $\mathbf{J}(\boldsymbol{\eta})\boldsymbol{\nu}$, with no hidden step
the same two numbers in §1-4	1.4821 and 1.4330 m/s	the worked example was not an illustration: it is what the plant computes
that they came from $u = 2.0$, $v = 0.5$	neither rate equals either velocity	§1-4's whole point, now inside the plant

- The other half of the line, $\dot{\boldsymbol{\nu}} = \mathbf{M}^{-1}(\cdot)$, is what Experiment 1-7 read row by row. `verify_w01_theory` rebuilds $\mathbf{M}$ from the same lines of `otter.m` and checks the Coriolis coefficients that §1-12 uses.

What to try	What to watch
`x(12) = 0;` and run again	the rates become 2.0 and 0.5: pointing north, body and NED components coincide, which is the one case in which integrating u would have been right
`x(12) = deg2rad(90);`	-0.5 and 2.0: the surge velocity now shows up entirely as an **east** rate

1-9. The Otter, and its twelve states

- `otter.m` integrates a reduced 6-DOF model and returns a **twelve**-element state derivative. The state is the stacked pair $[\boldsymbol{\nu}^\top, \boldsymbol{\eta}^\top]^\top$:

$$\mathbf{x} = \Big[\underbrace{u\ v\ w\ p\ q\ r}_{\nu,\ \text{in } \{b\}}\ \underbrace{x\ y\ z}_{\text{position, } \{n\}}\ \underbrace{\phi\ \theta\ \psi}_{\text{attitude, } \{n\}}\Big]^\top$$

Index	Symbol	Meaning	Frame	Unit	Excited this week
1	u	surge velocity	$\{b\}$	m/s	yes
2	v	sway velocity	$\{b\}$	m/s	yes, indirectly — see §1-12
3	w	heave velocity	$\{b\}$	m/s	negligible
4	p	roll rate	$\{b\}$	rad/s	negligible
5	q	pitch rate	$\{b\}$	rad/s	small, through the trim moment
6	r	yaw rate	$\{b\}$	rad/s	yes
7	x	north position	$\{n\}$	m	yes
8	y	east position	$\{n\}$	m	yes
9	z	down position	$\{n\}$	m	negligible
10	ϕ	roll	$\{n\}$	rad	negligible
11	θ	pitch	$\{n\}$	rad	small
12	ψ	yaw	$\{n\}$	rad	yes

> ⚠ **Every angle in the state vector is in radians**
>
> `otter.m` works in radians throughout; only the setup scripts and the plots use degrees. A heading typed as `60` rather than `deg2rad(60)` is a command of 60 radians, or nine and a half full turns. The models in this course convert once, at the command block, and never again.

- The states that matter for guidance and control are therefore $\{u, v, r, x, y, \psi\}$ — six of the twelve. From Week 3 onward the vessel is treated as a 3-DOF craft, and the discarded states are justified by their magnitude rather than by assumption.
- The heave, roll and pitch states are retained in the plant because they contribute to the restoring and trim terms. They are computed and then not used.

Hull constants

All values below are read directly from `Tools/MSS/VESSELS/otter.m`.

Symbol	Value	Meaning	Source
$m + m_p$	80.0 kg	hull mass plus payload	`otter.m` , `m = 55` , `mp = 25`
L	2.00 m	length	`otter.m`
beam	1.08 m	overall width	`otter.m` , `B`
draft	0.195 m	depth below the waterline, computed from displacement	`otter.m` , `T`
y_{pont}	0.395 m	half distance between pontoons	`otter.m`
$-X_{\dot{u}}$	5.50 kg	surge added mass	`Xudot = -0.1*m` , with $m = 55$ **hull only**
M_{11}	85.50 kg	surge mass including added mass	$(m + m_p) - X_{\dot{u}}$
I_z	15.10 kg·m²	yaw inertia about the CG	`Ig(3,3)`
$-N_{\dot{r}}$	25.67 kg·m²	yaw added inertia	`Nrdot = -1.7*Ig(3,3)`
M_{66}	42.65 kg·m²	yaw inertia about the origin, including added mass	`M(6,6)`
X_u	-77.55 N per m/s	linear surge damping	$-24.4\, g/U_{\max}$
Y_v	0	linear sway damping — **there is none**	`Yv = 0`
N_r	-42.65 N·m per rad/s	linear yaw damping	$-M_{66}/T_{\text{yaw}}$, $T_{\text{yaw}} = 1$ s
$U_{\max}$	3.086 m/s	design speed, 6 knots	`otter.m`

✕ M_{66} is not $I_z - N_{\dot{r}}$

Adding the two inertia entries gives $15.1021 + 25.6736 = 40.7757$ kg·m², which is **not** the value `otter.m` uses. The rigid-body matrix is built at the centre of gravity and then transferred to the origin of $\{b\}$, and the payload puts the CG at $x_g = (55 \times 0.2 + 25 \times 0.05)/80 = 0.153125$ m — exactly — rather than at the origin. The transfer adds $(m + m_p)x_g^2 = 80 \times 0.153125^2 = 1.8758$ kg·m², and $40.7757 + 1.8758 = 42.6515$ kg·m² is the figure `otter.m` uses. It propagates into N_r as well. Week 4 sizes a controller from this number, so the 4.6% difference is not cosmetic.

Four decimals are kept here on purpose. Rounded to two, the same arithmetic reads $15.10 + 25.67 = 40.77$ and $40.78 + 1.88 = 42.66$ — neither closes, because each term was rounded separately. Week 4 §4-1 builds M_{66} step by step from the same four numbers.


ℹ One damping term is not linear

The yaw damping applied in `otter.m` is $N_h = N_r(1 + 10|r|)r$, not $N_r r$. The extra factor is dormant at low turn rates and dominant at high ones. It is recorded here and exploited in Week 4, where it makes large heading changes overshoot **less** than small ones — behaviour a linear model cannot produce.

Experiment 1-9 · Reading the model (15 min)

ℹ To produce this figure

`W01_1_build_openloop` writes `W01_simulink/img/W01_openloop.png` at the end of the build. The diagram belongs to the builder and to nothing else, so it changes when the model changes and not when a gain changes.

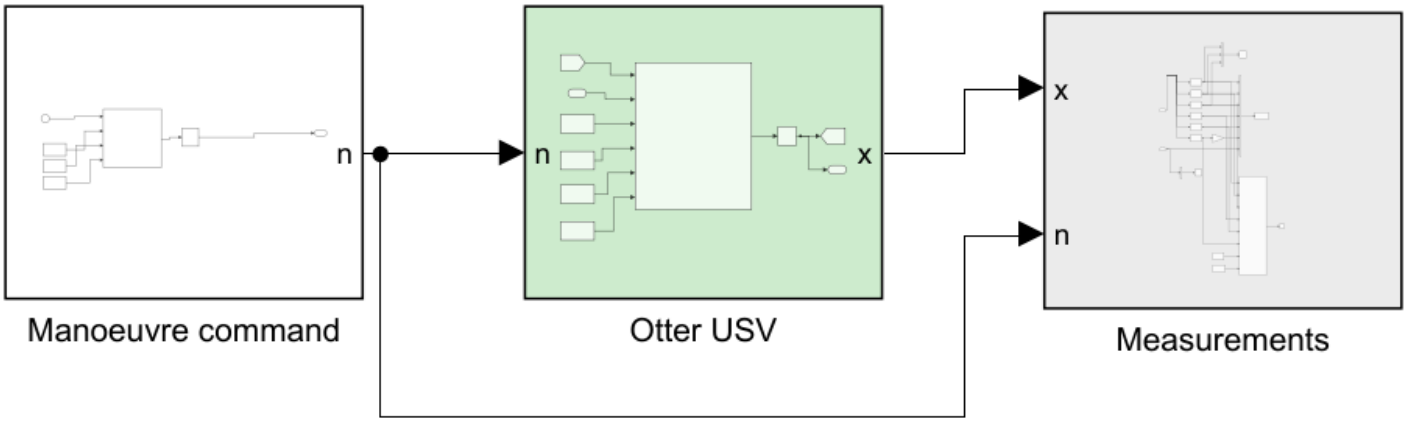

WEEK 1 - THE OTTER MOTION MODEL, OPEN LOOP

No controller and no allocation yet, so two stages of the standard chain are missing. A propeller command enters on the left and twelve states leave on the right. The plant is Fossen's otter.m from Tools/MSS/VESSELS, called unchanged.

THE MANOEUVRE straight - port - straight - starboard - straight

Both propellers run ahead throughout. A turn is a small DIFFERENCE between them, not a reversal:

straight n = [n0 ; n0]
to port n = [n0-dn ; n0+dn]
to starboard n = [n0+dn ; n0-dn]

because N = y_p (T_left - T_right). More left thrust turns the bow to starboard. Edit n0, dn and t_phase in W01_0_setup.m.

WHAT TO WATCH

1 TERMINAL SPEED. On the straight legs u settles where thrust balances linear damping: 2 k_pos n|n| = X_u u.

2 THE EMPTY SWAY ROW. Y is zero at every instant, bit for bit. Both propellers face forward, so no combination of them has a component across the hull. Geometry, not arithmetic.

3 SWAY WITHOUT A SIDE FORCE. v is nevertheless non-zero in both turns, and changes SIGN between them. It comes from the hull rotating - the Coriolis term - not from any force Y. That is the crab angle, and Week 4 has to steer around it.

4 HEADING IS NOT COURSE. In each turn the vessel points one way and travels another. The track alone cannot show this, which is why the hull is drawn along it.

THE LIVE VIEW, inside Measurements

Pressing Run opens a figure that draws the hull, its heading and its track as the simulation proceeds. Set animate = 0 to switch it off.

Reading the figure

Element	Meaning
`Manoeuvre command`	the propeller command $[n_L; n_R]$ in rad/s **as a function of time** — a Clock and one MATLAB Function, with `n0`, `dn` and `t_phase` wired in as Constants from `W01_0_setup.m`
`Otter USV` (green)	Fossen's `otter.m`, called unchanged, with the integrator that produces the state
`Measurements` (grey)	selectors, the scope, the workspace log and the live view

The signal chain

- Every model in this course is laid out left to right in the same order, the order used by the MSS demonstration models in `Tools/MSS/SIMULINK/mssSimulinkDemos`:

$$\text{command} \rightarrow \text{reference} \rightarrow \text{controller} \rightarrow \text{allocation} \rightarrow \text{plant} \rightarrow \text{measurement}$$

Stage	Question it answers	Colour
command	what is asked for	white
reference	what is achievable, and how fast	lilac
controller	what force is needed	blue
allocation	which thrusters produce it	sand
plant	how the vessel responds	green
measurement	what is recorded	grey

- **This week has three of the six.** There is no loop yet, so there is no controller and nothing to allocate. The stages that remain keep their order, and the missing ones close up.
- Each stage is a **subsystem**. The top level shows the chain and nothing else; opening a stage is how its contents are read. Every port is named, so `n` and `x` label the lines without a single annotation.

> ✎ **Open `Measurements` before running anything**
>
> Inside it are the six selectors that pull u, v, r, N, E and ψ out of the twelve-state vector, the conversion of ψ to degrees, the workspace log, and the `Animate` block that draws the live view. Every week of this course has the same block, built by the same function, so it is worth reading once.

The live view

- Pressing **Run** opens a figure that draws the vessel as the simulation proceeds. It draws two things, and the second is the reason it exists:

Drawn	Answers
the track	**where** the hull went
the hull outline and the line leaving its bow	**where the hull was pointing** while it went there

- Those are not the same question. A marine vehicle carries a sway velocity, so its heading ψ and its course over ground differ by the crab angle $\beta = \operatorname{atan2}(v, u)$. In the turns of Experiment 1-12 they differ by 7.05°, and in the beam current of Experiment 1-13 by 25.8°; no track drawn on its own can show either. Week 5 has to steer around exactly this difference.
- A MATLAB Function block cannot plot. The drawing function is therefore declared extrinsic, which makes Simulink hand the call back to MATLAB instead of generating code for it:

```
coder.extrinsic('W01_animate');
ok = 1;
if en > 0.5
    W01_animate(N, E, psi, t);
end
```

- The axes are fixed before the run starts, from `track_Nmin` … `track_Emax` in `W01_0_setup.m`. Widen them if the vessel leaves the box. Set `animate = 0` to switch the live view off; a long run is noticeably faster without it.

> ✎ **The silhouette is drawn to the window, not to scale**
>
> On a 160 m track the true 2.00 m Otter is under one pixel, so the live view scales the outline to about 4% of the axis span. Where the figure states a true-size drawing, it says so.

Inside the plant

- The plant subsystem contains a single MATLAB Function block that calls `otter.m` and an integrator that turns $\dot{\mathbf{x}}$ into $\mathbf{x}$:

```
coder.extrinsic('otter');

xdot = zeros(12,1);
xdot = otter(x, u_thr, mp, rp, V_c, beta_c);
```


- `otter.m` is not written for code generation, so the call is declared extrinsic and Simulink hands it back to MATLAB. The consequence is that the output must be pre-sized, which is what the `zeros(12,1)` line is for.
- The state returns to the function through a Goto/From tag pair rather than a line drawn across the canvas. The integrator breaks the loop, so this is not an algebraic loop.

1-10. From propeller speed to force

- Before any arithmetic, the layout. The Otter is a catamaran with one propeller in each pontoon, both bolted facing forward.

The Otter from above — where the propellers are, and why B looks the way it does

A catamaran: two pontoons, one propeller in each, both bolted facing forward. Every entry of B follows from this picture and nothing else.

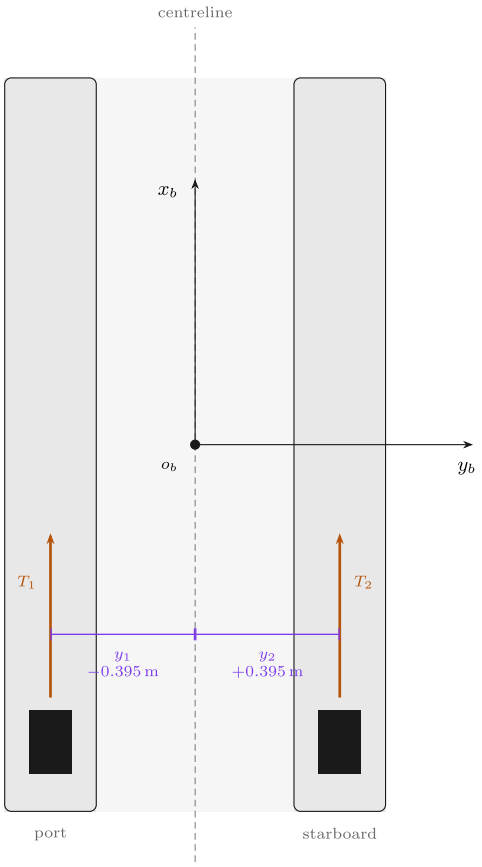

reading B off the picture

One propeller at (x_i, y_i) pushing along the unit vector $\mathbf{e}_i = (e_x, e_y)$ contributes exactly one column (`_tools/otter_B.m`, the column rule):

$$\mathbf{b}_i = \begin{bmatrix} e_x \\ e_y \\ x_i e_y - y_i e_x \end{bmatrix}$$

Both propellers are bolted facing forward, so $\mathbf{e}_i = (1, 0)$ for both and the picture supplies only $y_1 = -0.395$ and $y_2 = +0.395$ m.

Surge. Both push forward: $e_x = 1$ twice, so the first row is $[1 \;\; 1]$.

Sway. Neither has any component across the hull, $e_y = 0$, so the second row is empty: $Y = 0$ — **exactly, always**. No shaft speed can produce sway.

Yaw. The third entry is $-y_i$, which is the **negative** of the coordinate marked on the drawing: the port propeller sits at $y = -0.395$ and turns the bow to *starboard*, which is positive yaw.

The along-ship station x_i never appears, because it is multiplied by $e_y = 0$. The propellers may be drawn anywhere along their pontoons and **B** is unchanged.

$$\mathbf{B} = \begin{bmatrix} 1 & 1 \\ 0 & 0 \\ 0.395 & -0.395 \end{bmatrix}, \qquad \boldsymbol{\tau} = \mathbf{B}\,\mathbf{f}$$

The hull is drawn here at $\psi = 0$, so $\{b\}$ and $\{n\}$ happen to line up. At any other heading the two triads differ by $\mathbf{R}(\psi)$ and **B does not change at all** — it is written entirely in $\{b\}$. That is the whole reason the allocation can be designed once and used at every heading.

Reading the figure

Element	Meaning
x_b, y_b	the body axes, with the origin o_b at midship on the centreline
blue rectangles	the two propellers, one per pontoon
orange arrows	their thrust, both along $+x_b$ — neither can push sideways
∓ 0.395 m	the moment arms, equal and opposite about the centreline
grey triad	$\{n\}$, drawn at $\psi = 0$ so the two frames happen to coincide

- Three readings come straight off the picture, and they are the three rows of $\mathbf{B}$:

Row	Because	Result
surge	both thrusts point along $+x_b$	$X = T_1 + T_2$
sway	neither has any component along y_b	$Y = 0$, exactly and always
yaw	the arms are $\mp y_{\text{pont}}$ about o_b	$N = y_{\text{pont}}(T_1 - T_2)$

> **★ B is written entirely in $\{b\}$**
>
> The layout drawing does not change when the vessel turns, so neither does $\mathbf{B}$. The heading enters the problem once, in the kinematics of §1-4, and never inside the actuator model. That separation is why $\mathbf{B}$ can be a constant matrix at all.

- Each propeller produces thrust that scales with the square of shaft speed, with a **different coefficient in each direction**:

$$T_i = \begin{cases} k_{\text{pos}}\, n_i |n_i|, & n_i \geq 0 \\ k_{\text{neg}}\, n_i |n_i|, & n_i < 0 \end{cases}$$

Symbol	Value	Meaning	Source
k_{pos}	0.011080	forward bollard coefficient, one propeller	`otter.m` , `0.02216/2`
k_{neg}	0.006445	reverse bollard coefficient	`otter.m` , `0.01289/2`
$k_{\text{pos}}/k_{\text{neg}}$	1.719	forward-to-reverse asymmetry	derived
$n_{\max}$	103.9 rad/s	saturation, forward	`otter.m`
$n_{\min}$	-101.7 rad/s	saturation, reverse	`otter.m`

- The asymmetry is physical. A marine propeller has camber and a defined leading edge, so running it backwards presents the wrong face to the flow, for the same reason that a wing flown backwards is a poor wing.
- The two propellers sit on the pontoons at $y = \pm y_{\text{pont}}$, both pointing forward, so

$$\boldsymbol{\tau} = \begin{bmatrix} X \\ Y \\ N \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 0 & 0 \\ y_{\text{pont}} & -y_{\text{pont}} \end{bmatrix} \begin{bmatrix} T_1 \\ T_2 \end{bmatrix} = \mathbf{B}\,\mathbf{f}$$

- The middle row is **exactly zero**, and $\mathbf{rank}(\mathbf{B}) = 2$. Appendix A1 derives this matrix from a general rule and shows what it costs; this week only records that the row is empty.

> **★ Zero is not a small number**
>
> $Y = 0$ is a statement about where the propellers are bolted, not about how large a force they make. No gain, no controller and no propeller speed can produce a sideways force on this hull. Week 11 meets this fact again as a hard limit on what can be controlled.

The whole chain, from revolutions to generalised force

- The two steps above compose into the form used throughout the marine literature, in which every factor has a name and only the last one depends on the command:

$$\boldsymbol{\tau} = \underbrace{\mathbf{B}}_{\substack{\text{actuator} \\ \text{configuration}}} \underbrace{\mathbf{K}}_{\substack{\text{thrust} \\ \text{coefficients}}} \underbrace{\mathbf{u}}_{\substack{\text{control} \\ \text{variable}}}, \qquad \mathbf{u} = \begin{bmatrix} n_1|n_1| \\ n_2|n_2| \end{bmatrix}, \qquad \mathbf{K} = \begin{bmatrix} k_1 & 0 \\ 0 & k_2 \end{bmatrix}$$

- Written out for the Otter, this is the complete answer to *what does a shaft speed do to the vessel*:

$$\begin{bmatrix} X \\ Y \\ N \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 0 & 0 \\ y_{\text{pont}} & -y_{\text{pont}} \end{bmatrix} \begin{bmatrix} k_1 & 0 \\ 0 & k_2 \end{bmatrix} \begin{bmatrix} n_1|n_1| \\ n_2|n_2| \end{bmatrix} = \begin{bmatrix} k_1 n_1|n_1| + k_2 n_2|n_2| \\ 0 \\ y_{\text{pont}}\,(k_1 n_1|n_1| - k_2 n_2|n_2|) \end{bmatrix}$$

Factor	What it is	Depends on
$\mathbf{B}$	where the thrusters are and which way they point	the **geometry** — fixed for a given hull
$\mathbf{K}$	how much thrust a unit of $n\|n\|$ buys	the **propellers** — and k_i switches with the sign of n_i
$\mathbf{u}$	the squared-with-sign shaft speed — **bold**, and not the surge velocity u; the name is Fossen's and is used only in this subsection	the **command** — the only thing a controller changes

> **Why $n|n|$ and not n^2**
>
> n^2 throws the sign away and a reversed propeller would still push forward. The product $n|n|$ keeps the quadratic magnitude and the sign of n, which is why it, and not n itself, is called the control variable.

- Two consequences follow immediately, and both are measured in Part 2:

the map is nonlinear	doubling n quadruples the thrust. A controller that assumes a linear actuator will be twice as aggressive at high speed as at low
the map is not odd	$k_1 \neq k_2$ when the signs differ, so $n = [+60, -60]$ does **not** give $X = 0$

- The MSS source states the same thing in one line, with the moment arms $l_1 = -y_{\text{pont}}$ and $l_2 = +y_{\text{pont}}$ (`otter.m` line 181):

```
tau = [Thrust(1) + Thrust(2)  0 0 0 0  -l1*Thrust(1) - l2*Thrust(2)]';
```


- Substituting the arms gives $N = y_{\text{pont}}T_1 - y_{\text{pont}}T_2$, which is the third row above. The lecture and the source agree term by term.


Experiment 1-10a · Driving the vessel by hand (15 min)


- Experiments 1-11 to 1-13 each ran a command fixed in advance. This section hands the command over: one model, five buttons, two sliders, and the same live view as Experiment 1-9.
- Open `W01_interactive.slx` and press **START** on the canvas; the toolstrip's Run does the same. No setup script is needed. Every variable the model reads is stored in its own model workspace, and the model puts `_tools` and MSS on the path by itself when it is opened.
- The simulation runs at real time — Simulation Pacing at rate 1 — and does not stop on its own. **STOP** ends it. **START** always begins again from the origin: a run in progress is stopped first, and the vessel, its track and the plots return to their initial state. The toolstrip's Pause and Continue hold the state instead of resetting it.
- START also places the two windows side by side, the model on the left half of the screen and the live view on the right. A click on any button brings the model window forward; if the two overlapped, every click would hide the plots.

```
W01_F_build_interactive      % only if W01_interactive.slx is missing or broken
```

> **To produce this figure**
>
> `W01_F_build_interactive` writes `W01_simulink/img/W01_interactive.png` at the end of the build, as every builder in this course does.

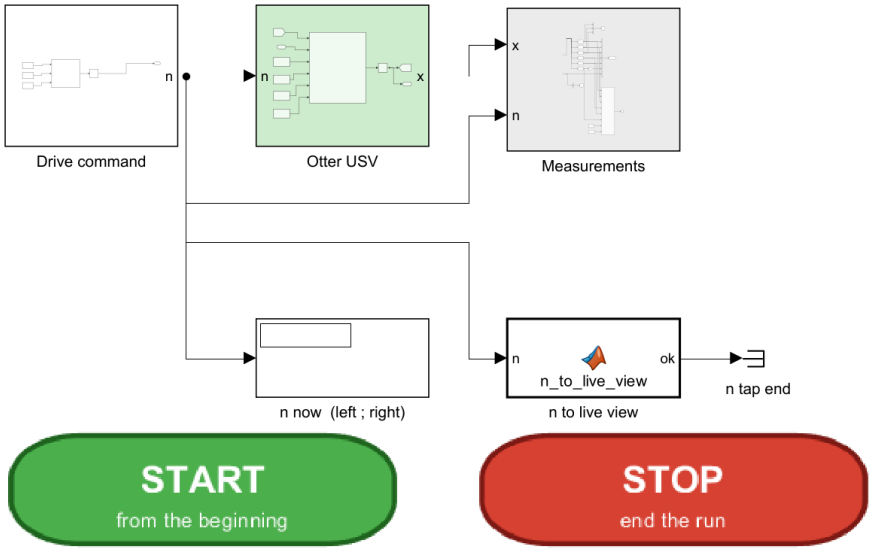



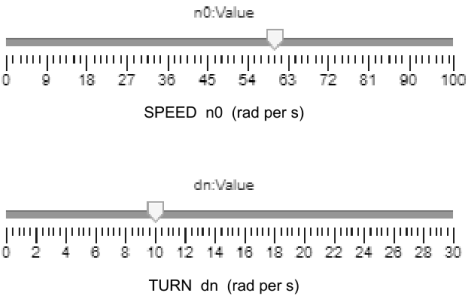

WEEK 1 - DRIVE IT YOURSELF

1 Click START (or press Run). The live view opens on the right half of the screen and the vessel moves ahead.
2 Click a button while it runs:
STOP both propellers stop
AHEAD n = [n0 ; n0]
ASTERN n = [-n0 ; -n0] (astern thrust is weaker)
PORT n = [n0-dn ; n0+dn] the LEFT one slows
STARBOARD n = [n0+dn ; n0-dn] the RIGHT one slows
3 Drag SPEED and TURN while it runs. TURN acts only in PORT and STARBOARD, because dn enters only the turning rules.
4 Click STOP to end the run. START again begins from the origin.

The simulation runs at real time (Simulation Pacing), and never stops on its own.

WHAT TO WATCH
n_L, n_R : bottom right of the live view - the command itself
terminal speed : u settles where thrust = damping (sec. 1-11)
in a turn : v is not zero although Y is (sec. 1-12)
in a turn : the bow points off the track (crab angle)

Reading the figure

Element	Meaning
`DRIVE` buttons	a Dashboard Radio Button bound to the Constant `mode` inside `Drive command`; a click changes that Constant while the simulation runs
`n0` slider	bound to the Constant `n0` — the common shaft speed, 0 to 100 rad/s
`dn` slider	bound to the Constant `dn` — the difference between the two propellers in a turn, 0 to 30 rad/s
`Drive command` (white)	the three Constants and one MATLAB Function that turns a button into $[n_L;\ n_R]$
`Otter USV`, `Measurements`	the plant and the measurement stage of `W01_openloop.slx`, unchanged. The live view is drawn by `W01i_animate.m`: the track window follows the vessel, and the bottom-right panel plots n_L and n_R
`n now`	the two shaft speeds the plant is receiving at this instant
`n to live view`	hands $[n_L;\ n_R]$ to the live view at every step, so the command is plotted beside the motion it causes
START, STOP	two images of buttons placed as annotations, each with a click callback; a single click calls `W01i_control('start')` or `W01i_control('stop')`

- Each button applies one rule — the same rule as the timetable of Experiment 1-12:

Button	$[n_L;\ n_R]$	What the vessel does
STOP	$[0;\ 0]$	coasts to rest; only damping acts
AHEAD	$[n_0;\ n_0]$	settles at the terminal speed of §1-11
ASTERN	$[-n_0;\ -n_0]$	goes astern, and more slowly, because $k_{\text{neg}} < k_{\text{pos}}$ (§1-10)
PORT	$[n_0 - dn;\ n_0 + dn]$	turns left — the **left** propeller slows
STARBOARD	$[n_0 + dn;\ n_0 - dn]$	turns right

- The two sliders are **bound** to the Constants `n0` and `dn` inside `Drive command`. Dragging one rewrites that Constant, and the next integration step already uses the new value — during a run as well as before one. Changing `n0` from 60 to 30 in the middle of a run moves the logged command from $[60;\ 60]$ to $[30;\ 30]$ within one step.
- TURN has no visible effect while AHEAD, ASTERN or STOP is selected, because `dn` enters only the two turning rules. The bottom-right panel of the live view shows n_L and n_R, so every movement of either slider is visible there at once.

Measured

> `W01_F_button_check`

- A person pressing buttons never produces the same run twice, so the numbers below come from `W01_F_button_check.m`. It starts the model from rest once per button, holds that button for 40 s, and switches pacing and the live view off. The sliders stay at their initial values, $n_0 = 60$ and $dn = 10$ rad/s.

Button	$n_L,\ n_R$ [rad/s]	u [m/s]	v [m/s]	r [deg/s]	β [deg]
AHEAD	$60,\ 60$	1.0286	0.0000	0.000	—
ASTERN	$-60,\ -60$	-0.5983	0.0000	0.000	—
PORT	$50,\ 70$	1.0251	$+0.1827$	-4.989	$+10.11$
STARBOARD	$70,\ 50$	1.0251	-0.1827	$+4.989$	-10.11
STOP	$0,\ 0$	0.0000	0.0000	0.000	—

- AHEAD reproduces the terminal speed of §1-11, 1.0286 m/s. ASTERN reproduces $-2k_{\text{neg}}n_0^2/|X_u| = -0.5983$ m/s, so the vessel backs away at under 60% of its forward speed.
- PORT and STARBOARD are mirror images. With $dn = 10$ rather than the 3.5 of Experiment 1-12, the turn is about twice as fast and the crab angle β grows from 7.05° to 10.11°.

Things to try, in this order

Do this	Watch	Section
AHEAD, then wait five seconds	u settles at 1.03 m/s and stays there	§1-11
drag SPEED from 60 to 30	u falls to a quarter, 0.26 m/s, not to a half	§1-11, quadratic thrust against linear damping
PORT, then STARBOARD	v changes sign; the bow points off the track by β	§1-12 and Experiment 1-12
PORT, then drag TURN to 0	the vessel runs straight: a turn is only the difference between the propellers	§1-10
ASTERN from rest	u reaches only -0.60 m/s	§1-10
STOP at full speed	u decays with the time constant $T_u = 1.10$ s	§1-11

> ✎ **The track window follows the vessel**
>
> `W01_openloop.slx` knows its route in advance, so its window is fixed before the run. A vessel driven by hand can go anywhere, so `W01i_animate.m` moves the window whenever the hull comes within 20% of an edge. The size of the window never changes, so the outline keeps one scale and its speed across the page can be judged by eye.

Experiment 1-10b · An RC transmitter, and the allocation behind it (25 min)

- In Experiment 1-10a the operator commanded shaft speeds. To drive straight at a chosen speed, the operator had to know the propeller curve $T = k\,n|n|$; to turn, the operator had to know that the yaw moment is $N = y_{\text{pont}}(T_L - T_R)$. A real operator — a person on a transmitter, the joystick of a dynamic-positioning console, or the autopilot of later weeks — asks instead for a **force and a moment**. Turning that request into shaft speeds is **control allocation**.
- This section puts an RC transmitter in front of the allocation. The throttle stick asks for a surge force, the rudder stick asks for a yaw moment, and the model works out n_L and n_R by inverting the two maps of §1-10 in reverse order.

	Experiment 1-10a `W01_interactive.slx`	**Experiment 1-10b** `W01_rc.slx`
the operator chooses	the shaft speeds $[n_L;\ n_R]$	the generalised force $[X;\ N]$
who inverts $\mathbf{B}$ and the propeller curve	the operator, in the head	the `Control allocation` block
stick at half travel gives	half of n, a quarter of the thrust	half of the force
what happens beyond the actuator limits	n is clipped inside `otter.m`, silently	the model reports what was delivered, τ_a, beside what was asked, τ_d


The transmitter — Mode 1 and Mode 2

- A two-stick transmitter has four axes. Which axis is the throttle is fixed by the **mode** of the transmitter, a convention inherited from model aircraft. Mode 2 is the common one; Mode 1 moves the throttle to the right hand.

Stick axis	Channel	Mode 1	Mode 2	On a real transmitter
left, up–down	`LY`	elevator — not used on a boat	**throttle**	a spring returns it to the centre, except when it is the throttle, which stays where it is left
left, left–right	`LX`	**rudder**	**rudder**	a spring returns it to the centre
right, up–down	`RY`	**throttle**	elevator — not used on a boat	as `LY`, with the modes swapped
right, left–right	`RX`	aileron — not used on a boat	aileron — not used on a boat	a spring returns it to the centre

Mode 1 and Mode 2 — the same four functions, on different hands

Purple: the two functions a boat uses. Grey: the two aircraft functions with nothing to act on.

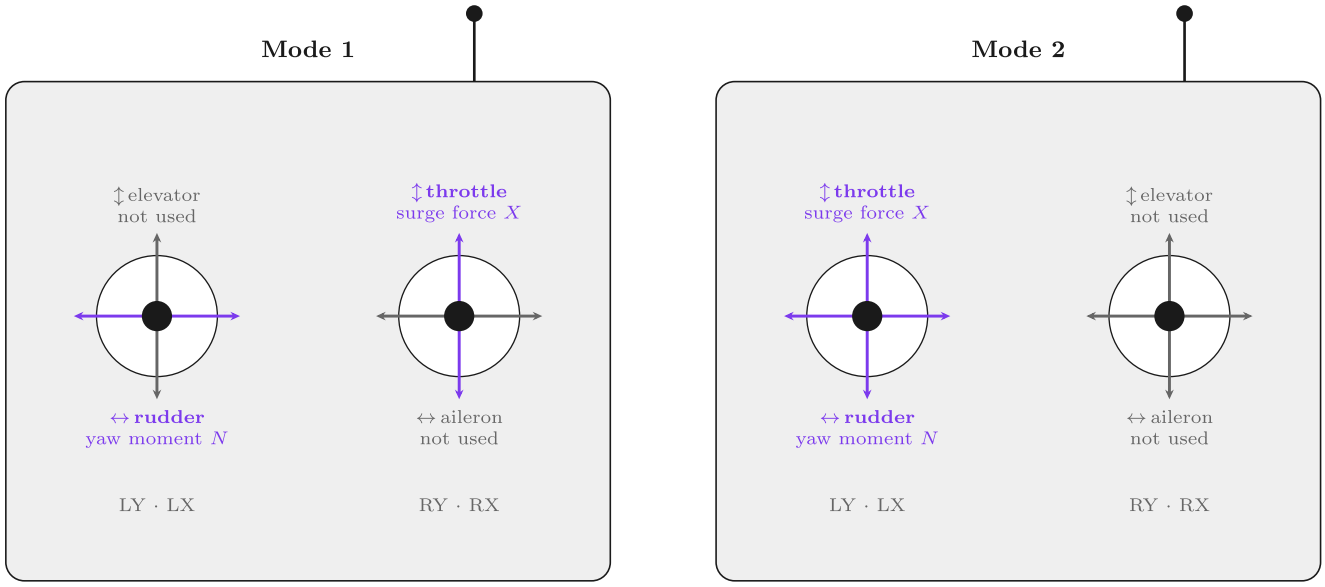

Throttle: forward = ahead, centre = stop, back = astern; it has no spring and stays where it is left.
Rudder: left = turn to port, right = turn to starboard; a spring returns it to the centre.

Reading the figure

Element	Meaning
purple arrows and labels	the two functions a boat uses: the throttle, which becomes the surge force X, and the rudder, which becomes the yaw moment N
grey arrows and labels	elevator and aileron, the aircraft functions that have nothing to act on in a boat
`LY · LX`, `RY · RX`	the channels under each stick, named as the sliders of `W01_rc.slx`

- The rudder is the left stick left–right in **both** modes. Only the throttle changes hands.
- The throttle of this model is centred: stick forward drives ahead, stick back drives astern, centre stops both propellers. This is how a boat transmitter drives a reversible speed controller; an aircraft throttle has no reverse and starts at the bottom instead.
- Rudder left turns the vessel to port, rudder right turns it to starboard.

From a channel to a demanded force

- A receiver hands on each channel as a pulse of 1000 to 2000 µs, 1500 µs at the centre. In the model each channel is a Dashboard slider from 0 to 100, with the centre at 50, and the block `receiver` turns it into a stick deflection

$s \in [-1, 1]$:

$$s = \operatorname{sign}(c - 50)\,\frac{\max(|c - 50| - d_b,\ 0)}{50 - d_b}$$

Symbol	Quantity	Value
c	raw channel, one slider	0 to 100
d_b	neutral zone either side of the centre	3
s	stick deflection	-1 to 1; exactly 0 inside the neutral zone

- The neutral zone is there for the same reason a speed controller has one: a stick released a little off the centre must not make the vessel creep.
- The block `Mode 1 or 2` picks the throttle s_T and the rudder s_R out of the four deflections. The block `Joystick` then scales them into the demanded generalised force:

$$\boldsymbol{\tau}_d = \begin{bmatrix} X_d \\ N_d \end{bmatrix} = \begin{bmatrix} X_{\max} & 0 \\ 0 & N_{\max} \end{bmatrix} \begin{bmatrix} s_T \\ s_R \end{bmatrix}, \qquad X_{\max} = 2\,T_{\max}, \qquad N_{\max} = 2\,y_{\text{pont}}\,|T_{\min}|$$

Symbol	Quantity	Value	Source
$T_{\max} = k_{\text{pos}}\,n_{\max}^2$	largest forward thrust of one propeller	119.68 N	`otter.m` lines 93–96
$T_{\min} = -k_{\text{neg}}\,n_{\min}^2$	largest reverse thrust of one propeller	-66.71 N	`otter.m` lines 93–96
$X_{\max}$	full throttle: both propellers at full ahead	239.36 N	`W01_G_rc_check`
$N_{\max}$	full rudder: the largest yaw moment with $X = 0$, one propeller at full reverse and the other matching it ahead	52.70 N·m	`W01_G_rc_check`
y_{pont}	moment arm of each propeller — the lateral distance from the centreline to a pontoon	0.395 m	`otter.m` line 69, `y_pont`

Allocation, step 1 — invert the configuration matrix

- Section 1-10 wrote the forces of the two propellers as $\boldsymbol{\tau} = \mathbf{B}\mathbf{f}$ with a sway row that is exactly zero. A demand for sway force could never be met, so allocation keeps the two rows that can be (Fossen 2021, §11.2):

$$\begin{bmatrix} X \\ N \end{bmatrix} = \underbrace{\begin{bmatrix} 1 & 1 \\ y_{\text{pont}} & -y_{\text{pont}} \end{bmatrix}}_{\mathbf{B}_{XN}} \begin{bmatrix} T_L \\ T_R \end{bmatrix}$$

- $\mathbf{B}_{XN}$ is square with $\det \mathbf{B}_{XN} = -2y_{\text{pont}} \neq 0$, so it has exactly one inverse. For a 2×2 matrix, swap the diagonal, negate the off-diagonal and divide by the determinant:

$$\mathbf{B}_{XN}^{-1} = \frac{1}{-2y_{\text{pont}}} \begin{bmatrix} -y_{\text{pont}} & -1 \\ -y_{\text{pont}} & 1 \end{bmatrix} = \begin{bmatrix} \frac{1}{2} & \frac{1}{2y_{\text{pont}}} \\ \frac{1}{2} & -\frac{1}{2y_{\text{pont}}} \end{bmatrix} = \begin{bmatrix} 0.5000 & 1.2658 \\ 0.5000 & -1.2658 \end{bmatrix}$$

- Written row by row, this is the whole allocation law of a twin-screw vessel:

$$T_L = \frac{X_d}{2} + \frac{N_d}{2y_{\text{pont}}}, \qquad T_R = \frac{X_d}{2} - \frac{N_d}{2y_{\text{pont}}}$$

Term	What it does
$X_d/2$	splits the surge demand equally, as in Week 3 §3-1
$+N_d/(2y_{\text{pont}})$ on the left, $-N_d/(2y_{\text{pont}})$ on the right	makes the difference $T_L - T_R = N_d/y_{\text{pont}}$, which is exactly the moment asked for. The difference does not change X

- Check the sign against §1-10: a starboard demand $N_d > 0$ gives $T_L > T_R$, and $N = y_{\text{pont}}(T_L - T_R) > 0$. The model's block `B inverse` is this matrix, computed in `W01_G_build_rc.m` as `inv(Bxn)` from the $\mathbf{B}$ of `_tools/otter_B.m`.
- The same answer comes from the Moore–Penrose pseudo-inverse of the full 3×2 matrix, $\mathbf{f} = \mathbf{B}^{+}[X;\ 0;\ N]$, the unconstrained allocation of Fossen (2021, §11.2). For $X = 100$ N and $N = 20$ N·m the two differ by 4.3×10^{-14} N. The 2×2 inverse is used here because it can be written down by hand.

Allocation, step 2 — invert the propeller curve

- Each thrust is turned into a shaft speed separately, with the coefficient chosen by the sign of the thrust (§1-10; the same inversion as Week 3 §3-1, applied per propeller):

$$n_i = \operatorname{sign}(T_i)\sqrt{\frac{|T_i|}{k_i}}, \qquad k_i = \begin{cases} k_{\text{pos}}, & T_i \geq 0 \\ k_{\text{neg}}, & T_i < 0 \end{cases}$$

Allocation, step 3 — saturate, and report what was delivered


- The shaft speeds are clipped to $[n_{\min},\ n_{\max}] = [-101.74,\ 103.93]$ rad/s by the block `shaft limits`. The block `delivered thrust` then runs the propeller curve of `otter.m` lines 165–177 forward on the clipped speeds, and `B` maps the result back to $\boldsymbol{\tau}_a = \mathbf{B}_{XN}\,\mathbf{T}(\mathbf{n}_{\text{sat}})$.
- Inside the attainable set of Appendix A1-6, $\boldsymbol{\tau}_a = \boldsymbol{\tau}_d$ to round-off. Outside it, the two differ, and the difference is what the operator asked for and did not get.

> **⚠ Saturation changes the direction of the force, not only its size**
>
> Each propeller is clipped on its own. When one of them saturates and the other does not, the ratio N_a/X_a is no longer the ratio the sticks asked for. In case 5 below the sticks ask for $N_d/X_d = 0.220$ and receive 0.153: the vessel turns less sharply than commanded, not merely more slowly. What to give up first — surge or yaw — is a design decision, and a later allocation method must make it explicitly.

The model

```
W01_G_build_rc      % only if W01_rc.slx is missing or broken
```


> **i To produce this figure**
>
> `W01_G_build_rc` writes `W01_simulink/img/W01_rc.png` at the end of the build, as every builder in this course does.

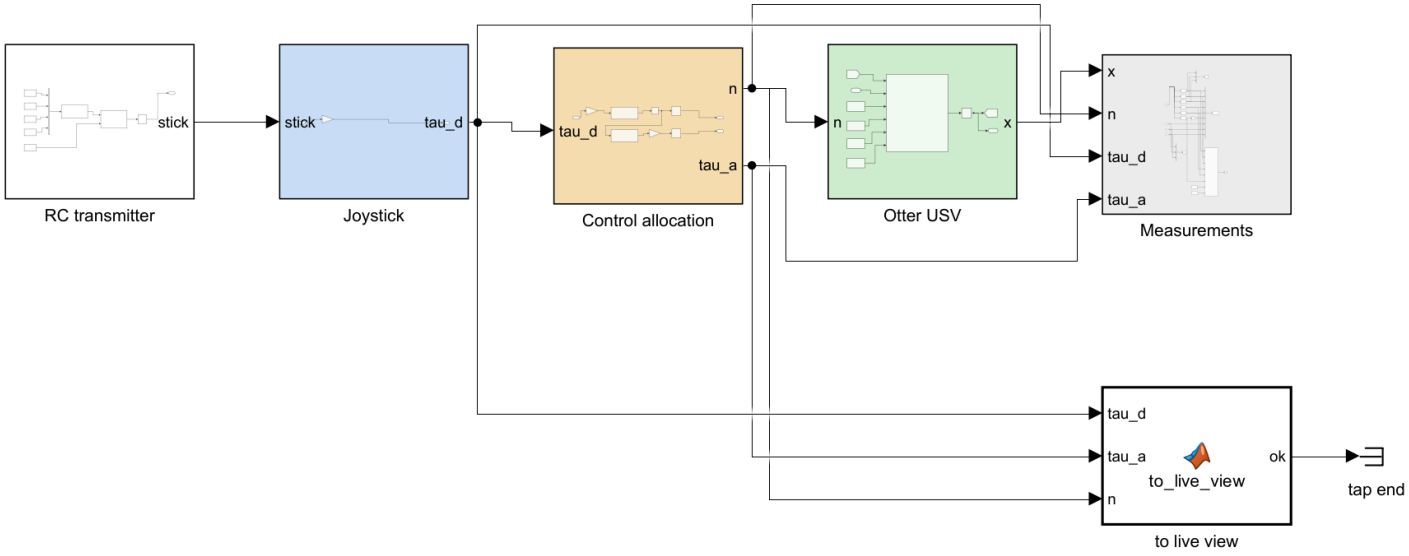

START
sticks to neutral, from rest

STOP
end the run


CENTRE
let go of the sticks

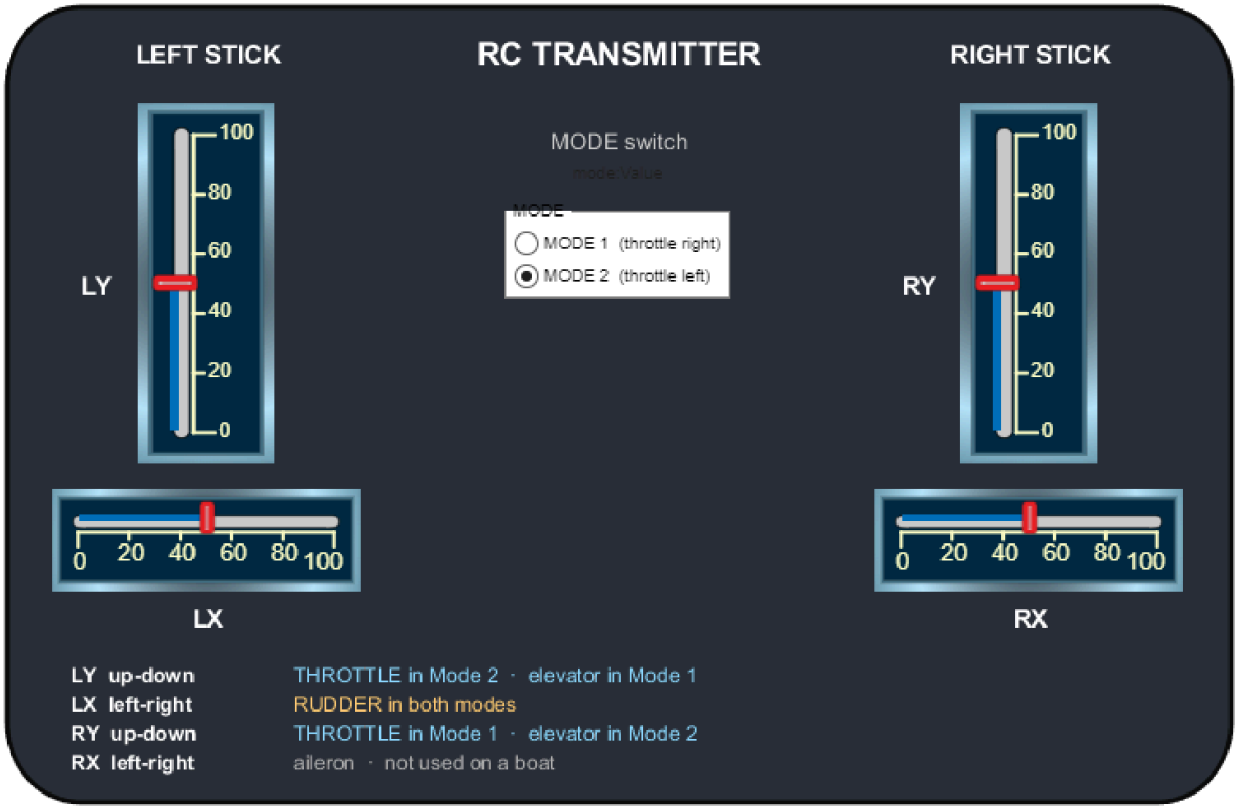

WEEK 1 - AN RC TRANSMITTER, AND THE ALLOCATION BEHIND IT

1 Choose MODE 1 or MODE 2 on the transmitter.
2 Click START. Every stick goes to neutral and the vessel starts from rest. The live view opens on the right.
3 THROTTLE forward (up) = ahead, back (down) = astern, centre = stop.
Mode 1 : throttle = RIGHT stick, up-down
Mode 2 : throttle = LEFT stick, up-down
4 RUDDER = LEFT stick, left-right, in both modes: left = turn to port, right = turn to starboard.
5 CENTRE releases every stick except the throttle, as the springs of a real transmitter do.

THE CHAIN
stick [s_T ; s_R] -> Joystick tau_d = [X_max s_T ; N_max s_R]
tau_d [X ; N] -> B inverse [T_L ; T_R]
T -> n = sign(T) sqrt(|T| / k)
n, saturated -> Otter USV



Reading the figure

Element	Meaning
`RC transmitter` (white)	four Constants `LX`, `LY`, `RX`, `RY` and a Constant `mode`, then `receiver` and `Mode 1 or 2`. Output: $[s_T;\ s_R]$
`Joystick` (blue)	one matrix gain, $\mathbf{diag}(X_{\max}, N_{\max})$. Output: $\boldsymbol{\tau}_d$
`Control allocation` (sand)	`B inverse` → `thrust to n` → `shaft limits` → $\mathbf{n}$; and `delivered thrust` → `B` → $\boldsymbol{\tau}_a$
`Otter USV`, `Measurements`	the plant and measurement stage of Experiment 1-9. The log holds $[u\ v\ r\ N\ E\ \psi]$, then $\mathbf{n}$, $\boldsymbol{\tau}_d$ and $\boldsymbol{\tau}_a$
`to live view`	hands $\boldsymbol{\tau}_d$, $\boldsymbol{\tau}_a$ and $\mathbf{n}$ to `W01rc_animate.m` at every step
dark panel	the transmitter: two vertical and two horizontal sliders, one per channel, each bound to its Constant, and the MODE switch bound to `mode`. The legend at the bottom of the panel gives the role of each channel in each mode
START, STOP, CENTRE	START sets all four channels to 50 and starts from rest, as a transmitter's throttle check does. CENTRE returns every channel except the throttle to 50 — the springs that a slider does not have

- The live view, drawn by `W01rc_animate.m` on the right half of the screen, adds one panel to the view of Experiment 1-10a: the attainable set, with the demanded force as an open circle and the delivered force as an orange dot. It is drawn in stick directions — surge force up, starboard moment to the right — so pushing the throttle forward moves the circle up. Below it are u with the prediction $X_a/|X_u|$, r, and n_L, n_R with the saturation limits.

Measured

> `W01_G_rc_check`


- As in Experiment 1-10a, a person on the sticks never repeats a run, so the numbers come from a script. `W01_G_rc_check.m` holds each stick position for 60 s from rest, in Mode 2, with pacing and the live view switched off.

Case	Sticks	X_d [N]	N_d [N·m]	n_L, n_R [rad/s]	X_a [N]	N_a [N·m]	u [m/s]	r [deg/s]
1	half ahead	119.7	0.00	$73.49,\ 73.49$	119.7	0.00	1.5432	0.000
2	full ahead	239.4	0.00	$103.93,\ 103.93$	239.4	0.00	3.0864	0.000
3	half ahead, half right	119.7	26.35	$91.71,\ 48.89$	119.7	26.35	1.4542	$+8.845$
4	full right, throttle centred	0.0	52.70	$77.59,\ -101.74$	0.0	52.70	0.0106	$+16.493$
5	full ahead, full right	239.4	52.70	$103.93,\ 69.15$	172.7	26.35	2.1265	$+8.252$
6	full astern	-239.4	0.00	$-101.74,\ -101.74$	-133.4	0.00	-1.7203	0.000
7	half ahead, half left	119.7	-26.35	$48.89,\ 91.71$	119.7	-26.35	1.4542	-8.845

- The directions are as intended: throttle forward gives $u > 0$, throttle back gives $u < 0$, rudder right gives $r > 0$ (starboard) and rudder left $r < 0$ (port). Cases 3 and 7 are mirror images to every printed digit.
- Case 3 run in Mode 1 — throttle on `RY` — and in Mode 2 — throttle on `LY` — gives logs that differ by exactly 0. The mode moves the throttle to the other hand and changes nothing downstream.
- Cases 1, 2, 3, 4 and 7 lie inside the attainable set, and $\boldsymbol{\tau}_a = \boldsymbol{\tau}_d$. Case 4 sits exactly on its edge by construction of $N_{\max}$: the right propeller is at $n_{\min} = -101.74$ rad/s.
- Case 5 saturates the left propeller at $n_{\max}$, and case 6 both propellers at $n_{\min}$. Astern, the sticks ask for -239.4 N and the propellers deliver -133.4 N: the last 44% of the throttle's backward travel does nothing.

> **★ The allocation undoes the square**
>
> In every straight-line case the settled speed equals $X_a/|X_u|$ to four decimals — 1.5432, 3.0864 and -1.7203 m/s — so the speed is **proportional to the throttle**: half throttle, half speed. In Experiment 1-10a, halving the SPEED slider gave a quarter of the speed, because the command was n and thrust grows with $n|n|$. Allocation inverts that curve, so whatever sits upstream — a thumb on a stick, or a speed controller — acts on a plant that is linear in its command.

```
W01_G_rc_check      % also writes the figure below
```

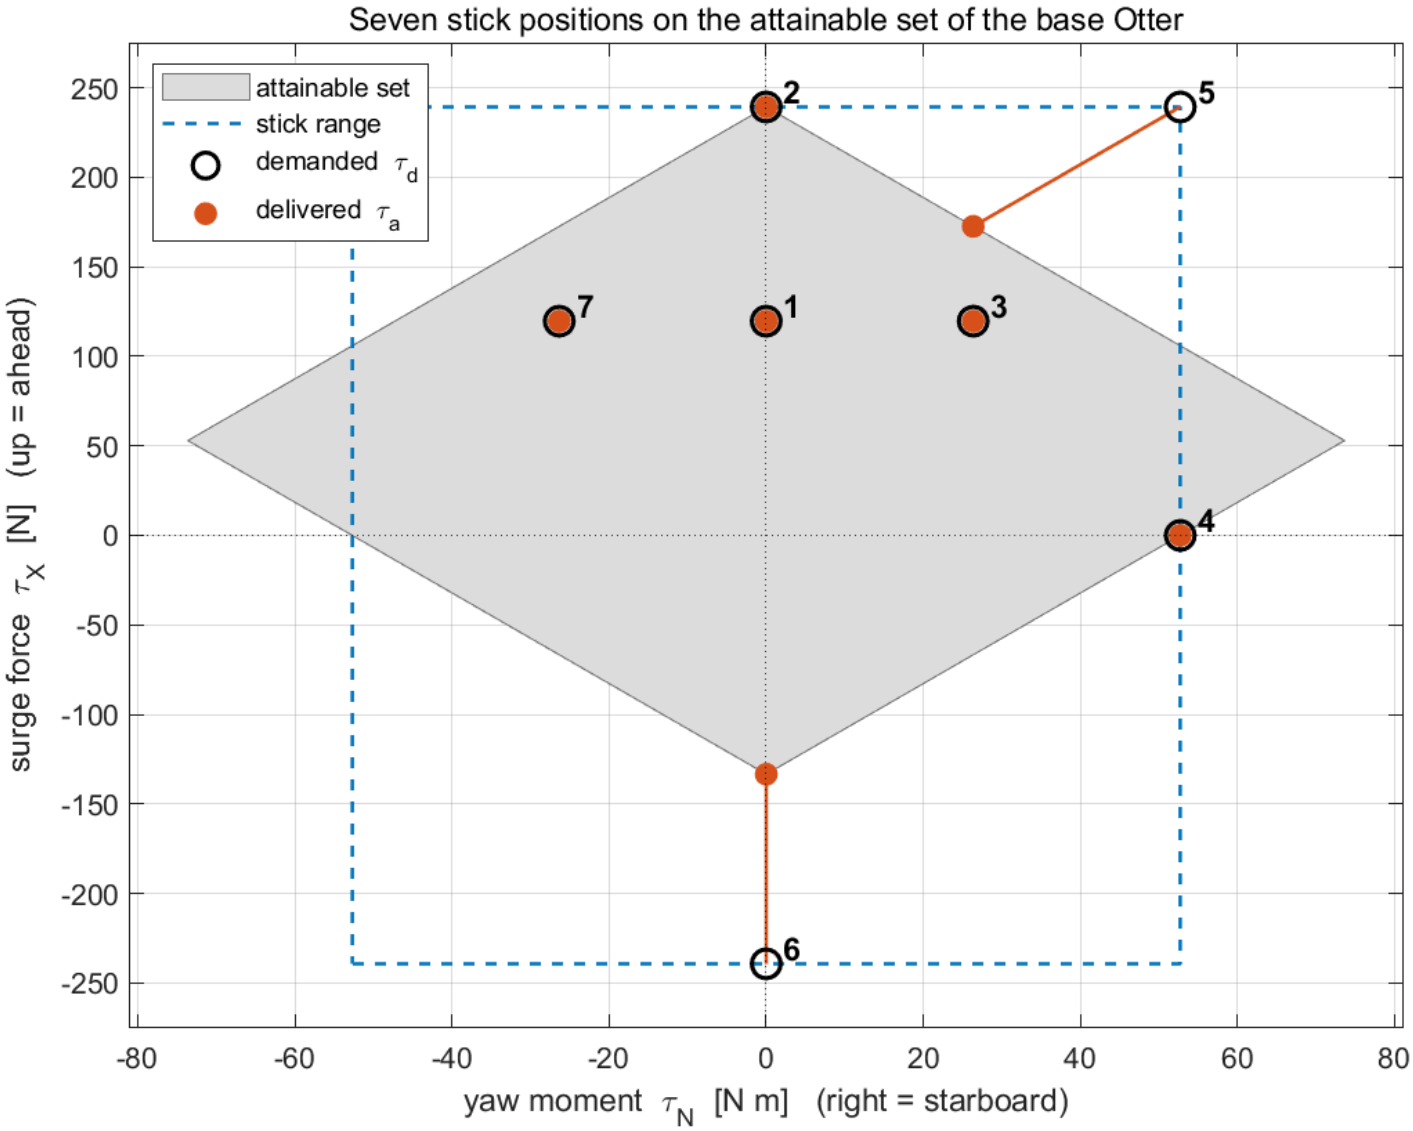

Reading the figure

Element	Meaning
grey region	the attainable set of Appendix A1-6: every $[X;\ N]$ the two propellers can produce, drawn with N across and X up
dashed blue rectangle	everything the sticks can ask for, $\lvert X\rvert \le X_{\max}$ and $\lvert N\rvert \le N_{\max}$
open circle	the demanded force τ_d of each case; the number is the case of the table above
orange dot	the delivered force τ_a
orange line	from demand to delivery. It is visible only where the propellers saturate — cases 5 and 6

- The set is not symmetric fore and aft, because $T_{\min}$ is smaller than $T_{\max}$ in magnitude (§1-10, A1-5). That is why the rectangle reaches further down than the set does.
- The set is widest at $X = T_{\max} + T_{\min} = 52.97$ N, not at $X = 0$: the largest yaw moment, ± 73.62 N·m, needs one propeller at full ahead and the other at full astern. With the throttle centred the rudder is limited to $N_{\max} = 52.70$ N·m.

Things to try, in this order

Do this	Watch	Section
START, then throttle forward to about 75	the circle moves up; u settles on the dashed prediction	above, and §1-11
throttle to the top	$u \to 3.09$ m/s, both propellers at $n_{\max}$	case 2
from there, rudder hard right	the circle leaves the grey region; the dot stays on its edge and the title turns red	case 5
CENTRE	the rudder springs back; the throttle stays	the transmitter table
throttle to the bottom	the dot stops at $X = -133.4$ N while the circle goes on to -239.4 N	case 6
switch to MODE 1 and repeat	the throttle is now the right stick; the vessel behaves identically	Mode check above

Experiment 1-10c · A real transmitter over USB (optional hardware, 15 min)

- A slider has neither a spring nor the feel of a gimbal. A real transmitter has both, and many transmitters running EdgeTX or OpenTX present themselves to a PC as a USB game controller when connected in their USB joystick (HID) mode. The Joystick Input block of Simulink 3D Animation reads such a device, and `W01_rc_usb.slx` puts it in place of the on-screen transmitter of Experiment 1-10b.
- Only the first block of the chain changes. `Joystick`, `Control allocation`, `Otter USV`, `Measurements` and the live view are built by the same code as in Experiment 1-10b.

Needed	For
Simulink 3D Animation	the Joystick Input block, library `vrlib`
a transmitter with a USB joystick (HID) mode, or any USB game controller	the device the block reads
`W01_rc_usb.slx`	built by `W01_H_build_rc_usb`; the model is built and opens without a device, only START needs one

Channels, not sticks

- Over USB a transmitter sends its **channels** — aileron, elevator, throttle, rudder — each as one axis from -1 to $+1$. The mode of Experiment 1-10b is applied inside the transmitter before anything leaves it. The throttle therefore arrives on the same axis whichever hand moves it, and `W01_rc_usb.slx` has no MODE switch.

	Experiment 1-10b `W01_rc.slx`	**Experiment 1-10c** `W01_rc_usb.slx`
what enters the model	four sticks, one slider each	the axes of the USB device
where the mode is applied	the block `Mode 1 or 2` in the model	inside the transmitter
what the model must be told	Mode 1 or Mode 2	which axis is the throttle, which the rudder, and which way each is positive
returning the sticks to the centre	the CENTRE button	the springs of the transmitter

- The axis order depends on the transmitter's channel-order setting. The EdgeTX and OpenTX default, AETR, puts the throttle on axis 3 and the rudder on axis 4; that is the default of the model until it is calibrated.
- The block `USB receiver` turns the two chosen axes into the stick deflections of Experiment 1-10b, through the same neutral zone:

$$s = \operatorname{sign}(d)\,\frac{\max(|d| - d_b,\ 0)}{50 - d_b}, \qquad d = 50\,\sigma\,a_k$$

Symbol	**Quantity**	**Value / source**
a_k	axis k of the device	-1 to 1, from Joystick Input
k	`js_thr` for the throttle, `js_rud` for the rudder	found by CALIBRATE; default 3 and 4 (AETR)
σ	`js_sgn`, the sign that makes forward and right positive	found by CALIBRATE; default $+1$
d_b	neutral zone, as in Experiment 1-10b	3


Calibration, once per transmitter

- The CALIBRATE button runs `W01_H_usb_setup`. It opens three dialogs and reads the axes when each one is confirmed:

Dialog	**Asks for**	**Gives**
1	every stick at the centre	the reference reading $\mathbf{a_0}$
2	throttle fully forward	`js_thr`: the axis with the largest $\lvert a - a_0\rvert$; `js_sgn(1)`: the sign of that change
3	throttle centred, rudder fully right	`js_rud` and `js_sgn(2)` the same way, with the throttle axis excluded

- An axis that moved by less than a quarter of its travel is not accepted, so a dialog confirmed without moving the stick produces an error instead of a wrong setting. The result is written into the model workspace and the model is saved.
- START checks the throttle before it starts, as a transmitter does when it is switched on. With no device on the configured joystick number, or with the throttle more than 10% off the centre, START opens a dialog and does not start the simulation.

```
W01_H_build_rc_usb      % only if W01_rc_usb.slx is missing or broken
```

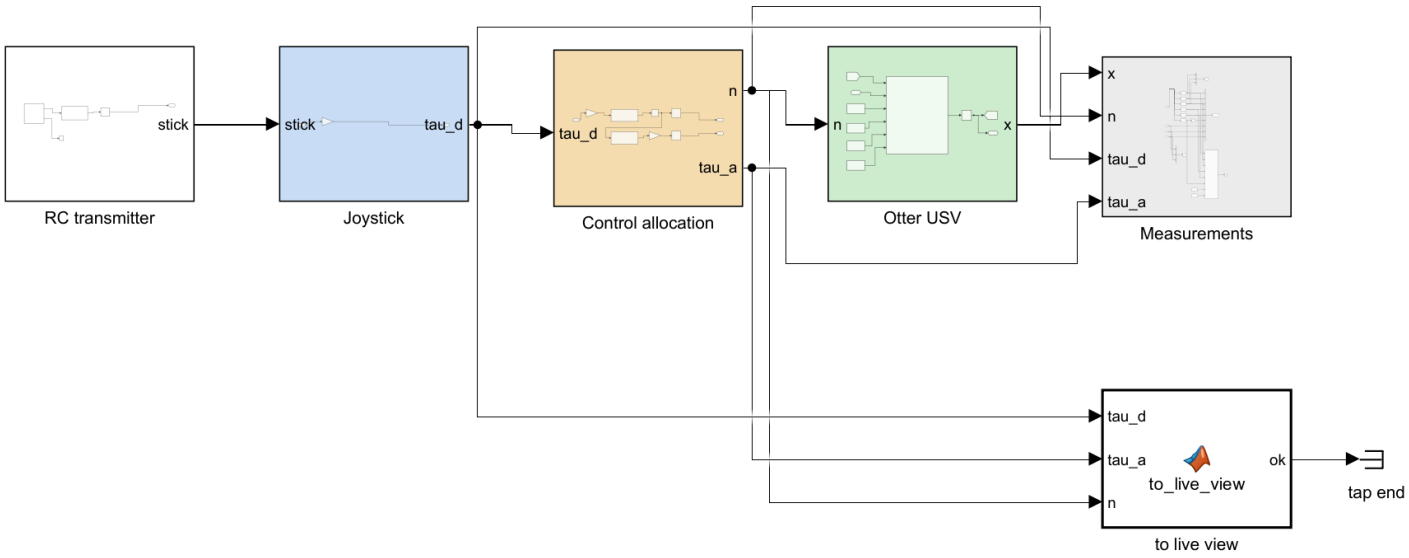



WEEK 1 - A REAL RC TRANSMITTER OVER USB

1 Connect the transmitter by USB and select its USB joystick (HID) mode.
2 Click CALIBRATE once per transmitter. It asks for one stick movement at a time and stores which axis is the throttle, which is the rudder, and which way is positive.
3 Centre the throttle, then click START. START refuses to run with the throttle off centre, or with no transmitter.
4 THROTTLE forward = ahead, back = astern, centre = stop. RUDDER left = turn to port, right = turn to starboard.

The MODE (1 or 2) is set in the transmitter itself. Over USB it sends channels - throttle, rudder - not sticks, so this model has no MODE switch.

Everything after the RC transmitter block is the same as W01_rc.slx (sec. G), and so is the live view.

Reading the figure

Element	Meaning
`RC transmitter` (white)	Joystick Input, then `USB receiver`, then a reshape to the vector `stick`. The buttons output of the device is terminated
the rest of the chain	identical to the model of Experiment 1-10b
START, STOP, CALIBRATE	START checks the device and the throttle, then starts from rest; CALIBRATE runs `W01_H_usb_setup`

Verified without a transmitter

```
W01_H_usb_check
```

- The only signal a transmitter contributes is the axis vector at the output of Joystick Input. `W01_H_usb_check.m` makes a temporary copy of `W01_rc_usb.slx` in which that block is replaced by a Constant of the same shape — a fake transmitter with eight axes — and runs it for 60 s per case, from rest.

Fake transmitter	s_T	s_R	n_L, n_R [rad/s]	u [m/s]	r [deg/s]
AETR, throttle full forward	1.000	0.000	$103.93,\ 103.93$	3.0864	0.000
AETR, throttle full back	-1.000	0.000	$-101.74,\ -101.74$	-1.7203	0.000
AETR, half ahead, half left	0.500	-0.500	$48.89,\ 91.71$	1.4542	-8.845
AETR, half ahead, half right	0.500	0.500	$91.71,\ 48.89$	1.4542	$+8.845$
TAER, half ahead, half left	0.500	-0.500	$48.89,\ 91.71$	1.4542	-8.845
throttle axis inverted, same sticks	0.500	-0.500	$48.89,\ 91.71$	1.4542	-8.845

- Throttle forward drives ahead and back drives astern; rudder left turns to port and right to starboard.
- Half ahead with half left rudder reproduces case 7 of Experiment 1-10b to every printed digit, whatever the channel order and the direction of the throttle axis, once the model is told which is which.
- The axis finder of CALIBRATE, given simulated readings, found the throttle and rudder axes and their signs for AETR, TAER and inverted axes, and rejected a reading in which no axis moved by a quarter of its travel.
- START with no device connected opened the dialog *No transmitter on joystick 1: Joystick is not connected* and left the simulation stopped.

> **⚠ What has not been verified**
>
> The Joystick Input block itself — reading a physical device — was not exercised when this section was written, because no transmitter was connected. Everything downstream of it was. The first run with a real transmitter is the check below.

The first run with a real transmitter

- Connect the transmitter by USB in its joystick mode, open `W01_rc_usb.slx`, click CALIBRATE and follow the three dialogs, then centre the throttle and click START. The run is correct when all of the following hold:

Do this	Correct when
CALIBRATE	the final dialog names two different axes, and repeating CALIBRATE names the same two
START with the throttle centred	the live view opens and the vessel stays at the origin
throttle forward	the open circle in the live view moves up and $u > 0$
throttle back	$u < 0$, and the circle stops following below $X = -133.4$ N
rudder left, then let go	$r < 0$ and the track curves to port; after release the spring centres the stick and $r \to 0$
change the mode in the transmitter's own menu	nothing in the model changes, because the channels are the same

1-11. Surge alone — a first-order system

- The speed controller of Week 3 is designed on one scalar equation. This section derives that equation from the surge row of the full model, states every term discarded on the way, and measures what the discarding costs.

The surge row, as `otter.m` integrates it

- Row 1 of the 6-DOF equation (`otter.m` line 203, 2021 release), with the entries of $\mathbf{M}$ and $\mathbf{C}$ read from the matrices rebuilt line by line by `_tools/verify_w01_theory.m`:

$$M_{11}\,\dot{u} + M_{15}\,\dot{q} + [\mathbf{C}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r]_1 = X + X_u\,u_r + \tau_{\text{cross},1} - [\mathbf{G}\boldsymbol{\eta}]_1 - g_{0,1}$$

$$[\mathbf{C}\boldsymbol{\nu}]_1 = -M_{22}\,v\,r - M_{26}\,r^2 + (\text{terms in } p,\ q,\ w)$$

Symbol	Value	Source
$M_{11} = (m + m_p) - X_{\dot{u}}$	85.50 kg	`M(1,1)` ; lines 108, 112, 125
$M_{15} = (m + m_p)\,z_g$	-19.75 kg·m — surge–pitch, because the CG sits 0.247 m **above** the origin (z points down)	`M(1,5)`
X	$T_1 + T_2$	line 181, §1-10
X_u	-77.554 N per m/s	line 157, $-24.4\,g/U_{\max}$
$\tau_{\text{cross},1}$	0 — `crossFlowDrag` returns sway and yaw only	line 194
$[\mathbf{G}\boldsymbol{\eta}]_1$, $g_{0,1}$	0 — no restoring in surge	§1-7

- The other entries of the surge row of $\mathbf{M}$ are zero. $M_{16} = -(m + m_p)\,y_g$ vanishes because the hull is port–starboard symmetric, and M_{12}, M_{13}, M_{14} are zero by the structure of $\mathbf{M}_{RB}$.

Dropped term	Size in a straight run from rest, $n = [60, 60]$	Why it goes	When it returns
$M_{15}\,\dot{q}$	peak 9.14 N against $X = 79.78$ N	it acts only while the hull pitches, by at most 0.39°; it is the only dropped term that is not identically zero here	never in the design models — it is the whole residue measured below
$-M_{22}\,v\,r - M_{26}\,r^2$	0 exactly	equal thrust on a symmetric hull gives $v = r = 0$	every turn — Week 4
terms in p, q, w of $\mathbf{C}$	peak 0.012 N	products of two small transients	not for this hull
$X_u\,(u_r - u)$	0	$V_c = 0$	§1-13 and Week 5

The first-order model, one step at a time

$$\begin{aligned}
M_{11}\,\dot{u} &= X + X_u\,u && \text{the terms that survive}\\
M_{11}\,\dot{u} &= X - |X_u|\,u && X_u < 0 \text{ because it is damping}\\
M_{11}\,\dot{u} + |X_u|\,u &= X && \text{collect the terms in } u\\
\frac{M_{11}}{|X_u|}\,\dot{u} + u &= \frac{1}{|X_u|}\,X && \text{divide by } |X_u|\\
T_u\,\dot{u} + u &= K_u\,X && \text{the standard first-order form}
\end{aligned}$$

- Two numbers describe it completely:

$$T_u = \frac{M_{11}}{|X_u|} = \frac{85.50}{77.55} = 1.1025\ \text{s}, \qquad K_u = \frac{1}{|X_u|} = 0.012894\ \frac{\text{m/s}}{\text{N}}$$

- As a transfer function, and as the step response from rest:

$$\frac{u(s)}{X(s)} = \frac{K_u}{T_u\,s + 1}, \qquad u(t) = K_u X\left(1 - e^{-t/T_u}\right)$$

- At $t = T_u$ the bracket equals $1 - e^{-1} = 0.632$. That is why the check below reads the instant at which u reaches 63.2% of its final value: that instant **is** T_u, measured.

Check	Result
dimension	$M_{11}/\lvert X_u\rvert$: kg ÷ (N·s/m) = s. K_u: (m/s) per N
limit $X_u \to 0$	$T_u \to \infty$ and $M_{11}\dot{u} = X$: Newton's law alone, and the speed grows without bound
limit $M_{11} \to 0$	$u = K_u X$ at once — no inertia, no lag
sign	with $X = 0$ and $u > 0$, $\dot{u} = -\lvert X_u\rvert u/M_{11} < 0$: the hull slows down
against the plant	63.2% reached at 1.1057 s in `W01_openloop.slx` (ode4, $h = 0.02$ s) and at 1.1056 s from `otter.m` with ode45 — 0.29% above T_u. The largest difference between the plant's $u(t)$ and the first-order curve is 0.0063 m/s

- The residue is the $M_{15}\dot{q}$ term, and the first instant shows it directly. A surge force on this hull also pitches it, so the plant's initial acceleration is X divided by 76.71 kg, not by 85.50 kg. The 76.71 kg is $1/[\mathbf{M}^{-1}]_{11}$ — the inertia left once the pitch coupling has taken its share. The pitch angle never exceeds 0.39°, and once it has settled the first-order model takes over.

Terminal speed

- **Terminal speed** is the speed at which the vessel stops accelerating under a constant command, because the thrust is then exactly absorbed by damping. The same quantity is called the steady-state or settled speed. Setting $\dot{u} = 0$:

$$u_{ss} = K_u\, X = \frac{X}{\lvert X_u\rvert} = \frac{2\,k_{\text{pos}}\, n\lvert n\rvert}{\lvert X_u\rvert}$$

n [rad/s]	X [N]	u_{ss} [m/s]	u_{ss} [kn]
30	19.944	0.2572	0.500
60	79.776	1.0286	2.000
90	179.496	2.3145	4.499
$n_{\max} = 103.93$	239.364	3.0864	6.000

- The vessel approaches it asymptotically and is within 2% after $4T_u = 4.41$ s.
- The last row is exact by construction. `otter.m` defines $n_{\max}$ by $2k_{\text{pos}}n_{\max}^2 = 24.4\,g$ (line 95) and X_u by $\lvert X_u\rvert = 24.4\,g/U_{\max}$ (line 157), so full thrust ends at $u_{ss} = U_{\max} = 6$ knots. The linear damping coefficient was calibrated so that the full travel of the throttle spans exactly the design speed.

> **★ Quadratic thrust against linear damping**
>
> The two sides of the balance grow at different rates. Thrust grows with the **square** of shaft speed, $X = 2k_{\text{pos}}n\lvert n\rvert$ (§1-10); damping grows only in **proportion** to speed, $\lvert X_u\rvert u$. The balance therefore gives $u_{ss} \propto n\lvert n\rvert$, and doubling n quadruples the terminal speed: $30 \to 60$ rad/s gives $0.2572 \to 1.0286$ m/s. A hull whose resistance were quadratic, $X_{\lvert u\rvert u}\lvert u\rvert u$, would instead give $u_{ss} \propto n$; the 2021 `otter.m` has only the linear term (line 184). Experiment 1-11 tests the prediction.

Experiment 1-11 · Predicting the terminal speed, then measuring it (30 min)

Step 1 — predict on paper

- Before running anything, compute the terminal surge speed for $n = 60$ rad/s on both propellers, using §1-11.

$$X = 2\,k_{\text{pos}}\, n\lvert n\rvert = 2 \times 0.011080 \times 60^2 = 79.776\ \text{N}$$

$$u_{ss} = \frac{X}{|X_u|} = \frac{79.776}{77.554} = 1.0286 \text{ m/s}$$


Step 2 — measure

```
W01_C_terminal_speed
```

> **To produce every figure in this section**
>
> `W01_C_terminal_speed.m` runs `W01_openloop.slx` four times with `dn = 0`, prints the table below, and writes `img/W01_result_speed.png`.

Measured, over four commands:

n [rad/s]	X [N]	predicted u_{ss} [m/s]	measured u [m/s]
20	8.864	0.1143	0.1143
40	35.456	0.4572	0.4572
60	79.776	1.0286	1.0286
80	141.824	1.8287	1.8287

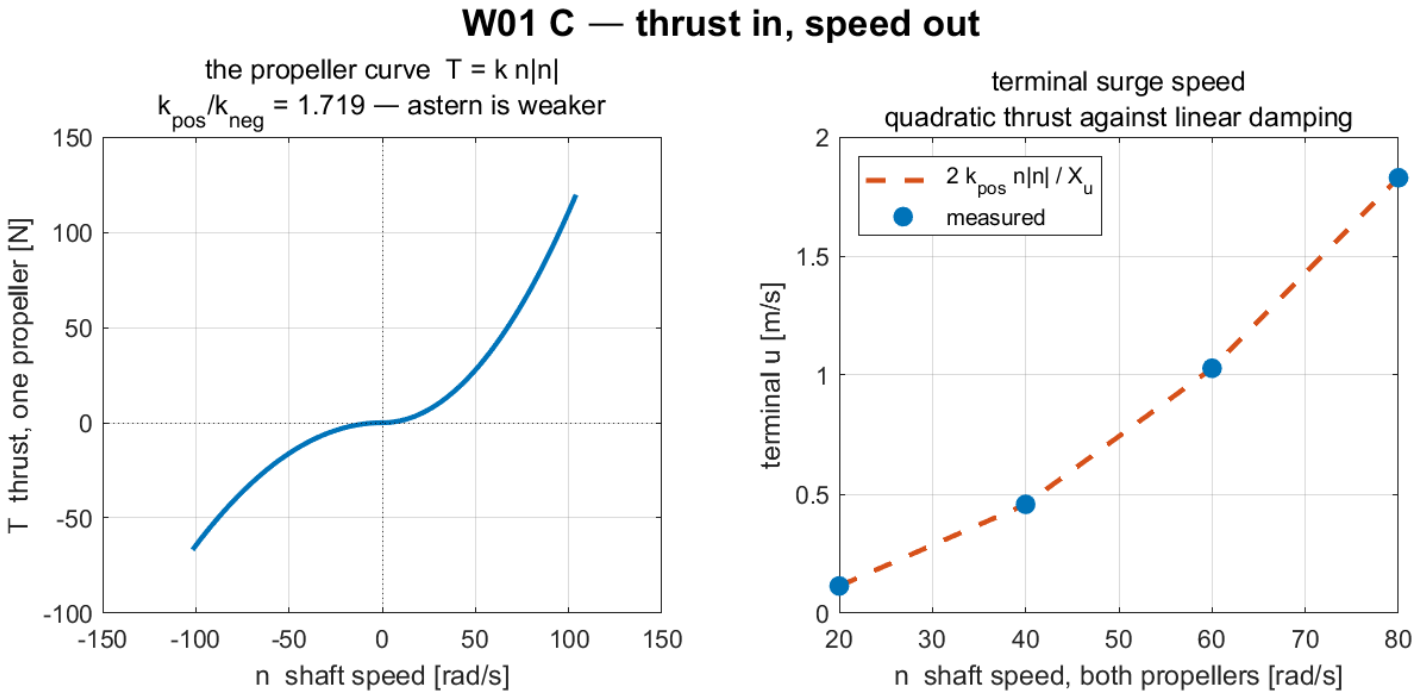

Reading the figure

Element	Meaning
left panel	the propeller curve $T = k\,n\lvert n\rvert$, with the kink at $n = 0$ where k changes
right panel, dashed	the hand prediction $2k_{\text{pos}}n\lvert n\rvert/\lvert X_u\rvert$
right panel, markers	the settled speed measured from the simulation

What the figure says

The left panel is the propeller on its own — shaft speed in, thrust out. The right panel is the whole vessel reduced to one number per command: how fast it ends up going.

Both curves bend the same way, and that is the finding. Doubling the shaft speed from 20 to 40 rad/s does not double the boat speed, it **quadruples** it, $0.1143 \to 0.4572$ m/s. Doubling again to 80 rad/s quadruples it once more,

to 1.8287 m/s. The line through the markers is a parabola.

The reason is that two different laws meet at the steady state. Thrust grows with the *square* of shaft speed, $T = k\,n|n|$, while damping grows only in proportion to speed. Setting them equal,

$$2k_{\text{pos}}\,n|n| = |X_u|\,u \qquad \Longrightarrow \qquad u \propto n^2.$$

The dashed prediction and the measured markers agree to four decimal places, and that agreement is worth pausing on. The prediction came from one scalar equation; the measurement came from a twelve-state nonlinear model. They match because **surge damping in `otter.m` really is linear** when nothing else is moving — a fact about this vessel, not about the method. Week 4 runs the same exercise on the yaw axis and gets only an approximation, and the difference between the two weeks is a property of the hull.

Nothing here involves a controller, because there is none yet. These four points are the ceiling every later week works underneath: no speed controller can ask for a speed the propellers cannot produce.

1-12. Sway velocity without sway force

- §1-10 established $Y \equiv 0$. Nevertheless the simulation of a turning vessel shows $v \neq 0$. The two statements are not in conflict, and the sway row of the equation of motion shows why.

The sway row, as `otter.m` integrates it

- Row 2 of the 6-DOF equation (`otter.m` line 203, 2021 release), with every term written:

$$M_{22}\,\dot{v} + M_{24}\,\dot{p} + M_{26}\,\dot{r} + [\mathbf{C}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r]_2 = Y + Y_v\,v_r + Y_{\text{cf}} - [\mathbf{G}\boldsymbol{\eta}]_2$$

Symbol	Value	Source
$M_{22} = (m + m_p) - Y_{\dot{v}}$	162.50 kg	`M(2,2)` ; lines 108, 113, 125
M_{24}	19.75 kg·m — sway–roll, through the CG height z_g	`M(2,4)`
$M_{26} = (m + m_p)\,x_g$	12.25 kg·m — sway–yaw, through $x_g = 0.153$ m	`M(2,6)`
$[\mathbf{C}\boldsymbol{\nu}]_2$	$85.50\,u\,r$, plus terms in p, q, w	lines 104–126, derived below
Y	0 for every command	§1-10, the empty row of $\mathbf{B}$
Y_v	0 in the 2021 release this course runs	line 158
$Y_{\text{cf}}(v, r)$	cross-flow drag, a force returned by `crossFlowDrag`	line 194
$[\mathbf{G}\boldsymbol{\eta}]_2$	0 — nothing restores a sideways position	§1-7

- The entries of $\mathbf{M}$ are read from the matrix rebuilt line by line by `_tools/verify_w01_theory.m`, not measured by finite difference.

Dropped term	Why it goes	When it returns
$M_{24}\,\dot{p}$	roll is not actuated and is restored by buoyancy (§1-7)	a 4-DOF model, when roll must be damped
terms in p, q, w of $\mathbf{C}$	products with roll, pitch and heave rates; the steady-turn balance below closes to 2.6×10^{-5} N without them	not for this hull
$Y_v\,v_r$	$Y_v = 0$ in the 2021 `otter.m`	the 2024 recalibration of MSS uses $Y_v = -M_{22}/T_{\text{sway}}$
Y	zero by the geometry of $\mathbf{B}$	an actuator with a sideways component — Appendix A1

- What remains is the planar sway equation:

$$\boxed{M_{22}\,\dot{v} + M_{26}\,\dot{r} + M_{11}\,u\,r = Y_{\text{cf}}(v, r)}$$

Where $M_{11}\,u\,r$ comes from

- The Coriolis coefficient in sway is the **surge inertia** M_{11} itself. Each of its two parts comes from one matrix.
- **Rigid body** (`otter.m` lines 104 and 107–109). $\mathbf{C}_{RB}$ is built at the centre of gravity and then moved to the origin. With $\boldsymbol{\nu}_2 = [0\ \ 0\ \ r]^{\mathsf{T}}$ and $\mathbf{r}_g = [x_g\ \ 0\ \ z_g]^{\mathsf{T}}$:

$$\boldsymbol{\nu}_1 + \boldsymbol{\nu}_2 \times \mathbf{r}_g = \begin{bmatrix} u \\ v \\ 0 \end{bmatrix} + \begin{bmatrix} 0 \\ x_g\,r \\ 0 \end{bmatrix} = \begin{bmatrix} u \\ v + x_g r \\ 0 \end{bmatrix} \qquad \text{velocity of the CG}$$

$$(m + m_p)\,\boldsymbol{\nu}_2 \times \begin{bmatrix} u \\ v + x_g r \\ 0 \end{bmatrix} = (m + m_p) \begin{bmatrix} -r\,(v + x_g r) \\ u\,r \\ 0 \end{bmatrix} \qquad \text{Coriolis force at the CG}$$

- Moving to the origin with $\mathbf{H}^{\mathsf{T}}$ leaves the three force rows unchanged, so the sway row keeps $(m + m_p)\,u\,r = 80.00\,u\,r$.
- **Added mass** (`otter.m` lines 120–122). `m2c` builds $\mathbf{C}_A$ from $\mathbf{M}_A$, and its sway row is $-X_{\dot{u}}\,u\,r + Z_{\dot{w}}\,w\,p$. Only the two yaw entries `CA(6,1)` and `CA(6,2)` are zeroed, so this term survives: $5.50\,u\,r$ in the plane.
- Together:

$$[\mathbf{C}\boldsymbol{\nu}]_2 = (m + m_p - X_{\dot{u}})u\,r = M_{11}\,u\,r = 85.50\,u\,r$$

- The reading: the vessel carries forward momentum $M_{11}u$. A body frame that turns at r sees that momentum change direction at the rate $M_{11}ur$, and in the body frame that change appears as a sideways force. A vessel moving forward **and** turning therefore acquires a sway velocity with no sway force anywhere.

> ⚠ **The coefficient is $m + m_p - X_{\dot{u}}$, not $m - X_{\dot{u}}$**
>
> Textbook 3-DOF forms write m for the whole rigid-body mass. On this vessel that is $m + m_p = 80.0$ kg, because §1-9 reserves $m = 55$ kg for the hull alone; reading m as the hull mass gives 60.5 kg instead of 85.50 kg. The 3-DOF matrix $\mathbf{C}(\boldsymbol{\nu})$ printed in §1-7 is the rigid-body part only, and $\mathbf{C}_A$ adds the remaining 5.50 kg.

The steady turn

- In a steady turn $\dot{v} = \dot{r} = 0$, so $\mathbf{M}$ leaves the equation and the balance is

$$Y_{\text{cf}}(v, r) = M_{11}\,u\,r$$

- Cross-flow drag is the only term that opposes the drift, so v grows until the drag it generates equals $M_{11}ur$. Measured by `_tools/verify_w01_theory.m` in the steady port turn of Experiment 1-12, $n = [56.5,\ 63.5]$ rad/s:

Quantity	Value
u, v, r	1.0218 m/s, 0.1264 m/s, -2.2941 deg/s
$M_{11}\,u\,r$	-3.4980 N
Y_{cf} from `crossFlowDrag` at the same state	-3.4980 N
residual	2.6×10^{-5} N

> **There is no linear sway damping in this hull**
>
> The 2021 `otter.m` sets `Yv = 0`. Everything that resists sideways motion comes from the cross-flow drag integral `crossFlowDrag`, which is quadratic in the local transverse velocity $v + x\,r$ along the hull. The steady sway velocity is the point where the Coriolis force and cross-flow drag balance, and no linear term participates.

- The remaining term, $M_{26}\,\dot{r}$, acts only while r is changing — at the entry to and the exit from each turn. The payload places the centre of gravity 0.153 m forward of the origin, so a **pure yaw moment produces a sway acceleration**, $\dot{v} = [\mathbf{M}^{-1}]_{26}\,N = -1.305 \times 10^{-3}$ m/s² per N·m, with no sway force anywhere. Appendix A1 measures this directly.
- The two therefore occupy different regimes: $M_{26}\dot{r}$ shapes the first instants of a turn, and $M_{11}ur$ sets the steady drift.
- The angle between where the vessel points and where it actually travels is the **crab angle**

$$\beta = \operatorname{atan2}(v, u), \qquad \chi = \psi + \beta$$

where χ is the course angle. Week 5 §5-5 shows that a guidance law which regulates ψ while the vessel travels along χ leaves a permanent path error, and measures it as $\Delta \tan\beta$.

Experiment 1-12 · One manoeuvre: straight, port, straight, starboard, straight (30 min)

- The vessel runs the manoeuvre a real USV would be given first: hold a course, turn left, hold, turn right, hold. It takes 150 s, and nothing in it is controlled — the two shaft speeds simply follow a timetable.
- The run exists to answer four questions, none of which a straight run can answer:

Question	Where the answer is read	Answer from this run
does a small difference in shaft speed turn the vessel?	ψ in the live dashboard	yes — -70.2° and $+70.6^\circ$ from a difference of 3.5 rad/s
which propeller slows for a turn to port?	the timetable below	the **left** one
can the hull move sideways with no sideways force?	v against Y	$v = \pm 0.1264$ m/s while $Y = 0$ exactly — §1-12
does the bow point where the vessel goes?	the hull outlines along the track	no — the two differ by the crab angle, 7.05° in each turn

- **Nothing reverses.** Both propellers turn ahead for the whole run. A turn is a small difference between them, because the yaw moment is

$$N = y_{\text{pont}}\,(T_{\text{left}} - T_{\text{right}}), \qquad y_{\text{pont}} = 0.395\ \text{m}$$

Phase	t [s]	n_L	n_R	Turn
straight 1	0 – 30	60.0	60.0	—
port	30 – 60	56.5	63.5	to the left, ψ decreasing
straight 2	60 – 90	60.0	60.0	—
starboard	90 – 120	63.5	56.5	to the right, ψ increasing
straight 3	120 – 150	60.0	60.0	—

> **Which propeller slows down for a left turn**
>
> More thrust on the **left** gives a positive N, which swings the bow to **starboard**. A turn to port therefore slows the **left** propeller, not the right one. Getting this backwards is the most common sign error in the whole week, and the track shows it immediately.

Measured


```
W01_D_the_manoeuvre
```

> **To produce every figure in this section**
>
> `W01_D_the_manoeuvre.m` runs `W01_openloop.slx` once for the full 150 s, prints the table below, and writes `img/W01_result_track.png` . The three body velocities are not plotted again here — the live dashboard inside the model draws u, v, r, x, y and ψ while the run is in progress.

- Each row is the mean over the **last fifth of its phase**, after the transient at the phase boundary has decayed. Averaging over a whole phase would mix the transient into the steady number.

Phase	u [m/s]	v [m/s]	r [deg/s]	β [deg]
straight 1	1.0286	0.0000	0.0000	0.0000
port	1.0218	+0.1264	−2.2942	+7.0528
straight 2	1.0287	0.0215	0.0085	1.1955
starboard	1.0218	−0.1264	+2.2942	−7.0526
straight 3	1.0287	−0.0215	−0.0085	−1.1948

- Heading change: **−70.2°** in the port turn, **+70.6°** in the starboard turn. The two differ by 0.41°, so the hull is symmetric about its centreline and nothing in `otter.m` favours one side.
- The commanded yaw moment in the starboard turn is $N = +3.676$ N·m. The slower propeller still pushes **ahead** at 35.37 N while the faster one pushes at 44.68 N.

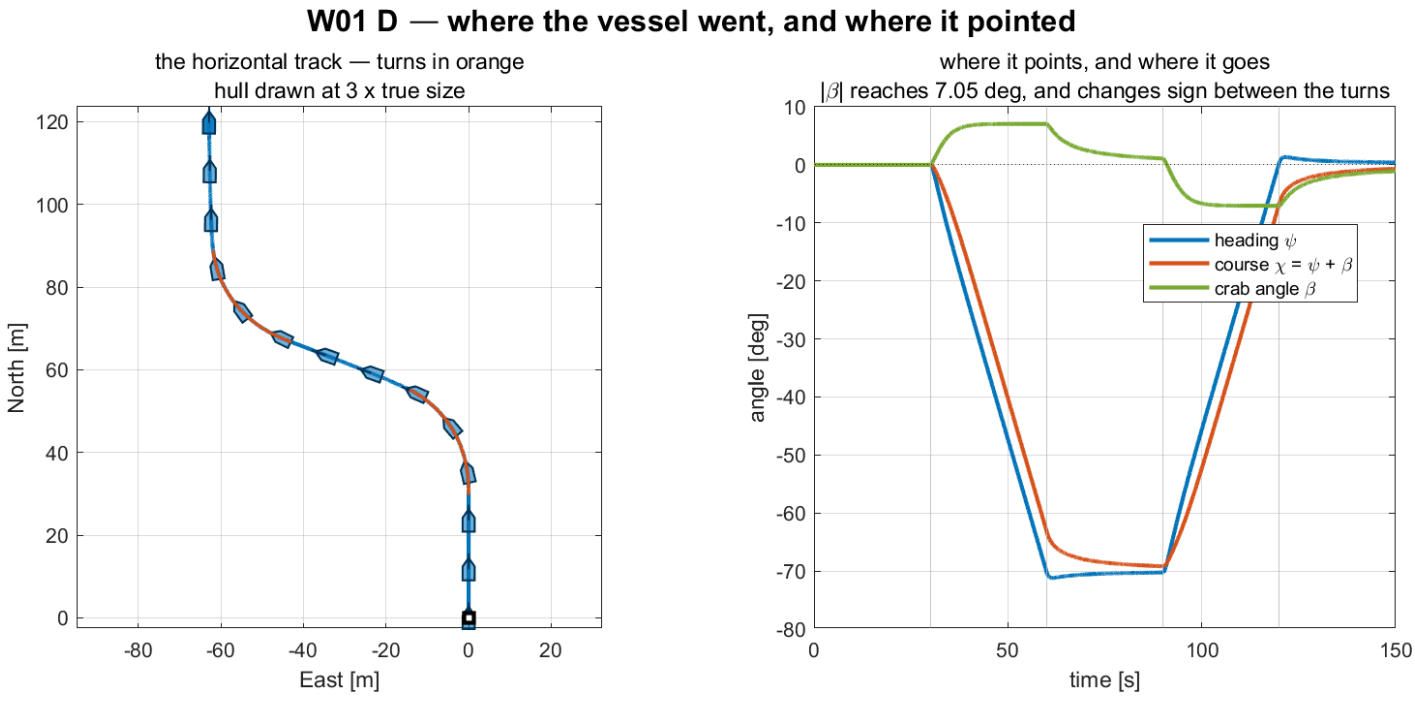

Reading the figure

Element	Meaning
left panel, blue / orange	the straight legs / the two turns
left panel, outlines	the hull at 3× true size, with its heading line
right panel, blue	heading ψ — where the vessel **points**
right panel, orange	course $\chi = \psi + \beta$ — where it actually **goes**
right panel, green	the crab angle β, the gap between the two

What the figure says

The left panel answers *where did it go*. The right panel answers *where was it pointing while it went there*. Those turn out to be two different questions.

During each turn the two answers differ by 7.05°. The vessel points one way and travels another, and the gap has a name:

$$\chi = \psi + \beta, \qquad \beta = \operatorname{atan2}(v, u) = \operatorname{atan2}(0.1264,\ 1.0218) = +7.05^\circ.$$

A turning vessel always has some sideways velocity v, so it always moves at an angle to its own centreline. **Heading is not course, and the difference is not an error** — it is the crab angle, and it is the reason the hull outline is drawn along the track instead of a bare line. A bare line cannot show which way the bow was pointing.

The turn itself is nearly free. Surge falls from 1.0286 to 1.0218 m/s — seven tenths of one per cent. Because $n|n|$ curves upward, the propeller that speeds up gains more than the slowed one loses, so the total thrust barely changes. That is why a differential turn is the cheap way to steer a twin-screw craft, and why reversing a propeller is kept for manoeuvring at rest.

Raising `dn` in `W01_0_setup.m` widens the crab angle, because β grows with turn rate. Week 4 §4-4 has to steer around it, and Week 5's line-of-sight guidance is where it finally has to be paid for.

> **★ The sway force is zero and the sway velocity is not**
>
> $\max|Y| = 0.0 \times 10^0$ N over every command in the manoeuvre — not small, but **structurally** zero, because both propellers face forward and $\mathbf{B}$ of §1-10 has no sway row. The vessel sways anyway, at ± 0.1264 m/s, and v **changes sign** between the two turns. That sway is the Coriolis term $M_{11}\,u\,r$ of §1-12 acting while the hull rotates, not a force. Reporting $Y \approx 0$ and $Y = 0$ as the same observation loses the entire content of §1-10.


1-13. Ocean current — a velocity, not a force

- Section 1-12 produced a drift from the vessel's own rotation. A current produces one without the vessel doing anything at all, and it is the last thing needed before Part 2.

A current is a velocity, not a force


The hull feels water flowing past it, so the current is rotated into the body frame and **subtracted**. Nothing is added to the right-hand side.

(a) in NED — what the chart gives

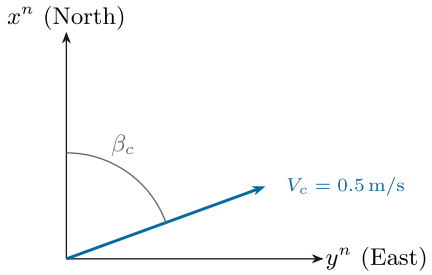

β_c is the direction the water **goes towards**, clockwise from North like every other angle in NED.

(b) in the body frame — what the hull feels



Both ψ and β_c are measured from North, so the angle left over at the bow is their **difference**. Only that difference reaches the hydrodynamics, which is why a turning vessel sees a changing current even in a perfectly steady one.

The three lines that put a current into the model — `otter.m` 79–81: `u_c = V_c*cos(beta_c-eta(6)); v_c = V_c*sin(beta_c-eta(6)); nu_r = nu - [u_c v_c 0 0 0 0]';`

And the one line that keeps it out of the kinematics — `otter.m` 204: $\dot{\boldsymbol{\eta}} = \mathbf{J}(\boldsymbol{\eta})\,\boldsymbol{\nu}$, with $\boldsymbol{\nu}$ and **not** $\boldsymbol{\nu}_r$. Every hydrodynamic term uses $\boldsymbol{\nu}_r$; the position uses $\boldsymbol{\nu}$. That single asymmetry is why a current moves a vessel without pushing it.

Reading the figure

Element	Meaning
left panel	the current as a chart gives it: a speed V_c and a direction β_c measured **clockwise from north**, like every other angle in NED
β_c	the direction the water **goes towards**. $\beta_c = 0$ sets the water north
right panel	the same current after rotation into $\{b\}$, resolved into u_c and v_c
$\beta_c - \psi$	the angle the flow makes with the hull. Only this difference matters to the hydrodynamics
the box	the three lines that put a current into the model, and the one line that keeps it out of the kinematics

Why a current cannot be a force

The natural first guess is that a current pushes on the hull, so it should be added to $\boldsymbol{\tau}$ like the propellers are. One thought experiment rules that out.

Drop a log into a river. It drifts downstream at exactly the speed of the water. Now ask what force the water exerts on it. The answer is **none**: the log and the water are moving together, so no water flows past the log, and drag is what happens when water flows past something. The log is moving over the ground and feeling nothing at all.

If the current were a force, that log would keep accelerating for as long as it stayed in the river. It does not. So whatever a current is, it is not a term on the right-hand side of $\mathbf{M}\dot{\boldsymbol{\nu}} + \ldots = \boldsymbol{\tau}$.

What the hull actually responds to is the water flowing past it — the difference between its own velocity and the water's. That difference has a name and a symbol:

$$\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$$

$\boldsymbol{\nu}$ velocity over the ground
$\boldsymbol{\nu}_c$ velocity of the water
$\boldsymbol{\nu}_r$ velocity through the water

Every hydrodynamic term — damping, cross-flow drag, added-mass Coriolis — is computed from $\boldsymbol{\nu}_r$ and not from $\boldsymbol{\nu}$. Set $\boldsymbol{\nu} = \boldsymbol{\nu}_c$, the drifting log, and $\boldsymbol{\nu}_r = \mathbf{0}$: every hydrodynamic force vanishes, exactly as it should.

Why the angle is $\beta_c - \psi$

A current is described by exactly two numbers, and both are properties of **the water**, not of the vessel:

Symbol	Definition	Unit	Set by	Sign convention
V_c	the **speed of the water** over the ground. Always ≥ 0: a current has no negative speed, only a direction	m/s	`V_c` in `WXX_0_setup.m`	$V_c = 0$ is still water
β_c	the **direction the water flows towards**, measured clockwise from North in $\{n\}$	rad (deg in the setup print-out)	`beta_c` in `WXX_0_setup.m`	$\beta_c = 0$ sends the water **north**; $\beta_c = 90^\circ$ sends it **east**

> ⚠ **β_c is where the water goes, not where it comes from**
>
> Meteorology names a wind by the direction it blows *from* — a "north wind" comes out of the north and blows southward. `otter.m` does the opposite for current: $\beta_c = 0$ means the water travels **towards** the north. The two conventions differ by exactly 180°, so taking one for the other reverses every drift in the model and the tracks come out mirrored.
>
> β_c is also **not** the crab angle. The crab angle is β, it is an *outcome* of the run rather than an input to it, and §1-12 measured one with no current present at all. Nothing in the model lets a crab angle be commanded.

Neither number is a force, and neither has anything to do with the propellers. They enter the model only through the next two lines.

The current is given in $\{n\}$ — the water runs at V_c towards β_c:

$$\boldsymbol{\nu}_c^{\,n} = V_c \begin{bmatrix} \cos\beta_c \\ \sin\beta_c \end{bmatrix}.$$

But $\boldsymbol{\nu}$ lives in $\{b\}$, so the subtraction cannot be done until both are in the same frame. Rotating from $\{n\}$ into $\{b\}$ is the job of $\mathbf{R}(\psi)^\top$ — the transpose of §1-3, and nothing new:

$$\begin{bmatrix} u_c \\ v_c \end{bmatrix} = \mathbf{R}(\psi)^\top \boldsymbol{\nu}_c^{\,n} = \begin{bmatrix} \cos\psi & \sin\psi \\ -\sin\psi & \cos\psi \end{bmatrix} V_c \begin{bmatrix} \cos\beta_c \\ \sin\beta_c \end{bmatrix} = V_c \begin{bmatrix} \cos\beta_c\cos\psi + \sin\beta_c\sin\psi \\ \sin\beta_c\cos\psi - \cos\beta_c\sin\psi \end{bmatrix}.$$

Those two entries are the angle-difference identities, and they collapse:

$$\boxed{u_c = V_c\cos(\beta_c - \psi), \qquad v_c = V_c\sin(\beta_c - \psi)}$$

So $\beta_c - \psi$ is **not a new convention to memorise.** It is what $\mathbf{R}(\psi)^\top$ becomes when the vector it acts on is written as a magnitude and an angle. Both β_c and ψ are measured from North, so subtracting them leaves the angle measured from the **bow** — which is the only thing the hull can respond to. Panel (b) of the figure draws all three arcs from the same North line so that the subtraction is visible rather than asserted.

Check	
$\psi = 0$	$u_c = V_c\cos\beta_c$, $v_c = V_c\sin\beta_c$ — the body frame is the NED frame, as it must be
$\beta_c = \psi$	$u_c = V_c$, $v_c = 0$ — the water runs straight down the hull, dead astern to dead ahead
$\beta_c = \psi + 90^\circ$	$u_c = 0$, $v_c = V_c$ — pure beam current, no fore-and-aft component
the figure's numbers	$V_c = 0.5$, $\beta_c = 70^\circ$, $\psi = 30^\circ$ gives $\beta_c - \psi = 40^\circ$, so $u_c = 0.383$ and $v_c = 0.321$ m/s

- Because ψ sits inside that rotation, **a turning vessel sees a changing current in its own frame even when the current is perfectly steady.** Nothing about the water changed; the frame it is being measured in did.

The asymmetry that makes drift possible

- From §1-8, `otter.m` uses the two velocities in different places, and this is the entire mechanism:

Uses $\boldsymbol{\nu}_r$ — through the water	Uses $\boldsymbol{\nu}$ — over the ground
linear damping $\mathbf{D}\boldsymbol{\nu}_r$	the kinematics $\dot{\boldsymbol{\eta}} = \mathbf{J}(\boldsymbol{\eta})\boldsymbol{\nu}$
cross-flow drag	
Coriolis $\mathbf{C}\boldsymbol{\nu}_r$	

> **★ A current moves a vessel without pushing it**
>
> Every force in the model is computed from $\boldsymbol{\nu}_r$, so in a steady current the force balance is **identical** to the one in still water and the vessel settles at the same speed *through the water*. But the position integrates $\boldsymbol{\nu}$, which is larger or smaller or sideways. The vessel is carried, not pushed. Experiment 1-13 measures both halves of that sentence.

- Two consequences, both measured in Experiment 1-13:

Current	What happens
fore-and-aft ($\beta_c = 0^\circ$ or 180°)	the track stays straight; only the **ground speed** changes, by exactly $\pm V_c$
on the beam	the track leaves the heading by a drift angle, and cross-flow drag on v_r makes a yaw moment that slowly **turns the hull into the flow** — with no command given

- The second is the same crab angle as §1-12, arriving by a different route. Week 5 has to steer around both at once.

The same thing in `otter.m`, line by line

- The four steps above are four blocks of code in one file. Line numbers are from the MSS 2021 release of `VESSELS/otter.m`, the copy `_tools/mss_path.m` puts on the path.

Step 1 — build the current in the body frame (lines 79–81)

$$u_c = V_c\cos(\beta_c - \psi), \qquad v_c = V_c\sin(\beta_c - \psi), \qquad \boldsymbol{\nu}_c = [u_c \quad v_c \quad 0 \quad 0 \quad 0 \quad 0]^\top$$

```
u_c = V_c * cos(beta_c - eta(6));          % current surge velocity
v_c = V_c * sin(beta_c - eta(6));          % current sway velocity
nu_r = nu - [u_c v_c 0 0 0 0]';            % relative velocity vector
```

Piece of code	What it is doing
`eta(6)`	the heading ψ. The current is given in NED, and $\beta_c - \psi$ rotates it into $\{b\}$
`cos`, `sin` and no matrix	this **is** $\mathbf{R}(\psi)^\top$ of §1-3, written out for the two components that exist
the four zeros	the current is **horizontal and irrotational**: it has no heave and it does not spin the water. That assumption is used again in step 3
the minus sign	$\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$. A following current *reduces* the speed felt by the hull

Step 2 — every hydrodynamic force is evaluated at $\boldsymbol{\nu}_r$ (lines 184–194)

$$X_h = X_u u_r, \quad Y_h = Y_v v_r, \quad N_h = N_r\big(1 + 10|r|\big)r$$

```
Xh = Xu * nu_r(1);
Yh = Yv * nu_r(2);
Nh = Nr * (1 + 10 * abs(nu_r(6))) * nu_r(6);
tau_crossflow = crossFlowDrag(L,B_pont,T,nu_r);
```

- Every one of these reads `nu_r`, never `nu`. **Search the file for `nu_r` and the answer to "which forces feel the current" is the list of hits.**

Step 3 — the Coriolis term, and why it may also use $\boldsymbol{\nu_r}$ (lines 104, 120, 126)

```
CRB_CG = [ (m+mp) * Smtrx(nu2)         O3
           O3                  -Smtrx(Ig*nu2) ];
CA  = m2c(MA, nu_r);
C = CRB + CA;
```

- $\mathbf{C}_{RB}$ is built from `nu2` $= [p\ q\ r]^\top$, the **angular** rates, while $\mathbf{C}_A$ is built from `nu_r`. That looks inconsistent and is not, because step 1 gave the current no rotational component: $\boldsymbol{\nu}_{2r} = \boldsymbol{\nu}_2$, so the two ways of writing $\mathbf{C}_{RB}$ are the same matrix.
- This is Fossen's result for a **constant irrotational** current: the whole equation of motion can be written in relative velocity,

$$\mathbf{M}\dot{\boldsymbol{\nu}}_r + \mathbf{C}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{D}(\boldsymbol{\nu}_r)\boldsymbol{\nu}_r + \mathbf{g}(\boldsymbol{\eta}) = \boldsymbol{\tau}$$

- and that is exactly what line 203 evaluates. If the current were unsteady or rotational, this step would fail and a $\dot{\boldsymbol{\nu}}_c$ term would appear.

Step 4 — the kinematics use $\boldsymbol{\nu}$, and this is the whole trick (lines 200–204)

$$\dot{\boldsymbol{\eta}} = \mathbf{J}(\boldsymbol{\eta})\,\boldsymbol{\nu} \qquad \text{---} \qquad \boldsymbol{\nu},\ \textbf{not}\ \boldsymbol{\nu}_r$$

```
J = eulerang(eta(4),eta(5),eta(6));

xdot = [ M \ ( tau + tau_damp + tau_crossflow - C * nu_r - G * eta - g_0)
         J * nu ];
```

- **Read the two rows of `xdot` against each other.** The top row — the forces — contains `nu_r`. The bottom row — the position — contains `nu`. One file, one line apart, two different velocities.
- That single asymmetry produces every result of Experiment 1-13: the hull settles at the same speed *through the water* in all four runs, and ends up in four different places.

The whole mechanism, checked in one command

```
x = zeros(12,1); x(1) = 1.0286;              % 1 m/s ahead, no current yet
a = otter(x, [60;60], 25, [0.05 0 -0.35]', 0.0, 0);
b = otter(x, [60;60], 25, [0.05 0 -0.35]', 0.5, 0);
[a(1) b(1)]      % surge ACCELERATION differs — the hull feels the current
[a(7) b(7)]      % north RATE is identical — both integrate the same nu
```

It prints $\dot{u} = 0.000046$ against 0.505557 m/s^2 — a difference of 0.51 — and $\dot{x}^n = 1.028600$ against 1.028600 m/s, a difference of **exactly zero**.
The first pair differs because the following current reduces u_r, which reduces the damping and leaves a net accelerating force. The second pair is identical because $\dot{x}^n$ is read from $\boldsymbol{\nu}$, which the current has not touched.
Two lines of output, and the whole section is in them.

And the same thing in the Simulink model

- The plant block does not reimplement any of this. `_tools/add_otter_plant.m` wraps the file itself:

```
function xdot = otter_hull(x, u_thr, mp, rp, V_c, beta_c)
coder.extrinsic('otter');
xdot = zeros(12,1);
xdot = otter(x, u_thr, mp, rp, V_c, beta_c);
end
```

Where the two numbers come from	
`V_c` , `beta_c`	Constant blocks inside the plant subsystem, holding the **names** `V_c` and `beta_c`
those names	set by `WXX_0_setup.m` in the base workspace, from `WXX_vars.m`
changing them for one run	`run_sim('W01_current', V, 'V_c', 0.5, 'beta_c', pi/2)` — no block is edited

- So the current is one number and one angle, entering at one place, and everything else in this section is a consequence of the two lines that subtract it.


Experiment 1-13 · The same command in four currents (25 min)

- A second model, `W01_current.slx` , keeps the command fixed — both propellers at $n_0 = 60$ rad/s, **no steering at all** — and changes only the water.

```
W01_E_build_current
W01_E_current_run
```

To produce every figure in this section

`W01_E_build_current.m` writes `img/W01_current.png` at the end of the build. `W01_E_current_run.m` runs `W01_current.slx` **four times** — one per current — prints the table below, and writes `img/W01_result_current.png` .

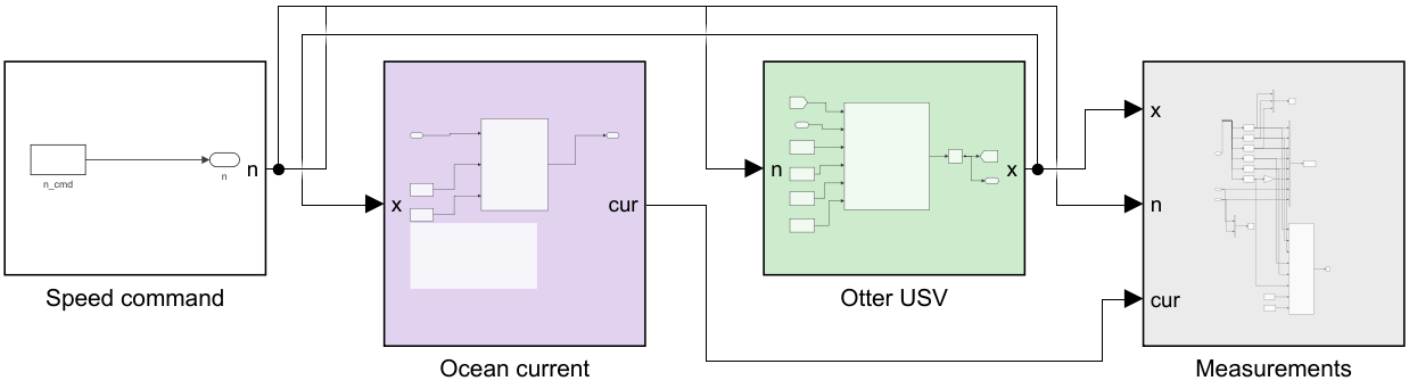


```
WEEK 1  -  WHAT AN OCEAN CURRENT DOES TO AN OPEN LOOP

The command never changes: both propellers at n0, no steering, for the
whole run. Only the water changes between runs.

  V_c      current speed        [m/s]
  beta_c   current direction    [rad from north, the way the water GOES]

HOW IT ENTERS THE MODEL   (otter.m lines 79-81)

  u_c  = V_c cos(beta_c - psi)
  v_c  = V_c sin(beta_c - psi)
  nu_r = nu - [u_c v_c 0 0 0]'

The current is rotated into the BODY frame first, because the hull feels
water flowing past it, not a compass direction. Then:

  damping, cross-flow drag, Coriolis   evaluated at nu_r
  kinematics  eta_dot = J(eta) nu      evaluated at nu

WHAT TO EXPECT

1  NO CURRENT.  The track is a straight line north. Y is structurally
   zero and nothing turns the vessel.

2  FOLLOWING or HEAD CURRENT (beta_c = 0 or 180 deg).  Still straight,
   but faster or slower over the ground. The vessel never notices - its
   speed THROUGH THE WATER is unchanged at settle.

3  BEAM or OBLIQUE CURRENT.  The track is no longer the heading. The
   vessel is pushed sideways with no sideways force, and the cross-flow
   drag on the now non-zero v_r produces a yaw moment that slowly turns
   the hull into the flow. Nothing commanded either.

Edit V_c and beta_c in W01_0_setup.m, or run W01_E_current_run for all.
```


Reading the figure

Element	Meaning
`Speed command` (white)	one constant, both propellers equal. Nothing in this model steers
`Ocean current` (lilac)	recomputes u_c, v_c, u_r, v_r from the state so they become **signals**. It drives nothing
`Otter USV` (green)	`otter.m` with V_c and β_c; the current is applied inside, exactly as §1-13 describes
`Measurements` (grey)	logs the six standard columns plus u_c v_c u_r v_r

- The `Ocean current` stage exists only so that the relative velocity — the quantity every force in the model is evaluated at — can be plotted instead of remaining a hidden intermediate.

What the four runs give

Current	ground speed [m/s]	track [deg]	heading [deg]
still water	1.0286	0.00	0.00
following, $\beta_c = 0^\circ$	1.5286	0.00	0.00
beam, $\beta_c = 90^\circ$	1.1091	21.80	-4.00
head, $\beta_c = 180^\circ$	0.5286	-0.00	-0.00

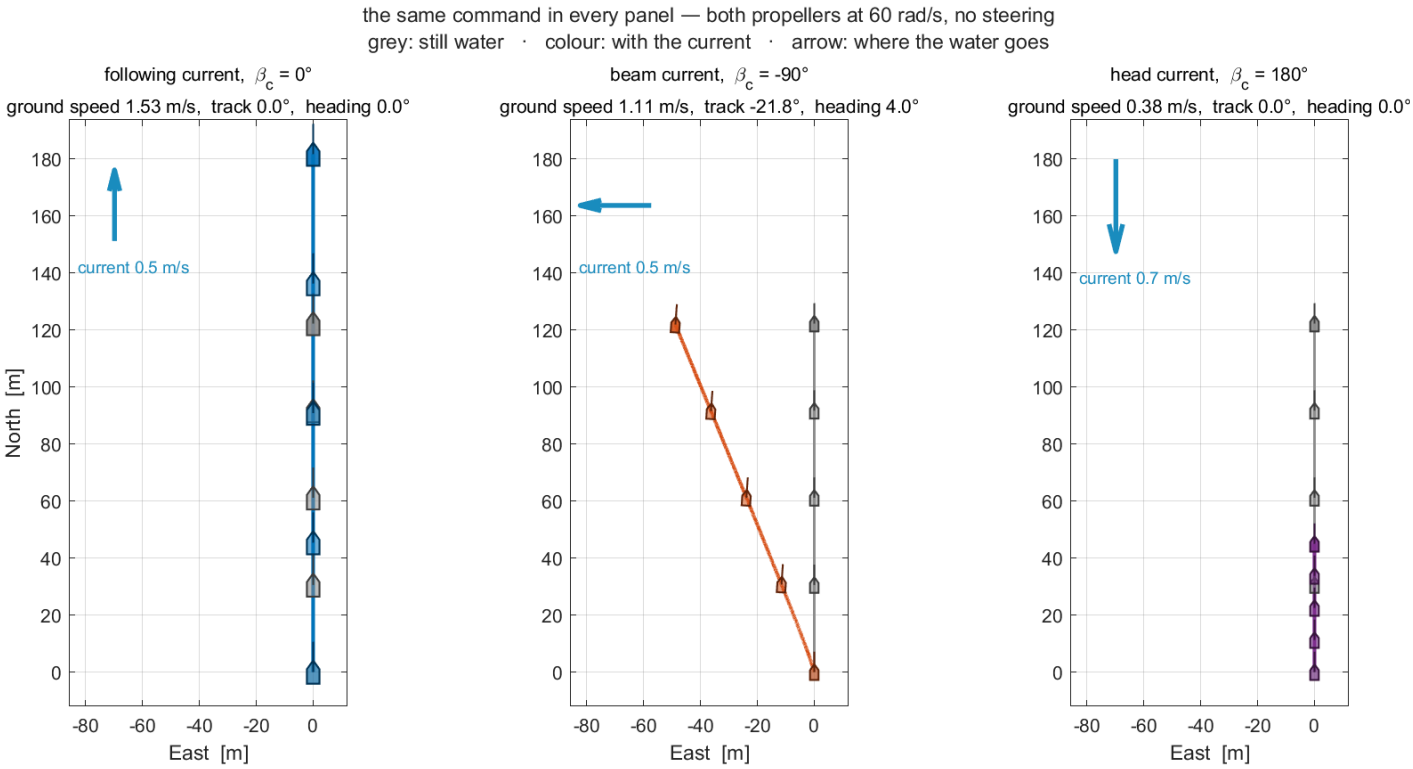

Reading the figure

Element	Meaning
three panels	one current each — following ($\beta_c = 0^\circ$), beam (90°), head (180°) — drawn on **identical axes**, so distances compare directly from panel to panel
grey track	still water, the same in every panel: the reference the coloured track is measured against
coloured track	the same command in that panel's current, over the same 120 s
blue arrow, top left	the current. It points where the water **goes**, and its length is to scale, 50 m per 1 m/s
hull outlines	the vessel along each track. In the beam panel the bow still points north while the track leans east
panel titles	ground speed, track angle and heading over the last fifth of the run — the rows of the table above

What the figure says

- **One command, four answers.** The shaft speeds are identical in all four runs and nothing steers. Every difference in the picture was produced by the water.
- **Fore-and-aft currents change only the speed.** In the left and right panels the coloured track lies on the grey one and runs due north; it only ends further along or further back, which is why the hull outlines are spaced

differently. A following current adds exactly $V_c = 0.5$ m/s to the ground speed and a head current takes the same amount away.

- **A beam current changes the direction.** The orange track leaves the meridian and ends about 50 m to the east — **while its bow still points north.** The track and the heading differ by 25.8°, and no force pushed the hull sideways.
- **Why that happens** is §1-13 in one line: `otter.m` computes every force from $\boldsymbol{\nu}_r = \boldsymbol{\nu} - \boldsymbol{\nu}_c$, the velocity through the water, but integrates the position with $\boldsymbol{\nu}$, the velocity over the ground. **Forces feel the water; the track is over the ground.**

> **This is the problem Week 5 exists to solve**
>
> A vessel that is steered perfectly and still ends up somewhere else cannot be fixed by steering harder. Week 5 §5-5 measures the resulting path error and removes it with an integral (ILOS).

Part 2 · Laboratory run order

The experiments of Part 1 are worked through in order; this table is the index of what was run, for repeating the week at home.

Experiment	Model	Script	What it shows
1-0	—	`W01_0_setup`	the parameters every block reads
1-3	none — the Command Window	—	the three properties of a rotation matrix
1-4	none — the Command Window	`W01_frames`	one velocity, read in two frames
1-5	none — the Command Window	—	the singularity of $\mathbf{T}_\Theta$, and the quaternion round trip
1-7	none — one call to `otter.m`	—	which three rows of $\dot{\boldsymbol{\nu}}$ survive
1-8	none — one call to `otter.m`	—	the last line checked against §1-4
1-9	`W01_openloop`	`W01_1_build_openloop`	the model read block by block
1-10a	`W01_interactive`	`W01_F_build_interactive`, `W01_F_button_check`	the vessel driven by buttons
1-10b	`W01_rc`	`W01_G_build_rc`, `W01_G_rc_check`	an RC transmitter and the allocation behind it
1-10c	`W01_rc_usb`	`W01_H_build_rc_usb`, `W01_H_usb_check`	a real transmitter over USB (optional hardware)
1-11	`W01_openloop`	`W01_C_terminal_speed`	the terminal speed predicted, then measured
1-12	`W01_openloop`	`W01_D_the_manoeuvre`	one manoeuvre, and the sway it produces
1-13	`W01_current`	`W01_E_build_current`, `W01_E_current_run`	the same command in four currents

- Experiments 1-3 to 1-8 are short calculations: a few lines in the Command Window, no model, no figure saved.
- Experiments 1-11 and 1-12 share `W01_openloop` because they ask two questions of **one** open-loop run — the speed along the leg, and the sway in the turn. Every other experiment of the course has a model to itself.

Summary

Week Summary

Step	What was done	How it was verified
1	Identified the twelve states and their frames	listed against `otter.m` and the selector blocks
2	Related Euler angles to the unit quaternion	round trip to 6.4×10^{-15} deg; `Rquat` against `Rzyx` to 2.2×10^{-16}
3	Reduced the 6-DOF equation to first-order surge	$T_u = 1.1025$ s against 1.1057 s measured from the plant
4	Predicted terminal speed before simulating	four commands, agreement to four decimals
5	Ran a port-then-starboard manoeuvre with both propellers ahead	heading changed -70.2° then $+70.6^\circ$, symmetric to 0.41°
6	Separated sway force from sway velocity, and derived the Coriolis term	$Y = 0$ exactly; $M_{11}ur = -3.4980$ N against $Y_{cf} = -3.4980$ N in the steady turn
7	Drove the vessel with buttons, at real time, from Simulink alone	AHEAD 1.0286 m/s and ASTERN -0.5983 m/s, both equal to the hand prediction
8	Drove it with an RC transmitter through a control allocation	$\tau_a = \tau_d$ inside the attainable set; $u = X_a/\lvert X_u \rvert$ to four decimals; Mode 1 and Mode 2 logs identical
9	Replaced the on-screen transmitter by a USB transmitter	a fake transmitter reproduces case 7 of Experiment 1-10b exactly for AETR, TAER and an inverted throttle axis; the physical device is checked on first connection

- Rows 2, 3 and 6 are reproduced by `_tools/verify_w01_theory.m`.

Progress Check

> **★ Minimum condition for following Week 3**

Theory

- [ ] Able to state which of the twelve states are expressed in $\{b\}$ and which in $\{n\}$
- [ ] Able to write $\dot{\boldsymbol{\eta}} = \mathbf{J}_\Theta(\boldsymbol{\eta})\boldsymbol{\nu}$ and say why $\mathbf{T}_\Theta$ is not a rotation matrix
- [ ] Able to convert $\boldsymbol{\Theta}$ to $\mathbf{q}$ and back with `euler2q` and `q2euler`, and to say why $\dot{\mathbf{q}} = \mathbf{T}_q(\mathbf{q})\boldsymbol{\omega}$ has no singularity while the conversion back to Euler angles does
- [ ] Able to derive the first-order surge model from row 1 of the 6-DOF equation, naming each dropped term
- [ ] Able to show that the sway Coriolis coefficient is M_{11}, and which part of it comes from $\mathbf{C}_{RB}$ and which from $\mathbf{C}_A$
- [ ] Able to compute u_{ss} for a given n without running a simulation
- [ ] Able to explain why $Y = 0$ while $v \neq 0$ during a turn, and why v reverses sign between a port and a starboard turn

Laboratory

- [ ] `W01_0_setup` printed `rank(B) = 2`
- [ ] `W01_1_build_openloop` regenerated the model after it was deliberately broken
- [ ] Sections C, D and E were run in that order and together wrote six result PNG files into `W01_simulink/img/`
- [ ] `W01_interactive.slx` was opened and run from Simulink alone, with each of the five buttons used at least once
- [ ] `W01_rc.slx` was driven in both modes, and the demanded force was pushed outside the attainable set at least once

Recorded observations

- [ ] The settled u for $n = 60$ recorded to four decimal places
- [ ] The crab angle β recorded in **both** turns, with its sign
- [ ] The heading change across each turn recorded, and the two compared
- [ ] The live view watched through both turns, and the direction the hull **pointed** noted against the direction it **moved**

In-class laboratory — build the open loop by hand

The second hour of the Week 1 session is spent building, in Simulink, the model this lecture built from a script. Three problems, one hour, with a checker that compares the result against the numbers measured above.

```
cd lectures/W01_simulink/problems
W01_P1_start                % creates W01_P1.slx — the hull, and nothing else
W01_check(1)                % run this whenever, as often as needed
```

	Problem	Time	The number it must reproduce
1	The open loop — a constant command into the hull, a log coming out	25 min	terminal $u = 1.0286$ m/s, and $v = r = 0$
2	The manoeuvre — replace the constant by a schedule of time	20 min	port turn $r = -2.2942$ deg/s, heading change -70.2 deg
3	The current — work out why **nothing** needs to be added	15 min	drift 25.809 deg, ground speed 1.1091 m/s

- The full problem sheet is `W01_simulink/problems/README.md`, and reference answers are in `W01_simulink/solutions/`.
- The hull is provided because integrating `otter.m` is not the subject of this week. Everything else — the command, the wiring, the logging — is built by hand.
- **There is no single correct diagram.** The checker tests the physics. A model that reproduces the measured numbers is doing what the lecture's model does, whatever it looks like on the canvas.

Assignment 1

- **Due**: before the Week 3 session
- **Submit**: the modified `W01_0_setup.m`, the numbers requested below, and a short analysis

① Requirements

1. Derive the terminal surge speed relation $u_{ss}(n)$ from the surge equation, showing each step.
2. Determine, by hand, the shaft speed $n^{\star}$ (equal on both propellers) that produces a terminal speed of exactly 1.500 m/s.
3. Determine, by hand, the differential $dn^{\star}$ that produces a commanded yaw moment of exactly $N = 5.000$ N·m at $n_0 = 60$ rad/s, using $N = y_{\text{pont}}(T_L - T_R)$ with $y_{\text{pont}} = 0.395$ m and $T = k_{\text{pos}} n|n|$. Both propellers must stay ahead — state the resulting n_L and n_R and confirm both are positive.

② Verification — mandatory

> **★ A claim is not a result. Numbers are required, with the averaging window stated**

1. Run the simulation at $n^{\star}$ from ①.2 with `dn = 0` and report the measured settled u to four decimal places, together with the time window over which it was averaged.
2. Run the manoeuvre with $dn^{\star}$ from ①.3 and report, for **both** turns, the settled u, v, r and β, each with its averaging window.
3. Report the heading change produced by each turn. State whether the two are equal in magnitude, and to how many degrees.
4. Sweep dn over at least six values from 0 to 12 rad/s and produce one figure of settled yaw rate r against dn. Overlay the prediction obtained by balancing the commanded N against the **linear** yaw damping N_r alone.

③ Analysis (5–10 lines)

- The figure in ②.4 will not be a straight line, and the linear prediction will sit above the measurement at large dn. Identify the term in `otter.m` responsible, and state what it implies for a heading controller tuned only at small dn.
- State also why v reverses sign between the two turns while Y stays exactly zero in both.

Grading

Criterion	Weight
Derivation in ① is complete and correct	20%
Verification performed and numbers reported with windows stated	40%
Figure in ②.4 is correct and readable	15%
Analysis in ③ identifies the mechanism	25%

Troubleshooting

Symptom	Cause	Fix
`Undefined function 'otter'`	MSS is not on the path	run `W01_0_setup`, which adds `Tools/MSS` with `genpath`
`Undefined variable 'n0'` when pressing Run in Simulink	the model reads base-workspace variables that the setup script defines	run `W01_0_setup` first, or run any section script, which sets its own variables
The vessel turns right when the port turn was expected	the yaw moment is $N = y_{\text{pont}}(T_L - T_R)$, so slowing the **right** propeller turns the bow right	for a port turn slow the **left** propeller: $n = [n_0 - dn;\ n_0 + dn]$
The exported block diagram is thousands of pixels wide	an annotation was edited into one long line; Simulink does not wrap annotation text	keep the manual line breaks in `W01_1_build_openloop.m`
Terminal speed differs from the prediction by a few percent	the simulation was stopped before the transient finished	`T_final` must exceed roughly $5T_u \approx 5.5$ s; the default is 120 s
Heading reads more than 360°	ψ is an unwrapped integral of r and nothing in this model wraps it	expected. Week 4 introduces the wrapping and shows what happens without it
The run is far slower than the simulated time	the live view is redrawing too often	raise `animate_every` in `W01_0_setup.m`, or set `animate = 0`
The vessel leaves the live view and disappears	the axes are fixed before the run and do not auto-range	widen `track_Nmin` … `track_Emax` in `W01_0_setup.m`
In `W01_rc.slx` the vessel does not move although a stick was moved	the stick moved was not the throttle of the selected mode, or it is still inside the neutral zone 50 ± 3	check MODE: the throttle is `LY` in Mode 2 and `RY` in Mode 1
`W01_rc_usb.slx`: START opens *No transmitter on joystick 1*	the transmitter is not connected, is not in its USB joystick mode, or is joystick 2 on this PC	connect it in joystick mode; with more than one game controller run `W01_H_usb_setup(2)`
`W01_rc_usb.slx`: START opens *Throttle is not at the centre*	the throttle check of START	centre the throttle stick, then START again
`W01_rc_usb.slx`: throttle forward drives astern, or a stick does nothing	the model's axis settings do not match this transmitter	click CALIBRATE
In `W01_rc.slx` the vessel keeps turning after the rudder was let go	a Dashboard slider has no spring; it stays where it was left	click CENTRE, which returns every channel except the throttle to 50
The hull in the live view turns the wrong way	the two signs in the NED rotation of the silhouette were swapped	it is $N = N_0 + x_b\cos\psi - y_b\sin\psi$ and $E = E_0 + x_b\sin\psi + y_b\cos\psi$, the planar block of $\mathbf{R}_b^n$. See `_tools/draw_ship.m`

References

Primary

- Fossen, T. I. *Handbook of Marine Craft Hydrodynamics and Motion Control*, 2nd ed. Chapters 2 (kinematics), 3 (rigid-body dynamics) and 6 (manoeuvring models, including the cross-flow drag model). §2.2.2 unit quaternions, §2.2.3 quaternions from Euler angles, §2.2.4 Euler angles from quaternions, §11.2 control allocation (Experiment 1-10b). The section numbers were checked against the 1st edition and the 2020 manuscript of the 2nd edition, because the printed 2nd edition available to this course is a scan without searchable text.
- MSS toolbox, `Tools/MSS/VESSELS/otter.m` — the plant used unchanged in this week's model. Line numbers in this document refer to the 2021 release that `mss_path` puts on the path.
- MSS toolbox, `Tools/MSS/GNC/` — `Rzyx`, `Tzyx`, `Smtrx`, `m2c`, `crossFlowDrag`, called internally by `otter.m`.
- MSS toolbox, `Tools/MSS/GNC/` — `euler2q`, `q2euler`, `Rquat`, `Tquat`, `quatprod`, `quatern` for §1-5; `LIBRARY/kinematics/` in the 2022 and later releases. MIT License, © Thor I. Fossen.

Course files

- `W01_simulink/W01_1_build_openloop.m`, `W01_E_build_current.m` — the two model generators
- `W01_simulink/W01_0_setup.m` — the parameters
- `W01_simulink/W01_C_terminal_speed.m` · `W01_D_the_manoeuvre.m` · `W01_E_current_run.m` — one script per laboratory section
- `W01_simulink/W01_vars.m` · `W01_read.m` — the same numbers as a struct, and the log with named fields
- `W01_simulink/W01_animate.m` — the live view, called by the model's `Animate` block
- `W01_simulink/W01_F_build_interactive.m` · `W01_interactive.slx` · `W01i_animate.m` · `W01i_control.m` · `W01_F_button_check.m` — the model driven by buttons, its live view with a following window and a shaft-speed panel, the handler of its START and STOP buttons, and the headless check behind the table of Experiment 1-10a
- `W01_simulink/W01_G_build_rc.m` · `W01_rc.slx` · `W01rc_animate.m` · `W01rc_control.m` · `W01_G_rc_check.m` — the model driven by an RC transmitter through a control allocation, its live view with the attainable set, the handler of its START, STOP and CENTRE buttons, and the headless check behind the table and figure of Experiment 1-10b
- `W01_simulink/W01_H_build_rc_usb.m` · `W01_rc_usb.slx` · `W01_H_usb_setup.m` · `W01rc_usb_axis.m` · `W01_H_usb_check.m` — the same chain read from a USB transmitter, its calibration, the axis finder the calibration uses, and the check with a fake transmitter behind the table of Experiment 1-10c
- `_tools/hmi_bind.m`, `_tools/image_button.m` — a Dashboard block bound to a Constant, and a clickable button image on the canvas, used by the models of Experiment 1-10a and Experiment 1-10b
- `W01_simulink/W01_plot.m` — the summary figure, called by the models' `StopFcn`; `W01_cur_plot.m` is the same for the current model
- `_tools/otter_config.m`, `_tools/otter_B.m` — the actuator configuration and the column rule
- `_tools/verify_w01_theory.m` — rebuilds $\mathbf{M}$ and $\mathbf{C}$ from `otter.m` and reproduces every number of the quaternion part of §1-5, of §1-11 and of §1-12
- `_tools/draw_ship.m`, `_tools/track_ships.m`, `_tools/ship_marks.m` — the hull silhouette drawn on every track in this course

Acknowledgement

- The hull polygon — rectangular stern closed by a triangular bow — follows `shipModel.m` (J. Hong, KRISO, 2022), used in the department's undergraduate guidance course.

Next Week

- **Week 2 — PID Control Fundamentals**
- Before the vessel is put under control, the three terms of a PID are taken apart on the simplest plant that can oscillate: one mass, one spring, one damper. Each term is measured on its own, then the three additions no real controller runs without — the derivative filter, a smooth setpoint, anti-windup — and a tuning order that can be followed step by step.
- Preparation: nothing from this week's models. Week 2 needs Simulink only; the MSS toolbox is not used.
- **Week 3 — Surge Speed Control** then closes the first loop on the Otter. Bring $T_u = 1.1025$ s and $K_u = 0.012894$ (m/s)/N from §1-11, and the derivation of $u_{ss}(n)$ from Assignment 1.

> **Appendix A1 is available but not required yet**
>
> The general rule that produces $\mathbf{B}$ for any thruster layout, together with the attainable control set and what actuation rank costs, is written up as **Appendix A1**. Weeks 3 and 4 quote its two results where they need them. It becomes required reading before Week 7.