U-BRACKET - CURRENT DIMENSIONED DRAWING

NIGHT LIGHT | Dimensions in mm | Nominal CAD dimensions | English project documentation

SECTION A-A - X/Z, Y = -20 (outside slot)

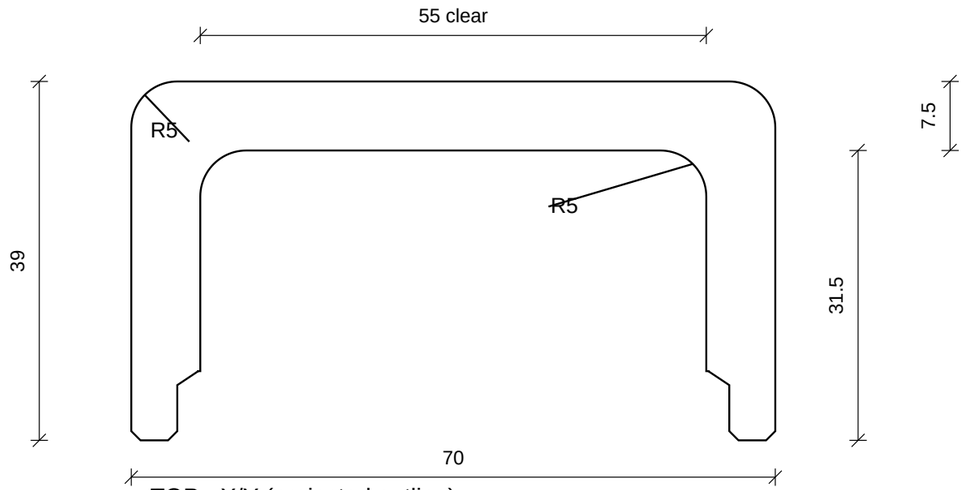

SIDE - Y/Z

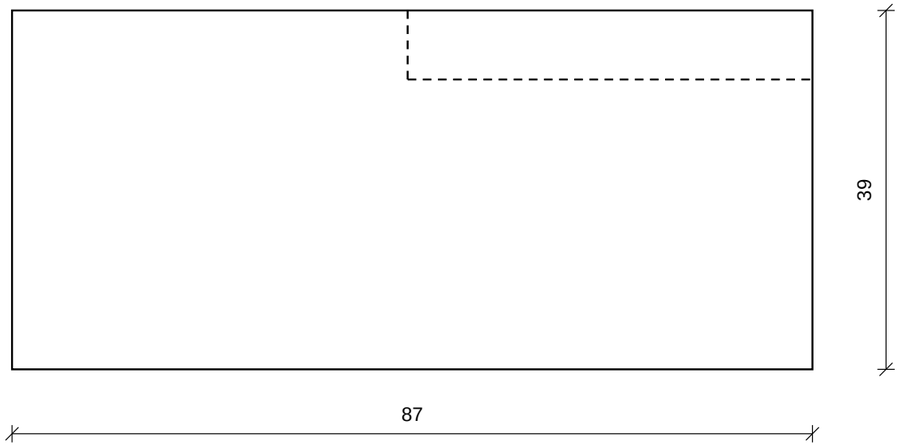

TOP - X/Y (projected outline)

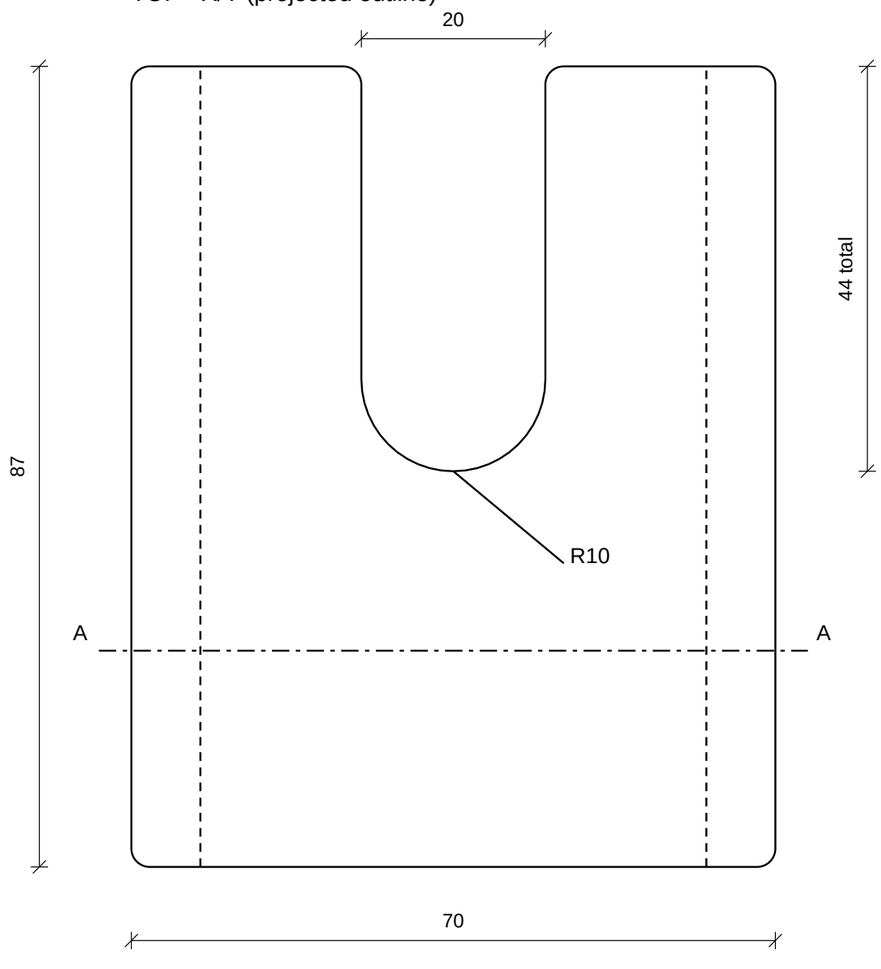

CURRENT FEATURES

Envelope: 70 wide x 87 deep x 39 high.

Interior: 55 wide; roof underside Z31.5.

Straight side walls / upper bridge: 7.5.

Upper inner and outer bends: R5 (X/Z section).

Four outer plan corners and slot entrances: R2.

Complete inner opening rim: R1, both ends.

Four lower longitudinal edges: 1 x 1, 45 deg.

Open slot: 20 wide x 44 total depth; end R10.

Construction geometry: schematic model only.

DRAWING CONVENTIONS

Section A-A shows the profile before end-edge fillets.

Thin hidden lines are simplified for legibility.

See sheet 2 for fillet and chamfer details.

Fit note: 55.5 body versus 55 opening gives

0.25 nominal interference per side above the relief.

U-BRACKET - EDGE AND SEAT DETAILS

NIGHT LIGHT | Dimensions in mm | Nominal CAD dimensions | English project documentation

DETAIL B - BOTTOM CHAMFERS

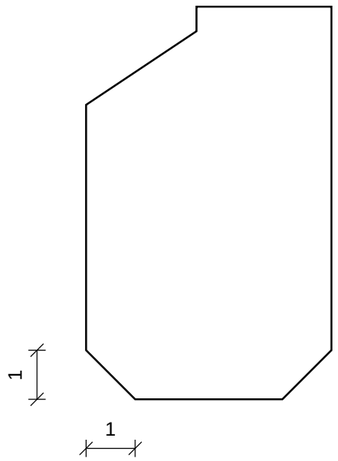

4 edges total: both lower edges of each leg.

1 x 1 mm at 45 deg, along the full depth.

DETAIL C - INNER RIM FILLET

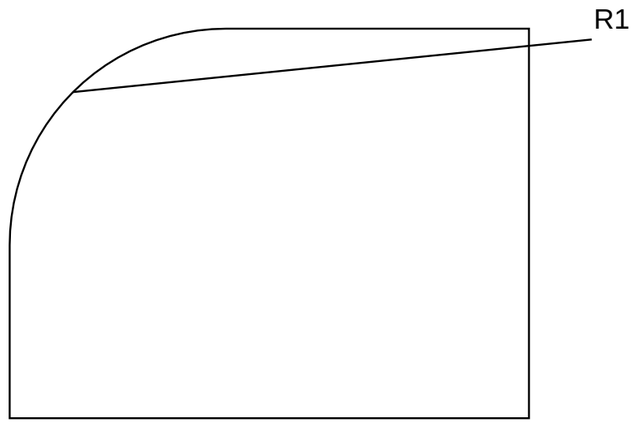

Apply around the complete inner opening at Y = +/-43.5.

Includes vertical walls, R5 upper arcs and base relief.

The 55 mm inner width applies away from the end fillets.

LOWER SEAT PROFILE

Baseline: Z0. Base relief: 60 wide up to Z6.

Shoulder transition: 2.25 horizontal x 1.5 vertical.

Nominal slope angle: 33.69 deg.

Body relief: 55.5 wide at Z7.5 to Z7.52.

The 0.02 mm shoulder lip is retained from the SCAD model.

RADIUS AND EDGE SCHEDULE

R5: inner and outer upper corners, both sides.

R2: four external corners in plan.

R2: both corners at the open slot entrance.

R1: full front and rear inner opening rims.

R10: closed semicircular end of the 20 mm slot.

Details are enlarged; main views on sheet 1 are 1.5:1.