

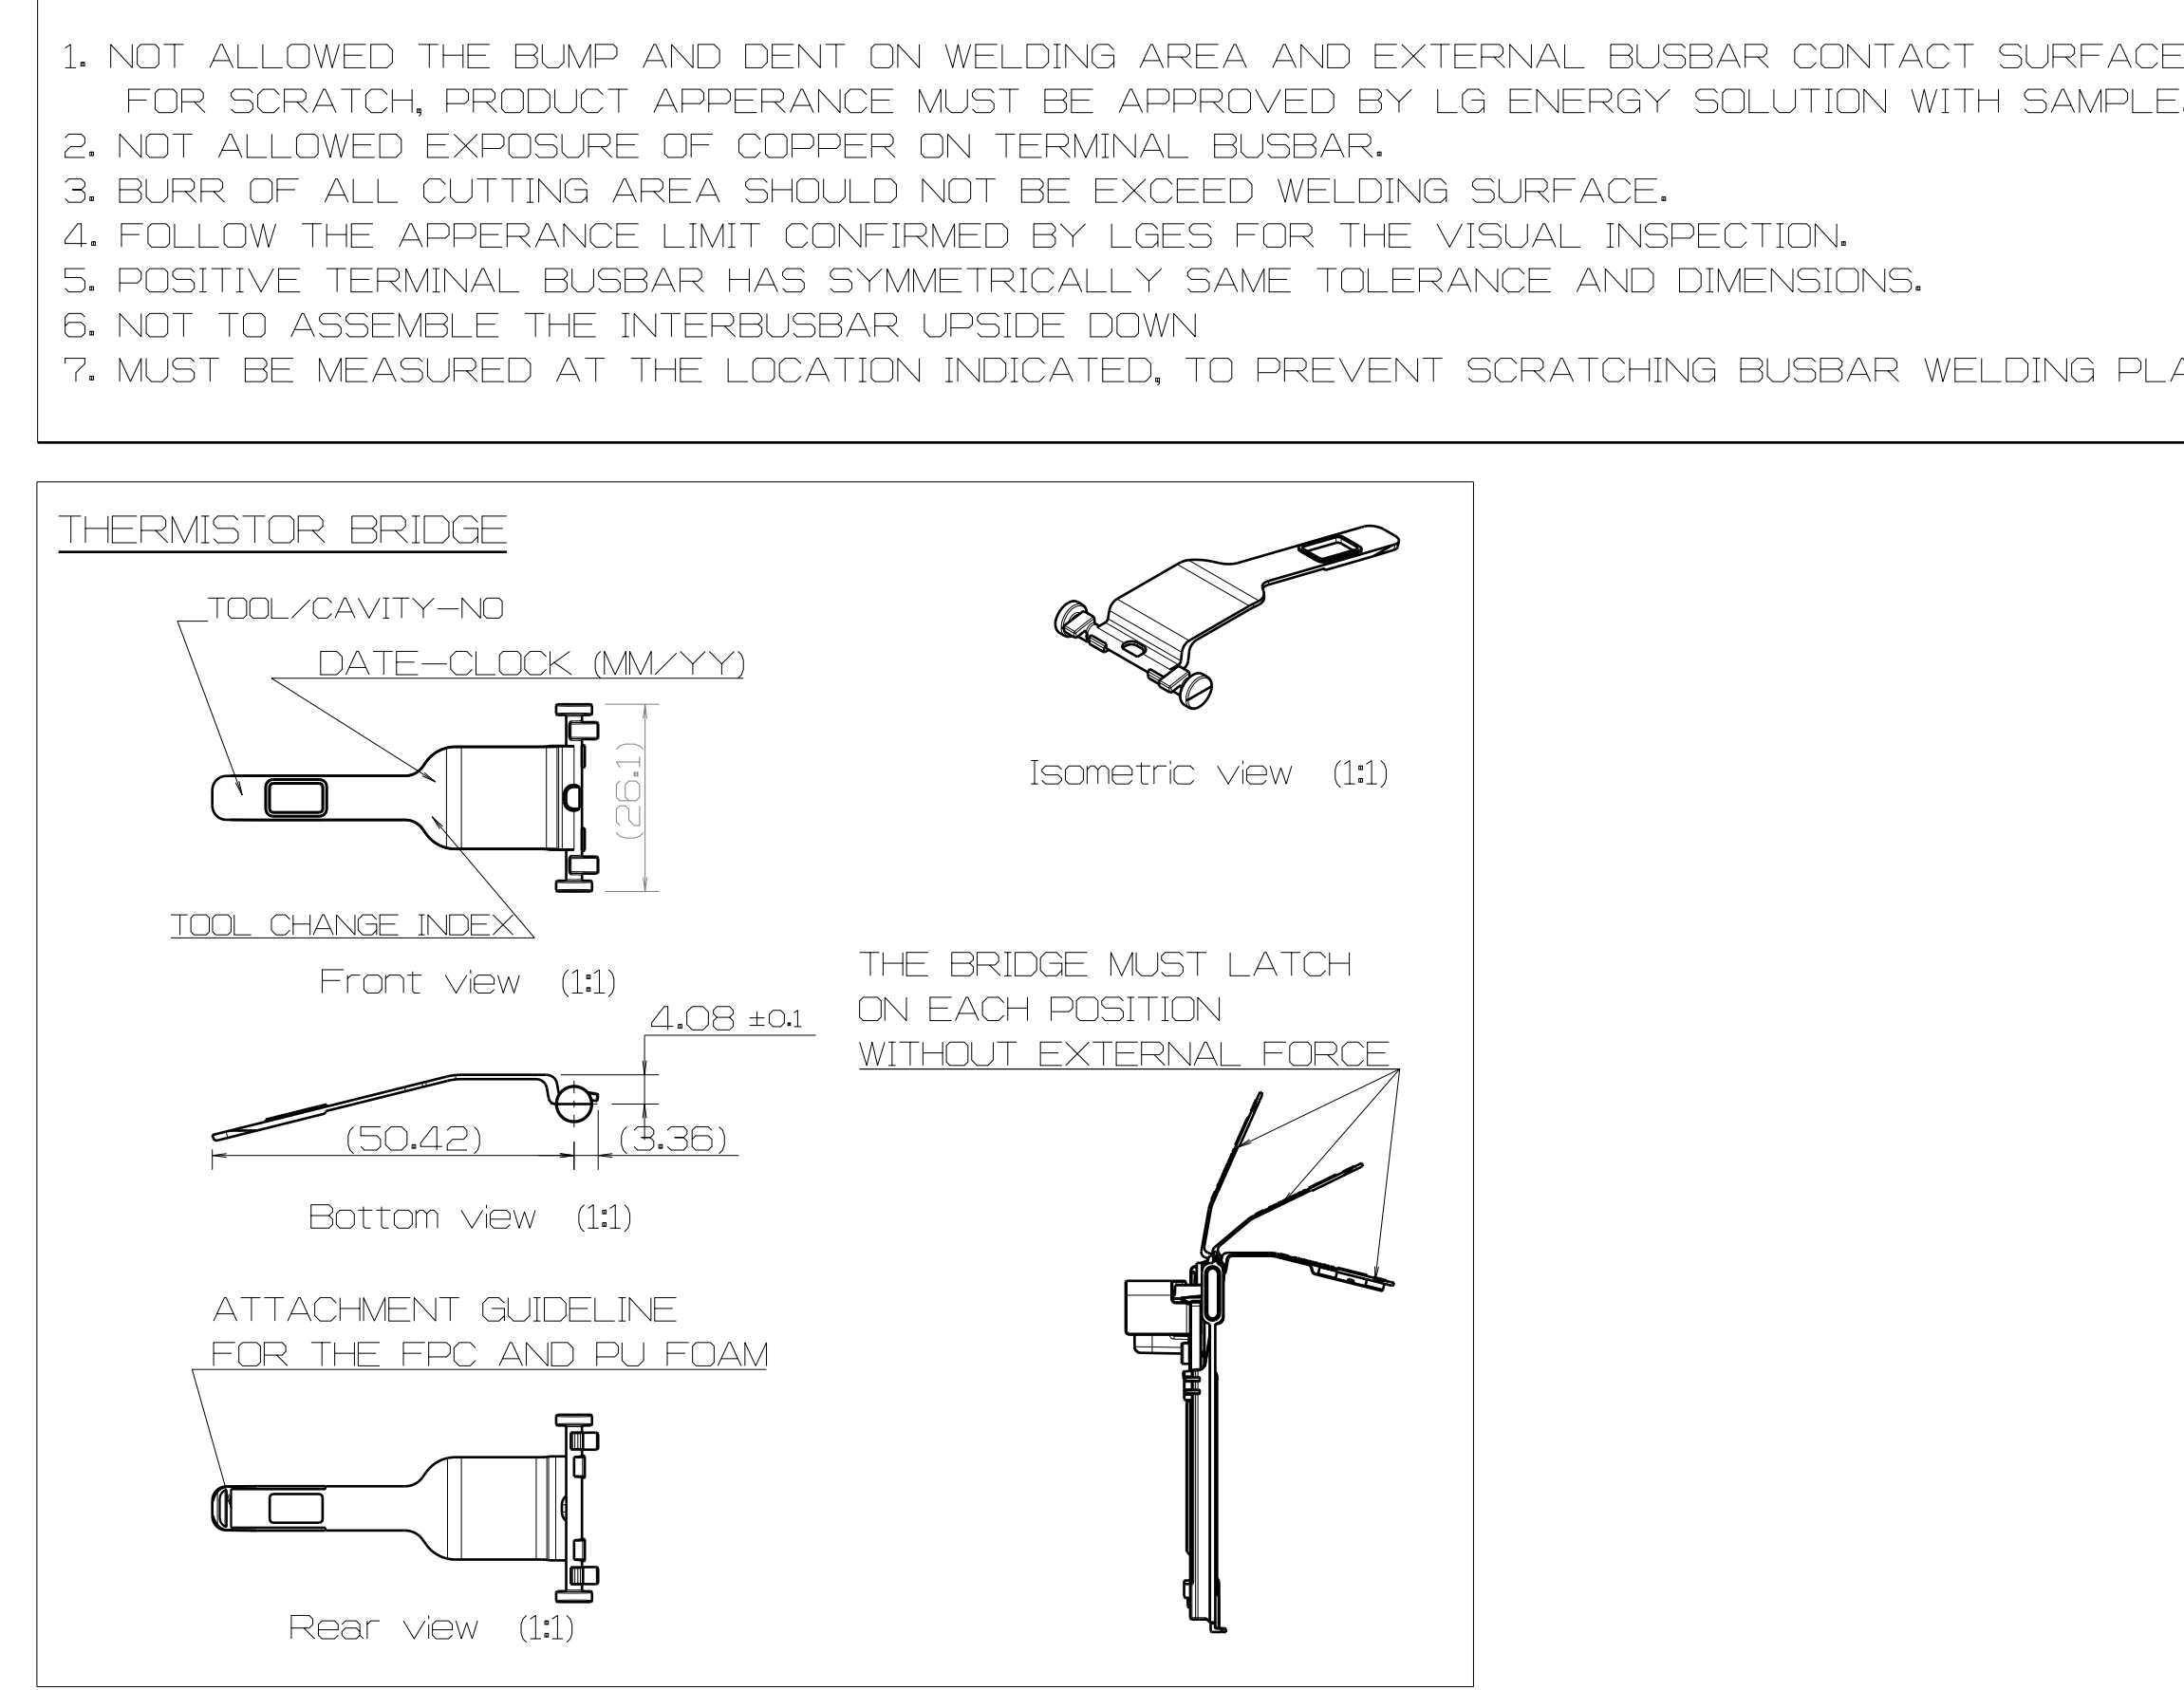
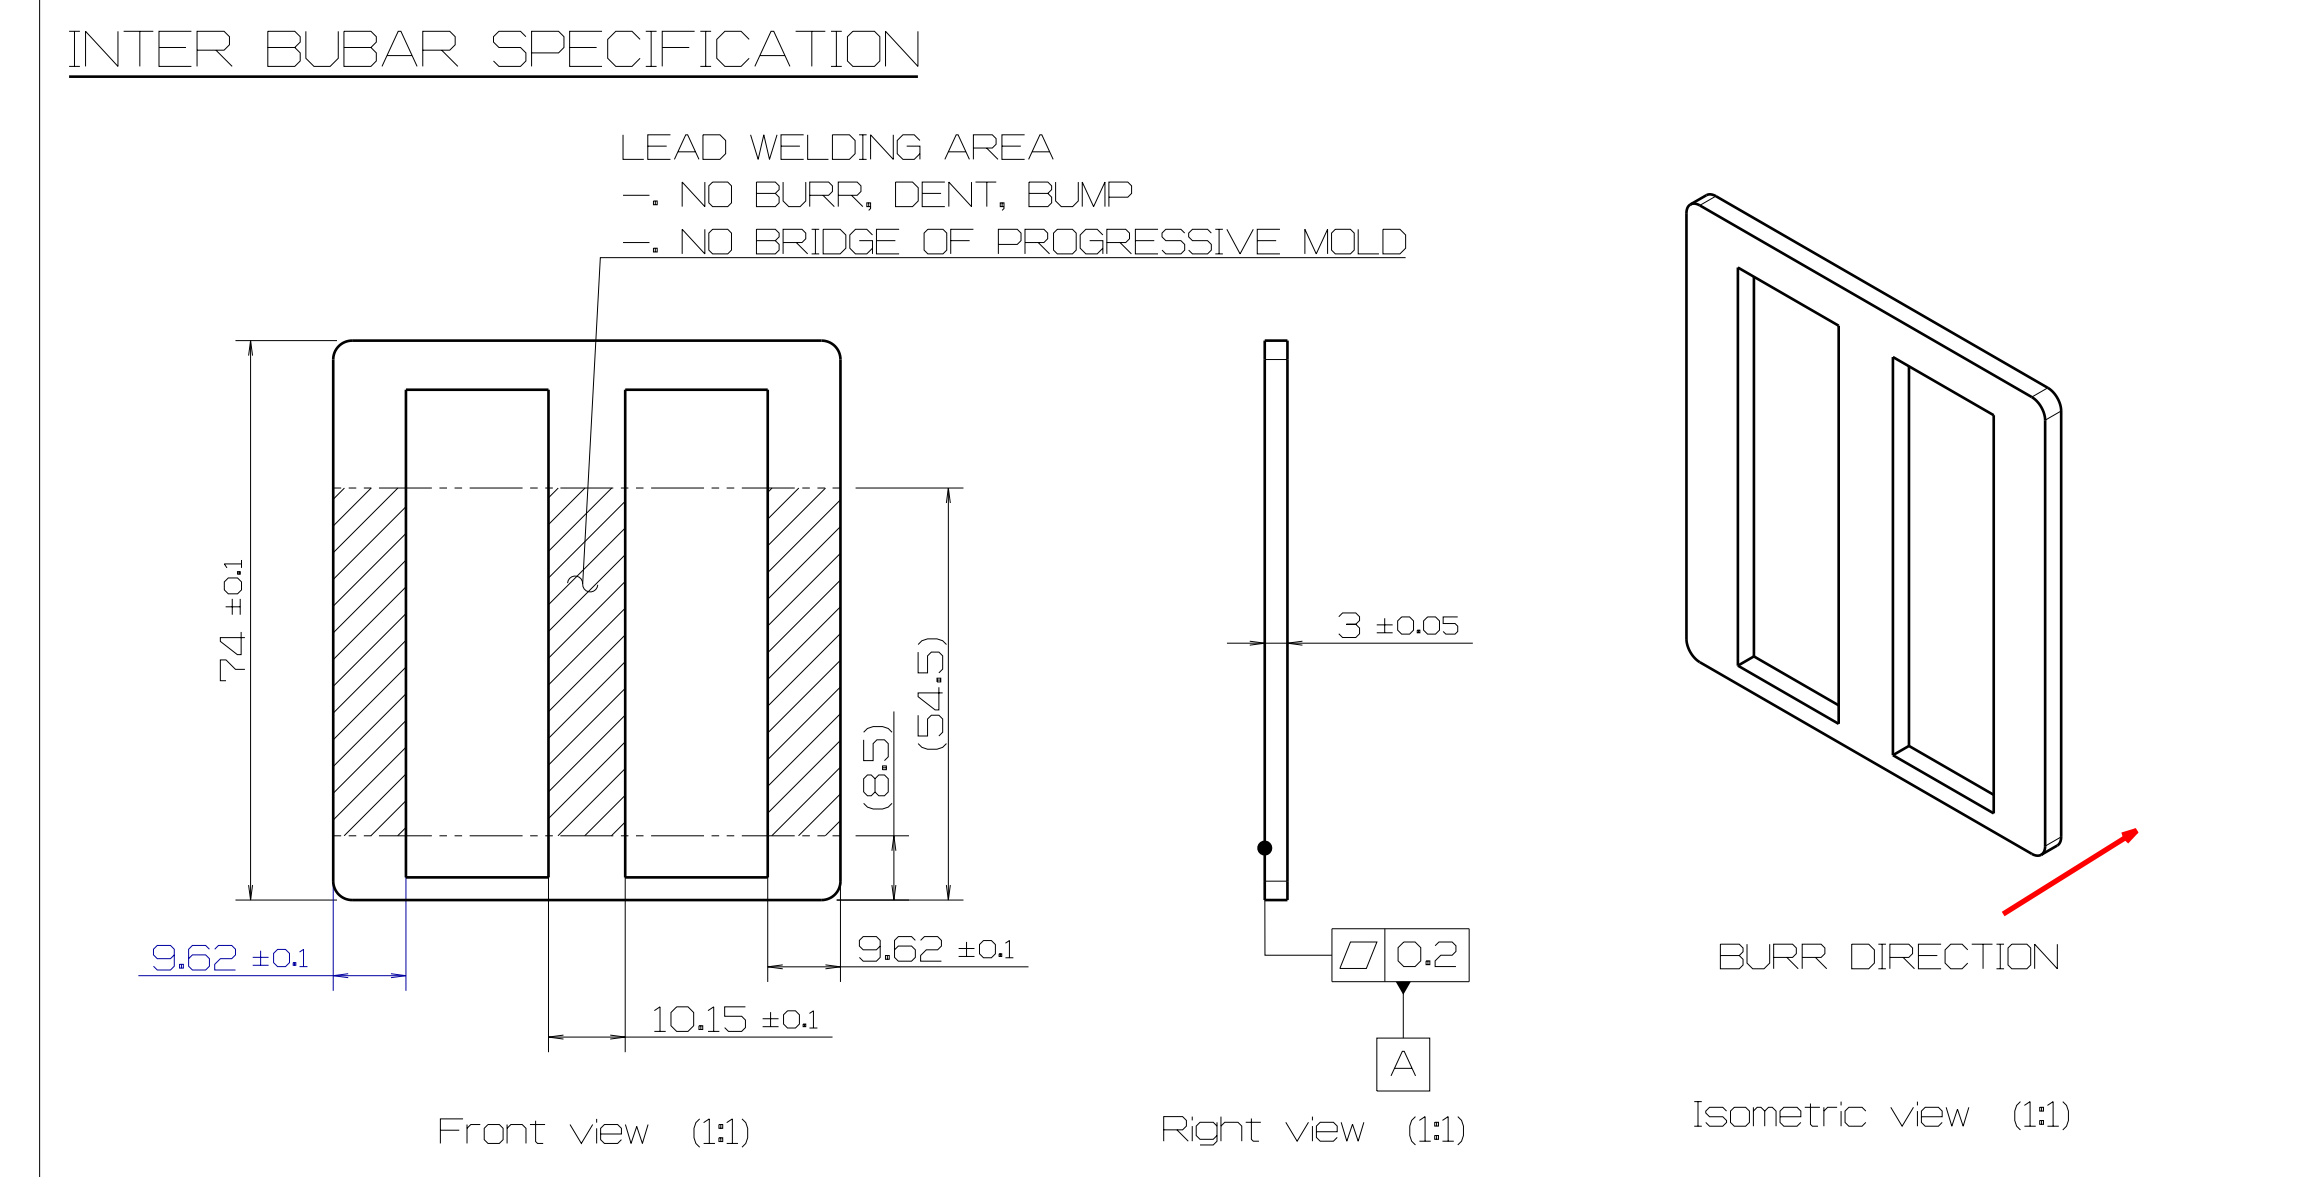
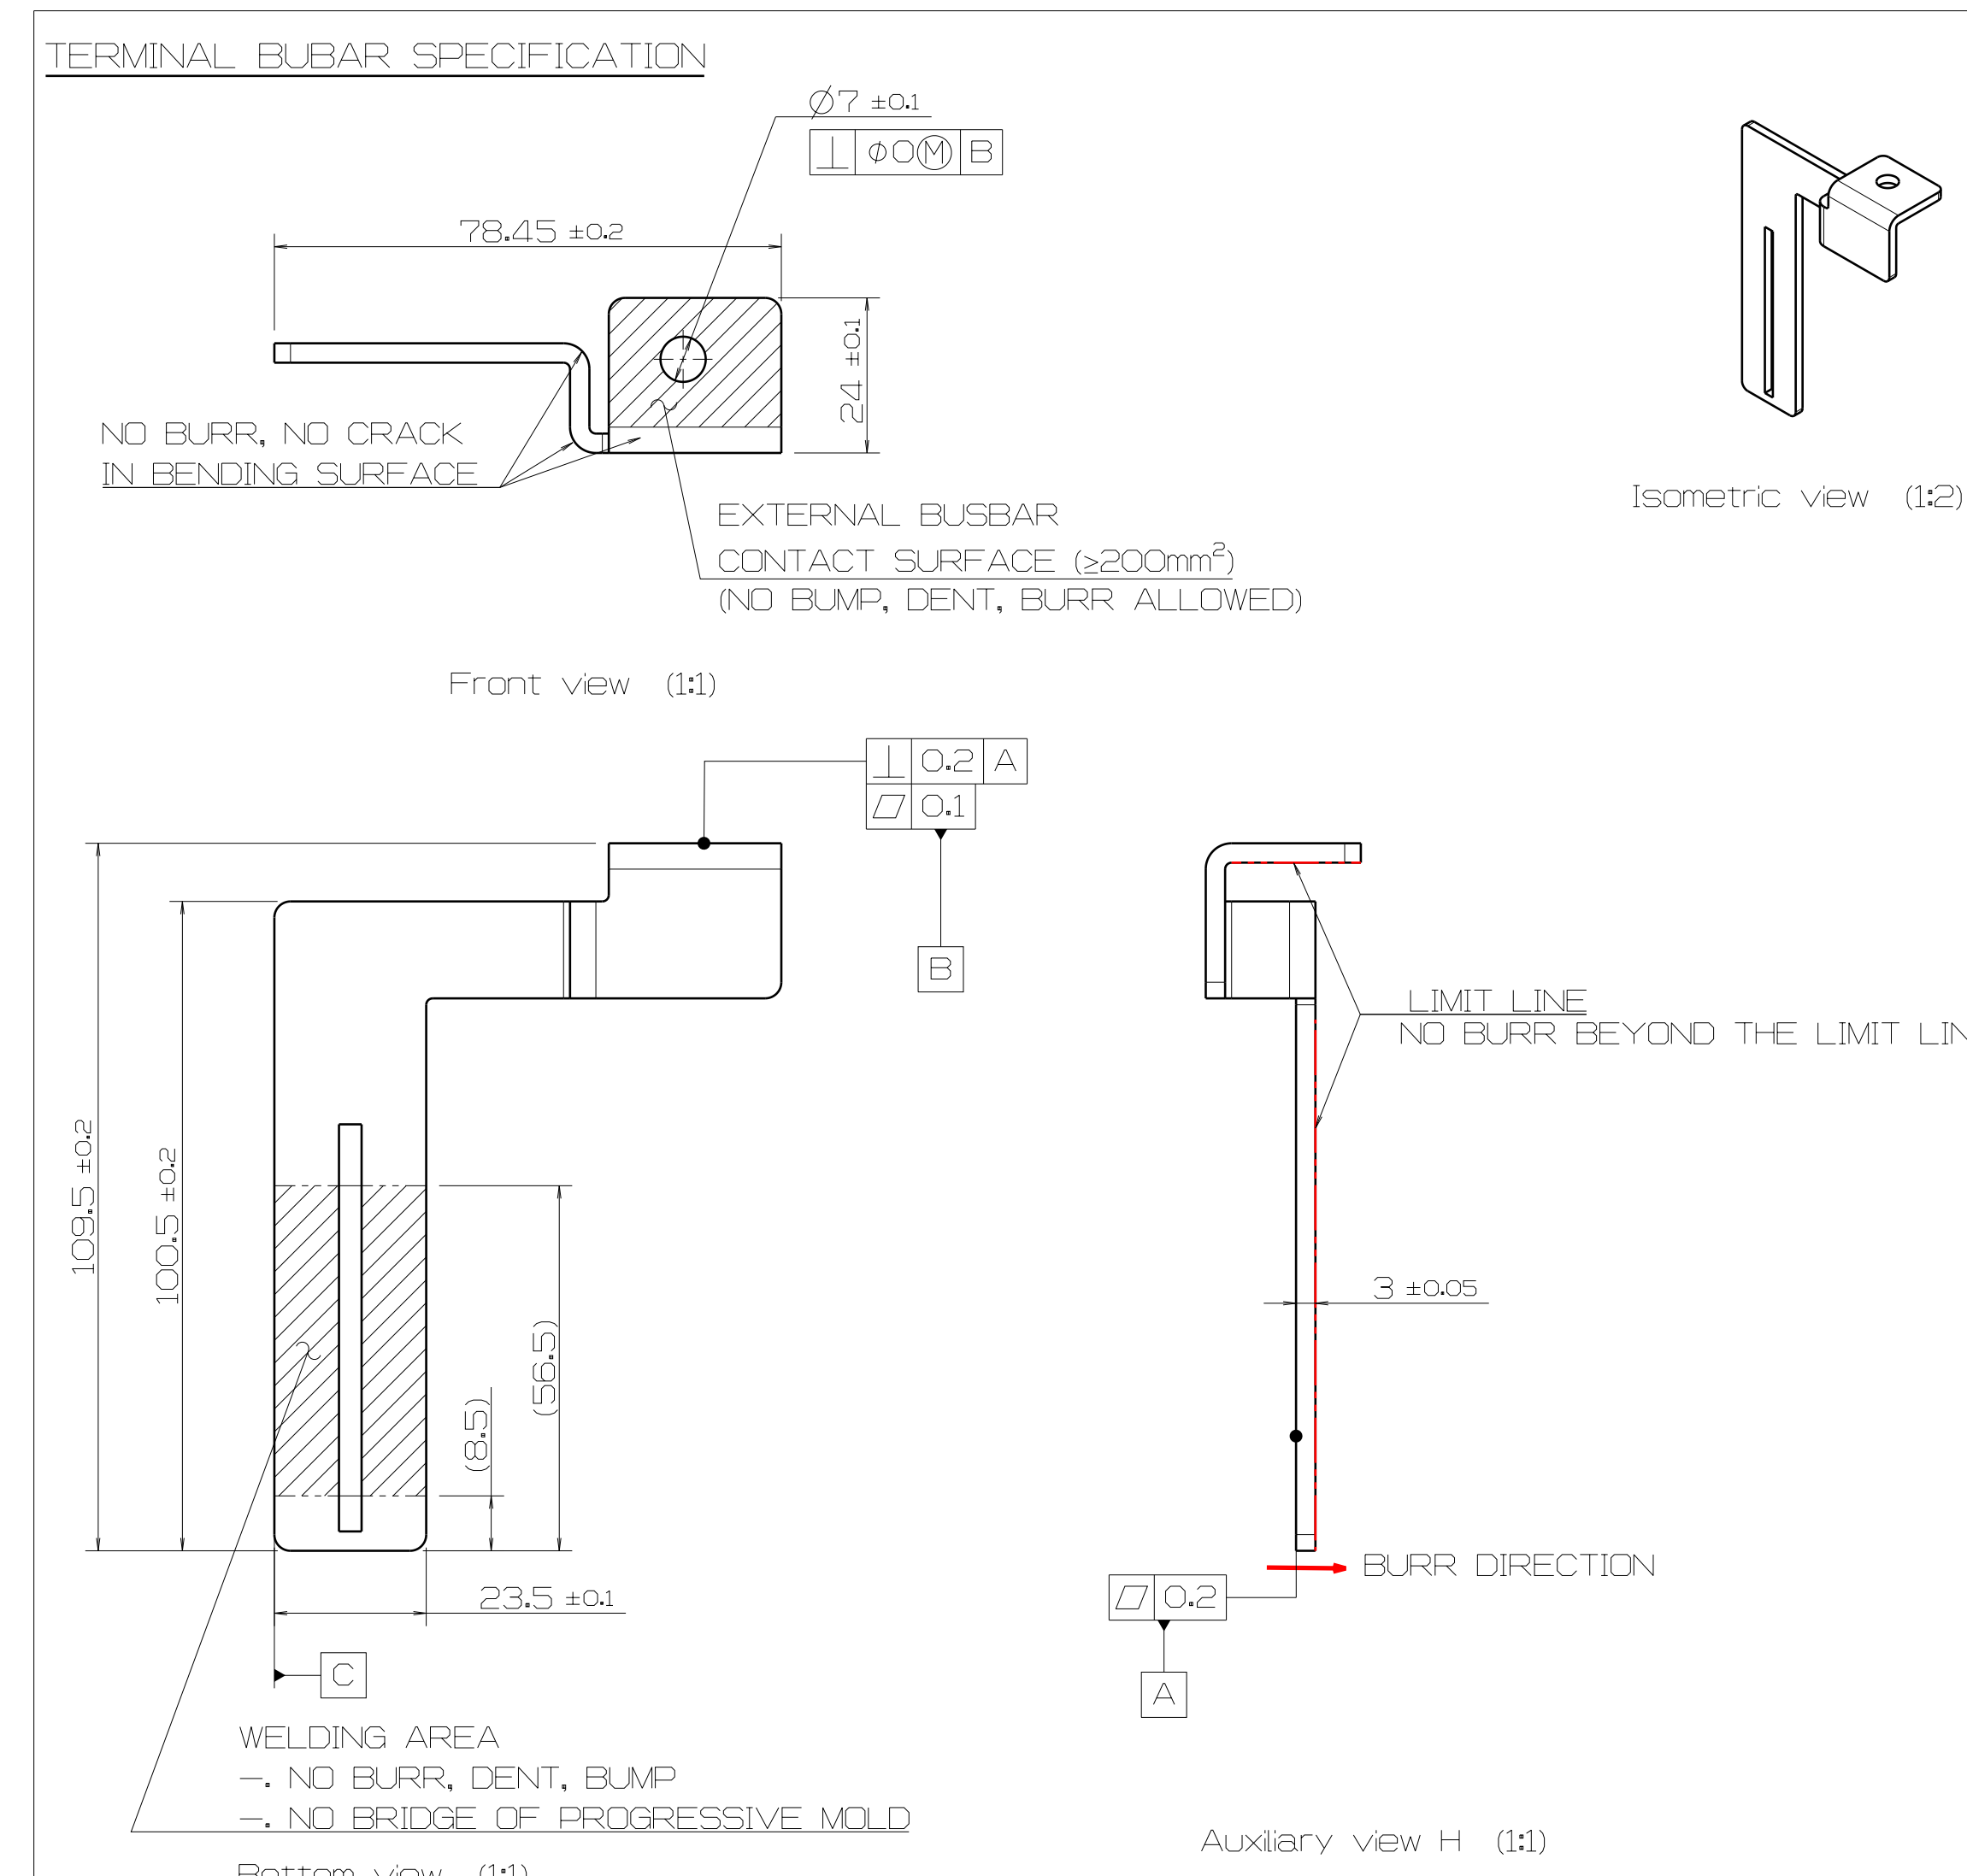



LG Energy Solution
Proprietary Confidential

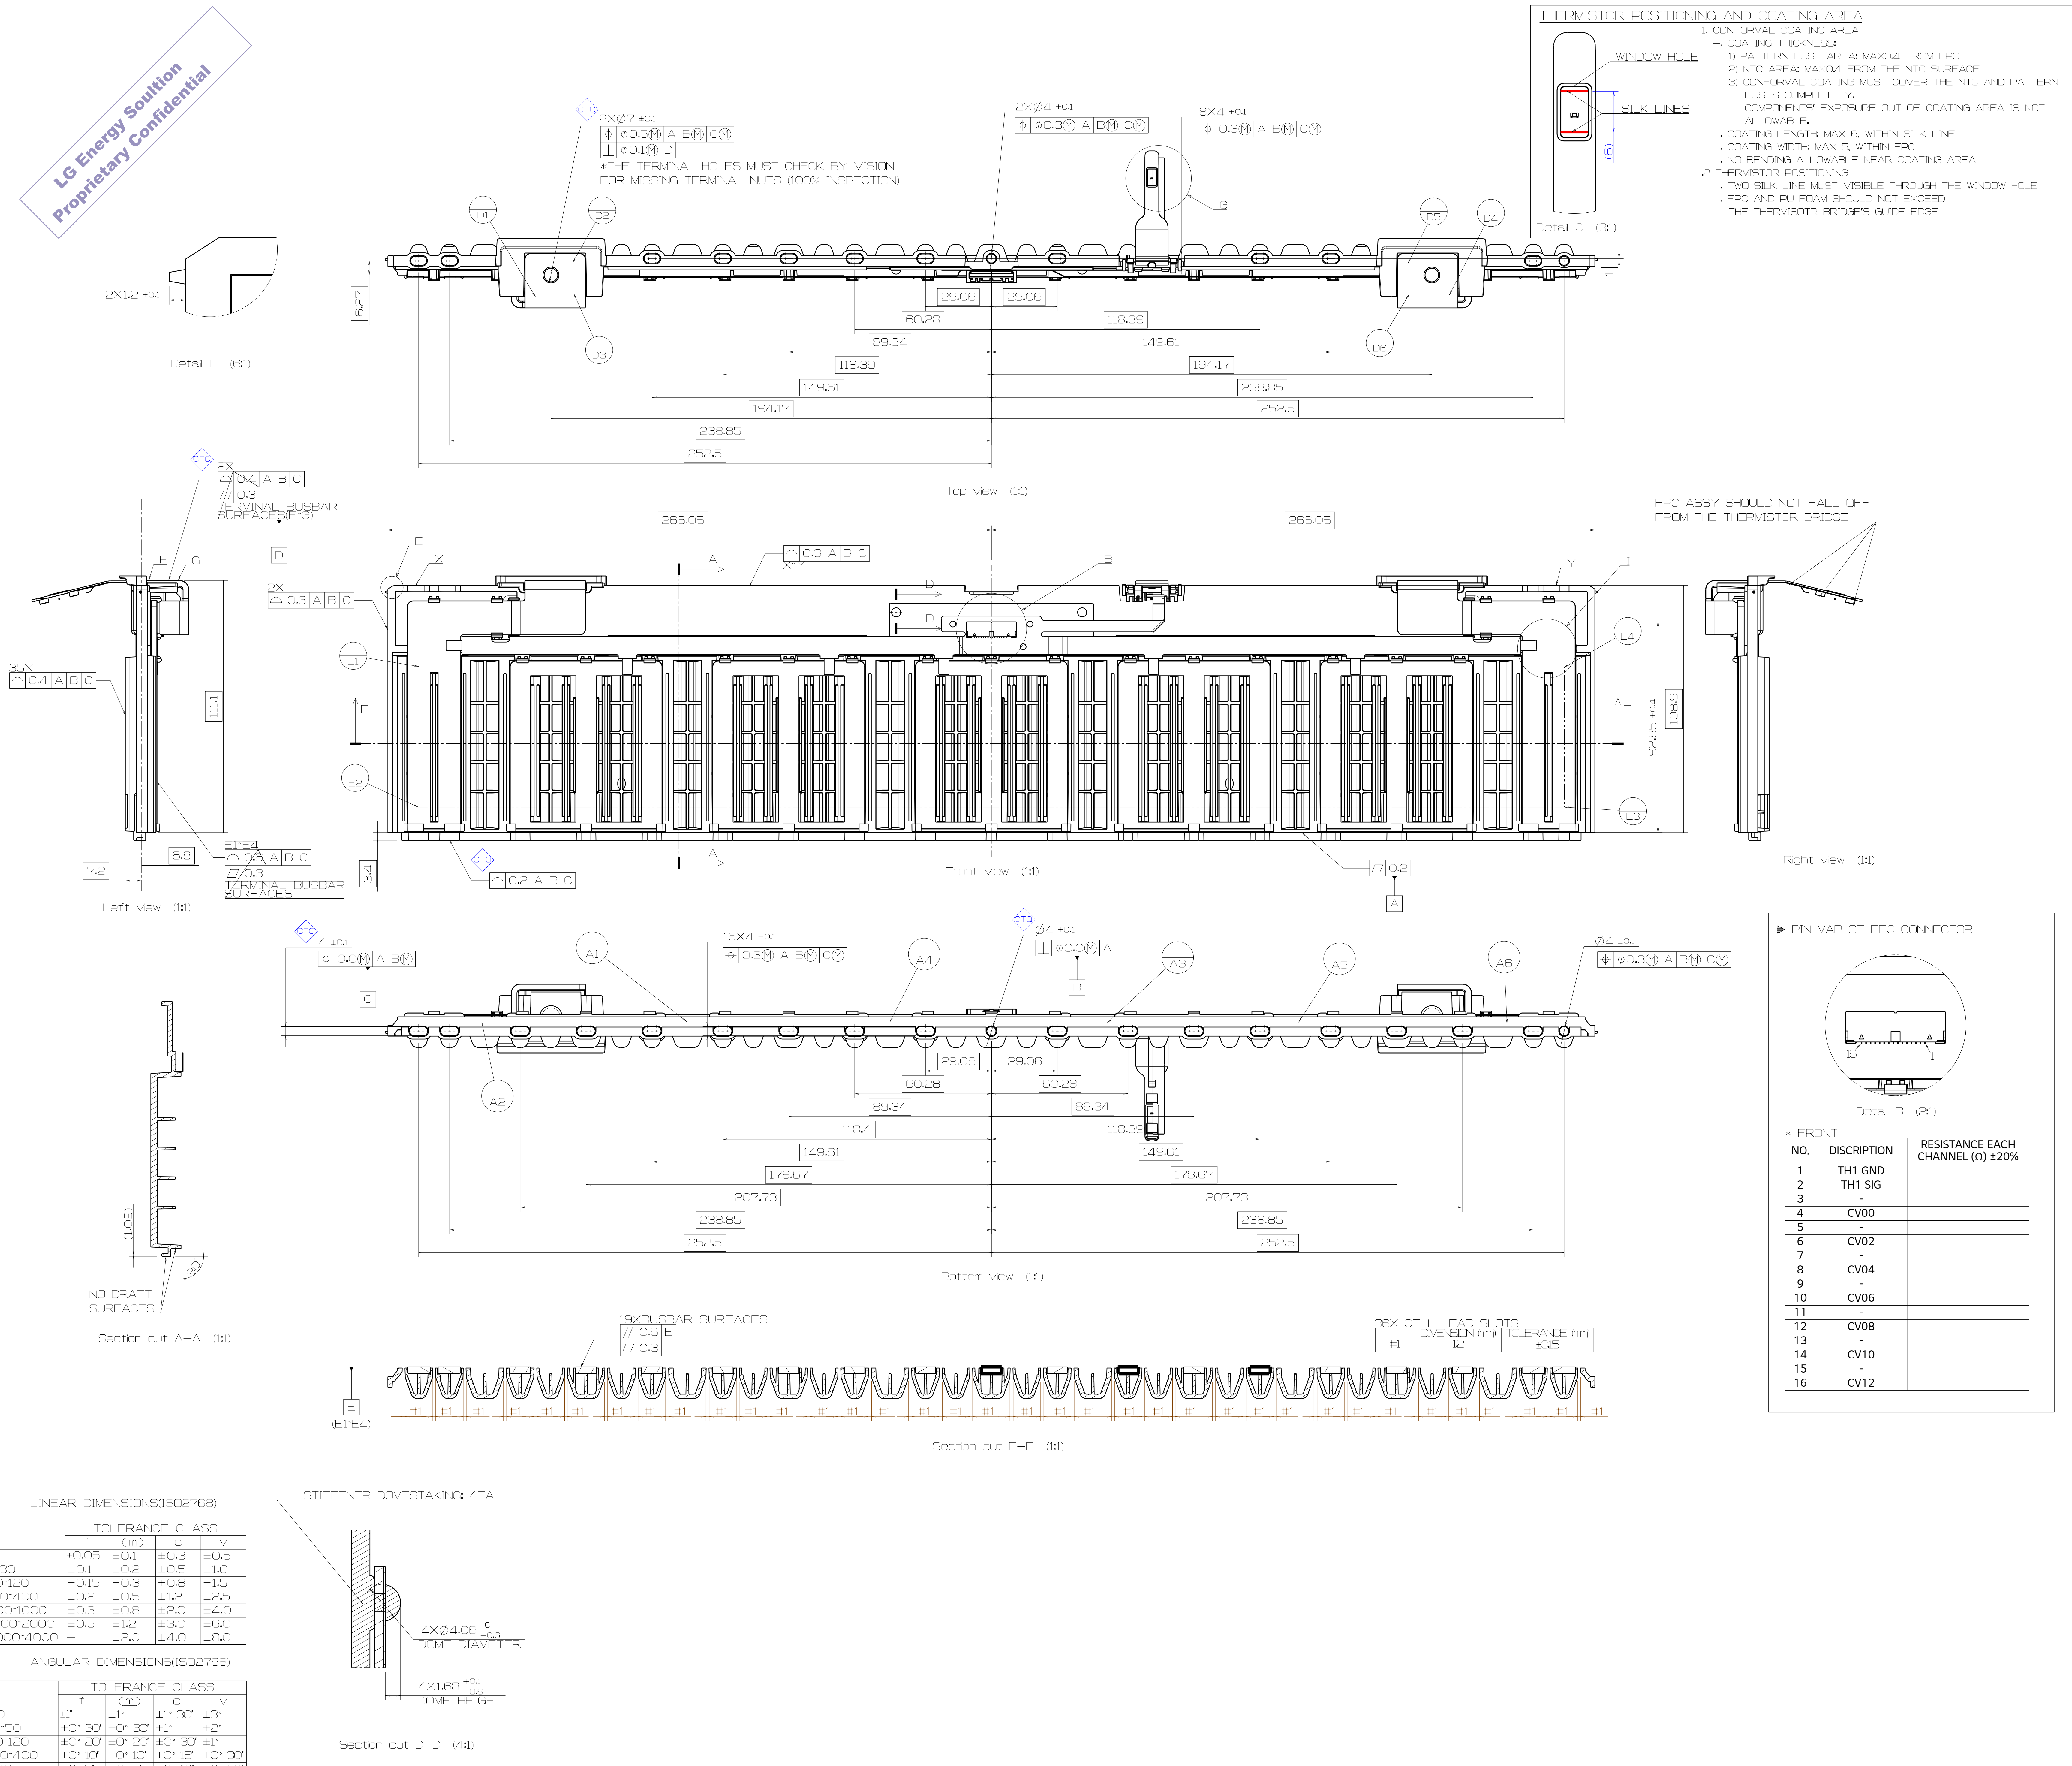

NO.	DESCRIPTION	RESISTANCE EACH CHANNEL (Ω) ±20%
1	TH1 GND	
2	TH1 SIG	
3		
4	CV00	
5		
6	CV02	
7		
8	CV04	
9		
10	CV06	
11		
12	CV08	
13		
14	CV10	
15		
16	CV12	

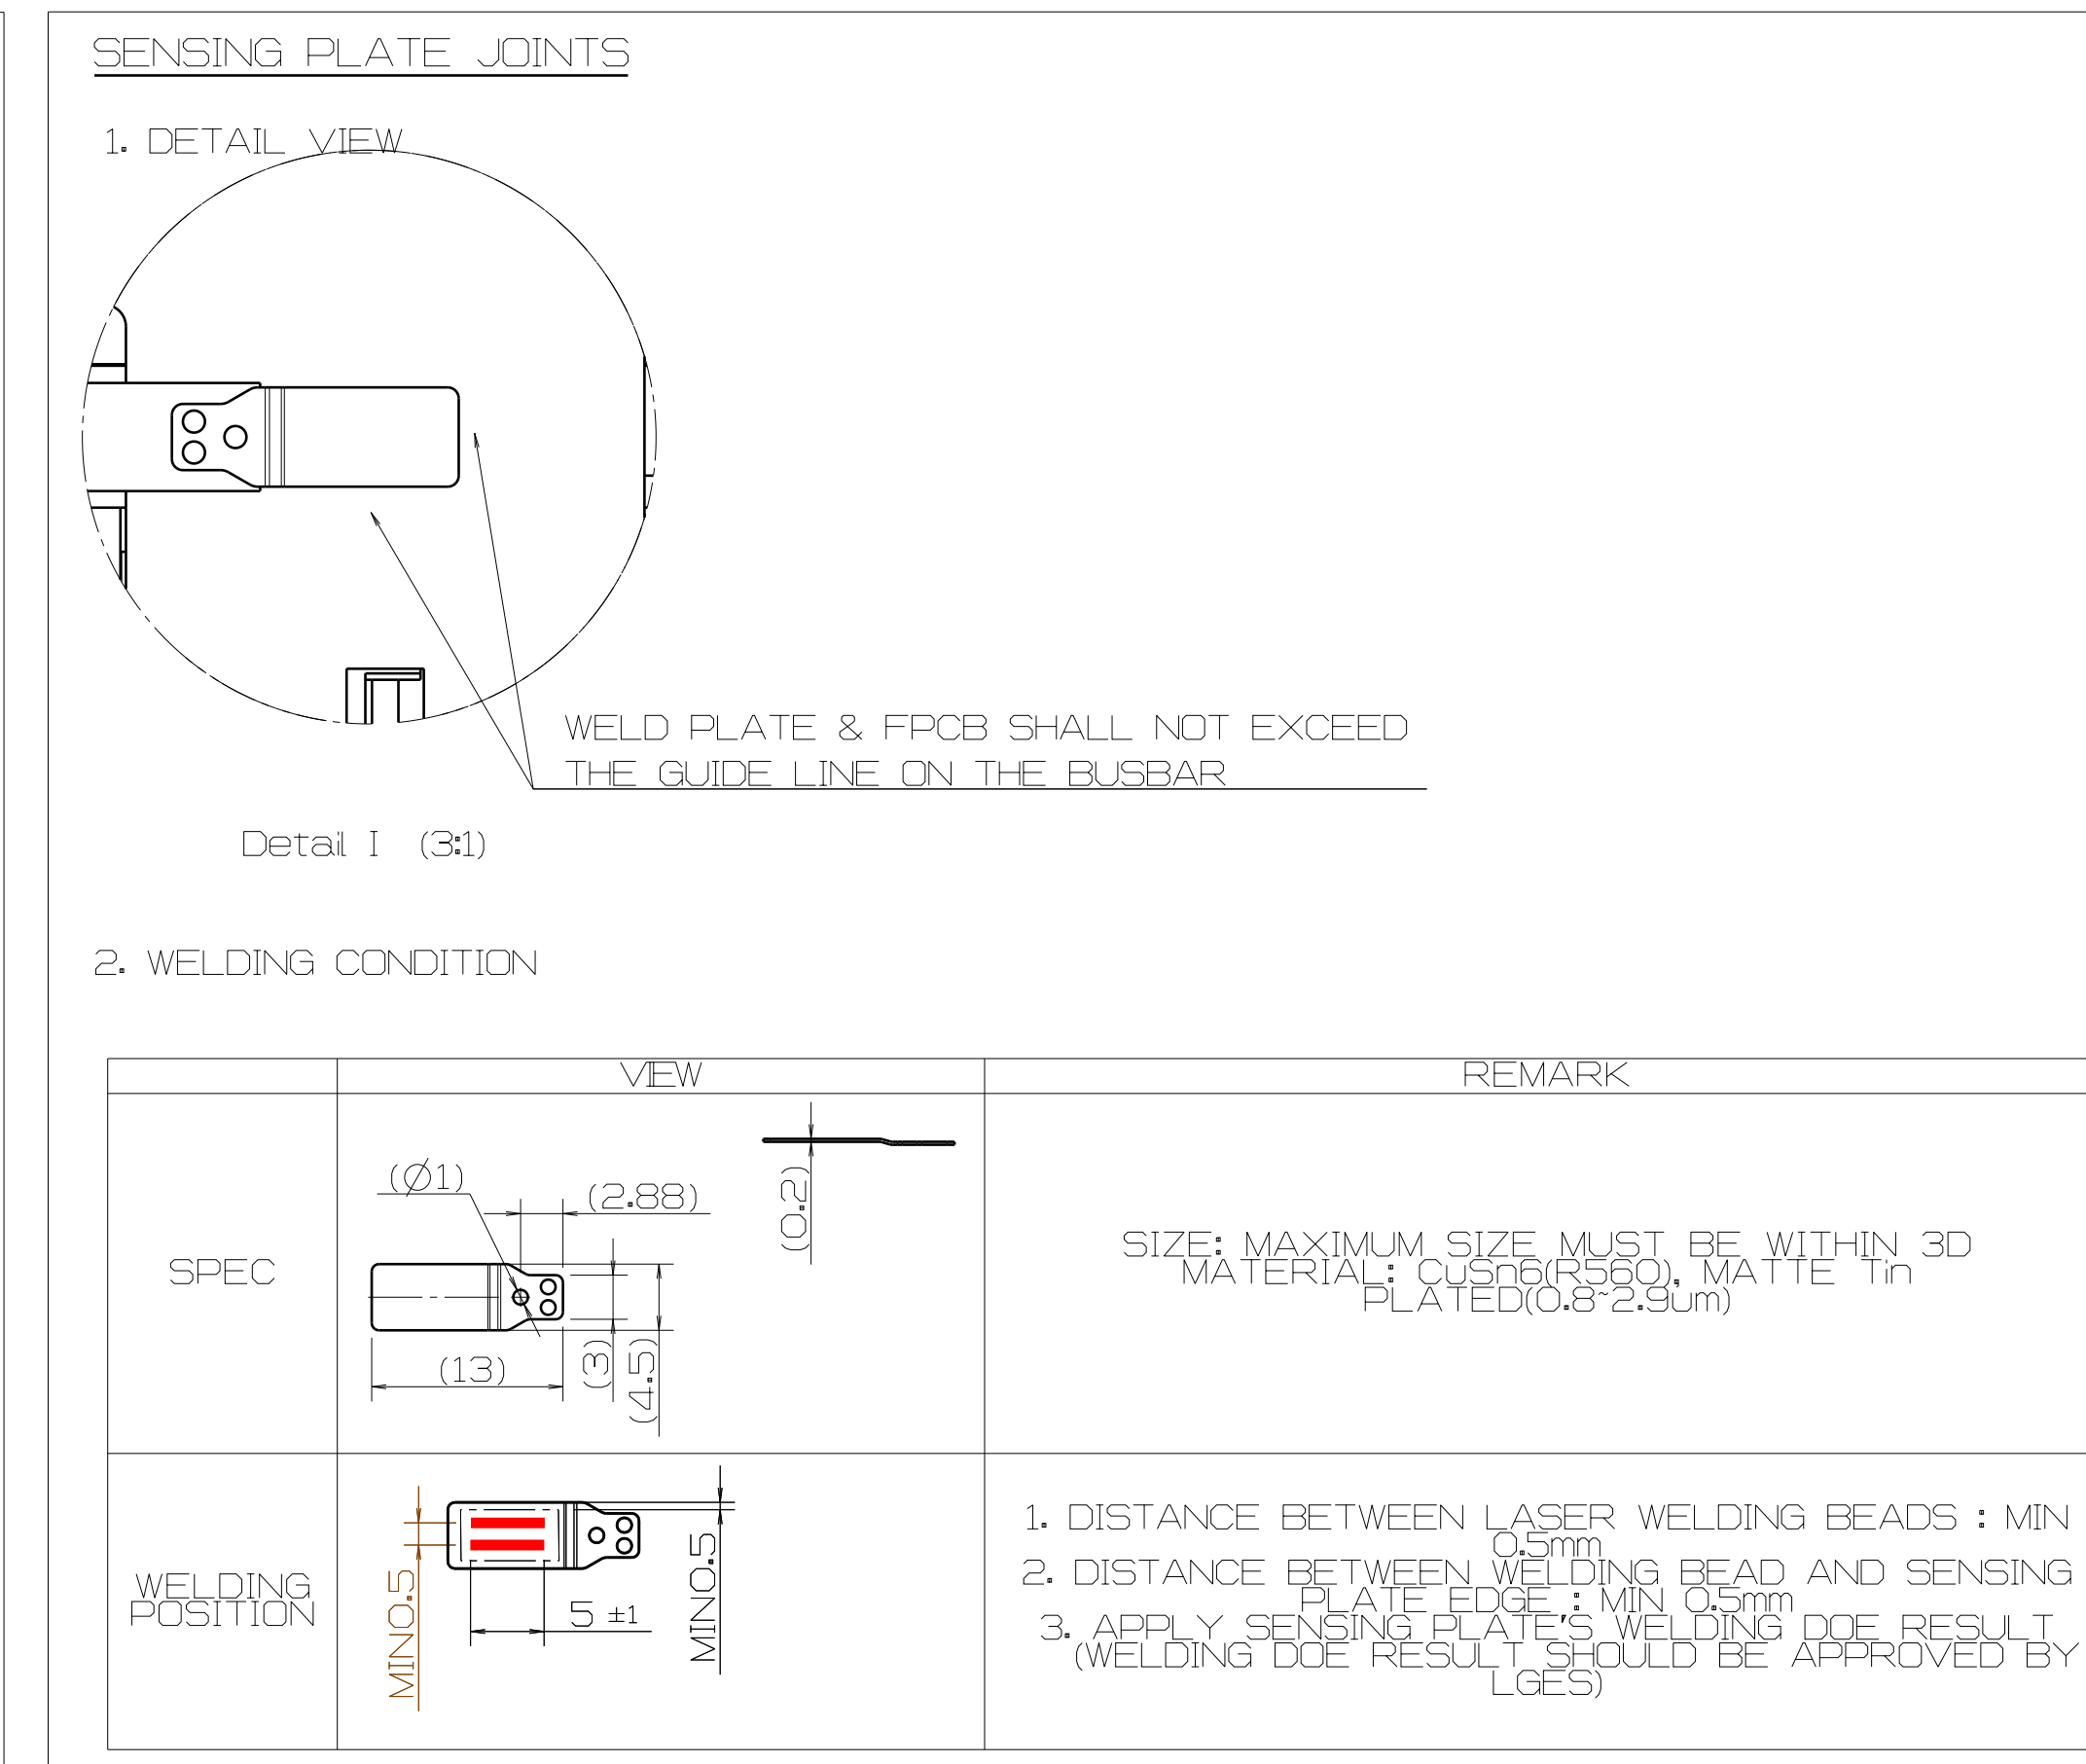

VIEW	REMARK
SPEC	SIZE: MAXIMUM SIZE MUST BE WITHIN 3D MATERIAL (MAXIMUM 1.5mm)
WELDING POSITION	1. DISTANCE BETWEEN LASER WELDING BEADS : MIN 0.5mm 2. DISTANCE BETWEEN WELDING BEAD AND SENSING PLATE : MIN 0.5mm 3. APPLY SECOND COATING : MAXIMUM 0.5mm WELDING DOE RESULT SHOULD BE APPROVED BY LGES

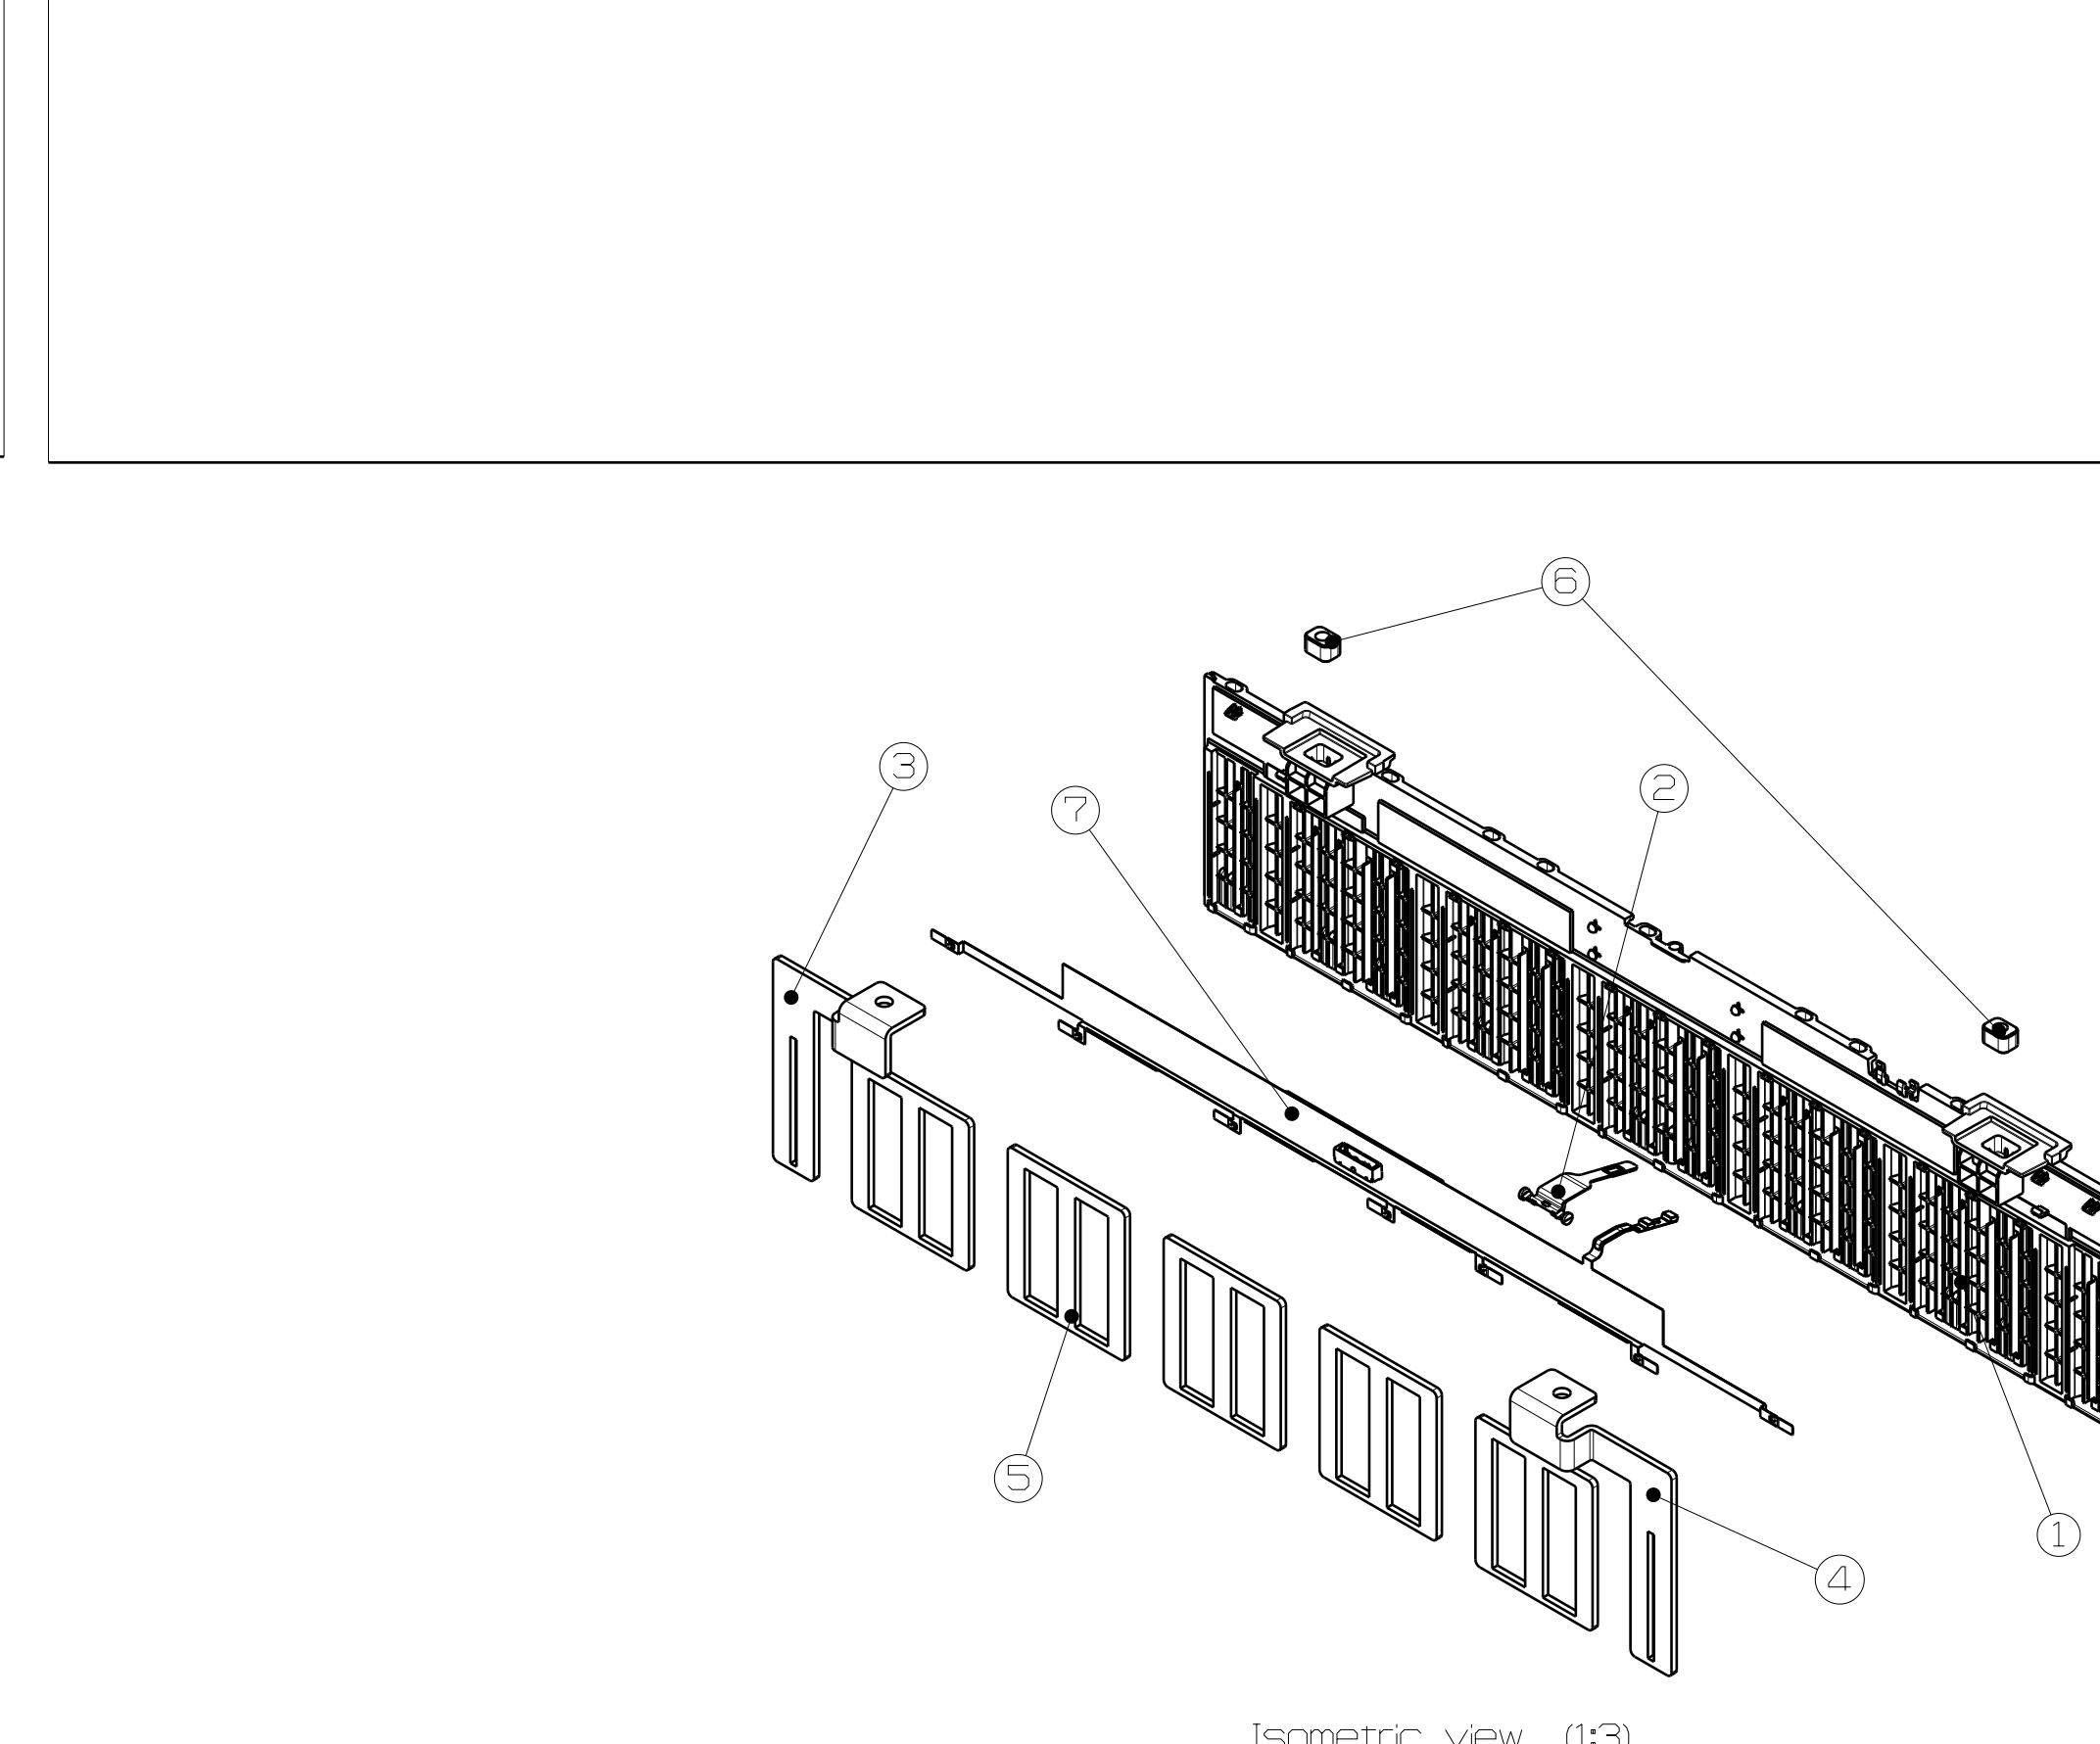

TEST ITEM	SAMPLE	CONDITION	CRITERIA
1. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
2. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			

NO.	DATE	REV	ECN	CONTENTS
1	2024.01.10	1.0	1	INITIAL RELEASE
2	2024.01.10	1.0	1	INITIAL RELEASE
3	2024.01.10	1.0	1	INITIAL RELEASE
4	2024.01.10	1.0	1	INITIAL RELEASE
5	2024.01.10	1.0	1	INITIAL RELEASE
6	2024.01.10	1.0	1	INITIAL RELEASE
7	2024.01.10	1.0	1	INITIAL RELEASE
8	2024.01.10	1.0	1	INITIAL RELEASE
9	2024.01.10	1.0	1	INITIAL RELEASE
10	2024.01.10	1.0	1	INITIAL RELEASE
11	2024.01.10	1.0	1	INITIAL RELEASE
12	2024.01.10	1.0	1	INITIAL RELEASE
13	2024.01.10	1.0	1	INITIAL RELEASE
14	2024.01.10	1.0	1	INITIAL RELEASE
15	2024.01.10	1.0	1	INITIAL RELEASE
16	2024.01.10	1.0	1	INITIAL RELEASE
17	2024.01.10	1.0	1	INITIAL RELEASE
18	2024.01.10	1.0	1	INITIAL RELEASE
19	2024.01.10	1.0	1	INITIAL RELEASE
20	2024.01.10	1.0	1	INITIAL RELEASE

TEST ITEM	SAMPLE	CONDITION	CRITERIA
1. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
2. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
3. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
4. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
5. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
6. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
7. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
8. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
9. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
10. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
11. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
12. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
13. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
14. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
15. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
16. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
17. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
18. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			
19. EVALUATION METHOD AND PERIOD MUST BE APPROVED BY LG ENERGY SOLUTION			
20. FOLLOWING RELIABILITY TEST SHALL BE CONDUCTED			