




H.Q | 789, Taejang-ro, Gimpo-si, Gyeonggi-do, 10090 Republic of Korea
TEL | +82 31.990.9279 FAX | +82 31.990.9280
Fac | 17, Cheongwon-ro 236beon-gil, Mado-myeon, Hwaseong-si, Gyeonggi-do, 18541 Republic of Korea
TEL | +82 31.357.9241 FAX | +82 31.357.9242
<http://www.jisungcp.co.kr>

※ The specifications of this product may be changed without notice for quality improvement.

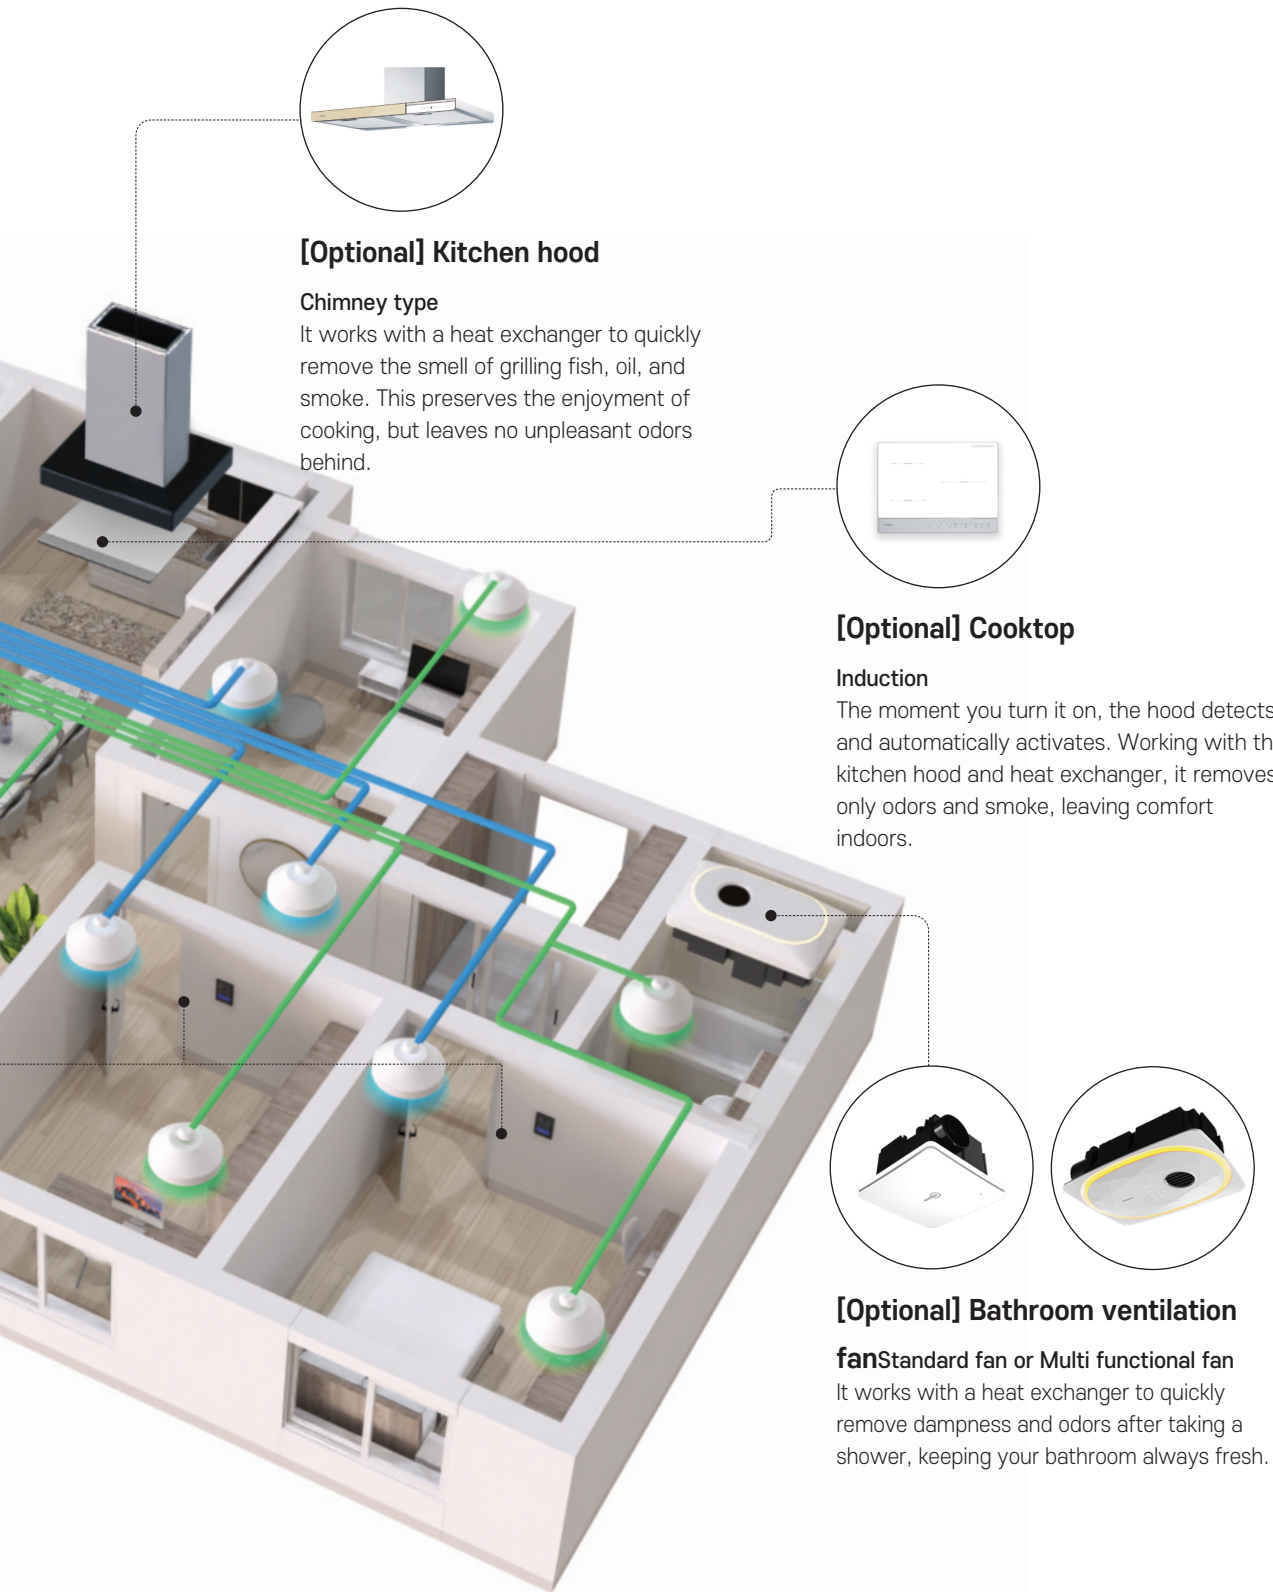


Individual Room Ventilation Control System

No more need to open your windows wide, even in the middle of winter or summer. AIRLOGIC ventilates only the areas you need, keeping your home comfortable and saving energy.



Individual Ventilation Control System creates a perfect harmony of air.

AIRLOGIC detects air quality in each room in real time, including CO2, fine dust, TVOC, and humidity, and precisely regulates airflow, much like an orchestra conductor. This next-generation ventilation technology minimizes unnecessary energy consumption while creating an optimal air environment throughout the home.



A delicate conductor for orchestrating the air

AIRLOGIC

Product .1 Heat exchanger - main body + each branch chamber

	Item	CMH	Size	k/W
	Heat Exchanger [ABS]	100	599 X 610 X 330(H)	30W
		150	599 X 610 X 330(H)	54W
		200	705 X 644 X 370(H)	69W
		250	705 X 644 X 370(H)	82W

Product .2 Controller - Main or Each Room

	Item	Sensor	Specification
	Wired remote controller [4.3-inch TFT-LCD full-touch]	CO2	400~5,000PM
		PM2.5 / PM10	0~1,000µg/m ³
		TVOC	0~10PPM
		Humidity	5~95%

Product. 3-1 [Option] Kitchen hood - heat exchanger-linked type

	Item	Spec	Description		Item	Spec	Description
	Kitchen Hood	CMH	510 / 390 / 320		Kitchen Hood	CMH	350 / 270 / 210
		Size	898 X 500 X 675(H)			Size	898 X 500 X 780(H)
		kW	95W			kW	95W
		Note	4 colors			Note	Sterilization

Product. 3-2 [Option] Cooktop - Kitchen hood linked

	Item	Spec	Description		Item	Spec	Description
	Induction Cook top	CMH	595 / 525 / 55		Induction Cook top	CMH	830 / 520 / 61
		Size	560 X 480			Size	807 X 492
		kW	3,300W			kW	3,200W
		Note	Large 1, middle 2			Note	Induction 4-burner

Product .4 [Option] Bathroom exhaust fan - heat exchanger-linked

	Item	Spec	Description		Item	Spec	Description
	Standard Fan	CMH	90		Multi-functional Fan	CMH	120
		Size	272 X 272 X 155(H)			Size	450 X 320 X 156(H)
		D.	D100			D.	D100
		kW	25W			kW	Ventilation:12W Flow: 42W Heater: 800W

Function of Individual Room Ventilation Control System

Precisely control the air quality in your desired room through multi-channel.

Apartments, officetels, and single-family homes all have different floor plans and structures, making a standardized ventilation system limiting its effectiveness. AIRLOGIC, utilizing a detachable damper system, allows for customized designs tailored to the space and structure of each unit. It maximizes space efficiency in small units, and provides multi-channel precision control in large units, ensuring optimal ventilation performance in all living environments.

Operation.1

When operating the living room

The living room where the family stays together is ventilated only when necessary, keeping the air quality fresh while saving energy.

living room

It supplies fresh air from outside into the room.

Operation.2

When the child room is in operation

Control the air in your child's room separately, ventilating only as needed. Your child enjoys clean air, while your home saves energy.

Bedrooms 1, 2, 4

Empty rooms can be set to inactive to reduce unnecessary ventilation.

Bedroom 3

Selectively ventilate only polluted areas to reduce energy consumption and household burden.

Operation.3

When the hood or hood+cooktop is in operation (optional)

Quickly eliminates cooking odors and smoke, keeping your kitchen comfortable and your home clean.

living room

Maintain stable ventilation and a comfortable indoor environment by minimizing negative pressure.

Operation.4

When the bathroom is running (optional)

No more worries about dampness and mold after a shower. A bathroom fan, integrated with ventilation, keeps you comfortable.

Bathroom

Quickly removes odors and moisture to keep you comfortable.

AIRLOGIC

Ventilation mode function

Auto mode

- Automatically adjusts ventilation based on indoor air quality sensors
- maintaining the optimal balance between energy savings and comfort.

Ventilation mode

- Perform basic heat exchange functions
- Exhausts indoor carbon dioxide and pollutants
- and supplies fresh outdoor air
- Minimizing heating and cooling energy loss

Sleep mode

- Set to minimize noise and low ventilation
- Optimizing your nighttime sleep environment,
- regulating CO₂ and humidity to promote deep sleep.
- Suppress unnecessary energy consumption

Bypass mode

- Introducing outside air directly into the room without passing through a heat exchanger
- Use when the outside temperature is more comfortable than the inside temperature

Concentrated ventilation mode


- Providing only the necessary and a comfortable space
- Rapidly improve air quality when pollution, odor, or moisture occurs
- Save energy by reducing unnecessary driving time

Clean mode

- Driving focused on filter and air purification functions
- The effectiveness of air purifiers in purifying indoor air
- Effective in removing fine dust, allergens, and bacteria, useful in times of poor air quality.

Timer

- Schedule the driver to automatically end driving
- at a time of your choice
- Prevents unnecessary long-term driving,
- saves energy, and extends the life of the device.
- Easy scheduling provides waste-free ventilation

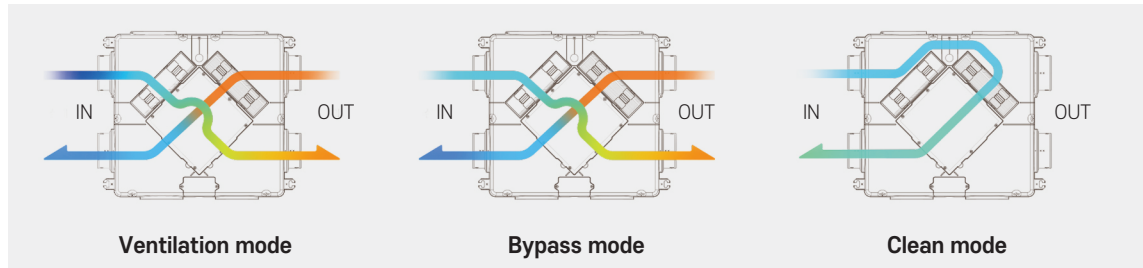

Indoor air quality detection standard values

Status	Low	Middle	High	High
Rating	Excellent	Good	Fair	Poor
PM 2.5	15 or Less	35 or Less	75 or Less	Over 75
PM 10	30 or Less	80 or Less	150 or Less	Over 150
CO2	700 or Less	1,000 or Less	1,500 or Less	Over 1,500
TVOC	0.2 or Less	0.5 or Less	2.0 or Less	Over 2.0

*It detects indoor air quality and operates automatically, and the ventilation volume operates based on the worst air quality level.

* The images and specifications above are for illustrative purposes only and may differ from the actual product.