

Joanna Bizior


14.08.2026

The purpose of this document is to present the environment setup needed to implement Splunk lab, that will focus on building a SOC center, to monitor, detect and analyze security events.


Please note, initial infrastructure, configuration, home network setup and Proxmox environment was performed by my colleague Jakub Siwiak, who also hosts physical equipment. Some of the setup stages were performed in collaboration between myself and Jakub, in order to grant secure access to the home network and isolate our lab.

Lab Access

Lab infrastructure is layout as below


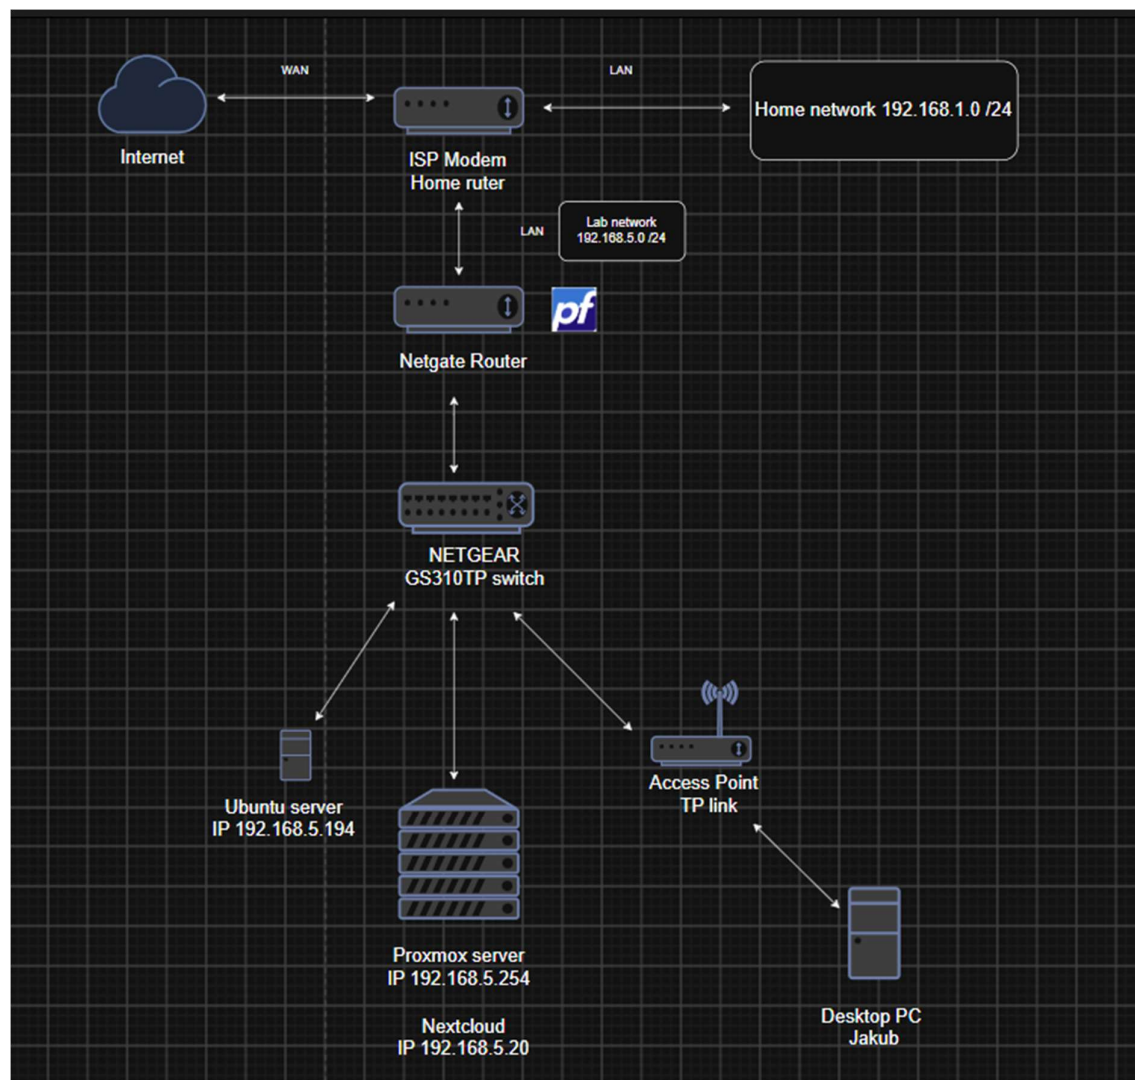


In order to connect to the network, my first step is to activate VPN, that allows me to tunnel into the lab infrastructure.

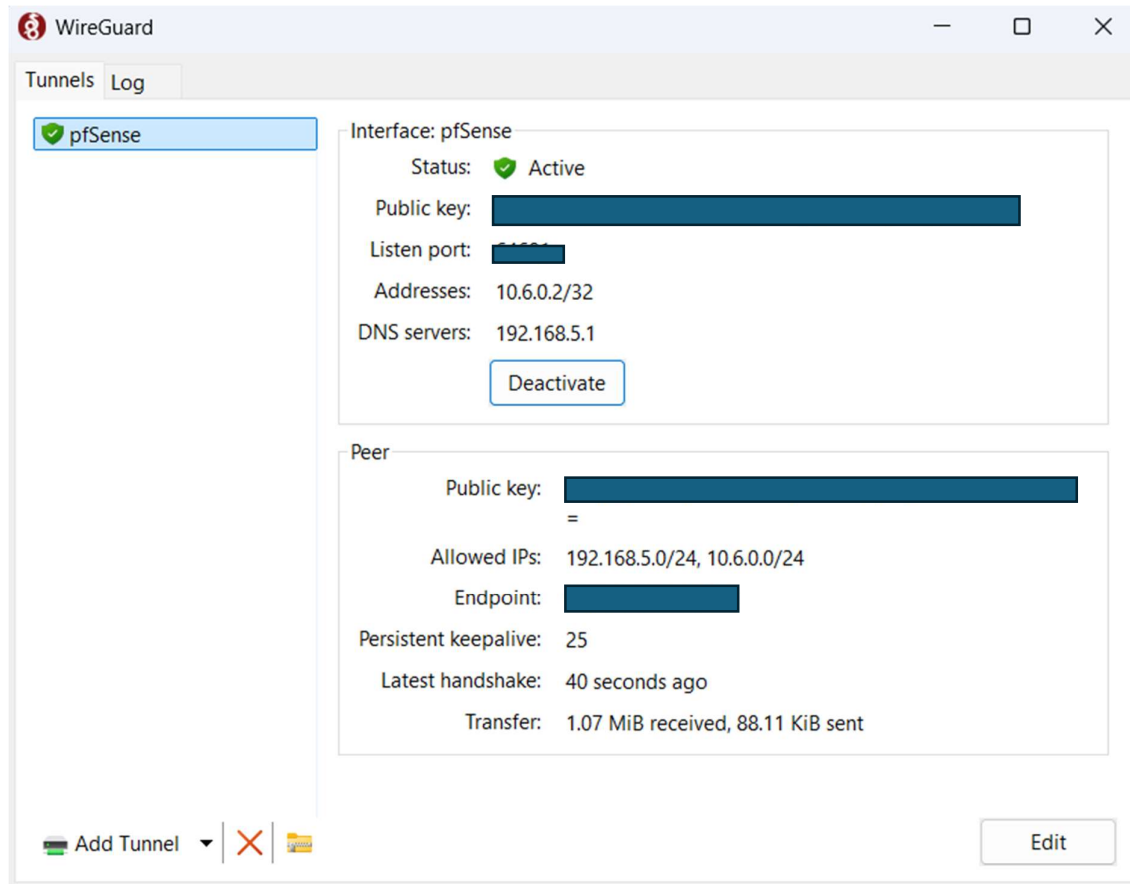

The above tunnel was manually configured, with use of peer's (server) public key, and my device's public key. This way, my device is allowed to the network where the lab is hosted.


My next step is to use the pfSense firewall to wake-on-lan the physical server that is hosting the Proxmox virtual environment.

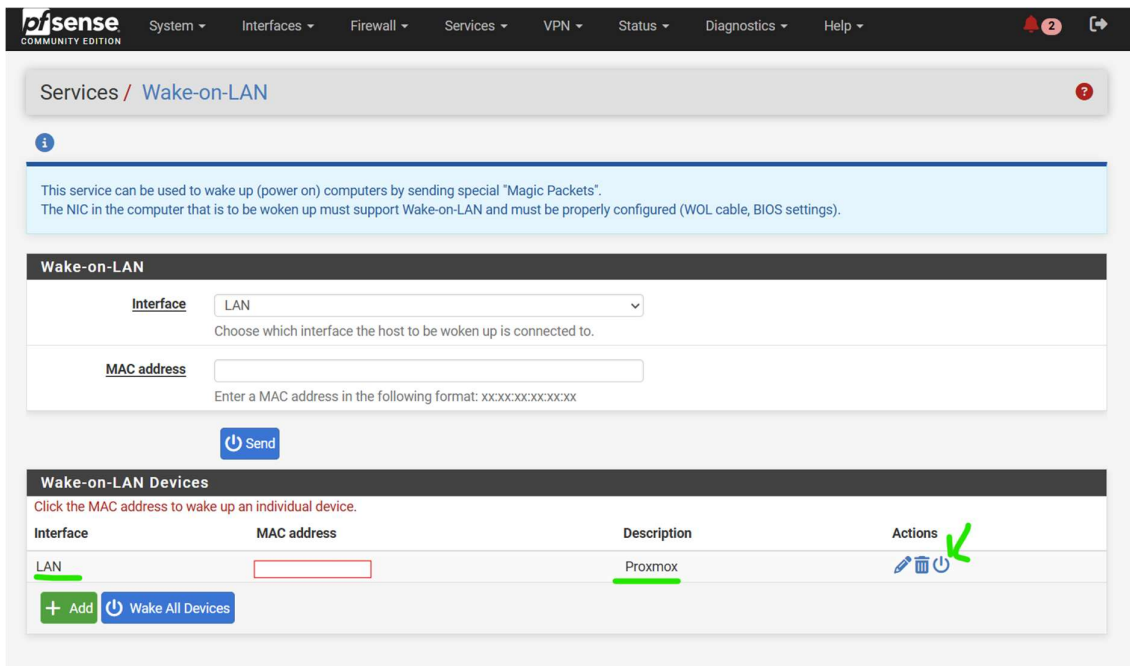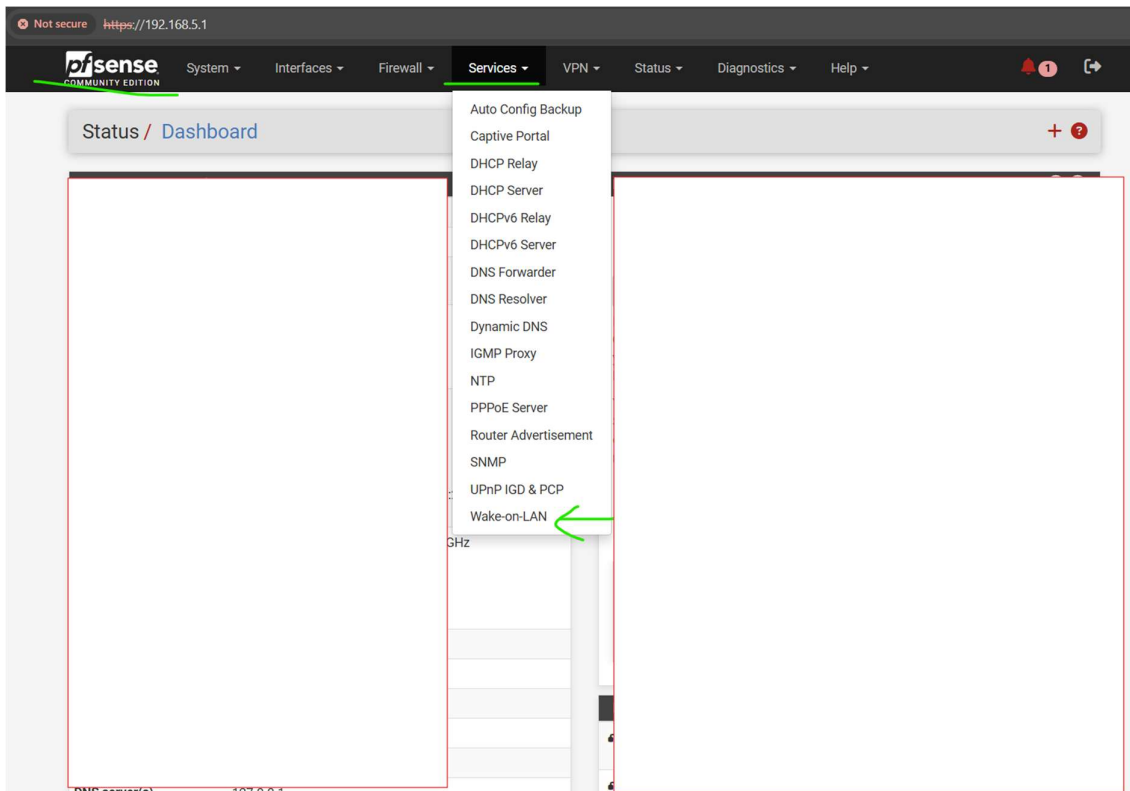

Sent magic packet to
X:X:X:X:X


Please note, some of the data such as Mac addresses and system info, has been removed for security reasons.

As seen below, Proxmox server is now active and accessible.

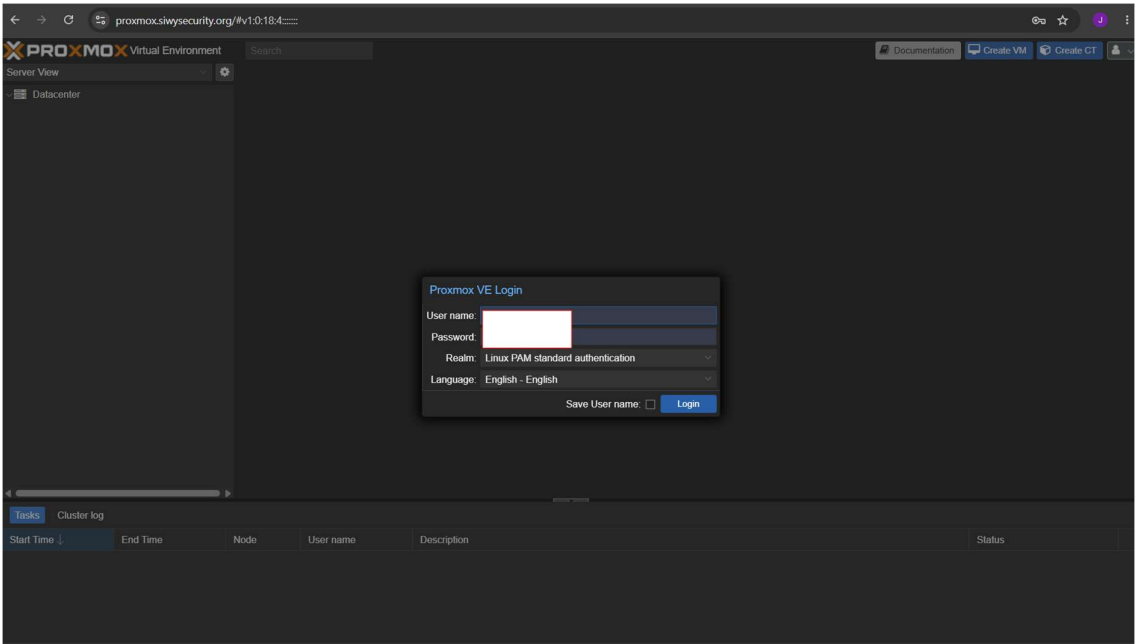

Splunk Environment Creation

For the purpose of this lab I want to create a sub network in Proxmox environment, that will facilitate a SOC center.

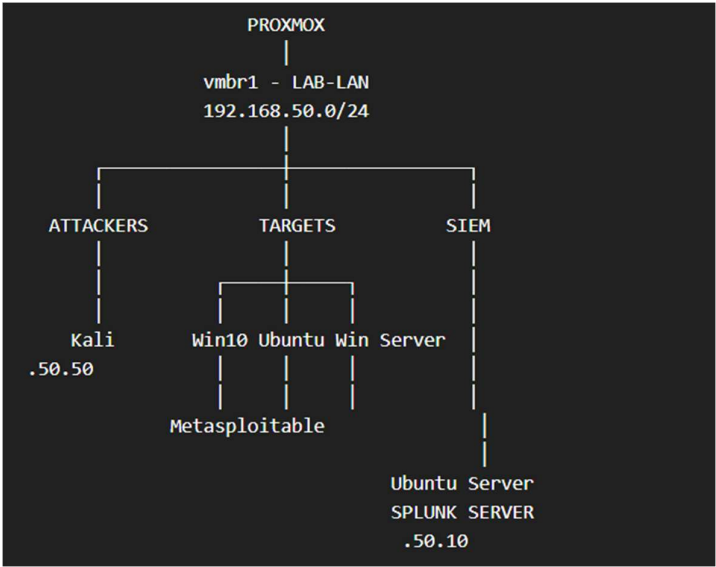

LAB-LAN Topology


VM	Role	IP in LAB-LAN
Ubuntu Server – Splunk	Splunk Enterprise / SIEM	192.168.50.10
Windows 10	Target + Forwarder	192.168.50.20
Ubuntu VM	Target + Forwarder	192.168.50.30
Windows Server	Target + Forwarder	192.168.50.40
Metasploitable	Vulnerable target	192.168.50.50
Kali	Attacker	192.168.50.100

IP address scheme

Virtual Bridge

My next step therefore is to create a virtual bridge in Proxmox, that will connect all of the virtual machines.

In my datacenter, I choose nod “lab”, then System, then Network. As seen below, there are already two bridges, vmbr0 and vmbr1, and these are needed for Proxmox functionality. Therefore, I will create new bridge vmbr2.

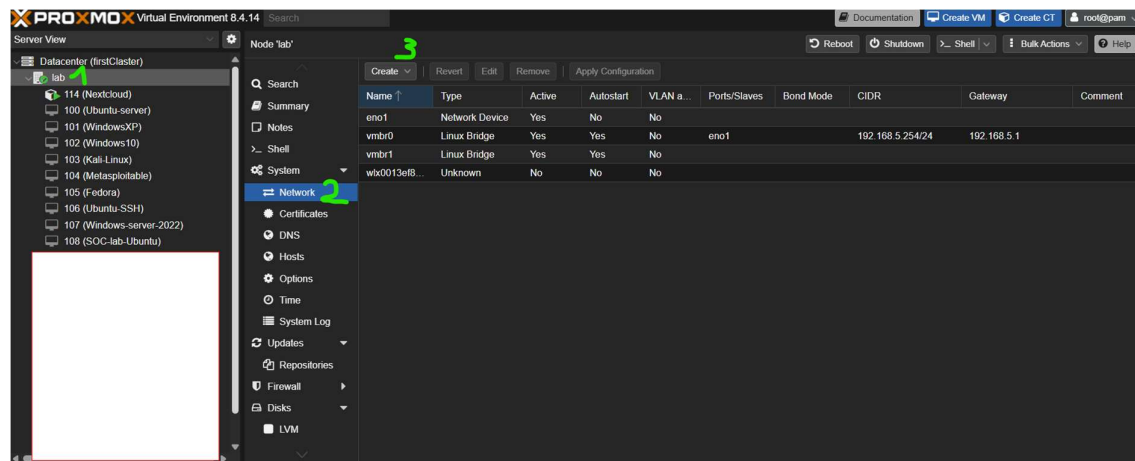

Create: Linux Bridge

Name: Autostart: ☒

IPv4/CIDR: VLAN aware: ☐

Gateway (IPv4): Bridge ports:

IPv6/CIDR: Comment:

Gateway (IPv6):

Help Advanced ☐ Create

Create	Revert	Edit	Remove	Apply Configuration					
Name	Type	Active	Autostart	VLAN a...	Ports/Slaves	Bond Mode	CIDR	Gateway	Comment
eno1	Network Device	Yes	No	No					
vmbr0	Linux Bridge	Yes	Yes	No	eno1		192.168.5.254/24	192.168.5.1	
vmbr1	Linux Bridge	Yes	Yes	No					
vmbr2	Linux Bridge	No	Yes	No					Splunk SOC Lab

Create	Revert	Edit	Remove	Apply Configuration					
Name	Type	Active	Autostart	VLAN a...					
eno1	Network Device	Yes	No	No					
vmbr0	Linux Bridge	Yes	Yes	No					
vmbr1	Linux Bridge	Yes	Yes	No					
vmbr2	Linux Bridge	Yes	Yes	No					
wlx0013ef8...	Unknown	No	No	No					

As seen above, I successfully created vmbr2 bridge and activated it.

For the VM organization I also created a Pool, that contains all of the VMs needed to the lab.

Pool View


- Datacenter (firstCluster)
 - Splunk-SOC-lab
 - 100 (Ubuntu-server)
 - 102 (Windows10)
 - 103 (Kali-Linux)
 - 104 (Metasploitable)
 - 106 (Ubuntu-SSH)
 - 107 (Windows-server-2022)

VM assignment

Next, I will assign IP addresses to the machines as per my topology and address scheme.

Metasploitable

Considering the fact that Metasploitable is severely vulnerable machine, it will only be connected to this Virtual Bridge, with no internet connection.

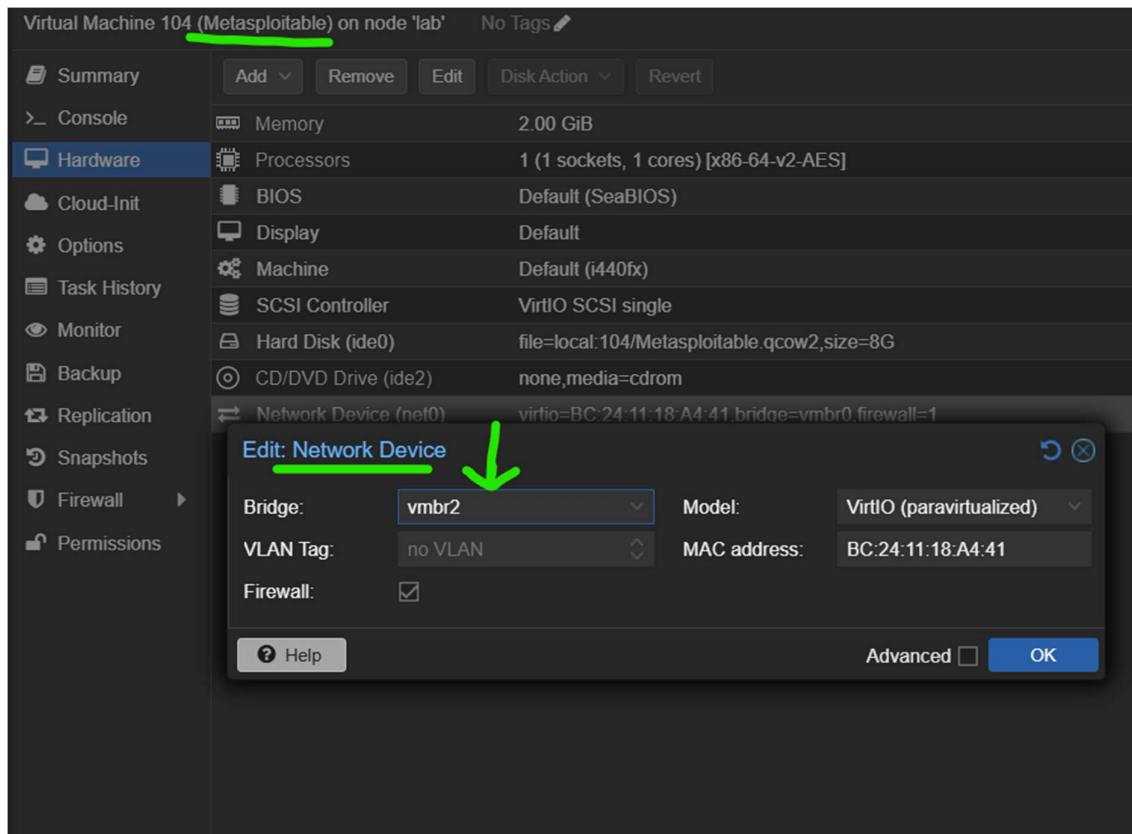

IP address was successfully assigned to Metasploitable.

```
GNU nano 2.0.7      File: /etc/network/interfaces      Modified

# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

# The loopback network interface
auto lo
iface lo inet loopback


# The primary network interface
auto eth0
iface eth0 inet static
    address 192.168.50.50
    netmask 255.255.255.0_


msfadmin@metasploitable:~$ ifconfig eth0
eth0      Link encap:Ethernet  HWaddr bc:24:11:18:a4:41
          inet addr:192.168.50.50  Bcast:192.168.50.255  Mask:255.255.255.0
          inet6 addr: fe80::be24:11ff:fe18:a441/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:0 errors:0 dropped:0 overruns:0 frame:0
          TX packets:27 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:0 (0.0 B)  TX bytes:0 (0.0 B)

msfadmin@metasploitable:~$
```

Kali Linux

In Kali Linux, I will add new network adapter, to connect it to vmbr2 bridge, and I will keep the vmbr0 to connect to the internet.

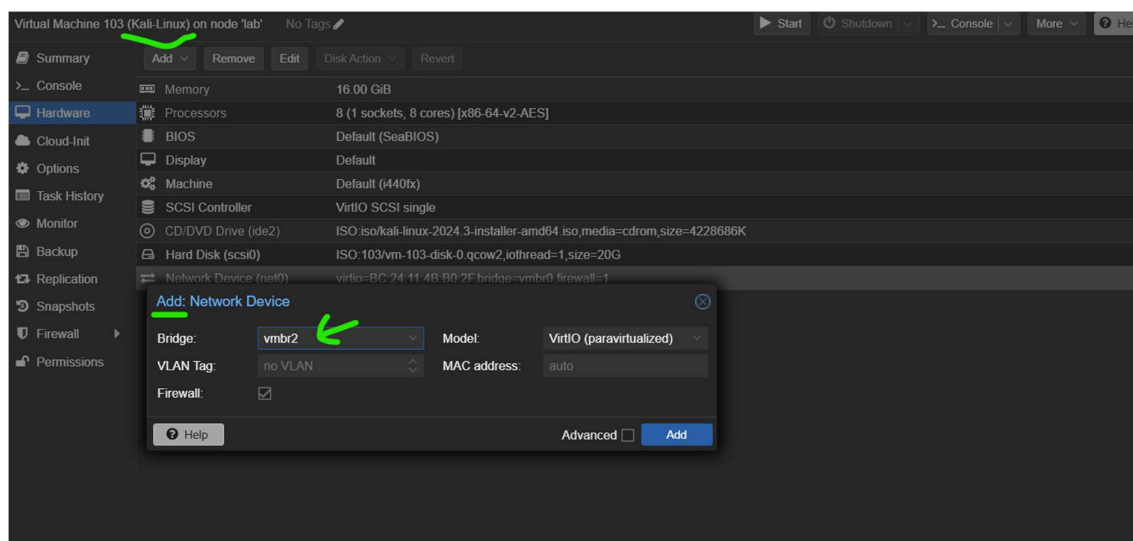

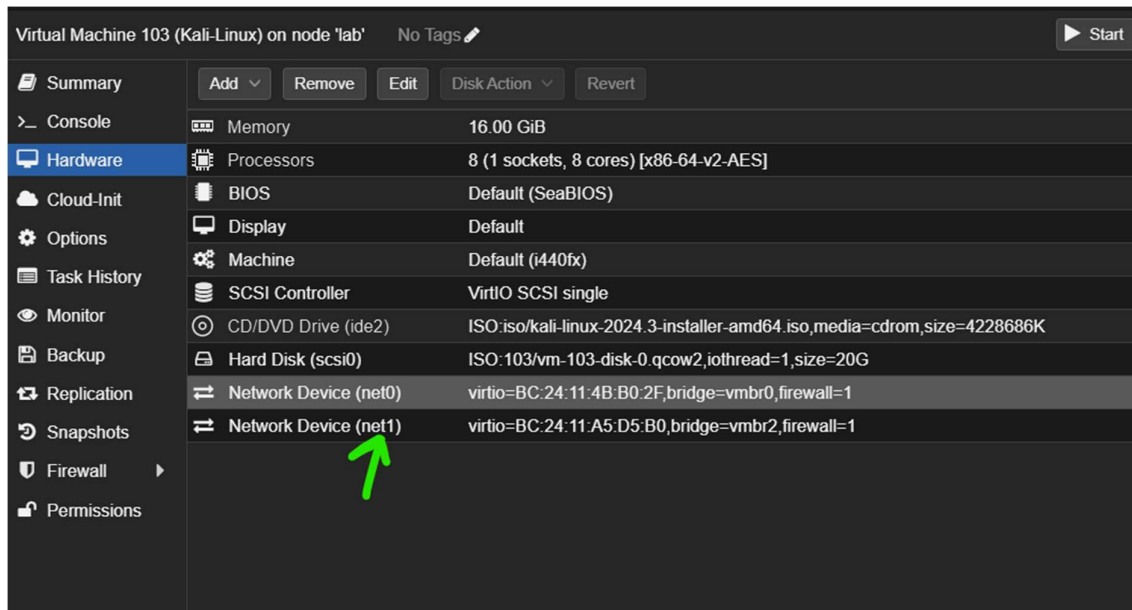

After successfully adding a new network adapter, I will now assign an IP address to the VM as below.

```
(jakub@kali)-[~]
$ sudo nmcli connection add type ethernet ifname eth1 con-name "SOC-LAB" ipv4.method manual ipv4.addresses 192.168.50.100/24
Connection 'SOC-LAB' (72a8e3f0-259f-44fa-8da9-d027e2d4f17b) successfully added.

(jakub@kali)-[~]
$ sudo nmcli connection modify "SOC-LAB" ipv4.never-default yes ipv6.method disabled

(jakub@kali)-[~]
$ sudo nmcli connection up "SOC-LAB"
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/15)

(jakub@kali)-[~]
$ ip addr show eth1
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether bc:24:11:a5:d5:b0 brd ff:ff:ff:ff:ff:ff
    inet 192.168.50.100/24 brd 192.168.50.255 scope global noprefixroute eth1
        valid_lft forever preferred_lft forever

(jakub@kali)-[~]
$ ip route
192.168.50.0/24 dev eth1 proto kernel scope link src 192.168.50.100 metric 100

(jakub@kali)-[~]
$
```

As per the lab requirements, Attacker Kali VM needs internet access, I also create a home interface to connect to the internet.

```

(jakub@kali)-[~]
$ sudo nmcli connection add type ethernet ifname eth0 con-name "HOME-NET" ipv4.method auto
[sudo] password for jakub:
Connection 'HOME-NET' (c9b04cd1-af69-4f51-a00f-681c30158657) successfully added.

(jakub@kali)-[~]
$ sudo nmcli connection modify "HOME-NET" connection.autoconnect yes

(jakub@kali)-[~]
$ sudo nmcli connection up "HOME-NET"
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/17)

(jakub@kali)-[~]
$ ip addr show eth0
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether bc:24:11:4b:b0:2f brd ff:ff:ff:ff:ff:ff
    inet 192.168.5.104/24 brd 192.168.5.255 scope global dynamic noprefixroute eth0
        valid_lft 7144sec preferred_lft 7144sec
    inet6 fe80::a93a:3de4:9058:f9e4/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

(jakub@kali)-[~]
$ ip route
default via 192.168.5.1 dev eth0 proto dhcp src 192.168.5.104 metric 101
192.168.5.0/24 dev eth0 proto kernel scope link src 192.168.5.104 metric 101
192.168.50.0/24 dev eth1 proto kernel scope link src 192.168.50.100 metric 100

(jakub@kali)-[~]
$

```

Connectivity Test

Kali ↔ Metasploitable

```

(jakub@kali)-[~]
$ ping -c 4 192.168.50.50
PING 192.168.50.50 (192.168.50.50) 56(84) bytes of data.
64 bytes from 192.168.50.50: icmp_seq=1 ttl=64 time=0.641 ms
64 bytes from 192.168.50.50: icmp_seq=2 ttl=64 time=0.416 ms
64 bytes from 192.168.50.50: icmp_seq=3 ttl=64 time=0.305 ms
64 bytes from 192.168.50.50: icmp_seq=4 ttl=64 time=0.351 ms

--- 192.168.50.50 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3062ms
rtt min/avg/max/mdev = 0.305/0.428/0.641/0.129 ms

(jakub@kali)-[~]
$

```

```

msfadmin@metasploitable:~$ ping -c4 192.168.50.100
PING 192.168.50.100 (192.168.50.100) 56(84) bytes of data.
64 bytes from 192.168.50.100: icmp_seq=1 ttl=64 time=0.389 ms
64 bytes from 192.168.50.100: icmp_seq=2 ttl=64 time=0.355 ms
64 bytes from 192.168.50.100: icmp_seq=3 ttl=64 time=0.397 ms
64 bytes from 192.168.50.100: icmp_seq=4 ttl=64 time=0.277 ms

--- 192.168.50.100 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 2998ms
rtt min/avg/max/mdev = 0.277/0.354/0.397/0.051 ms
msfadmin@metasploitable:~$

```

Ubuntu SSH → Kali → Metasploitable

```
soc_lab@ubuntu-client:~$ ping -c 4 192.168.50.100
PING 192.168.50.100 (192.168.50.100) 56(84) bytes of data.
64 bytes from 192.168.50.100: icmp_seq=1 ttl=64 time=0.280 ms
64 bytes from 192.168.50.100: icmp_seq=2 ttl=64 time=0.229 ms
64 bytes from 192.168.50.100: icmp_seq=3 ttl=64 time=0.250 ms
64 bytes from 192.168.50.100: icmp_seq=4 ttl=64 time=0.279 ms

--- 192.168.50.100 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3061ms
rtt min/avg/max/mdev = 0.229/0.259/0.280/0.021 ms
soc_lab@ubuntu-client:~$ ping -c 4 192.168.50.50
PING 192.168.50.50 (192.168.50.50) 56(84) bytes of data.
64 bytes from 192.168.50.50: icmp_seq=1 ttl=64 time=0.369 ms
64 bytes from 192.168.50.50: icmp_seq=2 ttl=64 time=0.311 ms
64 bytes from 192.168.50.50: icmp_seq=3 ttl=64 time=0.271 ms
64 bytes from 192.168.50.50: icmp_seq=4 ttl=64 time=0.274 ms

--- 192.168.50.50 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3059ms
rtt min/avg/max/mdev = 0.271/0.306/0.369/0.039 ms
soc_lab@ubuntu-client:~$
```

Windows Server 2022 → Metasploitable → Kali → Ubuntu SSH

```
PS C:\Windows\system32> ping 192.168.50.50

Pinging 192.168.50.50 with 32 bytes of data:
Reply from 192.168.50.50: bytes=32 time<1ms TTL=64
Reply from 192.168.50.50: bytes=32 time<1ms TTL=64
Reply from 192.168.50.50: bytes=32 time<1ms TTL=64
Reply from 192.168.50.50: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.50.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PS C:\Windows\system32> ping 192.168.50.100

Pinging 192.168.50.100 with 32 bytes of data:
Reply from 192.168.50.100: bytes=32 time<1ms TTL=64
Reply from 192.168.50.100: bytes=32 time<1ms TTL=64
Reply from 192.168.50.100: bytes=32 time<1ms TTL=64
Reply from 192.168.50.100: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.50.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PS C:\Windows\system32> ping 192.168.50.30

Pinging 192.168.50.30 with 32 bytes of data:
Reply from 192.168.50.30: bytes=32 time<1ms TTL=64
Reply from 192.168.50.30: bytes=32 time<1ms TTL=64
Reply from 192.168.50.30: bytes=32 time<1ms TTL=64
Reply from 192.168.50.30: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.50.30:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
PS C:\Windows\system32>
```

Ubuntu-ssh

In this part I will follow the same steps as in previous VMs

Virtual Machine 106 (Ubuntu-SSH) on node 'lab' No Tags

Summary Add Remove Edit Disk Action Revert

Console

Hardware

Cloud-Init

Options

Task History

Monitor

Backup

Replication

Snapshots

Firewall

Permissions

Memory	8.19 GiB
Processors	8 (2 sockets, 4 cores) [x86-64-v2-AES]
BIOS	Default (SeaBIOS)
Display	Default
Machine	Default (i440fx)
SCSI Controller	VirtIO SCSI single
CD/DVD Drive (ide2)	ISO:iso/ubuntu-24.04.1-desktop-amd64.iso,media=cdrom,size=6057964K
Hard Disk (scsi0)	ISO:106/vm-106-disk-0.qcow2,iosthread=1,size=32G
Network Device (net0)	virtio=BC:24:11:2D:D7:2C,bridge=vmbro,firewall=1
Network Device (net1)	virtio=BC:24:11:F8:7A:D5,bridge=vmbro2,firewall=1

```
soc_lab@ubuntu-client:~$ nmcli device status
DEVICE  TYPE      STATE      CONNECTION
ens18   ethernet  connected  netplan-ens18
lo       loopback  connected (externally)  lo
ens19   ethernet  disconnected  --
soc_lab@ubuntu-client:~$ sudo nmcli connection add type ethernet ifname ens19 con-name "SOC-LAB" i
pv4.method manual ipv4.addresses 192.168.50.30/24
[sudo] password for soc_lab:
Connection 'SOC-LAB' (f3cc3dec-b668-4196-b364-5873a4a2d882) successfully added.
soc_lab@ubuntu-client:~$ sudo nmcli connection modify "SOC-LAB" ipv4.never-default yes ipv6.method
disabled connection.autoconnect yes
soc_lab@ubuntu-client:~$ sudo nmcli connection up "SOC-LAB"
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConne
ction/12)
soc_lab@ubuntu-client:~$ ip addr show ens19
3: ens19: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen
1000
    link/ether bc:24:11:f8:7a:d5 brd ff:ff:ff:ff:ff:ff
    altname enp0s19
    inet 192.168.50.30/24 brd 192.168.50.255 scope global noprefixroute ens19
        valid_lft forever preferred_lft forever
soc_lab@ubuntu-client:~$
```


Windows 10

Virtual Machine 102 (Windows10) on node 'lab' No Tags ▶ Start ⏻ Sh

Summary

>_ Console

Hardware

Cloud-Init

Options

Task History

Monitor

Backup

Replication

Snapshots

Firewall ▶

Permissions

Add ▼ Remove Edit Disk Action ▼ Revert

Memory

Processors

BIOS

Display

Machine

SCSI Controller

Hard Disk (ide0)

CD/DVD Drive (ide2)

Network Device (net0)

Network Device (net1)

15.66 GiB

8 (2 sockets, 4 cores) [x86-64-v2-AES]

Default (SeaBIOS)

Default

pc-i440fx-9.2+pve1

VirtIO SCSI single

ISO:102/vm-102-disk-0.qcow2,size=32G

ISO:iso/en_windows_10_education_x64_dvd_6848120.iso,media=cdrom,size=3844464K

e1000=BC:24:11:33:FA:E0,bridge=vmb0,firewall=1

e1000=BC:24:11:A8:15:88,bridge=vmb2,firewall=1

Name	InterfaceDescription	ifIndex	Status	MacAddress	LinkSpeed
Ethernet 2	Intel(R) PRO/1000 MT Network Conne...#2	7	Up	BC-24-11-A8-15-88	1 Gbps
Ethernet	Intel(R) PRO/1000 MT Network Connection	5	Up	BC-24-11-33-FA-E0	1 Gbps

```
PS C:\WINDOWS\system32> New-NetIPAddress -InterfaceAlias "Ethernet 2" -IPAddress 192.168.50.20 -PrefixLength 24
```

IPAddress : 192.168.50.20

InterfaceIndex : 7

InterfaceAlias : Ethernet 2

AddressFamily : IPv4

Type : Unicast

PrefixLength : 24

PrefixOrigin : Manual

SuffixOrigin : Manual

AddressState : Tentative

ValidLifetime : Infinite ([TimeSpan]::MaxValue)

PreferredLifetime : Infinite ([TimeSpan]::MaxValue)

SkipAsSource : False

PolicyStore : ActiveStore

IPAddress : 192.168.50.20

InterfaceIndex : 7

InterfaceAlias : Ethernet 2

AddressFamily : IPv4

Type : Unicast

PrefixLength : 24

PrefixOrigin : Manual

SuffixOrigin : Manual

AddressState : Invalid

ValidLifetime : Infinite ([TimeSpan]::MaxValue)

PreferredLifetime : Infinite ([TimeSpan]::MaxValue)

SkipAsSource : False

PolicyStore : PersistentStore

```
PS C:\WINDOWS\system32> Get-NetIPAddress -InterfaceAlias "Ethernet 2" -AddressFamily IPv4

IPAddress      : 192.168.50.20
InterfaceIndex  : 7
InterfaceAlias  : Ethernet 2
AddressFamily   : IPv4
Type            : Unicast
PrefixLength    : 24
PrefixOrigin    : Manual
SuffixOrigin     : Manual
AddressState     : Preferred
ValidLifetime   : Infinite ([TimeSpan]::MaxValue)
PreferredLifetime : Infinite ([TimeSpan]::MaxValue)
SkipAsSource     : False
PolicyStore     : ActiveStore

PS C:\WINDOWS\system32>
```

Windows Server 2022

I will apply same steps as previously.

Virtual Machine 107 (Windows-server-2022) on node 'lab'

No Tags

Start

Shutdown

Summary

Add

Remove

Edit

Disk Action

Revert

>_ Console

Memory

15.69 GiB

Hardware

Processors

8 (2 sockets, 4 cores) [x86-64-v2-AES]

Cloud-Init

BIOS

OVMF (UEFI)

Options

Display

Default

Task History

Machine

pc-q35-9.2+pve1

Monitor

SCSI Controller

LSI 53C895A

Backup

Hard Disk (ide0)

ISO:107/vm-107-disk-1.qcow2,size=50G

Replication

CD/DVD Drive (ide1)

ISO:iso/en-us_windows_server_2022_x64_dvd_620d7eac.iso,media=cdrom,size=5420590K

Snapshots

CD/DVD Drive (ide2)

ISO:iso/en-us_windows_server_2022_x64_dvd_620d7eac.iso,media=cdrom,size=5420590K

Firewall

Network Device (net0)

e1000=BC:24:11:11:D2:50,bridge=vmb0,firewall=1

Permissions

Network Device (net1)

e1000=BC:24:11:1B:56:FD,bridge=vmb2,firewall=1

EFI Disk

ISO:107/vm-107-disk-0.qcow2,efitype=4m,pre-enrolled-keys=1,size=528K

Due to the limited performance in the Virtual infrastructure, I have chosen to assign IP address using PowerShell instead of GUI, to speed up the process.

```

PS C:\Windows\system32> New-NetIPAddress -InterfaceAlias "Ethernet 2" -IPAddress 192.168.50.40 -PrefixLength 24

IPAddress      : 192.168.50.40
InterfaceIndex  : 19
InterfaceAlias  : Ethernet 2
AddressFamily   : IPv4
Type            : Unicast
PrefixLength    : 24
PrefixOrigin    : Manual
SuffixOrigin     : Manual
AddressState    : Tentative
ValidLifetime   : Infinite ([TimeSpan]::MaxValue)
PreferredLifetime : Infinite ([TimeSpan]::MaxValue)
SkipAsSource    : False
PolicyStore     : ActiveStore

IPAddress      : 192.168.50.40
InterfaceIndex  : 19
InterfaceAlias  : Ethernet 2
AddressFamily   : IPv4
Type            : Unicast
PrefixLength    : 24
PrefixOrigin    : Manual
SuffixOrigin     : Manual
AddressState    : Invalid
ValidLifetime   : Infinite ([TimeSpan]::MaxValue)
PreferredLifetime : Infinite ([TimeSpan]::MaxValue)
SkipAsSource    : False
PolicyStore     : PersistentStore

```

Ubuntu Server / Splunk

This VM will serve as Splunk server to collect all the logs and host SOC centre.

I start with the same steps- adding network adapter and assigning IP address.

Virtual Machine 125 (Ubuntu-Server-Splunk) on node 'lab' No Tags ▶ Start

Category	Item	Value
Summary	Add Remove Edit Disk Action Revert	
Console	Memory	8.00 GiB
Hardware	Processors	4 (1 sockets, 4 cores) [host]
Cloud-Init	BIOS	Default (SeaBIOS)
Options	Display	Default
Task History	Machine	Default (i440fx)
Monitor	SCSI Controller	VirtIO SCSI single
Backup	CD/DVD Drive (ide2)	ISO:iso/ubuntu-24.04.1-desktop-amd64.iso,media=cdrom,size=6057964K
Replication	Hard Disk (scsi0)	ISO:125/vm-125-disk-0.qcow2,discard=on,iosthread=1,size=64G
Snapshots	Network Device (net0)	virtio=BC:24:11:D6:02:30,bridge=vmb0,firewall=1
Firewall	Network Device (net1)	virtio=BC:24:11:EC:DD:12,bridge=vmb2,firewall=1
Permissions		


```

link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
    valid_lft forever preferred_lft forever
inet6 ::1/128 scope host noprefixroute
    valid_lft forever preferred_lft forever
ens18: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether bc:24:11:d6:02:30 brd ff:ff:ff:ff:ff:ff
    altname enp0s18
    inet 192.168.5.106/24 brd 192.168.5.255 scope global dynamic noprefixroute ens18
        valid_lft 6427sec preferred_lft 6427sec
    inet6 fe80::f39a:5192:2629:73d5/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
ens19: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether bc:24:11:ec:dd:12 brd ff:ff:ff:ff:ff:ff
    altname enp0s19
lab_admin@SplunkServer:~$ sudo nmcli connection add type ethernet ifname ens19 con-name soc-lab ipv4.method manual ipv4
addresses 192.168.50.10/24
[sudo] password for lab_admin:
connection 'soc-lab' (0ee0d2d5-d2d4-43aa-ad15-fbbde20e69fd) successfully added.
lab_admin@SplunkServer:~$ sudo nmcli connection up soc-lab
connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/12)
lab_admin@SplunkServer:~$ ip addr show ens19
ens19: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether bc:24:11:ec:dd:12 brd ff:ff:ff:ff:ff:ff
    altname enp0s19
    inet 192.168.50.10/24 brd 192.168.50.255 scope global noprefixroute ens19
        valid_lft forever preferred_lft forever
    inet6 fe80::b7f:d21b:aa4b:3c25/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
lab_admin@SplunkServer:~$ ip route
default via 192.168.5.1 dev ens18 proto dhcp src 192.168.5.106 metric 100
192.168.5.0/24 dev ens18 proto kernel scope link src 192.168.5.106 metric 100
192.168.50.0/24 dev ens19 proto kernel scope link src 192.168.50.10 metric 101

```