

# AVANT SPACE

## PROPELLION SYSTEMS

---



**GT-50 RADIO-FREQUENCY ION THRUSTER**

Avant – Space Systems LLC

*Aim of the project: boosting economic effectiveness for satellite missions and supporting commercial market development.*

# SMALL SATELLITE MARKET TRENDS

Market assessment*		[2006-2015]	[2016-2025]
Global market	Small satellites launched, pcs.	275	2 972
	Market value, \$ million	1 250	9 240

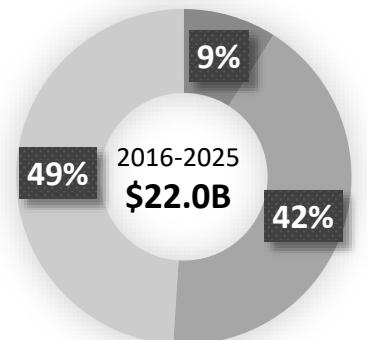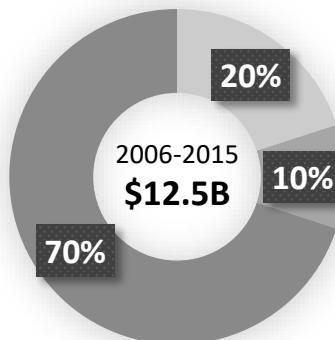

Market sector:

- Military
- Commercial
- Civil


## Commercial satellite constellation plans

Name	Applications	Number of satellites, pcs.	Satellite mass, kg	Orbit, km
OneWeb	Communication	≈ 700	> 150	800 – 950
TerraBella (Google)	EO	24	≈ 120	≈ 500
Orbcomm-OG2	Communication	119	172	≈ 750


\* [<http://www.euroconsult-ec.com/shop/space-industry/82-smallsats.html>]

## Small satellite maneuvers in constellation:

- Orbit raising
- Phasing
- Station-keeping
- Deorbiting

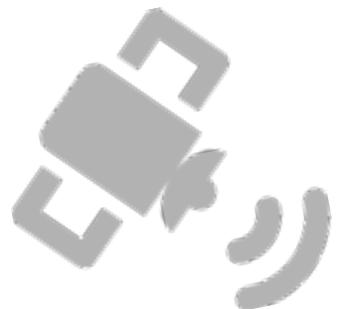

▪ Orbit	400 – 950 km
▪ SC mass	50 – 400 kg
▪ Power capability	200 – 500 W
▪ Lifetime	15 years



On board propulsion system is essential for satellite constellations with given parameters.

Thus small satellite market development will increase demand for satellite thrusters. As a result, small satellite thruster market may grow tenfold, as will small satellite market.

## GT-50 ION THRUSTER

Compact and lightweight thruster with low consumption might be used in space missions with low power capabilities and limited volume available.



Lightweight and compact



High specific impulse



High precision maneuvers




GT-50 can be easily integrated into a spacecraft along with the subsystems developed by Avant Space:

- Neutralizer
- Power processing and control system
- Propellant supply and storage system
- Mechanical and thermal interfaces

# GT-50 PROPULSION SYSTEM

Mass / dimensions	< 8 kg / 100x200x300 mm <sup>3</sup>
Power consumption	180/240 W
Thrust	5/7 mN
Specific impulse	> 2000 sec
Propellant stored (Xe)*	400 g
Delta-V* (for a 120 kg spacecraft)	65,5 m/s

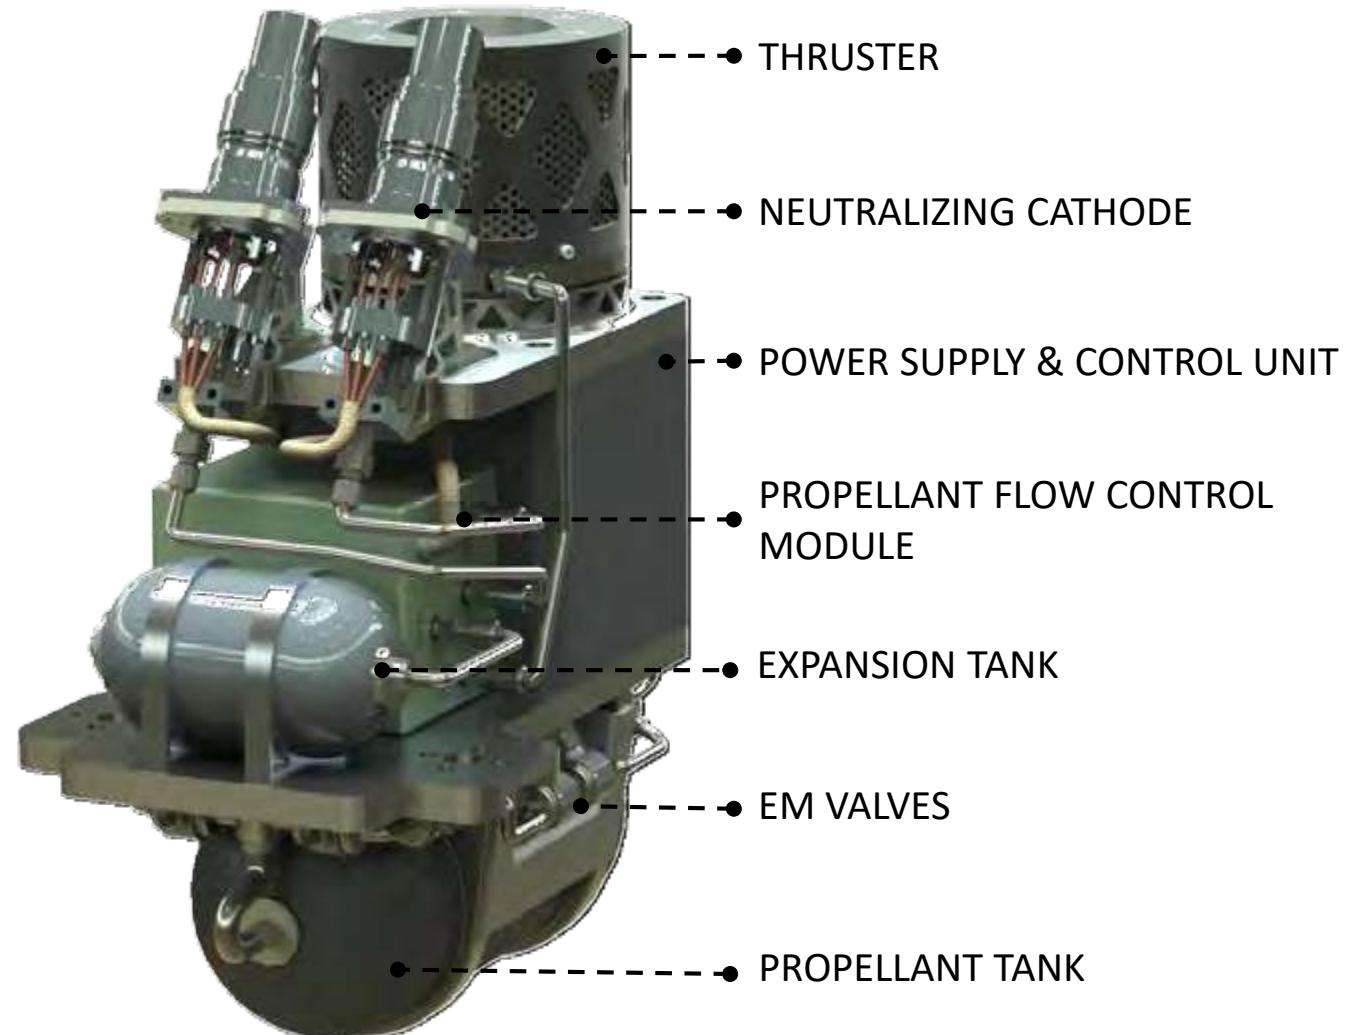

\* Can be modified depending on the specific mission requirements

# ROAD MAP



Lab model



Engr. model



Flight model

## Stage 1

**GT-50 lab model** designed,  
manufactured, and tested

Target missions  
identified

Contacts with the industry  
established

2017

## Stage 2

Working processes  
modelled

Direct  
measurement  
of thrust

**GT-50 engr. model** and  
subsystems designed,  
manufactured, and tested

**GT-50 flight model**  
preliminary design and  
SoW

2019

## Stage 3

**GT-50 flight model** designed,  
manufactured, and tested

Production line establishment and test  
launch

2020

# TEAM

- Aerospace specialists (9 people) – previously employed with Lavochkin NPO, MAI, Bauman MSTU, High Temperatures Institute, and others
- Science, engineering, sales and administrative experience
- Many of the members of the team are PhDs, conduct researches and teach in top universities in Russia

---

## — KEY MEMBERS OF THE TEAM —



ANTON  
OSSOVSKIY

FOUNDER AND CEO



IANA  
KHARLAN

SENIOR PROJECT MANAGER



RODION  
AYUPOV

SYSTEMS ENGINEER



IVAN  
CHERNIY

LEAD ENGINEER



# AVANT SPACE

## PROPELLION SYSTEMS

Contact person:  
E-mail:  
Tel.:

Iana Kharlan  
[kharlan@avantspace.com](mailto:kharlan@avantspace.com)  
+7 926 529 21 34

# GT-50 THRUSTER FOR SMALL SATELLITES: MARKETABILITY ANALYSIS

---

Technical report

## Contents

State of the art review.....	3
GT-50 thruster target parameters.....	5
SPT vs RF ion thruster comparison.....	7
The main challenges in SPT development.....	8
The main challenges in RF IT development.....	9
References .....	10

## State of the art review

If one were to compare prospective solutions in the area of electric propulsion for small satellites, the mass range from 30 to 1000 kg would be of particular interest. For such comparison, we will use the list of all small satellites launched since 2000 that equipped with electric propulsion systems [1].

Let us then exclude the thrusters with specific impulse less than 600 sec, thus studying only high specific impulse class. Such problem setting is due to the trend of using high-impulse thrusters in space missions for reducing initial mass and thus improving commercial efficiency of the mission.

Table 1 shows thrusters launched on 30-1000 kg satellites with specific impulse more than 600 sec.

*Table 1 – Modern electric thrusters for satellites*

Name	Satellite (Launch date)	Power, W	Thrust, mN	Isp, sec	Type	Prop. System mass, kg
HEPS [2]	Deimos-2 (19 Jun 2014)	300	7	1000	Hall thruster	> 13
SPT-50 [3]	Kanopus-V (22 Jul 2012)	317	14	850	Hall thruster	25
APPT-45-2[4]	MKA-FKI PN2 (8 Jul 2014)	75-150	1.44-2.9	1100	Pulsed plasma thruster	10.5
BHT-200[5]	TacSat-2 (16 Dec 2006) FalconSat-5 (20 Nov 2010)	200	12.8	1390	Hall thruster	No information
MIPS[6]	PROCYON (3 Dec 2014) Hodoyoshi 4 (19 Jun 2014)	27	0.2	740	Ion thruster	8.1

As of today, Busek Co. Inc. is a renowned leader in electric propulsion development. It is evident, that performance of the company's Hall thruster BHT-200 is far better than that of the competitors. Let us study Busek Co. Inc.'s planned missions (Table 2).

*Table 2 - Prospective electric thrusters for satellites*

Name	Satellite (Launch date)	Power, W	Thrust, mN	Isp, sec	Type	Note
BHT-200-I [7,8]	iSat (launch planned on 2018, s/c undergoes preflight tests )*	200	12.8	1390	Hall thruster	Fig. 1
BIT-3[9]	Lunar IceCube (planned launch on SLS, s/c ready for preflight tests )	75	1.15	2100	RF Ion thruster	Fig. 2

\*It is worth mentioning that this mission is already third demo mission for BHT-200 thruster, but the manufacturer publishes neither first flight test results, nor the essence of decisions made after the flight.

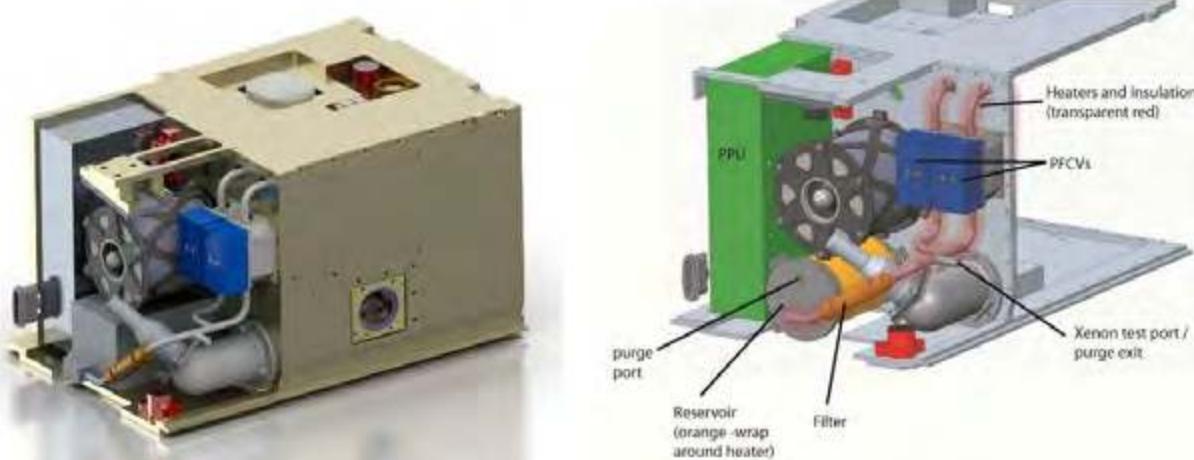
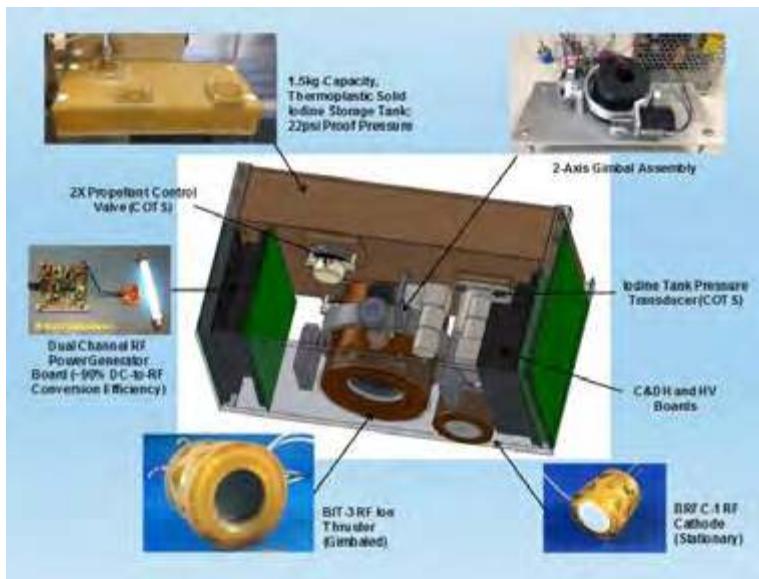


Fig. 1 - iSat - 12U Cubesat (23.5 kg)

Unprecedented performance

- 180x88x102mm system envelope

- 3.0kg wet, 1.5kg propellant loading

Rad-tolerant, miniaturized PPU

- 28-37V unregulated input, RS-485 comm

- Designed for 55-75W power draw

Fig. 2 –Lunar IceCube's thruster

Table 2 shows vast possibilities in size reduction for Hall thrusters, as well as RF ion thrusters. GT-50 thruster developed by Avant-Space Systems represents the latter. Cutting-edge microelectronics allows solving integration problems, as well as the problem of RF-generator size for powering ion thruster's RF antenna.

## GT-50 thruster target parameters

Modern small satellites for telecom and Earth observation normally use low operational orbits, and typically have mass from 50 to 300 kg.

For these types of missions, a series of ballistic analyses was carried out, which established, that for station-keeping of such spacecraft 5-7 mN of thrust and 1500 seconds of Isp should be satisfactory. It is also important to try to reduce the propulsion system's power consumption, because the capabilities of satellites' EPS are quite limited. Having analyzed the marketability, and estimated the basic technology, we came up with the target parameters for the GT-50 thruster (Table 3).

*Table 3 - GT-50 thruster target parameters*

Model	Power, W	Thrust, mN	Isp, sec	Propellant	Size	Mass, kg	Efficiency, %
GT - 50	180/240	5.0/7.0	2000+	Xe	Up to 4U Cubesat	Up to 8	> 70

It is worth mentioning that using this thruster aboard satellites heavier than 300 kg is also possible, but requires more than one ion thruster within the propulsion system.

In 2017, a number of experimental works was done to establish the optimal configuration of the ion thruster. As a result, the parameters were obtained that are shown in Table 4. High efficiency and discharge stability were reached by applying external magnetic field with parameters corresponding to excitation of resonant waves in plasma. This is what is different in our thruster compared to analogues.

*Table 4 – GT-50 Laboratory model parameter measurement results*

Model	Beam current, mA	Power, W	Thrust, mN	Isp, sec	Propellant	Discharge chamber size
GT - 50	100/150	155/290	5.0/9.1	2700/3400	Xe	50 mm × 50 mm



*Fig 3 - GT-50 lab model vacuum chamber test*

The main competitors, as shown in the first section of the present document, are the Hall thrusters. The more detailed comparison of the Hall thrusters vs. RF ion thrusters is in the section below.

## SPT vs RF ion thruster comparison

Table 5 shows results of comparing the two concepts.

*Table 5 – SPT vs RF ion thruster comparison*

	Performance feature	Influence on the s/c	Lifetime	Subsystem mass	Reliability
RF IT	Key advantage is high ISP (up to 3000 sec).	Beam divergence angle no more than 10°.	20000+ hours	The subsystem mass is defined mostly by technical excellence of the whole system, and may be connected with the “ion source + neutralizing cathode” system choice, the whole logic of the power supply and control system, etc.	
SPT	Key advantage is relatively high absolute thrust given low power consumption	Beam divergence angle reaches 45°, which influences the outline of the whole mission which uses this thruster type	Up to 1000 $\mu$ (for low-power thrusters). This low value is due to ablation of the thruster structure, which leads to unstable performance and may diverge the thrust vector from the nominal.	For the developed systems with little to no flight heritage, there is no way to correctly estimate reliability parameters.	

## The main challenges in SPT development

For Hall thruster, decreasing of the efficiency and lifetime with reducing power consumption is a very well-known problem [10-14]. Much experimental data exists that shows that decreasing power consumption reduces the thrust efficiency in classic SPTs so that it does not exceed 30%. A typical dependency of thrust efficiency vs. power consumption for SPT-25, 35, 50, 60, 70, 100, developed by Fakel OKB, is shown in fig. 4. First point in fig. 4 represents SPT-25, the last one – SPT-100.

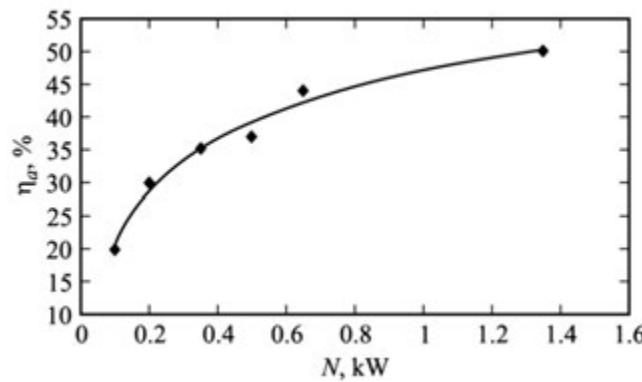


Fig. 4 – Thrust efficiency vs power input in SPT [15]

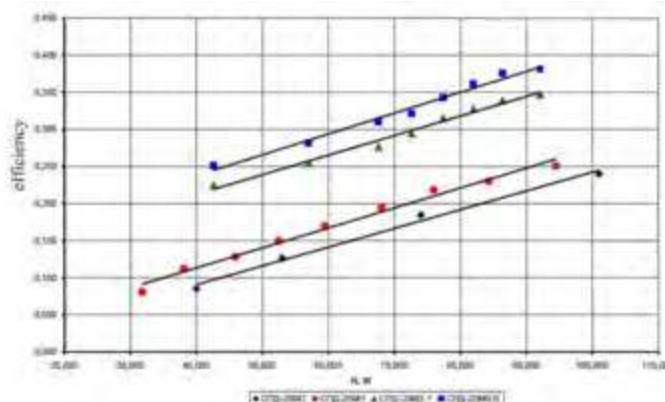


Fig. 5 – Experimental curves of efficiency vs power for low-power SPT [13]

The main reason of performance fall is believed to be bad surface area to volume ratio of the discharge chamber [12, 14].

Table 6 – Low power SPT parameters comparison

Name	Power, W	Thrust, mN	Isp, sec	Eff-cy, %	Ref.
CAM200	250	14	1570	43	[11]
XHT-200	38	1	950	5-10	[12]
SPT-20M	100	4	1400	38	[13]
Low power hall thruster, Japan	50	2	600	5-13	[14]

In addition, reducing the discharge chamber volume leads to a significant lifetime reduction due to the ablation in the discharge channel. This may lead to unstable performance and may diverge the thrust vector from the nominal.

### The main challenges in RF IT development

The most complicated part of the RF IT are the gridded electrodes of the ion-optical system (IOS). For improving the reliability of the IOS of an RF ion thruster, several approaches exist.

Firstly, IOS electrodes can be made of a material with low sputtering yield: molybdenum alloys, pyrolytic graphite, RCC composite materials [18]. As of today, the technologies have been worked out for making electrodes of all the mentioned materials. RCC electrodes, for example, have shown to withstand operating for 20000+ hours [17, 20].

In addition, there exists software that allows precise calculation of different material electrode erosion versus operating time [17, 19, 20, and 22]. The information about the erosion dynamics allows reducing destructive effect by tuning electrode voltage [22].

Also, for protecting the thruster from electrode short-circuiting, a technique exists of cleaning them. It allows removing the short circuit of the electrodes caused by sputter by heating the electrodes with pulse current [16]. The measures described are utilized in modern ion thrusters.

Another complex element of an RF IT is the onboard RF-generator. Its architecture must provide simple integration into the satellite, minimum heat dissipation and extremely fast adaption with respect to changes of the plasma. It is known, that this problem has been successfully solved in the BIT-3 thruster.

Avant – Space Systems LLC's specialists are also developing a modern onboard RF-generator. The generator operates as a resonance pulse power source. This technology is known to be the most energy-efficient, because it minimizes the losses in transistors during switching. By using gallium-nitride MOS transistors, we have reached a very compact size of the generator, as well as low heat dissipation, which is important in space. The prototype is equipped with a fast 100MSPS analogue-digital converter, which allows registering currents and voltages of the inductor with a very high resolution. The company's specialists are planning to apply for a patent for this solution after the test cycle of the lab model is finished.

---

## References

1. [https://en.wikipedia.org/wiki/List\\_of\\_spacecraft\\_with\\_electric\\_propulsion](https://en.wikipedia.org/wiki/List_of_spacecraft_with_electric_propulsion)
  2. <http://spaceflight101.com/spacecraft/deimos-2/>
  3. <http://jurnal.vniiem.ru/text/126/19-24.pdf>
  4. N.N. Antipov, G. A. Popov Ablative Pulsed Plasma Thrusters R&D in Russia since the Beginning of the 90s - IEPC-2013-68
  5. <https://directory.eoportal.org/web/eoportal/satellite-missions/t/tacsat-2>
  6. <https://digitalcommons.usu.edu/cgi/viewcontent.cgi?article=3278&context=smallsat>
  7. <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20170003035.pdf>
  8. <https://www.hou.usra.edu/meetings/leag2014/presentations/Dankanich.pdf>
  9. <https://digitalcommons.usu.edu/cgi/viewcontent.cgi?article=3471&context=smallsat>
  10. E. Ahedo and J.M. Gallardo Scaling down hall thrusters – IEPC-2003-104
  11. D. Lev Recent development of the CAM200 low power hall thruster – IEPC-2017-247
  12. M. Andrenucci, M. Berti, L. Biagioni, U. Cesari and M. Saverdi Characteristics of the XHT-100 low power hall thruster prototype
  13. A. V. Loyan and T. A. Maksymenko Performance investigation of SPT-20M low power hall effect thruster – IEPC-2007-100
  14. N. Yamamoto, T. Ezaki and H. Nakashima – Thrust performance of a low power hall thruster - Trans. JSASS Aerospace Tech. Japan Vol. 10, No. ists28, pp. Tb\_9-Tb\_12, 2012
  15. А. И. Бугрова Экспериментальные исследования СПД малой мощности – Письма в ЖТФ, 2014, том 40, вып. 2.
  16. J. Huddleson, J. Brandon-Cox An overview of the T6 gridded ion propulsion system
  17. H. J. Leiter The «New grid system for ion thruster engines» technology project – results and conclusion – IEPC-2005-132
  18. D. M. Goebel and I. Katz Fundamentals of Electric Propulsion: Ion and Hall Thrusters
  19. J. Polk, J. Brophy, W. Shih Large Carbon-Carbon Grids for High Power, High Specific Impulse Ion Thrusters
  20. H. Kuninaka, I. Funaki, K. Nishiyama Result of 18,000-hour Endurance Test on Microwave Discharge ion Thruster Engineering Model - AIAA 2000-3276
  21. W.G. Tighe, Kuei-Ru Chien XIPS ion thrusters for small satellite applications
  22. J. Polk, W. Tighe Evaluation of 25-cm XIPS Thruster Life for Deep Space Mission Applications – IEPC-2009-152
-

# Exploratory Testing of a Radio-Frequency Thruster for Small Satellites

IEPC-2017-425

*Presented at the 35th International Electric Propulsion Conference  
Georgia Institute of Technology • Atlanta, Georgia • USA  
October 8 – 12, 2017*

E. Kralkina<sup>1</sup> and I. Zadiriev<sup>2</sup>  
*Lomonosov Moscow State University, Moscow, 119991, Russia*

I. Kharlan<sup>3</sup>  
*Avant – Space Systems Ltd., Moscow, 143026, Russia*

**Abstract:** This paper discusses the process of developing an RF gridded ion thruster. Possible applications of the thruster are discussed and an analysis is conducted in order to determine the optimal parameters of a thruster. In the second part of the paper, an approach taken to the thruster design is discussed. A series of experiments were conducted in order to determine the optimal layout of the thruster required to satisfy the needs of possible space missions.

## Nomenclature

$C_i$	= ion cost calculated with RF power
$C_i^*$	= ion cost calculated with power deposited into plasma
$I$	= specific impulse
$i_b$	= ion beam current
$L$	= discharge chamber length
$M_0$	= initial mass of the spacecraft
$M_p$	= mass of the propellant used
$P_{gen}$	= RF power
$P_{pl}$	= power deposited into plasma
$R_{ant}$	= RF antenna resistance
$R_{pl}$	= equivalent plasma resistance
$\Delta v$	= delta-v required for maneuvers

## I. Introduction

DURING the past stages of spaceflight development precise satellite positioning and station-keeping were mainly done with monopropellant or bipropellant chemical thrusters. One of its main disadvantages is their low specific impulse, which led to reduced lifetime and required storing excessive amounts of propellant onboard. However, at the same time, the lifetime of electronics was also limited due to low reliability and low radiation resistance, thus the reliability requirements at high mission lifetimes could not be met anyway. Nowadays, as there are electronics capable of operating in space for dozens of years and compact to the point where adding redundant computers is of no serious concern, the question of possible prolonging mission lifetimes reemerges. Thrusters developed now with high specific impulse are the way to meet these new requirements. However, among these

<sup>1</sup> Leading Researcher, Physical department, ekralkina@mail.ru.

<sup>2</sup> Researcher, Physical department, s\_333\_52@mail.ru.

<sup>3</sup> Lead engineer, kharlan@avantspace.com.

thrusters there are also various subtypes with thrusts, impulses, and power consumptions significantly different from each other.

For proper assessment of possible applications of a thruster in various space missions, a number of hypotheses was studied concerning the shape of the future missions that may require a thruster like the one being developed. These possible missions were modelled, and power, time and propellant consumption were studied for various orbital maneuvers these missions might perform. It was then concluded whether the missions might require specifically a high-impulse ion thruster. The first part of this paper describes the results of this analysis.

Gridded ion thruster have been being developed for more than 50 years now<sup>1,7</sup>. They always contain such parts as discharge chamber, where the plasma is generated that becomes the source of ions; and ion-optical system for extracting and accelerating ions. The fact that these parts work independently is a distinguishing feature of gridded ion thrusters.

RIT-class thrusters originated from the University of Giessen in the 1960s<sup>2</sup> works on the principle of inductive RF discharge. An inductor (antenna) mounted on a surface of the discharge chamber ignites and maintains the discharge with relatively high plasma density and modest level of power coupling. Nowadays, to improve thrusters of this class it is suggested to use an RF discharge of lower frequencies<sup>3</sup>. This would decrease the capacitive component of the discharge significantly and make RF generator less complex.


Another approach, which is described in the second part of the present paper, is to use an external magnetic field allowing optimizing the power coupling to plasma and raising plasma density at given RF power values. To study feasibility of this approach, an attempt was made to analyze advantages and disadvantages of operational processes based on modified inductive RF discharge. In other words, this paper describes an attempt to answer a question about which layout is preferable for different conditions of thruster operation. In order to do this, thruster parameters of a thruster with a purely inductive RF discharge were compared to those of a thruster with external magnetic field applied.

## II. Thruster Applications: Feasibility Assessment

### A. Station-keeping

To evaluate orbital perturbations precise modelling of satellites' motion was conducted. Among all the perturbations, naturally, the atmospheric drag is the most significant.

It can be shown that a 12 mN thruster with 3500 sec specific impulse can be used for station-keeping (mainly for the semi-major axis) in small spacecraft with the mass up to 150 kg. This sort of spacecraft is now commonly used in remote sensing. A case was studied when a spacecraft is in a circular sun-synchronous orbit with an altitude of 500 km. A variation of the semi-major axis for this case is shown in Fig. 1.

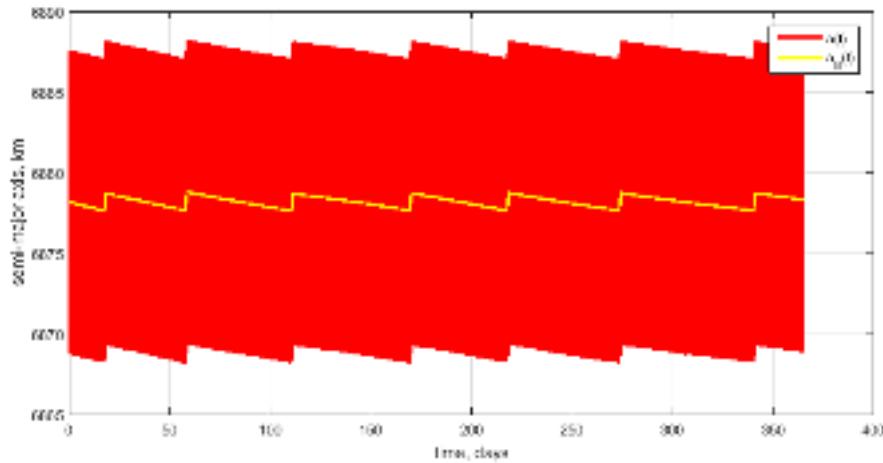

**Figure 1. Orbit semi-major axis variation over a year.**

*Red line: actual value; yellow line: mean value. Each jump upwards (rather abrupt in this time scale) represents a station-keeping session.*

The spacecraft mass is reduced as the propellant is used for each station-keeping session. This is illustrated in Fig. 2.

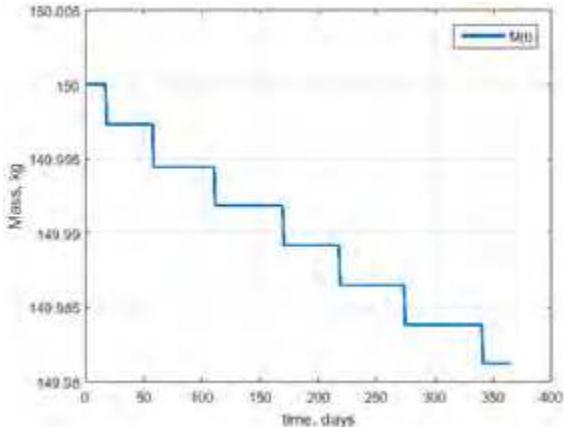


Figure 2. Spacecraft mass variation over a year.

Figure 2 shows that the ion thruster used about 0.018 kg of propellant over the year. In case of such spacecraft it can help save up to 6 kg of mass over 10 years, and that is station-keeping only.

### B. Deorbiting

As the global aerospace community becomes more and more concerned with the space debris problem, one can infer that in the nearest future it will be required by law to deorbit spacecraft after the end of its mission. Even today, many manufacturers of LEO satellites guarantee that their satellites will be deorbited in 10 to 15 years after the end of their missions.

The analysis done also shows the advantages an ion thruster has in comparison to a chemical thruster when a spacecraft is deorbited. These advantages are also mainly due to its high specific impulse. If a spacecraft is to be deorbited, the higher its orbit, the more is the need to use a thruster with a high specific impulse, consuming significantly less propellant. Using a low impulse for deorbiting thruster can require up to 15% of the spacecraft mass in propellant, which is not satisfactory.

If, say, a 150 kg spacecraft in a circular 800 km orbit is to be maneuvered to 500x800 km orbit to speed up the orbit decay, the ion thruster consumes only 338 g of propellant, whilst a hypothetical chemical thruster would use 11.37 kg. If the spacecraft is to re-enter immediately (meaning the perigee should dip into the atmosphere at 150-200 km), the chemical thruster would consume more than 21 kg.

### C. Non-coplanar orbit phasing

The emerging of thrusters with very high specific impulse opens new possibilities in the area of non-coplanar orbit changes. It is applicable in the situations such as described in Ref. 4, where there is a possibility to launch many satellites in one launch, only not all of them are destined for the same RAAN. To avoid purchasing more launches it might be feasible to perform non-coplanar maneuvering instead. A possible constellation, such as described in Ref. 4 is illustrated in Fig. 3.

In this case, direct maneuvers to change RAAN are not optimal. Instead, the following strategy might be applied:

1. The launch vehicle delivers a cluster of satellites into the phasing orbit, with inclination and altitude slightly different from those of the target orbit;
2. First group of satellites, which is meant to be delivered into the first plane, jettisons from the cluster;
3. The detached group then begins a maneuver towards the target orbit (changing inclination);

Now, to estimate the delta-v used over one year, using Tsiolkovsky rocket equation (Eq.1):

$$\Delta v = I \cdot \ln \frac{M_0}{M_0 - M_P} = 4.12 \text{ m/s} \quad (1)$$

Now, say a hypothetical chemical thruster is used instead. The specific impulse of such a thruster can be about 100 sec (as has Low Power Resistojet produced by SSTL). Then, inverting the Eq.1 (Eq.2):

$$M_P = M_0 - \frac{M_0}{\exp(\frac{\Delta v}{I})} = 0.629 \text{ kg} \quad (2)$$


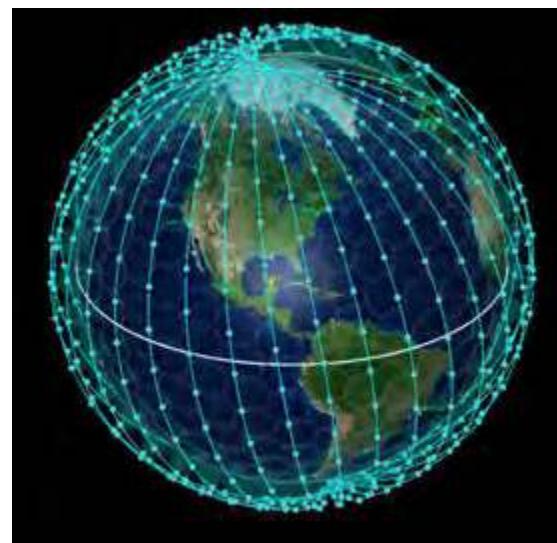


Figure 3. A constellation of 510 spacecraft.

- The remaining satellites fly passively until the RAAN secular drift brings them to the desired position, where they perform the same maneuver operations;
- After reaching the target orbit, each satellite changes its semi-major axis so that perigee altitude remains equal to the radius of the operational orbit, and apogee altitude is slightly bigger than that. Thus, the difference in orbital periods cause the satellite's phase to lag, and therefore it is possible to deliver the satellite into its operational point (this is in-orbit phasing).

This strategy is illustrated in Fig. 4.

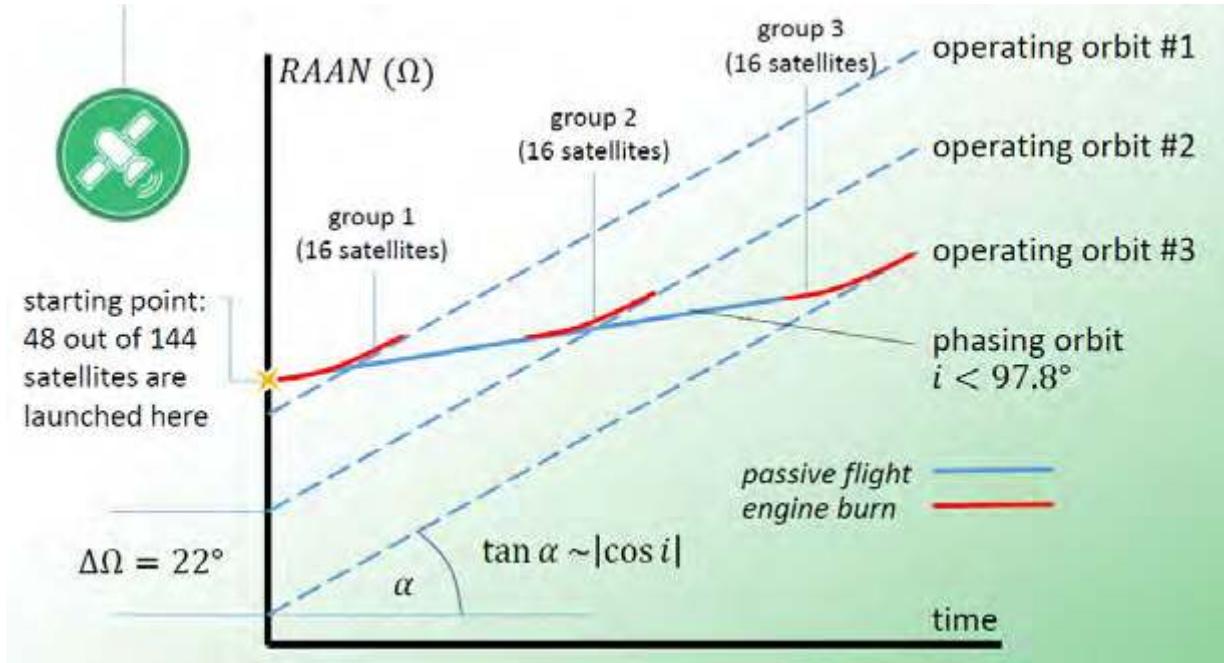

**Figure 4. Non-coplanar orbit phasing strategy.**


According to this scheme from Ref. 4, a modelling was conducted for a number of satellites launched to one point but destined for different RAANs. The RAAN over time for three such satellites is shown in Fig. 5.

For 700 kg satellites, the amount of propellant used here is about 15 kg. We can of course vary the inclination difference to save more propellant, but this will also prolong the overall time consumed by the maneuvers.

It is also technically possible to do the same with chemical propulsion, and that would be faster due to the higher thrust it provides, but the mass consumed (up to  $\frac{1}{4}$  of initial spacecraft mass) makes this strategy questionable, more so considering that the station-keeping and deorbiting might then consume the same mass on top of it.

Table 1 shows how the parameters differ when phasing a constellation of 700 kg satellites into three planes, with the RAAN difference between neighboring planes of  $22.25^\circ$ . It shows thrust efficiency, propellant consumption, and time spent to reach the operating orbit by the second and the third spacecraft. The parameters were compared for the GT ion thruster developed by Avant-Space Systems, SPT Hall thrusters and chemical thrusters typically used in modern upper stages.

It is worth mentioning that the problem of such phasing is not trivial, and to this moment

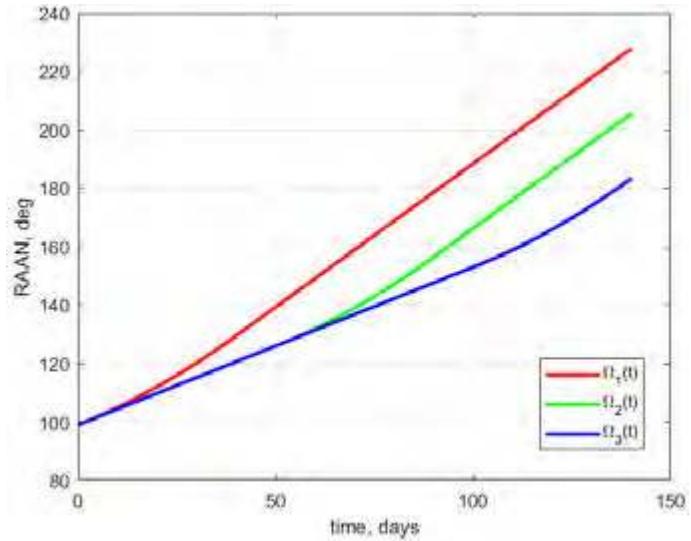

**Figure 5. RAAN evolution for three satellites maneuvering to their positions.**

no constellations were launched where this strategy would be applied. Nevertheless, at the same time, satellite manufacturers concede that in the nearest future non-coplanar orbit transfer will be more common, and those

**Table 1. Maneuvers parameters for different propulsion systems.**

	Thrust efficiency, W/mN	Propellant mass, kg	Time, 2 <sup>nd</sup> plane, days	Time, 3 <sup>rd</sup> plane, days
GT	25	15	105	158
SPT	18	35	90	140
Chemical	0	132	49	99

designing constellations now consider it more. The spacecraft energy efficiency of 5 W/kg used in the models is an optimistic estimate of the future spacecraft power capabilities. If we instead consider the energy efficiency of modern spacecraft that were not designed for supporting power consuming payload of performing such maneuvers with electric propulsion, then the non-coplanar phasing problem with satisfactory maneuver times cannot be solved at all.

It is worth mentioning that the problem of such phasing is not trivial, and to this moment no constellations were launched where this strategy would be applied. Nevertheless, at the same time, satellite manufacturers concede that in the nearest future non-coplanar orbit transfer will be more common, and those designing constellations now consider it more. The spacecraft energy efficiency of 5 W/kg used in the models is an optimistic estimate of the future spacecraft power capabilities. If we instead consider the energy efficiency of modern spacecraft that were not designed for supporting power consuming payload of performing such maneuvers with electric propulsion, then the non-coplanar phasing problem with satisfactory maneuver times cannot be solved at all.

#### D. Assessment summary

The calculations show that, generally speaking, for the spacecraft with relatively low area to mass ratio, using electric propulsion for station-keeping is not critical. Only for the low altitudes such as 500 km, where all-chemical mission can blow up to 10% of the initial satellite mass for station-keeping in 10 years it might be feasible to use high impulse thruster, such as ion thruster, that will consume 1% instead. But even in this case other factors also come to play when considering the architecture of a possible missions:

1. Cost-efficiency: it might be more feasible to launch additional 5 kg of propellant than to buy an expensive ion thruster;
2. Constructive complexity: the mass saved by the high impulse might be negated by big-sized subsystems of an ion thruster (control unit, RF-generator, etc.);
3. Reliability (redundancy is more possible with constructively simple chemical thrusters).

When talking about deorbiting, on the contrary, the higher the altitude, the clearer it is that a thruster with higher specific impulse is needed. If chemical propulsion is used, deorbiting can consume 10 to 15 percent of the total spacecraft mass.

The analysis conducted shows a possible range of the thruster parameters that is suitable for possible future spacecraft. These parameters are shown in Table 2.

**Table 2. Requirement ranges of the thruster parameters.**


SC mass, kg	Maneuvers	Power, W	Thrust, mN	Isp, sec
< 150	Station-keeping	< 300	< 12	> 1000
< 150	Deorbiting	< 300	< 12	> 1500
< 800	Station-keeping	< 1000	< 60	> 1000
< 800	Deorbiting	< 1000	< 60	> 1500
< 800	In-orbit and non-coplanar phasing	< 3000	< 120	> 3000

### III. Experimental Analysis

#### A. Experimental setup and measurement procedure

In this work, a stainless steel vacuum chamber was used, 800 mm wide, 800 mm high and 750 mm deep. The air was pumped out by Korea Vacuum Limited DRP-1300 fore pump and KYKY TCDP-11 turbomolecular pump.

A schematic of the laboratory model of the ion thruster is shown in Fig. 6.

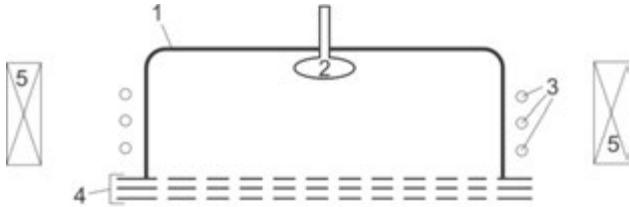

**Figure 6. Ion thruster scheme.**

1 – quartz discharge chamber, 2 – gas distributor, 3 – solenoidal antenna, 4 – ion-optical system, 5 – electromagnet.

vacuum chamber is illustrated in Fig. 7.

For ignition and maintaining the discharge in the thruster, antenna clips are connected to the RF generator through the matching box. The setup is equipped with Advanced Energy radio-frequency generators with frequencies of 2, 4 and 13.56 MHz. Power output may be 0-1000 W.

The automatic matching system consists of two variable vacuum capacitors and an inductor. In the whole range of discharge parameters, the matching system used was able to produce the reflected power of less than 10% of the forward power.

To produce an ion beam the voltage is applied on the electrodes of the ion-optical system, according to an “acceleration-deceleration” pattern. Powering up the electrodes is done with PSPLASMA SDC1521D5PR and SDC102D1R power supply units.

Filling the thruster with propellant (Xenon) was done with the Celerity FC-280SAV flowmeter.

The experiments were conducted with the xenon flow of 3-10 sccm, with the pressure in the vacuum chamber no more than 4·10<sup>-4</sup> Torr. External magnetic field density was in range of 0-50 Gs. The lengths of discharge chambers in the test were 3, 4, 5, 7, and 10 cm.

The experiments were conducted under the following pattern:

1. Xenon was injected into the thruster model, and the discharge ignited;
2. +1000 V potential was applied to the emitting electrode of the IOS, the accelerating electrode potential was chosen to minimize the leakage current;
3. A dependency was measured between the ion beam current and the RF generator power.

The methods used to measure the power coupled to plasma are described in Ref.5.

With the measured values of  $P_{gen}$ ,  $P_{pl}$  and the ion beam current  $i_b$ , two values of ion “cost” were acquired,  $C_i$  and  $C_i^*$ , as show Eq.3 and Eq.4 below.

$$C_i = P_{gen}/i_b \quad (3)$$

$$C_i^* = P_{pl}/i_b \quad (4)$$


The ion thruster consists of a discharge chamber, a gas distributor, a radio-frequency power input unit, an ion-optical system (which itself consists of three perforated electrodes), and a magnetic system.

The RF power input unit is a triple-coil solenoidal antenna, located on the side surface of the discharge chamber. The antenna is made of a copper tube with a diameter of 3 mm.

The ion-optical system (IOS) consists of three perforated electrodes (emitting, accelerating and decelerating) with 60% transparency,

The magnetic system consists of one or two electromagnets. The magnets create a longitudinal magnetic field in the discharge chamber.

The way the ion thruster is mounted in the

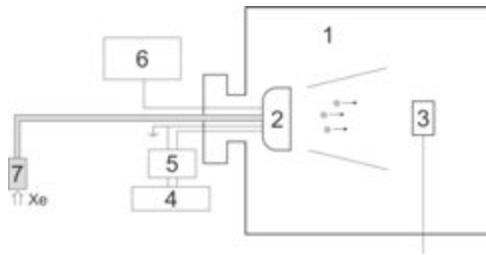

**Figure 7. Experimental setup scheme.**

1 – vacuum chamber, 2 – ion thruster laboratory model, 3 – energy analyser, 4 – RF power source, 5 – matching box, 6 – DC power supply for ion-optical system, 7 – ball-type flowmeter.

## B. Test results

First, the results of optimizing the discharge in the thruster model with inductive discharge with no magnetic field will be discussed. Then, how the thruster parameters change after applying the external magnetic field will be studied.


Figure 8 shows the measured RF generator power needed for acquisition of the given ion beam current versus the xenon flow.

One can see that the graphs are quite similar to those acquired in Ref. 6. When the flow is high, the power  $P_{gen}$  needed for acquisition of the specific  $i_b$  weakly depends on the xenon flow. On the other hand, with less flow, the values of  $P_{gen}$  raise steeply.



The experiments show that the values of  $P_{gen}$  needed for the required ion beam current depend heavily on the discharge chamber length and the generator's operating frequency. Figure 9 shows the ion current  $i_b$  obtained from the thruster model, and the  $C_i = P_{gen} / i_b$ , versus the length of the discharge chamber. The modes chosen for comparison correspond to the flow of 4 and 5 sccm and the power of 110 W. This power  $P_{gen}$  is close to the operating point of the RIT-10 thruster Ref. 7. The flow of 4 sccm that is chosen is slightly less than that of the RIT-10.

However, when analysing the results one must consider that there tests were conducted in a discharge chamber of a smaller size, and while evaluating the thruster's parameters the reverse flow of atoms through the holes in the IOS from the vacuum chamber to the discharge chamber was not taken into account. It is also worth mentioning that while working with a discharge chamber of the length less than 5 cm and frequencies less than 13.56 MHz, there were difficulties encountered in the ignition and supporting a stable discharge. In this manner, a stable discharge with operating frequencies of 2 and 4 MHz and with corresponding discharge chamber lengths less than 7 and 4 cm has not been achieved.


Before moving to the obtained results, it is worth mentioning the dependency of the efficiency of RF power coupling to plasma shown in Fig. 10. It can be seen that, given the conditions of the experiments, just above half of the power generated was consumed by the plasma, and the rest was dissipated in external circuit. It is notable that the values of  $P_{pl}/P_{gen}$  weakly depend on the chamber length and generator power. The latter indicates that when the operating frequency changes, the losses in the external current raise proportionally to the equivalent resistance of the plasma.

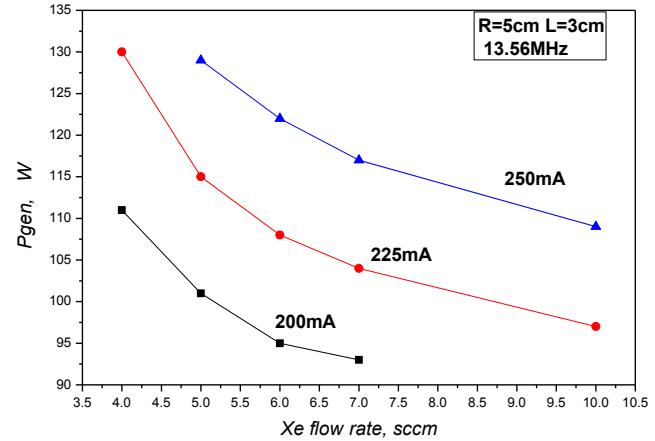

**Figure 8. RF generator power needed for acquisition of the given ion beam current versus the xenon flow.**

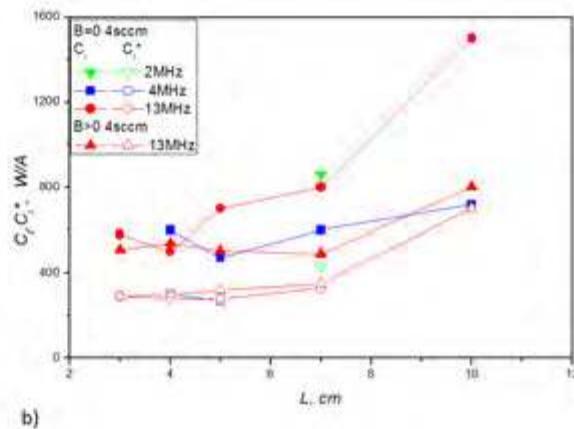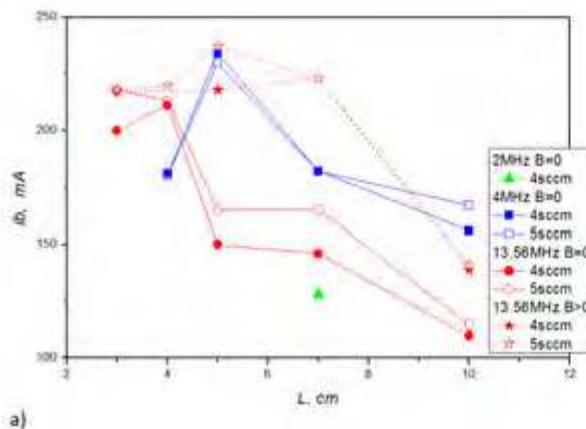

**Figure 9. Ion beam current (a) and ion cost (b) obtained with xenon flow of 4 sccm and the generator power of 110 W with different length of discharge chamber.**

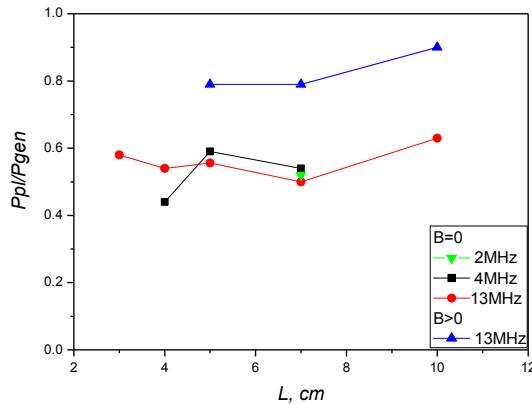

**Figure 10. Efficiency of the radio-frequency power coupling to plasma vs the length of the discharge chamber.**  
Xenon, 4 sccm,  $P_{gen} = 110\text{W}$ .

were close to those distinctive to the RIT-10<sup>7</sup>. However, one should not forget that given the experimental conditions a significant part of the power was dissipated in external circuit. Figure 9 (b) shows the ion cost  $C_i^*$ , calculated basing on the power deposited into plasma,  $C_i^* = P_{pl} / i_b$ . Comparing  $C_i$  and  $C_i^*$  indicates that there is a way to improve the thruster parameters significantly by increasing the percentage of the power consumed by the plasma. It is clear that in order to achieve energy-efficient thruster operation modes it is essential that, firstly, the power loss in the external current (and so Rant) is minimized, and, secondly, that the discharge process is so organized that the equivalent resistance of the plasma  $R_{pl}$  would be maximized. The latter can be achieved by putting the discharge chamber into an external magnetic field with the density corresponding to the condition of resonant coupling of RF power. Figure 11 shows the ion current obtained depending on external magnetic field density.


It is seen that at 4 MHz the ion current raises only insignificantly with changing of the B. At the same time, at 13.56 MHz the  $i_b$  raises significantly. The magnetic field density range where the raising ion beam current can be seen lies between the electron-cyclotron resonance (ECR) point, and the “helicon land”. The paper<sup>8</sup> shows theoretically that plasma density growth leads to shifting the ECR point to the bigger  $B_s$ , and the same is obtained in the discussed experiments.

One of the reasons why the ion beam current raises is better deposition of the RF power into plasma, which is clearly seen in Fig. 10. Applying magnetic field to the discharge leads to not only the raising ion current and decreasing ion cost, but also to changing the dependency between  $i_b$  and  $L$ , which becomes smoother.

Thusly, the experiment results show that key factors influencing the thruster parameters are the length of the discharge chamber, operating frequency and the density of the external magnetic field. At the operating frequency of 2 MHz and using a triple-coil solenoidal antenna, the operating modes lean towards the generator power unavailable in the most LEO spacecraft. The frequency of 4 MHz allows obtaining the best result in a discharge mode without external magnetic field. Applying the magnetic field while operating at higher frequencies leads to better consumption of the RF power, less ion cost, and wider range of possible discharge chamber lengths.

The results obtained have shown strong dependency between the ion beam current, and the discharge chamber length and the operating frequency of the generator. The former result is no surprise. The rising of ion cost in a discharge chamber of a less-than-optimal length is due to the reduced lifetime of the neutral particles in the discharge chamber. If the chamber length is more than the optimal, the ion current falls, because it is required here to create a dense plasma in a big volume. The second result showing a strong dependency between  $i_b$  and the generator frequency indicates the significant role of the capacitive component in maintaining the discharge in the chamber.

The best result of the thruster modes without the external magnetic field was obtained operating at the frequency of 4 MHz in the chamber 5 cm long. The values of the ion cost achieved ion cost

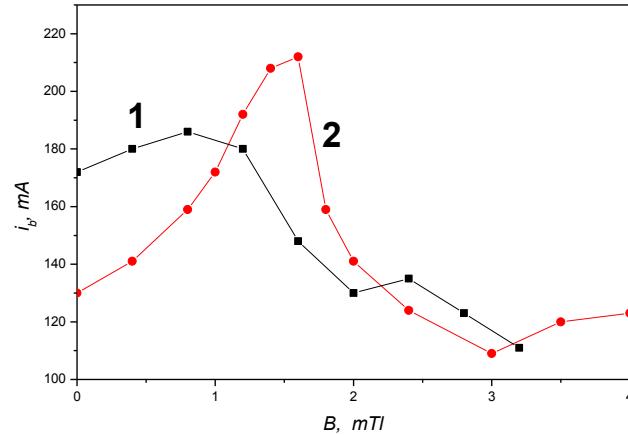

**Figure 11. Ion current vs external magnetic field density.** 1 – 4 MHz,  $L = 10\text{ cm}$ , 5 sccm, 120 W; 2 – 13.56 MHz,  $L = 5\text{ cm}$ , 4 sccm, 110 W.

#### IV. Conclusions

This paper describes an assessment of possible applications of an ion thruster using an external magnetic field allowing optimizing the power coupling to plasma and raising plasma density at given RF power values. The experiments show that the ion cost of about 450 W/A can be achieved. Depending on the voltage applied to the grid (and thus on the specific impulse) this can mean that the thruster can work consuming as low as 25-30 watts per 1 mN of thrust (with  $I_{sp}$  of about 1500 sec). It is possible to increase the  $I_{sp}$  applying higher voltage to the grids, but the thrust efficiency might be slightly higher this way. The study conducted on the possible applications of the thruster in various space missions show that a thruster with such parameters is highly applicable for station-keeping and deorbiting of spacecraft and will be anticipated on the market.

#### References

- <sup>1</sup>Mazouffre, S., “Electric propulsion for satellites and spacecraft: established technologies and novel approaches”, *Plasma Sources Sci. Technol.* 25 (2016) 033002 (27pp).
- <sup>2</sup>Loeb, H.W., “Radio Frequency Ion Sources for Electrostatic Propulsion (Hollow Cathode Design for Electron Bombardment Radio Frequency Ion Thruster Source)”, *Proceedings of the Symposium on Ion Sources and Formation of Ion Beams*, 1971, pp. 77-84
- <sup>3</sup>Kolobov, V.I., Godyak, V.A., “Inductively coupled plasmas at low driving frequencies”, *Plasma Sources Sci. Technol.* 26 (2017) 075013 (13pp).
- <sup>4</sup>Kharlan, A., Ruchenkov, V., Teplyakov, V., “Mobile Satellite Communication System Based on New Digital Phased Array Beamforming Technology”, *Proceedings of the 66th International Astronautical Congress, Jerusalem, Israel*, 2015, IAC-15,B2,1,4,x31299
- <sup>5</sup>Alexandrov, A.F., Kralkina, E.A. et al., “ON THE POSSIBILITIES OF RF ION THRUSTERS OPTIMIZATION”, *IEPC-2005-122*.
- <sup>6</sup>Lenz B., Schweitzer M. and Loeb H.W., “Improved RF-Coupling Method for RIT-Engines”, *AIAA Journal*, 79-2057, 1979
- <sup>7</sup>Goebel, D.M., Katz, I., “Fundamentals of Electric Propulsion: Ion and Hall Thrusters” *JPL Space Science and Technology Series*, Wiley, 2008, pp. 148-158.
- <sup>8</sup>Vavilin K.V., Plaksin V. Yu., Ri Kh.M. Rukhadze A.A., “Low power RF power sources for technological applications. II. Plasma sources under anomalous skin-effect conditions”, *Technical physics*, 49, N6, 2004, pp. 686-690.


A V A N T S P A C E  
PROPELLION SYSTEMS

---

GT-50 RF ION THRUSTER


# SMALL SATELLITE MARKET

## — COMMERCIAL SMALLSAT MARKET GROWTH —

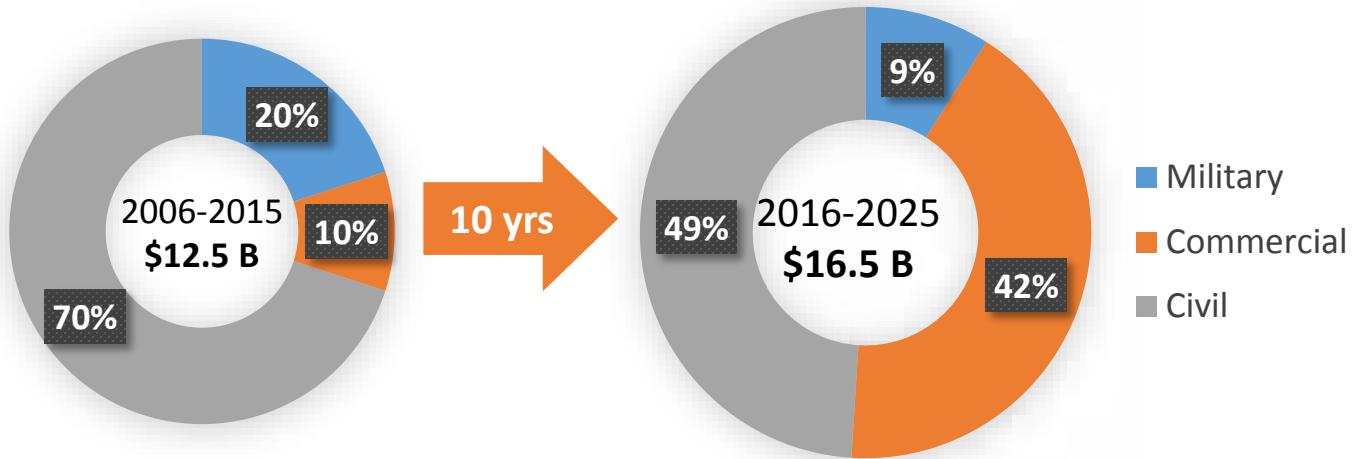


- On average, the small satellite market grows +12% annually during the last 10 years
- The market is estimated to value 16.5B USD in 2017-2026, of which 22% (3.7B USD) is manufacturing
- Cluster launches have been announced for mega-constellations:
  - OneWeb (x720+)
  - SpaceX (x4425+)

## — CURRENT SOLUTIONS FOR PROPULSION SYSTEMS IN CONSTELLATIONS (CHEMICAL) —

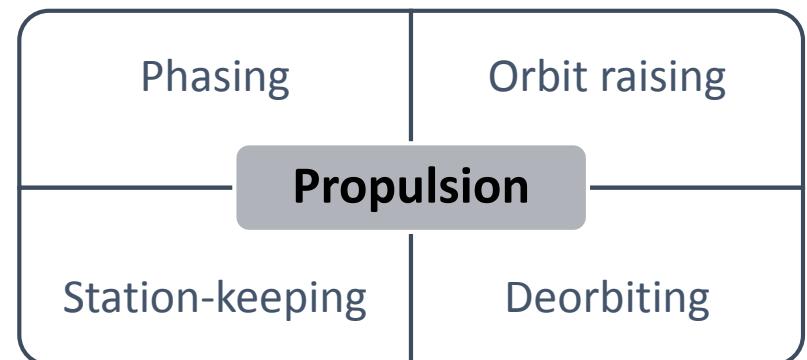

# THE SOLUTION

## — GT-50 RF ION THRUSTER

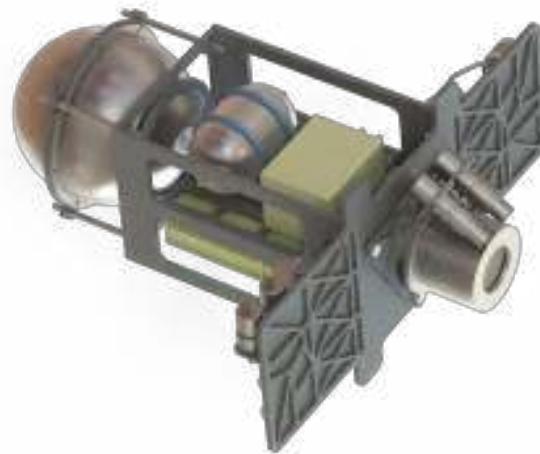

Small mass and size



PROPULSION SYSTEM VOLUME  
REDUCED 5 TIMES



High specific impulse



THE AMOUNT OF PROPELLANT  
REDUCED 10 TIMES



Exceptional maneuvering precision



Simple integration


## — GT-50 SPECIFICATIONS

Model	Power, W	Thrust, mN	Isp, sec	Propellant	Size	Mass, kg	Effcy, %
GT - 50	180/240	5.0/7.0	2000+	Xe	< 4U Cubesat	< 8	> 70



# COMPETITORS

## COMPETING COMPANIES

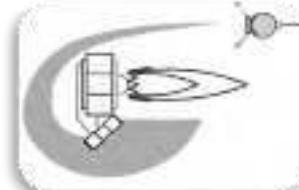


## COMPARING WITH COMPETITORS

Model	Type	Development stage	Manufacturer	Power, W	Thrust, mN	Isp, sec	Thrust effcy, W/mN
1. GT-50	RF IT	R&D	Avant Space Systems	200	6,5	2500	30
2. BIT-3	RF IT	Lunar IceCube (scheduled for SLS launch, after 2019)	Busek	75	1,15	2100	65,2
3. BHT-200	SPT	Technology missions: - TacSat-2 (2006) - FalconSat-5 (2010) - iSat (2018)	Busek	200	12,8	1390	15,6
4. SPT-50M	SPT	R&D	Fakel OKB	220	14	860	15,7
5. 1N HPGP	Chemical	Operates in Skysat 3-13	ECAPS	4,5	1000	235	-


# B2B BUSINESS MODEL

## REALIZATION

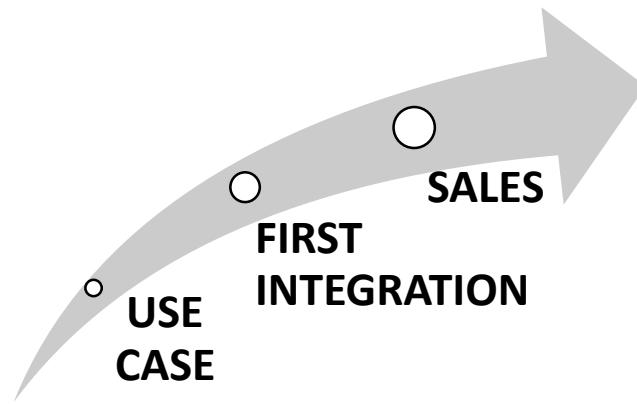

- **USE CASE** Flight test in a private-owned technology mission, university satellite, or a government civil mission.
- **FIRST INTEGRATION** Integrating the propulsion system into a platform of one of the key manufacturers (Thales Alenia, SSTL, ISS Reshetnev, or other).  
*Integration costs are negated by the discount offered for future GT-50 shipments.*  
*The launch is paid for by the primary customer (payload owner).*
- **SALES** A contract to provide propulsion systems for a satellite constellation.

## COST BENEFIT illustrated by Iridium-NEXT (Iridium Satellite LLC) example

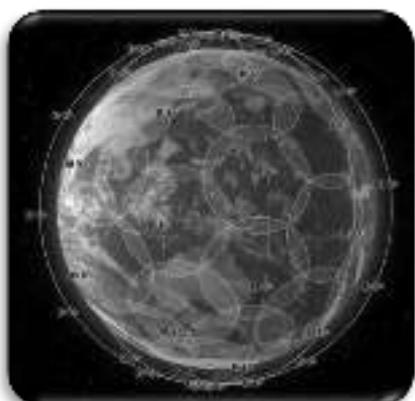

With electric propulsion system onboard, each spacecraft would need 140 kg less propellant, which **reduces the launch cost** of one satellite **by 474K USD**.

Given the 181 satellite constellation, **the overall launch cost**  
**Might be reduced by 86M USD.**

**Significant reduction in spacecraft size** while using electric propulsion is also to be kept in mind, which might result in further launch cost reduction.

# THE TEAM

## — KEY MEMBERS OF THE TEAM —

### ■ Anton Osovskiy

*CEO*

- Took part in development for DX-1 satellite by Dauria Aerospace
- Was head of sales for OKB Fifth Generation (Aerospace parts producer)

### ■ Sergey Khartov

*Chief research officer*

- D. Sc. In physics and mathematics.
- Has a vast experience in RF thrusters and plasma physics.

### Engineers and researchers:

- Yana Kharlan – Senior Project Manager
- Vladimir Kozhevnikov, Ph.D – Senior Researcher
- Ivan Cherniy – System Engineer
- Rodion Ayupov – Mechanical Engineer
- Alexander Surminskiy – Circuit and Radio Engineer
- Ruslan Rakhimov – Numerical Modelling Specialist

### Partners



# Skoltech

Skolkovo Institute of Science and Technology



ГНЦ ФГУП  
«Центр Келдыша»




Открытое акционерное общество  
«ЦЕНТРАЛЬНЫЙ НАУЧНО-ИССЛЕДОВАТЕЛЬСКИЙ ИНСТИТУТ  
СПЕЦИАЛЬНОГО МАШИНОСТРОЕНИЯ»

ОАО «ЦНИИСМ»

# THE RESULTS

## — ACHIEVED RESULTS —

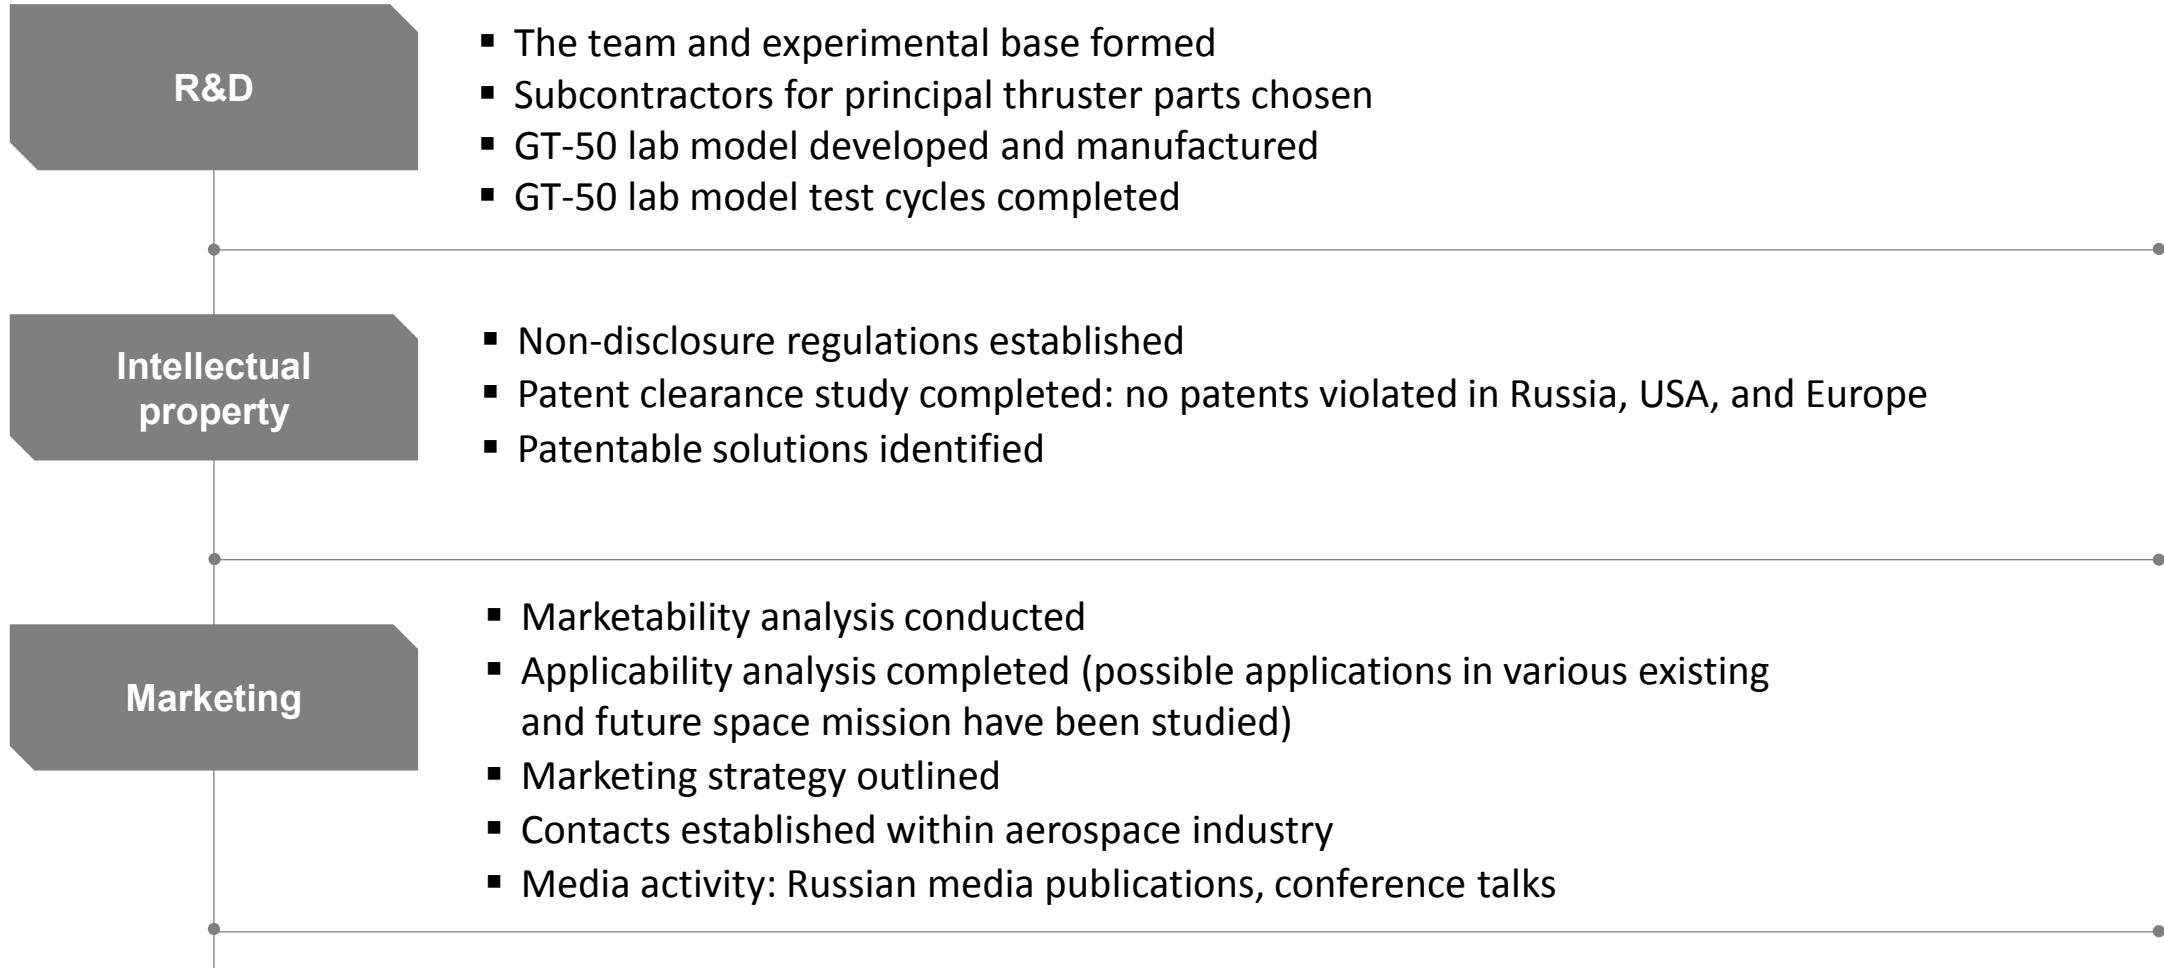


# ROAD MAP [1/2]

## PROJECT REALIZATION PLAN




# ROAD MAP [2/2]

## — STAGE REALIZATION PLAN —

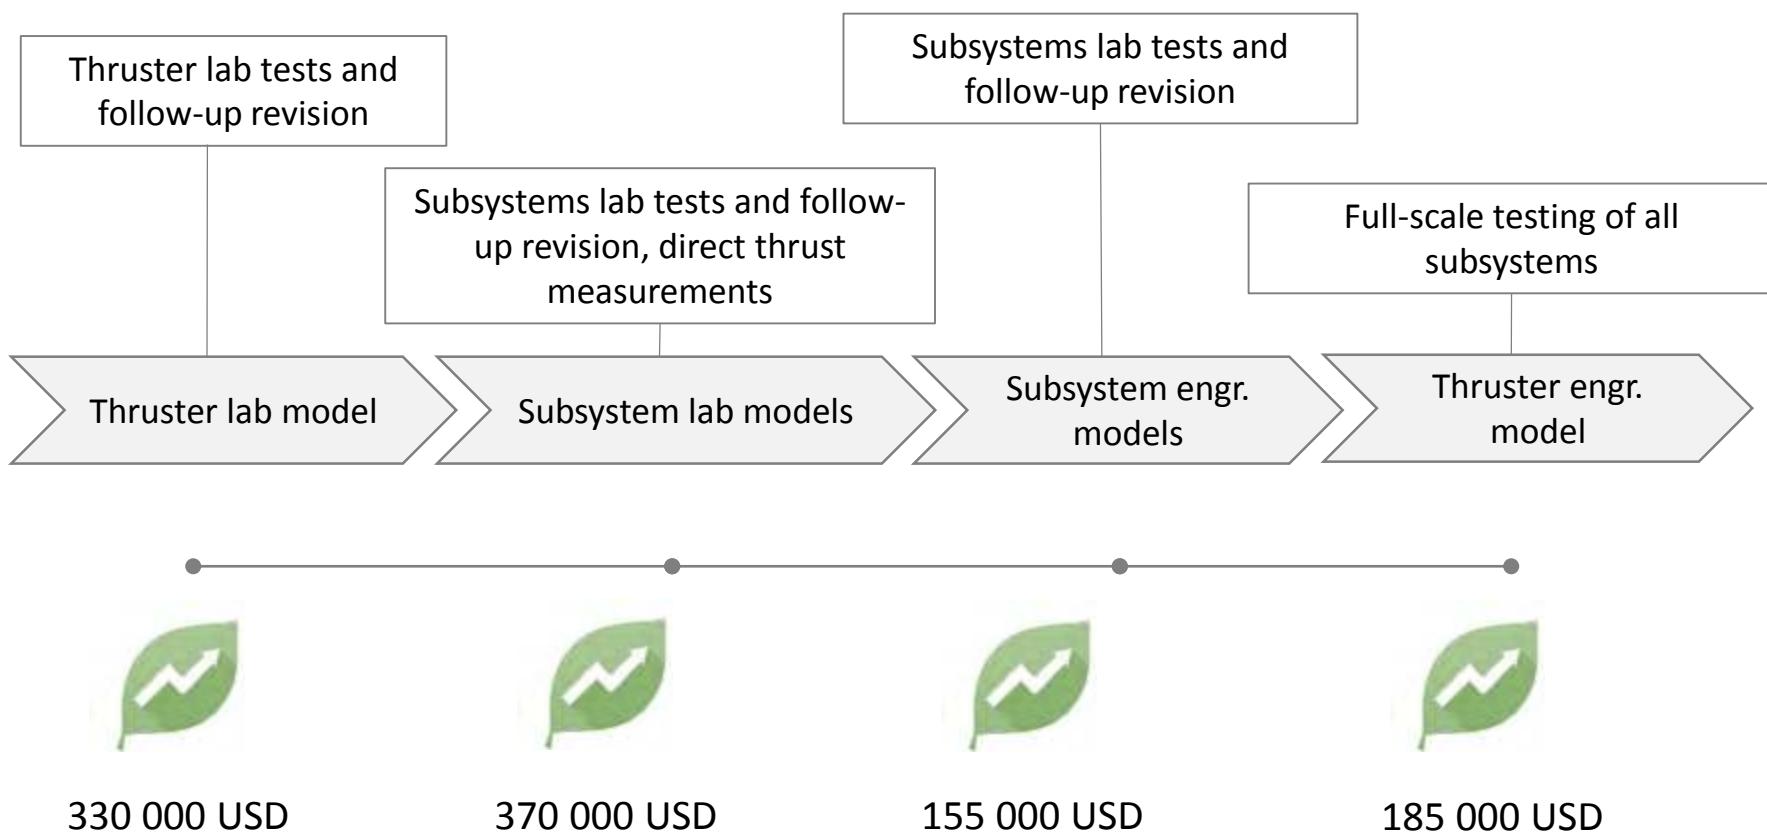

## EXPENDITURES

- Payroll
- Thruster prototype
- Subcontractors
- Hardware & Software
- Other

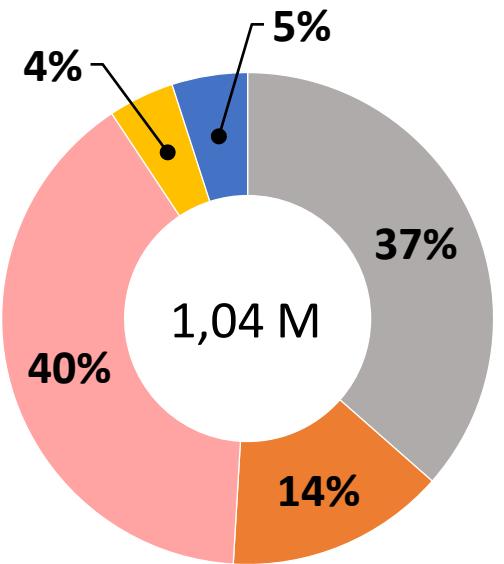

# AVANT SPACE

## PROPELLION SYSTEMS

Contact person: Julia Kirichenko  
E-mail: info@avantspace.com  
Tel.: +7 495 660 83 65





ESA Technology Transfer and Business Incubation Office certifies that

# **Avant Space Systems**

was selected through a world wide open call to contribute to the innovation environment of the European Space Agency by participating in

## **IAC 2018 Start-up Zone powered by ESA space solutions**

in Bremen, Germany  
from the 1<sup>st</sup> – 5<sup>th</sup> October 2018.

Avant Space Systems a wide range of delegates and has shown great enthusiasm and knowledge with the preparation and exhibition during the IAC 2018, where 6000 people attended.

We wish Avant Space Systems great success for the future!




Frank M. Salzgeber  
Head of ESA Technology Transfer and Business Incubation Office

## GT-50 RF ION THRUSTER



GT-50 ion thruster can be easily integrated into a spacecraft along with the subsystems developed by Avant Space:


- Neutralizer
- Power processing and control system
- Propellant supply and storage system
- Mechanical and thermal interfaces

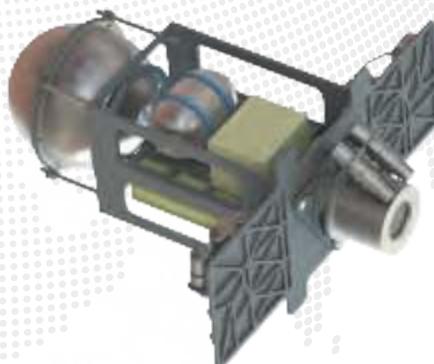


GT-50 allows reducing the power consumed per mN of thrust significantly compared to existing solutions. This broadens the range of possible applications of the thruster in various space missions.

Compact and lightweight thruster with low consumption might be used in space missions with low power capabilities and limited volume available.

• Thrust	5-7 mN	• Overall system size	up to 4U
• Specific impulse	> 2000 s	• Total dry mass	up to 8 kg
• Total power	180-240 W	• Propellant	Xenon
• Efficiency	> 70 %	• Lifetime	> 20 000 h

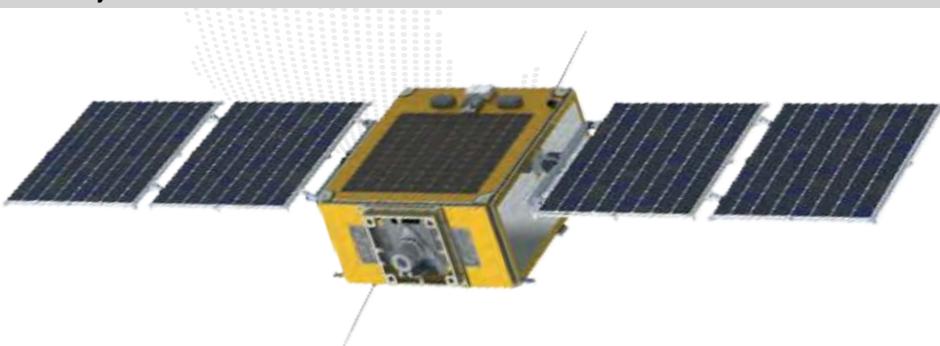

# RF ION THRUSTER ARCHITECTURE

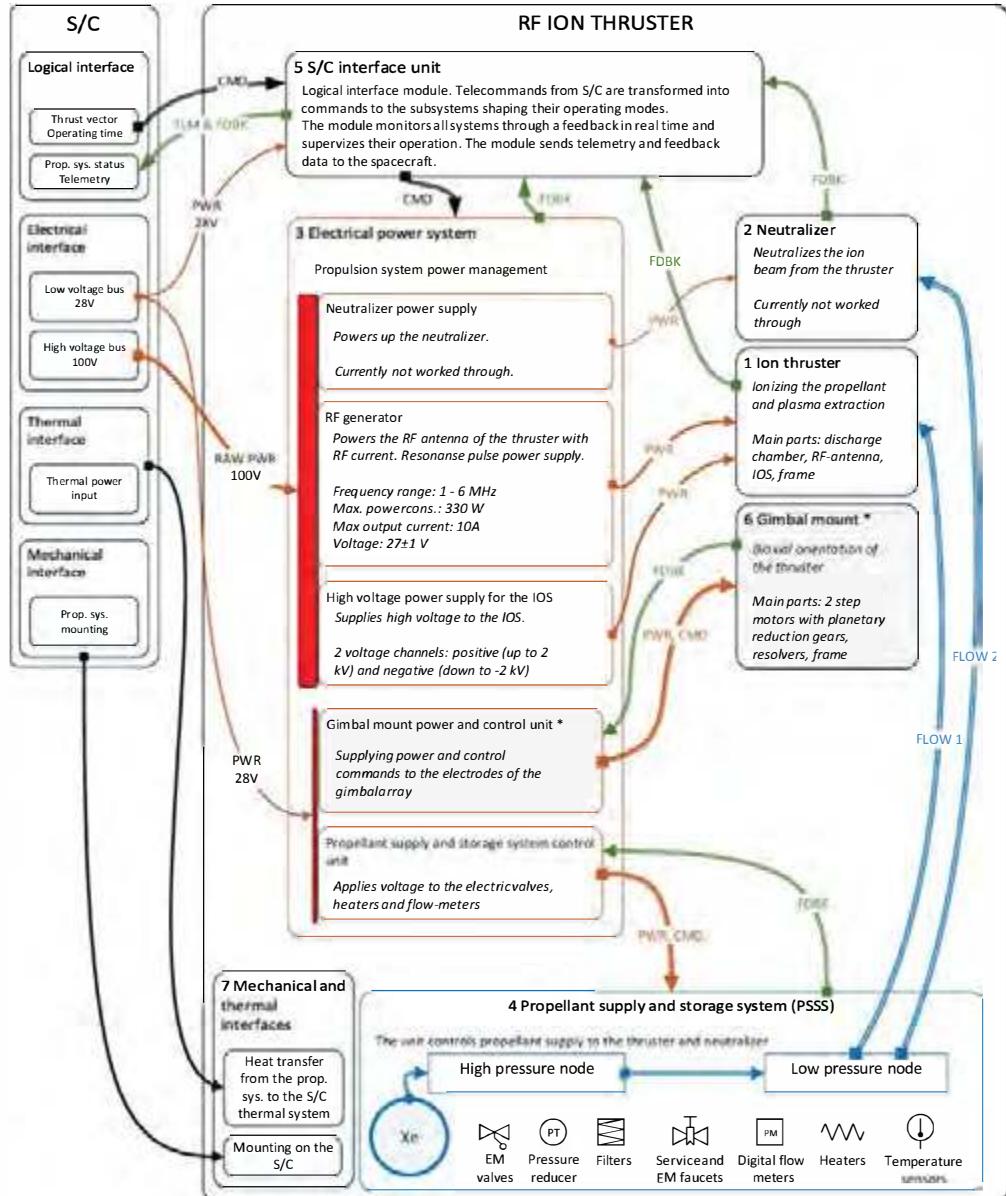

## KEY-WORDS

RAW PWR – Raw power

PWR – Power

CMD – Command

FDBK – Feedback

TLM – Telemetry

FLOW – Propellant slow rate

### FDBK:

- 1) Propellant and parts temp
- 2) Propellant slow rate and pressure in the lines
- 3) Angles from the gimbal array encoders \*
- 4) Operational data (currents and voltages)
- 5) Telecommand status

### CMD:

- 1) From S/C: thrust and ISP for prop. sys.
- 2) Flow rate and temperature for PSSS
- 3) Angles for the gimbal array \*
- 4) Subsystem operating modes

\* - The necessity of this module has not been established