



High Power LED

IR Edixeon™ Emitter

1W Edixeon™

Approved By Customer	Designer	Checker	Approval

Date : 2006/08/02

Version : 2.1

EDISON OPTO CORPORATION

4F, No. 800, Chung-Cheng Rd,

Chung-Ho, Taipei 235, Taiwan

Tel: 886-2-8227-6996

Fax: 886-2-8227-6997

<http://www.edison-opto.com.tw>



IR EdixeonTM



IR Edixeon emitters are one of the highest power LEDs in the world by Edison Opto. IR Edixeon emitters are designed to satisfy more and more Solid-State lighting High Power LED applications for brilliant world such as CCTV.

Features

- Low voltage operated
- Instant light
- Long operating life


Typical Applications

- CCTV
- Wireless communication




Package Outlines

Lambertian

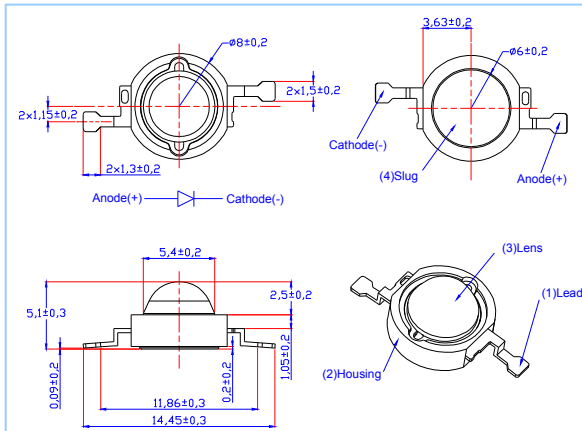

Focusing

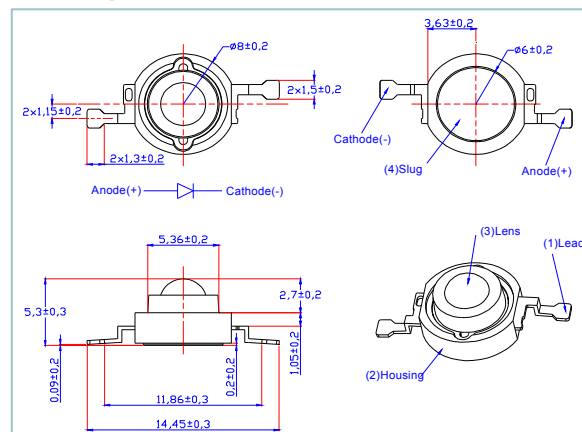

Notes:

1. All dimensions are in mm.
2. Drawings are not to scale.
3. It is strongly recommended that the temperature of lead be not higher than 55°C .
4. Series slug has polarity as cathode.
5. It is important that the slug can't contact aluminum surface, It is strongly recommended that there should coat a uniform electrically isolated heat dissipation film on the aluminum surface.

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
DC Forward Current	I_F	700	mA
Peak pulse current;(tp ≤ 100μs, Duty cycle=0.25)	I_{pulse}	1500	mA
Reverse Voltage	V_R	5	V
Forward Contact Voltage	V_{FC}	16	V
LED junction Temperature @ 700 mA	T_j	125	°C
Operating Temperature	T_{opr}	-30 ~ +110	°C
Storage Temperature	T_{stg}	-40 ~ +120	°C
ESD Sensitivity	V_B	2000	V
Manual Soldering Time at 260°C (Max.)	T_{sol}	5	seconds

EDEI-1LA3 Optical & Electrical Characteristics at $I_F=700mA(T_J=25^{\circ}C)$:

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Viewing angle at 50% I_v	$2\theta_{1/2}$	--	120	--	deg.
Viewing angle at 50% I_v (with 25Degree Collimator)	$2\theta_{1/2}$	--	25	--	deg.
Forward voltage	V_F	1.5	1.9	2.4	V
Radiant Power	Power	120	200	--	mW
Radiant Intensity	I_v	40	60	--	mW/Sr
Radiant Intensity (with 25Degree Collimator)	I_v	--	500	--	mW/Sr
Peak Wavelength	λ_P	--	850	--	nm
Thermal Resistance(Junction to Case)	$R\theta_{J-C}$	--	15	--	°C/W
Temperature Coefficient Of Forward Voltage	$\Delta V_F/\Delta T$	--	-2	--	mV/°C

EDEI-1FA3 Optical & Electrical Characteristics at $I_F=700mA(T_J=25^{\circ}C)$:

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Viewing angle at 50% I_v	$2\theta_{1/2}$	--	50	--	deg.
Forward voltage	V_F	1.5	1.9	2.4	V
Radiant Power	Power	100	180	--	mW
Radiant Intensity	I_v	80	150	--	mW/Sr
Peak Wavelength	λ_P	--	850	--	nm
Thermal Resistance(Junction to Case)	$R\theta_{J-C}$	--	15	--	°C/W
Temperature Coefficient Of Forward Voltage	$\Delta V_F/\Delta T$	--	-2	--	mV/°C

EDEI-ALA3 Optical & Electrical Characteristics at $I_F=350\text{mA}$ ($T_J=25^\circ\text{C}$):

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Viewing angle at 50% I_V	$2\theta_{1/2}$	--	120	--	deg.
Forward voltage	V_F	1.2	1.6	2.1	V
Radiant Power	Power	60	100	--	mW
Radiant Intensity	I_V	20	30	--	mW/Sr
Peak Wavelength	λ_P	--	850	--	nm
Thermal Resistance(Junction to Case)	$R\theta_{J-C}$	--	15	--	$^\circ\text{C/W}$
Temperature Coefficient Of Forward Voltage	$\Delta V_F/\Delta T$	--	-2	--	mV/ $^\circ\text{C}$


EDEN-1LA3 Optical & Electrical Characteristics at $I_F=700\text{mA}$ ($T_J=25^\circ\text{C}$):

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Viewing angle at 50% I_V	$2\theta_{1/2}$	--	140	--	deg.
Forward voltage	V_F	1.5	1.9	2.4	V
Radiant Power	Power	40	70	--	mW
Radiant Intensity	I_V	20	35	--	mW/Sr
Peak Wavelength	λ_P	--	940	--	nm
Thermal Resistance(Junction to Case)	$R\theta_{J-C}$	--	15	--	$^\circ\text{C/W}$
Temperature Coefficient Of Forward Voltage	$\Delta V_F/\Delta T$	--	-2	--	mV/ $^\circ\text{C}$


Note

1. Radiometric is measured with an accuracy of $\pm 10\%$.
2. Forward Voltage is measured with an accuracy of $\pm 0.1\text{V}$
3. Wavelength is measured with an accuracy of $\pm 2\text{nm}$
4. The Focusing series that don't recommend work with Edison's secondary lens.

Electrical & Optical Curves-Spectrum

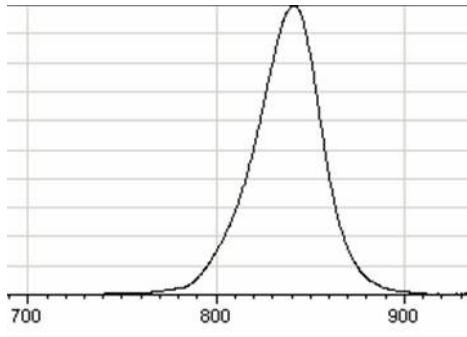


EDEI-xxA3 spectrum

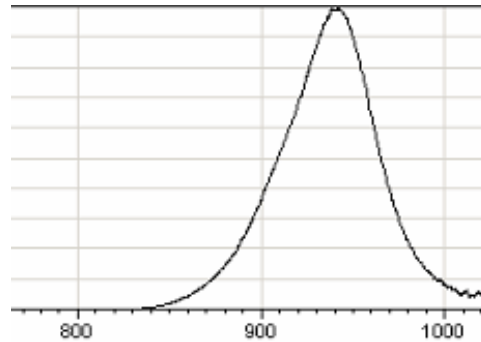


EDEN-xxA3 spectrum


Typical Radiation Pattern for

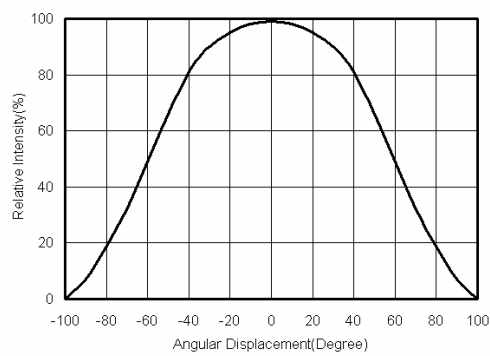

EDEI-1LA3 & EDEI-ALA3

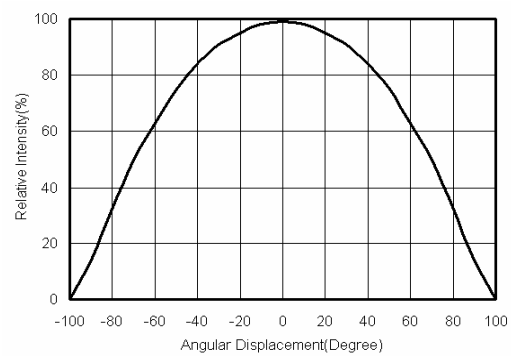


EDEN-1LA3

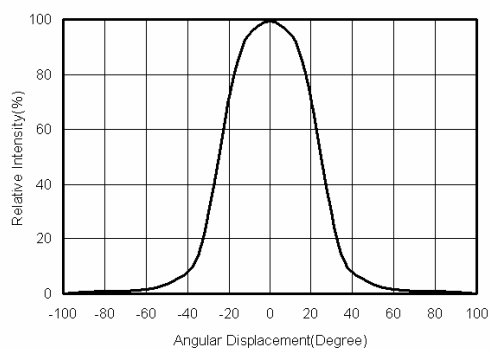


EDEI-1FA3


Typical Optical and Electrical Curves

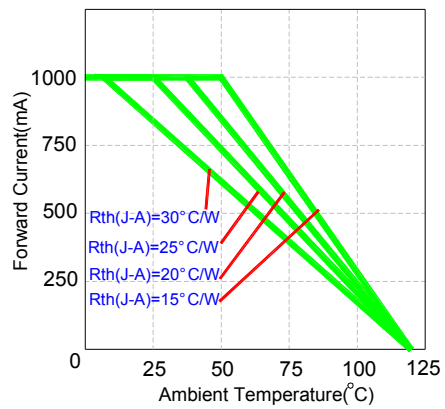

Operating Current & Ambient Temperature
For EDEx-1LA3

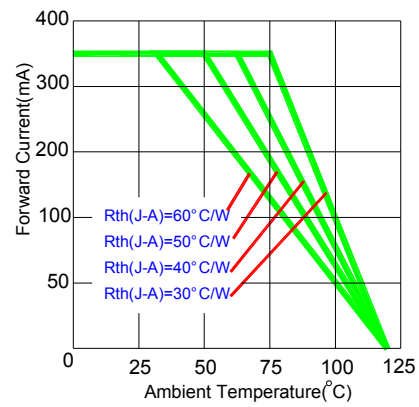


Operating Current & Ambient Temperature
For EDEx-ALA3

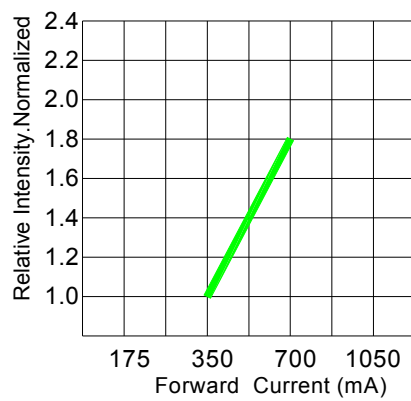

Forward Current & Luminous Flux

Package Specifications

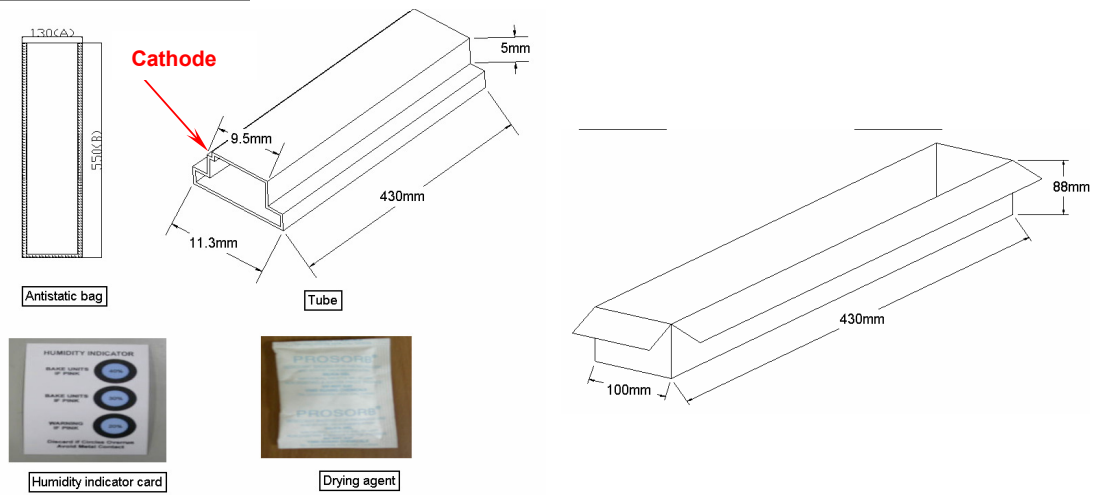

Note

1. Inner antistatic bag standard.
2. A bag contains one humidity indicator card and drying agent.
3. 50pcs emitters per tube.
4. 20 tubes per bag, 1 K pcs per bag.
5. 2 bags per inner box, 2 K pcs per inner box.

Packing Step	Type	Dimension(mm)	Emitter Q'ty(Max.)
1	Tube	430*13	50
2	Inner Box	430*100*88	1,000
3	Outer Box	460*196*135	2,000