


VIBEGUARD: 1:1 SCALE DRILLING TEMPLATE & DUAL-DATUM BLUEPRINT

100% TRUE PHYSICAL SCALE • 150 × 150 mm ACRYLIC BASEPLATE • ALL 8 HOLES Ø3.3 mm THROUGH-HOLES

CRITICAL: In Print Dialog, select 'Actual Size' / 100% Scale. DO NOT select 'Fit to Page' or 'Shrink'.



CALIBRATION BAR: Verify with physical ruler that this bar is EXACTLY 50.0 mm!

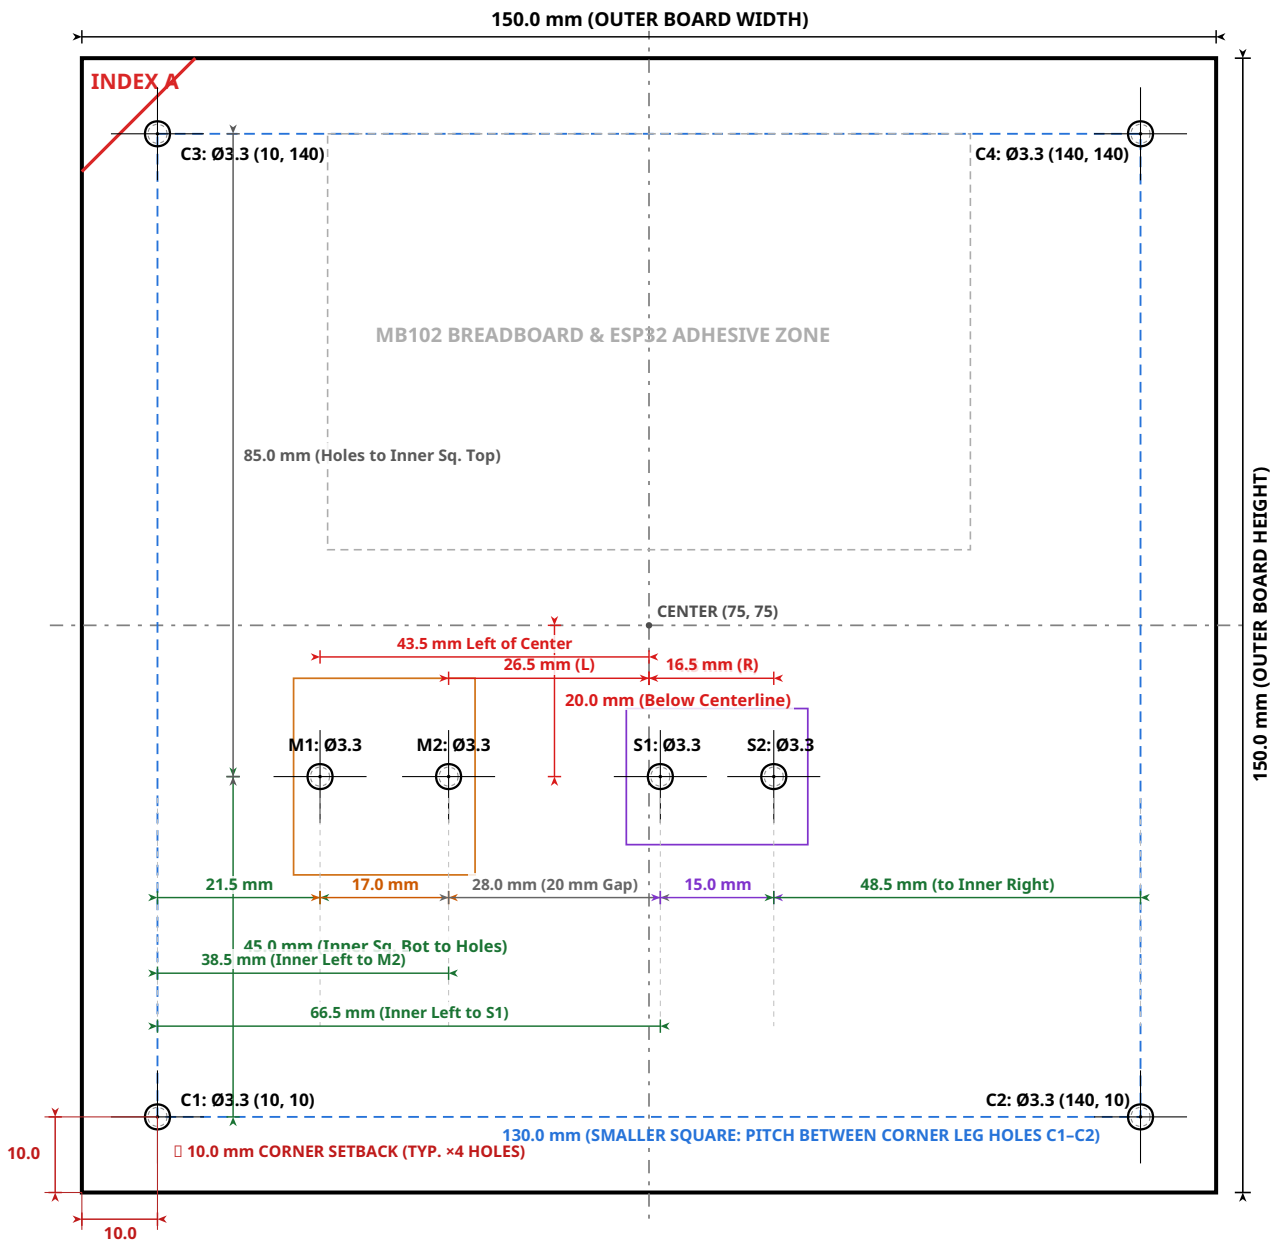

| VERIFIED HOLE LOCATION MATRIX: DUAL-DATUM & RELATIVE OFFSETS (ALL UNITS IN MM) |                            |                  |                           |                                      |            |
|--------------------------------------------------------------------------------|----------------------------|------------------|---------------------------|--------------------------------------|------------|
| ID                                                                             | PURPOSE                    | DATUM A (0,0)    | FROM INNER SQ (130x130)   | FROM CENTER (75,75)                  | RADIAL (R) |
| C1                                                                             | Leg Standoff (Front-Left)  | X= 10.0, Y= 10.0 | At Inner Corner (0, 0)    | $\Delta X = -65.0, \Delta Y = -65.0$ | 91.92 mm   |
| C2                                                                             | Leg Standoff (Front-Right) | X=140.0, Y= 10.0 | At Inner Corner (130, 0)  | $\Delta X = +65.0, \Delta Y = -65.0$ | 91.92 mm   |
| C3                                                                             | Leg Standoff (Rear-Left)   | X= 10.0, Y=140.0 | At Inner Corner (0, 130)  | $\Delta X = -65.0, \Delta Y = +65.0$ | 91.92 mm   |
| C4                                                                             | Leg Standoff (Rear-Right)  | X=140.0, Y=140.0 | At Inner Corner (130,130) | $\Delta X = +65.0, \Delta Y = +65.0$ | 91.92 mm   |
| M1                                                                             | N20 Motor Mount (Left)     | X= 31.5, Y= 55.0 | 21.5 mm Left, 45.0 mm Bot | $\Delta X = -43.5, \Delta Y = -20.0$ | 47.88 mm   |
| M2                                                                             | N20 Motor Mount (Right)    | X= 48.5, Y= 55.0 | 38.5 mm Left, 45.0 mm Bot | $\Delta X = -26.5, \Delta Y = -20.0$ | 33.20 mm   |
| S1                                                                             | ADXL345 Bracket (Left)     | X= 76.5, Y= 55.0 | 66.5 mm Left, 45.0 mm Bot | $\Delta X = +1.5, \Delta Y = -20.0$  | 20.06 mm   |
| S2                                                                             | ADXL345 Bracket (Right)    | X= 91.5, Y= 55.0 | 81.5 mm Left / 48.5 mm R  | $\Delta X = +16.5, \Delta Y = -20.0$ | 25.93 mm   |

WORKSHOP TOOLING SEQUENCE: 1) Center-punch 8 crosshairs 2) Pilot drill Ø2.5 mm (600–800 RPM) 3) Finish drill Ø3.3 mm 4) Deburr holes

SANDWICH CLAMPING: Stack both acrylic plates (4.2 + 4.6 mm), mark INDEX A on top-left edge, clamp to wooden scrap backing board.

Jyothi Engineering College • Department of Cyber Security • VibeGuard Testbed Project • Lab Certified Baseline