

# Beyond the Bits: Cooperative Packet Recovery Using Physical Layer Information

Grace R. Woo, Pouya Kheradpour, Dawei Shen, and Dina Katabi  
Massachusetts Institute of Technology  
Cambridge, MA, USA

gracewoo@mit.edu, pouyak@mit.edu, dawei@mit.edu, dk@mit.edu

## ABSTRACT

Users increasingly depend on WLAN for business and entertainment. However, they occasionally experience dead spots and high loss rates. We show that these problems can be addressed by exposing information readily available at the physical layer. We introduce SOFT, a new architecture that makes the physical layer convey its confidence that a particular bit is “0” or “1” to the higher layers. Access points that hear the same transmission communicate their confidence values over the wired Ethernet and combine their information to correct faulty bits in a corrupted packet. A single receiver may also combine the confidence estimates from multiple faulty retransmissions to obtain a correct packet. We implement SOFT and evaluate it using GNU software radios. The results show that our approach can reduce loss rate by up to 10x in comparison with the current approach, and significantly outperforms prior packet combining proposals.

## Categories and Subject Descriptors

C.2.2 [Computer Systems Organization]: Computer-Communications Networks

## General Terms

Algorithms, Design, Performance

## Keywords

Wireless Networks, Cooperative Reception, Diversity Combining

## 1. INTRODUCTION

Wireless networks can suffer from high packet loss. In some deployments the mean loss rate is as high as 20-40% [4, 19], and even when average packet loss is low, some users suffer from poor connectivity. Current wireless networks attempt to recover from losses using retransmissions. However,

in lossy environments, retransmissions often have errors and effectively waste the bandwidth of the medium, cause increased collisions, and fail to mask losses from higher layer protocols. As a result, today a lossy network is barely useable.

Wireless networks, however, inherently exhibit spatial diversity, which can be exploited to recover from errors. A sender in a WLAN is likely to have multiple access points (APs) in range [3, 5]. It is unlikely that all these APs see errors in the same parts of a transmitted signal [18]. Consider an extreme scenario where the bit error rate is about  $10^{-3}$  and the packet size is 1500B (i.e., 12000 bits). In this case,<sup>1</sup> the probability that an AP correctly receives a transmitted packet is  $0.999^{12000} \approx 10^{-5}$ . Say there are two APs within the sender’s range, and the bit errors at the APs are independent [18]. If one can combine the correct bits across APs to produce a clean packet, the delivery probability becomes 0.99.<sup>2</sup> The problem, however, is that when multiple APs differ on the value of a bit, it is unclear which AP is right. A prior cooperation proposal attempts to resolve conflicts between APs by trying all possible combinations and accepting the combination that satisfies the packet checksum [17]. Such an approach, however, has an exponential cost, limiting its applicability to packets with only a handful of corrupted bits.

This paper presents SOFT, a cross-layer architecture for recovering faulty packets in WLAN. Current physical layers compute a confidence measure on their 0-1 decision for each bit. But due to the limitation of the interface between the physical and data link layer, this confidence information is thrown away. SOFT introduces a simple modification of the interface to export this confidence measure from the physical to the data link layer. It shows that this new interface can combat dead spots and dramatically increase the packet delivery rate.

SOFT works by combining confidence values across multiple faulty receptions to recover a clean packet.

- On the uplink, SOFT leverages the abundance of wired bandwidth in comparison to wireless bandwidth. Access points that hear a particular transmission communicate over the local Ethernet and combine their confidence es-

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

MobiCom’07, September 9–14, 2007, Montréal, Québec, Canada.  
Copyright 2007 ACM 978-1-59593-681-3/07/0009 ...\$5.00.

<sup>1</sup>802.11b does not use FEC and hence one faulty bit corrupts a whole packet.

<sup>2</sup>The probability of having a corrupted bit at both APs is  $10^{-6}$ . Assuming independence, the probability that by combining the bits across APs one gets a fully correct packet is  $(1 - 10^{-6})^{12000} = 0.99$ .

timates to maximize the likelihood of correctly decoding a corrupted packet.

- Similarly, on the downlink, a node that receives a faulty packet combines the received packet with a later potentially faulty retransmission to obtain a correct packet. This strategy eliminates the need for any one retransmission to be completely correct, thus drastically reducing the number of retransmissions in a lossy environment.

One engineering challenge in the design of SOFT is to identify the strategy that maximizes the likelihood of correctly reconstructing a packet from multiple faulty receptions. Say that we have multiple receptions of the same packet annotated with physical-layer confidence values, but they do not agree on the value of the  $i^{th}$  bit in the packet. How should one resolve the conflict? One could take a majority vote. Alternatively, one could assign to the bit the value associated with the highest confidence. Both of these strategies are suboptimal, and may be even destructive. For example, some of the cooperating APs may be affected by a collision or a microwave signal, and thus end up polluting the information rather than enhancing it. By estimating the noise variance at each receiver and taking it into account, we do better than the above strategies. We demonstrate analytically and show experimentally the superiority of this approach.

We have built SOFT in GNU software radios [6] and deployed it in a 13-node testbed. Software radios implement the whole communication system in software, making them an ideal environment for developing and testing cross-layer protocols. Our experimental results reveal the following findings.

- SOFT provides large boosts to wireless reliability. In environments with moderate to good delivery rate, SOFT almost eliminates any packet loss over the wireless channel. In environments with high loss rates, SOFT increases the delivery rate by an order of magnitude.
- SOFT shows significantly higher delivery rates than prior cooperation proposals that do not use physical layer information. It can provide up to 9-fold reduction in loss rate, as compared to MRD [17].
- SOFT also reduces the number of retransmissions. In lossy networks, with just one retransmission, SOFT achieves 94% reliability, while it takes the current approach 18 retransmissions to obtain similar performance.
- Confidence values can be expressed using only few bits (3-bits in our results), keeping the overhead of communicating them over the Ethernet within an acceptable bound.

## 2. RELATED WORK

Related work falls in two areas.

**(a) Spatial Diversity.** Spatial diversity, i.e., combining information from multiple antennas to boost throughput, is a highly active area [10, 16, 20, 21]. Some work is purely theoretical with no system implementation or experimental results [16, 20]. The main difficulty in implementing these theoretical proposals is their reliance on tight synchronization across nodes. Thus, practical systems that exploit spatial diversity usually operate with multiple antennas on the same card (i.e., MIMO systems) [21].

Work on diversity also appears in the area of soft-handoff in CDMA cellular networks [24]. While a mobile phone is

moving from one cell to another, the two base stations transmit the same information to the mobile phone and listen to the phone's signal. The stronger signal is utilized for each frame in the call or both signals are combined to produce a clearer copy of the signal. Combining the signals is termed softer handoff and is possible when the cells involved in the handoff have a single cell site (i.e., they are the same node). Further, a few theoretical works compute the capacity improvements from combining 802.11 signals in a way similar to CDMA networks [9, 22].


SOFT is inspired by signal combining technologies used in RAKE receivers and softer handoff in CDMA cellular networks [24]. SOFT, however, does not combine signals; it combines confidence values associated with individual bits. We believe that it is not practical for APs to communicate to each other the details of their physical signals and channel functions. The overhead will be excessive and the system will work only when the APs have the same design.<sup>3</sup> In contrast, SOFT defines a simple interface between the physical and datalink layers; each bit is assigned a normalized confidence value that can be expressed with a few bits (3 bits in our results). This interface limits the communication overhead over the wired Ethernet, simplifies the combining algorithm, and allows a receiver on the downlink to combine multiple receptions even if they were sent at different 802.11 bit rates, and thus with different modulation schemes.

The closest work to ours is by Miu et al. [17], who propose combining receptions from multiple access points to recover faulty packets. Their work does not use physical layer information. It divides the packet into multiple blocks. When the access points receive conflicting blocks, this proposal attempts to resolve the conflict by trying all block combinations and checking whether any of the resulting combinations produce a packet that passes the checksum. The overhead of their approach is exponential in the number of erroneous blocks and thus too costly when there is significant loss. Our experimental results in §9.4 compare against their approach and demonstrate the importance of using physical layer information.

**(b) Soft Decoding.** The use of confidence values in decoding is usually referred to as *soft decoding*. Prior work in information theory has discussed soft decoding and applied it to various codes including Reed Solomon and LDPC [12, 11, 23]. The Viterbi decoding algorithm has a soft extension (SOVA) that includes physical information as a priori probabilities of the input symbols [13]. Also, HARQ and Chase combining advocate that a receiver saves a corrupted packet and combines it with a later retransmission [8, 2]. SOFT presents a systems architecture for reliable WLAN that is inspired by soft decoding. It pushes soft decoding up to higher layers and incorporates it within a cooperative design where multiple APs work together to recover faulty packets. Furthermore, it focuses on practical networking issues, such as compatibility with current applications and unmodified APs and cards, and provides an implementation and experimental results.

Concurrently, another group has proposed the use of soft information but for a different purpose [15]. They use the

<sup>3</sup>For example, sending signal samples corresponding to the DSSS chips used in 802.11b will increase the Ethernet overhead by an order of magnitude. Over-sampling and the resolution of the ADC further increase this overhead.



**Figure 1: SOFT’s System Architecture.** On the uplink, multiple APs may hear the transmission of the wireless client. They communicate their confidence in the received bits to the SOFT Combiner. SOFT combines their information to reconstruct a clean packet from multiple faulty receptions.

soft information to find incorrect chunks in a packet and retransmit them. In contrast, our work reconstructs correct packets by combining soft information across multiple erroneous receptions. In principle, the two projects are complementary; one may retransmit only the faulty chunks in a packet and also combine multiple faulty receptions of a chunk to reconstruct a correct version.

### 3. SOFT’S SYSTEM ARCHITECTURE

SOFT’s design targets wireless LAN deployments in a university or corporate campus. In a large campus, a user is likely to hear multiple access points operating on the same 802.11 channel [3]. Often when suffering from poor connectivity, a user will be between APs. SOFT allows these APs to cooperate to recover corrupted packets, exploiting space diversity. SOFT also exploits time diversity by combining bits in a faulty packet with bits in later potentially faulty retransmissions. Combining packets with their retransmissions occurs on both the uplink and downlink.

For simplicity, we describe our ideas within the context of binary modulation, where a symbol refers to one bit. Our algorithm and lemmas can be easily extended to other modulation schemes, as discussed in the appendix.

#### 3.1 An Interface That Returns Soft Values

SOFT sits below the MAC, between the physical layer and the data link layer. It modifies the interface between the two layers. Instead of returning 0’s and 1’s, the physical layer returns for each bit a number in  $[-1, 1]$ , which we call a *soft value* (SV). The SV gives us an estimate of how confident the physical layer is about the decoded bit. The decoded bit is zero when the corresponding SV is negative, and is one otherwise. The smaller the absolute value of the soft value, the less confident the physical layer is in whether the sent bit is 0 or 1.

SOFT associates soft values with each bit, we refer to this replacement of bits with their corresponding soft values as a *soft packet* or *s-packet*. The data link layer in SOFT decodes such *s-packets* to obtain the transmitted packets. Except for some details, the decoding algorithm is similar for the uplink and the downlink scenarios.

Although the details of the physical layer differ across technologies and within the same technology, all physical layer design can easily expose an SV for each decoded bit/symbol. Generally speaking, the function of a wireless

receiver is to map a received signal to the symbol that was transmitted. To do so, the receiver computes a soft value from the received signal for each symbol, which is a real number that gives an estimate of the transmitted symbol. The receiver then maps the soft value to the symbol which is closest to it. For example, when the symbols correspond to a single bit, the soft value is decoded to a “1” bit if it is positive and “0” otherwise. The soft value can be easily generalized to systems where each symbol represents more than one bit.

#### 3.2 Uplink

Figure 1 shows the SOFT architecture on the uplink. It is designed to exploit spatial diversity through the cooperation of several access points. Each AP in the WLAN infrastructure offers a different communication channel to the client. We leverage the comparatively high bandwidth of the wired Ethernet connecting the access points. Each AP forwards all *s-packets* including those that are corrupted to the combining agent. The combining agent is a logical module, that may reside on one of the access points or on a different machine on the local Ethernet, and can be thought of as an uber-access point.

The combining agent invokes the packet combining procedure only for corrupted packets. The agent first needs to identify the set of *s-packets* (received at different APs) that correspond to the same transmitted packet. To do this, it decodes the header of each *s-packet* to determine the *packet-id* of the transmitted packet. Packet-id is a pseudo random sequence assigned by the transmitter to each packet and maintained across retransmissions. *S-packets* having the same packet-id correspond to receptions of the same packet or its retransmission at different APs. The combining agent keeps this set of packets corresponding to the same transmission in a hash table that is keyed by the packet-id. Headers, which include the packet-id, are encoded with a lot of redundancy, hence they are highly likely to be received with no errors. Packet-ids are therefore assumed to be received with little error.

The next step for the combining agent is decoding. When an *s-packet* arrives at the agent, we face one of two situations: 1) The arriving packet is uncorrupted, i.e., it passes the 802.11 checksum. In this case, the packet is forwarded toward its IP destination and other packets with the same packet-id are dropped. 2) The packet is corrupted, in which case all the packets with the same packet-id are passed to the combining algorithm (described in §4), to attempt to correct the faulty bits. If the combining algorithm succeeds, the correct packet is forwarded and the packets are deleted from the hash table. If the combining algorithm fails, the agent waits for new soft-packets with the same packet-id.

We note that the combining agent also keeps a hash table of packet-ids for recently forwarded packets. When a new packet arrives, the agent checks the table to see whether a packet with a similar id has been correctly forwarded, in which case the new packet is ignored. This eliminates redundant forwarding. Finally, old soft-packets that were never recovered are dropped after a timeout.

#### 3.3 DownLink

SOFT’s design for the downlink exploits time diversity. Faulty *s-packets* are stored and combined with later retransmissions to increase the overall potential of recovery.



The process of combining multiple faulty transmissions to correct bit errors is similar to that of combining s-packets across APs, except that the combining agent in the case of the downlink runs on the client node itself.

### 3.4 ACKs Retransmissions and Reordering

SOFT modifies the transmitter and receiver modules. If a SOFT receiver has the next-hop MAC address, it immediately acks correctly received packets using 802.11 synchronous acks. For each 802.11 ack-ed packet, the receiver communicates the correct reception to the combining agent to allow it to discard the s-packets corresponding to the ack-ed packet. On the other hand, if the packet is faulty or if the receiver is not the intended next-hop, it communicates the s-packet to the combining agent. The agent stores faulty receptions and uses them to reconstruct a clean version of the packet as described above. If the reconstruction succeeds, the agent sends an asynchronous ack to the sender with the packet-id. The lack of an ack causes the sender to timeout and retransmit the packet.

After transmitting a packet, the SOFT sender waits for an ack. If it receives a synchronous 802.11 ack, it moves on to the next packet waiting transmission. Otherwise, the packet may need to be retransmitted which happens when the combining agent at the receiver fails to recover a clean copy. The retransmission strategy varies between the uplink and downlink.

In the case of the uplink, SOFT disables link-layer retransmissions to allow the combining agent enough time to recover packets that the APs receive in error. Specifically, since cooperation requires the APs to communicate over the wired LAN, it is not possible to recover a corrupted packet within the time limit for sending a synchronous 802.11 ack. Thus, SOFT WLANs operate in 802.11's unicast mode but with no retries. The SOFT sender stores unack-ed packets in a hash table keyed on the packet-id. Whenever it receives an asynchronous ack, it looks up the ack-ed packet-id in its table, removes the corresponding packet, and resets any scheduled retransmissions for that packet. Packets stored in the un-acked hash table are retransmitted every `retransmit_interval`. The value of the `retransmit_interval` depends on the wireless technology and the bit rate. It should take into account the communication time between the APs and the combining agent over the wired LAN, the time to retransmit an asynchronous ack over the WLAN, and any potential congestion. We estimate this time using an exponentially moving average in a manner similar to the TCP RTT estimate. The `retransmit_interval` is set to the average estimate plus one standard deviation.

On the downlink, the retransmission strategy can be simplified since packet recovery does not involve any communication between nodes. In particular, we envision that SOFT will be implemented in hardware on the wireless card itself. In this case, we believe SOFT can check whether a packet is recoverable via combining with prior receptions very quickly.<sup>4</sup> The combining algorithm can be executed

<sup>4</sup>Our combining algorithm in §4 uses a weighted sum of the s-packets. Thus, there is no need to keep all s-packets. The sum can be constructed incrementally as more receptions arrive. Combining requires only combining the most recently received s-packet with the weighted sum of prior s-packets, which can be quite fast. Thus, the card needs not maintain more than an s-packet worth of memory.

within a SIFS (i.e., 28 microseconds), and the receiver can immediately send an 802.11 ack if it is able to reconstruct the packet. Thus, the transmitter on an AP can use the current strategy for retransmission.

There is no reordering on the downlink. On the uplink, the combining agent puts packets in order before forwarding them. Each packet-id is assigned a timestamp that corresponds to when the agent first saw that id. The agent ensures that forwarded packets leave in the same order as their ids arrived at the agent for the first time. The agent has a variable, called `forwarding_time`, that is set to the timestamp of the packet-id that the agent should forward next. When the agent obtains a correct packet, it checks its timestamp. If the timestamp matches the `forwarding_time`, the packet is forwarded and the `forwarding_time` is set to the timestamp of the next id. Otherwise the packet is kept in an ordered list until the `forwarding_time` matches its timestamps. The `forwarding_time` is also updated whenever an s-packet times out.

## 4. COMBINING ALGORITHM

How should one combine the information from multiple corrupted receptions in order to maximize the chances of recovering a clean packet? For both uplink and downlink, the combining algorithm is presented with multiple s-packets that correspond to the same original transmission. None of these s-packets is sufficient on its own to recover the original transmission. Yet, because these are s-packets, they carry SVs for each bit, which give the combining algorithm a hint about the noise level in that bit.

Say that the combiner is presented with 3 s-packets. Recall that a positive SV means “1”, a negative SV means “0”, and that the magnitude of the SV refers to the confidence that the physical layer has in the decision. Let the SV corresponding to the  $i^{\text{th}}$  bit in these s-packets take the values: 0.3, -0.1 and -0.2. How does the combining algorithm decide whether the  $i^{\text{th}}$  bit is “0” or “1”?

The most straightforward approach would take the maximum corresponding SV since it is the reception with most confidence. Thus, in the above example, one would say that bit  $i$  is a “1” because the reception with the highest confidence (i.e., 0.3) has mapped it to “1”. But is this the best answer? Clearly, there are other approaches that look equally good. For example, one may resort to a majority vote. In this case, two receptions map this bit to “0” (-0.15 and -0.2) whereas one reception maps it to “1” (one positive value of 0.3). Thus, a majority vote would decide that the bit should be “0”, which is the opposite of the previous answer.

There are other approaches too, such as comparing the sum of the positive values to the sum of the negative values, or comparing the sum of the squares of the positive values to the sum of the squares of the negative values, etc. We would like to pick the combining strategy that maximizes the recovery probability.

We analyze the packet recovery probability and adopt a combining strategy that maximizes the likelihood of recovering a packet. Our strategy uses the sum of SVs weighted by the noise variance at their corresponding AP. It is based on the following lemma, which gives the optimal decision assuming additive Gaussian white noise (AGWN).

LEMMA 4.1. *Let  $y_1, \dots, y_k$  be SVs that correspond to multiple receptions of the same bit over different AWGN chan-*

nels. To maximize the recovery probability, one should map the bit to “0” or “1” according to the following rule:

$$\text{if } \sum_i \frac{y_i}{\sigma_i^2} \geq 0 \text{ then the bit is “1”, otherwise it is a “0”,}$$

where  $\sigma_i^2$  is the noise variance in the  $i^{\text{th}}$  AWGN channel.

The proof of the lemma is in the appendix. We also note that though the above lemma focuses on modulation systems where a symbol is a single bit, the appendix shows a generalized form that applies to larger symbol size.

We note the following points.

- Straightforward approaches for combining multiple receptions including taking the SV with the highest confidence or doing a majority vote are suboptimal.
- One should not treat all receptions equally. This is particularly important for the uplink where different receptions traverse a significantly different wireless channel. For example, the wireless transmitter might have a line of sight to one of the access points, resulting in lower noise variability in this channel, and thus one should trust this channel more. One should not think that the more receptions she/he has the lower the error will be. Including physical information from APs with highly variable channels (i.e., large  $\sigma^2$ ) without accounting for that variability decreases the overall performance.
- Lemma 4.1 is similar to maximal ratio combining [7] but since the SVs are normalized by the physical layer, there is no need to multiply by the mean strength of the signal. Another difference is that in SOFT a combined packet has to pass the 802.11 checksum.
- The decision rule above requires the noise variance,  $\sigma_i^2$ , on each channel. We compute this value by looking at the variance in the received signal, as explained in §6.
- The result in Lemma 4.1 assumes an AWGN model. The accuracy of this assumption depends on the environment and the modulation scheme (e.g., our implementation uses GMSK modulation, in which case the SVs are not Gaussian). Experimental results in §9, however, show that the decision strategy advocated by Lemma 4.1 is superior to other strategies in practice.

## 5. DIRECT SEQUENCE SPREAD SPECTRUM

802.11b networks use Direct Sequence Spread Spectrum (DSSS). Each bit in a packet is mapped to a *multi-bit* codeword before transmission. This is achieved by multiplying the bit value by a pseudo-random sequence. For example, we can map a “1” bit to “11100010010” and a “0” bit to “00011101101”. The bits in a codeword are called *chips*, and the process of mapping a logical bit to a codeword is called *spreading*. The length and values of the codewords used in 802.11b vary depending on the bit rate. In DSSS, an error has to change many chips in a codeword before it causes an error in mapping a received codeword to the correct logical bit.

A simplistic extension of SOFT to DSSS would apply the combining algorithm before DSSS despreading. In particular, the APs would communicate a soft value for each chip in a received codeword. The combining algorithm in §4 is used to assign a 0-1 value to each chip. We then perform

despreading, i.e., we map the corrected chips to the codewords corresponding to the “0” and “1” bits in the packet. Though this approach works, it sends a soft value for each received chip, consuming a significant amount of Ethernet throughput. It would be better if we can send a single SV per codeword, (i.e., one SV per logical bit).

SOFT performs DSSS despreading in the physical layer, and exposes a single SV for each DSSS codeword, i.e., a single SV for each logical bit in a packet. As a result, it keeps a clean abstraction between the physical layer and higher layers. Also, this significantly reduces the overhead of communicating SVs over the wired Ethernet.

But can we use a single SV per codeword and still achieve optimal combining (for the AWGN model)? First, we compute the optimal combining strategy for DSSS. Say that we have  $k$  s-packets corresponding to the same data packet. Let us focus on the  $i^{\text{th}}$  codeword in these s-packets. Let each codeword contain  $m$  chips. In this context, a soft codeword (s-codeword) is a sequence of  $m$  SVs, i.e.,  $\vec{y}_i = (y_1, y_2, \dots, y_m)$ . The following lemma gives the optimal combining strategy for DSSS modulation and is proved in the appendix.

LEMMA 5.1. Let  $\vec{y}_1, \dots, \vec{y}_k$  be multiple s-codewords that correspond to the same codeword transmitted over different AWGN channels. Let  $\vec{x}^1 = (x_1^1, \dots, x_m^1)$  be the codeword corresponding to logical “1” and  $\vec{x}^0 = (x_1^0, \dots, x_m^0)$  the codeword corresponding to a logical “0”. The following strategy maximizes the recovery probability:

$$\text{if } \sum_i \sum_j \frac{y_{ij}(x_j^1 - x_j^0)}{\sigma_i^2} \geq 0, \text{ then “1”, otherwise “0”,}$$

where  $\sigma_i^2$  is the variance in the  $i^{\text{th}}$  AWGN channel.

However, we do not want to send over the Ethernet a whole vector of SVs for each codeword. We want the physical layer to compute for each codeword a single SV that is sufficient for optimal combining. Lemma 5.1 shows that this is possible. In Lemma 5.1, the sum over  $j$  can be done by the physical layer itself, whereas the sum over  $i$  can be done by the combining agent. Said differently, for codeword  $i$ , the physical layer exposes a single SV  $Y_i = \sum_j y_{ij}(x_j^1 - x_j^0)$ . The combining agent then uses the same rule for both DSSS and non-DSSS combining:

$$\text{if } \sum_i \frac{Y_i}{\sigma_i^2} \geq 0, \text{ then “1”, otherwise “0”}.$$


## 6. ESTIMATING THE NOISE VARIANCE

In order to compare the soft values observed at different receivers, we require the corresponding  $\sigma_i^2$  of the channels. In SOFT, the physical layer estimates a channel’s variance experimentally using the empirical distribution of the SVs before quantization. The variance is passed to the higher layer in each s-packet.

For the  $i^{\text{th}}$  AWGN channel, the SV value of a bit can be expressed as

$$y_i = hx + n_i,$$

where  $n_i$  is a white Gaussian noise,  $h$  is the channel attenuation, and  $x = -1$  for a “0” bit and  $x = +1$  for a “1” bit. Thus, conditioned on the bit value,  $y_i$  is also a Gaussian variable

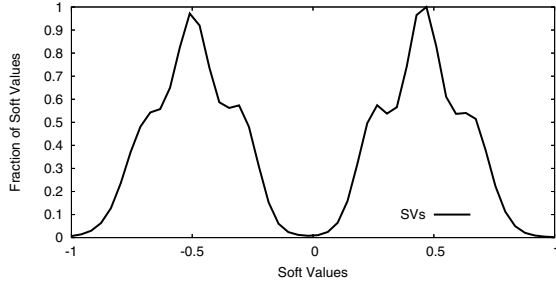

**Figure 2: Soft Value Distribution:** A typical distribution of the soft values seen in our testbed. The two modes correspond to “0” and “1” bits.

with the same variance as  $n_i$ . Thus, we estimate the variance in  $n_i$  using the variance in the  $y_i$ ’s.

Note that the soft values have the same distribution as the  $n_i$ ’s only when we fix the value of the transmitted bit (i.e., a fixed  $x$  in the equation above). In general we cannot tell for sure at an AP which received SV corresponds to a “0” and which corresponds to a “1”. But because the vast majority of soft values already correspond to correctly decodable bits, the statistical variance of the absolute value of the soft values is a good estimate for  $\sigma_i^2$ . We compute this for every packet by using all the soft values from it.


Finally, Figure 2 shows the soft values distribution (i.e., the  $y_i$ ’s) at a particular AP in our testbed. Clearly, the distribution is not Gaussian. However, our results in §9 show that the Gaussian approximation is quite effective.

## 7. REDUCING OVERHEAD

In the uplink case, SOFT transfers the s-packets from the APs to the combining agent over the wired Ethernet. We leverage the much higher wired Ethernet bandwidth to improve the scarce wireless throughput. The increase in the consumed Ethernet bandwidth however is an overhead of the system. We note that in a typical operation environment (e.g., university campus), Ethernet throughput is an order of magnitude larger than WLAN throughput. Furthermore, though wireless throughput is increasing at a steady speed, it is likely that the difference between Ethernet and WLAN throughput will continue to hold; 10 Gb/s Ethernet (10GbE) is already on the market and 100 Gb/s Ethernet (100GbE) is presently under development by the IEEE [1].

Despite the big difference between Ethernet’s and WLAN’s throughput, it is important to keep SOFT’s overhead bounded. The wired bandwidth consumed by transferring s-packets depends on how we express an SV. If an SV is expressed as a 16-bit number, then each packet will be amplified 16 times. To reduce the overhead, we need to quantize the SVs. Optimal quantization depends on the  $\sigma^2$  of the channel. That is, for a particular distribution of SVs, one needs to integrate the total area and divide into  $2^k$  bins where  $k$  is the number of bits used to express each SV. In practice, however, we found that a uniform quantization works equally well.

Thus, our quantization algorithm works as follows. It picks a constant cutoff for all SVs across all experiments. The cutoff value depends on the modulation scheme and thus should be calibrated for each 802.11 bit rate. Values above the cutoff are reduced to the cutoff value. Every SV is expressed using 3 bits, one for the sign and 2 bits for the magnitude.



**Figure 3: The block diagram of the different components in the receiver module.** The match values output by the match filter in the figure correspond to the soft values used in our algorithms.

Though this still consumes Ethernet bandwidth, it keeps the overhead within practical limits.

## 8. IMPLEMENTATION

This section describes our SOFT implementation.

### 8.1 Hardware and Software Environment

We have implemented a prototype of SOFT using Software Defined Radios (SDR). SDRs implement all the signal processing components (source coding, modulation, clock recovery, etc.) of a wireless communication system entirely in software. The hardware is a simple radio frequency (RF) frontend, which acts as an interface to the wireless channel. The RF frontend converts the signal generated by the SDR from digital to analog and transmits it on the wireless channel. At the receiver, the base-band signal is converted from analog to digital and passed to the SDR software. Thus, SDRs expose the raw signal to software manipulation and thus present an opportunity to exploit information traditionally available only at the physical layer.

We use the Universal Software Radio Peripheral (USRP) [14] as our RF frontend. USRP is a generic RF frontend developed specifically for the GNU Radio SDR. The software for the signal processing blocks is from the open source GNURadio project [6]. We use the default GNURadio configuration,<sup>5</sup> which results in a bit rate of 500kb/s. The packet consists of a 32-bit preamble, a 1500-byte payload, 32-bit CRC.

### 8.2 Implementation Details

On the sending side, the network interface pushes the packets to the GNU software blocks with no modifications. On the receiving side, the packet is detected and demodulated using the GNURadio software. Fig. 3 shows the block diagram of the components in the GNURadio receiver. The signal is first passed through a clock recovery module, which ensures that the optimum sampling time is found. The output of the clock recovery is passed through a matched filter which outputs the soft value we use in our algorithms. Soft value computation depends on the modulation scheme used. But the basic intuition behind all matched filters is the same. They integrate the received signal energy so that the zero-mean gaussian noise is cancelled out and output a single float value which is the soft value. This soft value is now passed to a decision device that estimates what bit was transmitted depending on the sign of the soft value.

We use the output of the match filter as our SVs as described in §3.1. This value is a 32-bit float, which we quantize according to the algorithm in §7, and pass to SOFT. Our SOFT implementation matches the description in §3.

<sup>5</sup>DAC Rate: 128e6 samples/s, Interpolation Rate: 128, 2 samples/symbol, 1 bit/symbol.





**Figure 4: Testbed Topology.** The figure shows the testing environment. The dots mark the locations of the GNURadio nodes.

The modulation scheme we use in our implementation is Gaussian Minimum Shift Keying (*GMSK*). But the ideas we develop in this paper are applicable independent of the modulation scheme. The main reason for using *GMSK* here is that the GNU radio project has a mature *GMSK* implementation. At the time of submission, GNU implementations of other modulation techniques were either non-existent or buggy. *GMSK* is used in GSM, which is a widely used cell-phone standard. It has very good bit-error properties, has a simple demodulation algorithm and excellent spectral efficiency.

We have recently implemented SOFT with Differential Binary Phase Shift Keying (DBPSK), which is the modulation scheme used in 802.11 to send at 1 Mb/s. Our results are quantitatively and qualitatively similar to those obtained with *GMSK*. We report some of these results in §9.10.

## 9. EXPERIMENTAL RESULTS

We evaluate SOFT in a 13-node software radio testbed. The topology is shown in Figure 4. Each node is a commodity PC connected to a USRP GNU radio [14].

SOFT’s combining algorithm works the same whether the s-packets are the result of overhearing at multiple APs or retransmissions at a single wireless receiver. Thus, we use the uplink experiments to explore the various aspects of SOFT and its combining strategy and revert to the downlink experiments to investigate retransmissions under SOFT. In SOFT, the uplink also combines faulty s-packets with their potentially faulty retransmissions to recover a clean packet. Our experiments however do not perform retransmissions on the uplink. This disentangles the gains due to space diversity from those due to time diversity.

### 9.1 Setup

In each experiment, we pick three nodes as our access points (APs), and randomly vary the sender among the nodes in the testbed. Each randomly chosen sender transmits 500 packets, where packet size is 1500B. One of the three APs in each experiment is designated as the master AP and runs the combining agent. The other APs send their s-packets to the master AP over the wired Ethernet, which combines information across s-packets to reconstruct a clean packet. In uplink experiments, retransmissions are turned off. Thus, the gain in the uplink experiments is solely due to space diversity.

For the downlink experiments, we randomly pick a sender-receiver pair and transfer 500 packets between them. Here, we focus on the gains due to time diversity, i.e., reductions in loss rate due to SOFT’s ability to recover clean packets by combining faulty transmissions with faulty retransmissions of the same packet.

It should be noted that because GNU Radios perform all processing in software, many of the timing details of 802.11 cannot be implemented. This has two implications for our setup. In particular, unless one changes the FPGA code, one cannot consistently send synchronous 802.11 acks on time. We emulate 802.11 acks by sending the ack packet immediately after the data packet, as fast as the SDR system permits. Second, with no proper timing control, one cannot implement 802.11’s backoff algorithm. Thus, we do not have a mechanism to avoid collisions. Since we run only one sender at any time, our senders do not collide with each other. They may however be affected by interfering signals in the same band. We try to run our experiments at night when wireless activities in our lab are limited. **Note that although the errors resulting from interfering signals reduce the delivery rates, they do not bias the results towards any particular protocol, among those compared. The compared protocols process the same reception data, each with its approach for recovering correct packets.**

## 9.2 Compared Approaches


We compare the following approaches

- **SOFT:** This approach adopts the architecture in §3 and uses the combining strategies of Lemmas 4.1 and 5.1.
- **MAX Confidence:** This is similar to SOFT but with a max-confidence combining strategy. Specifically, when combining multiple SVs that correspond to the same bit, the bit is mapped to “0” or “1” according to the SV with the maximum absolute value.
- **Majority Vote:** This is also similar to SOFT but it uses a majority vote to combine multiple receptions. Specifically, each bit is assigned the value agreed on by the majority of the receptions (i.e., the majority of the APs).
- **Current Approach:** This approach is similar to the current WLAN scenario which does not allow the APs to cooperate, and does not combine bits across different receptions.
- **MRD:** This is a prior cooperative scheme for packet recovery [17]. MRD does not use physical layer information. It works as follows. It divides each packet into blocks. For each block, it assumes that at least one of the APs has correctly received the bit values for that block. It attempts to recover a faulty packet by trying every version received for each block, and checking whether such combined packet passes the 802.11 checksum. MRD computational cost is exponential in the number of blocks. Thus, in order to be computationally feasible, MRD recommends using 6 blocks per packet [17], which is what we use in our experiments.


## 9.3 Metrics

We use the following metrics:

- **Packet Delivery Rate:** This is the fraction of transmitted packets that the WLAN correctly delivers to the destination. For the current approach, the delivery rate is computed as the fraction of uncorrupted packets received at the best AP, i.e., the one with the lowest loss rate for the particular sender. For cooperative approaches, the delivery rate is the fraction of packets that were successfully recovered either immediately at the radio receiver, or after running the combining algorithm. The delivery rate is computed for each approach without retransmissions.

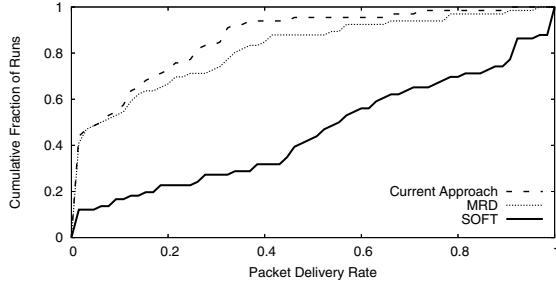

**Figure 5: CDF of Packet Delivery Rates.** SOFT significantly improves the packet delivery rate in lossy and low-coverage networks. While the mean delivery rate in the current approach and MRD is less than 7%, the mean SOFT delivery rate is as high as 62%. Retransmissions are turned off in these experiments, thus the improvement in delivery rate is mainly due to the use of soft values and the effect of spatial diversity.

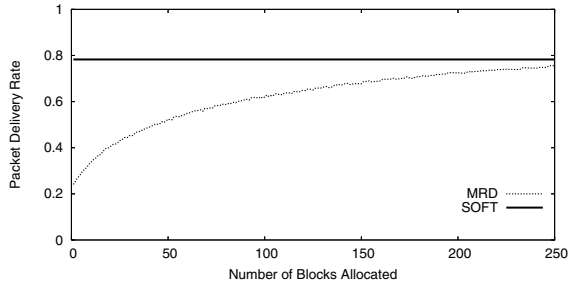

**Figure 6: Comparing Delivery Rates for Increased MRD Blocks.** The figure plots the delivery rate of one sender as a function of increased MRD blocks. SOFT’s delivery rate for this sender is about 78%. MRD cannot match SOFT’s performance even with hundreds of blocks. In practice, it is infeasible to have such many blocks both because of computational overhead and the checksum losing its error detection capability.


- *Number of Retransmissions:* This is the number of times the sender had to retransmit the same packet to ensure errorless delivery to higher layers. Retransmissions are activated only during downlink experiments. As such, the uplink experiments serve to evaluate the gains due to spatial diversity. The downlink experiments, where no spatial diversity exists, are used to evaluate the gains due to time diversity.

## 9.4 Importance of Cooperation & Soft Values

We are interested in quantifying the impact of cooperation on the reliability of WLANs. In particular, how much improvement in loss rate should one expect from combining packets across APs? Further, is there a significant benefit from obtaining physical layer information or is a higher-layer technique like MRD sufficient?

To answer these questions we perform 100 runs of the experiment described in §9.1. Specifically, each time we pick three APs from the nodes in the testbed and a random sender, which transmits 500 packets. We compute the packet delivery rate for SOFT, the current approach, and MRD. Figure 5 compares the CDFs of the deliver rates for the three schemes.

The figure shows the importance of using soft values in lossy and low-coverage networks. The mean delivery rate in the current approach is less than 7%. Further, MRD does not

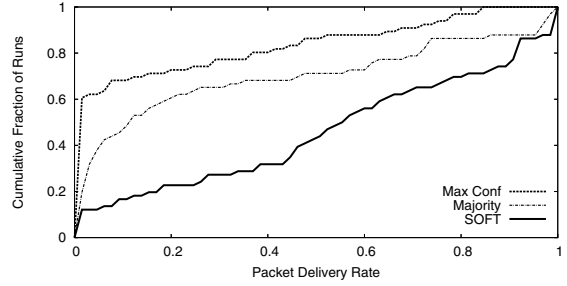

**Figure 7: CDFs of Delivery Rates for Different Combining Strategies.** The figure compares the delivery rate under three combining strategies: SOFT, Max-Confidence, and Majority-Vote. It shows that SOFT’s weighted-sum strategy performs significantly better than the others, which supports our analytical results.

help much when delivery rates are considerably low. MRD can recover only from a handful of bit errors. In contrast, SOFT’s mean delivery rate is 62%, which is about an order of magnitude better than both the current approach and MRD.

We also check whether having a larger number of blocks improves MRD’s performance. In Figure 6, we focus on a specific sender and a specific AP set. We vary the number of blocks used by MRD. Note that MRD’s computational complexity increases exponentially with the number of blocks. Computing the CRC for a large number of blocks is infeasible in practice. But since we know the transmitted packet content, we can check whether MRD recovers a correct packet without incurring the exponential cost. To do so, we compare the received blocks directly against the transmitted ones. Figure 6 shows that even if it would be practical to increase the number of MRD blocks to 200, SOFT still does better. This further emphasizes the importance of exposing the information available to the physical layer to higher layers.

## 9.5 The Role of the Combining Rule

We also want to investigate how the delivery rate changes with the strategy used to recover packets from multiple soft copies. In particular, Lemma 4.1 advocates using a weighted sum of the SVs. But the lemma assumes an AWGN model. Would the result of this lemma hold in practice?

Figure 7 compares the CDFs of packet delivery rates for various combining rules. The experiments are run using the setup described in §9.1 and the CDFs are computed over all such runs. The figure shows that SOFT’s weighted-sum strategy performs better than taking a majority vote or using the bit value with the maximum confidence. Thus, the experimental results support the analysis in §4.

Also, note that a majority vote works better than trusting the largest SV. This is particularly true at low delivery rates. In this case, all APs are receiving very poor signals. The differences in their SVs are close to the noise level. Taking the max SV allows a biased SV to deviate the results, whereas taking a majority vote increases resilience.


## 9.6 Impact of Noise Variance

Our analysis highlights the importance of accounting for the noise variance when combining SVs received from different APs. Here, we experimentally check how normalizing by





**Figure 8: CDF of Delivery Rates with and without Normalization by the Noise Variance.** The figure shows that normalizing the SVs by the noise variance improves the delivery rates, and that the normalization is particularly important for moderate to moderately-high delivery rates.

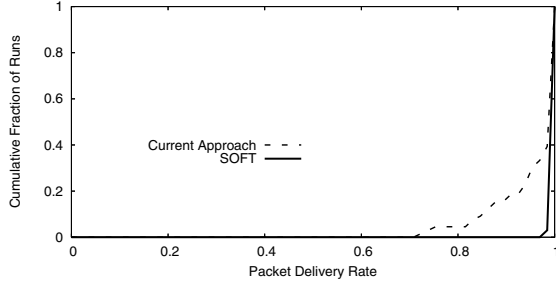

**Figure 9: CDFs of Delivery Rates in Low Loss Environments.** We use the same power as before but with DSSS, which improves the delivery rates for both SOFT and the current approach. For these environments, SOFT eliminates all losses for the vast majority of the runs.


the noise variance affects delivery rates. The noise variance is computed at each AP experimentally using its received data, as described in §6.

Figure 8 shows that accounting for the noise variance can improve the delivery rate by about 14%. It is interesting to note that the noise variance is particularly important when the delivery rates are neither too low nor too high. This is because at very low delivery rates, all APs have highly noisy channels such that the difference in their noise level does not matter. At very high delivery rates at least one and sometimes two APs have very good channels and can still recover the signal despite the bias introduced by the more challenged AP. This is particularly true because SOFT does not try to combine a packet that passes the checksum test, which prevents a highly noisy AP from corrupting a correctly received packet. It is at moderate delivery rates when a biased AP produces destructive effect, polluting the SVs of the two not very confident APs.


## 9.7 SOFT With Low Loss Rates

This section shows that SOFT’s benefits extend to scenarios with low loss rates. We repeat the experiments described in §9.1 with DSSS. We compare SOFT’s delivery rates with the delivery rates of the current approach. In these experiments, we spread each logical bit in a packet but keep the per-chip power at the same level as before. This helps illustrate the behavior of SOFT at low loss rates and under DSSS.<sup>6</sup>

<sup>6</sup>The bandwidth of the USRP signal is limited to at most 4MHz. Thus, our DSSS implementation does not use wider

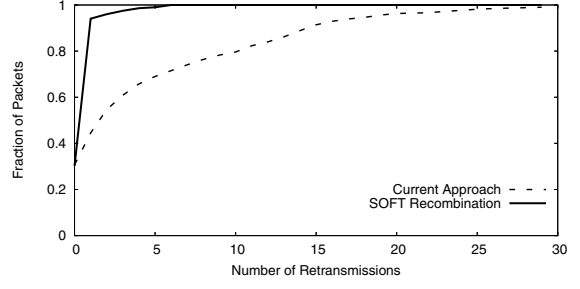

**Figure 10: CDFs of the Number of Retransmissions on the Downlink.** SOFT correctly recovers 94% of the packets with less than one retransmission. The current approach needs up to 18 retransmissions to achieve the same delivery rate.

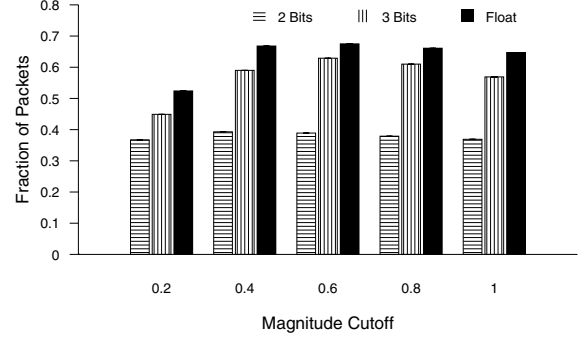

**Figure 11: Impact of Quantization on the Delivery Rates.** The figure shows two results: 1) Using 3 bits to express the value of the SVs is as good as using a 16-bit float. 2) the quantization is fairly resilient to the choice of cutoff value for any value larger than 0.4.


In comparison with Figure 5, Figure 9 shows a significant improvement in the overall loss rate for both SOFT and the current approach. SOFT, however, still significantly outperforms the current approach. With SOFT, 97% of all runs show perfect delivery rates, as opposed to only 72% with the current approach. Thus, for environments with good delivery rates, SOFT eliminates most of the residual losses.

## 9.8 Retransmissions on the Downlink

We also evaluate SOFT’s performance on the downlink. In this case, SOFT reconstructs a faulty packet by combining multiple receptions at the same receiver. We want to compute the number of retransmissions required to recover a correct packet, with and without SOFT. We perform the following experiment. We pick a random sender-receiver pair from the nodes in testbed. The sender transmits 500 different packets. In contrast, to prior experiments, the sender retransmits every packet until the receiver recovers a correct copy of the packet. We repeat the same experiment for 30 sender receiver pairs.

Figure 10 shows a CDF of the number of retransmissions per packet, taken over all packets and all sender-receiver pairs. The figure shows that in our testbed, only 33% of the packets on the downlink are received with no need for retransmission (the value for #Retransmissions = 0). SOFT

bandwidth. Rather, it serves as a check that a single SV per codeword is sufficient, and that SOFT performs well in high SNR environments.

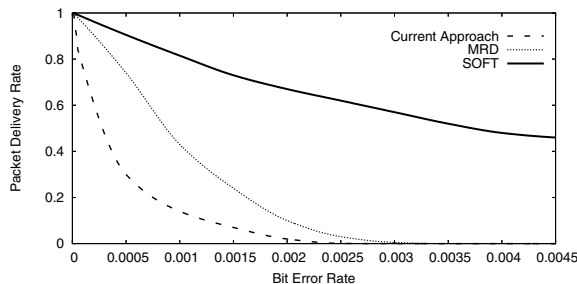

**Figure 12: At What BER Does SOFT Help?** The figure shows that SOFT is particularly effective when the bit error rate (BER) is larger than 0.0005. This indicates that SOFT would help in eliminating dead spots and dealing with low coverage. Further, the results in this figure are for DBPSK modulation, which shows that SOFT works with various modulation schemes.

cannot improve this number on the downlink because there is no cooperation. But SOFT significantly improves the overall performance of the downlink. In particular, 94% of the packets are correctly received after one retransmission. In contrast, the current approach needs up to 18 retransmissions to achieve the same reliability.

## 9.9 Impact of Quantization

To reduce the overhead over the wired Ethernet, we quantize the SV values and express them using only 3 bits. We want to ensure that by doing so we are not losing too much in term of delivery rates. Thus, we plot the average delivery rate of 30 random runs for various quantization parameters.

Figure 11 shows two important results. First, our approach is fairly resilient to the choice of the cutoff for values in the range [0.4, 0.8]. Thus, despite that the SVs collected at different APs have different variance (i.e., spread), we can still use the same cutoff value across all APs. Second, it is sufficient to express the SVs using 3 bits, one for the sign and two bits for the magnitude. This reduces the size of an s-packet and significantly reduces the wired overhead.

## 9.10 At What BER Does SOFT Help?

Our last result serves two purposes. First, it illustrates the range of bit error rates (BER) where SOFT improves performance. Second, it shows that SOFT extends to various modulation schemes.

Figure 12 shows the performance of the current approach, MDR, and SOFT as BER increases. To plot this figure we use 130 different runs. In each run a sender broadcasts 500 packets, which are collected at 3 APs. We vary the transmission power from one run to another to cover a range of BER. For each run, we compute the BER at the best AP, and the packet delivery rate for the current approach, MRD, and SOFT. We note that these results are collected using DBPSK modulation.

Figure 12 shows that SOFT is particularly beneficial when the BER is larger than 0.0005. This indicates that SOFT can help in eliminating dead spots and improving wireless coverage. Further the DBPSK results are in alignment with the results obtained using GMSK, indicating that SOFT works with various modulation schemes.

## 10. CONCLUSION

Today's wireless networks have largely adopted the abstractions of wired networks, despite the fact that they come

with unique challenges. Lossy links and poor connectivity are two main problems in wireless networks that have direct impact on application performance and user satisfaction. Current approaches to address these problems have mostly been inadequate. However, wireless media provide intrinsic resilience due to their spatial and temporal diversity, and this presents opportunities to address their challenges with novel solutions.

Computer networks have traditionally been designed with narrow interfaces between layers in the stack. In this paper, we have presented SOFT, a scheme that increases the reliability of wireless networks by adopting a more informative interface between the physical and higher layers, and using confidence values from the physical layer to cooperatively reconstruct packets at the data layer. Our experimental results demonstrate that SOFT improves the mean packet delivery rate and reduces the required number of retransmissions by an order of magnitude.

## 11. ACKNOWLEDGMENTS

We are greatly thankful to Hariharan Rahul, Sachin Katti, and Shymnath Gollakota for spending many hours editing the paper, and Micah Brodsky, Nate Kushman, and Kyle Jamieson for providing insightful comments. This work is supported by NSF award CNS-0627021, DARPA IT-MANET, and Quanta. The opinions and findings in this paper are those of the authors and do not necessarily reflect the views of NSF, DARPA, or Quanta.

## 12. REFERENCES

- [1] 100 Gigabit Ethernet Transmission Sets New Record, 2006.  
<http://arstechnica.com/news.ars/post/20061115-8231.html>.
- [2] T. W. A. Avudainayagam, J.M. Shea and L. Xin. Reliability Exchange Schemes for Iterative Packet Combining in Distributed Arrays. In *Proc. of the IEEE WCNC*, volume 2, pages 832 – 837, 2003.
- [3] A. J. Nicholson and Y. Chawathe and M. Y. Chen and B. D. Noble and D. Wetherall. Improved Access Point Selection. In *MobiSys*, 2006.
- [4] D. Aguayo, J. Bicket, S. Biswas, G. Judd, and R. Morris. Link-level Measurements from an 802.11b Mesh Network. In *SIGCOMM*, 2004.
- [5] P. Bahl, J. Padhye, L. Ravindranath, M. Singh, A. Wolman, and B. Zill. DAIR: A Framework for Managing Enterprise Wireless Networks Using Desktop Infrastructure. In *Hotnets*, 2005.
- [6] E. Blossom. GNU Software Defined Radio.  
<http://www.gnu.org/software/gnuradio>, 2006.
- [7] D. G. Brennan. On the Maximal Signal-to-Noise Ratio Realizable from Several Noisy Signals. *Proc. IRE*, 43:1530, October 1955.
- [8] S. S. Chakraborty, E. Yli-Juuti, and M. Liinajarja. An ARQ Scheme with Packet Combining. *IEEE Communication Letters*, 1998.
- [9] S. Cheng and M. C. Valenti. Macrodiversity packet combining for the ieee 802.11a uplink. In *IEEE WCNC*, 2005.
- [10] S. Diggavi, N. Al-Dhahir, A. Stamoulis, and A. Calederbanks. Great Expectations: The Value of

- Spatial Diversity in Wireless Networks. *Proceedings of the IEEE*, 92(2):219 – 270, Feb. 2004.
- [11] R. Gallager. *Low-Density Parity-Check Codes*. MIT Press, Cambridge, MA, 1963.
- [12] V. Guruswami and M. Sudan. Reflections on Improved Decoding of Reed-Solomon and Algebraic-Geometric Codes. *IEEE Information Theory Society Newsletter*, 52(1):6–12, 2002.
- [13] J. Hagenauer and P. Hoecher. A Viterbi Algorithm with Soft-Decision Outputs and its Applications. In *IEEE GLOBECOM*, 1989.
- [14] E. Inc. Universal software radio peripheral. <http://ettus.com>.
- [15] K. Jamieson and H. Balakrishnan. PPR: Partial Packet Recovery for Wireless Networks. In *ACM SIGCOMM*, Kyoto, Japan, August 2007.
- [16] J. Laneman, D. Tse, and G. Wornell. Cooperative diversity in wireless networks: Efficient protocols and outage behavior. *IEEE Transactions on Information Theory*, 50(12), 2004.
- [17] A. K. Miu, H. Balakrishnan, and C. E. Koksall. Improving Loss Resilience with Multi-Radio Diversity in Wireless Networks. In *11th ACM MOBICOM Conference*, Cologne, Germany, Sept. 2005.
- [18] C. Reis, R. Mahajan, M. Rodrig, D. Wetherall, and J. Zahorjan. Measurement-Based Models of Delivery and Interference. In *SIGCOMM*, 2006.
- [19] M. Rodrig, C. Reis, R. Mahajan, D. Wetherall, and J. Zahorjan. Measurement-based characterization of 802.11 in a hotspot setting. In *ACM SIGCOMM Workshop on Experimental Approaches to Wireless Network Design and Analysis (E-WIND)*, 2005.
- [20] A. Scaglione, D. Goeckel, and J. Laneman. Cooperative communications in mobile ad hoc networks. *IEEE Signal Processing Magazine*, 23(5):18 – 29, 2006.
- [21] D. Tse and P. Vishwanath. *Fundamentals of Wireless Communications*. Cambridge University Press, 2005.
- [22] M. C. Valenti. Improving uplink performance by macrodiversity combining packets from adjacent access points. *IEEE WCNC*, pages 636– 641, 2003.
- [23] M. Wang, X. Weimin, and T. Brown. Soft Decision Metric Generation for QAM with Channel Estimation Error. *IEEE Transactions on Communications*, 50(7):1058 – 1061, 2002.
- [24] S. C. Yang. *CDMA RF System Engineering*. Artech House Publishers, 1998.

## APPENDIX

### Proof of Lemma 4.1

Let  $\vec{y} = (y_1, y_2, \dots, y_k)$  be soft values associated with a particular bit. Given a transmitted bit value  $x$ , the  $y$ 's are conditionally independent, and correspond to multiple receptions of the same bit over different independent AWGN channels  $n_i$  with  $\mu = 0$  and  $\sigma_i^2$ . I.e.  $y_i = hx + n_i$ , where  $h$  is a constant, and  $x = -1$  for a “0” bit or  $x = 1$  for a “1”. We model  $h$  as a constant independent of the channel because our experimental results show that with the AGC on,  $h$  becomes irrelevant.

Let  $H_0$  be the hypothesis that  $x = -1$  and let  $H_1$  be the hypothesis that  $x = 1$ . Note that the two hypotheses are

equally likely a priori, i.e., before a reception the likelihood of a “0” is the same as the likelihood of a “1”.

Here, we consider the likelihood functions:

$$H_0 : P_{\vec{y}|H}(\vec{y}|H_0) = \prod_i \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_i - (-h))^2}{2\sigma_i^2}}$$

$$H_1 : P_{\vec{y}|H}(\vec{y}|H_1) = \prod_i \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_i - (h))^2}{2\sigma_i^2}}$$

The optimum decision is to choose:

$$\begin{aligned} P(H_0|\vec{y}) &\stackrel{H_0}{\geq} P(H_1|\vec{y}) \\ \frac{P(H_0, \vec{y})}{P(\vec{y})} &\stackrel{H_0}{\geq} \frac{P(H_1, \vec{y})}{P(\vec{y})} \\ P(\vec{y}|H_0) \frac{P(H_0)}{P(\vec{y})} &\stackrel{H_0}{\geq} P(\vec{y}|H_1) \frac{P(H_1)}{P(\vec{y})} \\ P_{\vec{y}|H}(\vec{y}|H_0) &\stackrel{H_0}{\geq} P_{\vec{y}|H}(\vec{y}|H_1) \\ \ln \left( \prod_i \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_i - (-h))^2}{2\sigma_i^2}} \right) &\stackrel{H_0}{\geq} \ln \left( \prod_i \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_i - h)^2}{2\sigma_i^2}} \right) \\ \sum_i \frac{-(y_i - (-h))^2}{2\sigma_i^2} &\stackrel{H_0}{\geq} \sum_i \frac{-(y_i - h)^2}{2\sigma_i^2} \\ \sum_i -\frac{y_i}{\sigma_i^2} &\stackrel{H_0}{\geq} \sum_i \frac{y_i}{\sigma_i^2} \end{aligned}$$

The above result is equivalent to:

$$\text{if } \sum_i \frac{y_i}{\sigma_i^2} \geq 0 \text{ then it is “1” otherwise “0”,}$$

where  $\sigma_i^2$  is the variance in the  $i^{\text{th}}$  AWGN channel.

### Proof of Lemma 5.1

The proof of Lemma 5.1 is again fairly similar to that of Lemma 4.1. But here, instead of bits we replace them with the codeword which represents the bits “1” or “0” respectively. Thus,

$$P_{\vec{y}|H}(\vec{y}|H_0) \stackrel{H_0}{\geq} P_{\vec{y}|H}(\vec{y}|H_1)$$

These probabilities can be computed as follows:

$$P_{\vec{y}|H}(\vec{y}|H_0) = \ln \left( \prod_i \prod_j \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_{ij} - (hx_j^0))^2}{2\sigma_i^2}} \right)$$

$$P_{\vec{y}|H}(\vec{y}|H_1) = \ln \left( \prod_i \prod_j \frac{1}{\sqrt{2\pi\sigma_i^2}} e^{-\frac{(y_{ij} - (hx_j^1))^2}{2\sigma_i^2}} \right)$$

Thus, after substitution, we have:

$$\sum_i \sum_j \frac{-(y_{ij} - hx_j^0)^2}{2\sigma_i^2} \underset{H_1}{\overset{H_0}{\geq}} \sum_i \sum_j \frac{-(y_{ij} - hx_j^1)^2}{2\sigma_i^2}$$

$$\sum_i \sum_j \frac{y_{ij} x_j^0}{\sigma_i^2} \underset{H_1}{\overset{H_0}{\geq}} \sum_i \sum_j \frac{y_{ij} x_j^1}{\sigma_i^2}$$

The above result is equivalent to:

$$\text{if } \sum_i^k \sum_j^m \frac{y_{ij}(x_j^1 - x_j^0)}{\sigma_i^2} \geq 0 \text{ the logical bit is "1", else "0",}$$

where  $\sigma_i^2$  is the variance in the  $i^{th}$  AWGN channel.

### Generalizing Lemma 4.1 to Larger Symbols

LEMMA .1. Let  $y_1, \dots, y_k$  be the output of the match filter that correspond to multiple receptions of the same symbol over different AWGN channels. Let  $x_1, \dots, x_m$  be the possible value for the transmitted symbol, and  $h$  a constant attenuation. To maximize the symbol recovery probability, one should map the received symbol to a possible value  $x_j$  according to the following rule:

$$\arg \min_{x_j} \sum_j \frac{\|y_i - hx_j\|^2}{\sigma_i^2}$$

where  $\|\cdot\|$  is the Euclidian norm and  $\sigma_i^2$  is the variance in the  $i^{th}$  AWGN channel.

The proof is similar to that of Lemma 4.1. The only difference is that we replace bits with the symbols in our constellation.