

FEATURES

- Smart appearance
- Portable direct driven
- Universal quick connector match with various air tools



Model:
TA-2524



Model:
TA-3050

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH.cm
TA-2524	2.5	24	8	240/50	6.6	2800	215/23.5	57x28.5x61
TA-3050	3	50	8	240/50	7.3	2800	27.3/30	76x32.5x67

TACUMEN

AIR COMPRESSORS

MAKE WORK EASIER

TACUMEN
AIR COMPRESSORS

We Are
Specialized In
Air Compressor
Research,
Development
And Production

TACUMEN
TACUMEN®

TACUMEN

AIR COMPRESSORS

MAKE WORK EASIER

TACUMEN
AIR COMPRESSORS

We Are
Specialized In
Air Compressor
Research,
Development
And Production

TACUMEN
TACUMEN®

ROHS

CE

CCC

BELT DRIVEN AIR COMPRESSORS

TACUMEN

FEATURES

- Induction motor with low rotate speed, longer life and low noise

- Metal guard for protecting the belt and wheels

- Universal wheel and pneumatic tyre make machine easy to transport

- Various pumps can be matched with different tanks , meet customer's requirement

Model:
TA-V55HT

Model:
TA-V30HS

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH.cm
TA-V30HS	3	200	12.5	240/50	9.1	850	136.3/154.46	99x62x178
TA-V55HT	5.5	200	12.5	415/50	17.4	820	190.16/208.32	114x62x187



Model:
TA-20LS




Model:
TA-25LS



Model:
TA-30HT



Model:
TA-30LT

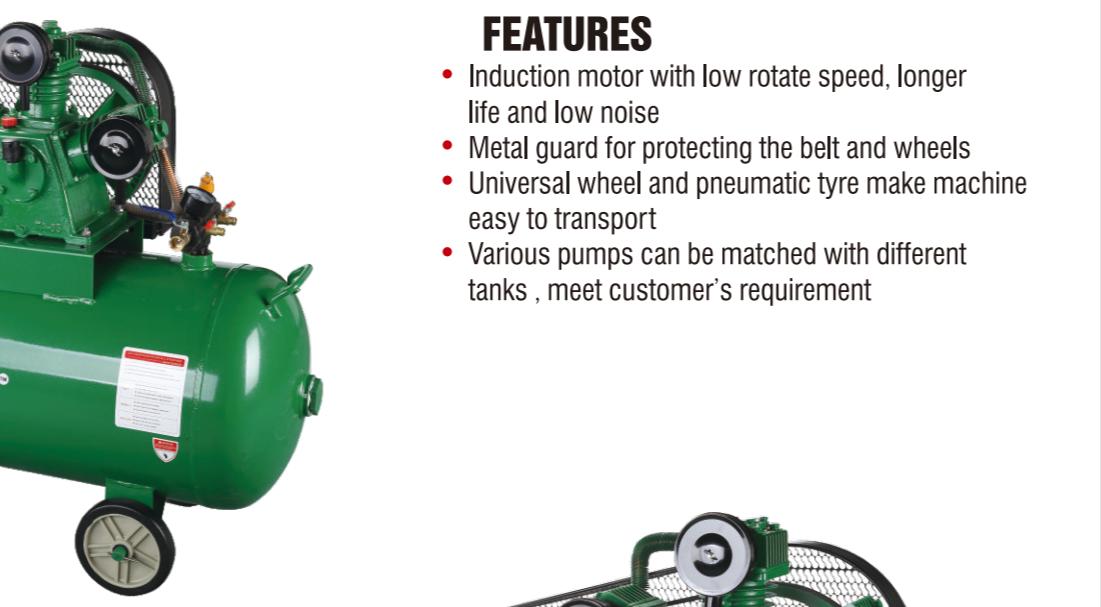

Model:
TA-30LS



Model:
TA-55HT
Model:
TA-55LT

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-20LS	2	100	8	240/50	8.4	1000	75.64/85.98	118.5x46x87.5
TA-25LS	3	100	8	240/50	12	1120	79.16/89.46	118.5x46x87.5
TA-30HT	3	150	12.5	415/50	9.1	850	116.3/134.46	139x53x104
TA-30LT	3	150	8	415/50	12.1	750	116.3/134.46	139x53x104

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-30LS	3	150	8	240/50	12.1	750	116.3/134.46	139x53x104
TA-55HT	5.5	150	12.5	415/50	17.4	820	170.16/188.32	139x53x104
TA-55LT	5.5	150	8	415/50	26.1	710	170.16/188.32	139x53x104



Model:
TA-75HT



Model:
TA-75LT



Model:
TA-100HT






Model:
TA-100LT





Model:
TA-120LT

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-75HT	7.5	200	12.5	415/50	16.9	1040	205/215.32	172.5x58x108
TA-75LT	7.5	200	8	415/50	33.8	940	205/215.32	172.5x58x108
TA-100HT	10	300	12.5	415/50	33.8	870	293.5/313.5	191x61x128



Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-100LT	10	300	8	415/50	50.6	870	293.5/315.5	191x61x128
TA-120HT	15	300	12.5	415/50	52.4	820	381/401	191x74x134
TA-120LT	15	300	8	415/50	70.8	740	381/401	191x74x134

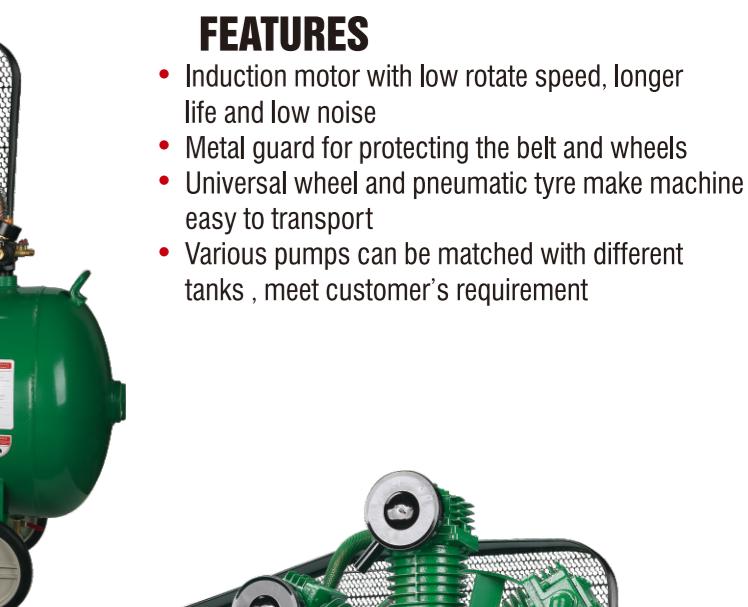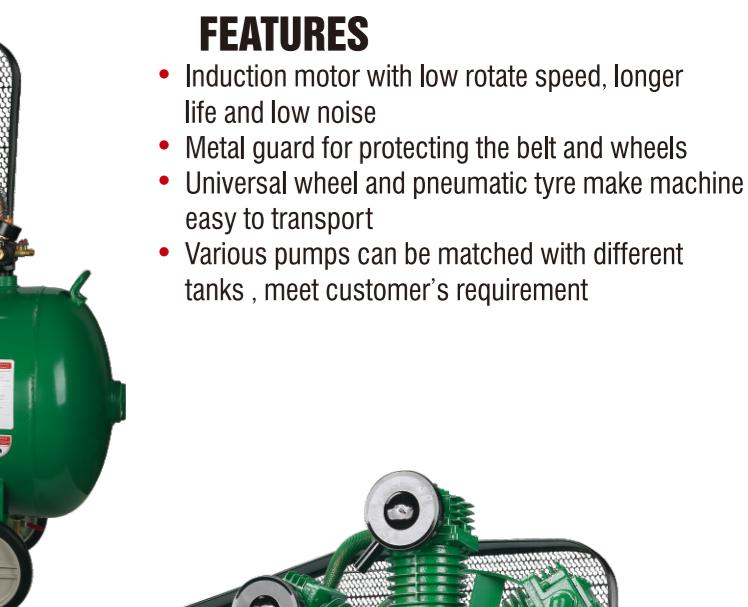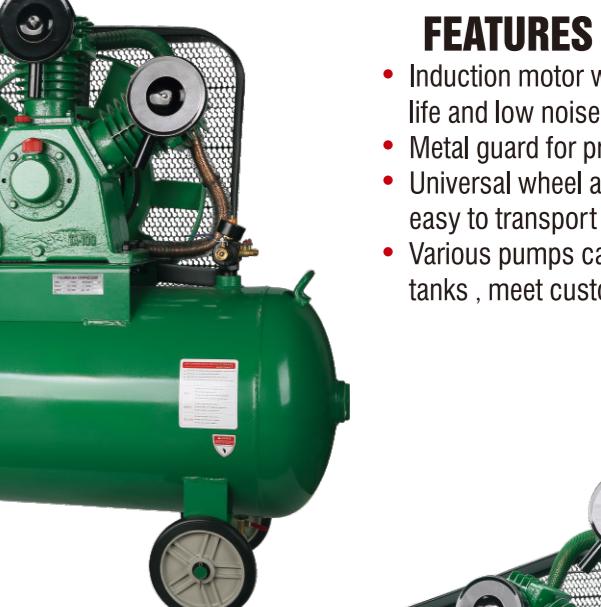

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-100LT	10	300	8	415/50	50.6	870	293.5/315.5	191x61x128
TA-120HT	15	300	12.5	415/50	52.4	820	381/401	191x74x134
TA-120LT	15	300	8	415/50	70.8	740	381/401	191x74x134

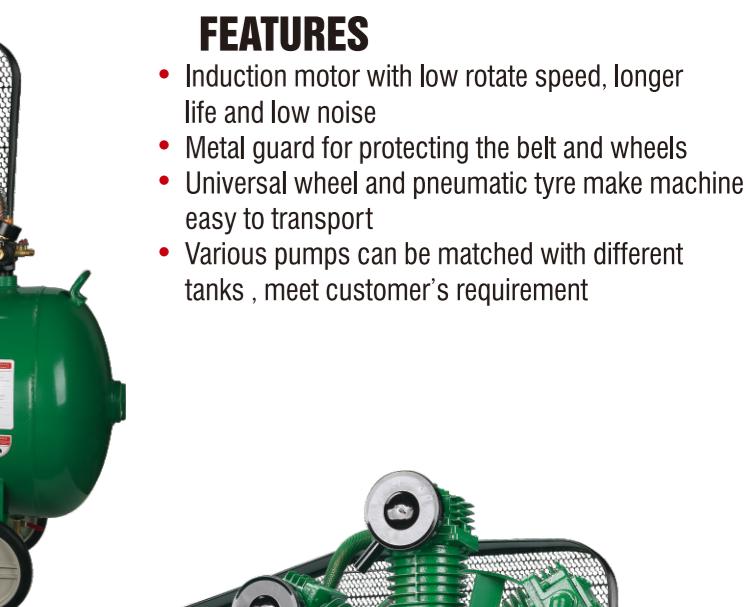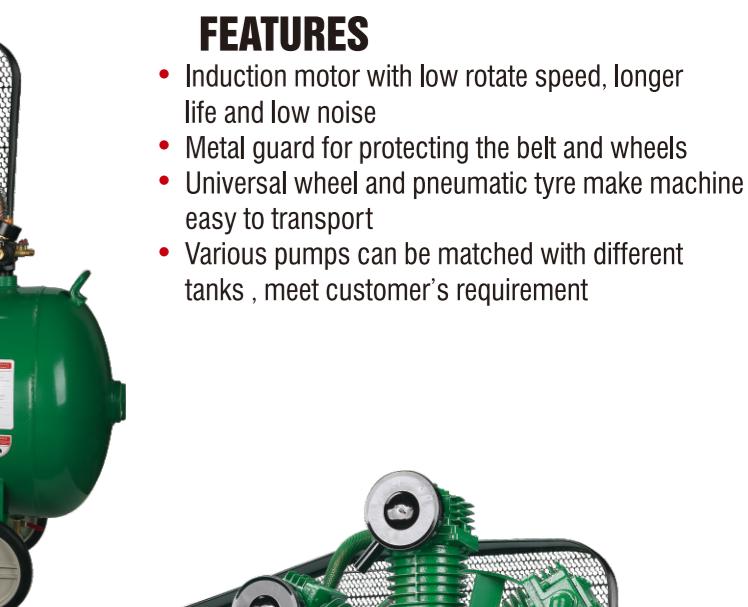

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L	bar	V	cfm	rpm	kg	LxWxH,cm
TA-100LT	10	300	8	415/50	50.6	870	293.5/315.5	191x61x128
TA-120HT	15	300	12.5	415/50	52.4	820	381/401	191x74x134
TA-120LT	15	300	8	415/50	70.8	740	381/401	191x74x134

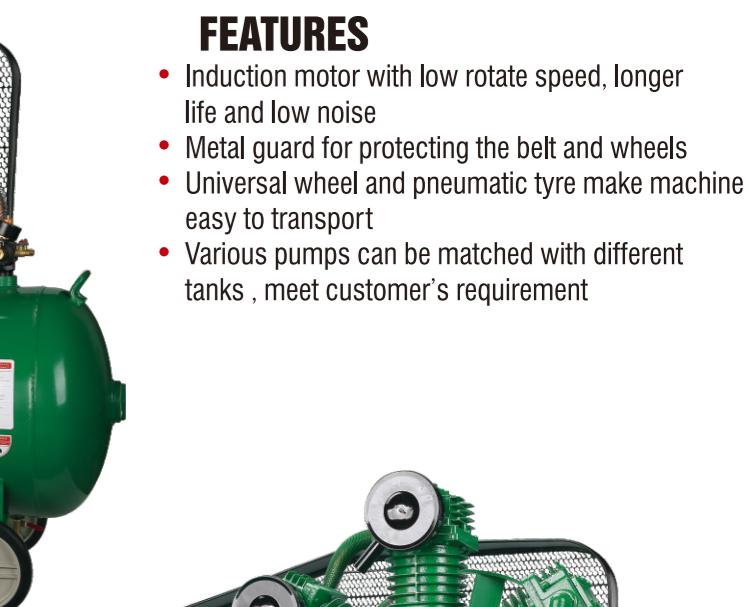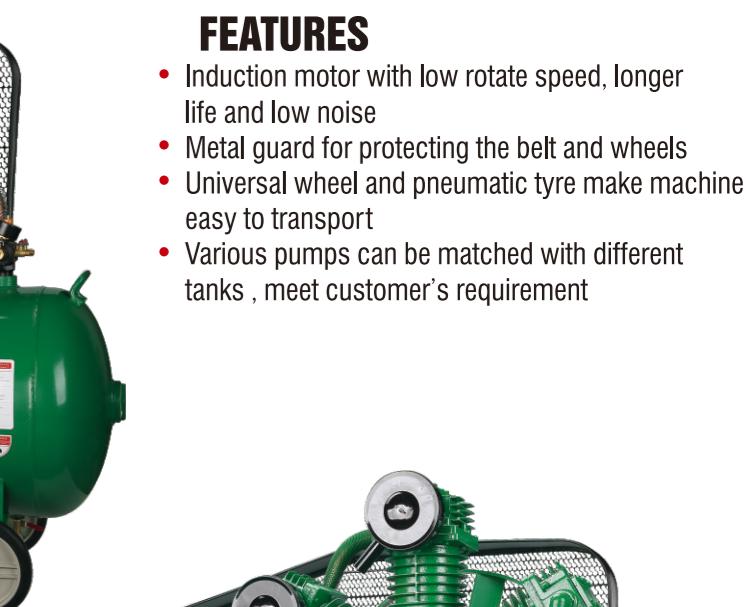

Model	Power	Tank Capacity	Pressure	Voltage	Air Delivery	Speed	N.W/G.W	Measurement
	HP	L						