MA'ADEN معادن

Saudi Arabian Mining Company شركة التعدين العربية السعودية

Project **Mansourah Massarah Gold Project**
Customer: **MA'ADEN GOLD AND BASE METALS (MA'ADEN)**

Title: **CALCULATION**
3220 GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION

Document Number: **MD-216-3220-EG-CV-CAL-1161**

Revision: **D01**

Revision Date: **08.11.2023**

Status: **AS BUILT**

Outotec Document Number:	900707	GAU01	ZG01	CED01	32208	OU100682201	3
L&T Document Number:	O19045	450	C	K	24079	005	3

REVISION HISTORY

Rev	Date	Revision Text	Prepared By	Reviewed By	Approved By	Employer
A01	06.08.2020	FIRST ISSUE	SUE	BDA	AG	
A02	21.09.2020	REVISED AS PER EMPLOYER COMMENTS DT. 18.09.2020	SUE	BDA	AG	
C01	29.10.2020	ISSUED FOR CONSTRUCTION	SUE	BDA	AG	
D01	08.11.2023	AS BUILT	SUE	BDA	AG	

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TABLE OF CONTENTS **PAGE NO**

DEFINITIONS AND ABBREVIATIONS 3

1.0 INTENT 4

2.0 EXECUTIVE SUMMARY 4

3.0 SCOPE 4

4.0 DESIGN REQUIREMENTS
- 4.1 Reference Codes & Books 4
- 4.2 Materials Property 4
- 4.3 Minimum Reinforcing Steel (Rebar) Size 5
- 4.4 Concrete Clear Cover 5

5.0 LOADS
- 5.1 Primary Loads 5
- 5.2 Load Combinations for Stress Calculation 5
- 5.3 Load Combinations for Strength Calculation 6

6.0 SAFETY FACTOR AGAINST STABILITY
- 6.1 Against Overturning 7
- 6.2 Against Sliding 7

7.0 ALLOWABLE SOIL BEARING CAPACITY 7

8.0 DESIGN OF FOUNDATION
- 8.1 Design of Foundation MKD. F1 11
- 8.2 Design of Foundation MKD. F2 17
- 8.3 Design of Foundation MKD. F3 23
- 8.4 Design of Foundation MKD. F4 29
- 8.5 Design of Foundation MKD. F5 35
- 8.6 Design of Foundation MKD. F6 41
- 8.7 Design of Foundation MKD. F7 47
- 8.8 Design of Foundation MKD. F7A 53
- 8.9 Design of Foundation MKD. F8 59
- 8.10 Design of Foundation MKD. F9 65
- 8.11 Design of Foundation MKD. F10 71
- 8.12 Design of Foundation MKD. F11 77
- 8.13 Design of Foundation MKD. F12 83
- 8.14 Design of Foundation MKD. F13 89
- 8.15 Design of Foundation MKD. F14 95
- 8.16 Design of Foundation MKD. F15 101
- 8.17 Design of Foundation MKD. F16 107

9.0 DESIGN OF COLUMN
- 9.1 Design of Column MKD. C1 112
- 9.2 Design of Column MKD. C2 114
- 9.3 Design of Column MKD. C3 116
- 9.4 Design of Column MKD. C4 118
- 9.5 Design of Column MKD. C6 120
- 9.6 Design of Column MKD. C7 122

ATTACHMENT - 1 : ISOMETRIC VIEW OF STAAD MODEL - BALL MILL PLATFORM FOUNDATION 123
ATTACHMENT - 2 : STAAD INPUT - BALL MILL PLATFORM FOUNDATION 126
ATTACHMENT - 3 : STAAD OUTPUT - BALL MILL PLATFORM FOUNDATION 328
ATTACHMENT - 4 : INPUT DRAWING. 446
ATTACHMENT - 5 : COMMENT RESOLUTION SHEET 449

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

DEFINITIONS AND ABBREVIATIONS

Document	:	Information and the medium on which it is contained (ISO 9000:2015)
EMPLOYER	:	EMPLOYER' means MA'ADEN GOLD AND BASE METALS (MGBM) and the PMC American Bechtel Inc. or their representatives
Contractor	:	Contractor' means consortium composed of LARSEN & TOUBRO LIMITED, Saudi Arabia AND OUTOTEC SAUDI ARABIA LLC, Saudi Arabia (for IK Contract) and LARSEN & TOUBRO LIMITED – ECC Construction Group – (SHJ BR) and OUTOTEC ENGINEERING DMCC, Dubai (for OOK Contract).
'PMT'	:	Ma'aden Project Management Team
'MMGP Project'	:	Mansourah Massarah Gold Processing Project
Attribute	:	Information element that describes a document or tag.
Supplier	:	An entity (supplier, consultant, sub-contractor) under the direct project management of Contractor
Sub-Supplier	:	A sub entity (supplier, consultant, sub-contractor) under the direct project management of Contractor.
QA	:	Quality Assurance
QC	:	Quality Control
Works	:	Full scope of the EPC Contract including the engineering, procurement, construction, commissioning and associated activities

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

1. INTENT

The Purpose of this document is to analysis & design of **3220 - BALL MILL PLATFORM** supporting structure foundation. The dimensions and reinforcement are to be calculated. The report describes the methodology and the design parameters used in the design calculation. The analysis & design is carried out in accordance with project specifications , codes & standards.

2. EXECUTIVE SUMMARY

The Saudi Arabian Mining Company (Ma'aden) has announced that its wholly-owned subsidiary, Ma'aden Gold and Base Metals Company, have issued a Notice of Award to Outotec and Larsen & Toubro Consortium to complete the engineering, procurement, construction, pre-commissioning, commissioning and start-up assistance of the Mansourah & Massarah (MMGP) Gold Project.

MMGP project will become Ma'aden's largest ever gold project, producing an average of 250,000 ounces of gold per year over the life of mine. Mansourah- Massarah is situated within the Central Arabian Gold Region (CAGR), approximately 320km northeast of Taif towards Riyadh and about 35 km southeast of Hufairah, which is a small village situated on Jeddah - Riyadh highway. Mansourah - Massarah gold deposits are located 22°38'6.40"N; 42°44'22.90"E, and 22°42'1.40"N; 42°41'58.40"E respectively, approximately 537 km east of Jeddah and 77 km southeast of the town of Zalim.

The plant throughput capacity is 4000000t/a and is required to operate on a continuous basis at nominally 24 hours per day and 7 days a week.

3. SCOPE

The analysis of the foundation system has been carried out in STAAD Pro. RCC column provided below the steel structure platform. The foundation base slabs are model by plate mat. The loads are taken from the STAAD model of Steel Structure Platform analysis. The columns are RCC cast-in-situ. Columns rest on isolated & combined founfation, suitably designed to transfer the load on soil.
Base Pressure has been checked by plate mat analysis result. The strength calculation of foundation base slab has been done in the standard excel sheet. For strength calculation of column the Bending Moment & Shear Force values are directly taken from STAAD & designed in the standard excel sheet.

4. DESIGN REQUIREMENTS

4.1 Reference Codes & Books

Reference is made in this standard as indicated in STRUCTURAL ENGINEERING DESIGN CRITERIA Doc No. : MD-216-1000-EG-ST-CRT-1001-A03 , Structural Design Criteria - Process Building & Structures ITB Doc No. : MD-101-SMEM-EG-ST-CRT-1001 & Civil Design Criteria - General ITB Doc. No. MD-101-SMEM-EG-CV-CRT-1001.
The below mention codes & books are also used for this design calculation.

(i) SBC - 301
(ii) SBC - 304 CR - 2018
(iii) ACI 318M.
(iv) ACI SP-17M(09)

4.2 Materials Property

A. Density

4.2.A.(i) Density of Dry Soil : 1.9 T/m^3
4.2.A.(ii) Density of Concrete : 2.5 T/m^3
4.2.A.(iii) Density of Water : 1.0 T/m^3

B. Concrete Grade

4.2.B.(i) Foundation and Structural Members: 35 Mpa Strength of 28 days
4.2.B.(ii) Blinding Concrete below foundation bases: 15 Mpa Strength of 28 days

C. Reinforcement Grade

4.2.C.(i) Deformed Bar : ASTM A 615 / A 615M Grade 60 (fy = 420MPa)
4.2.C.(ii) Welded Wire Fabric : ASTM A 185(Plain) / A 497(Deformed)

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

D. Grout Grade

4.2.D.(i) Grout shall be 30 mm cementitious of Strength 40 MPa.

4.3 Minimum Reinforcing Steel (Rebar) Size

The minimum rebar size for use as tension, compression reinforcement shall be 12 mm, except where welded wire fabric is used. For ties and spirals the minimum rebar size shall be 10 mm.

4.4 Concrete Clear Cover

Concrete Exposure	Member	MinimumCove (mm)
Exposed to Soil	Foundation	50
	Column	50

5. LOAD

5.1 Primary Loads

3220 - BALL MILL PLATFORM foundation the primary load values are taken from the steel structure drawing **Drg. No. : MD-216-3220-EG-ST-GAD-2140 & 2141 & Desin Calculation No. : MD-216-3220-EG-ST-CAL-2147**

1 DEAD LOAD (DL)
2 FLOOR LIVE LOAD
3 OPERATING EQUIPMENT LOAD
4 TEST EQUIPMENT LOAD
5 CABLE TRAY LOAD
6 PIPE VERTICAL LOAD
7 PIPE HORIZONTAL LOAD +X
8 PIPE HORIZONTAL LOAD +Z
9 MONORAIL LOAD
10 TEMPERATURE LOAD (+VE)
11 WIND LOAD +X
12 WIND LOAD +Z
13 TEMPERATURE LOAD (-VE)

5.2 Load Combinations for Stress Calculation

L/C	LOAD COMBINATION
100	DL+CTL+PVL+TEQL
101	DL+OEQL+CTL+PVL+PHL(+X)
102	DL+OEQL+CTL+PVL+PHL(+Z)
103	DL+OEQL+CTL+PVL-PHL(+X)
104	DL+OEQL+CTL+PVL-PHL(+Z)
105	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+VE)
106	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+VE)
107	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+VE)
108	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+VE)
109	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-VE)
110	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-VE)
111	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE)
112	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(-VE)
113	DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(+VE))
114	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(+VE))
115	DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(+VE))
116	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(+VE))
117	DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(-VE))
118	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(-VE))

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

119	DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(-VE))
120	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(-VE))
121	DL+OEQL+CTL+PVL+PHL(+X)+WL(+X)
122	DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z)
123	DL+OEQL+CTL+PVL+PHL(+X)-WL(+X)
124	DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z)
125	DL+OEQL+CTL+PVL-PHL(+X)+WL(+X)
126	DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z)
127	DL+OEQL+CTL+PVL-PHL(+X)-WL(+X)
128	DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z)
129	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X)
130	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z)
131	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X)
132	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z)
133	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X)
134	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z)
135	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X)
136	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z)
137	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+X)+0.75*LL
138	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+Z)+0.75*LL
139	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+X)+0.75*LL
140	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+Z)+0.75*LL
141	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+X)+0.75*LL
142	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+Z)+0.75*LL
143	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+X)+0.75*LL
144	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+Z)+0.75*LL
145	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+X)+0.75*LL
146	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+Z)+0.75*LL
147	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+X)+0.75*LL
148	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+Z)+0.75*LL
149	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+X)+0.75*LL
150	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+Z)+0.75*LL
151	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+X)+0.75*LL
152	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+Z)+0.75*LL
153	0.6*(DL+OEQL+CTL)+WL(+X)
154	0.6*(DL+OEQL+CTL)+WL(+Z)
155	0.6*(DL+OEQL+CTL)-WL(+X)
156	0.6*(DL+OEQL+CTL)-WL(+Z)

5.3 Load Combinations for Strength Calculation

L/C	LOAD COMBINATION
200	1.4*(DL+CTL+PVL+TEQL)
201	1.4*(DL+OEQL+CTL+PVL+PHL(+X))
202	1.4*(DL+OEQL+CTL+PVL+PHL(+Z))
203	1.4*(DL+OEQL+CTL+PVL-PHL(+X))
204	1.4*(DL+OEQL+CTL+PVL-PHL(+Z))
205	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+VE))+1.7*LL
206	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+VE))+1.7*LL
207	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+VE))+1.7*LL
208	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+VE))+1.7*LL
209	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-VE))+1.7*LL
210	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-VE))+1.7*LL
211	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-VE))+1.7*LL
212	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-VE))+1.7*LL
213	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*LL
214	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*LL

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

215	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*LL
216	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*LL
217	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*WL(+X)
218	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*WL(+Z)
219	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*WL(+X)
220	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*WL(+Z)
221	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)+0.5*LL
222	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)+0.5*LL
223	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)+0.5*LL
224	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)+0.5*LL
225	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)+0.5*LL
226	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)+0.5*LL
227	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)+0.5*LL
228	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)+0.5*LL
229	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)+0.5*LL
230	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)+0.5*LL
231	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)+0.5*LL
232	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)+0.5*LL
233	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)+0.5*LL
234	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)+0.5*LL
235	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)+0.5*LL
236	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)+0.5*LL
237	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)
238	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)
239	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)
240	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)
241	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)
242	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)
243	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)
244	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)
245	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)
246	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)
247	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)
248	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)
249	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)
250	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)
251	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)
252	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)

6. SAFETY FACTOR AGAINST STABILITY

6.1 Overturning : For foundation design a minimum factor of safety against overturning is consider 2.0 for Permanent L/C
For foundation design a minimum factor of safety against overturning is consider 1.5 for Temporary L/C

6.2 Sliding : For foundation design a minimum factor of safety against sliding is consider 1.5

7. ALLOWABLE SOIL BEARING CAPACITY

The net safe bearing capacity of soil for foundations design as obtained from page 39 of Doc. No. MD-216-0000-EM-GM-RPT-0003 is 670 KN/m2 at 1.2m depth below FGL
The net safe bearing capacity of soil as per **approved** L&T soil test report (Table-6 of Doc. No. MD-216-3000-EG-CV-RPT-1008-A02) is 980 KN/m2 at 1.5m depth below FGL for 2mX2m & 1200 KN/m2 at 1.5m depth below FGL for 5mX5m size footing.
However, for safe side we have considered Net Safe Bearing Capacity at founding level as 670 KN/m2.

Hence, the Vertical Modulus of Subgrade Reaction (Ks) is consider as 67*3/0.025 = 8040 Mton/m2/m

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

8.0 DESIGN OF FOUNDATION

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Software licensed to LNT ECC DIV CONNECTED User: Suman Podder	Job No **O19045**	Sheet No **1** Rev
	Part BALL MILL PLATFORM FOUNDATION	
Job Title MMGP	Ref	
	By SUE Date 06-08-2020 Chd BDA	
Client MAADEN	File Ball Mill Platform Founda	Date/Time 31-Jul-2020 12:52

Plate Center Stress Summary

(FOR FOUNDATION MKD. F1_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2645	206:1.4*(DL+O	**0.464**	0.017	0.000	0.000	0.000	5.327	-0.114	2.113
Min Qx	2658	206:1.4*(DL+O	**-0.439**	-0.142	0.000	0.000	0.000	-0.014	-0.829	-1.956
Max Qy	2604	206:1.4*(DL+O	-0.140	**0.423**	0.000	0.000	0.000	-0.771	-0.732	1.932
Min Qy	2452	208:1.4*(DL+O	-0.095	**-0.349**	0.000	0.000	0.000	-0.514	1.252	-1.240
Max Sx	2660	200:1.4*(DL+C	0.015	-0.024	**0.000**	0.000	0.000	-0.285	-0.330	-0.179
Min Sx	2660	200:1.4*(DL+C	0.015	-0.024	**0.000**	0.000	0.000	-0.285	-0.330	-0.179
Max Sy	2660	200:1.4*(DL+C	0.015	-0.024	0.000	**0.000**	0.000	-0.285	-0.330	-0.179
Min Sy	2660	200:1.4*(DL+C	0.015	-0.024	0.000	**0.000**	0.000	-0.285	-0.330	-0.179
Max Sxy	2660	200:1.4*(DL+C	0.015	-0.024	0.000	0.000	**0.000**	-0.285	-0.330	-0.179
Min Sxy	2660	200:1.4*(DL+C	0.015	-0.024	0.000	0.000	**0.000**	-0.285	-0.330	-0.179
Max Mx	2651	206:1.4*(DL+O	0.004	0.020	0.000	0.000	0.000	**10.479**	0.287	0.059
Min Mx	2430	235:1.2*(DL+O	-0.130	0.101	0.000	0.000	0.000	**-2.941**	-0.651	0.974
Max My	2509	208:1.4*(DL+O	0.030	-0.030	0.000	0.000	0.000	0.375	**7.882**	-0.329
Min My	2623	209:1.4*(DL+O	-0.102	0.017	0.000	0.000	0.000	-0.505	**-2.922**	0.859
Max Mxy	2607	206:1.4*(DL+O	0.082	0.085	0.000	0.000	0.000	6.504	1.446	**4.480**
Min Mxy	2619	206:1.4*(DL+O	-0.066	0.075	0.000	0.000	0.000	6.590	1.493	**-4.177**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F1_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2646	206:1.4*(DL+O	**0.325**	0.030	0.000	0.000	0.000	8.290	0.058	2.150
Min Qx	2656	226:1.2*(DL+O	**-0.317**	0.017	0.000	0.000	0.000	4.213	-0.002	-2.022
Max Qy	2566	206:1.4*(DL+O	0.035	**0.250**	0.000	0.000	0.000	0.111	6.737	1.891
Min Qy	2490	235:1.2*(DL+O	0.037	**-0.145**	0.000	0.000	0.000	0.219	4.077	-0.962
Max Sx	2656	200:1.4*(DL+C	-0.083	0.003	**0.000**	0.000	0.000	2.460	-0.037	-0.427
Min Sx	2656	200:1.4*(DL+C	-0.083	0.003	**0.000**	0.000	0.000	2.460	-0.037	-0.427
Max Sy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	**0.000**	0.000	2.460	-0.037	-0.427
Min Sy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	**0.000**	0.000	2.460	-0.037	-0.427
Max Sxy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	0.000	**0.000**	2.460	-0.037	-0.427
Min Sxy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	0.000	**0.000**	2.460	-0.037	-0.427
Max Mx	2651	206:1.4*(DL+O	0.004	0.020	0.000	0.000	0.000	**10.479**	0.287	0.059
Min Mx	2424	226:1.2*(DL+O	0.058	0.010	0.000	0.000	0.000	**-2.087**	-0.190	-0.547
Max My	2509	208:1.4*(DL+O	0.030	-0.030	0.000	0.000	0.000	0.375	**7.882**	-0.329
Min My	2466	226:1.2*(DL+O	0.017	-0.004	0.000	0.000	0.000	-0.619	**-1.351**	-2.973
Max Mxy	2608	206:1.4*(DL+O	0.055	0.040	0.000	0.000	0.000	7.571	2.679	**3.662**
Min Mxy	2618	226:1.2*(DL+O	-0.069	0.003	0.000	0.000	0.000	3.545	1.451	**-3.556**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.1 DESIGN OF FOUNDATION MKD. F1 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.7 m
Gross Allowable Bearing Capacity = 67 + 1.7 X 1.9 = 70.23 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F1_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1814	100 DL+CT	0	6.748	0	
Min Px	1814	100 DL+CT	0	6.748	0	
Max Py	2074	146 DL+OE	0	18.789	0	< 70.23 T/m2 , O.K.
Min Py	1814	130 DL+OE	0	0	0	
Max Pz	1814	100 DL+CT	0	6.748	0	
Min Pz	1814	100 DL+CT	0	6.748	0	

STRENGTH CALCULATION :


Slab Thickness = 500 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F1_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	10.479	Mton-m	Corresponding Mxy	0.059	Mton-m	*(Plate No. - 2651 , L/C No. - 206)*
Min. Mx	-2.941	Mton-m	Corresponding Mxy	0.974	Mton-m	*(Plate No. - 2430 , L/C No. - 235)*
Max. My	7.882	Mton-m	Corresponding Mxy	-0.329	Mton-m	*(Plate No. - 2509 , L/C No. - 208)*
Min. My	-2.922	Mton-m	Corresponding Mxy	0.859	Mton-m	*(Plate No. - 2623 , L/C No. - 209)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 10.479 + 0.059 = 10.538 Mton-m
My1 = My + abs(Mxy) = 7.882 + 0.329 = 8.211 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 10.479 + 0 = 10.479 Mton-m
My2 = My+abs(Mxy^2/Mx) = 7.882 + 0.01 = 7.892 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 10.538 Mton-m
Myd = 8.211 Mton-m

ALONG X - DIRECTION :

Mu = 10.538 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 10.538X10^7/(1000X417^2)
= 0.606 N/mm^2 < 6.9 N/mm^2 deff. = 417 mm
Pt = 0.0016
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.51 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 8.211 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 8.211X10^7/(1000X401^2) deff. = 401 mm
= 0.472 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.22 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0025

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -2.941 - 0.974 = -3.915 Mton-m
My1 = My - abs(Mxy) = -2.922 - 0.859 = -3.781 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -2.941 - 0.325 = -3.266 Mton-m
My2 = My-abs(Mxy^2/Mx) = -2.922 - 0.251 = -2.671 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -3.915 Mton-m
Myd = -3.781 Mton-m

ALONG X - DIRECTION :

Mu = 3.915 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.915X10^7/(1000X417^2) deff. = 417 mm
= 0.225 N/mm^2 < 6.9 N/mm^2
Pt = 0.0006
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.51 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 3.781 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.781X10^7/(1000X401^2) deff. = 401 mm
= 0.235 N/mm^2 < 6.9 N/mm^2
Pt = 0.0006
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X401/100
= 7.22 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided	16	mm @	200	C/C	(Provide Ast =	10.05	cm2) at Bottom		
Provided	0	mm @	200	C/C	(Provide Ast =	0	cm2) at Bottom		
					Total Provide Ast =	10.05	cm2) at Bottom		O.K.
					Total Provide Pt =	0.0025			

SHEAR CHECK

(Staad Group : F1_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.325 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2646 , L/C No. - 206)*

Vu = 16.25 Mton

Provided Pt = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X16.25X10^4X417/3.915/10^7)X1000X417/10^4

= 42.417 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X417/10^4

= 41.173 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X417/10^4

= 71.543 Mton

HENCE, Vc = 41.173 Mton

Φt*Vc = 0.75X41.173 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.88 Mton **> 16.25Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(41.173X10^4+0.66X35^0.5X1000X417)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 125.205 Mton **> Vu= 16.25Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.25 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2566 , L/C No. - 206)*

Vu = 12.5 Mton

Pt provided = 0.0025

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0025X12.5X10^4X401/3.781/10^7)X1000X401/10^4

= 40.217 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0025)X1000X401/10^4

= 39.662 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X401/10^4

= 68.798 Mton

HENCE, Vc = 39.662 Mton

Φt*Vc = 0.75X39.662 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 29.747 Mton **> 12.5Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(39.662X10^4+0.66X35^0.5X1000X401)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 120.406 Mton **> Vu= 12.5Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 5.54 m
Width of Foundation = 3.8 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 4
Area (A) = 21.052 m^2
Perimeter (bo) = 4 X 2 X ((0.6 + 0.417) + (0.6 + 0.401)) = 16.144 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 18.789 Mton/m^2
Vu = ((21.052 - (0.6X0.6X4))X18.789
= 368.49 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X16.144X10^3X417/10^4
= 1314.302 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X16.144X10^3X417/10^4
= 2031.194 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X417/(16.144X10^3))X1X35^0.5X(16.144X10^3)X417/10^4
= 831.905 Mton
HENCE, Vc = 831.905 Mton
Φt*Vn = Φt*Vc = 0.75X831.905 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
623.929 Mton **> 368.49Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F2_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1935	231:1.2*(DL+O	**0.290**	0.021	0.000	0.000	0.000	1.774	-3.798	0.460
Min Qx	1947	221:1.2*(DL+O	**-0.231**	0.017	0.000	0.000	0.000	1.491	-3.005	-0.356
Max Qy	1914	231:1.2*(DL+O	0.016	**0.277**	0.000	0.000	0.000	-1.914	-2.367	-0.256
Min Qy	1971	231:1.2*(DL+O	0.030	**-0.237**	0.000	0.000	0.000	-1.629	-1.735	-0.041
Max Sx	2007	200:1.4*(DL+C	0.001	-0.015	**0.000**	0.000	0.000	-0.079	-0.127	-0.014
Min Sx	2007	200:1.4*(DL+C	0.001	-0.015	**0.000**	0.000	0.000	-0.079	-0.127	-0.014
Max Sy	2007	200:1.4*(DL+C	0.001	-0.015	0.000	**0.000**	0.000	-0.079	-0.127	-0.014
Min Sy	2007	200:1.4*(DL+C	0.001	-0.015	0.000	**0.000**	0.000	-0.079	-0.127	-0.014
Max Sxy	2007	200:1.4*(DL+C	0.001	-0.015	0.000	0.000	**0.000**	-0.079	-0.127	-0.014
Min Sxy	2007	200:1.4*(DL+C	0.001	-0.015	0.000	0.000	**0.000**	-0.079	-0.127	-0.014
Max Mx	1940	206:1.4*(DL+O	0.005	0.003	0.000	0.000	0.000	**6.103**	-0.203	0.023
Min Mx	1964	245:0.9*(DL+O	0.019	0.003	0.000	0.000	0.000	**-2.308**	0.157	-0.343
Max My	1950	245:0.9*(DL+O	-0.037	-0.001	0.000	0.000	0.000	0.126	**1.711**	-0.163
Min My	1932	231:1.2*(DL+O	-0.139	0.038	0.000	0.000	0.000	-0.491	**-5.697**	-0.432
Max Mxy	1985	221:1.2*(DL+O	-0.125	-0.086	0.000	0.000	0.000	1.479	-1.100	**1.354**
Min Mxy	1973	231:1.2*(DL+O	0.154	-0.108	0.000	0.000	0.000	1.753	-1.379	**-1.725**

Software licensed to LNT ECC DIV CONNECTED User: Suman Podder	Job No O19045	Sheet No 1 Rev
	Part BALL MILL PLATFORM FOUNDATION	
Job Title MMGP	Ref	
	By SUE Date 06-08-2020 Chd BDA	
Client MAADEN	File Ball Mill Platform Founda	Date/Time 31-Jul-2020 12:52

Plate Center Stress Summary

(FOR FOUNDATION MKD. F1_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2646	206:1.4*(DL+O	**0.325**	0.030	0.000	0.000	0.000	8.290	0.058	2.150
Min Qx	2656	226:1.2*(DL+O	**-0.317**	0.017	0.000	0.000	0.000	4.213	-0.002	-2.022
Max Qy	2566	206:1.4*(DL+O	0.035	**0.250**	0.000	0.000	0.000	0.111	6.737	1.891
Min Qy	2490	235:1.2*(DL+O	0.037	**-0.145**	0.000	0.000	0.000	0.219	4.077	-0.962
Max Sx	2656	200:1.4*(DL+C	-0.083	0.003	**0.000**	0.000	0.000	2.460	-0.037	-0.427
Min Sx	2656	200:1.4*(DL+C	-0.083	0.003	**0.000**	0.000	0.000	2.460	-0.037	-0.427
Max Sy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	**0.000**	0.000	2.460	-0.037	-0.427
Min Sy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	**0.000**	0.000	2.460	-0.037	-0.427
Max Sxy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	0.000	**0.000**	2.460	-0.037	-0.427
Min Sxy	2656	200:1.4*(DL+C	-0.083	0.003	0.000	0.000	**0.000**	2.460	-0.037	-0.427
Max Mx	2651	206:1.4*(DL+O	0.004	0.020	0.000	0.000	0.000	**10.479**	0.287	0.059
Min Mx	2424	226:1.2*(DL+O	0.058	0.010	0.000	0.000	0.000	**-2.087**	-0.190	-0.547
Max My	2509	208:1.4*(DL+O	0.030	-0.030	0.000	0.000	0.000	0.375	**7.882**	-0.329
Min My	2466	226:1.2*(DL+O	0.017	-0.004	0.000	0.000	0.000	-0.619	**-1.351**	-2.973
Max Mxy	2608	206:1.4*(DL+O	0.055	0.040	0.000	0.000	0.000	7.571	2.679	**3.662**
Min Mxy	2618	226:1.2*(DL+O	-0.069	0.003	0.000	0.000	0.000	3.545	1.451	**-3.556**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.2 DESIGN OF FOUNDATION MKD. F2 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.95 m
Gross Allowable Bearing Capacity = 67 + 1.95 X 1.9 = 70.705 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F2_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1175	100 DL+CT	0	9.094	0	
Min Px	1175	100 DL+CT	0	9.094	0	
Max Py	1235	143 DL+OE	0	17.989	0	< 70.705 T/m2 , O.K.
Min Py	1194	127 DL+OE	0	0	0	
Max Pz	1175	100 DL+CT	0	9.094	0	
Min Pz	1175	100 DL+CT	0	9.094	0	

STRENGTH CALCULATION :


Slab Thickness = 450 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F2_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	6.103	Mton-m	Corresponding Mxy	0.023	Mton-m	*(Plate No. - 1940 , L/C No. - 206)*
Min. Mx	-2.308	Mton-m	Corresponding Mxy	-0.343	Mton-m	*(Plate No. - 1964 , L/C No. - 245)*
Max. My	1.711	Mton-m	Corresponding Mxy	-0.163	Mton-m	*(Plate No. - 1950 , L/C No. - 245)*
Min. My	-5.697	Mton-m	Corresponding Mxy	-0.432	Mton-m	*(Plate No. - 1932 , L/C No. - 231)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 6.103 + 0.023 = 6.126 Mton-m
My1 = My + abs(Mxy) = 1.711 + 0.163 = 1.874 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 6.103 + 0 = 6.103 Mton-m
My2 = My+abs(Mxy^2/Mx) = 1.711 + 0.004 = 1.715 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 6.126 Mton-m
Myd = 1.874 Mton-m

ALONG X - DIRECTION :

Mu = 6.126 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.126X10^7/(1000X367^2) deff. = 367 mm
= 0.455 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X367/100
= 6.61 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0027

ALONG Y - DIRECTION :

Mu = 1.874 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.874X10^7/(1000X353^2) deff. = 353 mm
= 0.139 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X367/100
= 6.35 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0021

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -2.308 - 0.343 = -2.651 Mton-m
My1 = My - abs(Mxy) = -5.697 - 0.432 = -6.129 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -2.308 - 0.021 = -2.329 Mton-m
My2 = My-abs(Mxy^2/Mx) = -5.697 - 0.081 = -5.616 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -2.651 Mton-m
Myd = -6.129 Mton-m

ALONG X - DIRECTION :

Mu = 2.651 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.651X10^7/(1000X367^2) deff. = 367 mm
= 0.197 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X367/100
= 6.61 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0027

ALONG Y - DIRECTION :

Mu = 6.129 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.129X10^7/(1000X353^2) deff. = 353 mm
= 0.492 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X353/100
= 6.35 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0021

SHEAR CHECK
(Staad Group : F2_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.151 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1936 , L/C No. - 207)*
Vu = 6.795 Mton

Provided Pt = 0.0027
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0027X6.795X10^4X367/2.651/10^7)X1000X367/10^4
= 36.324 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0027)X1000X367/10^4
= 36.424 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X367/10^4
= 62.965 Mton
HENCE, Vc = 36.324 Mton
Φt*Vc = 0.75X36.324 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 27.243 Mton **> 6.795Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(36.324X10^4+0.66X35^0.5X1000X367)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 110.199 Mton **> Vu= 6.795Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.077 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1895 , L/C No. - 231)*
Vu = 3.465 Mton

Pt provided = 0.0021
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0021X3.465X10^4X353/6.129/10^7)X1000X353/10^4
= 33.666 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0021)X1000X353/10^4
= 34.674 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X353/10^4
= 60.563 Mton
HENCE, Vc = 33.666 Mton
Φt*Vc = 0.75X33.666 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 25.25 Mton **> 3.465Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(33.666X10^4+0.66X35^0.5X1000X353)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 105.9 Mton **> Vu= 3.465Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 5.54 m
Width of Foundation = 2 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 11.08 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.367) + (0.6 + 0.353)) = 7.68 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 17.989 Mton/m^2
Vu = ((11.08 - (0.6X0.6X2))X17.989
= 186.366 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.68X10^3X367/10^4
= 550.269 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.68X10^3X367/10^4
= 850.416 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X367/(7.68X10^3))X1X35^0.5X(7.68X10^3)X367/10^4
= 409.076 Mton
HENCE, Vc = 409.076 Mton
Φt*Vn = Φt*Vc = 0.75X409.076 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
306.807 Mton **> 186.366Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F3_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2140	221:1.2*(DL+O	**0.716**	-0.223	0	0	0	-15.601	-6.393	0.062
Min Qx	2163	221:1.2*(DL+O	**-0.508**	-0.092	0	0	0	-8.286	-0.914	2.483
Max Qy	2090	221:1.2*(DL+O	0.263	**0.445**	0	0	0	-12.379	-2.671	0.018
Min Qy	2165	221:1.2*(DL+O	0.271	**-0.449**	0	0	0	-12.418	-2.767	0.108
Max Sx	2199	200:1.4*(DL+C	0.002	-0.016	**0**	0	0	-0.071	-0.143	-0.001
Min Sx	2199	200:1.4*(DL+C	0.002	-0.016	**0**	0	0	-0.071	-0.143	-0.001
Max Sy	2199	200:1.4*(DL+C	0.002	-0.016	0	**0**	0	-0.071	-0.143	-0.001
Min Sy	2199	200:1.4*(DL+C	0.002	-0.016	0	**0**	0	-0.071	-0.143	-0.001
Max Sxy	2199	200:1.4*(DL+C	0.002	-0.016	0	0	**0**	-0.071	-0.143	-0.001
Min Sxy	2199	200:1.4*(DL+C	0.002	-0.016	0	0	**0**	-0.071	-0.143	-0.001
Max Mx	2115	231:1.2*(DL+O	-0.455	-0.165	0	0	0	**14.090**	3.660	0.337
Min Mx	2140	221:1.2*(DL+O	0.716	-0.223	0	0	0	**-15.601**	-6.393	0.062
Max My	2140	245:0.9*(DL+O	-0.466	0.173	0	0	0	13.366	**3.908**	-0.132
Min My	2115	221:1.2*(DL+O	0.712	0.232	0	0	0	-15.592	**-6.397**	0.073
Max Mxy	2162	221:1.2*(DL+O	-0.040	0.399	0	0	0	-0.328	0.117	**2.807**
Min Mxy	2087	221:1.2*(DL+O	-0.033	-0.400	0	0	0	-0.298	0.264	**-2.776**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F3_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2141	221:1.2*(DL+O	**0.398**	-0.071	0	0	0	-8.802	-4.322	-0.455
Min Qx	2116	245:0.9*(DL+O	**-0.253**	-0.049	0	0	0	8.835	2.772	-0.266
Max Qy	2091	221:1.2*(DL+O	0.269	**0.137**	0	0	0	-8.540	-2.267	1.117
Min Qy	2166	221:1.2*(DL+O	0.271	**-0.136**	0	0	0	-8.532	-2.300	-0.999
Max Sx	2199	200:1.4*(DL+C	0.002	-0.016	**0**	0	0	-0.071	-0.143	-0.001
Min Sx	2199	200:1.4*(DL+C	0.002	-0.016	**0**	0	0	-0.071	-0.143	-0.001
Max Sy	2199	200:1.4*(DL+C	0.002	-0.016	0	**0**	0	-0.071	-0.143	-0.001
Min Sy	2199	200:1.4*(DL+C	0.002	-0.016	0	**0**	0	-0.071	-0.143	-0.001
Max Sxy	2199	200:1.4*(DL+C	0.002	-0.016	0	0	**0**	-0.071	-0.143	-0.001
Min Sxy	2199	200:1.4*(DL+C	0.002	-0.016	0	0	**0**	-0.071	-0.143	-0.001
Max Mx	2141	231:1.2*(DL+O	-0.241	0.049	0	0	0	**9.655**	2.611	0.400
Min Mx	2184	221:1.2*(DL+O	0.018242	-0.089	0	0	0	**-9.842**	-0.077	-0.065
Max My	2116	245:0.9*(DL+O	-0.253	-0.049	0	0	0	8.835	**2.772**	-0.266
Min My	2141	221:1.2*(DL+O	0.398	-0.071	0	0	0	-8.802	**-4.322**	-0.455
Max Mxy	2182	221:1.2*(DL+O	-0.157	-0.036	0	0	0	-4.911	-0.234	**1.628**
Min Mxy	2057	221:1.2*(DL+O	-0.159	0.032	0	0	0	-4.848	-0.193	**-1.578**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.3 DESIGN OF FOUNDATION MKD. F3 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.9 m
Gross Allowable Bearing Capacity = 67 + 1.9 X 1.9 = 70.61 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F3_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1371	100 DL+CT	0	5.351	0	
Min Px	1371	100 DL+CT	0	5.351	0	
Max Py	1478	107 DL+OE	0	10.3	0	< 70.61 T/m2 , O.K.
Min Py	1377	155 0.6*(DL	0	0.658	0	
Max Pz	1371	100 DL+CT	0	5.351	0	
Min Pz	1371	100 DL+CT	0	5.351	0	

STRENGTH CALCULATION :


Slab Thickness = 450 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F3_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	14.09	Mton-m	Corresponding Mxy	0.337	Mton-m	*(Plate No. - 2115 , L/C No. - 231)*
Min. Mx	-15.601	Mton-m	Corresponding Mxy	0.062	Mton-m	*(Plate No. - 2140 , L/C No. - 221)*
Max. My	3.908	Mton-m	Corresponding Mxy	-0.132	Mton-m	*(Plate No. - 2140 , L/C No. - 245)*
Min. My	-6.397	Mton-m	Corresponding Mxy	0.073	Mton-m	*(Plate No. - 2115 , L/C No. - 221)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 14.09 + 0.337 = 14.427 Mton-m
My1 = My + abs(Mxy) = 3.908 + 0.132 = 4.04 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 14.09 + 0.029 = 14.119 Mton-m
My2 = My+abs(Mxy^2/Mx) = 3.908 + 0.001 = 3.909 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 14.427 Mton-m
Myd = 4.04 Mton-m

ALONG X - DIRECTION :

Mu = 14.427 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 14.427X10^7/(1000X367^2) deff. = 367 mm
= 1.071 N/mm^2 < 6.9 N/mm^2
Pt = 0.0029
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0029X1000X367/100
= 10.64 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **16** mm @ **150** C/C (Provide Ast = 13.4 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 13.4 cm2 at Top **O.K.**
Total Provide Pt = 0.0037

ALONG Y - DIRECTION :

Mu = 4.04 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.04X10^7/(1000X353^2) deff. = 353 mm
= 0.3 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X367/100
= 6.35 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0021

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -15.601 - 0.062 = -15.663 Mton-m
My1 = My - abs(Mxy) = -6.397 - 0.073 = -6.47 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -15.601 - 0.001 = -15.602 Mton-m
My2 = My-abs(Mxy^2/Mx) = -6.397 - 0 = -6.397 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -15.663 Mton-m
Myd = -6.47 Mton-m

ALONG X - DIRECTION :

Mu = 15.663 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 15.663X10^7/(1000X367^2) deff. = 367 mm
= 1.163 N/mm^2 < 6.9 N/mm^2
Pt = 0.0031
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0031X1000X367/100
= 11.38 cm^2

Provided **16** mm @ **150** C/C (Provide Ast = 13.4 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 13.4 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0037

ALONG Y - DIRECTION :

Mu = 6.47 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.47X10^7/(1000X353^2) deff. = 353 mm
= 0.519 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X353/100
= 6.35 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0021

SHEAR CHECK
(Staad Group : F3_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :
SQx = 0.398 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2141 , L/C No. - 221)*
Vu = 17.91 Mton

Provided Pt = 0.0037
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0037X17.91X10^4X367/15.663/10^7)X1000X367/10^4
= 35.708 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0037)X1000X367/10^4
= 37.048 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X367/10^4
= 62.965 Mton
HENCE, Vc = 35.708 Mton
Φt*Vc = 0.75X35.708 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 26.781 Mton **> 17.91Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(35.708X10^4+0.66X35^0.5X1000X367)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 110.153 Mton **> Vu= 17.91Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :
SQy = 0.137 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2091 , L/C No. - 221)*
Vu = 6.165 Mton

Pt provided = 0.0021
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0021X6.165X10^4X353/6.47/10^7)X1000X353/10^4
= 33.838 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0021)X1000X353/10^4
= 34.674 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X353/10^4
= 60.563 Mton
HENCE, Vc = 33.838 Mton
Φt*Vc = 0.75X33.838 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 25.379 Mton **> 6.165Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(33.838X10^4+0.66X35^0.5X1000X353)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 105.912 Mton **> Vu= 6.165Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 5.2 m
Width of Foundation = 2.1 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 10.92 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.367) + (0.6 + 0.353)) = 7.68 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 10.3 Mton/m^2
Vu = ((10.92 - (0.6X0.6X2))X10.3
= 105.06 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.68X10^3X367/10^4
= 550.269 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.68X10^3X367/10^4
= 850.416 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X367/(7.68X10^3))X1X35^0.5X(7.68X10^3)X367/10^4
= 475.213 Mton
HENCE, Vc = 475.213 Mton
Φt*Vn = Φt*Vc = 0.75X475.213 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
356.41 Mton **> 105.06Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F4_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1792	226:1.2*(DL+O	**0.220**	0.181	0	0	0	-1.056	-0.118	0.264
Min Qx	1789	206:1.4*(DL+O	**-0.211**	0.196	0	0	0	-1.063	0.232	-0.081
Max Qy	1779	212:1.4*(DL+O	0.031	**0.252**	0	0	0	-2.001	-0.970	0.189
Min Qy	1726	208:1.4*(DL+O	0.068	**-0.235**	0	0	0	-0.545	2.171	-0.530
Max Sx	1799	200:1.4*(DL+C	0.012	-0.001	**0**	0	0	-0.071	-0.137	-0.037
Min Sx	1799	200:1.4*(DL+C	0.012	-0.001	**0**	0	0	-0.071	-0.137	-0.037
Max Sy	1799	200:1.4*(DL+C	0.012	-0.001	0	**0**	0	-0.071	-0.137	-0.037
Min Sy	1799	200:1.4*(DL+C	0.012	-0.001	0	**0**	0	-0.071	-0.137	-0.037
Max Sxy	1799	200:1.4*(DL+C	0.012	-0.001	0	0	**0**	-0.071	-0.137	-0.037
Min Sxy	1799	200:1.4*(DL+C	0.012	-0.001	0	0	**0**	-0.071	-0.137	-0.037
Max Mx	1797	250:0.9*(DL+O	-0.062	0.098	0	0	0	**2.062**	0.584	-0.027
Min Mx	1797	206:1.4*(DL+O	0.088	-0.187	0	0	0	**-3.876**	-1.014	-0.123
Max My	1755	208:1.4*(DL+O	-0.002	-0.001	0	0	0	-0.075	**6.327**	0.005
Min My	1778	250:0.9*(DL+O	-0.044	0.061	0	0	0	-0.337	**-5.937**	0.263
Max Mxy	1780	226:1.2*(DL+O	-0.060	0.016	0	0	0	-0.312	3.243	**1.144**
Min Mxy	1777	226:1.2*(DL+O	0.067	0.005	0	0	0	-0.245	3.240	**-1.167**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F4_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1793	206:1.4*(DL+O	**0.059**	0.057	0	0	0	-0.118	0.434	0.254
Min Qx	1788	206:1.4*(DL+O	**-0.058**	0.057	0	0	0	-0.114	0.443	-0.254
Max Qy	1742	250:0.9*(DL+O	0.005	**0.167**	0	0	0	-0.056	-1.214	0.388
Min Qy	1763	226:1.2*(DL+O	0.004	**-0.158**	0	0	0	-0.034	0.542	0.244
Max Sx	1799	200:1.4*(DL+C	0.012	-0.001	**0**	0	0	-0.071	-0.137	-0.037
Min Sx	1799	200:1.4*(DL+C	0.012	-0.001	**0**	0	0	-0.071	-0.137	-0.037
Max Sy	1799	200:1.4*(DL+C	0.012	-0.001	0	**0**	0	-0.071	-0.137	-0.037
Min Sy	1799	200:1.4*(DL+C	0.012	-0.001	0	**0**	0	-0.071	-0.137	-0.037
Max Sxy	1799	200:1.4*(DL+C	0.012	-0.001	0	0	**0**	-0.071	-0.137	-0.037
Min Sxy	1799	200:1.4*(DL+C	0.012	-0.001	0	0	**0**	-0.071	-0.137	-0.037
Max Mx	1799	250:0.9*(DL+O	-0.034	-0.046	0	0	0	**0.087**	-0.222	-0.043
Min Mx	1773	212:1.4*(DL+O	0.022	0.141	0	0	0	**-1.140**	0.917	0.068
Max My	1755	208:1.4*(DL+O	-0.002	-0.001	0	0	0	-0.075	**6.327**	0.005
Min My	1772	250:0.9*(DL+O	-0.011	0.046	0	0	0	-0.437	**-5.183**	0.096
Max Mxy	1722	250:0.9*(DL+O	-0.012	0.085	0	0	0	-0.097	-0.147	**0.671**
Min Mxy	1782	226:1.2*(DL+O	-0.019	0.008	0	0	0	-0.112	1.541	**-0.659**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.4 DESIGN OF FOUNDATION MKD. F4 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F4_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	924	100 DL+CT	0	6.911	0	
Min Px	924	100 DL+CT	0	6.911	0	
Max Py	1049	146 DL+OE	0	18.649	0	< 71.75 T/m2 , O.K.
Min Py	924	122 DL+OE	0	0	0	
Max Pz	924	100 DL+CT	0	6.911	0	
Min Pz	924	100 DL+CT	0	6.911	0	

STRENGTH CALCULATION :


Slab Thickness = 400 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F4_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	2.062	Mton-m	Corresponding Mxy	-0.027	Mton-m	*(Plate No. - 1797 , L/C No. - 250)*
Min. Mx	-3.876	Mton-m	Corresponding Mxy	-0.123	Mton-m	*(Plate No. - 1797 , L/C No. - 206)*
Max. My	6.327	Mton-m	Corresponding Mxy	0.005	Mton-m	*(Plate No. - 1755 , L/C No. - 208)*
Min. My	-5.937	Mton-m	Corresponding Mxy	0.263	Mton-m	*(Plate No. - 1778 , L/C No. - 250)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 2.062 + 0.027 = 2.089 Mton-m
My1 = My + abs(Mxy) = 6.327 + 0.005 = 6.332 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 2.062 + 0 = 2.062 Mton-m
My2 = My+abs(Mxy^2/Mx) = 6.327 + 0 = 6.327 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 2.089 Mton-m
Myd = 6.332 Mton-m

ALONG X - DIRECTION :

Mu = 2.089 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.089X10^7/(1000X319^2) deff. = 319 mm
= 0.205 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X319/100
= 5.74 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 6.332 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.332X10^7/(1000X305^2) deff. = 305 mm
= 0.622 N/mm^2 < 6.9 N/mm^2
Pt = 0.0017
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X319/100
= 5.49 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0033

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -3.876 - 0.123 = -3.999 Mton-m
My1 = My - abs(Mxy) = -5.937 - 0.263 = -6.2 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -3.876 - 0.003 = -3.879 Mton-m
My2 = My-abs(Mxy^2/Mx) = -5.937 - 0.018 = -5.919 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -3.999 Mton-m
Myd = -6.2 Mton-m

ALONG X - DIRECTION :

Mu = 3.999 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.999X10^7/(1000X319^2) deff. = 319 mm
= 0.393 N/mm^2 < 6.9 N/mm^2
Pt = 0.0010
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X319/100
= 5.74 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 6.2 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.2X10^7/(1000X305^2) deff. = 305 mm
= 0.666 N/mm^2 < 6.9 N/mm^2
Pt = 0.0018
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X305/100
= 5.49 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided	16	mm @	200	C/C	(Provide Ast =	10.05	cm2) at Bottom		
Provided	0	mm @	200	C/C	(Provide Ast =	0	cm2) at Bottom		
					Total Provide Ast =	10.05	cm2) at Bottom		O.K.
					Total Provide Pt =	0.0033			

SHEAR CHECK

(Staad Group : F4_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.059 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1793 , L/C No. - 206)*

Vu = 2.36 Mton

Provided Pt = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X2.36X10^4X319/3.999/10^7)X1000X319/10^4

= 30.441 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X319/10^4

= 31.497 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X319/10^4

= 54.73 Mton

HENCE, Vc = 30.441 Mton

Φt*Vc = 0.75X30.441 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 22.831 Mton **> 2.36Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(30.441X10^4+0.66X35^0.5X1000X319)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 95.701 Mton **> Vu= 2.36Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.167 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1742 , L/C No. - 250)*

Vu = 6.68 Mton

Pt provided = 0.0033

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0033X6.68X10^4X305/6.2/10^7)X1000X305/10^4

= 29.433 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0033)X1000X305/10^4

= 30.582 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X305/10^4

= 52.328 Mton

HENCE, Vc = 29.433 Mton

Φt*Vc = 0.75X29.433 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 22.075 Mton **> 6.68Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(29.433X10^4+0.66X35^0.5X1000X305)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 91.525 Mton **> Vu= 6.68Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 4 m
Width of Foundation = 1.7 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 6.8 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.319) + (0.6 + 0.305)) = 7.296 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 18.649 Mton/m^2
Vu = ((6.8 - (0.6X0.6X2))X18.649
= 113.386 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.296X10^3X319/10^4
= 454.384 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.296X10^3X319/10^4
= 702.231 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X319/(7.296X10^3))X1X35^0.5X(7.296X10^3)X319/10^4
= 328.506 Mton
HENCE, Vc = 328.506 Mton
Φt*Vn = Φt*Vc = 0.75X328.506 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
246.38 Mton **> 113.386Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F5_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2024	206:1.4*(DL+O	**0.301**	0.050	0	0	0	-1.464	-4.019	-0.523
Min Qx	2021	206:1.4*(DL+O	**-0.301**	0.050	0	0	0	-1.464	-4.019	0.523
Max Qy	2084	212:1.4*(DL+O	0.017	**0.185**	0	0	0	-1.159	2.600	0.126
Min Qy	2028	206:1.4*(DL+O	-0.096	**-0.519**	0	0	0	-4.388	-2.812	0.561
Max Sx	2161	200:1.4*(DL+C	0.013	0.005	**0**	0	0	-0.061	-0.039	-0.012
Min Sx	2161	200:1.4*(DL+C	0.013	0.005	**0**	0	0	-0.061	-0.039	-0.012
Max Sy	2161	200:1.4*(DL+C	0.013	0.005	0	**0**	0	-0.061	-0.039	-0.012
Min Sy	2161	200:1.4*(DL+C	0.013	0.005	0	**0**	0	-0.061	-0.039	-0.012
Max Sxy	2161	200:1.4*(DL+C	0.013	0.005	0	0	**0**	-0.061	-0.039	-0.012
Min Sxy	2161	200:1.4*(DL+C	0.013	0.005	0	0	**0**	-0.061	-0.039	-0.012
Max Mx	2111	249:0.9*(DL+O	0.008	0.034	0	0	0	**-0.013**	0.465	0.044
Min Mx	2010	212:1.4*(DL+O	-0.015	0.080	0	0	0	**-5.301**	-0.027	-0.581
Max My	2047	212:1.4*(DL+O	0.003	-0.003	0	0	0	-0.419	**6.757**	-0.096
Min My	2015	206:1.4*(DL+O	-0.222	0.151	0	0	0	-1.366	**-4.358**	-0.863
Max Mxy	2012	206:1.4*(DL+O	-0.049	0.048	0	0	0	-1.368	-0.441	**1.349**
Min Mxy	2009	206:1.4*(DL+O	0.049	0.047546	0	0	0	-1.368	-0.441	**-1.349**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F5_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2025	206:1.4*(DL+O	**0.075**	-0.017	0	0	0	-0.099	-3.565	-0.025
Min Qx	2020	206:1.4*(DL+O	**-0.075**	-0.017	0	0	0	-0.099	-3.565	0.025
Max Qy	2081	212:1.4*(DL+O	-0.013	**0.127**	0	0	0	-0.052	2.633	-0.022
Min Qy	2034	206:1.4*(DL+O	-0.032	**-0.264**	0	0	0	-2.092	2.171	0.376
Max Sx	2161	200:1.4*(DL+C	0.013	0.005	**0**	0	0	-0.061	-0.039	-0.012
Min Sx	2161	200:1.4*(DL+C	0.013	0.005	**0**	0	0	-0.061	-0.039	-0.012
Max Sy	2161	200:1.4*(DL+C	0.013	0.005	0	**0**	0	-0.061	-0.039	-0.012
Min Sy	2161	200:1.4*(DL+C	0.013	0.005	0	**0**	0	-0.061	-0.039	-0.012
Max Sxy	2161	200:1.4*(DL+C	0.013	0.005	0	0	**0**	-0.061	-0.039	-0.012
Min Sxy	2161	200:1.4*(DL+C	0.013	0.005	0	0	**0**	-0.061	-0.039	-0.012
Max Mx	2111	249:0.9*(DL+O	0.008	0.034	0	0	0	**-0.013**	0.465	0.044
Min Mx	2034	206:1.4*(DL+O	-0.032	-0.264	0	0	0	**-2.092**	2.171	0.376
Max My	2047	212:1.4*(DL+O	0.003	-0.003	0	0	0	-0.419	**6.757**	-0.096
Min My	2020	226:1.2*(DL+O	-0.053	0.005	0	0	0	-0.046	**-3.667**	-0.116
Max Mxy	2033	210:1.4*(DL+O	-0.043	-0.183	0	0	0	-1.063	3.188	**0.753**
Min Mxy	2036	210:1.4*(DL+O	0.043	-0.183	0	0	0	-1.063	3.188	**-0.753**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.5 DESIGN OF FOUNDATION MKD. F5 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.9 m
Gross Allowable Bearing Capacity = 67 + 1.9 X 1.9 = 70.61 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F5_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1315	100 DL+CT	0	14.049	0	
Min Px	1315	100 DL+CT	0	14.049	0	
Max Py	1318	112 DL+OE	0	21.366	0	< 70.61 T/m2 , O.K.
Min Py	1512	156 0.6*(DL	0	1.588	0	
Max Pz	1315	100 DL+CT	0	14.049	0	
Min Pz	1315	100 DL+CT	0	14.049	0	

STRENGTH CALCULATION :


Slab Thickness = 450 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F5_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	-0.013	Mton-m	Corresponding Mxy	0.044	Mton-m	*(Plate No. - 2111 , L/C No. - 249)*
Min. Mx	-5.301	Mton-m	Corresponding Mxy	-0.581	Mton-m	*(Plate No. - 2010 , L/C No. - 212)*
Max. My	6.757	Mton-m	Corresponding Mxy	-0.096	Mton-m	*(Plate No. - 2047 , L/C No. - 212)*
Min. My	-4.358	Mton-m	Corresponding Mxy	-0.863	Mton-m	*(Plate No. - 2015 , L/C No. - 206)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = -0.013 + 0.044 = 0.031 Mton-m
My1 = My + abs(Mxy) = 6.757 + 0.096 = 6.853 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = -0.013 + 0 = -0.013 Mton-m
My2 = My+abs(Mxy^2/Mx) = 6.757 + 0.709 = 7.466 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.031 Mton-m
Myd = 6.853 Mton-m

ALONG X - DIRECTION :

Mu = 0.031 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.031X10^7/(1000X369^2) deff. = 369 mm
= 0.002 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X369/100
= 6.64 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.002

ALONG Y - DIRECTION :

Mu = 6.853 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.853X10^7/(1000X355^2) deff. = 355 mm
= 0.503 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X369/100
= 6.39 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0028

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -5.301 - 0.581 = -5.882 Mton-m
My1 = My - abs(Mxy) = -4.358 - 0.863 = -5.221 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -5.301 - 0.077 = -5.378 Mton-m
My2 = My-abs(Mxy^2/Mx) = -4.358 - 0.14 = -4.218 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -5.882 Mton-m
Myd = -5.221 Mton-m

ALONG X - DIRECTION :

Mu = 5.882 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 5.882X10^7/(1000X369^2) deff. = 369 mm
= 0.432 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X369/100
= 6.64 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.002

ALONG Y - DIRECTION :

Mu = 5.221 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 5.221X10^7/(1000X355^2) deff. = 355 mm
= 0.414 N/mm^2 < 6.9 N/mm^2
Pt = 0.0011
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X355/100
= 6.39 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0028

SHEAR CHECK
(Staad Group : F5_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :
SQx = -0.075 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2020 , L/C No. - 206)*
Vu = 3.375 Mton

Provided Pt = 0.002
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.002X3.375X10^4X369/5.882/10^7)X1000X369/10^4
= 35.194 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.002)X1000X369/10^4
= 36.183 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X369/10^4
= 63.308 Mton
HENCE, Vc = 35.194 Mton
Φt*Vc = 0.75X35.194 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 26.396 Mton **> 3.375Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(35.194X10^4+0.66X35^0.5X1000X369)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 110.7 Mton **> Vu= 3.375Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :
SQy = -0.264 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2034 , L/C No. - 206)*
Vu = 11.88 Mton

Pt provided = 0.0028
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0028X11.88X10^4X355/5.221/10^7)X1000X355/10^4
= 34.968 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0028)X1000X355/10^4
= 35.293 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X355/10^4
= 60.906 Mton
HENCE, Vc = 34.968 Mton
Φt*Vc = 0.75X34.968 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 26.226 Mton **> 11.88Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(34.968X10^4+0.66X35^0.5X1000X355)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 106.583 Mton **> Vu= 11.88Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.95 m
Width of Foundation = 1.6 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 6.32 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.369) + (0.6 + 0.355)) = 7.696 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 21.366 Mton/m^2
Vu = ((6.32 - (0.6X0.6X2))X21.366
= 119.65 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.696X10^3X369/10^4
= 554.421 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.696X10^3X369/10^4
= 856.832 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X369/(7.696X10^3))X1X35^0.5X(7.696X10^3)X369/10^4
= 412.61 Mton
HENCE, Vc = 412.61 Mton
Φt*Vn = Φt*Vc = 0.75X412.61 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
309.458 Mton **> 119.65Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F6_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2399	226:1.2*(DL+O	**0.230**	-0.010	0	0	0	2.868	-0.099	0.928
Min Qx	2399	250:0.9*(DL+O	**-0.176**	0.004	0	0	0	-0.629	0.049	-0.863
Max Qy	2338	226:1.2*(DL+O	-0.016	**0.274**	0	0	0	0.074	-2.298	0.865
Min Qy	2377	226:1.2*(DL+O	-0.009	**-0.214**	0	0	0	-1.046	-2.991	1.134
Max Sx	2413	200:1.4*(DL+C	-0.000	-0.004	**0**	0	0	-0.006	-0.013	0.012207
Min Sx	2413	200:1.4*(DL+C	-0.000	-0.004	**0**	0	0	-0.006	-0.013	0.012207
Max Sy	2413	200:1.4*(DL+C	-0.000	-0.004	0	**0**	0	-0.006	-0.013	0.012207
Min Sy	2413	200:1.4*(DL+C	-0.000	-0.004	0	**0**	0	-0.006	-0.013	0.012207
Max Sxy	2413	200:1.4*(DL+C	-0.000	-0.004	0	0	**0**	-0.006	-0.013	0.012207
Min Sxy	2413	200:1.4*(DL+C	-0.000	-0.004	0	0	**0**	-0.006	-0.013	0.012207
Max Mx	2403	206:1.4*(DL+O	0.113	-0.001	0	0	0	**5.559**	-0.002	0.679
Min Mx	2402	250:0.9*(DL+O	-0.124	-0.001	0	0	0	**-1.141**	-0.014	-0.774
Max My	2377	250:0.9*(DL+O	0.019	0.110	0	0	0	0.739	**1.805**	-0.996
Min My	2377	226:1.2*(DL+O	-0.009	-0.214	0	0	0	-1.046	**-2.991**	1.134
Max Mxy	2341	226:1.2*(DL+O	0.071	0.084	0	0	0	1.963	-1.484	**2.791**
Min Mxy	2342	250:0.9*(DL+O	-0.003	-0.001	0	0	0	-0.631	-0.168	**-2.220**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F6_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2399	226:1.2*(DL+O	**0.230**	-0.010	0	0	0	2.868	-0.099	0.928
Min Qx	2399	250:0.9*(DL+O	**-0.176**	0.004	0	0	0	-0.629	0.049	-0.863
Max Qy	2397	250:0.9*(DL+O	-0.115	**0.030**	0	0	0	0.723	0.122	-0.621
Min Qy	2396	226:1.2*(DL+O	0.062	**-0.055**	0	0	0	-0.580	-0.330	0.526
Max Sx	2413	200:1.4*(DL+C	-0.000	-0.004	**0**	0	0	-0.006	-0.013	0.012207
Min Sx	2413	200:1.4*(DL+C	-0.000	-0.004	**0**	0	0	-0.006	-0.013	0.012207
Max Sy	2413	200:1.4*(DL+C	-0.000	-0.004	0	**0**	0	-0.006	-0.013	0.012207
Min Sy	2413	200:1.4*(DL+C	-0.000	-0.004	0	**0**	0	-0.006	-0.013	0.012207
Max Sxy	2413	200:1.4*(DL+C	-0.000	-0.004	0	0	**0**	-0.006	-0.013	0.012207
Min Sxy	2413	200:1.4*(DL+C	-0.000	-0.004	0	0	**0**	-0.006	-0.013	0.012207
Max Mx	2403	206:1.4*(DL+O	0.113	-0.001	0	0	0	**5.559**	-0.002	0.679
Min Mx	2402	250:0.9*(DL+O	-0.124	-0.001	0	0	0	**-1.141**	-0.014	-0.774
Max My	2361	236:1.2*(DL+O	-0.011	0.001	0	0	0	0.335	**0.275**	-1.847
Min My	2361	226:1.2*(DL+O	0.073	-0.007	0	0	0	2.937	**-0.865**	2.527
Max Mxy	2342	226:1.2*(DL+O	0.043	0.006	0	0	0	2.868	-0.264	**2.739**
Min Mxy	2342	250:0.9*(DL+O	-0.003	-0.001	0	0	0	-0.631	-0.168	**-2.220**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.6 DESIGN OF FOUNDATION MKD. F6 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.7 m
Gross Allowable Bearing Capacity = 67 + 1.7 X 1.9 = 70.23 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F6_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1674	100 DL+CT	0	4.828	0	
Min Px	1674	100 DL+CT	0	4.828	0	
Max Py	1794	146 DL+OE	0	12.858	0	< 70.23 T/m2 , O.K.
Min Py	1794	136 DL+OE	0	0	0	
Max Pz	1674	100 DL+CT	0	4.828	0	
Min Pz	1674	100 DL+CT	0	4.828	0	

STRENGTH CALCULATION :

Slab Thickness = 500 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F6_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	5.559	Mton-m	Corresponding Mxy	0.679	Mton-m	*(Plate No. - 2403 , L/C No. - 206)*
Min. Mx	-1.141	Mton-m	Corresponding Mxy	-0.774	Mton-m	*(Plate No. - 2402 , L/C No. - 250)*
Max. My	1.805	Mton-m	Corresponding Mxy	-0.996	Mton-m	*(Plate No. - 2377 , L/C No. - 250)*
Min. My	-2.991	Mton-m	Corresponding Mxy	1.134	Mton-m	*(Plate No. - 2377 , L/C No. - 226)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 5.559 + 0.679 = 6.238 Mton-m
My1 = My + abs(Mxy) = 1.805 + 0.996 = 2.801 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 5.559 + 0.255 = 5.814 Mton-m
My2 = My+abs(Mxy^2/Mx) = 1.805 + 0.178 = 1.983 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 6.238 Mton-m
Myd = 2.801 Mton-m

ALONG X - DIRECTION :

Mu = 6.238 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.238X10^7/(1000X417^2) deff. = 417 mm
= 0.359 N/mm^2 < 6.9 N/mm^2
Pt = 0.0010
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.51 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 2.801 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.801X10^7/(1000X401^2) deff. = 401 mm
= 0.161 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.22 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0025

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -1.141 - 0.774 = -1.915 Mton-m
My1 = My - abs(Mxy) = -2.991 - 1.134 = -4.125 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -1.141 - 0.2 = -1.341 Mton-m
My2 = My-abs(Mxy^2/Mx) = -2.991 - 1.127 = -1.864 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -1.915 Mton-m
Myd = -4.125 Mton-m

ALONG X - DIRECTION :

Mu = 1.915 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.915X10^7/(1000X417^2) deff. = 417 mm
= 0.11 N/mm^2 < 6.9 N/mm^2
Pt = 0.0003
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.51 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 4.125 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.125X10^7/(1000X401^2) deff. = 401 mm
= 0.257 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X401/100
= 7.22 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided	16	mm @	200	C/C	(Provide Ast =	10.05	cm2) at Bottom	
Provided	0	mm @	200	C/C	(Provide Ast =	0	cm2) at Bottom	
					Total Provide Ast =	10.05	cm2) at Bottom	O.K.
					Total Provide Pt =	0.0025		

SHEAR CHECK

(Staad Group : F6_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.23 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2399 , L/C No. - 226)*

Vu = 11.5 Mton

Provided Pt = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X11.5X10^4X417/1.915/10^7)X1000X417/10^4

= 43.733 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X417/10^4

= 41.173 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X417/10^4

= 71.543 Mton

HENCE, Vc = 41.173 Mton

Φt*Vc = 0.75X41.173 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.88 Mton **> 11.5Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(41.173X10^4+0.66X35^0.5X1000X417)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 125.205 Mton **> Vu= 11.5Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = -0.055 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2396 , L/C No. - 226)*

Vu = 2.75 Mton

Pt provided = 0.0025

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0025X2.75X10^4X401/4.125/10^7)X1000X401/10^4

= 38.413 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0025)X1000X401/10^4

= 39.662 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X401/10^4

= 68.798 Mton

HENCE, Vc = 38.413 Mton

Φt*Vc = 0.75X38.413 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 28.81 Mton **> 2.75Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(38.413X10^4+0.66X35^0.5X1000X401)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 120.312 Mton **> Vu= 2.75Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 5.65 m
Width of Foundation = 1.8 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 10.17 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.417) + (0.6 + 0.401)) = 8.072 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 12.858 Mton/m^2
Vu = ((10.17 - (0.6X0.6X2))X12.858
= 121.508 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X8.072X10^3X417/10^4
= 657.151 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X8.072X10^3X417/10^4
= 1015.597 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X417/(8.072X10^3))X1X35^0.5X(8.072X10^3)X417/10^4
= 501.338 Mton
HENCE, Vc = 501.338 Mton
Φt*Vn = Φt*Vc = 0.75X501.338 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
376.004 Mton **> 121.508Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F7_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1362	210:1.4*(DL+O	**0.157**	0.056	0	0	0	-0.773	-0.428	-0.044
Min Qx	1359	210:1.4*(DL+O	**-0.157**	0.056	0	0	0	-0.773	-0.428	0.044233
Max Qy	1329	208:1.4*(DL+O	0.018	**0.204**	0	0	0	-1.479	1.692	0.302
Min Qy	1141	210:1.4*(DL+O	0.036	**-0.264**	0	0	0	-1.747	0.202	-0.292
Max Sx	1389	200:1.4*(DL+C	0.019	0.000	**0**	0	0	-0.081	-0.042	-0.001
Min Sx	1389	200:1.4*(DL+C	0.019	0.000	**0**	0	0	-0.081	-0.042	-0.001
Max Sy	1389	200:1.4*(DL+C	0.019	0.000	0	**0**	0	-0.081	-0.042	-0.001
Min Sy	1389	200:1.4*(DL+C	0.019	0.000	0	**0**	0	-0.081	-0.042	-0.001
Max Sxy	1389	200:1.4*(DL+C	0.019	0.000	0	0	**0**	-0.081	-0.042	-0.001
Min Sxy	1389	200:1.4*(DL+C	0.019	0.000	0	0	**0**	-0.081	-0.042	-0.001
Max Mx	1105	245:0.9*(DL+O	0.004	-0.007	0	0	0	**0.006**	0.158	-0.074
Min Mx	1386	210:1.4*(DL+O	-0.043	-0.068	0	0	0	**-2.507**	-0.120	0.134
Max My	1231	208:1.4*(DL+O	0.003	-0.011	0	0	0	-0.350	**3.687**	-0.002
Min My	1063	210:1.4*(DL+O	-0.128	0.044	0	0	0	-0.663	**-1.118**	-0.269
Max Mxy	1330	209:1.4*(DL+O	0.063	0.133	0	0	0	-0.529	1.790	**0.614**
Min Mxy	1327	211:1.4*(DL+O	-0.062	0.133	0	0	0	-0.529	1.822	**-0.619**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F7_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1363	210:1.4*(DL+O	**0.047**	0.01683	0	0	0	-0.130	-0.043	0.055
Min Qx	1358	210:1.4*(DL+O	**-0.047**	0.017	0	0	0	-0.130	-0.043	-0.05504
Max Qy	1303	208:1.4*(DL+O	0.013	**0.109**	0	0	0	-0.769	2.887	0.137
Min Qy	1179	210:1.4*(DL+O	0.020	**-0.151**	0	0	0	-0.943	1.922	-0.147
Max Sx	1389	200:1.4*(DL+C	0.019	0.000	**0**	0	0	-0.081	-0.042	-0.001
Min Sx	1389	200:1.4*(DL+C	0.019	0.000	**0**	0	0	-0.081	-0.042	-0.001
Max Sy	1389	200:1.4*(DL+C	0.019	0.000	0	**0**	0	-0.081	-0.042	-0.001
Min Sy	1389	200:1.4*(DL+C	0.019	0.000	0	**0**	0	-0.081	-0.042	-0.001
Max Sxy	1389	200:1.4*(DL+C	0.019	0.000	0	0	**0**	-0.081	-0.042	-0.001
Min Sxy	1389	200:1.4*(DL+C	0.019	0.000	0	0	**0**	-0.081	-0.042	-0.001
Max Mx	1105	245:0.9*(DL+O	0.004	-0.007	0	0	0	**0.006**	0.158	-0.074
Min Mx	1179	210:1.4*(DL+O	0.020	-0.151	0	0	0	**-0.943**	1.922	-0.147
Max My	1231	208:1.4*(DL+O	0.003	-0.011	0	0	0	-0.350	**3.687**	-0.002
Min My	1062	210:1.4*(DL+O	-0.039	0.005	0	0	0	-0.118	**-0.541**	-0.134
Max Mxy	1177	205:1.4*(DL+O	-0.029	-0.114	0	0	0	-0.490	2.111	**0.358**
Min Mxy	1180	207:1.4*(DL+O	0.029	-0.115	0	0	0	-0.490	2.086	**-0.356**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.7 DESIGN OF FOUNDATION MKD. F7 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F7_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	85	100 DL+CT	0	7.509	0	
Min Px	85	100 DL+CT	0	7.509	0	
Max Py	513	110 DL+OE	0	12.384	0	< 71.75 T/m2 , O.K.
Min Py	336	153 0.6*(DL	0	3.091	0	
Max Pz	85	100 DL+CT	0	7.509	0	
Min Pz	85	100 DL+CT	0	7.509	0	

STRENGTH CALCULATION :


Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F7_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	0.006	Mton-m	Corresponding Mxy	-0.074	Mton-m	*(Plate No. - 1105 , L/C No. - 245)*
Min. Mx	-2.507	Mton-m	Corresponding Mxy	0.134	Mton-m	*(Plate No. - 1386 , L/C No. - 210)*
Max. My	3.687	Mton-m	Corresponding Mxy	-0.002	Mton-m	*(Plate No. - 1231 , L/C No. - 208)*
Min. My	-1.118	Mton-m	Corresponding Mxy	-0.269	Mton-m	*(Plate No. - 1063 , L/C No. - 210)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 0.006 + 0.074 = 0.08 Mton-m
My1 = My + abs(Mxy) = 3.687 + 0.002 = 3.689 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 0.006 + 0.001 = 0.007 Mton-m
My2 = My+abs(Mxy^2/Mx) = 3.687 + 0.001 = 3.688 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.08 Mton-m
Myd = 3.689 Mton-m

ALONG X - DIRECTION :

Mu = 0.08 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.08X10^7/(1000X269^2) deff. = 269 mm
= 0.011 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.65 cm2 at Top **O.K.**
Total Provide Pt = 0.0021

ALONG Y - DIRECTION :

Mu = 3.689 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.689X10^7/(1000X257^2) deff. = 257 mm
= 0.51 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.63 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0029

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -2.507 - 0.134 = -2.641 Mton-m
My1 = My - abs(Mxy) = -1.118 - 0.269 = -1.387 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -2.507 - 0.016 = -2.523 Mton-m
My2 = My-abs(Mxy^2/Mx) = -1.118 - 0.029 = -1.089 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -2.641 Mton-m
Myd = -1.387 Mton-m

ALONG X - DIRECTION :

Mu = 2.641 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.641X10^7/(1000X269^2) deff. = 269 mm
= 0.365 N/mm^2 < 6.9 N/mm^2
Pt = 0.0010
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 5.65 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0021

ALONG Y - DIRECTION :

Mu = 1.387 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.387X10^7/(1000X257^2) deff. = 257 mm
= 0.21 N/mm^2 < 6.9 N/mm^2
Pt = 0.0006
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X257/100
= 4.63 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0029

SHEAR CHECK

(Staad Group : F7_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.047 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1358 , L/C No. - 210)*
Vu = 1.645 Mton

Provided Pt = 0.0021
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0021X1.645X10^4X269/2.641/10^7)X1000X269/10^4
= 25.624 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0021)X1000X269/10^4
= 26.423 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X269/10^4
= 46.151 Mton
HENCE, Vc = 25.624 Mton
Φt*Vc = 0.75X25.624 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.218 Mton **> 1.645Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.624X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 80.697 Mton **> Vu= 1.645Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = -0.151 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1179 , L/C No. - 210)*
Vu = 5.285 Mton

Pt provided = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X5.285X10^4X257/1.387/10^7)X1000X257/10^4
= 25.568 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4
= 25.594 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X257/10^4
= 44.093 Mton
HENCE, Vc = 25.568 Mton
Φt*Vc = 0.75X25.568 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.176 Mton **> 5.285Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.568X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 77.179 Mton **> Vu= 5.285Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.9 m
Width of Foundation = 1.6 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 6.24 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.269) + (0.6 + 0.257)) = 6.904 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 12.384 Mton/m^2
Vu = ((6.24 - (0.6X0.6X2))X12.384
= 68.36 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X6.904X10^3X269/10^4
= 362.578 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X6.904X10^3X269/10^4
= 560.347 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X269/(6.904X10^3))X1X35^0.5X(6.904X10^3)X269/10^4
= 288.983 Mton
HENCE, Vc = 288.983 Mton
Φt*Vn = Φt*Vc = 0.75X288.983 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
216.737 Mton **> 68.36Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F7A_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1820	208:1.4*(DL+O	**0.236**	0.003	0	0	0	-0.990	-0.068	-0.243
Min Qx	1817	208:1.4*(DL+O	**-0.243**	-0.001	0	0	0	-0.940	-0.057	0.282
Max Qy	1872	212:1.4*(DL+O	-0.022	**0.237**	0	0	0	-1.625	-0.796	-0.124
Min Qy	1832	208:1.4*(DL+O	0.042	**-0.243**	0	0	0	-0.459	2.381	-0.413
Max Sx	1893	200:1.4*(DL+C	0.012	0.001	**0**	0	0	-0.047	-0.023	0.002
Min Sx	1893	200:1.4*(DL+C	0.012	0.001	**0**	0	0	-0.047	-0.023	0.002
Max Sy	1893	200:1.4*(DL+C	0.012	0.001	0	**0**	0	-0.047	-0.023	0.002
Min Sy	1893	200:1.4*(DL+C	0.012	0.001	0	**0**	0	-0.047	-0.023	0.002
Max Sxy	1893	200:1.4*(DL+C	0.012	0.001	0	0	**0**	-0.047	-0.023	0.002
Min Sxy	1893	200:1.4*(DL+C	0.012	0.001	0	0	**0**	-0.047	-0.023	0.002
Max Mx	1820	241:0.9*(DL+O	-0.017	-0.006	0	0	0	**0.021**	0.011	0.068
Min Mx	1890	206:1.4*(DL+O	-0.068	-0.112	0	0	0	**-3.131**	-0.304	0.077
Max My	1847	208:1.4*(DL+O	0.001	-0.003	0	0	0	0.000	**5.304**	0.091
Min My	1883	212:1.4*(DL+O	-0.126	-0.079	0	0	0	-0.704	**-1.378**	0.364
Max Mxy	1874	206:1.4*(DL+O	-0.033	0.085	0	0	0	-0.250	4.143	**0.781**
Min Mxy	1871	206:1.4*(DL+O	0.020	0.114	0	0	0	-0.411	4.067	**-0.490**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F7A_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1821	208:1.4*(DL+O	**0.060**	-0.045	0	0	0	-0.064	0.147	-0.122
Min Qx	1888	206:1.4*(DL+O	**-0.064**	0.030	0	0	0	-0.151	0.046	-0.079
Max Qy	1866	212:1.4*(DL+O	-0.019	**0.123**	0	0	0	-0.904	0.593	0.010
Min Qy	1833	205:1.4*(DL+O	0.011	**-0.103**	0	0	0	-0.101	2.705	-0.271
Max Sx	1893	200:1.4*(DL+C	0.012	0.001	**0**	0	0	-0.047	-0.023	0.002
Min Sx	1893	200:1.4*(DL+C	0.012	0.001	**0**	0	0	-0.047	-0.023	0.002
Max Sy	1893	200:1.4*(DL+C	0.012	0.001	0	**0**	0	-0.047	-0.023	0.002
Min Sy	1893	200:1.4*(DL+C	0.012	0.001	0	**0**	0	-0.047	-0.023	0.002
Max Sxy	1893	200:1.4*(DL+C	0.012	0.001	0	0	**0**	-0.047	-0.023	0.002
Min Sxy	1893	200:1.4*(DL+C	0.012	0.001	0	0	**0**	-0.047	-0.023	0.002
Max Mx	1833	241:0.9*(DL+O	0.002	-0.009	0	0	0	**0.010**	-0.097	0.023
Min Mx	1866	212:1.4*(DL+O	-0.019	0.123	0	0	0	**-0.904**	0.593	0.010
Max My	1847	208:1.4*(DL+O	0.001	-0.003	0	0	0	0.000	**5.304**	0.091
Min My	1876	212:1.4*(DL+O	-0.045	0.026	0	0	0	-0.073	**-1.094**	0.031
Max Mxy	1868	210:1.4*(DL+O	0.028	0.076	0	0	0	-0.439	0.906	**0.506**
Min Mxy	1876	206:1.4*(DL+O	-0.031	0.099	0	0	0	-0.142	2.198	**-0.312**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.8 DESIGN OF FOUNDATION MKD. F7A :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.95 m
Gross Allowable Bearing Capacity = 67 + 1.95 X 1.9 = 70.705 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F7A_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1077	100 DL+CT	0	5.911	0	
Min Px	1077	100 DL+CT	0	5.911	0	
Max Py	1170	106 DL+OE	0	12.401	0	< 70.705 T/m2 , O.K.
Min Py	1083	155 0.6*(DL	0	1.791	0	
Max Pz	1077	100 DL+CT	0	5.911	0	
Min Pz	1077	100 DL+CT	0	5.911	0	

STRENGTH CALCULATION :

Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F7A_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	0.021	Mton-m	Corresponding Mxy	0.068	Mton-m	*(Plate No. - 1820 , L/C No. - 241)*
Min. Mx	-3.131	Mton-m	Corresponding Mxy	0.077	Mton-m	*(Plate No. - 1890 , L/C No. - 206)*
Max. My	5.304	Mton-m	Corresponding Mxy	0.091	Mton-m	*(Plate No. - 1847 , L/C No. - 208)*
Min. My	-1.378	Mton-m	Corresponding Mxy	0.364	Mton-m	*(Plate No. - 1883 , L/C No. - 212)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 0.021 + 0.068 = 0.089 Mton-m
My1 = My + abs(Mxy) = 5.304 + 0.091 = 5.395 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 0.021 + 0.001 = 0.022 Mton-m
My2 = My+abs(Mxy^2/Mx) = 5.304 + 0.394 = 5.698 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.089 Mton-m
Myd = 5.395 Mton-m

ALONG X - DIRECTION :

Mu = 0.089 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.089X10^7/(1000X269^2) deff. = 269 mm
= 0.012 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.65 cm2 at Top **O.K.**
Total Provide Pt = 0.0021

ALONG Y - DIRECTION :

Mu = 5.395 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 5.395X10^7/(1000X257^2) deff. = 257 mm
= 0.746 N/mm^2 < 6.9 N/mm^2
Pt = 0.0020
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.002X1000X269/100
= 5.14 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0029

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -3.131 - 0.077 = -3.208 Mton-m
My1 = My - abs(Mxy) = -1.378 - 0.364 = -1.742 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -3.131 - 0.004 = -3.135 Mton-m
My2 = My-abs(Mxy^2/Mx) = -1.378 - 0.042 = -1.336 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -3.208 Mton-m
Myd = -1.742 Mton-m

ALONG X - DIRECTION :

Mu = 3.208 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.208X10^7/(1000X269^2) deff. = 269 mm
= 0.443 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 5.65 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0021

ALONG Y - DIRECTION :

Mu = 1.742 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.742X10^7/(1000X257^2) deff. = 257 mm
= 0.264 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X257/100
= 4.63 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0029

SHEAR CHECK
(Staad Group : F7A_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :
SQx = -0.064 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1888 , L/C No. - 206)*
Vu = 2.24 Mton

Provided Pt = 0.0021
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0021X2.24X10^4X269/3.208/10^7)X1000X269/10^4
= 25.643 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0021)X1000X269/10^4
= 26.423 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X269/10^4
= 46.151 Mton
HENCE, Vc = 25.643 Mton
Φt*Vc = 0.75X25.643 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.232 Mton **> 2.24Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.643X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 80.699 Mton **> Vu= 2.24Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :
SQy = 0.123 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1866 , L/C No. - 212)*
Vu = 4.305 Mton

Pt provided = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X4.305X10^4X257/1.742/10^7)X1000X257/10^4
= 25.132 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4
= 25.594 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X257/10^4
= 44.093 Mton
HENCE, Vc = 25.132 Mton
Φt*Vc = 0.75X25.132 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 18.849 Mton **> 4.305Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.132X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 77.146 Mton **> Vu= 4.305Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.9 m
Width of Foundation = 1.6 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 6.24 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.269) + (0.6 + 0.257)) = 6.904 m
β = 1
αs = 20 (Corner Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 12.401 Mton/m^2
Vu = ((6.24 - (0.6X0.6X2))X12.401
= 68.454 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X6.904X10^3X269/10^4
= 362.578 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X6.904X10^3X269/10^4
= 560.347 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+20X269/(6.904X10^3))X1X35^0.5X(6.904X10^3)X269/10^4
= 253.451 Mton
HENCE, Vc = 253.451 Mton
Φt*Vn = Φt*Vc = 0.75X253.451 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
190.088 Mton **> 68.454Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F8_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1354	205:1.4*(DL+O	**0.738**	0.089986	0	0	0	-8.554	-4.996	-0.797
Min Qx	1026	208:1.4*(DL+O	**-0.612**	0.010	0	0	0	-2.380	0.070	0.741
Max Qy	1321	205:1.4*(DL+O	-0.262	**0.551**	0	0	0	-5.446	-3.060	-1.275
Min Qy	1160	205:1.4*(DL+O	0.258	**-0.471**	0	0	0	-5.777	0.288	0.994
Max Sx	1409	200:1.4*(DL+C	0.013	-0.004	**0**	0	0	-0.080	-0.084	-0.019
Min Sx	1409	200:1.4*(DL+C	0.013	-0.004	**0**	0	0	-0.080	-0.084	-0.019
Max Sy	1409	200:1.4*(DL+C	0.013	-0.004	0	**0**	0	-0.080	-0.084	-0.019
Min Sy	1409	200:1.4*(DL+C	0.013	-0.004	0	**0**	0	-0.080	-0.084	-0.019
Max Sxy	1409	200:1.4*(DL+C	0.013	-0.004	0	0	**0**	-0.080	-0.084	-0.019
Min Sxy	1409	200:1.4*(DL+C	0.013	-0.004	0	0	**0**	-0.080	-0.084	-0.019
Max Mx	1081	205:1.4*(DL+O	0.312	-0.134	0	0	0	**5.112**	1.521	1.075
Min Mx	1084	205:1.4*(DL+O	0.636	0.100	0	0	0	**-9.104**	-3.157	1.211
Max My	1320	226:1.2*(DL+O	-0.239	-0.106	0	0	0	-0.864	**4.035**	-2.998
Min My	1380	205:1.4*(DL+O	0.654	-0.266	0	0	0	-9.009	**-5.086**	-1.725
Max Mxy	1196	236:1.2*(DL+O	-0.072	0.010	0	0	0	-0.966	1.148	**2.983**
Min Mxy	1319	226:1.2*(DL+O	0.130	-0.201	0	0	0	1.898	3.922	**-3.168**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F8_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1355	205:1.4*(DL+O	**0.401**	0.099	0	0	0	-3.445	-3.376	-0.424
Min Qx	1376	211:1.4*(DL+O	**-0.252**	0.003	0	0	0	-2.401	-1.014	0.015
Max Qy	1295	205:1.4*(DL+O	0.019	**0.284**	0	0	0	-4.723	0.194	-1.229
Min Qy	1244	226:1.2*(DL+O	-0.002	**-0.235**	0	0	0	-0.032	1.895	-1.195
Max Sx	1409	200:1.4*(DL+C	0.013	-0.004	**0**	0	0	-0.080	-0.084	-0.019
Min Sx	1409	200:1.4*(DL+C	0.013	-0.004	**0**	0	0	-0.080	-0.084	-0.019
Max Sy	1409	200:1.4*(DL+C	0.013	-0.004	0	**0**	0	-0.080	-0.084	-0.019
Min Sy	1409	200:1.4*(DL+C	0.013	-0.004	0	**0**	0	-0.080	-0.084	-0.019
Max Sxy	1409	200:1.4*(DL+C	0.013	-0.004	0	0	**0**	-0.080	-0.084	-0.019
Min Sxy	1409	200:1.4*(DL+C	0.013	-0.004	0	0	**0**	-0.080	-0.084	-0.019
Max Mx	1024	208:1.4*(DL+O	0.022	-0.03252	0	0	0	**2.541**	0.222	0.856
Min Mx	1295	205:1.4*(DL+O	0.019	0.284	0	0	0	**-4.723**	0.194	-1.229
Max My	1246	210:1.4*(DL+O	-0.036	-0.021	0	0	0	-0.987	**3.544**	-1.097
Min My	1350	236:1.2*(DL+O	-0.190	-0.002	0	0	0	-1.737	**-3.814**	1.710
Max Mxy	1196	236:1.2*(DL+O	-0.072	0.010	0	0	0	-0.966	1.148	**2.983**
Min Mxy	1294	226:1.2*(DL+O	-0.052	-0.05816	0	0	0	0.185	3.191	**-2.967**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.9 DESIGN OF FOUNDATION MKD. F8 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F8_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	60	100 DL+CT	0	5.535	0	
Min Px	60	100 DL+CT	0	5.535	0	
Max Py	538	105 DL+OE	0	17.39	0	< 71.75 T/m2 , O.K.
Min Py	60	105 DL+OE	0	0	0	
Max Pz	60	100 DL+CT	0	5.535	0	
Min Pz	60	100 DL+CT	0	5.535	0	

STRENGTH CALCULATION :

Slab Thickness = 400 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F8_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	5.112	Mton-m	Corresponding Mxy	1.075	Mton-m	*(Plate No. - 1081 , L/C No. - 205)*
Min. Mx	-9.104	Mton-m	Corresponding Mxy	1.211	Mton-m	*(Plate No. - 1084 , L/C No. - 205)*
Max. My	4.035	Mton-m	Corresponding Mxy	-2.998	Mton-m	*(Plate No. - 1320 , L/C No. - 226)*
Min. My	-5.086	Mton-m	Corresponding Mxy	-1.725	Mton-m	*(Plate No. - 1380 , L/C No. - 205)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 5.112 + 1.075 = 6.187 Mton-m
My1 = My + abs(Mxy) = 4.035 + 2.998 = 7.033 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 5.112 + 0.286 = 5.398 Mton-m
My2 = My+abs(Mxy^2/Mx) = 4.035 + 1.758 = 5.793 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 6.187 Mton-m
Myd = 7.033 Mton-m

ALONG X - DIRECTION :

Mu = 6.187 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.187X10^7/(1000X317^2) deff. = 317 mm
= 0.616 N/mm^2 < 6.9 N/mm^2
Pt = 0.0016
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X317/100
= 5.71 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0032

ALONG Y - DIRECTION :

Mu = 7.033 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 7.033X10^7/(1000X301^2) deff. = 301 mm
= 0.7 N/mm^2 < 6.9 N/mm^2
Pt = 0.0019
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0019X1000X317/100
= 5.72 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0033

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -9.104 - 1.211 = -10.315 Mton-m
My1 = My - abs(Mxy) = -5.086 - 1.725 = -6.811 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -9.104 - 0.288 = -9.392 Mton-m
My2 = My-abs(Mxy^2/Mx) = -5.086 - 0.327 = -4.759 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -10.315 Mton-m
Myd = -6.811 Mton-m

ALONG X - DIRECTION :

Mu = 10.315 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 10.315X10^7/(1000X317^2) deff. = 317 mm
= 1.026 N/mm^2 < 6.9 N/mm^2
Pt = 0.0028
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0028X1000X317/100
= 8.88 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0032

ALONG Y - DIRECTION :

Mu = 6.811 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.811X10^7/(1000X301^2) deff. = 301 mm
= 0.752 N/mm^2 < 6.9 N/mm^2
Pt = 0.0020
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.002X1000X301/100
= 6.02 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0033

SHEAR CHECK
(Staad Group : F8_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :
SQx = 0.401 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1355 , L/C No. - 205)*
Vu = 16.04 Mton

Provided Pt = 0.0032
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0032X16.04X10^4X317/10.315/10^7)X1000X317/10^4
= 30.856 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0032)X1000X317/10^4
= 31.731 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X317/10^4
= 54.387 Mton
HENCE, Vc = 30.856 Mton
Φt*Vc = 0.75X30.856 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 23.142 Mton **> 16.04Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(30.856X10^4+0.66X35^0.5X1000X317)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 95.146 Mton **> Vu= 16.04Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :
SQy = 0.284 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1295 , L/C No. - 205)*
Vu = 11.36 Mton

Pt provided = 0.0033
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0033X11.36X10^4X301/6.811/10^7)X1000X301/10^4
= 29.34 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0033)X1000X301/10^4
= 30.18 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X301/10^4
= 51.641 Mton
HENCE, Vc = 29.34 Mton
Φt*Vc = 0.75X29.34 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 22.005 Mton **> 11.36Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(29.34X10^4+0.66X35^0.5X1000X301)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 90.347 Mton **> Vu= 11.36Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.9 m
Width of Foundation = 2.7 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 10.53 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.317) + (0.6 + 0.301)) = 7.272 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 17.39 Mton/m^2
Vu = ((10.53 - (0.6X0.6X2))X17.39
= 170.596 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.272X10^3X317/10^4
= 450.05 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.272X10^3X317/10^4
= 695.532 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X317/(7.272X10^3))X1X35^0.5X(7.272X10^3)X317/10^4
= 374.42 Mton
HENCE, Vc = 374.42 Mton
Φt*Vn = Φt*Vc = 0.75X374.42 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
280.815 Mton **> 170.596Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F9_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1395	208:1.4*(DL+O	**0.668**	-0.018	0	0	0	-2.767	0.065	0.869
Min Qx	1367	207:1.4*(DL+O	**-0.697**	-0.108	0	0	0	-9.740	-3.633	1.311
Max Qy	1309	207:1.4*(DL+O	-0.284	**0.520**	0	0	0	-6.101	0.183	0.874
Min Qy	1147	207:1.4*(DL+O	-0.216	**-0.407**	0	0	0	-4.748	0.902	-0.419
Max Sx	1399	200:1.4*(DL+C	0.002	0.000	**0**	0	0	0.028	0.051	0.060
Min Sx	1399	200:1.4*(DL+C	0.002	0.000	**0**	0	0	0.028	0.051	0.060
Max Sy	1399	200:1.4*(DL+C	0.002	0.000	0	**0**	0	0.028	0.051	0.060
Min Sy	1399	200:1.4*(DL+C	0.002	0.000	0	**0**	0	0.028	0.051	0.060
Max Sxy	1399	200:1.4*(DL+C	0.002	0.000	0	0	**0**	0.028	0.051	0.060
Min Sxy	1399	200:1.4*(DL+C	0.002	0.000	0	0	**0**	0.028	0.051	0.060
Max Mx	1370	208:1.4*(DL+O	-0.278	0.133	0	0	0	**5.279**	1.305	1.530
Min Mx	1367	207:1.4*(DL+O	-0.697	-0.108	0	0	0	**-9.740**	-3.633	1.311
Max My	1234	207:1.4*(DL+O	-0.023	0.017	0	0	0	-0.191	**4.308**	0.075
Min My	1367	208:1.4*(DL+O	-0.670	-0.114	0	0	0	-9.532	**-3.679**	1.607
Max Mxy	1285	236:1.2*(DL+O	0.082	0.041	0	0	0	-0.719	1.019	**3.390**
Min Mxy	1187	226:1.2*(DL+O	0.073103	-0.035	0	0	0	-0.657	0.915	**-2.999**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F9_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1075	209:1.4*(DL+O	**0.224**	-0.002	0	0	0	-2.614	-0.992	0.586
Min Qx	1366	207:1.4*(DL+O	**-0.391**	-0.011	0	0	0	-4.377	-1.947	0.949
Max Qy	1308	207:1.4*(DL+O	-0.238	**0.210**	0	0	0	-3.062	0.564	-0.258
Min Qy	1243	236:1.2*(DL+O	0.003	**-0.220**	0	0	0	-0.040	1.123	1.333
Max Sx	1399	200:1.4*(DL+C	0.002	0.000	**0**	0	0	0.028	0.051	0.060
Min Sx	1399	200:1.4*(DL+C	0.002	0.000	**0**	0	0	0.028	0.051	0.060
Max Sy	1399	200:1.4*(DL+C	0.002	0.000	0	**0**	0	0.028	0.051	0.060
Min Sy	1399	200:1.4*(DL+C	0.002	0.000	0	**0**	0	0.028	0.051	0.060
Max Sxy	1399	200:1.4*(DL+C	0.002	0.000	0	0	**0**	0.028	0.051	0.060
Min Sxy	1399	200:1.4*(DL+C	0.002	0.000	0	0	**0**	0.028	0.051	0.060
Max Mx	1397	208:1.4*(DL+O	-0.004	0.030299	0	0	0	**2.781**	0.182	1.005
Min Mx	1392	207:1.4*(DL+O	-0.230	-0.039	0	0	0	**-4.691**	-0.601	0.788
Max My	1234	207:1.4*(DL+O	-0.023	0.017	0	0	0	-0.191	**4.308**	0.075
Min My	1366	208:1.4*(DL+O	-0.375	-0.019	0	0	0	-4.353	**-2.073**	1.220
Max Mxy	1285	236:1.2*(DL+O	0.082	0.041	0	0	0	-0.719	1.019	**3.390**
Min Mxy	1187	226:1.2*(DL+O	0.073103	-0.035	0	0	0	-0.657	0.915	**-2.999**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.10 DESIGN OF FOUNDATION MKD. F9 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F9_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	49	100 DL+CT	0	7.223	0	
Min Px	49	100 DL+CT	0	7.223	0	
Max Py	517	107 DL+OE	0	18.257	0	< 71.75 T/m2 , O.K.
Min Py	59	106 DL+OE	0	0	0	
Max Pz	49	100 DL+CT	0	7.223	0	
Min Pz	49	100 DL+CT	0	7.223	0	

STRENGTH CALCULATION :

Slab Thickness = 400 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F9_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	5.279	Mton-m	Corresponding Mxy	1.53	Mton-m	*(Plate No. - 1370 , L/C No. - 208)*
Min. Mx	-9.74	Mton-m	Corresponding Mxy	1.311	Mton-m	*(Plate No. - 1367 , L/C No. - 207)*
Max. My	4.308	Mton-m	Corresponding Mxy	0.075	Mton-m	*(Plate No. - 1234 , L/C No. - 207)*
Min. My	-3.679	Mton-m	Corresponding Mxy	1.607	Mton-m	*(Plate No. - 1367 , L/C No. - 208)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 5.279 + 1.53 = 6.809 Mton-m
My1 = My + abs(Mxy) = 4.308 + 0.075 = 4.383 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 5.279 + 0.543 = 5.822 Mton-m
My2 = My+abs(Mxy^2/Mx) = 4.308 + 0.001 = 4.309 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 6.809 Mton-m
Myd = 4.383 Mton-m

ALONG X - DIRECTION :

Mu = 6.809 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.809X10^7/(1000X317^2) deff. = 317 mm
= 0.678 N/mm^2 < 6.9 N/mm^2
Pt = 0.0018
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X317/100
= 5.71 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0032

ALONG Y - DIRECTION :

Mu = 4.383 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.383X10^7/(1000X301^2) deff. = 301 mm
= 0.436 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X317/100
= 5.42 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 10.05 cm2 at Top **O.K.**
Total Provide Pt = 0.0033

FOR BOTTOM REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-9.74 - 1.311 =	-11.051 Mton-m
My1 =	My - abs(Mxy) =	-3.679 - 1.607 =	-5.286 Mton-m
Mx2 =	Mx-abs(Mxy^2/My) =	-9.74 - 0.467 =	-10.207 Mton-m
My2 =	My-abs(Mxy^2/Mx) =	-3.679 - 0.265 =	-3.414 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -11.051 Mton-m
Myd = -5.286 Mton-m

ALONG X - DIRECTION :

Mu = 11.051 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 11.051X10^7/(1000X317^2) deff. = 317 mm
= 1.1 N/mm^2 < 6.9 N/mm^2
Pt = 0.0030
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.003X1000X317/100
= 9.51 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0032

ALONG Y - DIRECTION :

Mu = 5.286 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 5.286X10^7/(1000X301^2) deff. = 301 mm
= 0.583 N/mm^2 < 6.9 N/mm^2
Pt = 0.0016
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X301/100
= 5.42 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided	16	mm @	200	C/C	(Provide Ast =	10.05	cm2) at Bottom		
Provided	0	mm @	200	C/C	(Provide Ast =	0	cm2) at Bottom		
					Total Provide Ast =	10.05	cm2) at Bottom		O.K.
					Total Provide Pt =	0.0033			

SHEAR CHECK

(Staad Group : F9_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.391 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1366 , L/C No. - 207)*

Vu = 15.64 Mton

Provided Pt = 0.0032

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0032X15.64X10^4X317/11.051/10^7)X1000X317/10^4

= 30.78 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0032)X1000X317/10^4

= 31.731 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X317/10^4

= 54.387 Mton

HENCE, Vc = 30.78 Mton

Φt*Vc = 0.75X30.78 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 23.085 Mton **> 15.64Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(30.78X10^4+0.66X35^0.5X1000X317)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 95.141 Mton **> Vu= 15.64Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = -0.22 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1243 , L/C No. - 236)*

Vu = 8.8 Mton

Pt provided = 0.0033

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0033X8.8X10^4X301/5.286/10^7)X1000X301/10^4

= 29.338 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0033)X1000X301/10^4

= 30.18 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X301/10^4

= 51.641 Mton

HENCE, Vc = 29.338 Mton

Φt*Vc = 0.75X29.338 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 22.004 Mton **> 8.8Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(29.338X10^4+0.66X35^0.5X1000X301)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 90.347 Mton **> Vu= 8.8Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.9 m
Width of Foundation = 2.7 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 2
Area (A) = 10.53 m^2
Perimeter (bo) = 2 X 2 X ((0.6 + 0.317) + (0.6 + 0.301)) = 7.272 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 18.257 Mton/m^2
Vu = ((10.53 - (0.6X0.6X2))X18.257
= 179.101 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X7.272X10^3X317/10^4
= 450.05 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X7.272X10^3X317/10^4
= 695.532 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X317/(7.272X10^3))X1X35^0.5X(7.272X10^3)X317/10^4
= 374.42 Mton
HENCE, Vc = 374.42 Mton
Φt*Vn = Φt*Vc = 0.75X374.42 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
280.815 Mton **> 179.101Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F10_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1042	208:1.4*(DL+O	**0.366**	0.249	0	0	0	-1.776	-2.804	0.465
Min Qx	1039	208:1.4*(DL+O	**-0.366**	0.249	0	0	0	-1.776	-2.804	-0.465
Max Qy	1041	208:1.4*(DL+O	0.127	**0.542**	0	0	0	-4.556	-3.655	0.438
Min Qy	1497	210:1.4*(DL+O	0.073	**-0.349**	0	0	0	-3.414	-2.106	-0.421
Max Sx	1511	200:1.4*(DL+C	0.020	-0.020	**0**	0	0	-0.290	-0.292	-0.157
Min Sx	1511	200:1.4*(DL+C	0.020	-0.020	**0**	0	0	-0.290	-0.292	-0.157
Max Sy	1511	200:1.4*(DL+C	0.020	-0.020	0	**0**	0	-0.290	-0.292	-0.157
Min Sy	1511	200:1.4*(DL+C	0.020	-0.020	0	**0**	0	-0.290	-0.292	-0.157
Max Sxy	1511	200:1.4*(DL+C	0.020	-0.020	0	0	**0**	-0.290	-0.292	-0.157
Min Sxy	1511	200:1.4*(DL+C	0.020	-0.020	0	0	**0**	-0.290	-0.292	-0.157
Max Mx	1061	245:0.9*(DL+O	0.014	0.008	0	0	0	**-0.013**	-0.520	-0.048
Min Mx	1041	208:1.4*(DL+O	0.127	0.542	0	0	0	**-4.556**	-3.655	0.438
Max My	1135	236:1.2*(DL+O	-0.045	0.086	0	0	0	-0.529	**1.240**	-0.294
Min My	1041	208:1.4*(DL+O	0.127	0.542	0	0	0	-4.556	**-3.655**	0.438
Max Mxy	1133	208:1.4*(DL+O	0.082	-0.034	0	0	0	-0.803	0.225	**1.270**
Min Mxy	1136	208:1.4*(DL+O	-0.082	-0.034	0	0	0	-0.803	0.225	**-1.270**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F10_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1010	208:1.4*(DL+O	**0.116**	0.120	0	0	0	-1.857	-0.757	0.394
Min Qx	1007	208:1.4*(DL+O	**-0.116**	0.120	0	0	0	-1.856	-0.757	-0.394
Max Qy	1009	208:1.4*(DL+O	0.067	**0.176**	0	0	0	-3.334	-0.740	0.210
Min Qy	1509	210:1.4*(DL+O	0.042	**-0.109**	0	0	0	-2.463	-0.408	-0.178
Max Sx	1511	200:1.4*(DL+C	0.020	-0.020	**0**	0	0	-0.290	-0.292	-0.157
Min Sx	1511	200:1.4*(DL+C	0.020	-0.020	**0**	0	0	-0.290	-0.292	-0.157
Max Sy	1511	200:1.4*(DL+C	0.020	-0.020	0	**0**	0	-0.290	-0.292	-0.157
Min Sy	1511	200:1.4*(DL+C	0.020	-0.020	0	**0**	0	-0.290	-0.292	-0.157
Max Sxy	1511	200:1.4*(DL+C	0.020	-0.020	0	0	**0**	-0.290	-0.292	-0.157
Min Sxy	1511	200:1.4*(DL+C	0.020	-0.020	0	0	**0**	-0.290	-0.292	-0.157
Max Mx	1061	245:0.9*(DL+O	0.014	0.008	0	0	0	**-0.013**	-0.520	-0.048
Min Mx	1008	208:1.4*(DL+O	-0.067	0.176	0	0	0	**-3.334**	-0.740	-0.210
Max My	1173	208:1.4*(DL+O	-0.010	0.029667	0	0	0	-0.992	**0.317**	-0.152
Min My	1061	208:1.4*(DL+O	0.097	0.058	0	0	0	-0.184	**-2.613**	-0.478
Max Mxy	1094	208:1.4*(DL+O	-0.049	0.001	0	0	0	-0.239	-1.713	**0.841**
Min Mxy	1099	208:1.4*(DL+O	0.049	0.001	0	0	0	-0.239	-1.713	**-0.841**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.11 DESIGN OF FOUNDATION MKD. F10 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F10_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	27	100 DL+CT	0	10.792	0	
Min Px	27	100 DL+CT	0	10.792	0	
Max Py	45	108 DL+OE	0	20.846	0	< 71.75 T/m2 , O.K.
Min Py	587	154 0.6*(DL	0	1.055	0	
Max Pz	27	100 DL+CT	0	10.792	0	
Min Pz	27	100 DL+CT	0	10.792	0	

STRENGTH CALCULATION :

Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F10_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	-0.013	Mton-m	Corresponding Mxy	-0.048	Mton-m	*(Plate No. - 1061 , L/C No. - 245)*
Min. Mx	-4.556	Mton-m	Corresponding Mxy	-0.438	Mton-m	*(Plate No. - 1040 , L/C No. - 208)*
Max. My	1.24	Mton-m	Corresponding Mxy	0.294	Mton-m	*(Plate No. - 1134 , L/C No. - 236)*
Min. My	-3.655	Mton-m	Corresponding Mxy	-0.438	Mton-m	*(Plate No. - 1040 , L/C No. - 208)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = -0.013 + 0.048 = 0.035 Mton-m
My1 = My + abs(Mxy) = 1.24 + 0.294 = 1.534 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = -0.013 + 0.002 = -0.011 Mton-m
My2 = My+abs(Mxy^2/Mx) = 1.24 + 6.649 = 7.889 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.035 Mton-m
Myd = 1.534 Mton-m

ALONG X - DIRECTION :

Mu = 0.035 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.035X10^7/(1000X270^2) deff. = 270 mm
= 0.005 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.43 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

ALONG Y - DIRECTION :

Mu = 1.534 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.534X10^7/(1000X260^2) deff. = 260 mm
= 0.21 N/mm^2 < 6.9 N/mm^2
Pt = 0.0006
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.34 cm^2

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.002

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -4.556 - 0.438 = -4.994 Mton-m
My1 = My - abs(Mxy) = -3.655 - 0.438 = -4.093 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -4.556 - 0.052 = -4.608 Mton-m
My2 = My-abs(Mxy^2/Mx) = -3.655 - 0.042 = -3.613 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -4.994 Mton-m
Myd = -4.093 Mton-m

ALONG X - DIRECTION :

Mu = 4.994 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.994X10^7/(1000X269^2) deff. = 269 mm
= 0.69 N/mm^2 < 6.9 N/mm^2
Pt = 0.0018
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0028

ALONG Y - DIRECTION :

Mu = 4.093 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.093X10^7/(1000X257^2) deff. = 257 mm
= 0.62 N/mm^2 < 6.9 N/mm^2
Pt = 0.0017
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X257/100
= 4.63 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN Saudi Arabian Mining Company		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0029

SHEAR CHECK
(Staad Group : F10_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.116 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1007 , L/C No. - 208)*
Vu = 4.06 Mton

Provided Pt = 0.0028
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0028X4.06X10^4X269/4.994/10^7)X1000X269/10^4
= 25.743 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0028)X1000X269/10^4
= 26.743 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X269/10^4
= 46.151 Mton
HENCE, Vc = 25.743 Mton
Φt*Vc = 0.75X25.743 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.307 Mton **> 4.06Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.743X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 80.706 Mton **> Vu= 4.06Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.176 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1008 , L/C No. - 208)*
Vu = 6.16 Mton

Pt provided = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X6.16X10^4X257/4.093/10^7)X1000X257/10^4
= 24.817 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4
= 25.594 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X257/10^4
= 44.093 Mton
HENCE, Vc = 24.817 Mton
Φt*Vc = 0.75X24.817 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 18.613 Mton **> 6.16Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(24.817X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 77.123 Mton **> Vu= 6.16Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 1.8 m
Width of Foundation = 1.8 m
Length of Column = 0.65 m
Width of Column = 0.5 m
No. of Column = 1
Area (A) = 3.24 m^2
Perimeter (bo) = 1 X 2 X ((0.65 + 0.269) + (0.5 + 0.257)) = 3.352 m
β = 1.3
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 20.846 Mton/m^2
Vu = ((3.24 - (0.65X0.5X1))X20.846
= 60.766 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X3.352X10^3X269/10^4
= 176.037 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1.3)X1X35^0.5X3.352X10^3X269/10^4
= 230.202 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X269/(3.352X10^3))X1X35^0.5X(3.352X10^3)X269/10^4
= 195.147 Mton
HENCE, Vc = 176.037 Mton
Φt*Vn = Φt*Vc = 0.75X176.037 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
132.028 Mton **> 60.766Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F11_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1036	208:1.4*(DL+O	**0.249**	0.171	0	0	0	-1.234	-1.916	0.346
Min Qx	1033	208:1.4*(DL+O	**-0.249**	0.171	0	0	0	-1.234	-1.916	-0.346
Max Qy	1035	208:1.4*(DL+O	0.086	**0.370**	0	0	0	-3.154	-2.477	0.311
Min Qy	1503	210:1.4*(DL+O	0.08285	**-0.358**	0	0	0	-3.075	-2.385	-0.308
Max Sx	1517	200:1.4*(DL+C	0.013	-0.015	**0**	0	0	-0.141	-0.173	-0.052
Min Sx	1517	200:1.4*(DL+C	0.013	-0.015	**0**	0	0	-0.141	-0.173	-0.052
Max Sy	1517	200:1.4*(DL+C	0.013	-0.015	0	**0**	0	-0.141	-0.173	-0.052
Min Sy	1517	200:1.4*(DL+C	0.013	-0.015	0	**0**	0	-0.141	-0.173	-0.052
Max Sxy	1517	200:1.4*(DL+C	0.013	-0.015	0	0	**0**	-0.141	-0.173	-0.052
Min Sxy	1517	200:1.4*(DL+C	0.013	-0.015	0	0	**0**	-0.141	-0.173	-0.052
Max Mx	1493	249:0.9*(DL+O	0.010	-0.006	0	0	0	**-0.005**	-0.364	0.042368
Min Mx	1035	208:1.4*(DL+O	0.086	0.370	0	0	0	**-3.154**	-2.477	0.311
Max My	1129	236:1.2*(DL+O	-0.033	0.059	0	0	0	-0.455	**0.902**	-0.229
Min My	1035	208:1.4*(DL+O	0.086	0.370	0	0	0	-3.154	**-2.477**	0.311
Max Mxy	1127	208:1.4*(DL+O	0.048	-0.029	0	0	0	-0.589	0.093	**0.880**
Min Mxy	1130	208:1.4*(DL+O	-0.048	-0.029	0	0	0	-0.589	0.093	**-0.880**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F11_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1004	208:1.4*(DL+O	**0.079**	0.082	0	0	0	-1.289	-0.516	0.278
Min Qx	1001	208:1.4*(DL+O	**-0.079**	0.082	0	0	0	-1.289	-0.516	-0.278
Max Qy	1003	208:1.4*(DL+O	0.046	**0.120**	0	0	0	-2.305	-0.500	0.147
Min Qy	1515	210:1.4*(DL+O	0.044	**-0.116**	0	0	0	-2.246	-0.480	-0.145
Max Sx	1517	200:1.4*(DL+C	0.013	-0.015	**0**	0	0	-0.141	-0.173	-0.052
Min Sx	1517	200:1.4*(DL+C	0.013	-0.015	**0**	0	0	-0.141	-0.173	-0.052
Max Sy	1517	200:1.4*(DL+C	0.013	-0.015	0	**0**	0	-0.141	-0.173	-0.052
Min Sy	1517	200:1.4*(DL+C	0.013	-0.015	0	**0**	0	-0.141	-0.173	-0.052
Max Sxy	1517	200:1.4*(DL+C	0.013	-0.015	0	0	**0**	-0.141	-0.173	-0.052
Min Sxy	1517	200:1.4*(DL+C	0.013	-0.015	0	0	**0**	-0.141	-0.173	-0.052
Max Mx	1493	249:0.9*(DL+O	0.010	-0.006	0	0	0	**-0.005**	-0.364	0.042368
Min Mx	1003	208:1.4*(DL+O	0.046	0.120	0	0	0	**-2.305**	-0.500	0.147
Max My	1167	236:1.2*(DL+O	-0.010	0.028	0	0	0	-0.262	**0.219**	-0.063
Min My	1055	208:1.4*(DL+O	0.068	0.039	0	0	0	-0.131	**-1.827**	-0.309
Max Mxy	1088	208:1.4*(DL+O	-0.036	-0.001	0	0	0	-0.168	-1.230	**0.566**
Min Mxy	1093	208:1.4*(DL+O	0.036	-0.001	0	0	0	-0.168	-1.230	**-0.566**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.12 DESIGN OF FOUNDATION MKD. F11 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F11_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	16	100 DL+CT	0	9.466	0	
Min Px	16	100 DL+CT	0	9.466	0	
Max Py	20	152 DL+OE	0	16.044	0	< 71.75 T/m2 , O.K.
Min Py	594	154 0.6*(DL	0	1.615	0	
Max Pz	16	100 DL+CT	0	9.466	0	
Min Pz	16	100 DL+CT	0	9.466	0	

STRENGTH CALCULATION :


Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F11_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	-0.005	Mton-m	Corresponding Mxy	0.042	Mton-m	*(Plate No. - 1493 , L/C No. - 249)*
Min. Mx	-3.154	Mton-m	Corresponding Mxy	0.311	Mton-m	*(Plate No. - 1035 , L/C No. - 208)*
Max. My	0.902	Mton-m	Corresponding Mxy	-0.229	Mton-m	*(Plate No. - 1129 , L/C No. - 236)*
Min. My	-2.477	Mton-m	Corresponding Mxy	0.311	Mton-m	*(Plate No. - 1035 , L/C No. - 208)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = -0.005 + 0.042 = 0.037 Mton-m
My1 = My + abs(Mxy) = 0.902 + 0.229 = 1.131 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = -0.005 + 0.002 = -0.003 Mton-m
My2 = My+abs(Mxy^2/Mx) = 0.902 + 10.488 = 11.39 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.037 Mton-m
Myd = 1.131 Mton-m

ALONG X - DIRECTION :

Mu = 0.037 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.037X10^7/(1000X270^2) deff. = 270 mm
= 0.005 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.43 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

ALONG Y - DIRECTION :

Mu = 1.131 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.131X10^7/(1000X260^2) deff. = 260 mm
= 0.155 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.34 cm^2

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.002

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -3.154 - 0.311 = -3.465 Mton-m
My1 = My - abs(Mxy) = -2.477 - 0.311 = -2.788 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -3.154 - 0.039 = -3.193 Mton-m
My2 = My-abs(Mxy^2/Mx) = -2.477 - 0.031 = -2.446 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -3.465 Mton-m
Myd = -2.788 Mton-m

ALONG X - DIRECTION :

Mu = 3.465 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.465X10^7/(1000X269^2) deff. = 269 mm
= 0.479 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0028

ALONG Y - DIRECTION :

Mu = 2.788 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.788X10^7/(1000X257^2) deff. = 257 mm
= 0.422 N/mm^2 < 6.9 N/mm^2
Pt = 0.0011
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X257/100
= 4.63 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN Saudi Arabian Mining Company		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0029

SHEAR CHECK
(Staad Group : F11_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.079 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1001 , L/C No. - 208)*
Vu = 2.765 Mton

Provided Pt = 0.0028
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0028X2.765X10^4X269/3.465/10^7)X1000X269/10^4
= 25.738 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0028)X1000X269/10^4
= 26.743 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X269/10^4
= 46.151 Mton
HENCE, Vc = 25.738 Mton
Φt*Vc = 0.75X25.738 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.304 Mton **> 2.765Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.738X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 80.706 Mton **> Vu= 2.765Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.12 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1003 , L/C No. - 208)*
Vu = 4.2 Mton

Pt provided = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X4.2X10^4X257/2.788/10^7)X1000X257/10^4
= 24.817 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4
= 25.594 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X257/10^4
= 44.093 Mton
HENCE, Vc = 24.817 Mton
Φt*Vc = 0.75X24.817 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 18.613 Mton **> 4.2Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(24.817X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 77.123 Mton **> Vu= 4.2Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 1.8 m
Width of Foundation = 1.8 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 1
Area (A) = 3.24 m^2
Perimeter (bo) = 1 X 2 X ((0.6 + 0.269) + (0.6 + 0.257)) = 3.452 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 16.044 Mton/m^2
Vu = ((3.24 - (0.6X0.6X1))X16.044
= 46.207 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X3.452X10^3X269/10^4
= 181.289 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X3.452X10^3X269/10^4
= 280.174 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X269/(3.452X10^3))X1X35^0.5X(3.452X10^3)X269/10^4
= 197.789 Mton
HENCE, Vc = 181.289 Mton
Φt*Vn = Φt*Vc = 0.75X181.289 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
135.967 Mton **> 46.207Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F12_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1426	233:1.2*(DL+O	**0.063**	-0.002	0	0	0	-0.341	-0.599	0.047
Min Qx	1607	227:1.2*(DL+O	**-0.066**	0.001	0	0	0	-0.356	-0.637	0.054
Max Qy	1418	236:1.2*(DL+O	-0.019	**0.086**	0	0	0	-0.763	-0.557	-0.081
Min Qy	1624	226:1.2*(DL+O	-0.020	**-0.089**	0	0	0	-0.800	-0.570	0.087
Max Sx	1643	200:1.4*(DL+C	0.006	-0.006	**0**	0	0	-0.088	-0.090	-0.046
Min Sx	1643	200:1.4*(DL+C	0.006	-0.006	**0**	0	0	-0.088	-0.090	-0.046
Max Sy	1643	200:1.4*(DL+C	0.006	-0.006	0	**0**	0	-0.088	-0.090	-0.046
Min Sy	1643	200:1.4*(DL+C	0.006	-0.006	0	**0**	0	-0.088	-0.090	-0.046
Max Sxy	1643	200:1.4*(DL+C	0.006	-0.006	0	0	**0**	-0.088	-0.090	-0.046
Min Sxy	1643	200:1.4*(DL+C	0.006	-0.006	0	0	**0**	-0.088	-0.090	-0.046
Max Mx	1433	241:0.9*(DL+O	0.003	-0.002	0	0	0	**0.005**	-0.196	-0.001
Min Mx	1625	226:1.2*(DL+O	0.020	-0.089	0	0	0	**-0.800**	-0.570	-0.087
Max My	1624	250:0.9*(DL+O	0.005	0.005	0	0	0	-0.167	**0.143**	0.057
Min My	1591	206:1.4*(DL+O	-0.049	0.023	0	0	0	-0.256	**-0.646**	-0.135
Max Mxy	1578	226:1.2*(DL+O	-0.003	0.013	0	0	0	-0.185	-0.045	**0.224**
Min Mxy	1575	226:1.2*(DL+O	0.003	0.013	0	0	0	-0.185	-0.045	**-0.224**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F12_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1427	233:1.2*(DL+O	**0.019**	0.008	0	0	0	-0.063	-0.454	-0.001
Min Qx	1606	227:1.2*(DL+O	**-0.02011**	-0.009	0	0	0	-0.066	-0.480	0.002
Max Qy	1413	236:1.2*(DL+O	0.010	**0.027**	0	0	0	-0.555	-0.111	0.037
Min Qy	1641	226:1.2*(DL+O	0.011	**-0.028**	0	0	0	-0.581	-0.113	-0.039
Max Sx	1643	200:1.4*(DL+C	0.006	-0.006	**0**	0	0	-0.088	-0.090	-0.046
Min Sx	1643	200:1.4*(DL+C	0.006	-0.006	**0**	0	0	-0.088	-0.090	-0.046
Max Sy	1643	200:1.4*(DL+C	0.006	-0.006	0	**0**	0	-0.088	-0.090	-0.046
Min Sy	1643	200:1.4*(DL+C	0.006	-0.006	0	**0**	0	-0.088	-0.090	-0.046
Max Sxy	1643	200:1.4*(DL+C	0.006	-0.006	0	0	**0**	-0.088	-0.090	-0.046
Min Sxy	1643	200:1.4*(DL+C	0.006	-0.006	0	0	**0**	-0.088	-0.090	-0.046
Max Mx	1433	241:0.9*(DL+O	0.003	-0.002	0	0	0	**0.005**	-0.196	-0.001
Min Mx	1641	226:1.2*(DL+O	0.011	-0.028	0	0	0	**-0.581**	-0.113	-0.039
Max My	1443	250:0.9*(DL+O	-0.001	0.003	0	0	0	-0.154	**0.038**	-0.022
Min My	1606	206:1.4*(DL+O	-0.017	-0.008	0	0	0	-0.043	**-0.483**	0.001
Max Mxy	1595	226:1.2*(DL+O	0.011	0.002	0	0	0	-0.045	-0.360	**0.125**
Min Mxy	1590	226:1.2*(DL+O	-0.011	0.002	0	0	0	-0.045	-0.360	**-0.125**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.13 DESIGN OF FOUNDATION MKD. F12 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F12_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	539	100 DL+CT	0	6.366	0	
Min Px	539	100 DL+CT	0	6.366	0	
Max Py	853	130 DL+OE	0	7.944	0	< 71.75 T/m2 , O.K.
Min Py	539	154 0.6*(DL	0	2.744	0	
Max Pz	539	100 DL+CT	0	6.366	0	
Min Pz	539	100 DL+CT	0	6.366	0	

STRENGTH CALCULATION :

Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F12_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	0.005	Mton-m	Corresponding Mxy	-0.001	Mton-m	*(Plate No. - 1433 , L/C No. - 241)*
Min. Mx	-0.8	Mton-m	Corresponding Mxy	-0.087	Mton-m	*(Plate No. - 1625 , L/C No. - 226)*
Max. My	0.143	Mton-m	Corresponding Mxy	-0.057	Mton-m	*(Plate No. - 1625 , L/C No. - 250)*
Min. My	-0.646	Mton-m	Corresponding Mxy	-0.135	Mton-m	*(Plate No. - 1591 , L/C No. - 206)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 0.005 + 0.001 = 0.006 Mton-m
My1 = My + abs(Mxy) = 0.143 + 0.057 = 0.2 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 0.005 + 0 = 0.005 Mton-m
My2 = My+abs(Mxy^2/Mx) = 0.143 + 0.65 = 0.793 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.006 Mton-m
Myd = 0.2 Mton-m

ALONG X - DIRECTION :

Mu = 0.006 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.006X10^7/(1000X270^2) deff. = 270 mm
= 0.001 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.43 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

ALONG Y - DIRECTION :

Mu = 0.2 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.2X10^7/(1000X260^2) deff. = 260 mm
= 0.027 N/mm^2 < 6.9 N/mm^2
Pt = 0.0001
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X270/100
= 2.34 cm^2

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.002

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -0.8 - 0.087 = -0.887 Mton-m
My1 = My - abs(Mxy) = -0.646 - 0.135 = -0.781 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -0.8 - 0.012 = -0.812 Mton-m
My2 = My-abs(Mxy^2/Mx) = -0.646 - 0.023 = -0.623 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -0.887 Mton-m
Myd = -0.781 Mton-m

ALONG X - DIRECTION :

Mu = 0.887 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.887X10^7/(1000X269^2) deff. = 269 mm
= 0.123 N/mm^2 < 6.9 N/mm^2
Pt = 0.0003
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X269/100
= 4.84 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0028

ALONG Y - DIRECTION :

Mu = 0.781 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.781X10^7/(1000X257^2) deff. = 257 mm
= 0.118 N/mm^2 < 6.9 N/mm^2
Pt = 0.0003
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X257/100
= 4.63 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0029

SHEAR CHECK
(Staad Group : F12_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :
SQx = -0.02 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1606 , L/C No. - 227)*
Vu = 0.7 Mton

Provided Pt = 0.0028
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0028X0.7X10^4X269/0.887/10^7)X1000X269/10^4
= 25.735 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0028)X1000X269/10^4
= 26.743 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X269/10^4
= 46.151 Mton
HENCE, Vc = 25.735 Mton
Φt*Vc = 0.75X25.735 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 19.301 Mton **> 0.7Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.735X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 80.706 Mton **> Vu= 0.7Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :
SQy = -0.028 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1641 , L/C No. - 226)*
Vu = 0.98 Mton

Pt provided = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X0.98X10^4X257/0.781/10^7)X1000X257/10^4
= 24.736 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4
= 25.594 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X257/10^4
= 44.093 Mton
HENCE, Vc = 24.736 Mton
Φt*Vc = 0.75X24.736 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 18.552 Mton **> 0.98Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(24.736X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 77.117 Mton **> Vu= 0.98Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 1.8 m
Width of Foundation = 1.8 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 1
Area (A) = 3.24 m^2
Perimeter (bo) = 1 X 2 X ((0.6 + 0.269) + (0.6 + 0.257)) = 3.452 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 7.944 Mton/m^2
Vu = ((3.24 - (0.6X0.6X1))X7.944
= 22.879 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X3.452X10^3X269/10^4
= 181.289 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X3.452X10^3X269/10^4
= 280.174 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X269/(3.452X10^3))X1X35^0.5X(3.452X10^3)X269/10^4
= 197.789 Mton
HENCE, Vc = 181.289 Mton
Φt*Vn = Φt*Vc = 0.75X181.289 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
135.967 Mton **> 22.879Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F13_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1584	212:1.4*(DL+O	**0.424**	0.297	0	0	0	-2.165	-3.290	0.657
Min Qx	1581	212:1.4*(DL+O	**-0.424**	0.297	0	0	0	-2.165	-3.290	-0.657
Max Qy	1583	212:1.4*(DL+O	0.146	**0.636**	0	0	0	-5.509	-4.209	0.560
Min Qy	1616	212:1.4*(DL+O	0.233	**-0.339**	0	0	0	-1.503	-3.873	-1.284
Max Sx	1649	200:1.4*(DL+C	0.018	-0.008	**0**	0	0	-0.409	-0.296	-0.308
Min Sx	1649	200:1.4*(DL+C	0.018	-0.008	**0**	0	0	-0.409	-0.296	-0.308
Max Sy	1649	200:1.4*(DL+C	0.018	-0.008	0	**0**	0	-0.409	-0.296	-0.308
Min Sy	1649	200:1.4*(DL+C	0.018	-0.008	0	**0**	0	-0.409	-0.296	-0.308
Max Sxy	1649	200:1.4*(DL+C	0.018	-0.008	0	0	**0**	-0.409	-0.296	-0.308
Min Sxy	1649	200:1.4*(DL+C	0.018	-0.008	0	0	**0**	-0.409	-0.296	-0.308
Max Mx	1647	250:0.9*(DL+O	-0.019	0.041	0	0	0	**-0.031**	0.276	-0.061
Min Mx	1583	212:1.4*(DL+O	0.146	0.636	0	0	0	**-5.509**	-4.209	0.560
Max My	1631	236:1.2*(DL+O	-0.062	0.118	0	0	0	-0.736	**1.650**	-0.407
Min My	1583	212:1.4*(DL+O	0.146	0.636	0	0	0	-5.509	**-4.209**	0.560
Max Mxy	1629	212:1.4*(DL+O	0.066	-0.062	0	0	0	-1.099	0.027	**1.539**
Min Mxy	1632	212:1.4*(DL+O	-0.066	-0.062	0	0	0	-1.099	0.027	**-1.539**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F13_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1568	212:1.4*(DL+O	**0.136**	0.141	0	0	0	-2.261	-0.882	0.496
Min Qx	1565	212:1.4*(DL+O	**-0.136**	0.141	0	0	0	-2.261	-0.882	-0.496
Max Qy	1566	212:1.4*(DL+O	-0.078	**0.205**	0	0	0	-4.019	-0.846	-0.261
Min Qy	1646	226:1.2*(DL+O	-0.028	**-0.072**	0	0	0	-1.925	-0.236	0.153
Max Sx	1649	200:1.4*(DL+C	0.018	-0.008	**0**	0	0	-0.409	-0.296	-0.308
Min Sx	1649	200:1.4*(DL+C	0.018	-0.008	**0**	0	0	-0.409	-0.296	-0.308
Max Sy	1649	200:1.4*(DL+C	0.018	-0.008	0	**0**	0	-0.409	-0.296	-0.308
Min Sy	1649	200:1.4*(DL+C	0.018	-0.008	0	**0**	0	-0.409	-0.296	-0.308
Max Sxy	1649	200:1.4*(DL+C	0.018	-0.008	0	0	**0**	-0.409	-0.296	-0.308
Min Sxy	1649	200:1.4*(DL+C	0.018	-0.008	0	0	**0**	-0.409	-0.296	-0.308
Max Mx	1647	250:0.9*(DL+O	-0.019	0.041	0	0	0	**-0.031**	0.276	-0.061
Min Mx	1567	212:1.4*(DL+O	0.078	0.205	0	0	0	**-4.019**	-0.846	0.261
Max My	1647	236:1.2*(DL+O	-0.020	0.051	0	0	0	-0.407	**0.383**	-0.109
Min My	1601	212:1.4*(DL+O	0.119	0.068	0	0	0	-0.237	**-3.230**	-0.493
Max Mxy	1612	212:1.4*(DL+O	-0.066	-0.004	0	0	0	-0.298	-2.244	**0.952**
Min Mxy	1617	212:1.4*(DL+O	0.06627	-0.004	0	0	0	-0.298	-2.244	**-0.952**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.14 DESIGN OF FOUNDATION MKD. F13 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F13_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	743	100 DL+CT	0	19.548	0	
Min Px	743	100 DL+CT	0	19.548	0	
Max Py	746	152 DL+OE	0	24.645	0	< 71.75 T/m2 , O.K.
Min Py	857	156 0.6*(DL	0	0	0	
Max Pz	743	100 DL+CT	0	19.548	0	
Min Pz	743	100 DL+CT	0	19.548	0	

STRENGTH CALCULATION :

Slab Thickness = 350 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F13_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	-0.031	Mton-m	Corresponding Mxy	-0.061	Mton-m	*(Plate No. - 1647 , L/C No. - 250)*
Min. Mx	-5.509	Mton-m	Corresponding Mxy	0.56	Mton-m	*(Plate No. - 1583 , L/C No. - 212)*
Max. My	1.65	Mton-m	Corresponding Mxy	0.407	Mton-m	*(Plate No. - 1630 , L/C No. - 236)*
Min. My	-4.209	Mton-m	Corresponding Mxy	0.56	Mton-m	*(Plate No. - 1583 , L/C No. - 212)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = -0.031 + 0.061 = 0.03 Mton-m
My1 = My + abs(Mxy) = 1.65 + 0.407 = 2.057 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = -0.031 + 0.002 = -0.029 Mton-m
My2 = My+abs(Mxy^2/Mx) = 1.65 + 5.344 = 6.994 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.03 Mton-m
Myd = 2.057 Mton-m

ALONG X - DIRECTION :

Mu = 0.03 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.03X10^7/(1000X270^2) deff. = 270 mm
= 0.004 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X270/100
= 4.86 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R 3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R 3	AS BUILT	Rev.	D01

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

ALONG Y - DIRECTION :

Mu = 2.057 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.057X10^7/(1000X260^2) deff. = 260 mm
= 0.282 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X270/100
= 4.68 cm^2

Provided **10** mm @ **150** C/C (Provide Ast = 5.24 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 5.24 cm2 at Top **O.K.**
Total Provide Pt = 0.002

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -5.509 - 0.56 = -6.069 Mton-m
My1 = My - abs(Mxy) = -4.209 - 0.56 = -4.769 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -5.509 - 0.075 = -5.584 Mton-m
My2 = My-abs(Mxy^2/Mx) = -4.209 - 0.057 = -4.152 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -6.069 Mton-m
Myd = -4.769 Mton-m

ALONG X - DIRECTION :

Mu = 6.069 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 6.069X10^7/(1000X269^2) deff. = 269 mm
= 0.839 N/mm^2 < 6.9 N/mm^2
Pt = 0.0023
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0023X1000X269/100
= 6.19 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0028

ALONG Y - DIRECTION :

Mu = 4.769 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.769X10^7/(1000X257^2) deff. = 257 mm
= 0.722 N/mm^2 < 6.9 N/mm^2
Pt = 0.0019
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0019X1000X257/100
= 4.88 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided	12	mm @	150	C/C	(Provide Ast =	7.54	cm2) at Bottom	
Provided	0	mm @	150	C/C	(Provide Ast =	0	cm2) at Bottom	
					Total Provide Ast =	7.54	cm2) at Bottom	O.K.
					Total Provide Pt =	0.0029		

SHEAR CHECK

(Staad Group : F13_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.136 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1565 , L/C No. - 212)*

Vu = 4.76 Mton

Provided Pt = 0.0028

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0028X4.76X10^4X269/6.069/10^7)X1000X269/10^4

= 25.733 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0028)X1000X269/10^4

= 26.743 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X269/10^4

= 46.151 Mton

HENCE, Vc = 25.733 Mton

Φt*Vc = 0.75X25.733 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 19.3 Mton **> 4.76Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(25.733X10^4+0.66X35^0.5X1000X269)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 80.706 Mton **> Vu= 4.76Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.205 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1567 , L/C No. - 212)*

Vu = 7.175 Mton

Pt provided = 0.0029

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0029X7.175X10^4X257/4.769/10^7)X1000X257/10^4

= 24.817 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0029)X1000X257/10^4

= 25.594 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X257/10^4

= 44.093 Mton

HENCE, Vc = 24.817 Mton

Φt*Vc = 0.75X24.817 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 18.613 Mton **> 7.175Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(24.817X10^4+0.66X35^0.5X1000X257)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 77.123 Mton **> Vu= 7.175Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 1.8 m
Width of Foundation = 1.8 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 1
Area (A) = 3.24 m^2
Perimeter (bo) = 1 X 2 X ((0.6 + 0.269) + (0.6 + 0.257)) = 3.452 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 24.645 Mton/m^2
Vu = ((3.24 - (0.6X0.6X1))X24.645
= 70.978 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X3.452X10^3X269/10^4
= 181.289 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X3.452X10^3X269/10^4
= 280.174 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X269/(3.452X10^3))X1X35^0.5X(3.452X10^3)X269/10^4
= 197.789 Mton
HENCE, Vc = 181.289 Mton
Φt*Vn = Φt*Vc = 0.75X181.289 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
135.967 Mton **> 70.978Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F14_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2243	221:1.2*(DL+O	**0.409**	-0.162	0	0	0	7.438	4.697	-0.536
Min Qx	2253	231:1.2*(DL+O	**-0.613**	-0.211	0	0	0	-11.087	-8.172	-0.304
Max Qy	2233	231:1.2*(DL+O	-0.222	**0.398**	0	0	0	-7.452	-4.422	0.332
Min Qy	2263	231:1.2*(DL+O	-0.226	**-0.399**	0	0	0	-7.477	-4.490	-0.352
Max Sx	2299	200:1.4*(DL+C	0.001	-0.002	**0**	0	0	-0.042	-0.050	-0.036
Min Sx	2299	200:1.4*(DL+C	0.001	-0.002	**0**	0	0	-0.042	-0.050	-0.036
Max Sy	2299	200:1.4*(DL+C	0.001	-0.002	0	**0**	0	-0.042	-0.050	-0.036
Min Sy	2299	200:1.4*(DL+C	0.001	-0.002	0	**0**	0	-0.042	-0.050	-0.036
Max Sxy	2299	200:1.4*(DL+C	0.001	-0.002	0	0	**0**	-0.042	-0.050	-0.036
Min Sxy	2299	200:1.4*(DL+C	0.001	-0.002	0	0	**0**	-0.042	-0.050	-0.036
Max Mx	2243	221:1.2*(DL+O	0.409	-0.162	0	0	0	**7.438**	4.697	-0.536
Min Mx	2253	231:1.2*(DL+O	-0.613	-0.211	0	0	0	**-11.087**	-8.172	-0.304
Max My	2243	221:1.2*(DL+O	0.409	-0.162	0	0	0	7.438	**4.697**	-0.536
Min My	2243	231:1.2*(DL+O	-0.611	0.216	0	0	0	-11.080	**-8.173**	0.279
Max Mxy	2236	231:1.2*(DL+O	-0.005	-0.178	0	0	0	2.221	-0.767	**2.506**
Min Mxy	2266	231:1.2*(DL+O	-0.001	0.176	0	0	0	2.195	-0.835	**-2.486**

Plate Center Stress Summary

(FOR FOUNDATION MKD. F14_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	2242	221:1.2*(DL+O	**0.178**	-0.038	0	0	0	2.417	3.829	0.247
Min Qx	2252	231:1.2*(DL+O	**-0.286**	-0.057	0	0	0	-3.886	-6.165	0.454
Max Qy	2223	231:1.2*(DL+O	0.001	**0.163**	0	0	0	-4.441	-1.024	0.168
Min Qy	2273	231:1.2*(DL+O	-0.001	**-0.165**	0	0	0	-4.463	-1.059	-0.166
Max Sx	2299	200:1.4*(DL+C	0.001	-0.002	**0**	0	0	-0.042	-0.050	-0.036
Min Sx	2299	200:1.4*(DL+C	0.001	-0.002	**0**	0	0	-0.042	-0.050	-0.036
Max Sy	2299	200:1.4*(DL+C	0.001	-0.002	0	**0**	0	-0.042	-0.050	-0.036
Min Sy	2299	200:1.4*(DL+C	0.001	-0.002	0	**0**	0	-0.042	-0.050	-0.036
Max Sxy	2299	200:1.4*(DL+C	0.001	-0.002	0	0	**0**	-0.042	-0.050	-0.036
Min Sxy	2299	200:1.4*(DL+C	0.001	-0.002	0	0	**0**	-0.042	-0.050	-0.036
Max Mx	2242	221:1.2*(DL+O	0.178	-0.038	0	0	0	**2.417**	3.829	0.247
Min Mx	2274	231:1.2*(DL+O	0.050	-0.154	0	0	0	**-4.766**	-0.934	-1.729
Max My	2242	221:1.2*(DL+O	0.178	-0.038	0	0	0	2.417	**3.829**	0.247
Min My	2252	231:1.2*(DL+O	-0.286	-0.057	0	0	0	-3.886	**-6.165**	0.454
Max Mxy	2225	231:1.2*(DL+O	0.097	0.052	0	0	0	-1.714	-0.864	**2.321**
Min Mxy	2275	231:1.2*(DL+O	0.097	-0.055	0	0	0	-1.755	-0.906	**-2.323**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.15 DESIGN OF FOUNDATION MKD. F14 : *(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)*

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 1.85 m
Gross Allowable Bearing Capacity = 67 + 1.85 X 1.9 = 70.515 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F14_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1553	100 DL+CT	0	4.555	0	
Min Px	1553	100 DL+CT	0	4.555	0	
Max Py	1608	127 DL+OE	0	10.637	0	< 70.515 T/m2 , O.K.
Min Py	1553	121 DL+OE	0	0	0	
Max Pz	1553	100 DL+CT	0	4.555	0	
Min Pz	1553	100 DL+CT	0	4.555	0	

STRENGTH CALCULATION :


Slab Thickness = 500 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :
(Staad Group : F14_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	7.438	Mton-m	Corresponding Mxy	-0.536	Mton-m	*(Plate No. - 2243 , L/C No. - 221)*
Min. Mx	-11.087	Mton-m	Corresponding Mxy	-0.304	Mton-m	*(Plate No. - 2253 , L/C No. - 231)*
Max. My	4.697	Mton-m	Corresponding Mxy	-0.536	Mton-m	*(Plate No. - 2243 , L/C No. - 221)*
Min. My	-8.173	Mton-m	Corresponding Mxy	0.279	Mton-m	*(Plate No. - 2243 , L/C No. - 231)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 7.438 + 0.536 = 7.974 Mton-m
My1 = My + abs(Mxy) = 4.697 + 0.536 = 5.233 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 7.438 + 0.061 = 7.499 Mton-m
My2 = My+abs(Mxy^2/Mx) = 4.697 + 0.039 = 4.736 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 7.974 Mton-m
Myd = 5.233 Mton-m

ALONG X - DIRECTION :

Mu = 7.974 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 7.974X10^7/(1000X419^2) deff. = 419 mm
= 0.454 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X419/100
= 7.54 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 5.233 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 5.233X10^7/(1000X407^2) deff. = 407 mm
= 0.298 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X419/100
= 7.33 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -11.087 - 0.304 = -11.391 Mton-m
My1 = My - abs(Mxy) = -8.173 - 0.279 = -8.452 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -11.087 - 0.011 = -11.098 Mton-m
My2 = My-abs(Mxy^2/Mx) = -8.173 - 0.007 = -8.166 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -11.391 Mton-m
Myd = -8.452 Mton-m

ALONG X - DIRECTION :

Mu = 11.391 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 11.391X10^7/(1000X417^2) deff. = 417 mm
= 0.655 N/mm^2 < 6.9 N/mm^2
Pt = 0.0018
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X417/100
= 7.51 cm^2

Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 10.05 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0024

ALONG Y - DIRECTION :

Mu = 8.452 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 8.452X10^7/(1000X401^2) deff. = 401 mm
= 0.526 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X401/100
= 7.22 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided	16	mm @	200	C/C	(Provide Ast =	10.05	cm2) at Bottom		
Provided	0	mm @	200	C/C	(Provide Ast =	0	cm2) at Bottom		
					Total Provide Ast =	10.05	cm2) at Bottom		O.K.
					Total Provide Pt =	0.0025			

SHEAR CHECK

(Staad Group : F14_SF)

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.286 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2252 , L/C No. - 231)*

Vu = 14.3 Mton

Provided Pt = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X14.3X10^4X417/11.391/10^7)X1000X417/10^4

= 40.363 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X417/10^4

= 41.173 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X417/10^4

= 71.543 Mton

HENCE, Vc = 40.363 Mton

Φt*Vc = 0.75X40.363 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.272 Mton **> 14.3Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(40.363X10^4+0.66X35^0.5X1000X417)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 125.144 Mton **> Vu= 14.3Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = -0.165 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 2273 , L/C No. - 231)*

Vu = 8.25 Mton

Pt provided = 0.0025

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0025X8.25X10^4X401/8.452/10^7)X1000X401/10^4

= 38.625 Mton

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0025)X1000X401/10^4

= 39.662 Mton

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X401/10^4

= 68.798 Mton

HENCE, Vc = 38.625 Mton

Φt*Vc = 0.75X38.625 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 28.969 Mton **> 8.25Mton , Hence O.K.**

Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(38.625X10^4+0.66X35^0.5X1000X401)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*

= 120.328 Mton **> Vu= 8.25Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 3.3 m
Width of Foundation = 3.3 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 1
Area (A) = 10.89 m^2
Perimeter (bo) = 1 X 2 X ((0.6 + 0.417) + (0.6 + 0.401)) = 4.036 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 10.637 Mton/m^2
Vu = ((10.89 - (0.6X0.6X1))X10.637
= 112.008 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X4.036X10^3X417/10^4
= 328.575 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X4.036X10^3X417/10^4
= 507.798 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X417/(4.036X10^3))X1X35^0.5X(4.036X10^3)X417/10^4
= 421.44 Mton
HENCE, Vc = 328.575 Mton
Φt*Vn = Φt*Vc = 0.75X328.575 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
246.431 Mton **> 112.008Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F15_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1807	212:1.4*(DL+O	**0.123**	0.009	0	0	0	-0.392	-1.079	0.119
Min Qx	1804	212:1.4*(DL+O	**-0.124**	0.009	0	0	0	-0.393	-1.080	-0.119
Max Qy	1801	212:1.4*(DL+O	-0.030	**0.114**	0	0	0	-2.046	-0.216	-0.181
Min Qy	1813	206:1.4*(DL+O	-0.022	**-0.090**	0	0	0	-1.840	-0.148	0.181
Max Sx	1815	200:1.4*(DL+C	0.025	-0.015	**0**	0	0	-0.220	-0.098	-0.093
Min Sx	1815	200:1.4*(DL+C	0.025	-0.015	**0**	0	0	-0.220	-0.098	-0.093
Max Sy	1815	200:1.4*(DL+C	0.025	-0.015	0	**0**	0	-0.220	-0.098	-0.093
Min Sy	1815	200:1.4*(DL+C	0.025	-0.015	0	**0**	0	-0.220	-0.098	-0.093
Max Sxy	1815	200:1.4*(DL+C	0.025	-0.015	0	0	**0**	-0.220	-0.098	-0.093
Min Sxy	1815	200:1.4*(DL+C	0.025	-0.015	0	0	**0**	-0.220	-0.098	-0.093
Max Mx	1807	241:0.9*(DL+O	0.014	0.000	0	0	0	**-0.029**	-0.211	0.042
Min Mx	1801	212:1.4*(DL+O	-0.030	0.114	0	0	0	**-2.046**	-0.216	-0.181
Max My	1814	250:0.9*(DL+O	-0.001	-0.005	0	0	0	-0.432	**0.022**	-0.065
Min My	1808	212:1.4*(DL+O	-0.120	-0.010	0	0	0	-0.379	**-1.122**	0.213
Max Mxy	1812	212:1.4*(DL+O	-0.049	-0.029	0	0	0	-0.509	-0.220	**0.248**
Min Mxy	1815	212:1.4*(DL+O	0.049	-0.029	0	0	0	-0.508	-0.220	**-0.248**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.16 DESIGN OF FOUNDATION MKD. F15 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F15_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	1052	100 DL+CT	0	10.908	0	
Min Px	1052	100 DL+CT	0	10.908	0	
Max Py	1054	112 DL+OE	0	20.793	0	< 71.75 T/m2 , O.K.
Min Py	1056	154 0.6*(DL	0	3.087	0	
Max Pz	1052	100 DL+CT	0	10.908	0	
Min Pz	1052	100 DL+CT	0	10.908	0	

STRENGTH CALCULATION :

Slab Thickness = 300 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F15_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	-0.029	Mton-m	Corresponding Mxy	0.042	Mton-m	*(Plate No. - 1807 , L/C No. - 241)*
Min. Mx	-2.046	Mton-m	Corresponding Mxy	-0.181	Mton-m	*(Plate No. - 1801 , L/C No. - 212)*
Max. My	0.022	Mton-m	Corresponding Mxy	-0.065	Mton-m	*(Plate No. - 1814 , L/C No. - 250)*
Min. My	-1.122	Mton-m	Corresponding Mxy	0.213	Mton-m	*(Plate No. - 1808 , L/C No. - 212)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = -0.029 + 0.042 = 0.013 Mton-m
My1 = My + abs(Mxy) = 0.022 + 0.065 = 0.087 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = -0.029 + 0.08 = 0.051 Mton-m
My2 = My+abs(Mxy^2/Mx) = 0.022 + 0.146 = 0.168 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 0.013 Mton-m
Myd = 0.087 Mton-m

ALONG X - DIRECTION :

Mu = 0.013 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.013X10^7/(1000X220^2) deff. = 220 mm
= 0.003 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X220/100
= 1.98 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 3.93 cm2 at Top **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 0.087 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.087X10^7/(1000X210^2) deff. = 210 mm
= 0.018 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000
Min. Pt = 0.0009 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0009X1000X220/100
= 1.89 cm^2

Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Top
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 3.93 cm2 at Top **O.K.**
Total Provide Pt = 0.0019

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -2.046 - 0.181 = -2.227 Mton-m
My1 = My - abs(Mxy) = -1.122 - 0.213 = -1.335 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -2.046 - 0.029 = -2.075 Mton-m
My2 = My-abs(Mxy^2/Mx) = -1.122 - 0.022 = -1.1 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -2.227 Mton-m
Myd = -1.335 Mton-m

ALONG X - DIRECTION :

Mu = 2.227 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 2.227X10^7/(1000X219^2) deff. = 219 mm
= 0.464 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X219/100
= 3.94 cm^2

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 5.65 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0026

ALONG Y - DIRECTION :

Mu = 1.335 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.335X10^7/(1000X207^2) deff. = 207 mm
= 0.312 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X207/100
= 3.73 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Bottom
Provided **0** mm @ **200** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 5.65 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0027

SHEAR CHECK
(Staad Group : F15_BP)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.124 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1804 , L/C No. - 212)*
Vu = 3.72 Mton

Provided Pt = 0.0026
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0026X3.72X10^4X219/2.227/10^7)X1000X219/10^4
= 21.084 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0026)X1000X219/10^4
= 21.698 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X219/10^4
= 37.573 Mton
HENCE, Vc = 21.084 Mton
Φt*Vc = 0.75X21.084 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 15.813 Mton **> 3.72Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(21.084X10^4+0.66X35^0.5X1000X219)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 65.715 Mton **> Vu= 3.72Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.114 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1801 , L/C No. - 212)*
Vu = 3.42 Mton

Pt provided = 0.0027
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0027X3.42X10^4X207/1.335/10^7)X1000X207/10^4
= 20.098 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0027)X1000X207/10^4
= 20.544 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X207/10^4
= 35.514 Mton
HENCE, Vc = 20.098 Mton
Φt*Vc = 0.75X20.098 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 15.074 Mton **> 3.42Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(20.098X10^4+0.66X35^0.5X1000X207)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 62.126 Mton **> Vu= 3.42Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 1.2 m
Width of Foundation = 1 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 1
Area (A) = 1.2 m^2
Perimeter (bo) = 1 X 2 X ((0.6 + 0.219) + (0.6 + 0.207)) = 3.252 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 20.793 Mton/m^2
Vu = ((1.2 - (0.6X0.6X1))X20.793
= 17.466 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X3.252X10^3X219/10^4
= 139.041 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X3.252X10^3X219/10^4
= 214.881 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X219/(3.252X10^3))X1X35^0.5X(3.252X10^3)X219/10^4
= 140.593 Mton
HENCE, Vc = 139.041 Mton
Φt*Vn = Φt*Vc = 0.75X139.041 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
104.281 Mton **> 17.466Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Plate Center Stress Summary

(FOR FOUNDATION MKD. F16_BM)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1669	236:1.2*(DL+O	**0.250**	0.197	0	0	0	-1.088	-16.812	-0.479
Min Qx	1666	236:1.2*(DL+O	**-0.246**	0.177	0	0	0	-1.061	-16.718	0.363
Max Qy	1673	226:1.2*(DL+O	-0.005	**0.570**	0	0	0	0.335	0.146	-0.237
Min Qy	1677	236:1.2*(DL+O	0.018	**-0.609**	0	0	0	0.283	-7.381	0.194
Max Sx	1751	200:1.4*(DL+C	0.023	-0.003	**0**	0	0	-0.201	-0.080	-0.089
Min Sx	1751	200:1.4*(DL+C	0.023	-0.003	**0**	0	0	-0.201	-0.080	-0.089
Max Sy	1751	200:1.4*(DL+C	0.023	-0.003	0	**0**	0	-0.201	-0.080	-0.089
Min Sy	1751	200:1.4*(DL+C	0.023	-0.003	0	**0**	0	-0.201	-0.080	-0.089
Max Sxy	1751	200:1.4*(DL+C	0.023	-0.003	0	0	**0**	-0.201	-0.080	-0.089
Min Sxy	1751	200:1.4*(DL+C	0.023	-0.003	0	0	**0**	-0.201	-0.080	-0.089
Max Mx	1666	226:1.2*(DL+O	0.191	0.094	0	0	0	**0.687**	9.716	-0.970
Min Mx	1519	200:1.4*(DL+C	-0.008	0.077	0	0	0	**-3.281**	-0.109	-0.457
Max My	1541	236:1.2*(DL+O	-0.003	0.013	0	0	0	0.008	**17.250**	0.026
Min My	1668	236:1.2*(DL+O	0.129	0.526	0	0	0	-2.435	**-19.150**	-0.251
Max Mxy	1521	226:1.2*(DL+O	-0.240	0.127	0	0	0	0.295	-0.979	**1.214**
Min Mxy	1518	226:1.2*(DL+O	0.241	0.126	0	0	0	0.299	-0.975	**-1.217**

Software licensed to STAAD.Pro Advanced CONNECTED User: Suman Podder	Job No **O19045**	Sheet No **1** Rev
	Part BALL MILL PLATFORM FOUNDATION	
Job Title MMGP	Ref	
	By SUE Date 06-08-2020 Chd BDA	
Client MAADEN	File Ball Mill Platform Founda	Date/Time 31-Jul-2020 12:52

Plate Center Stress Summary

(FOR FOUNDATION MKD. F16_SF)

			Shear		Membrane			Bending		
	Plate	L/C	Qx (N/mm^2)	Qy (N/mm^2)	Sx (N/mm^2)	Sy (N/mm^2)	Sxy (N/mm^2)	Mx (MTon-m/m)	My (MTon-m/m)	Mxy (MTon-m/m)
Max Qx	1664	236:1.2*(DL+O	**0.035**	0.342	0	0	0	-1.171	-12.797	-0.008
Min Qx	1663	236:1.2*(DL+O	**-0.035**	0.340	0	0	0	-1.159	-12.794	-0.168
Max Qy	1664	236:1.2*(DL+O	0.035	**0.342**	0	0	0	-1.171	-12.797	-0.008
Min Qy	1536	206:1.4*(DL+O	0.024	**-0.298**	0	0	0	-0.905	-4.768	-0.039
Max Sx	1711	200:1.4*(DL+C	0.000	0.004	**0**	0	0	-0.080	2.334	0.107
Min Sx	1711	200:1.4*(DL+C	0.000	0.004	**0**	0	0	-0.080	2.334	0.107
Max Sy	1711	200:1.4*(DL+C	0.000	0.004	0	**0**	0	-0.080	2.334	0.107
Min Sy	1711	200:1.4*(DL+C	0.000	0.004	0	**0**	0	-0.080	2.334	0.107
Max Sxy	1711	200:1.4*(DL+C	0.000	0.004	0	0	**0**	-0.080	2.334	0.107
Min Sxy	1711	200:1.4*(DL+C	0.000	0.004	0	0	**0**	-0.080	2.334	0.107
Max Mx	1663	226:1.2*(DL+O	0.021	-0.066	0	0	0	**0.450**	10.522	-0.037
Min Mx	1664	236:1.2*(DL+O	0.035	0.342	0	0	0	**-1.171**	-12.797	-0.008
Max My	1541	236:1.2*(DL+O	-0.003	0.013	0	0	0	0.008	**17.250**	0.026
Min My	1535	226:1.2*(DL+O	-0.027	-0.288	0	0	0	-0.931	**-12.942**	0.059
Max Mxy	1535	221:1.2*(DL+O	-0.001	-0.111	0	0	0	-0.288	7.408	**0.385**
Min Mxy	1660	233:1.2*(DL+O	0.006	0.146	0	0	0	-0.168	-0.734	**-0.393**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

8.17 DESIGN OF FOUNDATION MKD. F16 :

(STAAD File : Ball Mill Platform Foundation_Plate Mat_R0)

BASE PRESSURE CHECK :

Net Safe Bearing Capacity of Soil = 67 Mton/m^2 *(From BH-2)*
Depth Of Foundation = 2.5 m
Gross Allowable Bearing Capacity = 67 + 2.5 X 1.9 = 71.75 Mton/m^2

STAAD OUTPUT FROM BASE PRESSURE SUMMARY
(Staad Group : F16_BP)

	NODE	L/C	FX Mton/m^2	FY Mton/m^2	FZ Mton/m^2	
Max Px	686	100 DL+CT	0	28.408	0	
Min Px	686	100 DL+CT	0	28.408	0	
Max Py	690	100 DL+CT	0	29.308	0	< 71.75 T/m2 , O.K.
Min Py	984	156 0.6*(DL	0	1.115	0	
Max Pz	686	100 DL+CT	0	28.408	0	
Min Pz	686	100 DL+CT	0	28.408	0	

STRENGTH CALCULATION :

Slab Thickness = 500 mm
Width = 1000 mm
Clear Cover = 75 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75


STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : F16_BM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	0.687	Mton-m	Corresponding Mxy	-0.97	Mton-m	*(Plate No. - 1666 , L/C No. - 226)*
Min. Mx	-3.281	Mton-m	Corresponding Mxy	-0.457	Mton-m	*(Plate No. - 1519 , L/C No. - 200)*
Max. My	17.25	Mton-m	Corresponding Mxy	0.026	Mton-m	*(Plate No. - 1541 , L/C No. - 236)*
Min. My	-19.15	Mton-m	Corresponding Mxy	-0.251	Mton-m	*(Plate No. - 1668 , L/C No. - 236)*

FOR TOP REINFORCEMRNT :

Mx1 = Mx + abs(Mxy) = 0.687 + 0.97 = 1.657 Mton-m
My1 = My + abs(Mxy) = 17.25 + 0.026 = 17.276 Mton-m
Mx2 = Mx+abs(Mxy^2/My) = 0.687 + 0.055 = 0.742 Mton-m
My2 = My+abs(Mxy^2/Mx) = 17.25 + 0.001 = 17.251 Mton-m



DESIGN MOMENT CALCULATION FOR TOP REINFORCEMENT :

Mxd = 1.657 Mton-m
Myd = 17.276 Mton-m

ALONG X - DIRECTION :

Mu = 1.657 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 1.657X10^7/(1000X419^2) deff. = 419 mm
= 0.094 N/mm^2 < 6.9 N/mm^2
Pt = 0.0002
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X419/100
= 7.54 cm^2

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 7.54 cm2 at Top **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 17.276 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 17.276X10^7/(1000X405^2) deff. = 405 mm
= 0.984 N/mm^2 < 6.9 N/mm^2
Pt = 0.0027
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0027X1000X419/100
= 10.94 cm^2

Provided **16** mm @ **150** C/C (Provide Ast = 13.4 cm2) at Top
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Top
Total Provide Ast = 13.4 cm2 at Top **O.K.**
Total Provide Pt = 0.0033

FOR BOTTOM REINFORCEMRNT :

Mx1 = Mx - abs(Mxy) = -3.281 - 0.457 = -3.738 Mton-m
My1 = My - abs(Mxy) = -19.15 - 0.251 = -19.401 Mton-m
Mx2 = Mx-abs(Mxy^2/My) = -3.281 - 0.011 = -3.292 Mton-m
My2 = My-abs(Mxy^2/Mx) = -19.15 - 0.019 = -19.131 Mton-m

DESIGN MOMENT CALCULATION FOR BOTTOM REINFORCEMENT :

Mxd = -3.738 Mton-m
Myd = -19.401 Mton-m

ALONG X - DIRECTION :

Mu = 3.738 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.738X10^7/(1000X419^2) deff. = 419 mm
= 0.213 N/mm^2 < 6.9 N/mm^2
Pt = 0.0006
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0018X1000X419/100
= 7.54 cm^2

Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 7.54 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 19.401 Mton-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 19.401X10^7/(1000X405^2) deff. = 405 mm
= 1.183 N/mm^2 < 6.9 N/mm^2
Pt = 0.0032
Min. Pt = 0.0018 *[SBC:304-CR-18, Table 7.6.1.1, Page-45]*
Reqd. Ast = 0.0032X1000X405/100
= 12.96 cm^2

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

Provided **16** mm @ **150** C/C (Provide Ast = 13.4 cm2) at Bottom
Provided **0** mm @ **150** C/C (Provide Ast = 0 cm2) at Bottom
Total Provide Ast = 13.4 cm2) at Bottom **O.K.**
Total Provide Pt = 0.0033

SHEAR CHECK
(Staad Group : F16_SF)
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.035 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1663 , L/C No. - 236)*
Vu = 1.75 Mton

Provided Pt = 0.0018
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0018X1.75X10^4X419/3.738/10^7)X1000X419/10^4
= 39.913 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0018)X1000X419/10^4
= 40.944 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X419/10^4
= 71.886 Mton
HENCE, Vc = 39.913 Mton
Φt*Vc = 0.75X39.913 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 29.935 Mton **> 1.75Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(39.913X10^4+0.66X35^0.5X1000X419)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 125.696 Mton **> Vu= 1.75Mton , CROSS SECTION O.K.**

ALONG Y - DIRECTION :

SQy = 0.342 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 1664 , L/C No. - 236)*
Vu = 17.1 Mton

Pt provided = 0.0033
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0033X17.1X10^4X405/19.401/10^7)X1000X405/10^4
= 39.147 Mton
[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0033)X1000X405/10^4
= 40.608 Mton
[c] = 0.29*λ*fc'^0.5*b*d.eff
= 0.29X1X5.92X1000X405/10^4
= 69.484 Mton
HENCE, Vc = 39.147 Mton
Φt*Vc = 0.75X39.147 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 29.36 Mton **> 17.1Mton , Hence O.K.**
Φt*(Vc+0.66*fc'^0.5*b*d.eff) = 0.75X(39.147X10^4+0.66X35^0.5X1000X405)/10^4 *[SBC:304-CR-18, CL. No. 22.5.1.2, Page-164]*
= 121.539 Mton **> Vu= 17.1Mton , CROSS SECTION O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	MANSOURAH - MASSARAH GOLD PROJECT	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

TWO-WAY SHEAR CHECK

Length of Foundation = 9.535 m
Width of Foundation = 1.1 m
Length of Column = 0.6 m
Width of Column = 0.6 m
No. of Column = 3
Area (A) = 10.489 m^2
Perimeter (bo) = 3 X 2 X ((0.6 + 0.419) + (0.6 + 0.405)) = 12.144 m
β = 1
αs = 30 (Edge Column) *[SBC:304-CR-18, CL. No. 22.6.5.3, Page-168]*
Pmax = 29.308 Mton/m^2
Vu = ((10.489 - (0.6X0.6X3))X29.308
= 275.759 Mton
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.6.5.2, Page-175]*
[a] = 0.33*λ*fc'^0.5*bo*d.eff λ = 1
= 0.33X1X35^0.5X12.144X10^3X419/10^4
= 993.399 Mton
[b] = 0.17*(1+2/β)*λ*fc'^0.5*bo*d.eff
= 0.17X(1+2/1)X1X35^0.5X12.144X10^3X419/10^4
= 1535.253 Mton
[c] = 0.083*(2+αs*d.eff/b_o)*λ*fc'^0.5*bo*d.eff
= 0.083X(2+30X419/(12.144X10^3))X1X35^0.5X(12.144X10^3)X419/10^4
= 758.329 Mton
HENCE, Vc = 758.329 Mton
Φt*Vn = Φt*Vc = 0.75X758.329 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
568.747 Mton **> 275.759Mton , Hence O.K.**

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

9.0 DESIGN OF COLUMN

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Beam Force Detail Summary (FOR COLUMN MKD. C1)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	33	231:1.2*(DL+O	0.000	**47.174**	-0.203	0.587	0.000	-1.554	-0.537
Min Fx	34	245:0.9*(DL+O	2.650	**-15.040**	-0.217	-0.354	-0.000	-0.000	-0.000
Max Fy	5	205:1.4*(DL+O	0.000	21.809	**9.468**	0.018	0.000	-0.058	30.298
Min Fy	5	211:1.4*(DL+O	0.000	15.120	**-6.033**	0.012	0.000	-0.040	-19.305
Max Fz	9	236:1.2*(DL+O	0.000	22.373	-3.115	**4.628**	0.000	-14.811	-9.968
Min Fz	25	226:1.2*(DL+O	0.000	28.828	-1.696	**-4.698**	0.000	11.276	-4.069
Max Mx	5	200:1.4*(DL+C	0.000	10.382	0.526	0.008	**0.000**	-0.027	1.684
Min Mx	5	200:1.4*(DL+C	0.000	10.382	0.526	0.008	**0.000**	-0.027	1.684
Max My	25	226:1.2*(DL+O	0.000	28.828	-1.696	-4.698	0.000	**11.276**	-4.069
Min My	9	236:1.2*(DL+O	0.000	22.373	-3.115	4.628	0.000	**-14.811**	-9.968
Max Mz	5	205:1.4*(DL+O	0.000	21.809	9.468	0.018	0.000	-0.058	**30.298**
Min Mz	5	211:1.4*(DL+O	0.000	15.120	-6.033	0.012	0.000	-0.040	**-19.305**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

9.1 DESIGN OF COLUMN MKD. C1

Design Data :

Depth Parallel to X-X axis, h =	600	mm
Depth Parallel to Z-Z axis, b =	600	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.8	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

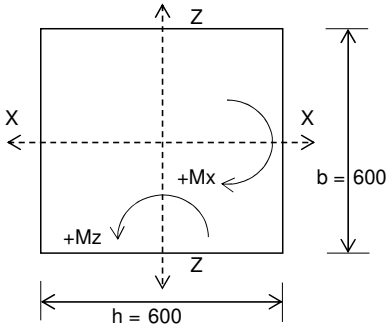

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.1	M, Hence	k*lux/b =	3.5 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.1	M, Hence	k*luz/h =	3.5 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	12	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	16	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	37.70	cm^2		
Total Provide Pt =	0.01	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 975 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^\alpha + (Mnz/Mnz1)^\alpha$
33 - 231	47.174	-1.554	-0.537	72.575	2.391	0.826	0.058	0.065	49.14	0.065	49.14	0.01
34 - 245	-15.04	0	0	-23.138	0	0	-0.018	0.065	49.14	0.065	49.14	0
5 - 205	21.809	-0.058	30.298	33.552	0.089	46.612	0.027	0.065	49.14	0.065	49.14	0.92
5 - 211	15.12	-0.04	-19.305	23.262	0.062	29.7	0.018	0.065	49.14	0.065	49.14	0.44
9 - 236	22.373	-14.811	-9.968	34.42	22.786	15.335	0.027	0.065	49.14	0.065	49.14	0.44
25 - 226	28.828	11.276	-4.069	44.351	17.348	6.26	0.035	0.065	49.14	0.065	49.14	0.22
5 - 200	10.382	-0.027	1.684	15.972	0.042	2.591	0.013	0.065	49.14	0.065	49.14	0.01
5 - 200	10.382	-0.027	1.684	15.972	0.042	2.591	0.013	0.065	49.14	0.065	49.14	0.01
25 - 226	28.828	11.276	-4.069	44.351	17.348	6.26	0.035	0.065	49.14	0.065	49.14	0.22
9 - 236	22.373	-14.811	-9.968	34.42	22.786	15.335	0.027	0.065	49.14	0.065	49.14	0.44
5 - 205	21.809	-0.058	30.298	33.552	0.089	46.612	0.027	0.065	49.14	0.065	49.14	0.92
5 - 211	15.12	-0.04	-19.305	23.262	0.062	29.7	0.018	0.065	49.14	0.065	49.14	0.44
												SAFE

Stirrups

Provided **10** Dia. Stirrups @ **250** mm C/C **O.K.** *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Beam Force Detail Summary

(FOR COLUMN MKD. C2)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	1	208:1.4*(DL+O	0.000	**25.230**	0.000	2.969	0.000	-9.502	0.000
Min Fx	15	250:0.9*(DL+O	3.200	**2.105**	-0.000	0.806	-0.000	-0.000	-0.000
Max Fy	1	221:1.2*(DL+O	0.000	14.473	**0.326**	1.368	0.000	-4.377	1.042
Min Fy	1	231:1.2*(DL+O	0.000	14.233	**-0.326**	1.218	0.000	-3.896	-1.042
Max Fz	1	208:1.4*(DL+O	0.000	25.230	0.000	**2.969**	0.000	-9.502	0.000
Min Fz	15	210:1.4*(DL+O	0.000	24.879	0.000	**-2.823**	0.000	9.033	-0.000
Max Mx	1	200:1.4*(DL+C	0.000	12.365	0.000	0.937	**0.000**	-2.997	-0.000
Min Mx	1	200:1.4*(DL+C	0.000	12.365	0.000	0.937	**0.000**	-2.997	-0.000
Max My	15	210:1.4*(DL+O	0.000	24.879	0.000	-2.823	0.000	**9.033**	-0.000
Min My	1	208:1.4*(DL+O	0.000	25.230	0.000	2.969	0.000	**-9.502**	0.000
Max Mz	1	221:1.2*(DL+O	0.000	14.473	0.326	1.368	0.000	-4.377	**1.042**
Min Mz	1	231:1.2*(DL+O	0.000	14.233	-0.326	1.218	0.000	-3.896	**-1.042**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date 08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev. D01

9.2 DESIGN OF COLUMN MKD. C2

Design Data :

Depth Parallel to X-X axis, h =	600	mm
Depth Parallel to Z-Z axis, b =	600	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.8	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

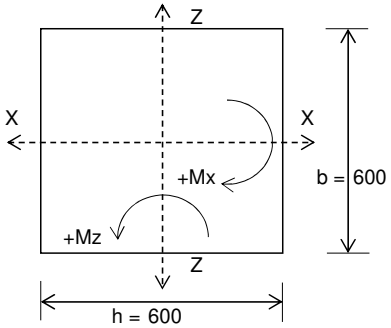

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.15	M, Hence	k*lux/b =	3.583 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.15	M, Hence	k*luz/h =	3.583 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	12	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	16	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	37.70	cm^2		
Total Provide Pt =	0.01	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 975 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^α$ + $(Mnz/Mnz1)^α$
1 - 208	25.23	-9.502	0	38.815	14.618	0	0.031	0.06	45.36	0.06	45.36	0.16
15 - 250	2.105	0	0	3.238	0	0	0.003	0.06	45.36	0.06	45.36	0
1 - 221	14.473	-4.377	1.042	22.266	6.734	1.603	0.018	0.06	45.36	0.06	45.36	0.05
1 - 231	14.233	-3.896	-1.042	21.897	5.994	1.603	0.017	0.06	45.36	0.06	45.36	0.04
1 - 208	25.23	-9.502	0	38.815	14.618	0	0.031	0.06	45.36	0.06	45.36	0.16
15 - 210	24.879	9.033	0	38.275	13.897	0	0.03	0.06	45.36	0.06	45.36	0.15
1 - 200	12.365	-2.997	0	19.023	4.611	0	0.015	0.06	45.36	0.06	45.36	0.03
1 - 200	12.365	-2.997	0	19.023	4.611	0	0.015	0.06	45.36	0.06	45.36	0.03
15 - 210	24.879	9.033	0	38.275	13.897	0	0.03	0.06	45.36	0.06	45.36	0.15
1 - 208	25.23	-9.502	0	38.815	14.618	0	0.031	0.06	45.36	0.06	45.36	0.16
1 - 221	14.473	-4.377	1.042	22.266	6.734	1.603	0.018	0.06	45.36	0.06	45.36	0.05
1 - 231	14.233	-3.896	-1.042	21.897	5.994	1.603	0.017	0.06	45.36	0.06	45.36	0.04
												SAFE

Stirrups

Provided 10 Dia. Stirrups @ 250 mm C/C O.K. *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Beam Force Detail Summary

(FOR COLUMN MKD. C3)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	27	212:1.4*(DL+O	0.000	**54.908**	0.000	-2.266	0.000	5.891	-0.000
Min Fx	18	250:0.9*(DL+O	3.200	**14.380**	-0.000	3.771	-0.000	-0.000	-0.000
Max Fy	18	221:1.2*(DL+O	0.000	26.842	**0.243**	2.370	0.000	-7.583	0.778
Min Fy	18	223:1.2*(DL+O	0.000	30.567	**-0.243**	2.111	0.000	-6.754	-0.778
Max Fz	18	236:1.2*(DL+O	0.000	27.893	0.000	**4.905**	0.000	-15.695	-0.000
Min Fz	27	206:1.4*(DL+O	0.000	53.788	0.000	**-5.141**	0.000	13.367	-0.000
Max Mx	18	200:1.4*(DL+C	0.000	41.912	-0.000	2.822	**0.000**	-9.032	-0.000
Min Mx	18	200:1.4*(DL+C	0.000	41.912	-0.000	2.822	**0.000**	-9.032	-0.000
Max My	27	206:1.4*(DL+O	0.000	53.788	0.000	-5.141	0.000	**13.367**	-0.000
Min My	18	236:1.2*(DL+O	0.000	27.893	0.000	4.905	0.000	**-15.695**	-0.000
Max Mz	18	221:1.2*(DL+O	0.000	26.842	0.243	2.370	0.000	-7.583	**0.778**
Min Mz	18	223:1.2*(DL+O	0.000	30.567	-0.243	2.111	0.000	-6.754	**-0.778**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

9.3 DESIGN OF COLUMN MKD. C3

Design Data :

Depth Parallel to X-X axis, h =	600	mm
Depth Parallel to Z-Z axis, b =	600	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.8	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

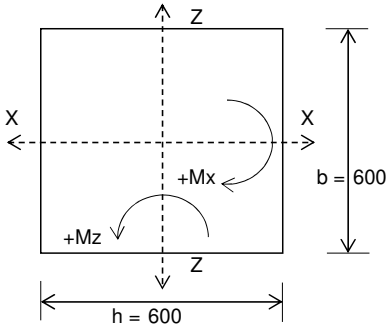

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.15	M, Hence	k*lux/b =	3.583 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.15	M, Hence	k*luz/h =	3.583 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	12	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	16	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	37.70	cm^2		
Total Provide Pt =	0.01	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 975 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^{\alpha}$ + $(Mnz/Mnz1)^{\alpha}$
27 - 212	54.908	5.891	0	84.474	9.063	0	0.067	0.065	49.14	0.065	49.14	0.07
18 - 250	14.38	0	0	22.123	0	0	0.018	0.065	49.14	0.065	49.14	0
18 - 221	26.842	-7.583	0.778	41.295	11.666	1.197	0.033	0.065	49.14	0.065	49.14	0.1
18 - 223	30.567	-6.754	-0.778	47.026	10.391	1.197	0.037	0.065	49.14	0.065	49.14	0.08
18 - 236	27.893	-15.695	0	42.912	24.146	0	0.034	0.065	49.14	0.065	49.14	0.32
27 - 206	53.788	13.367	0	82.751	20.565	0	0.066	0.065	49.14	0.065	49.14	0.25
18 - 200	41.912	-9.032	0	64.48	13.895	0	0.051	0.065	49.14	0.065	49.14	0.13
18 - 200	41.912	-9.032	0	64.48	13.895	0	0.051	0.065	49.14	0.065	49.14	0.13
27 - 206	53.788	13.367	0	82.751	20.565	0	0.066	0.065	49.14	0.065	49.14	0.25
18 - 236	27.893	-15.695	0	42.912	24.146	0	0.034	0.065	49.14	0.065	49.14	0.32
18 - 221	26.842	-7.583	0.778	41.295	11.666	1.197	0.033	0.065	49.14	0.065	49.14	0.1
18 - 223	30.567	-6.754	-0.778	47.026	10.391	1.197	0.037	0.065	49.14	0.065	49.14	0.08
												SAFE

Stirrups

Provided 10 Dia. Stirrups @ 250 mm C/C O.K. *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Beam Force Detail Summary

(FOR COLUMN MKD. C4)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	2	208:1.4*(DL+O	0.000	**35.707**	0.000	4.477	0.000	-14.325	-0.000
Min Fx	2	241:0.9*(DL+O	3.200	**6.352**	-0.242	0.343	-0.000	-0.000	-0.000
Max Fy	2	221:1.2*(DL+O	0.000	18.748	**0.326**	2.189	0.000	-7.005	1.042
Min Fy	2	231:1.2*(DL+O	0.000	18.024	**-0.326**	1.618	0.000	-5.177	-1.042
Max Fz	2	208:1.4*(DL+O	0.000	35.707	0.000	**4.477**	0.000	-14.325	-0.000
Min Fz	14	226:1.2*(DL+O	0.000	17.931	0.000	**-2.929**	0.000	9.371	-0.000
Max Mx	2	200:1.4*(DL+C	0.000	14.315	0.000	1.365	**0.000**	-4.368	-0.000
Min Mx	2	200:1.4*(DL+C	0.000	14.315	0.000	1.365	**0.000**	-4.368	-0.000
Max My	14	226:1.2*(DL+O	0.000	17.931	0.000	-2.929	0.000	**9.371**	-0.000
Min My	2	208:1.4*(DL+O	0.000	35.707	0.000	4.477	0.000	**-14.325**	-0.000
Max Mz	2	221:1.2*(DL+O	0.000	18.748	0.326	2.189	0.000	-7.005	**1.042**
Min Mz	2	231:1.2*(DL+O	0.000	18.024	-0.326	1.618	0.000	-5.177	**-1.042**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page	OF
900707_GAU01_ZG01_CED01_32208_ OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

9.4 DESIGN OF COLUMN MKD. C4

Design Data :

Depth Parallel to X-X axis, h =	500	mm
Depth Parallel to Z-Z axis, b =	650	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.7	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

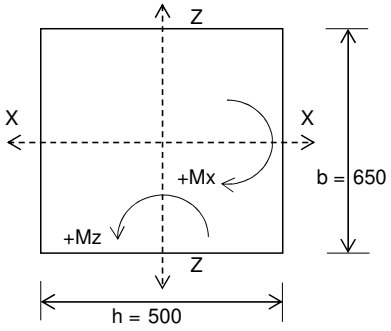

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.15	M, Hence	k*lux/b =	4.3 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.15	M, Hence	k*luz/h =	3.308 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	12	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	16	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	37.70	cm^2		
Total Provide Pt =	0.012	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 892 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^\alpha + (Mnz/Mnz1)^\alpha$
2 - 208	35.707	-14.325	0	54.934	22.038	0	0.048	0.06	44.363	0.06	34.125	0.32
2 - 241	6.352	0	0	9.772	0	0	0.009	0.06	44.363	0.06	34.125	0
2 - 221	18.748	-7.005	1.042	28.843	10.777	1.603	0.025	0.06	44.363	0.06	34.125	0.11
2 - 231	18.024	-5.177	-1.042	27.729	7.965	1.603	0.024	0.06	44.363	0.06	34.125	0.07
2 - 208	35.707	-14.325	0	54.934	22.038	0	0.048	0.06	44.363	0.06	34.125	0.32
14 - 226	17.931	9.371	0	27.586	14.417	0	0.024	0.06	44.363	0.06	34.125	0.16
2 - 200	14.315	-4.368	0	22.023	6.72	0	0.019	0.06	44.363	0.06	34.125	0.05
2 - 200	14.315	-4.368	0	22.023	6.72	0	0.019	0.06	44.363	0.06	34.125	0.05
14 - 226	17.931	9.371	0	27.586	14.417	0	0.024	0.06	44.363	0.06	34.125	0.16
2 - 208	35.707	-14.325	0	54.934	22.038	0	0.048	0.06	44.363	0.06	34.125	0.32
2 - 221	18.748	-7.005	1.042	28.843	10.777	1.603	0.025	0.06	44.363	0.06	34.125	0.11
2 - 231	18.024	-5.177	-1.042	27.729	7.965	1.603	0.024	0.06	44.363	0.06	34.125	0.07
												SAFE

Stirrups

Provided 10 Dia. Stirrups @ 250 mm C/C O.K. *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Beam Force Detail Summary (FOR COLUMN MKD. C6)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	30	231:1.2*(DL+O	0.000	**40.497**	-16.004	-0.113	0.000	0.289	-40.811
Min Fx	31	245:0.9*(DL+O	2.600	**-20.820**	-12.091	-0.143	-0.000	-0.000	-0.000
Max Fy	31	221:1.2*(DL+O	0.000	39.897	**15.259**	-0.181	0.000	0.470	39.674
Min Fy	30	231:1.2*(DL+O	0.000	40.497	**-16.004**	-0.113	0.000	0.289	-40.811
Max Fz	21	236:1.2*(DL+O	0.000	25.832	-1.705	**4.810**	0.000	-11.544	-4.092
Min Fz	12	226:1.2*(DL+O	0.000	17.582	-0.172	**-5.276**	0.000	12.662	-0.413
Max Mx	3	200:1.4*(DL+C	0.000	8.849	-0.000	-0.048	**0.000**	0.152	0.000
Min Mx	3	200:1.4*(DL+C	0.000	8.849	-0.000	-0.048	**0.000**	0.152	0.000
Max My	24	226:1.2*(DL+O	0.000	28.939	0.140	-3.976	0.000	**12.722**	0.448
Min My	20	236:1.2*(DL+O	0.000	25.181	-0.024	3.987	0.000	**-12.759**	-0.076
Max Mz	31	221:1.2*(DL+O	0.000	39.897	15.259	-0.181	0.000	0.470	**39.674**
Min Mz	30	231:1.2*(DL+O	0.000	40.497	-16.004	-0.113	0.000	0.289	**-40.811**

MA'ADEN معادن Saudi Arabian Mining Company شركة التعدين العربية السعودية		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page	OF
900707_GAU01_ZG01_CED01_32208_OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

9.5 DESIGN OF COLUMN MKD. C6

Design Data :

Depth Parallel to X-X axis, h =	600	mm
Depth Parallel to Z-Z axis, b =	600	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.8	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

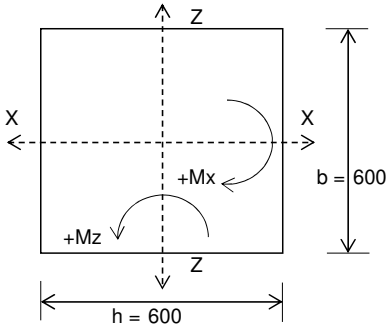

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.15	M, Hence	k*lux/b =	3.583 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.15	M, Hence	k*luz/h =	3.583 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	16	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	20	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	50.27	cm^2		
Total Provide Pt =	0.014	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 1014 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^{\alpha}$ + $(Mnz/Mnz1)^{\alpha}$
30 - 231	40.497	0.289	-33	62.303	0.445	50.769	0.049	0.075	56.7	0.075	56.7	0.84
31 - 245	-20.82	0	0	-32.031	0	0	-0.025	0.075	56.7	0.075	56.7	0
31 - 221	39.897	0.47	33	61.38	0.723	50.769	0.049	0.075	56.7	0.075	56.7	0.84
30 - 231	40.497	0.289	-33	62.303	0.445	50.769	0.049	0.075	56.7	0.075	56.7	0.84
21 - 236	25.832	-11.544	-4.092	39.742	17.76	6.295	0.032	0.075	56.7	0.075	56.7	0.18
12 - 226	17.582	12.662	-0.413	27.049	19.48	0.635	0.021	0.075	56.7	0.075	56.7	0.18
3 - 200	8.849	0.152	0	13.614	0.234	0	0.011	0.075	56.7	0.075	56.7	0
3 - 200	8.849	0.152	0	13.614	0.234	0	0.011	0.075	56.7	0.075	56.7	0
24 - 226	28.939	12.722	0.448	44.522	19.572	0.689	0.035	0.075	56.7	0.075	56.7	0.18
20 - 236	25.181	-12.759	-0.076	38.74	19.629	0.117	0.031	0.075	56.7	0.075	56.7	0.18
31 - 221	39.897	0.47	33	61.38	0.723	50.769	0.049	0.075	56.7	0.075	56.7	0.84
30 - 231	40.497	0.289	-33	62.303	0.445	50.769	0.049	0.075	56.7	0.075	56.7	0.84
												SAFE

Stirrups

Provided 10 Dia. Stirrups @ 250 mm C/C O.K. *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Software licensed to LNT ECC DIV CONNECTED User: Suman Podder	Job No **O19045**	Sheet No **1** Rev
	Part BALL MILL PLATFORM FOUNDATION	
Job Title MMGP	Ref	
	By SUE Date 06-08-2020 Chd BDA	
Client MAADEN	File Ball Mill Platform Founda	Date/Time 31-Jul-2020 12:52

Beam Force Detail Summary

(FOR COLUMN MKD. C7)

Sign convention as diagrams:- positive above line, negative below line except Fx where positive is compression. Distance d is given from beam end A.


				Axial	Shear		Torsion	Bending	
	Beam	L/C	d (m)	Fx (Mton)	Fy (Mton)	Fz (Mton)	Mx (MTon-m)	My (MTon-m)	Mz (MTon-m)
Max Fx	19	200:1.4*(DL+C	0.000	**50.988**	0.267	-0.115	0.000	0.803	0.856
Min Fx	19	241:0.9*(DL+O	3.200	**11.618**	-0.182	-0.378	-0.000	1.538	0.000
Max Fy	19	221:1.2*(DL+O	0.000	25.230	**0.456**	-0.312	0.000	2.440	1.460
Min Fy	16	245:0.9*(DL+O	0.000	14.709	**-0.254**	-1.349	0.000	9.558	-0.814
Max Fz	19	236:1.2*(DL+O	0.000	28.508	0.171	**4.707**	0.000	-34.121	0.547
Min Fz	19	226:1.2*(DL+O	0.000	19.444	0.143	**-4.482**	0.000	33.179	0.457
Max Mx	16	200:1.4*(DL+C	0.000	50.920	0.136	-0.790	**0.000**	3.729	0.435
Min Mx	16	200:1.4*(DL+C	0.000	50.920	0.136	-0.790	**0.000**	3.729	0.435
Max My	19	226:1.2*(DL+O	0.000	19.444	0.143	-4.482	0.000	**33.179**	0.457
Min My	19	236:1.2*(DL+O	0.000	28.508	0.171	4.707	0.000	**-34.121**	0.547
Max Mz	19	221:1.2*(DL+O	0.000	25.230	0.456	-0.312	0.000	2.440	**1.460**
Min Mz	16	245:0.9*(DL+O	0.000	14.709	-0.254	-1.349	0.000	9.558	**-0.814**

MA'ADEN Saudi Arabian Mining Company		Outotec / LARSEN & TOUBRO	
MD-216-3220-EG-CV-CAL-1161	Mansourah Massarah Gold Project	Page	OF
900707_GAU01_ZG01_CED01_32208_OU100682201_R3	CALCULATION GRINDING AND CLASSIFICATION-BALL MILL PLATFORM SUPPORTING FOUNDATION	Date	08.11.2023
O19045_450_C_K_24079_005_R3	AS BUILT	Rev.	D01

9.6 DESIGN OF COLUMN MKD. C7

Design Data :

Depth Parallel to X-X axis, h =	500	mm
Depth Parallel to Z-Z axis, b =	750	mm
Clear Cover =	50	mm
d' =	70	mm
Y'_h = (h-d')/h =	0.7	mm
Y'_b = (b-d')/b =	0.8	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinf. , fy =	420	N/mm^2
Yield Strength of Shear Reinf. , fyt =	420	N/mm^2

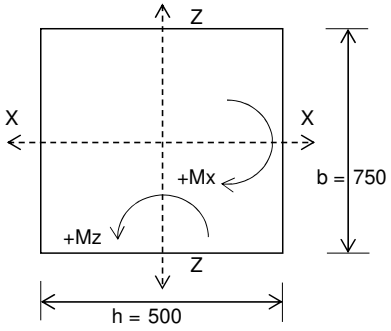

Assumptions :

Strength Reduction Factor , Φ =	0.65
Effective Length factor , k =	1
β =	0.65

Use Interaction Diagram R35-420.7
[ACI DESIGN HANDBOOK-SP-17M(09)]

Unsupported Length of Column Parallel to X-X axis , lux =	2.15	M, Hence	k*lux/b =	4.3 < 22 , Neglect Slenderness Effect
Unsupported Length of Column Parallel to Z-Z axis , luz =	2.15	M, Hence	k*luz/h =	2.867 < 22 , Neglect Slenderness Effect

Main Reinforcement

Provided	12	Nos	20	Dia Bar Equally Distributed In Four Side
Provided	0	NOS	20	Dia Bar Equally Distributed In Four Side
Total Provided Ast =	37.70	cm^2		
Total Provide Pt =	0.01	SAFE		

Max. Nominal Axial Compressive Strength, Pn.max = 0.8[0.85*fc'(Ag-Ast)+fy*Ast]
= 1011 Mton SAFE

α = log0.5/logβ = 1.61

STAAD Member & L/C	Pu (Mton)	Mux (Mton-m)	Muz (Mton-m)	Pn = Pu/ϕ (Mton)	Mnx = Mux/ϕ (Mton-m)	Mnz = Muz/ϕ (Mton-m)	Kn = Pn/fc'*b*h	Rnx = Mnx1 / fc'*b^2*h	Mnx1 (Mton-m)	Rnz = Mnz1 / fc'*h^2*b	Mnz1 (Mton-m)	$(Mnx/Mnx1)^\alpha + (Mnz/Mnz1)^\alpha$
19 - 200	50.988	0.803	0.856	78.443	1.235	1.317	0.06	0.065	63.984	0.065	42.656	0.01
19 - 241	11.618	1.538	0	17.874	2.366	0	0.014	0.065	63.984	0.065	42.656	0
19 - 221	25.23	2.44	1.46	38.815	3.754	2.246	0.03	0.065	63.984	0.065	42.656	0.02
16 - 245	14.709	9.558	-0.814	22.629	14.705	1.252	0.017	0.065	63.984	0.065	42.656	0.1
19 - 236	28.508	-34.121	0.547	43.858	52.494	0.842	0.033	0.065	63.984	0.065	42.656	0.73
19 - 226	19.444	33.179	0.457	29.914	51.045	0.703	0.023	0.065	63.984	0.065	42.656	0.7
16 - 200	50.92	3.729	0.435	78.338	5.737	0.669	0.06	0.065	63.984	0.065	42.656	0.02
16 - 200	50.92	3.729	0.435	78.338	5.737	0.669	0.06	0.065	63.984	0.065	42.656	0.02
19 - 226	19.444	33.179	0.457	29.914	51.045	0.703	0.023	0.065	63.984	0.065	42.656	0.7
19 - 236	28.508	-34.121	0.547	43.858	52.494	0.842	0.033	0.065	63.984	0.065	42.656	0.73
19 - 221	25.23	2.44	1.46	38.815	3.754	2.246	0.03	0.065	63.984	0.065	42.656	0.02
16 - 245	14.709	9.558	-0.814	22.629	14.705	1.252	0.017	0.065	63.984	0.065	42.656	0.1
												SAFE

Stirrups

Provided **10** Dia. Stirrups @ **250** mm C/C **O.K.** *(Ref. SBC:301-2007, CL. No. 25.7.2.2 & 25.7.2.1)*

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.


ATTACHMENT - 1 : ISOMETRIC VIEW OF STAAD MODEL

BALL MILL PLATFORM FOUNDATION


PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

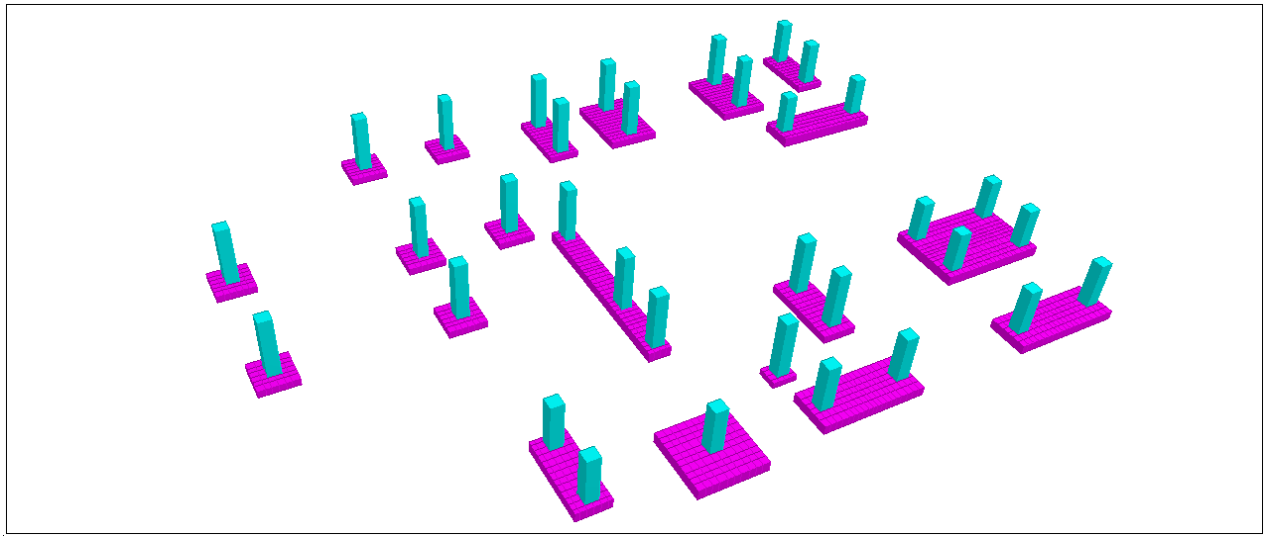

3D Rendered View

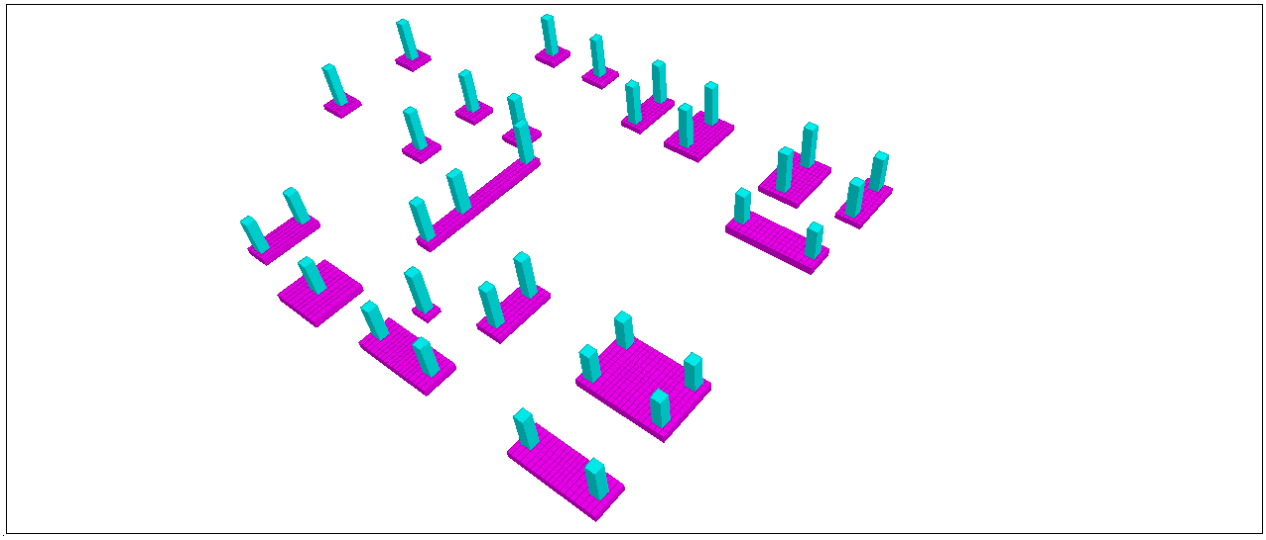

3D Rendered View

ATTACHMENT - 2 : STAAD INPUT

BALL MILL PLATFORM FOUNDATION

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Job Information

	Engineer	Checked	Approved
Name:	SUE	BDA	AG
Date:	06-08-2020		

Project ID	
Project Name	

Structure Type	SPACE FRAME

Number of Nodes	2093	Highest Node	2093
Number of Elements	34	Highest Beam	34
Number of Plates	1661	Highest Plate	2660

Number of Basic Load Cases	123
Number of Combination Load Cases	0

Included in this printout are data for:

All	The Whole Structure

Included in this printout are results for load cases:

Type	L/C	Name
Primary	1	DEAD LOAD (DL)
Primary	2	LIVE LOAD (LL)
Primary	3	OPERATING EQUIPMENT LOAD (OEQL)
Primary	4	TEST EQUIPMENT LOAD (TEQL)
Primary	5	CABLE TRAY LOAD (CTL)
Primary	6	PIPE VERTICAL LOAD (PVL)
Primary	7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))
Primary	8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))
Primary	9	MONORAIL LOAD (MRL)
Primary	10	TEMPERATURE LOAD (+TL)(+VE)
Primary	11	WIND LOAD (+X) (WL(+X))
Primary	12	WIND LOAD (+Z) (WL(+Z))
Primary	13	TEMPERATURE LOAD (TL)(-VE)
Primary	100	DL+CTL+PVL+TEQL
Primary	101	DL+OEQL+CTL+PVL+PHL(+X)
Primary	102	DL+OEQL+CTL+PVL+PHL(+Z)
Primary	103	DL+OEQL+CTL+PVL-PHL(+X)
Primary	104	DL+OEQL+CTL+PVL-PHL(+Z)
Primary	105	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+V
Primary	106	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+V
Primary	107	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+V
Primary	108	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+V
Primary	109	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-V
Primary	110	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-V
Primary	111	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE
Primary	112	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(-VE
Primary	113	DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+
Primary	114	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+

Job Information Cont...

Type	L/C	Name
Primary	118	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+
Primary	119	DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+
Primary	120	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+
Primary	121	DL+OEQL+CTL+PVL+PHL(+X)+WL(+X)
Primary	122	DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z)
Primary	123	DL+OEQL+CTL+PVL+PHL(+X)-WL(+X)
Primary	124	DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z)
Primary	125	DL+OEQL+CTL+PVL-PHL(+X)+WL(+X)
Primary	126	DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z)
Primary	127	DL+OEQL+CTL+PVL-PHL(+X)-WL(+X)
Primary	128	DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z)
Primary	129	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X)
Primary	130	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z)
Primary	131	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X)
Primary	132	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z)
Primary	133	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X)
Primary	134	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z)
Primary	135	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X)
Primary	136	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z)
Primary	137	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(
Primary	138	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(
Primary	139	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+
Primary	140	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+
Primary	141	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+
Primary	142	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+
Primary	143	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+
Primary	144	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+
Primary	145	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(
Primary	146	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(
Primary	147	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+
Primary	148	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+
Primary	149	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+
Primary	150	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+
Primary	151	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+
Primary	152	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+
Primary	153	0.6*(DL+OEQL+CTL)+WL(+X)
Primary	154	0.6*(DL+OEQL+CTL)+WL(+Z)
Primary	155	0.6*(DL+OEQL+CTL)-WL(+X)
Primary	156	0.6*(DL+OEQL+CTL)-WL(+Z)
Primary	200	1.4*(DL+CTL+PVL+TEQL)
Primary	201	1.4*(DL+OEQL+CTL+PVL+PHL(+X))
Primary	202	1.4*(DL+OEQL+CTL+PVL+PHL(+Z))
Primary	203	1.4*(DL+OEQL+CTL+PVL-PHL(+X))
Primary	204	1.4*(DL+OEQL+CTL+PVL-PHL(+Z))
Primary	205	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+
Primary	206	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+
Primary	207	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+\
Primary	208	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+\
Primary	209	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-\

Job Information Cont...

Type	L/C	Name
Primary	210	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-\
Primary	211	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-V
Primary	212	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-V
Primary	213	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*
Primary	214	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*
Primary	215	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*L
Primary	216	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*L
Primary	217	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*
Primary	218	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*
Primary	219	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*W
Primary	220	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*W
Primary	221	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*
Primary	222	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*
Primary	223	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\
Primary	224	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\
Primary	225	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*
Primary	226	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*
Primary	227	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\
Primary	228	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\
Primary	229	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\
Primary	230	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\
Primary	231	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W
Primary	232	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W
Primary	233	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\
Primary	234	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\
Primary	235	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W
Primary	236	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W
Primary	237	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*
Primary	238	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*
Primary	239	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\
Primary	240	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\
Primary	241	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*
Primary	242	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*
Primary	243	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\
Primary	244	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\
Primary	245	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\
Primary	246	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\
Primary	247	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W
Primary	248	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W
Primary	249	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\
Primary	250	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\
Primary	251	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W
Primary	252	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W

Nodes

Node	X (m)	Y (m)	Z (m)
1	0.000	913.700	0.000
2	4.580	913.700	0.000
3	9.980	913.700	0.000
4	14.230	913.700	0.000
5	21.520	913.700	0.000
6	26.170	913.700	0.000
7	9.980	913.700	2.700
8	14.230	913.700	2.700
9	21.520	913.700	2.700
10	26.170	913.700	2.700
11	-8.370	913.700	6.225
12	21.520	913.700	7.050
13	26.170	913.700	7.050
14	0.000	913.700	8.000
15	4.580	913.700	8.000
16	-0.900	910.500	-0.900
17	-0.550	910.500	-0.900
18	6.835	913.700	9.745
19	-0.300	910.500	-0.900
20	0.000	910.500	-0.900
21	-8.370	913.700	12.825
22	0.000	913.700	12.825
23	0.300	910.500	-0.900
24	0.550	910.500	-0.900
25	6.835	913.700	15.345
26	0.900	910.500	-0.900
27	3.680	910.500	-0.900
28	14.830	913.700	17.895
29	21.830	913.700	17.895
30	26.170	913.700	17.895
31	6.835	913.700	18.280
32	14.830	913.700	20.495
33	21.830	913.700	20.495
34	26.170	913.700	20.495
35	0.000	913.700	22.095
36	10.830	913.700	22.095
37	0.000	913.700	25.045
38	5.470	913.700	25.045
39	10.830	913.700	25.045
40	14.830	913.700	25.045
41	21.830	913.700	25.045
42	26.170	913.700	25.045
43	4.030	910.500	-0.900
44	4.280	910.500	-0.900
45	4.580	910.500	-0.900
46	4.880	910.500	-0.900
47	5.130	910.500	-0.900
48	5.480	910.500	-0.900
49	12.880	910.500	-0.600

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
50	13.130	910.500	-0.600
51	13.380	910.500	-0.600
52	13.630	910.500	-0.600
53	13.930	910.500	-0.600
54	14.230	910.500	-0.600
55	14.530	910.500	-0.600
56	14.830	910.500	-0.600
57	15.080	910.500	-0.600
58	15.330	910.500	-0.600
59	15.580	910.500	-0.600
60	20.170	910.500	-0.600
61	20.420	910.500	-0.600
62	20.670	910.500	-0.600
63	20.920	910.500	-0.600
64	21.220	910.500	-0.600
65	21.520	910.500	-0.600
66	21.820	910.500	-0.600
67	22.120	910.500	-0.600
68	22.370	910.500	-0.600
69	22.620	910.500	-0.600
70	22.870	910.500	-0.600
71	-0.900	910.500	-0.550
72	-0.550	910.500	-0.550
73	-0.300	910.500	-0.550
74	0.000	910.500	-0.550
75	0.300	910.500	-0.550
76	0.550	910.500	-0.550
77	0.900	910.500	-0.550
78	3.680	910.500	-0.550
79	4.030	910.500	-0.550
80	4.280	910.500	-0.550
81	4.580	910.500	-0.550
82	4.880	910.500	-0.550
83	5.130	910.500	-0.550
84	5.480	910.500	-0.550
85	9.180	910.500	-0.500
86	9.430	910.500	-0.500
87	9.680	910.500	-0.500
88	9.980	910.500	-0.500
89	10.280	910.500	-0.500
90	10.530	910.500	-0.500
91	10.780	910.500	-0.500
92	-0.900	910.500	-0.300
93	-0.550	910.500	-0.300
94	-0.300	910.500	-0.300
95	0.000	910.500	-0.300
96	0.300	910.500	-0.300
97	0.550	910.500	-0.300
98	0.900	910.500	-0.300

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
99	3.680	910.500	-0.300
100	4.030	910.500	-0.300
101	4.280	910.500	-0.300
102	4.580	910.500	-0.300
103	4.880	910.500	-0.300
104	5.130	910.500	-0.300
105	5.480	910.500	-0.300
106	9.180	910.500	-0.300
107	9.430	910.500	-0.300
108	9.680	910.500	-0.300
109	9.980	910.500	-0.300
110	10.280	910.500	-0.300
111	10.530	910.500	-0.300
112	10.780	910.500	-0.300
113	12.880	910.500	-0.300
114	13.130	910.500	-0.300
115	13.380	910.500	-0.300
116	13.630	910.500	-0.300
117	13.930	910.500	-0.300
118	14.230	910.500	-0.300
119	14.530	910.500	-0.300
120	14.830	910.500	-0.300
121	15.080	910.500	-0.300
122	15.330	910.500	-0.300
123	15.580	910.500	-0.300
124	20.170	910.500	-0.300
125	20.420	910.500	-0.300
126	20.670	910.500	-0.300
127	20.920	910.500	-0.300
128	21.220	910.500	-0.300
129	21.520	910.500	-0.300
130	21.820	910.500	-0.300
131	22.120	910.500	-0.300
132	22.370	910.500	-0.300
133	22.620	910.500	-0.300
134	22.870	910.500	-0.300
135	-0.900	910.500	0.000
136	-0.550	910.500	0.000
137	-0.300	910.500	0.000
138	0.000	910.500	0.000
139	0.300	910.500	0.000
140	0.550	910.500	0.000
141	0.900	910.500	0.000
142	3.680	910.500	0.000
143	4.030	910.500	0.000
144	4.280	910.500	0.000
145	4.580	910.500	0.000
146	4.880	910.500	0.000
147	5.130	910.500	0.000

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
148	5.480	910.500	0.000
149	9.180	910.500	0.000
150	9.430	910.500	0.000
151	9.680	910.500	0.000
152	9.980	910.500	0.000
153	10.280	910.500	0.000
154	10.530	910.500	0.000
155	10.780	910.500	0.000
156	12.880	910.500	0.000
157	13.130	910.500	0.000
158	13.380	910.500	0.000
159	13.630	910.500	0.000
160	13.930	910.500	0.000
161	14.230	910.500	0.000
162	14.530	910.500	0.000
163	14.830	910.500	0.000
164	15.080	910.500	0.000
165	15.330	910.500	0.000
166	15.580	910.500	0.000
167	20.170	910.500	0.000
168	20.420	910.500	0.000
169	20.670	910.500	0.000
170	20.920	910.500	0.000
171	21.220	910.500	0.000
172	21.520	910.500	0.000
173	21.820	910.500	0.000
174	22.120	910.500	0.000
175	22.370	910.500	0.000
176	22.620	910.500	0.000
177	22.870	910.500	0.000
178	-0.900	910.500	0.300
179	-0.550	910.500	0.300
180	-0.300	910.500	0.300
181	0.000	910.500	0.300
182	0.300	910.500	0.300
183	0.550	910.500	0.300
184	0.900	910.500	0.300
185	3.680	910.500	0.300
186	4.030	910.500	0.300
187	4.280	910.500	0.300
188	4.580	910.500	0.300
189	4.880	910.500	0.300
190	5.130	910.500	0.300
191	5.480	910.500	0.300
192	9.180	910.500	0.300
193	9.430	910.500	0.300
194	9.680	910.500	0.300
195	9.980	910.500	0.300
196	10.280	910.500	0.300

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
197	10.530	910.500	0.300
198	10.780	910.500	0.300
199	12.880	910.500	0.300
200	13.130	910.500	0.300
201	13.380	910.500	0.300
202	13.630	910.500	0.300
203	13.930	910.500	0.300
204	14.230	910.500	0.300
205	14.530	910.500	0.300
206	14.830	910.500	0.300
207	15.080	910.500	0.300
208	15.330	910.500	0.300
209	15.580	910.500	0.300
210	20.170	910.500	0.300
211	20.420	910.500	0.300
212	20.670	910.500	0.300
213	20.920	910.500	0.300
214	21.220	910.500	0.300
215	21.520	910.500	0.300
216	21.820	910.500	0.300
217	22.120	910.500	0.300
218	22.370	910.500	0.300
219	22.620	910.500	0.300
220	22.870	910.500	0.300
221	-0.900	910.500	0.550
222	-0.550	910.500	0.550
223	-0.300	910.500	0.550
224	0.000	910.500	0.550
225	0.300	910.500	0.550
226	0.550	910.500	0.550
227	0.900	910.500	0.550
228	3.680	910.500	0.550
229	4.030	910.500	0.550
230	4.280	910.500	0.550
231	4.580	910.500	0.550
232	4.880	910.500	0.550
233	5.130	910.500	0.550
234	5.480	910.500	0.550
235	9.180	910.500	0.550
236	9.430	910.500	0.550
237	9.680	910.500	0.550
238	9.980	910.500	0.550
239	10.280	910.500	0.550
240	10.530	910.500	0.550
241	10.780	910.500	0.550
242	12.880	910.500	0.600
243	13.130	910.500	0.600
244	13.380	910.500	0.600
245	13.630	910.500	0.600

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
246	13.930	910.500	0.600
247	14.230	910.500	0.600
248	14.530	910.500	0.600
249	14.830	910.500	0.600
250	15.080	910.500	0.600
251	15.330	910.500	0.600
252	15.580	910.500	0.600
253	20.170	910.500	0.600
254	20.420	910.500	0.600
255	20.670	910.500	0.600
256	20.920	910.500	0.600
257	21.220	910.500	0.600
258	21.520	910.500	0.600
259	21.820	910.500	0.600
260	22.120	910.500	0.600
261	22.370	910.500	0.600
262	22.620	910.500	0.600
263	22.870	910.500	0.600
264	-0.900	910.500	0.900
265	-0.550	910.500	0.900
266	-0.300	910.500	0.900
267	0.000	910.500	0.900
268	0.300	910.500	0.900
269	0.550	910.500	0.900
270	0.900	910.500	0.900
271	3.680	910.500	0.900
272	4.030	910.500	0.900
273	4.280	910.500	0.900
274	4.580	910.500	0.900
275	4.880	910.500	0.900
276	5.130	910.500	0.900
277	5.480	910.500	0.900
278	9.180	910.500	0.900
279	9.430	910.500	0.900
280	9.680	910.500	0.900
281	9.980	910.500	0.900
282	10.280	910.500	0.900
283	10.530	910.500	0.900
284	10.780	910.500	0.900
285	12.880	910.500	0.900
286	13.130	910.500	0.900
287	13.380	910.500	0.900
288	13.630	910.500	0.900
289	13.930	910.500	0.900
290	14.230	910.500	0.900
291	14.530	910.500	0.900
292	14.830	910.500	0.900
293	15.080	910.500	0.900
294	15.330	910.500	0.900

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
295	15.580	910.500	0.900
296	20.170	910.500	0.900
297	20.420	910.500	0.900
298	20.670	910.500	0.900
299	20.920	910.500	0.900
300	21.220	910.500	0.900
301	21.520	910.500	0.900
302	21.820	910.500	0.900
303	22.120	910.500	0.900
304	22.370	910.500	0.900
305	22.620	910.500	0.900
306	22.870	910.500	0.900
307	9.180	910.500	1.200
308	9.430	910.500	1.200
309	9.680	910.500	1.200
310	9.980	910.500	1.200
311	10.280	910.500	1.200
312	10.530	910.500	1.200
313	10.780	910.500	1.200
314	12.880	910.500	1.200
315	13.130	910.500	1.200
316	13.380	910.500	1.200
317	13.630	910.500	1.200
318	13.930	910.500	1.200
319	14.230	910.500	1.200
320	14.530	910.500	1.200
321	14.830	910.500	1.200
322	15.080	910.500	1.200
323	15.330	910.500	1.200
324	15.580	910.500	1.200
325	20.170	910.500	1.200
326	20.420	910.500	1.200
327	20.670	910.500	1.200
328	20.920	910.500	1.200
329	21.220	910.500	1.200
330	21.520	910.500	1.200
331	21.820	910.500	1.200
332	22.120	910.500	1.200
333	22.370	910.500	1.200
334	22.620	910.500	1.200
335	22.870	910.500	1.200
336	9.180	910.500	1.500
337	9.430	910.500	1.500
338	9.680	910.500	1.500
339	9.980	910.500	1.500
340	10.280	910.500	1.500
341	10.530	910.500	1.500
342	10.780	910.500	1.500
343	12.880	910.500	1.500

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
344	13.130	910.500	1.500
345	13.380	910.500	1.500
346	13.630	910.500	1.500
347	13.930	910.500	1.500
348	14.230	910.500	1.500
349	14.530	910.500	1.500
350	14.830	910.500	1.500
351	15.080	910.500	1.500
352	15.330	910.500	1.500
353	15.580	910.500	1.500
354	20.170	910.500	1.500
355	20.420	910.500	1.500
356	20.670	910.500	1.500
357	20.920	910.500	1.500
358	21.220	910.500	1.500
359	21.520	910.500	1.500
360	21.820	910.500	1.500
361	22.120	910.500	1.500
362	22.370	910.500	1.500
363	22.620	910.500	1.500
364	22.870	910.500	1.500
365	9.180	910.500	1.800
366	9.430	910.500	1.800
367	9.680	910.500	1.800
368	9.980	910.500	1.800
369	10.280	910.500	1.800
370	10.530	910.500	1.800
371	10.780	910.500	1.800
372	12.880	910.500	1.800
373	13.130	910.500	1.800
374	13.380	910.500	1.800
375	13.630	910.500	1.800
376	13.930	910.500	1.800
377	14.230	910.500	1.800
378	14.530	910.500	1.800
379	14.830	910.500	1.800
380	15.080	910.500	1.800
381	15.330	910.500	1.800
382	15.580	910.500	1.800
383	20.170	910.500	1.800
384	20.420	910.500	1.800
385	20.670	910.500	1.800
386	20.920	910.500	1.800
387	21.220	910.500	1.800
388	21.520	910.500	1.800
389	21.820	910.500	1.800
390	22.120	910.500	1.800
391	22.370	910.500	1.800
392	22.620	910.500	1.800

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
393	22.870	910.500	1.800
394	12.880	910.500	2.100
395	13.130	910.500	2.100
396	13.380	910.500	2.100
397	13.630	910.500	2.100
398	13.930	910.500	2.100
399	14.230	910.500	2.100
400	14.530	910.500	2.100
401	14.830	910.500	2.100
402	15.080	910.500	2.100
403	15.330	910.500	2.100
404	15.580	910.500	2.100
405	20.170	910.500	2.100
406	20.420	910.500	2.100
407	20.670	910.500	2.100
408	20.920	910.500	2.100
409	21.220	910.500	2.100
410	21.520	910.500	2.100
411	21.820	910.500	2.100
412	22.120	910.500	2.100
413	22.370	910.500	2.100
414	22.620	910.500	2.100
415	22.870	910.500	2.100
416	9.180	910.500	2.150
417	9.430	910.500	2.150
418	9.680	910.500	2.150
419	9.980	910.500	2.150
420	10.280	910.500	2.150
421	10.530	910.500	2.150
422	10.780	910.500	2.150
423	9.180	910.500	2.400
424	9.430	910.500	2.400
425	9.680	910.500	2.400
426	9.980	910.500	2.400
427	10.280	910.500	2.400
428	10.530	910.500	2.400
429	10.780	910.500	2.400
430	12.880	910.500	2.400
431	13.130	910.500	2.400
432	13.380	910.500	2.400
433	13.630	910.500	2.400
434	13.930	910.500	2.400
435	14.230	910.500	2.400
436	14.530	910.500	2.400
437	14.830	910.500	2.400
438	15.080	910.500	2.400
439	15.330	910.500	2.400
440	15.580	910.500	2.400
441	20.170	910.500	2.400

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
442	20.420	910.500	2.400
443	20.670	910.500	2.400
444	20.920	910.500	2.400
445	21.220	910.500	2.400
446	21.520	910.500	2.400
447	21.820	910.500	2.400
448	22.120	910.500	2.400
449	22.370	910.500	2.400
450	22.620	910.500	2.400
451	22.870	910.500	2.400
452	9.180	910.500	2.700
453	9.430	910.500	2.700
454	9.680	910.500	2.700
455	9.980	910.500	2.700
456	10.280	910.500	2.700
457	10.530	910.500	2.700
458	10.780	910.500	2.700
459	12.880	910.500	2.700
460	13.130	910.500	2.700
461	13.380	910.500	2.700
462	13.630	910.500	2.700
463	13.930	910.500	2.700
464	14.230	910.500	2.700
465	14.530	910.500	2.700
466	14.830	910.500	2.700
467	15.080	910.500	2.700
468	15.330	910.500	2.700
469	15.580	910.500	2.700
470	20.170	910.500	2.700
471	20.420	910.500	2.700
472	20.670	910.500	2.700
473	20.920	910.500	2.700
474	21.220	910.500	2.700
475	21.520	910.500	2.700
476	21.820	910.500	2.700
477	22.120	910.500	2.700
478	22.370	910.500	2.700
479	22.620	910.500	2.700
480	22.870	910.500	2.700
481	9.180	910.500	3.000
482	9.430	910.500	3.000
483	9.680	910.500	3.000
484	9.980	910.500	3.000
485	10.280	910.500	3.000
486	10.530	910.500	3.000
487	10.780	910.500	3.000
488	12.880	910.500	3.000
489	13.130	910.500	3.000
490	13.380	910.500	3.000

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
491	13.630	910.500	3.000
492	13.930	910.500	3.000
493	14.230	910.500	3.000
494	14.530	910.500	3.000
495	14.830	910.500	3.000
496	15.080	910.500	3.000
497	15.330	910.500	3.000
498	15.580	910.500	3.000
499	20.170	910.500	3.000
500	20.420	910.500	3.000
501	20.670	910.500	3.000
502	20.920	910.500	3.000
503	21.220	910.500	3.000
504	21.520	910.500	3.000
505	21.820	910.500	3.000
506	22.120	910.500	3.000
507	22.370	910.500	3.000
508	22.620	910.500	3.000
509	22.870	910.500	3.000
510	9.180	910.500	3.200
511	9.430	910.500	3.200
512	9.680	910.500	3.200
513	9.980	910.500	3.200
514	10.280	910.500	3.200
515	10.530	910.500	3.200
516	10.780	910.500	3.200
517	12.880	910.500	3.300
518	13.130	910.500	3.300
519	13.380	910.500	3.300
520	13.630	910.500	3.300
521	13.930	910.500	3.300
522	14.230	910.500	3.300
523	14.530	910.500	3.300
524	14.830	910.500	3.300
525	15.080	910.500	3.300
526	15.330	910.500	3.300
527	15.580	910.500	3.300
528	20.170	910.500	3.300
529	20.420	910.500	3.300
530	20.670	910.500	3.300
531	20.920	910.500	3.300
532	21.220	910.500	3.300
533	21.520	910.500	3.300
534	21.820	910.500	3.300
535	22.120	910.500	3.300
536	22.370	910.500	3.300
537	22.620	910.500	3.300
538	22.870	910.500	3.300
539	-9.270	910.500	5.325

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
540	-8.920	910.500	5.325
541	-8.670	910.500	5.325
542	-8.370	910.500	5.325
543	-8.070	910.500	5.325
544	-7.820	910.500	5.325
545	-7.470	910.500	5.325
546	-9.270	910.500	5.675
547	-8.920	910.500	5.675
548	-8.670	910.500	5.675
549	-8.370	910.500	5.675
550	-8.070	910.500	5.675
551	-7.820	910.500	5.675
552	-7.470	910.500	5.675
553	-9.270	910.500	5.925
554	-8.920	910.500	5.925
555	-8.670	910.500	5.925
556	-8.370	910.500	5.925
557	-8.070	910.500	5.925
558	-7.820	910.500	5.925
559	-7.470	910.500	5.925
560	-9.270	910.500	6.225
561	-8.920	910.500	6.225
562	-8.670	910.500	6.225
563	-8.370	910.500	6.225
564	-8.070	910.500	6.225
565	-7.820	910.500	6.225
566	-7.470	910.500	6.225
567	-9.270	910.500	6.525
568	-8.920	910.500	6.525
569	-8.670	910.500	6.525
570	-8.370	910.500	6.525
571	-8.070	910.500	6.525
572	-7.820	910.500	6.525
573	-7.470	910.500	6.525
574	-9.270	910.500	6.775
575	-8.920	910.500	6.775
576	-8.670	910.500	6.775
577	-8.370	910.500	6.775
578	-8.070	910.500	6.775
579	-7.820	910.500	6.775
580	-7.470	910.500	6.775
581	-0.900	910.500	7.100
582	-0.550	910.500	7.100
583	-0.300	910.500	7.100
584	0.000	910.500	7.100
585	0.300	910.500	7.100
586	0.550	910.500	7.100
587	0.900	910.500	7.100
588	3.680	910.500	7.100

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
589	4.030	910.500	7.100
590	4.280	910.500	7.100
591	4.580	910.500	7.100
592	4.880	910.500	7.100
593	5.130	910.500	7.100
594	5.480	910.500	7.100
595	-9.270	910.500	7.125
596	-8.920	910.500	7.125
597	-8.670	910.500	7.125
598	-8.370	910.500	7.125
599	-8.070	910.500	7.125
600	-7.820	910.500	7.125
601	-7.470	910.500	7.125
602	-0.900	910.500	7.450
603	-0.550	910.500	7.450
604	-0.300	910.500	7.450
605	0.000	910.500	7.450
606	0.300	910.500	7.450
607	0.550	910.500	7.450
608	0.900	910.500	7.450
609	3.680	910.500	7.450
610	4.030	910.500	7.450
611	4.280	910.500	7.450
612	4.580	910.500	7.450
613	4.880	910.500	7.450
614	5.130	910.500	7.450
615	5.480	910.500	7.450
616	-0.900	910.500	7.700
617	-0.550	910.500	7.700
618	-0.300	910.500	7.700
619	0.000	910.500	7.700
620	0.300	910.500	7.700
621	0.550	910.500	7.700
622	0.900	910.500	7.700
623	3.680	910.500	7.700
624	4.030	910.500	7.700
625	4.280	910.500	7.700
626	4.580	910.500	7.700
627	4.880	910.500	7.700
628	5.130	910.500	7.700
629	5.480	910.500	7.700
630	-0.900	910.500	8.000
631	-0.550	910.500	8.000
632	-0.300	910.500	8.000
633	0.000	910.500	8.000
634	0.300	910.500	8.000
635	0.550	910.500	8.000
636	0.900	910.500	8.000
637	3.680	910.500	8.000

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
638	4.030	910.500	8.000
639	4.280	910.500	8.000
640	4.580	910.500	8.000
641	4.880	910.500	8.000
642	5.130	910.500	8.000
643	5.480	910.500	8.000
644	-0.900	910.500	8.300
645	-0.550	910.500	8.300
646	-0.300	910.500	8.300
647	0.000	910.500	8.300
648	0.300	910.500	8.300
649	0.550	910.500	8.300
650	0.900	910.500	8.300
651	3.680	910.500	8.300
652	4.030	910.500	8.300
653	4.280	910.500	8.300
654	4.580	910.500	8.300
655	4.880	910.500	8.300
656	5.130	910.500	8.300
657	5.480	910.500	8.300
658	-0.900	910.500	8.550
659	-0.550	910.500	8.550
660	-0.300	910.500	8.550
661	0.000	910.500	8.550
662	0.300	910.500	8.550
663	0.550	910.500	8.550
664	0.900	910.500	8.550
665	3.680	910.500	8.550
666	4.030	910.500	8.550
667	4.280	910.500	8.550
668	4.580	910.500	8.550
669	4.880	910.500	8.550
670	5.130	910.500	8.550
671	5.480	910.500	8.550
672	-0.900	910.500	8.900
673	-0.550	910.500	8.900
674	-0.300	910.500	8.900
675	0.000	910.500	8.900
676	0.300	910.500	8.900
677	0.550	910.500	8.900
678	0.900	910.500	8.900
679	3.680	910.500	8.900
680	4.030	910.500	8.900
681	4.280	910.500	8.900
682	4.580	910.500	8.900
683	4.880	910.500	8.900
684	5.130	910.500	8.900
685	5.480	910.500	8.900
686	6.285	910.500	9.245

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
687	6.535	910.500	9.245
688	6.835	910.500	9.245
689	7.135	910.500	9.245
690	7.385	910.500	9.245
691	6.285	910.500	9.445
692	6.535	910.500	9.445
693	6.835	910.500	9.445
694	7.135	910.500	9.445
695	7.385	910.500	9.445
696	6.285	910.500	9.745
697	6.535	910.500	9.745
698	6.835	910.500	9.745
699	7.135	910.500	9.745
700	7.385	910.500	9.745
701	6.285	910.500	10.045
702	6.535	910.500	10.045
703	6.835	910.500	10.045
704	7.135	910.500	10.045
705	7.385	910.500	10.045
706	6.285	910.500	10.345
707	6.535	910.500	10.345
708	6.835	910.500	10.345
709	7.135	910.500	10.345
710	7.385	910.500	10.345
711	6.285	910.500	10.645
712	6.535	910.500	10.645
713	6.835	910.500	10.645
714	7.135	910.500	10.645
715	7.385	910.500	10.645
716	6.285	910.500	10.945
717	6.535	910.500	10.945
718	6.835	910.500	10.945
719	7.135	910.500	10.945
720	7.385	910.500	10.945
721	6.285	910.500	11.245
722	6.535	910.500	11.245
723	6.835	910.500	11.245
724	7.135	910.500	11.245
725	7.385	910.500	11.245
726	6.285	910.500	11.545
727	6.535	910.500	11.545
728	6.835	910.500	11.545
729	7.135	910.500	11.545
730	7.385	910.500	11.545
731	6.285	910.500	11.845
732	6.535	910.500	11.845
733	6.835	910.500	11.845
734	7.135	910.500	11.845
735	7.385	910.500	11.845

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
736	-9.270	910.500	11.925
737	-8.920	910.500	11.925
738	-8.670	910.500	11.925
739	-8.370	910.500	11.925
740	-8.070	910.500	11.925
741	-7.820	910.500	11.925
742	-7.470	910.500	11.925
743	-0.900	910.500	11.925
744	-0.550	910.500	11.925
745	-0.300	910.500	11.925
746	0.000	910.500	11.925
747	0.300	910.500	11.925
748	0.550	910.500	11.925
749	0.900	910.500	11.925
750	6.285	910.500	12.145
751	6.535	910.500	12.145
752	6.835	910.500	12.145
753	7.135	910.500	12.145
754	7.385	910.500	12.145
755	-9.270	910.500	12.275
756	-8.920	910.500	12.275
757	-8.670	910.500	12.275
758	-8.370	910.500	12.275
759	-8.070	910.500	12.275
760	-7.820	910.500	12.275
761	-7.470	910.500	12.275
762	-0.900	910.500	12.275
763	-0.550	910.500	12.275
764	-0.300	910.500	12.275
765	0.000	910.500	12.275
766	0.300	910.500	12.275
767	0.550	910.500	12.275
768	0.900	910.500	12.275
769	6.285	910.500	12.445
770	6.535	910.500	12.445
771	6.835	910.500	12.445
772	7.135	910.500	12.445
773	7.385	910.500	12.445
774	-9.270	910.500	12.525
775	-8.920	910.500	12.525
776	-8.670	910.500	12.525
777	-8.370	910.500	12.525
778	-8.070	910.500	12.525
779	-7.820	910.500	12.525
780	-7.470	910.500	12.525
781	-0.900	910.500	12.525
782	-0.550	910.500	12.525
783	-0.300	910.500	12.525
784	0.000	910.500	12.525

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
785	0.300	910.500	12.525
786	0.550	910.500	12.525
787	0.900	910.500	12.525
788	6.285	910.500	12.645
789	6.535	910.500	12.645
790	6.835	910.500	12.645
791	7.135	910.500	12.645
792	7.385	910.500	12.645
793	-9.270	910.500	12.825
794	-8.920	910.500	12.825
795	-8.670	910.500	12.825
796	-8.370	910.500	12.825
797	-8.070	910.500	12.825
798	-7.820	910.500	12.825
799	-7.470	910.500	12.825
800	-0.900	910.500	12.825
801	-0.550	910.500	12.825
802	-0.300	910.500	12.825
803	0.000	910.500	12.825
804	0.300	910.500	12.825
805	0.550	910.500	12.825
806	0.900	910.500	12.825
807	6.285	910.500	12.945
808	6.535	910.500	12.945
809	6.835	910.500	12.945
810	7.135	910.500	12.945
811	7.385	910.500	12.945
812	-9.270	910.500	13.125
813	-8.920	910.500	13.125
814	-8.670	910.500	13.125
815	-8.370	910.500	13.125
816	-8.070	910.500	13.125
817	-7.820	910.500	13.125
818	-7.470	910.500	13.125
819	-0.900	910.500	13.125
820	-0.550	910.500	13.125
821	-0.300	910.500	13.125
822	0.000	910.500	13.125
823	0.300	910.500	13.125
824	0.550	910.500	13.125
825	0.900	910.500	13.125
826	6.285	910.500	13.245
827	6.535	910.500	13.245
828	6.835	910.500	13.245
829	7.135	910.500	13.245
830	7.385	910.500	13.245
831	-9.270	910.500	13.375
832	-8.920	910.500	13.375
833	-8.670	910.500	13.375

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
834	-8.370	910.500	13.375
835	-8.070	910.500	13.375
836	-7.820	910.500	13.375
837	-7.470	910.500	13.375
838	-0.900	910.500	13.375
839	-0.550	910.500	13.375
840	-0.300	910.500	13.375
841	0.000	910.500	13.375
842	0.300	910.500	13.375
843	0.550	910.500	13.375
844	0.900	910.500	13.375
845	6.285	910.500	13.545
846	6.535	910.500	13.545
847	6.835	910.500	13.545
848	7.135	910.500	13.545
849	7.385	910.500	13.545
850	-9.270	910.500	13.725
851	-8.920	910.500	13.725
852	-8.670	910.500	13.725
853	-8.370	910.500	13.725
854	-8.070	910.500	13.725
855	-7.820	910.500	13.725
856	-7.470	910.500	13.725
857	-0.900	910.500	13.725
858	-0.550	910.500	13.725
859	-0.300	910.500	13.725
860	0.000	910.500	13.725
861	0.300	910.500	13.725
862	0.550	910.500	13.725
863	0.900	910.500	13.725
864	6.285	910.500	13.845
865	6.535	910.500	13.845
866	6.835	910.500	13.845
867	7.135	910.500	13.845
868	7.385	910.500	13.845
869	6.285	910.500	14.145
870	6.535	910.500	14.145
871	6.835	910.500	14.145
872	7.135	910.500	14.145
873	7.385	910.500	14.145
874	6.285	910.500	14.445
875	6.535	910.500	14.445
876	6.835	910.500	14.445
877	7.135	910.500	14.445
878	7.385	910.500	14.445
879	6.285	910.500	14.745
880	6.535	910.500	14.745
881	6.835	910.500	14.745
882	7.135	910.500	14.745

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
883	7.385	910.500	14.745
884	6.285	910.500	15.045
885	6.535	910.500	15.045
886	6.835	910.500	15.045
887	7.135	910.500	15.045
888	7.385	910.500	15.045
889	6.285	910.500	15.345
890	6.535	910.500	15.345
891	6.835	910.500	15.345
892	7.135	910.500	15.345
893	7.385	910.500	15.345
894	6.285	910.500	15.645
895	6.535	910.500	15.645
896	6.835	910.500	15.645
897	7.135	910.500	15.645
898	7.385	910.500	15.645
899	6.285	910.500	15.945
900	6.535	910.500	15.945
901	6.835	910.500	15.945
902	7.135	910.500	15.945
903	7.385	910.500	15.945
904	6.285	910.500	16.245
905	6.535	910.500	16.245
906	6.835	910.500	16.245
907	7.135	910.500	16.245
908	7.385	910.500	16.245
909	6.285	910.500	16.545
910	6.535	910.500	16.545
911	6.835	910.500	16.545
912	7.135	910.500	16.545
913	7.385	910.500	16.545
914	6.285	910.500	16.780
915	6.535	910.500	16.780
916	6.835	910.500	16.780
917	7.135	910.500	16.780
918	7.385	910.500	16.780
919	6.285	910.500	17.080
920	6.535	910.500	17.080
921	6.835	910.500	17.080
922	7.135	910.500	17.080
923	7.385	910.500	17.080
924	13.980	910.500	17.195
925	14.230	910.500	17.195
926	14.530	910.500	17.195
927	14.830	910.500	17.195
928	15.130	910.500	17.195
929	15.430	910.500	17.195
930	15.680	910.500	17.195
931	6.285	910.500	17.380

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
932	6.535	910.500	17.380
933	6.835	910.500	17.380
934	7.135	910.500	17.380
935	7.385	910.500	17.380
936	13.980	910.500	17.595
937	14.230	910.500	17.595
938	14.530	910.500	17.595
939	14.830	910.500	17.595
940	15.130	910.500	17.595
941	15.430	910.500	17.595
942	15.680	910.500	17.595
943	6.285	910.500	17.680
944	6.535	910.500	17.680
945	6.835	910.500	17.680
946	7.135	910.500	17.680
947	7.385	910.500	17.680
948	13.980	910.500	17.895
949	14.230	910.500	17.895
950	14.530	910.500	17.895
951	14.830	910.500	17.895
952	15.130	910.500	17.895
953	15.430	910.500	17.895
954	15.680	910.500	17.895
955	6.285	910.500	17.980
956	6.535	910.500	17.980
957	6.835	910.500	17.980
958	7.135	910.500	17.980
959	7.385	910.500	17.980
960	13.980	910.500	18.195
961	14.230	910.500	18.195
962	14.530	910.500	18.195
963	14.830	910.500	18.195
964	15.130	910.500	18.195
965	15.430	910.500	18.195
966	15.680	910.500	18.195
967	6.285	910.500	18.280
968	6.535	910.500	18.280
969	6.835	910.500	18.280
970	7.135	910.500	18.280
971	7.385	910.500	18.280
972	13.980	910.500	18.495
973	14.230	910.500	18.495
974	14.530	910.500	18.495
975	14.830	910.500	18.495
976	15.130	910.500	18.495
977	15.430	910.500	18.495
978	15.680	910.500	18.495
979	6.285	910.500	18.580
980	6.535	910.500	18.580

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
981	6.835	910.500	18.580
982	7.135	910.500	18.580
983	7.385	910.500	18.580
984	6.285	910.500	18.780
985	6.535	910.500	18.780
986	6.835	910.500	18.780
987	7.135	910.500	18.780
988	7.385	910.500	18.780
989	13.980	910.500	18.795
990	14.230	910.500	18.795
991	14.530	910.500	18.795
992	14.830	910.500	18.795
993	15.130	910.500	18.795
994	15.430	910.500	18.795
995	15.680	910.500	18.795
996	13.980	910.500	19.095
997	14.230	910.500	19.095
998	14.530	910.500	19.095
999	14.830	910.500	19.095
1000	15.130	910.500	19.095
1001	15.430	910.500	19.095
1002	15.680	910.500	19.095
1003	13.980	910.500	19.295
1004	14.230	910.500	19.295
1005	14.530	910.500	19.295
1006	14.830	910.500	19.295
1007	15.130	910.500	19.295
1008	15.430	910.500	19.295
1009	15.680	910.500	19.295
1010	13.980	910.500	19.595
1011	14.230	910.500	19.595
1012	14.530	910.500	19.595
1013	14.830	910.500	19.595
1014	15.130	910.500	19.595
1015	15.430	910.500	19.595
1016	15.680	910.500	19.595
1017	13.980	910.500	19.895
1018	14.230	910.500	19.895
1019	14.530	910.500	19.895
1020	14.830	910.500	19.895
1021	15.130	910.500	19.895
1022	15.430	910.500	19.895
1023	15.680	910.500	19.895
1024	13.980	910.500	20.195
1025	14.230	910.500	20.195
1026	14.530	910.500	20.195
1027	14.830	910.500	20.195
1028	15.130	910.500	20.195
1029	15.430	910.500	20.195

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1030	15.680	910.500	20.195
1031	13.980	910.500	20.495
1032	14.230	910.500	20.495
1033	14.530	910.500	20.495
1034	14.830	910.500	20.495
1035	15.130	910.500	20.495
1036	15.430	910.500	20.495
1037	15.680	910.500	20.495
1038	13.980	910.500	20.795
1039	14.230	910.500	20.795
1040	14.530	910.500	20.795
1041	14.830	910.500	20.795
1042	15.130	910.500	20.795
1043	15.430	910.500	20.795
1044	15.680	910.500	20.795
1045	13.980	910.500	21.195
1046	14.230	910.500	21.195
1047	14.530	910.500	21.195
1048	14.830	910.500	21.195
1049	15.130	910.500	21.195
1050	15.430	910.500	21.195
1051	15.680	910.500	21.195
1052	10.230	910.500	21.595
1053	10.530	910.500	21.595
1054	10.830	910.500	21.595
1055	11.130	910.500	21.595
1056	11.430	910.500	21.595
1057	10.230	910.500	21.795
1058	10.530	910.500	21.795
1059	10.830	910.500	21.795
1060	11.130	910.500	21.795
1061	11.430	910.500	21.795
1062	10.230	910.500	22.095
1063	10.530	910.500	22.095
1064	10.830	910.500	22.095
1065	11.130	910.500	22.095
1066	11.430	910.500	22.095
1067	10.230	910.500	22.395
1068	10.530	910.500	22.395
1069	10.830	910.500	22.395
1070	11.130	910.500	22.395
1071	11.430	910.500	22.395
1072	10.230	910.500	22.595
1073	10.530	910.500	22.595
1074	10.830	910.500	22.595
1075	11.130	910.500	22.595
1076	11.430	910.500	22.595
1077	25.370	911.050	-0.500
1078	25.620	911.050	-0.500

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1079	25.870	911.050	-0.500
1080	26.170	911.050	-0.500
1081	26.470	911.050	-0.500
1082	26.720	911.050	-0.500
1083	26.970	911.050	-0.500
1084	25.370	911.050	-0.300
1085	25.620	911.050	-0.300
1086	25.870	911.050	-0.300
1087	26.170	911.050	-0.300
1088	26.470	911.050	-0.300
1089	26.720	911.050	-0.300
1090	26.970	911.050	-0.300
1091	25.370	911.050	0.000
1092	25.620	911.050	0.000
1093	25.870	911.050	0.000
1094	26.170	911.050	0.000
1095	26.470	911.050	0.000
1096	26.720	911.050	0.000
1097	26.970	911.050	0.000
1098	25.370	911.050	0.300
1099	25.620	911.050	0.300
1100	25.870	911.050	0.300
1101	26.170	911.050	0.300
1102	26.470	911.050	0.300
1103	26.720	911.050	0.300
1104	26.970	911.050	0.300
1105	25.370	911.050	0.550
1106	25.620	911.050	0.550
1107	25.870	911.050	0.550
1108	26.170	911.050	0.550
1109	26.470	911.050	0.550
1110	26.720	911.050	0.550
1111	26.970	911.050	0.550
1112	25.370	911.050	0.900
1113	25.620	911.050	0.900
1114	25.870	911.050	0.900
1115	26.170	911.050	0.900
1116	26.470	911.050	0.900
1117	26.720	911.050	0.900
1118	26.970	911.050	0.900
1119	25.370	911.050	1.200
1120	25.620	911.050	1.200
1121	25.870	911.050	1.200
1122	26.170	911.050	1.200
1123	26.470	911.050	1.200
1124	26.720	911.050	1.200
1125	26.970	911.050	1.200
1126	25.370	911.050	1.500
1127	25.620	911.050	1.500

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1128	25.870	911.050	1.500
1129	26.170	911.050	1.500
1130	26.470	911.050	1.500
1131	26.720	911.050	1.500
1132	26.970	911.050	1.500
1133	25.370	911.050	1.800
1134	25.620	911.050	1.800
1135	25.870	911.050	1.800
1136	26.170	911.050	1.800
1137	26.470	911.050	1.800
1138	26.720	911.050	1.800
1139	26.970	911.050	1.800
1140	25.370	911.050	2.150
1141	25.620	911.050	2.150
1142	25.870	911.050	2.150
1143	26.170	911.050	2.150
1144	26.470	911.050	2.150
1145	26.720	911.050	2.150
1146	26.970	911.050	2.150
1147	25.370	911.050	2.400
1148	25.620	911.050	2.400
1149	25.870	911.050	2.400
1150	26.170	911.050	2.400
1151	26.470	911.050	2.400
1152	26.720	911.050	2.400
1153	26.970	911.050	2.400
1154	25.370	911.050	2.700
1155	25.620	911.050	2.700
1156	25.870	911.050	2.700
1157	26.170	911.050	2.700
1158	26.470	911.050	2.700
1159	26.720	911.050	2.700
1160	26.970	911.050	2.700
1161	25.370	911.050	3.000
1162	25.620	911.050	3.000
1163	25.870	911.050	3.000
1164	26.170	911.050	3.000
1165	26.470	911.050	3.000
1166	26.720	911.050	3.000
1167	26.970	911.050	3.000
1168	25.370	911.050	3.200
1169	25.620	911.050	3.200
1170	25.870	911.050	3.200
1171	26.170	911.050	3.200
1172	26.470	911.050	3.200
1173	26.720	911.050	3.200
1174	26.970	911.050	3.200
1175	21.230	911.050	24.045
1176	21.530	911.050	24.045

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1177	21.830	911.050	24.045
1178	22.130	911.050	24.045
1179	22.480	911.050	24.045
1180	22.780	911.050	24.045
1181	23.080	911.050	24.045
1182	23.380	911.050	24.045
1183	23.630	911.050	24.045
1184	23.880	911.050	24.045
1185	24.120	911.050	24.045
1186	24.370	911.050	24.045
1187	24.620	911.050	24.045
1188	24.920	911.050	24.045
1189	25.220	911.050	24.045
1190	25.520	911.050	24.045
1191	25.870	911.050	24.045
1192	26.170	911.050	24.045
1193	26.470	911.050	24.045
1194	26.770	911.050	24.045
1195	21.230	911.050	24.395
1196	21.530	911.050	24.395
1197	21.830	911.050	24.395
1198	22.130	911.050	24.395
1199	22.480	911.050	24.395
1200	22.780	911.050	24.395
1201	23.080	911.050	24.395
1202	23.380	911.050	24.395
1203	23.630	911.050	24.395
1204	23.880	911.050	24.395
1205	24.120	911.050	24.395
1206	24.370	911.050	24.395
1207	24.620	911.050	24.395
1208	24.920	911.050	24.395
1209	25.220	911.050	24.395
1210	25.520	911.050	24.395
1211	25.870	911.050	24.395
1212	26.170	911.050	24.395
1213	26.470	911.050	24.395
1214	26.770	911.050	24.395
1215	21.230	911.050	24.745
1216	21.530	911.050	24.745
1217	21.830	911.050	24.745
1218	22.130	911.050	24.745
1219	22.480	911.050	24.745
1220	22.780	911.050	24.745
1221	23.080	911.050	24.745
1222	23.380	911.050	24.745
1223	23.630	911.050	24.745
1224	23.880	911.050	24.745
1225	24.120	911.050	24.745

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1226	24.370	911.050	24.745
1227	24.620	911.050	24.745
1228	24.920	911.050	24.745
1229	25.220	911.050	24.745
1230	25.520	911.050	24.745
1231	25.870	911.050	24.745
1232	26.170	911.050	24.745
1233	26.470	911.050	24.745
1234	26.770	911.050	24.745
1235	21.230	911.050	25.045
1236	21.530	911.050	25.045
1237	21.830	911.050	25.045
1238	22.130	911.050	25.045
1239	22.480	911.050	25.045
1240	22.780	911.050	25.045
1241	23.080	911.050	25.045
1242	23.380	911.050	25.045
1243	23.630	911.050	25.045
1244	23.880	911.050	25.045
1245	24.120	911.050	25.045
1246	24.370	911.050	25.045
1247	24.620	911.050	25.045
1248	24.920	911.050	25.045
1249	25.220	911.050	25.045
1250	25.520	911.050	25.045
1251	25.870	911.050	25.045
1252	26.170	911.050	25.045
1253	26.470	911.050	25.045
1254	26.770	911.050	25.045
1255	21.230	911.050	25.345
1256	21.530	911.050	25.345
1257	21.830	911.050	25.345
1258	22.130	911.050	25.345
1259	22.480	911.050	25.345
1260	22.780	911.050	25.345
1261	23.080	911.050	25.345
1262	23.380	911.050	25.345
1263	23.630	911.050	25.345
1264	23.880	911.050	25.345
1265	24.120	911.050	25.345
1266	24.370	911.050	25.345
1267	24.620	911.050	25.345
1268	24.920	911.050	25.345
1269	25.220	911.050	25.345
1270	25.520	911.050	25.345
1271	25.870	911.050	25.345
1272	26.170	911.050	25.345
1273	26.470	911.050	25.345
1274	26.770	911.050	25.345

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1275	21.230	911.050	25.695
1276	21.530	911.050	25.695
1277	21.830	911.050	25.695
1278	22.130	911.050	25.695
1279	22.480	911.050	25.695
1280	22.780	911.050	25.695
1281	23.080	911.050	25.695
1282	23.380	911.050	25.695
1283	23.630	911.050	25.695
1284	23.880	911.050	25.695
1285	24.120	911.050	25.695
1286	24.370	911.050	25.695
1287	24.620	911.050	25.695
1288	24.920	911.050	25.695
1289	25.220	911.050	25.695
1290	25.520	911.050	25.695
1291	25.870	911.050	25.695
1292	26.170	911.050	25.695
1293	26.470	911.050	25.695
1294	26.770	911.050	25.695
1295	21.230	911.050	26.045
1296	21.530	911.050	26.045
1297	21.830	911.050	26.045
1298	22.130	911.050	26.045
1299	22.480	911.050	26.045
1300	22.780	911.050	26.045
1301	23.080	911.050	26.045
1302	23.380	911.050	26.045
1303	23.630	911.050	26.045
1304	23.880	911.050	26.045
1305	24.120	911.050	26.045
1306	24.370	911.050	26.045
1307	24.620	911.050	26.045
1308	24.920	911.050	26.045
1309	25.220	911.050	26.045
1310	25.520	911.050	26.045
1311	25.870	911.050	26.045
1312	26.170	911.050	26.045
1313	26.470	911.050	26.045
1314	26.770	911.050	26.045
1315	-0.800	911.100	21.595
1316	-0.600	911.100	21.595
1317	-0.300	911.100	21.595
1318	0.000	911.100	21.595
1319	0.300	911.100	21.595
1320	0.600	911.100	21.595
1321	0.800	911.100	21.595
1322	-0.800	911.100	21.795
1323	-0.600	911.100	21.795

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1324	-0.300	911.100	21.795
1325	0.000	911.100	21.795
1326	0.300	911.100	21.795
1327	0.600	911.100	21.795
1328	0.800	911.100	21.795
1329	-0.800	911.100	22.095
1330	-0.600	911.100	22.095
1331	-0.300	911.100	22.095
1332	0.000	911.100	22.095
1333	0.300	911.100	22.095
1334	0.600	911.100	22.095
1335	0.800	911.100	22.095
1336	-0.800	911.100	22.395
1337	-0.600	911.100	22.395
1338	-0.300	911.100	22.395
1339	0.000	911.100	22.395
1340	0.300	911.100	22.395
1341	0.600	911.100	22.395
1342	0.800	911.100	22.395
1343	-0.800	911.100	22.745
1344	-0.600	911.100	22.745
1345	-0.300	911.100	22.745
1346	0.000	911.100	22.745
1347	0.300	911.100	22.745
1348	0.600	911.100	22.745
1349	0.800	911.100	22.745
1350	-0.800	911.100	23.095
1351	-0.600	911.100	23.095
1352	-0.300	911.100	23.095
1353	0.000	911.100	23.095
1354	0.300	911.100	23.095
1355	0.600	911.100	23.095
1356	0.800	911.100	23.095
1357	-0.800	911.100	23.395
1358	-0.600	911.100	23.395
1359	-0.300	911.100	23.395
1360	-0.000	911.100	23.395
1361	0.300	911.100	23.395
1362	0.600	911.100	23.395
1363	0.800	911.100	23.395
1364	-0.800	911.100	23.745
1365	-0.600	911.100	23.745
1366	-0.300	911.100	23.745
1367	-0.000	911.100	23.745
1368	0.300	911.100	23.745
1369	0.600	911.100	23.745
1370	0.800	911.100	23.745
1371	10.230	911.100	23.995
1372	10.530	911.100	23.995

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1373	10.830	911.100	23.995
1374	11.130	911.100	23.995
1375	11.480	911.100	23.995
1376	11.730	911.100	23.995
1377	11.980	911.100	23.995
1378	12.230	911.100	23.995
1379	12.480	911.100	23.995
1380	12.730	911.100	23.995
1381	12.930	911.100	23.995
1382	13.180	911.100	23.995
1383	13.430	911.100	23.995
1384	13.680	911.100	23.995
1385	13.930	911.100	23.995
1386	14.180	911.100	23.995
1387	14.530	911.100	23.995
1388	14.830	911.100	23.995
1389	15.130	911.100	23.995
1390	15.430	911.100	23.995
1391	-0.800	911.100	24.045
1392	-0.600	911.100	24.045
1393	-0.300	911.100	24.045
1394	0.000	911.100	24.045
1395	0.300	911.100	24.045
1396	0.600	911.100	24.045
1397	0.800	911.100	24.045
1398	-0.800	911.100	24.395
1399	-0.600	911.100	24.395
1400	-0.300	911.100	24.395
1401	0.000	911.100	24.395
1402	0.300	911.100	24.395
1403	0.600	911.100	24.395
1404	0.800	911.100	24.395
1405	10.230	911.100	24.395
1406	10.530	911.100	24.395
1407	10.830	911.100	24.395
1408	11.130	911.100	24.395
1409	11.480	911.100	24.395
1410	11.730	911.100	24.395
1411	11.980	911.100	24.395
1412	12.230	911.100	24.395
1413	12.480	911.100	24.395
1414	12.730	911.100	24.395
1415	12.930	911.100	24.395
1416	13.180	911.100	24.395
1417	13.430	911.100	24.395
1418	13.680	911.100	24.395
1419	13.930	911.100	24.395
1420	14.180	911.100	24.395
1421	14.530	911.100	24.395

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1422	14.830	911.100	24.395
1423	15.130	911.100	24.395
1424	15.430	911.100	24.395
1425	-0.800	911.100	24.745
1426	-0.600	911.100	24.745
1427	-0.300	911.100	24.745
1428	-0.000	911.100	24.745
1429	0.300	911.100	24.745
1430	0.600	911.100	24.745
1431	0.800	911.100	24.745
1432	10.230	911.100	24.745
1433	10.530	911.100	24.745
1434	10.830	911.100	24.745
1435	11.130	911.100	24.745
1436	11.480	911.100	24.745
1437	11.730	911.100	24.745
1438	11.980	911.100	24.745
1439	12.230	911.100	24.745
1440	12.480	911.100	24.745
1441	12.730	911.100	24.745
1442	12.930	911.100	24.745
1443	13.180	911.100	24.745
1444	13.430	911.100	24.745
1445	13.680	911.100	24.745
1446	13.930	911.100	24.745
1447	14.180	911.100	24.745
1448	14.530	911.100	24.745
1449	14.830	911.100	24.745
1450	15.130	911.100	24.745
1451	15.430	911.100	24.745
1452	-0.800	911.100	25.045
1453	-0.600	911.100	25.045
1454	-0.300	911.100	25.045
1455	0.000	911.100	25.045
1456	0.300	911.100	25.045
1457	0.600	911.100	25.045
1458	0.800	911.100	25.045
1459	10.230	911.100	25.045
1460	10.530	911.100	25.045
1461	10.830	911.100	25.045
1462	11.130	911.100	25.045
1463	11.480	911.100	25.045
1464	11.730	911.100	25.045
1465	11.980	911.100	25.045
1466	12.230	911.100	25.045
1467	12.480	911.100	25.045
1468	12.730	911.100	25.045
1469	12.930	911.100	25.045
1470	13.180	911.100	25.045

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1471	13.430	911.100	25.045
1472	13.680	911.100	25.045
1473	13.930	911.100	25.045
1474	14.180	911.100	25.045
1475	14.530	911.100	25.045
1476	14.830	911.100	25.045
1477	15.130	911.100	25.045
1478	15.430	911.100	25.045
1479	-0.800	911.100	25.345
1480	-0.600	911.100	25.345
1481	-0.300	911.100	25.345
1482	0.000	911.100	25.345
1483	0.300	911.100	25.345
1484	0.600	911.100	25.345
1485	0.800	911.100	25.345
1486	10.230	911.100	25.345
1487	10.530	911.100	25.345
1488	10.830	911.100	25.345
1489	11.130	911.100	25.345
1490	11.480	911.100	25.345
1491	11.730	911.100	25.345
1492	11.980	911.100	25.345
1493	12.230	911.100	25.345
1494	12.480	911.100	25.345
1495	12.730	911.100	25.345
1496	12.930	911.100	25.345
1497	13.180	911.100	25.345
1498	13.430	911.100	25.345
1499	13.680	911.100	25.345
1500	13.930	911.100	25.345
1501	14.180	911.100	25.345
1502	14.530	911.100	25.345
1503	14.830	911.100	25.345
1504	15.130	911.100	25.345
1505	15.430	911.100	25.345
1506	-0.800	911.100	25.545
1507	-0.600	911.100	25.545
1508	-0.300	911.100	25.545
1509	0.000	911.100	25.545
1510	0.300	911.100	25.545
1511	0.600	911.100	25.545
1512	0.800	911.100	25.545
1513	10.230	911.100	25.695
1514	10.530	911.100	25.695
1515	10.830	911.100	25.695
1516	11.130	911.100	25.695
1517	11.480	911.100	25.695
1518	11.730	911.100	25.695
1519	11.980	911.100	25.695

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1520	12.230	911.100	25.695
1521	12.480	911.100	25.695
1522	12.730	911.100	25.695
1523	12.930	911.100	25.695
1524	13.180	911.100	25.695
1525	13.430	911.100	25.695
1526	13.680	911.100	25.695
1527	13.930	911.100	25.695
1528	14.180	911.100	25.695
1529	14.530	911.100	25.695
1530	14.830	911.100	25.695
1531	15.130	911.100	25.695
1532	15.430	911.100	25.695
1533	10.230	911.100	26.095
1534	10.530	911.100	26.095
1535	10.830	911.100	26.095
1536	11.130	911.100	26.095
1537	11.480	911.100	26.095
1538	11.730	911.100	26.095
1539	11.980	911.100	26.095
1540	12.230	911.100	26.095
1541	12.480	911.100	26.095
1542	12.730	911.100	26.095
1543	12.930	911.100	26.095
1544	13.180	911.100	26.095
1545	13.430	911.100	26.095
1546	13.680	911.100	26.095
1547	13.930	911.100	26.095
1548	14.180	911.100	26.095
1549	14.530	911.100	26.095
1550	14.830	911.100	26.095
1551	15.130	911.100	26.095
1552	15.430	911.100	26.095
1553	3.820	911.150	23.395
1554	4.170	911.150	23.395
1555	4.470	911.150	23.395
1556	4.770	911.150	23.395
1557	5.170	911.150	23.395
1558	5.470	911.150	23.395
1559	5.770	911.150	23.395
1560	6.170	911.150	23.395
1561	6.470	911.150	23.395
1562	6.770	911.150	23.395
1563	7.120	911.150	23.395
1564	3.820	911.150	23.745
1565	4.170	911.150	23.745
1566	4.470	911.150	23.745
1567	4.770	911.150	23.745
1568	5.170	911.150	23.745

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1569	5.470	911.150	23.745
1570	5.770	911.150	23.745
1571	6.170	911.150	23.745
1572	6.470	911.150	23.745
1573	6.770	911.150	23.745
1574	7.120	911.150	23.745
1575	3.820	911.150	24.045
1576	4.170	911.150	24.045
1577	4.470	911.150	24.045
1578	4.770	911.150	24.045
1579	5.170	911.150	24.045
1580	5.470	911.150	24.045
1581	5.770	911.150	24.045
1582	6.170	911.150	24.045
1583	6.470	911.150	24.045
1584	6.770	911.150	24.045
1585	7.120	911.150	24.045
1586	3.820	911.150	24.345
1587	4.170	911.150	24.345
1588	4.470	911.150	24.345
1589	4.770	911.150	24.345
1590	5.170	911.150	24.345
1591	5.470	911.150	24.345
1592	5.770	911.150	24.345
1593	6.170	911.150	24.345
1594	6.470	911.150	24.345
1595	6.770	911.150	24.345
1596	7.120	911.150	24.345
1597	3.820	911.150	24.745
1598	4.170	911.150	24.745
1599	4.470	911.150	24.745
1600	4.770	911.150	24.745
1601	5.170	911.150	24.745
1602	5.470	911.150	24.745
1603	5.770	911.150	24.745
1604	6.170	911.150	24.745
1605	6.470	911.150	24.745
1606	6.770	911.150	24.745
1607	7.120	911.150	24.745
1608	3.820	911.150	25.045
1609	4.170	911.150	25.045
1610	4.470	911.150	25.045
1611	4.770	911.150	25.045
1612	5.170	911.150	25.045
1613	5.470	911.150	25.045
1614	5.770	911.150	25.045
1615	6.170	911.150	25.045
1616	6.470	911.150	25.045
1617	6.770	911.150	25.045

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1618	7.120	911.150	25.045
1619	3.820	911.150	25.345
1620	4.170	911.150	25.345
1621	4.470	911.150	25.345
1622	4.770	911.150	25.345
1623	5.170	911.150	25.345
1624	5.470	911.150	25.345
1625	5.770	911.150	25.345
1626	6.170	911.150	25.345
1627	6.470	911.150	25.345
1628	6.770	911.150	25.345
1629	7.120	911.150	25.345
1630	3.820	911.150	25.745
1631	4.170	911.150	25.745
1632	4.470	911.150	25.745
1633	4.770	911.150	25.745
1634	5.170	911.150	25.745
1635	5.470	911.150	25.745
1636	5.770	911.150	25.745
1637	6.170	911.150	25.745
1638	6.470	911.150	25.745
1639	6.770	911.150	25.745
1640	7.120	911.150	25.745
1641	3.820	911.150	26.045
1642	4.170	911.150	26.045
1643	4.470	911.150	26.045
1644	4.770	911.150	26.045
1645	5.170	911.150	26.045
1646	5.470	911.150	26.045
1647	5.770	911.150	26.045
1648	6.170	911.150	26.045
1649	6.470	911.150	26.045
1650	6.770	911.150	26.045
1651	7.120	911.150	26.045
1652	3.820	911.150	26.345
1653	4.170	911.150	26.345
1654	4.470	911.150	26.345
1655	4.770	911.150	26.345
1656	5.170	911.150	26.345
1657	5.470	911.150	26.345
1658	5.770	911.150	26.345
1659	6.170	911.150	26.345
1660	6.470	911.150	26.345
1661	6.770	911.150	26.345
1662	7.120	911.150	26.345
1663	3.820	911.150	26.695
1664	4.170	911.150	26.695
1665	4.470	911.150	26.695
1666	4.770	911.150	26.695

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1667	5.170	911.150	26.695
1668	5.470	911.150	26.695
1669	5.770	911.150	26.695
1670	6.170	911.150	26.695
1671	6.470	911.150	26.695
1672	6.770	911.150	26.695
1673	7.120	911.150	26.695
1674	21.020	911.300	6.150
1675	21.220	911.300	6.150
1676	21.520	911.300	6.150
1677	21.820	911.300	6.150
1678	22.220	911.300	6.150
1679	22.520	911.300	6.150
1680	22.820	911.300	6.150
1681	23.120	911.300	6.150
1682	23.420	911.300	6.150
1683	23.720	911.300	6.150
1684	23.970	911.300	6.150
1685	24.270	911.300	6.150
1686	24.570	911.300	6.150
1687	24.870	911.300	6.150
1688	25.170	911.300	6.150
1689	25.470	911.300	6.150
1690	25.870	911.300	6.150
1691	26.170	911.300	6.150
1692	26.470	911.300	6.150
1693	26.670	911.300	6.150
1694	21.020	911.300	6.350
1695	21.220	911.300	6.350
1696	21.520	911.300	6.350
1697	21.820	911.300	6.350
1698	22.220	911.300	6.350
1699	22.520	911.300	6.350
1700	22.820	911.300	6.350
1701	23.120	911.300	6.350
1702	23.420	911.300	6.350
1703	23.720	911.300	6.350
1704	23.970	911.300	6.350
1705	24.270	911.300	6.350
1706	24.570	911.300	6.350
1707	24.870	911.300	6.350
1708	25.170	911.300	6.350
1709	25.470	911.300	6.350
1710	25.870	911.300	6.350
1711	26.170	911.300	6.350
1712	26.470	911.300	6.350
1713	26.670	911.300	6.350
1714	21.020	911.300	6.750
1715	21.220	911.300	6.750

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1716	21.520	911.300	6.750
1717	21.820	911.300	6.750
1718	22.220	911.300	6.750
1719	22.520	911.300	6.750
1720	22.820	911.300	6.750
1721	23.120	911.300	6.750
1722	23.420	911.300	6.750
1723	23.720	911.300	6.750
1724	23.970	911.300	6.750
1725	24.270	911.300	6.750
1726	24.570	911.300	6.750
1727	24.870	911.300	6.750
1728	25.170	911.300	6.750
1729	25.470	911.300	6.750
1730	25.870	911.300	6.750
1731	26.170	911.300	6.750
1732	26.470	911.300	6.750
1733	26.670	911.300	6.750
1734	21.020	911.300	7.050
1735	21.220	911.300	7.050
1736	21.520	911.300	7.050
1737	21.820	911.300	7.050
1738	22.220	911.300	7.050
1739	22.520	911.300	7.050
1740	22.820	911.300	7.050
1741	23.120	911.300	7.050
1742	23.420	911.300	7.050
1743	23.720	911.300	7.050
1744	23.970	911.300	7.050
1745	24.270	911.300	7.050
1746	24.570	911.300	7.050
1747	24.870	911.300	7.050
1748	25.170	911.300	7.050
1749	25.470	911.300	7.050
1750	25.870	911.300	7.050
1751	26.170	911.300	7.050
1752	26.470	911.300	7.050
1753	26.670	911.300	7.050
1754	21.020	911.300	7.350
1755	21.220	911.300	7.350
1756	21.520	911.300	7.350
1757	21.820	911.300	7.350
1758	22.220	911.300	7.350
1759	22.520	911.300	7.350
1760	22.820	911.300	7.350
1761	23.120	911.300	7.350
1762	23.420	911.300	7.350
1763	23.720	911.300	7.350
1764	23.970	911.300	7.350

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1765	24.270	911.300	7.350
1766	24.570	911.300	7.350
1767	24.870	911.300	7.350
1768	25.170	911.300	7.350
1769	25.470	911.300	7.350
1770	25.870	911.300	7.350
1771	26.170	911.300	7.350
1772	26.470	911.300	7.350
1773	26.670	911.300	7.350
1774	21.020	911.300	7.750
1775	21.220	911.300	7.750
1776	21.520	911.300	7.750
1777	21.820	911.300	7.750
1778	22.220	911.300	7.750
1779	22.520	911.300	7.750
1780	22.820	911.300	7.750
1781	23.120	911.300	7.750
1782	23.420	911.300	7.750
1783	23.720	911.300	7.750
1784	23.970	911.300	7.750
1785	24.270	911.300	7.750
1786	24.570	911.300	7.750
1787	24.870	911.300	7.750
1788	25.170	911.300	7.750
1789	25.470	911.300	7.750
1790	25.870	911.300	7.750
1791	26.170	911.300	7.750
1792	26.470	911.300	7.750
1793	26.670	911.300	7.750
1794	21.020	911.300	7.950
1795	21.220	911.300	7.950
1796	21.520	911.300	7.950
1797	21.820	911.300	7.950
1798	22.220	911.300	7.950
1799	22.520	911.300	7.950
1800	22.820	911.300	7.950
1801	23.120	911.300	7.950
1802	23.420	911.300	7.950
1803	23.720	911.300	7.950
1804	23.970	911.300	7.950
1805	24.270	911.300	7.950
1806	24.570	911.300	7.950
1807	24.870	911.300	7.950
1808	25.170	911.300	7.950
1809	25.470	911.300	7.950
1810	25.870	911.300	7.950
1811	26.170	911.300	7.950
1812	26.470	911.300	7.950
1813	26.670	911.300	7.950

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1814	21.230	911.300	17.295
1815	21.530	911.300	17.295
1816	21.830	911.300	17.295
1817	22.130	911.300	17.295
1818	22.530	911.300	17.295
1819	22.780	911.300	17.295
1820	23.030	911.300	17.295
1821	23.280	911.300	17.295
1822	23.580	911.300	17.295
1823	23.880	911.300	17.295
1824	24.120	911.300	17.295
1825	24.420	911.300	17.295
1826	24.720	911.300	17.295
1827	24.970	911.300	17.295
1828	25.220	911.300	17.295
1829	25.470	911.300	17.295
1830	25.870	911.300	17.295
1831	26.170	911.300	17.295
1832	26.470	911.300	17.295
1833	26.770	911.300	17.295
1834	21.230	911.300	17.595
1835	21.530	911.300	17.595
1836	21.830	911.300	17.595
1837	22.130	911.300	17.595
1838	22.530	911.300	17.595
1839	22.780	911.300	17.595
1840	23.030	911.300	17.595
1841	23.280	911.300	17.595
1842	23.580	911.300	17.595
1843	23.880	911.300	17.595
1844	24.120	911.300	17.595
1845	24.420	911.300	17.595
1846	24.720	911.300	17.595
1847	24.970	911.300	17.595
1848	25.220	911.300	17.595
1849	25.470	911.300	17.595
1850	25.870	911.300	17.595
1851	26.170	911.300	17.595
1852	26.470	911.300	17.595
1853	26.770	911.300	17.595
1854	21.230	911.300	17.895
1855	21.530	911.300	17.895
1856	21.830	911.300	17.895
1857	22.130	911.300	17.895
1858	22.530	911.300	17.895
1859	22.780	911.300	17.895
1860	23.030	911.300	17.895
1861	23.280	911.300	17.895
1862	23.580	911.300	17.895

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1863	23.880	911.300	17.895
1864	24.120	911.300	17.895
1865	24.420	911.300	17.895
1866	24.720	911.300	17.895
1867	24.970	911.300	17.895
1868	25.220	911.300	17.895
1869	25.470	911.300	17.895
1870	25.870	911.300	17.895
1871	26.170	911.300	17.895
1872	26.470	911.300	17.895
1873	26.770	911.300	17.895
1874	21.230	911.300	18.195
1875	21.530	911.300	18.195
1876	21.830	911.300	18.195
1877	22.130	911.300	18.195
1878	22.530	911.300	18.195
1879	22.780	911.300	18.195
1880	23.030	911.300	18.195
1881	23.280	911.300	18.195
1882	23.580	911.300	18.195
1883	23.880	911.300	18.195
1884	24.120	911.300	18.195
1885	24.420	911.300	18.195
1886	24.720	911.300	18.195
1887	24.970	911.300	18.195
1888	25.220	911.300	18.195
1889	25.470	911.300	18.195
1890	25.870	911.300	18.195
1891	26.170	911.300	18.195
1892	26.470	911.300	18.195
1893	26.770	911.300	18.195
1894	21.230	911.300	18.595
1895	21.530	911.300	18.595
1896	21.830	911.300	18.595
1897	22.130	911.300	18.595
1898	22.530	911.300	18.595
1899	22.780	911.300	18.595
1900	23.030	911.300	18.595
1901	23.280	911.300	18.595
1902	23.580	911.300	18.595
1903	23.880	911.300	18.595
1904	24.120	911.300	18.595
1905	24.420	911.300	18.595
1906	24.720	911.300	18.595
1907	24.970	911.300	18.595
1908	25.220	911.300	18.595
1909	25.470	911.300	18.595
1910	25.870	911.300	18.595
1911	26.170	911.300	18.595

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1912	26.470	911.300	18.595
1913	26.770	911.300	18.595
1914	21.230	911.300	18.845
1915	21.530	911.300	18.845
1916	21.830	911.300	18.845
1917	22.130	911.300	18.845
1918	22.530	911.300	18.845
1919	22.780	911.300	18.845
1920	23.030	911.300	18.845
1921	23.280	911.300	18.845
1922	23.580	911.300	18.845
1923	23.880	911.300	18.845
1924	24.120	911.300	18.845
1925	24.420	911.300	18.845
1926	24.720	911.300	18.845
1927	24.970	911.300	18.845
1928	25.220	911.300	18.845
1929	25.470	911.300	18.845
1930	25.870	911.300	18.845
1931	26.170	911.300	18.845
1932	26.470	911.300	18.845
1933	26.770	911.300	18.845
1934	21.230	911.300	19.095
1935	21.530	911.300	19.095
1936	21.830	911.300	19.095
1937	22.130	911.300	19.095
1938	22.530	911.300	19.095
1939	22.780	911.300	19.095
1940	23.030	911.300	19.095
1941	23.280	911.300	19.095
1942	23.580	911.300	19.095
1943	23.880	911.300	19.095
1944	24.120	911.300	19.095
1945	24.420	911.300	19.095
1946	24.720	911.300	19.095
1947	24.970	911.300	19.095
1948	25.220	911.300	19.095
1949	25.470	911.300	19.095
1950	25.870	911.300	19.095
1951	26.170	911.300	19.095
1952	26.470	911.300	19.095
1953	26.770	911.300	19.095
1954	21.230	911.300	19.295
1955	21.530	911.300	19.295
1956	21.830	911.300	19.295
1957	22.130	911.300	19.295
1958	22.530	911.300	19.295
1959	22.780	911.300	19.295
1960	23.030	911.300	19.295

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
1961	23.280	911.300	19.295
1962	23.580	911.300	19.295
1963	23.880	911.300	19.295
1964	24.120	911.300	19.295
1965	24.420	911.300	19.295
1966	24.720	911.300	19.295
1967	24.970	911.300	19.295
1968	25.220	911.300	19.295
1969	25.470	911.300	19.295
1970	25.870	911.300	19.295
1971	26.170	911.300	19.295
1972	26.470	911.300	19.295
1973	26.770	911.300	19.295
1974	21.230	911.300	19.545
1975	21.530	911.300	19.545
1976	21.830	911.300	19.545
1977	22.130	911.300	19.545
1978	22.530	911.300	19.545
1979	22.780	911.300	19.545
1980	23.030	911.300	19.545
1981	23.280	911.300	19.545
1982	23.580	911.300	19.545
1983	23.880	911.300	19.545
1984	24.120	911.300	19.545
1985	24.420	911.300	19.545
1986	24.720	911.300	19.545
1987	24.970	911.300	19.545
1988	25.220	911.300	19.545
1989	25.470	911.300	19.545
1990	25.870	911.300	19.545
1991	26.170	911.300	19.545
1992	26.470	911.300	19.545
1993	26.770	911.300	19.545
1994	21.230	911.300	19.795
1995	21.530	911.300	19.795
1996	21.830	911.300	19.795
1997	22.130	911.300	19.795
1998	22.530	911.300	19.795
1999	22.780	911.300	19.795
2000	23.030	911.300	19.795
2001	23.280	911.300	19.795
2002	23.580	911.300	19.795
2003	23.880	911.300	19.795
2004	24.120	911.300	19.795
2005	24.420	911.300	19.795
2006	24.720	911.300	19.795
2007	24.970	911.300	19.795
2008	25.220	911.300	19.795
2009	25.470	911.300	19.795

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
2010	25.870	911.300	19.795
2011	26.170	911.300	19.795
2012	26.470	911.300	19.795
2013	26.770	911.300	19.795
2014	21.230	911.300	20.195
2015	21.530	911.300	20.195
2016	21.830	911.300	20.195
2017	22.130	911.300	20.195
2018	22.530	911.300	20.195
2019	22.780	911.300	20.195
2020	23.030	911.300	20.195
2021	23.280	911.300	20.195
2022	23.580	911.300	20.195
2023	23.880	911.300	20.195
2024	24.120	911.300	20.195
2025	24.420	911.300	20.195
2026	24.720	911.300	20.195
2027	24.970	911.300	20.195
2028	25.220	911.300	20.195
2029	25.470	911.300	20.195
2030	25.870	911.300	20.195
2031	26.170	911.300	20.195
2032	26.470	911.300	20.195
2033	26.770	911.300	20.195
2034	21.230	911.300	20.495
2035	21.530	911.300	20.495
2036	21.830	911.300	20.495
2037	22.130	911.300	20.495
2038	22.530	911.300	20.495
2039	22.780	911.300	20.495
2040	23.030	911.300	20.495
2041	23.280	911.300	20.495
2042	23.580	911.300	20.495
2043	23.880	911.300	20.495
2044	24.120	911.300	20.495
2045	24.420	911.300	20.495
2046	24.720	911.300	20.495
2047	24.970	911.300	20.495
2048	25.220	911.300	20.495
2049	25.470	911.300	20.495
2050	25.870	911.300	20.495
2051	26.170	911.300	20.495
2052	26.470	911.300	20.495
2053	26.770	911.300	20.495
2054	21.230	911.300	20.795
2055	21.530	911.300	20.795
2056	21.830	911.300	20.795
2057	22.130	911.300	20.795
2058	22.530	911.300	20.795

Nodes Cont...

Node	X (m)	Y (m)	Z (m)
2059	22.780	911.300	20.795
2060	23.030	911.300	20.795
2061	23.280	911.300	20.795
2062	23.580	911.300	20.795
2063	23.880	911.300	20.795
2064	24.120	911.300	20.795
2065	24.420	911.300	20.795
2066	24.720	911.300	20.795
2067	24.970	911.300	20.795
2068	25.220	911.300	20.795
2069	25.470	911.300	20.795
2070	25.870	911.300	20.795
2071	26.170	911.300	20.795
2072	26.470	911.300	20.795
2073	26.770	911.300	20.795
2074	21.230	911.300	21.095
2075	21.530	911.300	21.095
2076	21.830	911.300	21.095
2077	22.130	911.300	21.095
2078	22.530	911.300	21.095
2079	22.780	911.300	21.095
2080	23.030	911.300	21.095
2081	23.280	911.300	21.095
2082	23.580	911.300	21.095
2083	23.880	911.300	21.095
2084	24.120	911.300	21.095
2085	24.420	911.300	21.095
2086	24.720	911.300	21.095
2087	24.970	911.300	21.095
2088	25.220	911.300	21.095
2089	25.470	911.300	21.095
2090	25.870	911.300	21.095
2091	26.170	911.300	21.095
2092	26.470	911.300	21.095
2093	26.770	911.300	21.095

Beams

Beam	Node A	Node B	Length (m)	Property	β (degrees)
1	138	1	3.200	6	0
2	145	2	3.200	7	0
3	152	3	3.200	6	0
4	161	4	3.200	6	0
5	172	5	3.200	6	0
6	1094	6	2.650	6	0
7	455	7	3.200	6	0
8	464	8	3.200	6	0
9	475	9	3.200	6	0
10	1157	10	2.650	6	0
11	563	11	3.200	6	0
12	1736	12	2.400	6	0
13	1751	13	2.400	6	0
14	633	14	3.200	7	0
15	640	15	3.200	6	0
16	698	18	3.200	8	0
17	796	21	3.200	6	0
18	803	22	3.200	6	0
19	891	25	3.200	8	0
20	951	28	3.200	6	0
21	1856	29	2.400	6	0
22	1871	30	2.400	6	0
23	969	31	3.200	6	0
24	1034	32	3.200	6	0
25	2036	33	2.400	6	0
26	2051	34	2.400	6	0
27	1332	35	2.600	6	0
28	1064	36	3.200	6	0
29	1455	37	2.600	6	0
30	1613	38	2.550	6	0
31	1461	39	2.600	6	0
32	1476	40	2.600	6	0
33	1237	41	2.650	6	0
34	1252	42	2.650	6	0

Plates

Plate	Node A	Node B	Node C	Node D	Property
1000	71	72	17	16	2
1001	72	73	19	17	2
1002	73	74	20	19	2
1003	74	75	23	20	2
1004	75	76	24	23	2
1005	76	77	26	24	2
1006	78	79	43	27	2
1007	79	80	44	43	2
1008	80	81	45	44	2
1009	81	82	46	45	2
1010	82	83	47	46	2
1011	83	84	48	47	2
1012	113	114	50	49	3
1013	114	115	51	50	3
1014	115	116	52	51	3
1015	116	117	53	52	3
1016	117	118	54	53	3
1017	118	119	55	54	3
1018	119	120	56	55	3
1019	120	121	57	56	3
1020	121	122	58	57	3
1021	122	123	59	58	3
1022	124	125	61	60	3
1023	125	126	62	61	3
1024	126	127	63	62	3
1025	127	128	64	63	3
1026	128	129	65	64	3
1027	129	130	66	65	3
1028	130	131	67	66	3
1029	131	132	68	67	3
1030	132	133	69	68	3
1031	133	134	70	69	3
1032	92	93	72	71	2
1033	93	94	73	72	2
1034	94	95	74	73	2
1035	95	96	75	74	2
1036	96	97	76	75	2
1037	97	98	77	76	2
1038	99	100	79	78	2
1039	100	101	80	79	2
1040	101	102	81	80	2
1041	102	103	82	81	2
1042	103	104	83	82	2
1043	104	105	84	83	2
1044	106	107	86	85	2
1045	107	108	87	86	2
1046	108	109	88	87	2
1047	109	110	89	88	2
1048	110	111	90	89	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1049	111	112	91	90	2
1050	135	136	93	92	2
1051	136	137	94	93	2
1052	137	138	95	94	2
1053	138	139	96	95	2
1054	139	140	97	96	2
1055	140	141	98	97	2
1056	142	143	100	99	2
1057	143	144	101	100	2
1058	144	145	102	101	2
1059	145	146	103	102	2
1060	146	147	104	103	2
1061	147	148	105	104	2
1062	149	150	107	106	2
1063	150	151	108	107	2
1064	151	152	109	108	2
1065	152	153	110	109	2
1066	153	154	111	110	2
1067	154	155	112	111	2
1068	156	157	114	113	3
1069	157	158	115	114	3
1070	158	159	116	115	3
1071	159	160	117	116	3
1072	160	161	118	117	3
1073	161	162	119	118	3
1074	162	163	120	119	3
1075	163	164	121	120	3
1076	164	165	122	121	3
1077	165	166	123	122	3
1078	167	168	125	124	3
1079	168	169	126	125	3
1080	169	170	127	126	3
1081	170	171	128	127	3
1082	171	172	129	128	3
1083	172	173	130	129	3
1084	173	174	131	130	3
1085	174	175	132	131	3
1086	175	176	133	132	3
1087	176	177	134	133	3
1088	178	179	136	135	2
1089	179	180	137	136	2
1090	180	181	138	137	2
1091	181	182	139	138	2
1092	182	183	140	139	2
1093	183	184	141	140	2
1094	185	186	143	142	2
1095	186	187	144	143	2
1096	187	188	145	144	2
1097	188	189	146	145	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1098	189	190	147	146	2
1099	190	191	148	147	2
1100	192	193	150	149	2
1101	193	194	151	150	2
1102	194	195	152	151	2
1103	195	196	153	152	2
1104	196	197	154	153	2
1105	197	198	155	154	2
1106	199	200	157	156	3
1107	200	201	158	157	3
1108	201	202	159	158	3
1109	202	203	160	159	3
1110	203	204	161	160	3
1111	204	205	162	161	3
1112	205	206	163	162	3
1113	206	207	164	163	3
1114	207	208	165	164	3
1115	208	209	166	165	3
1116	210	211	168	167	3
1117	211	212	169	168	3
1118	212	213	170	169	3
1119	213	214	171	170	3
1120	214	215	172	171	3
1121	215	216	173	172	3
1122	216	217	174	173	3
1123	217	218	175	174	3
1124	218	219	176	175	3
1125	219	220	177	176	3
1126	221	222	179	178	2
1127	222	223	180	179	2
1128	223	224	181	180	2
1129	224	225	182	181	2
1130	225	226	183	182	2
1131	226	227	184	183	2
1132	228	229	186	185	2
1133	229	230	187	186	2
1134	230	231	188	187	2
1135	231	232	189	188	2
1136	232	233	190	189	2
1137	233	234	191	190	2
1138	235	236	193	192	2
1139	236	237	194	193	2
1140	237	238	195	194	2
1141	238	239	196	195	2
1142	239	240	197	196	2
1143	240	241	198	197	2
1144	242	243	200	199	3
1145	243	244	201	200	3
1146	244	245	202	201	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1147	245	246	203	202	3
1148	246	247	204	203	3
1149	247	248	205	204	3
1150	248	249	206	205	3
1151	249	250	207	206	3
1152	250	251	208	207	3
1153	251	252	209	208	3
1154	253	254	211	210	3
1155	254	255	212	211	3
1156	255	256	213	212	3
1157	256	257	214	213	3
1158	257	258	215	214	3
1159	258	259	216	215	3
1160	259	260	217	216	3
1161	260	261	218	217	3
1162	261	262	219	218	3
1163	262	263	220	219	3
1164	264	265	222	221	2
1165	265	266	223	222	2
1166	266	267	224	223	2
1167	267	268	225	224	2
1168	268	269	226	225	2
1169	269	270	227	226	2
1170	271	272	229	228	2
1171	272	273	230	229	2
1172	273	274	231	230	2
1173	274	275	232	231	2
1174	275	276	233	232	2
1175	276	277	234	233	2
1176	278	279	236	235	2
1177	279	280	237	236	2
1178	280	281	238	237	2
1179	281	282	239	238	2
1180	282	283	240	239	2
1181	283	284	241	240	2
1182	285	286	243	242	3
1183	286	287	244	243	3
1184	287	288	245	244	3
1185	288	289	246	245	3
1186	289	290	247	246	3
1187	290	291	248	247	3
1188	291	292	249	248	3
1189	292	293	250	249	3
1190	293	294	251	250	3
1191	294	295	252	251	3
1192	296	297	254	253	3
1193	297	298	255	254	3
1194	298	299	256	255	3
1195	299	300	257	256	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1196	300	301	258	257	3
1197	301	302	259	258	3
1198	302	303	260	259	3
1199	303	304	261	260	3
1200	304	305	262	261	3
1201	305	306	263	262	3
1202	307	308	279	278	2
1203	308	309	280	279	2
1204	309	310	281	280	2
1205	310	311	282	281	2
1206	311	312	283	282	2
1207	312	313	284	283	2
1208	314	315	286	285	3
1209	315	316	287	286	3
1210	316	317	288	287	3
1211	317	318	289	288	3
1212	318	319	290	289	3
1213	319	320	291	290	3
1214	320	321	292	291	3
1215	321	322	293	292	3
1216	322	323	294	293	3
1217	323	324	295	294	3
1218	325	326	297	296	3
1219	326	327	298	297	3
1220	327	328	299	298	3
1221	328	329	300	299	3
1222	329	330	301	300	3
1223	330	331	302	301	3
1224	331	332	303	302	3
1225	332	333	304	303	3
1226	333	334	305	304	3
1227	334	335	306	305	3
1228	336	337	308	307	2
1229	337	338	309	308	2
1230	338	339	310	309	2
1231	339	340	311	310	2
1232	340	341	312	311	2
1233	341	342	313	312	2
1234	343	344	315	314	3
1235	344	345	316	315	3
1236	345	346	317	316	3
1237	346	347	318	317	3
1238	347	348	319	318	3
1239	348	349	320	319	3
1240	349	350	321	320	3
1241	350	351	322	321	3
1242	351	352	323	322	3
1243	352	353	324	323	3
1244	354	355	326	325	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1245	355	356	327	326	3
1246	356	357	328	327	3
1247	357	358	329	328	3
1248	358	359	330	329	3
1249	359	360	331	330	3
1250	360	361	332	331	3
1251	361	362	333	332	3
1252	362	363	334	333	3
1253	363	364	335	334	3
1254	365	366	337	336	2
1255	366	367	338	337	2
1256	367	368	339	338	2
1257	368	369	340	339	2
1258	369	370	341	340	2
1259	370	371	342	341	2
1260	372	373	344	343	3
1261	373	374	345	344	3
1262	374	375	346	345	3
1263	375	376	347	346	3
1264	376	377	348	347	3
1265	377	378	349	348	3
1266	378	379	350	349	3
1267	379	380	351	350	3
1268	380	381	352	351	3
1269	381	382	353	352	3
1270	383	384	355	354	3
1271	384	385	356	355	3
1272	385	386	357	356	3
1273	386	387	358	357	3
1274	387	388	359	358	3
1275	388	389	360	359	3
1276	389	390	361	360	3
1277	390	391	362	361	3
1278	391	392	363	362	3
1279	392	393	364	363	3
1280	394	395	373	372	3
1281	395	396	374	373	3
1282	396	397	375	374	3
1283	397	398	376	375	3
1284	398	399	377	376	3
1285	399	400	378	377	3
1286	400	401	379	378	3
1287	401	402	380	379	3
1288	402	403	381	380	3
1289	403	404	382	381	3
1290	405	406	384	383	3
1291	406	407	385	384	3
1292	407	408	386	385	3
1293	408	409	387	386	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1294	409	410	388	387	3
1295	410	411	389	388	3
1296	411	412	390	389	3
1297	412	413	391	390	3
1298	413	414	392	391	3
1299	414	415	393	392	3
1300	416	417	366	365	2
1301	417	418	367	366	2
1302	418	419	368	367	2
1303	419	420	369	368	2
1304	420	421	370	369	2
1305	421	422	371	370	2
1306	430	431	395	394	3
1307	431	432	396	395	3
1308	432	433	397	396	3
1309	433	434	398	397	3
1310	434	435	399	398	3
1311	435	436	400	399	3
1312	436	437	401	400	3
1313	437	438	402	401	3
1314	438	439	403	402	3
1315	439	440	404	403	3
1316	441	442	406	405	3
1317	442	443	407	406	3
1318	443	444	408	407	3
1319	444	445	409	408	3
1320	445	446	410	409	3
1321	446	447	411	410	3
1322	447	448	412	411	3
1323	448	449	413	412	3
1324	449	450	414	413	3
1325	450	451	415	414	3
1326	423	424	417	416	2
1327	424	425	418	417	2
1328	425	426	419	418	2
1329	426	427	420	419	2
1330	427	428	421	420	2
1331	428	429	422	421	2
1332	452	453	424	423	2
1333	453	454	425	424	2
1334	454	455	426	425	2
1335	455	456	427	426	2
1336	456	457	428	427	2
1337	457	458	429	428	2
1338	459	460	431	430	3
1339	460	461	432	431	3
1340	461	462	433	432	3
1341	462	463	434	433	3
1342	463	464	435	434	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1343	464	465	436	435	3
1344	465	466	437	436	3
1345	466	467	438	437	3
1346	467	468	439	438	3
1347	468	469	440	439	3
1348	470	471	442	441	3
1349	471	472	443	442	3
1350	472	473	444	443	3
1351	473	474	445	444	3
1352	474	475	446	445	3
1353	475	476	447	446	3
1354	476	477	448	447	3
1355	477	478	449	448	3
1356	478	479	450	449	3
1357	479	480	451	450	3
1358	481	482	453	452	2
1359	482	483	454	453	2
1360	483	484	455	454	2
1361	484	485	456	455	2
1362	485	486	457	456	2
1363	486	487	458	457	2
1364	488	489	460	459	3
1365	489	490	461	460	3
1366	490	491	462	461	3
1367	491	492	463	462	3
1368	492	493	464	463	3
1369	493	494	465	464	3
1370	494	495	466	465	3
1371	495	496	467	466	3
1372	496	497	468	467	3
1373	497	498	469	468	3
1374	499	500	471	470	3
1375	500	501	472	471	3
1376	501	502	473	472	3
1377	502	503	474	473	3
1378	503	504	475	474	3
1379	504	505	476	475	3
1380	505	506	477	476	3
1381	506	507	478	477	3
1382	507	508	479	478	3
1383	508	509	480	479	3
1384	510	511	482	481	2
1385	511	512	483	482	2
1386	512	513	484	483	2
1387	513	514	485	484	2
1388	514	515	486	485	2
1389	515	516	487	486	2
1390	517	518	489	488	3
1391	518	519	490	489	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1392	519	520	491	490	3
1393	520	521	492	491	3
1394	521	522	493	492	3
1395	522	523	494	493	3
1396	523	524	495	494	3
1397	524	525	496	495	3
1398	525	526	497	496	3
1399	526	527	498	497	3
1400	528	529	500	499	3
1401	529	530	501	500	3
1402	530	531	502	501	3
1403	531	532	503	502	3
1404	532	533	504	503	3
1405	533	534	505	504	3
1406	534	535	506	505	3
1407	535	536	507	506	3
1408	536	537	508	507	3
1409	537	538	509	508	3
1410	546	547	540	539	2
1411	547	548	541	540	2
1412	548	549	542	541	2
1413	549	550	543	542	2
1414	550	551	544	543	2
1415	551	552	545	544	2
1416	553	554	547	546	2
1417	554	555	548	547	2
1418	555	556	549	548	2
1419	556	557	550	549	2
1420	557	558	551	550	2
1421	558	559	552	551	2
1422	560	561	554	553	2
1423	561	562	555	554	2
1424	562	563	556	555	2
1425	563	564	557	556	2
1426	564	565	558	557	2
1427	565	566	559	558	2
1428	567	568	561	560	2
1429	568	569	562	561	2
1430	569	570	563	562	2
1431	570	571	564	563	2
1432	571	572	565	564	2
1433	572	573	566	565	2
1434	574	575	568	567	2
1435	575	576	569	568	2
1436	576	577	570	569	2
1437	577	578	571	570	2
1438	578	579	572	571	2
1439	579	580	573	572	2
1440	595	596	575	574	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1441	596	597	576	575	2
1442	597	598	577	576	2
1443	598	599	578	577	2
1444	599	600	579	578	2
1445	600	601	580	579	2
1446	602	603	582	581	2
1447	603	604	583	582	2
1448	604	605	584	583	2
1449	605	606	585	584	2
1450	606	607	586	585	2
1451	607	608	587	586	2
1452	609	610	589	588	2
1453	610	611	590	589	2
1454	611	612	591	590	2
1455	612	613	592	591	2
1456	613	614	593	592	2
1457	614	615	594	593	2
1458	616	617	603	602	2
1459	617	618	604	603	2
1460	618	619	605	604	2
1461	619	620	606	605	2
1462	620	621	607	606	2
1463	621	622	608	607	2
1464	623	624	610	609	2
1465	624	625	611	610	2
1466	625	626	612	611	2
1467	626	627	613	612	2
1468	627	628	614	613	2
1469	628	629	615	614	2
1470	630	631	617	616	2
1471	631	632	618	617	2
1472	632	633	619	618	2
1473	633	634	620	619	2
1474	634	635	621	620	2
1475	635	636	622	621	2
1476	637	638	624	623	2
1477	638	639	625	624	2
1478	639	640	626	625	2
1479	640	641	627	626	2
1480	641	642	628	627	2
1481	642	643	629	628	2
1482	644	645	631	630	2
1483	645	646	632	631	2
1484	646	647	633	632	2
1485	647	648	634	633	2
1486	648	649	635	634	2
1487	649	650	636	635	2
1488	651	652	638	637	2
1489	652	653	639	638	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1490	653	654	640	639	2
1491	654	655	641	640	2
1492	655	656	642	641	2
1493	656	657	643	642	2
1494	658	659	645	644	2
1495	659	660	646	645	2
1496	660	661	647	646	2
1497	661	662	648	647	2
1498	662	663	649	648	2
1499	663	664	650	649	2
1500	665	666	652	651	2
1501	666	667	653	652	2
1502	667	668	654	653	2
1503	668	669	655	654	2
1504	669	670	656	655	2
1505	670	671	657	656	2
1506	672	673	659	658	2
1507	673	674	660	659	2
1508	674	675	661	660	2
1509	675	676	662	661	2
1510	676	677	663	662	2
1511	677	678	664	663	2
1512	679	680	666	665	2
1513	680	681	667	666	2
1514	681	682	668	667	2
1515	682	683	669	668	2
1516	683	684	670	669	2
1517	684	685	671	670	2
1518	691	692	687	686	5
1519	692	693	688	687	5
1520	693	694	689	688	5
1521	694	695	690	689	5
1522	696	697	692	691	5
1523	697	698	693	692	5
1524	698	699	694	693	5
1525	699	700	695	694	5
1526	701	702	697	696	5
1527	702	703	698	697	5
1528	703	704	699	698	5
1529	704	705	700	699	5
1530	706	707	702	701	5
1531	707	708	703	702	5
1532	708	709	704	703	5
1533	709	710	705	704	5
1534	711	712	707	706	5
1535	712	713	708	707	5
1536	713	714	709	708	5
1537	714	715	710	709	5
1538	716	717	712	711	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1539	717	718	713	712	5
1540	718	719	714	713	5
1541	719	720	715	714	5
1542	721	722	717	716	5
1543	722	723	718	717	5
1544	723	724	719	718	5
1545	724	725	720	719	5
1546	726	727	722	721	5
1547	727	728	723	722	5
1548	728	729	724	723	5
1549	729	730	725	724	5
1550	731	732	727	726	5
1551	732	733	728	727	5
1552	733	734	729	728	5
1553	734	735	730	729	5
1554	750	751	732	731	5
1555	751	752	733	732	5
1556	752	753	734	733	5
1557	753	754	735	734	5
1558	755	756	737	736	2
1559	756	757	738	737	2
1560	757	758	739	738	2
1561	758	759	740	739	2
1562	759	760	741	740	2
1563	760	761	742	741	2
1564	762	763	744	743	2
1565	763	764	745	744	2
1566	764	765	746	745	2
1567	765	766	747	746	2
1568	766	767	748	747	2
1569	767	768	749	748	2
1570	769	770	751	750	5
1571	770	771	752	751	5
1572	771	772	753	752	5
1573	772	773	754	753	5
1574	774	775	756	755	2
1575	775	776	757	756	2
1576	776	777	758	757	2
1577	777	778	759	758	2
1578	778	779	760	759	2
1579	779	780	761	760	2
1580	781	782	763	762	2
1581	782	783	764	763	2
1582	783	784	765	764	2
1583	784	785	766	765	2
1584	785	786	767	766	2
1585	786	787	768	767	2
1586	788	789	770	769	5
1587	789	790	771	770	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1588	790	791	772	771	5
1589	791	792	773	772	5
1590	793	794	775	774	2
1591	794	795	776	775	2
1592	795	796	777	776	2
1593	796	797	778	777	2
1594	797	798	779	778	2
1595	798	799	780	779	2
1596	800	801	782	781	2
1597	801	802	783	782	2
1598	802	803	784	783	2
1599	803	804	785	784	2
1600	804	805	786	785	2
1601	805	806	787	786	2
1602	807	808	789	788	5
1603	808	809	790	789	5
1604	809	810	791	790	5
1605	810	811	792	791	5
1606	812	813	794	793	2
1607	813	814	795	794	2
1608	814	815	796	795	2
1609	815	816	797	796	2
1610	816	817	798	797	2
1611	817	818	799	798	2
1612	819	820	801	800	2
1613	820	821	802	801	2
1614	821	822	803	802	2
1615	822	823	804	803	2
1616	823	824	805	804	2
1617	824	825	806	805	2
1618	826	827	808	807	5
1619	827	828	809	808	5
1620	828	829	810	809	5
1621	829	830	811	810	5
1622	831	832	813	812	2
1623	832	833	814	813	2
1624	833	834	815	814	2
1625	834	835	816	815	2
1626	835	836	817	816	2
1627	836	837	818	817	2
1628	838	839	820	819	2
1629	839	840	821	820	2
1630	840	841	822	821	2
1631	841	842	823	822	2
1632	842	843	824	823	2
1633	843	844	825	824	2
1634	845	846	827	826	5
1635	846	847	828	827	5
1636	847	848	829	828	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1637	848	849	830	829	5
1638	850	851	832	831	2
1639	851	852	833	832	2
1640	852	853	834	833	2
1641	853	854	835	834	2
1642	854	855	836	835	2
1643	855	856	837	836	2
1644	857	858	839	838	2
1645	858	859	840	839	2
1646	859	860	841	840	2
1647	860	861	842	841	2
1648	861	862	843	842	2
1649	862	863	844	843	2
1650	864	865	846	845	5
1651	865	866	847	846	5
1652	866	867	848	847	5
1653	867	868	849	848	5
1654	869	870	865	864	5
1655	870	871	866	865	5
1656	871	872	867	866	5
1657	872	873	868	867	5
1658	874	875	870	869	5
1659	875	876	871	870	5
1660	876	877	872	871	5
1661	877	878	873	872	5
1662	879	880	875	874	5
1663	880	881	876	875	5
1664	881	882	877	876	5
1665	882	883	878	877	5
1666	884	885	880	879	5
1667	885	886	881	880	5
1668	886	887	882	881	5
1669	887	888	883	882	5
1670	889	890	885	884	5
1671	890	891	886	885	5
1672	891	892	887	886	5
1673	892	893	888	887	5
1674	894	895	890	889	5
1675	895	896	891	890	5
1676	896	897	892	891	5
1677	897	898	893	892	5
1678	899	900	895	894	5
1679	900	901	896	895	5
1680	901	902	897	896	5
1681	902	903	898	897	5
1682	904	905	900	899	5
1683	905	906	901	900	5
1684	906	907	902	901	5
1685	907	908	903	902	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1686	909	910	905	904	5
1687	910	911	906	905	5
1688	911	912	907	906	5
1689	912	913	908	907	5
1690	914	915	910	909	5
1691	915	916	911	910	5
1692	916	917	912	911	5
1693	917	918	913	912	5
1694	919	920	915	914	5
1695	920	921	916	915	5
1696	921	922	917	916	5
1697	922	923	918	917	5
1698	931	932	920	919	5
1699	932	933	921	920	5
1700	933	934	922	921	5
1701	934	935	923	922	5
1702	936	937	925	924	3
1703	937	938	926	925	3
1704	938	939	927	926	3
1705	939	940	928	927	3
1706	940	941	929	928	3
1707	941	942	930	929	3
1708	943	944	932	931	5
1709	944	945	933	932	5
1710	945	946	934	933	5
1711	946	947	935	934	5
1712	948	949	937	936	3
1713	949	950	938	937	3
1714	950	951	939	938	3
1715	951	952	940	939	3
1716	952	953	941	940	3
1717	953	954	942	941	3
1718	955	956	944	943	5
1719	956	957	945	944	5
1720	957	958	946	945	5
1721	958	959	947	946	5
1722	960	961	949	948	3
1723	961	962	950	949	3
1724	962	963	951	950	3
1725	963	964	952	951	3
1726	964	965	953	952	3
1727	965	966	954	953	3
1728	967	968	956	955	5
1729	968	969	957	956	5
1730	969	970	958	957	5
1731	970	971	959	958	5
1732	972	973	961	960	3
1733	973	974	962	961	3
1734	974	975	963	962	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1735	975	976	964	963	3
1736	976	977	965	964	3
1737	977	978	966	965	3
1738	979	980	968	967	5
1739	980	981	969	968	5
1740	981	982	970	969	5
1741	982	983	971	970	5
1742	989	990	973	972	3
1743	990	991	974	973	3
1744	991	992	975	974	3
1745	992	993	976	975	3
1746	993	994	977	976	3
1747	994	995	978	977	3
1748	984	985	980	979	5
1749	985	986	981	980	5
1750	986	987	982	981	5
1751	987	988	983	982	5
1752	996	997	990	989	3
1753	997	998	991	990	3
1754	998	999	992	991	3
1755	999	1000	993	992	3
1756	1000	1001	994	993	3
1757	1001	1002	995	994	3
1758	1003	1004	997	996	3
1759	1004	1005	998	997	3
1760	1005	1006	999	998	3
1761	1006	1007	1000	999	3
1762	1007	1008	1001	1000	3
1763	1008	1009	1002	1001	3
1764	1010	1011	1004	1003	3
1765	1011	1012	1005	1004	3
1766	1012	1013	1006	1005	3
1767	1013	1014	1007	1006	3
1768	1014	1015	1008	1007	3
1769	1015	1016	1009	1008	3
1770	1017	1018	1011	1010	3
1771	1018	1019	1012	1011	3
1772	1019	1020	1013	1012	3
1773	1020	1021	1014	1013	3
1774	1021	1022	1015	1014	3
1775	1022	1023	1016	1015	3
1776	1024	1025	1018	1017	3
1777	1025	1026	1019	1018	3
1778	1026	1027	1020	1019	3
1779	1027	1028	1021	1020	3
1780	1028	1029	1022	1021	3
1781	1029	1030	1023	1022	3
1782	1031	1032	1025	1024	3
1783	1032	1033	1026	1025	3

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1784	1033	1034	1027	1026	3
1785	1034	1035	1028	1027	3
1786	1035	1036	1029	1028	3
1787	1036	1037	1030	1029	3
1788	1038	1039	1032	1031	3
1789	1039	1040	1033	1032	3
1790	1040	1041	1034	1033	3
1791	1041	1042	1035	1034	3
1792	1042	1043	1036	1035	3
1793	1043	1044	1037	1036	3
1794	1045	1046	1039	1038	3
1795	1046	1047	1040	1039	3
1796	1047	1048	1041	1040	3
1797	1048	1049	1042	1041	3
1798	1049	1050	1043	1042	3
1799	1050	1051	1044	1043	3
1800	1057	1058	1053	1052	1
1801	1058	1059	1054	1053	1
1802	1059	1060	1055	1054	1
1803	1060	1061	1056	1055	1
1804	1062	1063	1058	1057	1
1805	1063	1064	1059	1058	1
1806	1064	1065	1060	1059	1
1807	1065	1066	1061	1060	1
1808	1067	1068	1063	1062	1
1809	1068	1069	1064	1063	1
1810	1069	1070	1065	1064	1
1811	1070	1071	1066	1065	1
1812	1072	1073	1068	1067	1
1813	1073	1074	1069	1068	1
1814	1074	1075	1070	1069	1
1815	1075	1076	1071	1070	1
1816	1084	1085	1078	1077	2
1817	1085	1086	1079	1078	2
1818	1086	1087	1080	1079	2
1819	1087	1088	1081	1080	2
1820	1088	1089	1082	1081	2
1821	1089	1090	1083	1082	2
1822	1091	1092	1085	1084	2
1823	1092	1093	1086	1085	2
1824	1093	1094	1087	1086	2
1825	1094	1095	1088	1087	2
1826	1095	1096	1089	1088	2
1827	1096	1097	1090	1089	2
1828	1098	1099	1092	1091	2
1829	1099	1100	1093	1092	2
1830	1100	1101	1094	1093	2
1831	1101	1102	1095	1094	2
1832	1102	1103	1096	1095	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1833	1103	1104	1097	1096	2
1834	1105	1106	1099	1098	2
1835	1106	1107	1100	1099	2
1836	1107	1108	1101	1100	2
1837	1108	1109	1102	1101	2
1838	1109	1110	1103	1102	2
1839	1110	1111	1104	1103	2
1840	1112	1113	1106	1105	2
1841	1113	1114	1107	1106	2
1842	1114	1115	1108	1107	2
1843	1115	1116	1109	1108	2
1844	1116	1117	1110	1109	2
1845	1117	1118	1111	1110	2
1846	1119	1120	1113	1112	2
1847	1120	1121	1114	1113	2
1848	1121	1122	1115	1114	2
1849	1122	1123	1116	1115	2
1850	1123	1124	1117	1116	2
1851	1124	1125	1118	1117	2
1852	1126	1127	1120	1119	2
1853	1127	1128	1121	1120	2
1854	1128	1129	1122	1121	2
1855	1129	1130	1123	1122	2
1856	1130	1131	1124	1123	2
1857	1131	1132	1125	1124	2
1858	1133	1134	1127	1126	2
1859	1134	1135	1128	1127	2
1860	1135	1136	1129	1128	2
1861	1136	1137	1130	1129	2
1862	1137	1138	1131	1130	2
1863	1138	1139	1132	1131	2
1864	1140	1141	1134	1133	2
1865	1141	1142	1135	1134	2
1866	1142	1143	1136	1135	2
1867	1143	1144	1137	1136	2
1868	1144	1145	1138	1137	2
1869	1145	1146	1139	1138	2
1870	1147	1148	1141	1140	2
1871	1148	1149	1142	1141	2
1872	1149	1150	1143	1142	2
1873	1150	1151	1144	1143	2
1874	1151	1152	1145	1144	2
1875	1152	1153	1146	1145	2
1876	1154	1155	1148	1147	2
1877	1155	1156	1149	1148	2
1878	1156	1157	1150	1149	2
1879	1157	1158	1151	1150	2
1880	1158	1159	1152	1151	2
1881	1159	1160	1153	1152	2

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1882	1161	1162	1155	1154	2
1883	1162	1163	1156	1155	2
1884	1163	1164	1157	1156	2
1885	1164	1165	1158	1157	2
1886	1165	1166	1159	1158	2
1887	1166	1167	1160	1159	2
1888	1168	1169	1162	1161	2
1889	1169	1170	1163	1162	2
1890	1170	1171	1164	1163	2
1891	1171	1172	1165	1164	2
1892	1172	1173	1166	1165	2
1893	1173	1174	1167	1166	2
1894	1195	1196	1176	1175	4
1895	1196	1197	1177	1176	4
1896	1197	1198	1178	1177	4
1897	1198	1199	1179	1178	4
1898	1199	1200	1180	1179	4
1899	1200	1201	1181	1180	4
1900	1201	1202	1182	1181	4
1901	1202	1203	1183	1182	4
1902	1203	1204	1184	1183	4
1903	1204	1205	1185	1184	4
1904	1205	1206	1186	1185	4
1905	1206	1207	1187	1186	4
1906	1207	1208	1188	1187	4
1907	1208	1209	1189	1188	4
1908	1209	1210	1190	1189	4
1909	1210	1211	1191	1190	4
1910	1211	1212	1192	1191	4
1911	1212	1213	1193	1192	4
1912	1213	1214	1194	1193	4
1913	1215	1216	1196	1195	4
1914	1216	1217	1197	1196	4
1915	1217	1218	1198	1197	4
1916	1218	1219	1199	1198	4
1917	1219	1220	1200	1199	4
1918	1220	1221	1201	1200	4
1919	1221	1222	1202	1201	4
1920	1222	1223	1203	1202	4
1921	1223	1224	1204	1203	4
1922	1224	1225	1205	1204	4
1923	1225	1226	1206	1205	4
1924	1226	1227	1207	1206	4
1925	1227	1228	1208	1207	4
1926	1228	1229	1209	1208	4
1927	1229	1230	1210	1209	4
1928	1230	1231	1211	1210	4
1929	1231	1232	1212	1211	4
1930	1232	1233	1213	1212	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1931	1233	1234	1214	1213	4
1932	1235	1236	1216	1215	4
1933	1236	1237	1217	1216	4
1934	1237	1238	1218	1217	4
1935	1238	1239	1219	1218	4
1936	1239	1240	1220	1219	4
1937	1240	1241	1221	1220	4
1938	1241	1242	1222	1221	4
1939	1242	1243	1223	1222	4
1940	1243	1244	1224	1223	4
1941	1244	1245	1225	1224	4
1942	1245	1246	1226	1225	4
1943	1246	1247	1227	1226	4
1944	1247	1248	1228	1227	4
1945	1248	1249	1229	1228	4
1946	1249	1250	1230	1229	4
1947	1250	1251	1231	1230	4
1948	1251	1252	1232	1231	4
1949	1252	1253	1233	1232	4
1950	1253	1254	1234	1233	4
1951	1255	1256	1236	1235	4
1952	1256	1257	1237	1236	4
1953	1257	1258	1238	1237	4
1954	1258	1259	1239	1238	4
1955	1259	1260	1240	1239	4
1956	1260	1261	1241	1240	4
1957	1261	1262	1242	1241	4
1958	1262	1263	1243	1242	4
1959	1263	1264	1244	1243	4
1960	1264	1265	1245	1244	4
1961	1265	1266	1246	1245	4
1962	1266	1267	1247	1246	4
1963	1267	1268	1248	1247	4
1964	1268	1269	1249	1248	4
1965	1269	1270	1250	1249	4
1966	1270	1271	1251	1250	4
1967	1271	1272	1252	1251	4
1968	1272	1273	1253	1252	4
1969	1273	1274	1254	1253	4
1970	1275	1276	1256	1255	4
1971	1276	1277	1257	1256	4
1972	1277	1278	1258	1257	4
1973	1278	1279	1259	1258	4
1974	1279	1280	1260	1259	4
1975	1280	1281	1261	1260	4
1976	1281	1282	1262	1261	4
1977	1282	1283	1263	1262	4
1978	1283	1284	1264	1263	4
1979	1284	1285	1265	1264	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
1980	1285	1286	1266	1265	4
1981	1286	1287	1267	1266	4
1982	1287	1288	1268	1267	4
1983	1288	1289	1269	1268	4
1984	1289	1290	1270	1269	4
1985	1290	1291	1271	1270	4
1986	1291	1292	1272	1271	4
1987	1292	1293	1273	1272	4
1988	1293	1294	1274	1273	4
1989	1295	1296	1276	1275	4
1990	1296	1297	1277	1276	4
1991	1297	1298	1278	1277	4
1992	1298	1299	1279	1278	4
1993	1299	1300	1280	1279	4
1994	1300	1301	1281	1280	4
1995	1301	1302	1282	1281	4
1996	1302	1303	1283	1282	4
1997	1303	1304	1284	1283	4
1998	1304	1305	1285	1284	4
1999	1305	1306	1286	1285	4
2000	1306	1307	1287	1286	4
2001	1307	1308	1288	1287	4
2002	1308	1309	1289	1288	4
2003	1309	1310	1290	1289	4
2004	1310	1311	1291	1290	4
2005	1311	1312	1292	1291	4
2006	1312	1313	1293	1292	4
2007	1313	1314	1294	1293	4
2008	1322	1323	1316	1315	4
2009	1323	1324	1317	1316	4
2010	1324	1325	1318	1317	4
2011	1325	1326	1319	1318	4
2012	1326	1327	1320	1319	4
2013	1327	1328	1321	1320	4
2014	1329	1330	1323	1322	4
2015	1330	1331	1324	1323	4
2016	1331	1332	1325	1324	4
2017	1332	1333	1326	1325	4
2018	1333	1334	1327	1326	4
2019	1334	1335	1328	1327	4
2020	1336	1337	1330	1329	4
2021	1337	1338	1331	1330	4
2022	1338	1339	1332	1331	4
2023	1339	1340	1333	1332	4
2024	1340	1341	1334	1333	4
2025	1341	1342	1335	1334	4
2026	1343	1344	1337	1336	4
2027	1344	1345	1338	1337	4
2028	1345	1346	1339	1338	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2029	1346	1347	1340	1339	4
2030	1347	1348	1341	1340	4
2031	1348	1349	1342	1341	4
2032	1350	1351	1344	1343	4
2033	1351	1352	1345	1344	4
2034	1352	1353	1346	1345	4
2035	1353	1354	1347	1346	4
2036	1354	1355	1348	1347	4
2037	1355	1356	1349	1348	4
2038	1357	1358	1351	1350	4
2039	1358	1359	1352	1351	4
2040	1359	1360	1353	1352	4
2041	1360	1361	1354	1353	4
2042	1361	1362	1355	1354	4
2043	1362	1363	1356	1355	4
2044	1364	1365	1358	1357	4
2045	1365	1366	1359	1358	4
2046	1366	1367	1360	1359	4
2047	1367	1368	1361	1360	4
2048	1368	1369	1362	1361	4
2049	1369	1370	1363	1362	4
2050	1391	1392	1365	1364	4
2051	1392	1393	1366	1365	4
2052	1393	1394	1367	1366	4
2053	1394	1395	1368	1367	4
2054	1395	1396	1369	1368	4
2055	1396	1397	1370	1369	4
2056	1405	1406	1372	1371	4
2057	1406	1407	1373	1372	4
2058	1407	1408	1374	1373	4
2059	1408	1409	1375	1374	4
2060	1409	1410	1376	1375	4
2061	1410	1411	1377	1376	4
2062	1411	1412	1378	1377	4
2063	1412	1413	1379	1378	4
2064	1413	1414	1380	1379	4
2065	1414	1415	1381	1380	4
2066	1415	1416	1382	1381	4
2067	1416	1417	1383	1382	4
2068	1417	1418	1384	1383	4
2069	1418	1419	1385	1384	4
2070	1419	1420	1386	1385	4
2071	1420	1421	1387	1386	4
2072	1421	1422	1388	1387	4
2073	1422	1423	1389	1388	4
2074	1423	1424	1390	1389	4
2075	1398	1399	1392	1391	4
2076	1399	1400	1393	1392	4
2077	1400	1401	1394	1393	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2078	1401	1402	1395	1394	4
2079	1402	1403	1396	1395	4
2080	1403	1404	1397	1396	4
2081	1425	1426	1399	1398	4
2082	1426	1427	1400	1399	4
2083	1427	1428	1401	1400	4
2084	1428	1429	1402	1401	4
2085	1429	1430	1403	1402	4
2086	1430	1431	1404	1403	4
2087	1432	1433	1406	1405	4
2088	1433	1434	1407	1406	4
2089	1434	1435	1408	1407	4
2090	1435	1436	1409	1408	4
2091	1436	1437	1410	1409	4
2092	1437	1438	1411	1410	4
2093	1438	1439	1412	1411	4
2094	1439	1440	1413	1412	4
2095	1440	1441	1414	1413	4
2096	1441	1442	1415	1414	4
2097	1442	1443	1416	1415	4
2098	1443	1444	1417	1416	4
2099	1444	1445	1418	1417	4
2100	1445	1446	1419	1418	4
2101	1446	1447	1420	1419	4
2102	1447	1448	1421	1420	4
2103	1448	1449	1422	1421	4
2104	1449	1450	1423	1422	4
2105	1450	1451	1424	1423	4
2106	1452	1453	1426	1425	4
2107	1453	1454	1427	1426	4
2108	1454	1455	1428	1427	4
2109	1455	1456	1429	1428	4
2110	1456	1457	1430	1429	4
2111	1457	1458	1431	1430	4
2112	1459	1460	1433	1432	4
2113	1460	1461	1434	1433	4
2114	1461	1462	1435	1434	4
2115	1462	1463	1436	1435	4
2116	1463	1464	1437	1436	4
2117	1464	1465	1438	1437	4
2118	1465	1466	1439	1438	4
2119	1466	1467	1440	1439	4
2120	1467	1468	1441	1440	4
2121	1468	1469	1442	1441	4
2122	1469	1470	1443	1442	4
2123	1470	1471	1444	1443	4
2124	1471	1472	1445	1444	4
2125	1472	1473	1446	1445	4
2126	1473	1474	1447	1446	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2127	1474	1475	1448	1447	4
2128	1475	1476	1449	1448	4
2129	1476	1477	1450	1449	4
2130	1477	1478	1451	1450	4
2131	1479	1480	1453	1452	4
2132	1480	1481	1454	1453	4
2133	1481	1482	1455	1454	4
2134	1482	1483	1456	1455	4
2135	1483	1484	1457	1456	4
2136	1484	1485	1458	1457	4
2137	1486	1487	1460	1459	4
2138	1487	1488	1461	1460	4
2139	1488	1489	1462	1461	4
2140	1489	1490	1463	1462	4
2141	1490	1491	1464	1463	4
2142	1491	1492	1465	1464	4
2143	1492	1493	1466	1465	4
2144	1493	1494	1467	1466	4
2145	1494	1495	1468	1467	4
2146	1495	1496	1469	1468	4
2147	1496	1497	1470	1469	4
2148	1497	1498	1471	1470	4
2149	1498	1499	1472	1471	4
2150	1499	1500	1473	1472	4
2151	1500	1501	1474	1473	4
2152	1501	1502	1475	1474	4
2153	1502	1503	1476	1475	4
2154	1503	1504	1477	1476	4
2155	1504	1505	1478	1477	4
2156	1506	1507	1480	1479	4
2157	1507	1508	1481	1480	4
2158	1508	1509	1482	1481	4
2159	1509	1510	1483	1482	4
2160	1510	1511	1484	1483	4
2161	1511	1512	1485	1484	4
2162	1513	1514	1487	1486	4
2163	1514	1515	1488	1487	4
2164	1515	1516	1489	1488	4
2165	1516	1517	1490	1489	4
2166	1517	1518	1491	1490	4
2167	1518	1519	1492	1491	4
2168	1519	1520	1493	1492	4
2169	1520	1521	1494	1493	4
2170	1521	1522	1495	1494	4
2171	1522	1523	1496	1495	4
2172	1523	1524	1497	1496	4
2173	1524	1525	1498	1497	4
2174	1525	1526	1499	1498	4
2175	1526	1527	1500	1499	4

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2176	1527	1528	1501	1500	4
2177	1528	1529	1502	1501	4
2178	1529	1530	1503	1502	4
2179	1530	1531	1504	1503	4
2180	1531	1532	1505	1504	4
2181	1533	1534	1514	1513	4
2182	1534	1535	1515	1514	4
2183	1535	1536	1516	1515	4
2184	1536	1537	1517	1516	4
2185	1537	1538	1518	1517	4
2186	1538	1539	1519	1518	4
2187	1539	1540	1520	1519	4
2188	1540	1541	1521	1520	4
2189	1541	1542	1522	1521	4
2190	1542	1543	1523	1522	4
2191	1543	1544	1524	1523	4
2192	1544	1545	1525	1524	4
2193	1545	1546	1526	1525	4
2194	1546	1547	1527	1526	4
2195	1547	1548	1528	1527	4
2196	1548	1549	1529	1528	4
2197	1549	1550	1530	1529	4
2198	1550	1551	1531	1530	4
2199	1551	1552	1532	1531	4
2200	1564	1565	1554	1553	5
2201	1565	1566	1555	1554	5
2202	1566	1567	1556	1555	5
2203	1567	1568	1557	1556	5
2204	1568	1569	1558	1557	5
2205	1569	1570	1559	1558	5
2206	1570	1571	1560	1559	5
2207	1571	1572	1561	1560	5
2208	1572	1573	1562	1561	5
2209	1573	1574	1563	1562	5
2210	1575	1576	1565	1564	5
2211	1576	1577	1566	1565	5
2212	1577	1578	1567	1566	5
2213	1578	1579	1568	1567	5
2214	1579	1580	1569	1568	5
2215	1580	1581	1570	1569	5
2216	1581	1582	1571	1570	5
2217	1582	1583	1572	1571	5
2218	1583	1584	1573	1572	5
2219	1584	1585	1574	1573	5
2220	1586	1587	1576	1575	5
2221	1587	1588	1577	1576	5
2222	1588	1589	1578	1577	5
2223	1589	1590	1579	1578	5
2224	1590	1591	1580	1579	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2225	1591	1592	1581	1580	5
2226	1592	1593	1582	1581	5
2227	1593	1594	1583	1582	5
2228	1594	1595	1584	1583	5
2229	1595	1596	1585	1584	5
2230	1597	1598	1587	1586	5
2231	1598	1599	1588	1587	5
2232	1599	1600	1589	1588	5
2233	1600	1601	1590	1589	5
2234	1601	1602	1591	1590	5
2235	1602	1603	1592	1591	5
2236	1603	1604	1593	1592	5
2237	1604	1605	1594	1593	5
2238	1605	1606	1595	1594	5
2239	1606	1607	1596	1595	5
2240	1608	1609	1598	1597	5
2241	1609	1610	1599	1598	5
2242	1610	1611	1600	1599	5
2243	1611	1612	1601	1600	5
2244	1612	1613	1602	1601	5
2245	1613	1614	1603	1602	5
2246	1614	1615	1604	1603	5
2247	1615	1616	1605	1604	5
2248	1616	1617	1606	1605	5
2249	1617	1618	1607	1606	5
2250	1619	1620	1609	1608	5
2251	1620	1621	1610	1609	5
2252	1621	1622	1611	1610	5
2253	1622	1623	1612	1611	5
2254	1623	1624	1613	1612	5
2255	1624	1625	1614	1613	5
2256	1625	1626	1615	1614	5
2257	1626	1627	1616	1615	5
2258	1627	1628	1617	1616	5
2259	1628	1629	1618	1617	5
2260	1630	1631	1620	1619	5
2261	1631	1632	1621	1620	5
2262	1632	1633	1622	1621	5
2263	1633	1634	1623	1622	5
2264	1634	1635	1624	1623	5
2265	1635	1636	1625	1624	5
2266	1636	1637	1626	1625	5
2267	1637	1638	1627	1626	5
2268	1638	1639	1628	1627	5
2269	1639	1640	1629	1628	5
2270	1641	1642	1631	1630	5
2271	1642	1643	1632	1631	5
2272	1643	1644	1633	1632	5
2273	1644	1645	1634	1633	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2274	1645	1646	1635	1634	5
2275	1646	1647	1636	1635	5
2276	1647	1648	1637	1636	5
2277	1648	1649	1638	1637	5
2278	1649	1650	1639	1638	5
2279	1650	1651	1640	1639	5
2280	1652	1653	1642	1641	5
2281	1653	1654	1643	1642	5
2282	1654	1655	1644	1643	5
2283	1655	1656	1645	1644	5
2284	1656	1657	1646	1645	5
2285	1657	1658	1647	1646	5
2286	1658	1659	1648	1647	5
2287	1659	1660	1649	1648	5
2288	1660	1661	1650	1649	5
2289	1661	1662	1651	1650	5
2290	1663	1664	1653	1652	5
2291	1664	1665	1654	1653	5
2292	1665	1666	1655	1654	5
2293	1666	1667	1656	1655	5
2294	1667	1668	1657	1656	5
2295	1668	1669	1658	1657	5
2296	1669	1670	1659	1658	5
2297	1670	1671	1660	1659	5
2298	1671	1672	1661	1660	5
2299	1672	1673	1662	1661	5
2300	1694	1695	1675	1674	5
2301	1695	1696	1676	1675	5
2302	1696	1697	1677	1676	5
2303	1697	1698	1678	1677	5
2304	1698	1699	1679	1678	5
2305	1699	1700	1680	1679	5
2306	1700	1701	1681	1680	5
2307	1701	1702	1682	1681	5
2308	1702	1703	1683	1682	5
2309	1703	1704	1684	1683	5
2310	1704	1705	1685	1684	5
2311	1705	1706	1686	1685	5
2312	1706	1707	1687	1686	5
2313	1707	1708	1688	1687	5
2314	1708	1709	1689	1688	5
2315	1709	1710	1690	1689	5
2316	1710	1711	1691	1690	5
2317	1711	1712	1692	1691	5
2318	1712	1713	1693	1692	5
2319	1714	1715	1695	1694	5
2320	1715	1716	1696	1695	5
2321	1716	1717	1697	1696	5
2322	1717	1718	1698	1697	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2323	1718	1719	1699	1698	5
2324	1719	1720	1700	1699	5
2325	1720	1721	1701	1700	5
2326	1721	1722	1702	1701	5
2327	1722	1723	1703	1702	5
2328	1723	1724	1704	1703	5
2329	1724	1725	1705	1704	5
2330	1725	1726	1706	1705	5
2331	1726	1727	1707	1706	5
2332	1727	1728	1708	1707	5
2333	1728	1729	1709	1708	5
2334	1729	1730	1710	1709	5
2335	1730	1731	1711	1710	5
2336	1731	1732	1712	1711	5
2337	1732	1733	1713	1712	5
2338	1734	1735	1715	1714	5
2339	1735	1736	1716	1715	5
2340	1736	1737	1717	1716	5
2341	1737	1738	1718	1717	5
2342	1738	1739	1719	1718	5
2343	1739	1740	1720	1719	5
2344	1740	1741	1721	1720	5
2345	1741	1742	1722	1721	5
2346	1742	1743	1723	1722	5
2347	1743	1744	1724	1723	5
2348	1744	1745	1725	1724	5
2349	1745	1746	1726	1725	5
2350	1746	1747	1727	1726	5
2351	1747	1748	1728	1727	5
2352	1748	1749	1729	1728	5
2353	1749	1750	1730	1729	5
2354	1750	1751	1731	1730	5
2355	1751	1752	1732	1731	5
2356	1752	1753	1733	1732	5
2357	1754	1755	1735	1734	5
2358	1755	1756	1736	1735	5
2359	1756	1757	1737	1736	5
2360	1757	1758	1738	1737	5
2361	1758	1759	1739	1738	5
2362	1759	1760	1740	1739	5
2363	1760	1761	1741	1740	5
2364	1761	1762	1742	1741	5
2365	1762	1763	1743	1742	5
2366	1763	1764	1744	1743	5
2367	1764	1765	1745	1744	5
2368	1765	1766	1746	1745	5
2369	1766	1767	1747	1746	5
2370	1767	1768	1748	1747	5
2371	1768	1769	1749	1748	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2372	1769	1770	1750	1749	5
2373	1770	1771	1751	1750	5
2374	1771	1772	1752	1751	5
2375	1772	1773	1753	1752	5
2376	1774	1775	1755	1754	5
2377	1775	1776	1756	1755	5
2378	1776	1777	1757	1756	5
2379	1777	1778	1758	1757	5
2380	1778	1779	1759	1758	5
2381	1779	1780	1760	1759	5
2382	1780	1781	1761	1760	5
2383	1781	1782	1762	1761	5
2384	1782	1783	1763	1762	5
2385	1783	1784	1764	1763	5
2386	1784	1785	1765	1764	5
2387	1785	1786	1766	1765	5
2388	1786	1787	1767	1766	5
2389	1787	1788	1768	1767	5
2390	1788	1789	1769	1768	5
2391	1789	1790	1770	1769	5
2392	1790	1791	1771	1770	5
2393	1791	1792	1772	1771	5
2394	1792	1793	1773	1772	5
2395	1794	1795	1775	1774	5
2396	1795	1796	1776	1775	5
2397	1796	1797	1777	1776	5
2398	1797	1798	1778	1777	5
2399	1798	1799	1779	1778	5
2400	1799	1800	1780	1779	5
2401	1800	1801	1781	1780	5
2402	1801	1802	1782	1781	5
2403	1802	1803	1783	1782	5
2404	1803	1804	1784	1783	5
2405	1804	1805	1785	1784	5
2406	1805	1806	1786	1785	5
2407	1806	1807	1787	1786	5
2408	1807	1808	1788	1787	5
2409	1808	1809	1789	1788	5
2410	1809	1810	1790	1789	5
2411	1810	1811	1791	1790	5
2412	1811	1812	1792	1791	5
2413	1812	1813	1793	1792	5
2414	1834	1835	1815	1814	5
2415	1835	1836	1816	1815	5
2416	1836	1837	1817	1816	5
2417	1837	1838	1818	1817	5
2418	1838	1839	1819	1818	5
2419	1839	1840	1820	1819	5
2420	1840	1841	1821	1820	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2421	1841	1842	1822	1821	5
2422	1842	1843	1823	1822	5
2423	1843	1844	1824	1823	5
2424	1844	1845	1825	1824	5
2425	1845	1846	1826	1825	5
2426	1846	1847	1827	1826	5
2427	1847	1848	1828	1827	5
2428	1848	1849	1829	1828	5
2429	1849	1850	1830	1829	5
2430	1850	1851	1831	1830	5
2431	1851	1852	1832	1831	5
2432	1852	1853	1833	1832	5
2433	1854	1855	1835	1834	5
2434	1855	1856	1836	1835	5
2435	1856	1857	1837	1836	5
2436	1857	1858	1838	1837	5
2437	1858	1859	1839	1838	5
2438	1859	1860	1840	1839	5
2439	1860	1861	1841	1840	5
2440	1861	1862	1842	1841	5
2441	1862	1863	1843	1842	5
2442	1863	1864	1844	1843	5
2443	1864	1865	1845	1844	5
2444	1865	1866	1846	1845	5
2445	1866	1867	1847	1846	5
2446	1867	1868	1848	1847	5
2447	1868	1869	1849	1848	5
2448	1869	1870	1850	1849	5
2449	1870	1871	1851	1850	5
2450	1871	1872	1852	1851	5
2451	1872	1873	1853	1852	5
2452	1874	1875	1855	1854	5
2453	1875	1876	1856	1855	5
2454	1876	1877	1857	1856	5
2455	1877	1878	1858	1857	5
2456	1878	1879	1859	1858	5
2457	1879	1880	1860	1859	5
2458	1880	1881	1861	1860	5
2459	1881	1882	1862	1861	5
2460	1882	1883	1863	1862	5
2461	1883	1884	1864	1863	5
2462	1884	1885	1865	1864	5
2463	1885	1886	1866	1865	5
2464	1886	1887	1867	1866	5
2465	1887	1888	1868	1867	5
2466	1888	1889	1869	1868	5
2467	1889	1890	1870	1869	5
2468	1890	1891	1871	1870	5
2469	1891	1892	1872	1871	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2470	1892	1893	1873	1872	5
2471	1894	1895	1875	1874	5
2472	1895	1896	1876	1875	5
2473	1896	1897	1877	1876	5
2474	1897	1898	1878	1877	5
2475	1898	1899	1879	1878	5
2476	1899	1900	1880	1879	5
2477	1900	1901	1881	1880	5
2478	1901	1902	1882	1881	5
2479	1902	1903	1883	1882	5
2480	1903	1904	1884	1883	5
2481	1904	1905	1885	1884	5
2482	1905	1906	1886	1885	5
2483	1906	1907	1887	1886	5
2484	1907	1908	1888	1887	5
2485	1908	1909	1889	1888	5
2486	1909	1910	1890	1889	5
2487	1910	1911	1891	1890	5
2488	1911	1912	1892	1891	5
2489	1912	1913	1893	1892	5
2490	1914	1915	1895	1894	5
2491	1915	1916	1896	1895	5
2492	1916	1917	1897	1896	5
2493	1917	1918	1898	1897	5
2494	1918	1919	1899	1898	5
2495	1919	1920	1900	1899	5
2496	1920	1921	1901	1900	5
2497	1921	1922	1902	1901	5
2498	1922	1923	1903	1902	5
2499	1923	1924	1904	1903	5
2500	1924	1925	1905	1904	5
2501	1925	1926	1906	1905	5
2502	1926	1927	1907	1906	5
2503	1927	1928	1908	1907	5
2504	1928	1929	1909	1908	5
2505	1929	1930	1910	1909	5
2506	1930	1931	1911	1910	5
2507	1931	1932	1912	1911	5
2508	1932	1933	1913	1912	5
2509	1934	1935	1915	1914	5
2510	1935	1936	1916	1915	5
2511	1936	1937	1917	1916	5
2512	1937	1938	1918	1917	5
2513	1938	1939	1919	1918	5
2514	1939	1940	1920	1919	5
2515	1940	1941	1921	1920	5
2516	1941	1942	1922	1921	5
2517	1942	1943	1923	1922	5
2518	1943	1944	1924	1923	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2519	1944	1945	1925	1924	5
2520	1945	1946	1926	1925	5
2521	1946	1947	1927	1926	5
2522	1947	1948	1928	1927	5
2523	1948	1949	1929	1928	5
2524	1949	1950	1930	1929	5
2525	1950	1951	1931	1930	5
2526	1951	1952	1932	1931	5
2527	1952	1953	1933	1932	5
2528	1954	1955	1935	1934	5
2529	1955	1956	1936	1935	5
2530	1956	1957	1937	1936	5
2531	1957	1958	1938	1937	5
2532	1958	1959	1939	1938	5
2533	1959	1960	1940	1939	5
2534	1960	1961	1941	1940	5
2535	1961	1962	1942	1941	5
2536	1962	1963	1943	1942	5
2537	1963	1964	1944	1943	5
2538	1964	1965	1945	1944	5
2539	1965	1966	1946	1945	5
2540	1966	1967	1947	1946	5
2541	1967	1968	1948	1947	5
2542	1968	1969	1949	1948	5
2543	1969	1970	1950	1949	5
2544	1970	1971	1951	1950	5
2545	1971	1972	1952	1951	5
2546	1972	1973	1953	1952	5
2547	1974	1975	1955	1954	5
2548	1975	1976	1956	1955	5
2549	1976	1977	1957	1956	5
2550	1977	1978	1958	1957	5
2551	1978	1979	1959	1958	5
2552	1979	1980	1960	1959	5
2553	1980	1981	1961	1960	5
2554	1981	1982	1962	1961	5
2555	1982	1983	1963	1962	5
2556	1983	1984	1964	1963	5
2557	1984	1985	1965	1964	5
2558	1985	1986	1966	1965	5
2559	1986	1987	1967	1966	5
2560	1987	1988	1968	1967	5
2561	1988	1989	1969	1968	5
2562	1989	1990	1970	1969	5
2563	1990	1991	1971	1970	5
2564	1991	1992	1972	1971	5
2565	1992	1993	1973	1972	5
2566	1994	1995	1975	1974	5
2567	1995	1996	1976	1975	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2568	1996	1997	1977	1976	5
2569	1997	1998	1978	1977	5
2570	1998	1999	1979	1978	5
2571	1999	2000	1980	1979	5
2572	2000	2001	1981	1980	5
2573	2001	2002	1982	1981	5
2574	2002	2003	1983	1982	5
2575	2003	2004	1984	1983	5
2576	2004	2005	1985	1984	5
2577	2005	2006	1986	1985	5
2578	2006	2007	1987	1986	5
2579	2007	2008	1988	1987	5
2580	2008	2009	1989	1988	5
2581	2009	2010	1990	1989	5
2582	2010	2011	1991	1990	5
2583	2011	2012	1992	1991	5
2584	2012	2013	1993	1992	5
2585	2014	2015	1995	1994	5
2586	2015	2016	1996	1995	5
2587	2016	2017	1997	1996	5
2588	2017	2018	1998	1997	5
2589	2018	2019	1999	1998	5
2590	2019	2020	2000	1999	5
2591	2020	2021	2001	2000	5
2592	2021	2022	2002	2001	5
2593	2022	2023	2003	2002	5
2594	2023	2024	2004	2003	5
2595	2024	2025	2005	2004	5
2596	2025	2026	2006	2005	5
2597	2026	2027	2007	2006	5
2598	2027	2028	2008	2007	5
2599	2028	2029	2009	2008	5
2600	2029	2030	2010	2009	5
2601	2030	2031	2011	2010	5
2602	2031	2032	2012	2011	5
2603	2032	2033	2013	2012	5
2604	2034	2035	2015	2014	5
2605	2035	2036	2016	2015	5
2606	2036	2037	2017	2016	5
2607	2037	2038	2018	2017	5
2608	2038	2039	2019	2018	5
2609	2039	2040	2020	2019	5
2610	2040	2041	2021	2020	5
2611	2041	2042	2022	2021	5
2612	2042	2043	2023	2022	5
2613	2043	2044	2024	2023	5
2614	2044	2045	2025	2024	5
2615	2045	2046	2026	2025	5
2616	2046	2047	2027	2026	5

Plates Cont...

Plate	Node A	Node B	Node C	Node D	Property
2617	2047	2048	2028	2027	5
2618	2048	2049	2029	2028	5
2619	2049	2050	2030	2029	5
2620	2050	2051	2031	2030	5
2621	2051	2052	2032	2031	5
2622	2052	2053	2033	2032	5
2623	2054	2055	2035	2034	5
2624	2055	2056	2036	2035	5
2625	2056	2057	2037	2036	5
2626	2057	2058	2038	2037	5
2627	2058	2059	2039	2038	5
2628	2059	2060	2040	2039	5
2629	2060	2061	2041	2040	5
2630	2061	2062	2042	2041	5
2631	2062	2063	2043	2042	5
2632	2063	2064	2044	2043	5
2633	2064	2065	2045	2044	5
2634	2065	2066	2046	2045	5
2635	2066	2067	2047	2046	5
2636	2067	2068	2048	2047	5
2637	2068	2069	2049	2048	5
2638	2069	2070	2050	2049	5
2639	2070	2071	2051	2050	5
2640	2071	2072	2052	2051	5
2641	2072	2073	2053	2052	5
2642	2074	2075	2055	2054	5
2643	2075	2076	2056	2055	5
2644	2076	2077	2057	2056	5
2645	2077	2078	2058	2057	5
2646	2078	2079	2059	2058	5
2647	2079	2080	2060	2059	5
2648	2080	2081	2061	2060	5
2649	2081	2082	2062	2061	5
2650	2082	2083	2063	2062	5
2651	2083	2084	2064	2063	5
2652	2084	2085	2065	2064	5
2653	2085	2086	2066	2065	5
2654	2086	2087	2067	2066	5
2655	2087	2088	2068	2067	5
2656	2088	2089	2069	2068	5
2657	2089	2090	2070	2069	5
2658	2090	2091	2071	2070	5
2659	2091	2092	2072	2071	5
2660	2092	2093	2073	2072	5

Section Properties

Prop	Section	Area (cm^2)	I_{yy} (cm^4)	I_{zz} (cm^4)	J (cm^4)	Material
6	Rect 0.60x0.60	3.6E+3	1.08E+6	1.08E+6	1.82E+6	CONCRETE
7	Rect 0.50x0.65	3.25E+3	1.14E+6	677E+3	1.43E+6	CONCRETE
8	Rect 0.50x0.75	3.75E+3	1.76E+6	781E+3	1.83E+6	CONCRETE

Plate Thickness

Prop	Node A (cm)	Node B (cm)	Node C (cm)	Node D (cm)	Material
1	30.000	30.000	30.000	30.000	CONCRETE
2	35.000	35.000	35.000	35.000	CONCRETE
3	40.000	40.000	40.000	40.000	CONCRETE
4	45.000	45.000	45.000	45.000	CONCRETE
5	50.000	50.000	50.000	50.000	CONCRETE

Materials

Mat	Name	E (kN/mm^2)	ν	Density (kg/m^3)	α (/°C)
1	STEEL	205.000	0.300	7.83E+3	12E -6
2	STAINLESSSTEEL	197.930	0.300	7.83E+3	18E -6
3	ALUMINUM	68.948	0.330	2.71E+3	23E -6
4	CONCRETE	21.718	0.170	2.4E+3	10E -6

Supports

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
16	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
17	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
19	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
20	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
23	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
24	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
26	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
27	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
43	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
44	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
45	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
46	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
47	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
48	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
49	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
50	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
51	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
52	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
53	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
54	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
55	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
56	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
57	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
58	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
59	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
60	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
61	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
62	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
63	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
64	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
65	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
66	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
67	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
68	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
69	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
70	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
71	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
72	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
73	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
74	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
75	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
76	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
77	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
78	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
79	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
80	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
81	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
82	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
83	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
84	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
85	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
86	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
87	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
88	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
89	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
90	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
91	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
92	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
93	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
94	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
95	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
96	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
97	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
98	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
99	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
100	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
101	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
102	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
103	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
104	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
105	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
106	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
107	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
108	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
109	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
110	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
111	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
112	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
113	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
114	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
115	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
116	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
117	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
118	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
119	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
120	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
121	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
122	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
123	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
124	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
125	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
126	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
127	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
128	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
129	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
130	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
131	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
132	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
133	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
134	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
135	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
136	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
137	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
138	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
139	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
140	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
141	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
142	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
143	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
144	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
145	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
146	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
147	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
148	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
149	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
150	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
151	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
152	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
153	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
154	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
155	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
156	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
157	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
158	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
159	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
160	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
161	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
162	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
163	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
164	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
165	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
166	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
167	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
168	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
169	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
170	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
171	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
172	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
173	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
174	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
175	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
176	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
177	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
178	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
179	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
180	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
181	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
182	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
183	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
184	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
185	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
186	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
187	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
188	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
189	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
190	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
191	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
192	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
193	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
194	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
195	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
196	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
197	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
198	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
199	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
200	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
201	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
202	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
203	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
204	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
205	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
206	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
207	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
208	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
209	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
210	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
211	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
212	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
213	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
214	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
215	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
216	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
217	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
218	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
219	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
220	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
221	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
222	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
223	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
224	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
225	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
226	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
227	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
228	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
229	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
230	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
231	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
232	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
233	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
234	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
235	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
236	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
237	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
238	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
239	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
240	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
241	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
242	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
243	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
244	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
245	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
246	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
247	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
248	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
249	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
250	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
251	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
252	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
253	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
254	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
255	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
256	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
257	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
258	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
259	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
260	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
261	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
262	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
263	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
264	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
265	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
266	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
267	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
268	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
269	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
270	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
271	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
272	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
273	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
274	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
275	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
276	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
277	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
278	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
279	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
280	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
281	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
282	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
283	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
284	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
285	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
286	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
287	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
288	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
289	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
290	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
291	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
292	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
293	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
294	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
295	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
296	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
297	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
298	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
299	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
300	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
301	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
302	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
303	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
304	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
305	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
306	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
307	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
308	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
309	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
310	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
311	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
312	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
313	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
314	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
315	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
316	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
317	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
318	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
319	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
320	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
321	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
322	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
323	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
324	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
325	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
326	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
327	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
328	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
329	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
330	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
331	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
332	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
333	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
334	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
335	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
336	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
337	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
338	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
339	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
340	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
341	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
342	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
343	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
344	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
345	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
346	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
347	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
348	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
349	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
350	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
351	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
352	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
353	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
354	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
355	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
356	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
357	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
358	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
359	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
360	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
361	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
362	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
363	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
364	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
365	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
366	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
367	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
368	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
369	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
370	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
371	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
372	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
373	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
374	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
375	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
376	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
377	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
378	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
379	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
380	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
381	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
382	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
383	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
384	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
385	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
386	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
387	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
388	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
389	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
390	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
391	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
392	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
393	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
394	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
395	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
396	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
397	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
398	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
399	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
400	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
401	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
402	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
403	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
404	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
405	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
406	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
407	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
408	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
409	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
410	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
411	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
412	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
413	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
414	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
415	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
416	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
417	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
418	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
419	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
420	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
421	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
422	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
423	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
424	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
425	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
426	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
427	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
428	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
429	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
430	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
431	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
432	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
433	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
434	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
435	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
436	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
437	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
438	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
439	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
440	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
441	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
442	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
443	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
444	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
445	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
446	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
447	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
448	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
449	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
450	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
451	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
452	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
453	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
454	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
455	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
456	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
457	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
458	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
459	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
460	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
461	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
462	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
463	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
464	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
465	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
466	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
467	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
468	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
469	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
470	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
471	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
472	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
473	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
474	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
475	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
476	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
477	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
478	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
479	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
480	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
481	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
482	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
483	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
484	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
485	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
486	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
487	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
488	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
489	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
490	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
491	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
492	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
493	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
494	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
495	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
496	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
497	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
498	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
499	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
500	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
501	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
502	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
503	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
504	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
505	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
506	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
507	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
508	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
509	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
510	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
511	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
512	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
513	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
514	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
515	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
516	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
517	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
518	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
519	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
520	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
521	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
522	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
523	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
524	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
525	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
526	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
527	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
528	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
529	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
530	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
531	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
532	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
533	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
534	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
535	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
536	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
537	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
538	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
539	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
540	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
541	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
542	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
543	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
544	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
545	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
546	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
547	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
548	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
549	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
550	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
551	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
552	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
553	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
554	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
555	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
556	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
557	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
558	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
559	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
560	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
561	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
562	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
563	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
564	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
565	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
566	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
567	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
568	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
569	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
570	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
571	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
572	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
573	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
574	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
575	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
576	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
577	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
578	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
579	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
580	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
581	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
582	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
583	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
584	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
585	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
586	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
587	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
588	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
589	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
590	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
591	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
592	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
593	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
594	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
595	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
596	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
597	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
598	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
599	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
600	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
601	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
602	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
603	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
604	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
605	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
606	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
607	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
608	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
609	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
610	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
611	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
612	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
613	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
614	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
615	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
616	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
617	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
618	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
619	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
620	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
621	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
622	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
623	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
624	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
625	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
626	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
627	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
628	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
629	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
630	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
631	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
632	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
633	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
634	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
635	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
636	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
637	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
638	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
639	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
640	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
641	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
642	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
643	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
644	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
645	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
646	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
647	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
648	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
649	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
650	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
651	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
652	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
653	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
654	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
655	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
656	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
657	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
658	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
659	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
660	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
661	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
662	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
663	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
664	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
665	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
666	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
667	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
668	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
669	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
670	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
671	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
672	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
673	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
674	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
675	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
676	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
677	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
678	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
679	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
680	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
681	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
682	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
683	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
684	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
685	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
686	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
687	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
688	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
689	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
690	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
691	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
692	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
693	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
694	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
695	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
696	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
697	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
698	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
699	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
700	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
701	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
702	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
703	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
704	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
705	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
706	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
707	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
708	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
709	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
710	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
711	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
712	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
713	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
714	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
715	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
716	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
717	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
718	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
719	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
720	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
721	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
722	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
723	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
724	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
725	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
726	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
727	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
728	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
729	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
730	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
731	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
732	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
733	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
734	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
735	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
736	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
737	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
738	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
739	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
740	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
741	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
742	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
743	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
744	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
745	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
746	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
747	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
748	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
749	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
750	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
751	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
752	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
753	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
754	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
755	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
756	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
757	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
758	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
759	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
760	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
761	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
762	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
763	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
764	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
765	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
766	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
767	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
768	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
769	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
770	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
771	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
772	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
773	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
774	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
775	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
776	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
777	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
778	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
779	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
780	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
781	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
782	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
783	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
784	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
785	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
786	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
787	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
788	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
789	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
790	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
791	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
792	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
793	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
794	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
795	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
796	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
797	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
798	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
799	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
800	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
801	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
802	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
803	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
804	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
805	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
806	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
807	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
808	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
809	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
810	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
811	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
812	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
813	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
814	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
815	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
816	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
817	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
818	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
819	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
820	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
821	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
822	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
823	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
824	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
825	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
826	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
827	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
828	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
829	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
830	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
831	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
832	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
833	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
834	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
835	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
836	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
837	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
838	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
839	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
840	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
841	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
842	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
843	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
844	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
845	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
846	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
847	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
848	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
849	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
850	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
851	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
852	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
853	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
854	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
855	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
856	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
857	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
858	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
859	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
860	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
861	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
862	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
863	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
864	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
865	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
866	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
867	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
868	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
869	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
870	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
871	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
872	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
873	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
874	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
875	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
876	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
877	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
878	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
879	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
880	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
881	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
882	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
883	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
884	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
885	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
886	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
887	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
888	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
889	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
890	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
891	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
892	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
893	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
894	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
895	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
896	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
897	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
898	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
899	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
900	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
901	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
902	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
903	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
904	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
905	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
906	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
907	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
908	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
909	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
910	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
911	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
912	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
913	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
914	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
915	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
916	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
917	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
918	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
919	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
920	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
921	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
922	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
923	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
924	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
925	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
926	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
927	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
928	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
929	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
930	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
931	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
932	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
933	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
934	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
935	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
936	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
937	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
938	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
939	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
940	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
941	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
942	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
943	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
944	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
945	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
946	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
947	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
948	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
949	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
950	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
951	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
952	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
953	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
954	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
955	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
956	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
957	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
958	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
959	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
960	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
961	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
962	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
963	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
964	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
965	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
966	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
967	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
968	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
969	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
970	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
971	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
972	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
973	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
974	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
975	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
976	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
977	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
978	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
979	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
980	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
981	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
982	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
983	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
984	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
985	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
986	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
987	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
988	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
989	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
990	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
991	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
992	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
993	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
994	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
995	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
996	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
997	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
998	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
999	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1000	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1001	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1002	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1003	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1004	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1005	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1006	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1007	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1008	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1009	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1010	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1011	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1012	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1013	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1014	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1015	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1016	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1017	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1018	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1019	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1020	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1021	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1022	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1023	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1024	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1025	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1026	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1027	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1028	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1029	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1030	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1031	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1032	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1033	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1034	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1035	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1036	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1037	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1038	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1039	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1040	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1041	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1042	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1043	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1044	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1045	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1046	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1047	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1048	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1049	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1050	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1051	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1052	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1053	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1054	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1055	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1056	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1057	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1058	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1059	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1060	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1061	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1062	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1063	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1064	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1065	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1066	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1067	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1068	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1069	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1070	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1071	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1072	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1073	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1074	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1075	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1076	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1077	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1078	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1079	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1080	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1081	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1082	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1083	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1084	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1085	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1086	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1087	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1088	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1089	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1090	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1091	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1092	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1093	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1094	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1095	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1096	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1097	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1098	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1099	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1100	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1101	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1102	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1103	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1104	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1105	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1106	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1107	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1108	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1109	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1110	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1111	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1112	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1113	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1114	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1115	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1116	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1117	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1118	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1119	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1120	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1121	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1122	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1123	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1124	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1125	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1126	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1127	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1128	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1129	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1130	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1131	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1132	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1133	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1134	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1135	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1136	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1137	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1138	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1139	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1140	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1141	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1142	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1143	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1144	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1145	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1146	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1147	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1148	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1149	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1150	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1151	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1152	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1153	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1154	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1155	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1156	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1157	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1158	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1159	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1160	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1161	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1162	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1163	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1164	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1165	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1166	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1167	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1168	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1169	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1170	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1171	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1172	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1173	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1174	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1175	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1176	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1177	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1178	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1179	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1180	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1181	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1182	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1183	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1184	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1185	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1186	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1187	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1188	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1189	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1190	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1191	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1192	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1193	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1194	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1195	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1196	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1197	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1198	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1199	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1200	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1201	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1202	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1203	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1204	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1205	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1206	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1207	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1208	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1209	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1210	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1211	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1212	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1213	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1214	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1215	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1216	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1217	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1218	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1219	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1220	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1221	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1222	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1223	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1224	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1225	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1226	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1227	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1228	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1229	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1230	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1231	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1232	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1233	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1234	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1235	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1236	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1237	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1238	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1239	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1240	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1241	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1242	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1243	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1244	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1245	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1246	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1247	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1248	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1249	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1250	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1251	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1252	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1253	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1254	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1255	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1256	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1257	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1258	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1259	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1260	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1261	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1262	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1263	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1264	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1265	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1266	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1267	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1268	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1269	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1270	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1271	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1272	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1273	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1274	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1275	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1276	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1277	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1278	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1279	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1280	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1281	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1282	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1283	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1284	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1285	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1286	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1287	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1288	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1289	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1290	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1291	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1292	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1293	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1294	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1295	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1296	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1297	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1298	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1299	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1300	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1301	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1302	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1303	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1304	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1305	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1306	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1307	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1308	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1309	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1310	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1311	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1312	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1313	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1314	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1315	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1316	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1317	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1318	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1319	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1320	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1321	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1322	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1323	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1324	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1325	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1326	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1327	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1328	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1329	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1330	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1331	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1332	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1333	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1334	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1335	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1336	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1337	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1338	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1339	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1340	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1341	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1342	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1343	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1344	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1345	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1346	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1347	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1348	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1349	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1350	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1351	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1352	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1353	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1354	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1355	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1356	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1357	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1358	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1359	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1360	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1361	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1362	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1363	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1364	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1365	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1366	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1367	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1368	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1369	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1370	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1371	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1372	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1373	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1374	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1375	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1376	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1377	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1378	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1379	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1380	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1381	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1382	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1383	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1384	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1385	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1386	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1387	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1388	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1389	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1390	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1391	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1392	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1393	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1394	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1395	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1396	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1397	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1398	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1399	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1400	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1401	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1402	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1403	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1404	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1405	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1406	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1407	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1408	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1409	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1410	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1411	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1412	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1413	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1414	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1415	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1416	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1417	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1418	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1419	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1420	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1421	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1422	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1423	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1424	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1425	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1426	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1427	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1428	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1429	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1430	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1431	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1432	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1433	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1434	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1435	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1436	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1437	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1438	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1439	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1440	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1441	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1442	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1443	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1444	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1445	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1446	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1447	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1448	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1449	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1450	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1451	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1452	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1453	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1454	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1455	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1456	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1457	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1458	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1459	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1460	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1461	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1462	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1463	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1464	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1465	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1466	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1467	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1468	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1469	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1470	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1471	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1472	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1473	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1474	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1475	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1476	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1477	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1478	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1479	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1480	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1481	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1482	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1483	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1484	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1485	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1486	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1487	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1488	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1489	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1490	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1491	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1492	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1493	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1494	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1495	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1496	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1497	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1498	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1499	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1500	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1501	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1502	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1503	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1504	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1505	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1506	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1507	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1508	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1509	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1510	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1511	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1512	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1513	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1514	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1515	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1516	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1517	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1518	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1519	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1520	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1521	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1522	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1523	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1524	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1525	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1526	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1527	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1528	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1529	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1530	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1531	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1532	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1533	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1534	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1535	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1536	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1537	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1538	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1539	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1540	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1541	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1542	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1543	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1544	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1545	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1546	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1547	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1548	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1549	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1550	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1551	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1552	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1553	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1554	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1555	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1556	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1557	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1558	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1559	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1560	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1561	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1562	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1563	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1564	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1565	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1566	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1567	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1568	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1569	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1570	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1571	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1572	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1573	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1574	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1575	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1576	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1577	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1578	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1579	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1580	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1581	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1582	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1583	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1584	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1585	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1586	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1587	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1588	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1589	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1590	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1591	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1592	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1593	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1594	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1595	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1596	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1597	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1598	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1599	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1600	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1601	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1602	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1603	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1604	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1605	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1606	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1607	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1608	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1609	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1610	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1611	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1612	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1613	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1614	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1615	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1616	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1617	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1618	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1619	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1620	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1621	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1622	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1623	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1624	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1625	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1626	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1627	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1628	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1629	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1630	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1631	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1632	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1633	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1634	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1635	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1636	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1637	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1638	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1639	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1640	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1641	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1642	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1643	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1644	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1645	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1646	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1647	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1648	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1649	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1650	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1651	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1652	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1653	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1654	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1655	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1656	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1657	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1658	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1659	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1660	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1661	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1662	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1663	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1664	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1665	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1666	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1667	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1668	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1669	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1670	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1671	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1672	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1673	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1674	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1675	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1676	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1677	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1678	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1679	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1680	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1681	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1682	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1683	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1684	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1685	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1686	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1687	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1688	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1689	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1690	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1691	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1692	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1693	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1694	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1695	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1696	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1697	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1698	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1699	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1700	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1701	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1702	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1703	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1704	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1705	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1706	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1707	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1708	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1709	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1710	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1711	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1712	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1713	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1714	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1715	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1716	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1717	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1718	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1719	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1720	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1721	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1722	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1723	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1724	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1725	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1726	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1727	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1728	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1729	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1730	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1731	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1732	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1733	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1734	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1735	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1736	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1737	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1738	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1739	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1740	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1741	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1742	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1743	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1744	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1745	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1746	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1747	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1748	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1749	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1750	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1751	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1752	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1753	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1754	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1755	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1756	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1757	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1758	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1759	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1760	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1761	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1762	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1763	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1764	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1765	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1766	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1767	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1768	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1769	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1770	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1771	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1772	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1773	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1774	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1775	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1776	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1777	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1778	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1779	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1780	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1781	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1782	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1783	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1784	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1785	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1786	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1787	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1788	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1789	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1790	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1791	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1792	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1793	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1794	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1795	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1796	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1797	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1798	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1799	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1800	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1801	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1802	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1803	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1804	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1805	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1806	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1807	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1808	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1809	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1810	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1811	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1812	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1813	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1814	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1815	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1816	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1817	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1818	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1819	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1820	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1821	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1822	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1823	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1824	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1825	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1826	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1827	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1828	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1829	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1830	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1831	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1832	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1833	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1834	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1835	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1836	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1837	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1838	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1839	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1840	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1841	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1842	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1843	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1844	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1845	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1846	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1847	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1848	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1849	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1850	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1851	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1852	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1853	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1854	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1855	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1856	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1857	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1858	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1859	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1860	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1861	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1862	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1863	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1864	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1865	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1866	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1867	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1868	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1869	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1870	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1871	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1872	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1873	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1874	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1875	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1876	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1877	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1878	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1879	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1880	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1881	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1882	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1883	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1884	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1885	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1886	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1887	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1888	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1889	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1890	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1891	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1892	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1893	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1894	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1895	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1896	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1897	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1898	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1899	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1900	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1901	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1902	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1903	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1904	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1905	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1906	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1907	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1908	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1909	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1910	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1911	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1912	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1913	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1914	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1915	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1916	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1917	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1918	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1919	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1920	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1921	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1922	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1923	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1924	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1925	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1926	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1927	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1928	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1929	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1930	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1931	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1932	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1933	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1934	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1935	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1936	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1937	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1938	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1939	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1940	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1941	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1942	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1943	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1944	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1945	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1946	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1947	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1948	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1949	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1950	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1951	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1952	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1953	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1954	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1955	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1956	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1957	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1958	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1959	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1960	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1961	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1962	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1963	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1964	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1965	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
1966	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1967	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1968	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1969	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1970	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1971	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1972	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1973	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1974	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1975	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1976	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1977	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1978	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1979	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1980	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1981	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1982	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1983	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1984	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1985	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1986	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1987	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1988	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1989	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1990	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1991	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1992	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1993	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1994	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1995	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1996	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1997	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1998	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
1999	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2000	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2001	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2002	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2003	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2004	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2005	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2006	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2007	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2008	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2009	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2010	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2011	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2012	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2013	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2014	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
2015	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2016	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2017	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2018	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2019	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2020	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2021	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2022	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2023	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2024	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2025	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2026	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2027	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2028	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2029	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2030	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2031	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2032	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2033	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2034	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2035	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2036	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2037	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2038	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2039	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2040	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2041	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2042	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2043	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2044	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2045	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2046	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2047	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2048	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2049	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2050	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2051	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2052	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2053	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2054	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2055	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2056	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2057	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2058	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2059	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2060	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2061	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2062	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2063	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Supports Cont...

Node	X (kN/mm)	Y (kN/mm)	Z (kN/mm)	rX (kN-m/deg)	rY (kN-m/deg)	rZ (kN-m/deg)
2064	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2065	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2066	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2067	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2068	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2069	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2070	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2071	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2072	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2073	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2074	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2075	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2076	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2077	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2078	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2079	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2080	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2081	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2082	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2083	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2084	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2085	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2086	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2087	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2088	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2089	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2090	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2091	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2092	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
2093	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

Releases

There is no data of this type.

Primary Load Cases

Number	Name	Type
1	DEAD LOAD (DL)	None
2	LIVE LOAD (LL)	None
3	OPERATING EQUIPMENT LOAD (OEQL)	None
4	TEST EQUIPMENT LOAD (TEQL)	None
5	CABLE TRAY LOAD (CTL)	None
6	PIPE VERTICAL LOAD (PVL)	None
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	None
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	None
9	MONORAIL LOAD (MRL)	None
10	TEMPERATURE LOAD (+TL)(+VE)	None
11	WIND LOAD (+X) (WL(+X))	None
12	WIND LOAD (+Z) (WL(+Z))	None
13	TEMPERATURE LOAD (TL)(-VE)	None
100	DL+CTL+PVL+TEQL	None
101	DL+OEQL+CTL+PVL+PHL(+X)	None
102	DL+OEQL+CTL+PVL+PHL(+Z)	None
103	DL+OEQL+CTL+PVL-PHL(+X)	None
104	DL+OEQL+CTL+PVL-PHL(+Z)	None
105	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+V	None
106	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+V	None
107	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+V	None
108	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+V	None
109	DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-V	None
110	DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-V	None
111	DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE	None
112	DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(-VE	None
113	DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+	None
114	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+	None
115	DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+	None
116	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+	None
117	DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+	None
118	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+	None
119	DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+	None
120	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+	None
121	DL+OEQL+CTL+PVL+PHL(+X)+WL(+X)	None
122	DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z)	None
123	DL+OEQL+CTL+PVL+PHL(+X)-WL(+X)	None
124	DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z)	None
125	DL+OEQL+CTL+PVL-PHL(+X)+WL(+X)	None
126	DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z)	None
127	DL+OEQL+CTL+PVL-PHL(+X)-WL(+X)	None
128	DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z)	None
129	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X)	None
130	DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z)	None
131	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X)	None
132	DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z)	None
133	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X)	None
134	DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z)	None
135	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X)	None

Primary Load Cases Cont...

Number	Name	Type
136	DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z)	None
137	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(	None
138	DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(	None
139	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+	None
140	DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+	None
141	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+	None
142	DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+	None
143	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+	None
144	DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+	None
145	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(	None
146	DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(	None
147	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+	None
148	DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+	None
149	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+	None
150	DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+	None
151	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+	None
152	DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+	None
153	0.6*(DL+OEQL+CTL)+WL(+X)	None
154	0.6*(DL+OEQL+CTL)+WL(+Z)	None
155	0.6*(DL+OEQL+CTL)-WL(+X)	None
156	0.6*(DL+OEQL+CTL)-WL(+Z)	None
200	1.4*(DL+CTL+PVL+TEQL)	None
201	1.4*(DL+OEQL+CTL+PVL+PHL(+X))	None
202	1.4*(DL+OEQL+CTL+PVL+PHL(+Z))	None
203	1.4*(DL+OEQL+CTL+PVL-PHL(+X))	None
204	1.4*(DL+OEQL+CTL+PVL-PHL(+Z))	None
205	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+	None
206	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+	None
207	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+\	None
208	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+\	None
209	1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-\	None
210	1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-\	None
211	1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-V	None
212	1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-V	None
213	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*	None
214	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*	None
215	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*L	None
216	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*L	None
217	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*	None
218	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*	None
219	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*W	None
220	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*W	None
221	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*	None
222	1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*	None
223	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\	None
224	1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\	None
225	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*	None
226	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*	None
227	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\	None

Primary Load Cases Cont...

Number	Name	Type
228	1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\	None
229	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\	None
230	1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\	None
231	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W	None
232	1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W	None
233	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\	None
234	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\	None
235	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W	None
236	1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W	None
237	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*	None
238	0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*	None
239	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\	None
240	0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*\	None
241	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*'	None
242	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*'	None
243	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\	None
244	0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*\	None
245	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\	None
246	0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*\	None
247	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W	None
248	0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*W	None
249	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\	None
250	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*\	None
251	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W	None
252	0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*W	None

Combination Load Cases

There is no data of this type.

Load Generators

There is no data of this type.

1 DEAD LOAD (DL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-2.369	-0.238	-	-	-
2	-	-3.231	-0.295	-	-	-
3	-	-1.851	0.132	-	-	-
4	-0.180	-1.420	-	-	-	-
5	0.319	-1.792	-0.001	-	-	-
6	0.001	-0.890	-0.054	-	-	-
7	-	-1.675	-0.040	-	-	-
8	-0.404	-2.444	-0.070	-	-	-
9	0.276	-3.146	-0.261	-	-	-
10	-0.029	-1.524	0.070	-	-	-
11	-	-1.176	-0.037	-	-	-
12	-0.027	-2.426	0.205	-	-	-
13	0.002	-1.770	-0.033	-	-	-
14	-	-3.849	0.138	-	-	-
15	-	-2.106	0.189	-	-	-
18	0.009	-3.292	0.375	0.391	-	-
21	-	-1.546	0.029	-	-	-
22	-	-5.335	-0.410	-	-	-
25	0.026	-2.704	-0.058	-0.144	-	-
28	0.009	-2.953	-0.188	-	-	-
29	-0.313	-2.684	-0.237	-	-	-
30	0.253	-2.784	-0.159	-	-	-
31	-0.006	-1.626	0.005	-	-	-
32	0.012	-3.545	0.197	-	-	-
33	-0.312	-4.531	0.194	-	-	-
34	0.384	-3.553	0.198	-	-	-
35	-	-5.702	0.410	-	-	-
36	-	-2.985	-0.020	-	-	-
37	-	-0.526	-0.023	-	-	-
38	-0.257	-1.593	0.004	-	-	-
39	0.287	-2.031	0.026	-	-	-
40	-	-2.609	0.007	-	-	-
41	-	-3.062	-0.002	-	-	-
42	-0.014	-2.602	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1000	PRE N/mm2	GY	-0.040	-	-	-	-	-
1001	PRE N/mm2	GY	-0.040	-	-	-	-	-
1002	PRE N/mm2	GY	-0.040	-	-	-	-	-
1003	PRE N/mm2	GY	-0.040	-	-	-	-	-
1004	PRE N/mm2	GY	-0.040	-	-	-	-	-
1005	PRE N/mm2	GY	-0.040	-	-	-	-	-
1006	PRE N/mm2	GY	-0.040	-	-	-	-	-
1007	PRE N/mm2	GY	-0.040	-	-	-	-	-
1008	PRE N/mm2	GY	-0.040	-	-	-	-	-
1009	PRE N/mm2	GY	-0.040	-	-	-	-	-
1010	PRE N/mm2	GY	-0.040	-	-	-	-	-
1011	PRE N/mm2	GY	-0.040	-	-	-	-	-
1012	PRE N/mm2	GY	-0.039	-	-	-	-	-
1013	PRE N/mm2	GY	-0.039	-	-	-	-	-
1014	PRE N/mm2	GY	-0.039	-	-	-	-	-
1015	PRE N/mm2	GY	-0.039	-	-	-	-	-
1016	PRE N/mm2	GY	-0.039	-	-	-	-	-
1017	PRE N/mm2	GY	-0.039	-	-	-	-	-
1018	PRE N/mm2	GY	-0.039	-	-	-	-	-
1019	PRE N/mm2	GY	-0.039	-	-	-	-	-
1020	PRE N/mm2	GY	-0.039	-	-	-	-	-
1021	PRE N/mm2	GY	-0.039	-	-	-	-	-
1022	PRE N/mm2	GY	-0.039	-	-	-	-	-
1023	PRE N/mm2	GY	-0.039	-	-	-	-	-
1024	PRE N/mm2	GY	-0.039	-	-	-	-	-
1025	PRE N/mm2	GY	-0.039	-	-	-	-	-
1026	PRE N/mm2	GY	-0.039	-	-	-	-	-
1027	PRE N/mm2	GY	-0.039	-	-	-	-	-
1028	PRE N/mm2	GY	-0.039	-	-	-	-	-
1029	PRE N/mm2	GY	-0.039	-	-	-	-	-
1030	PRE N/mm2	GY	-0.039	-	-	-	-	-
1031	PRE N/mm2	GY	-0.039	-	-	-	-	-
1032	PRE N/mm2	GY	-0.040	-	-	-	-	-
1033	PRE N/mm2	GY	-0.040	-	-	-	-	-
1034	PRE N/mm2	GY	-0.040	-	-	-	-	-
1035	PRE N/mm2	GY	-0.040	-	-	-	-	-
1036	PRE N/mm2	GY	-0.040	-	-	-	-	-
1037	PRE N/mm2	GY	-0.040	-	-	-	-	-
1038	PRE N/mm2	GY	-0.040	-	-	-	-	-
1039	PRE N/mm2	GY	-0.040	-	-	-	-	-
1040	PRE N/mm2	GY	-0.040	-	-	-	-	-
1041	PRE N/mm2	GY	-0.040	-	-	-	-	-
1042	PRE N/mm2	GY	-0.040	-	-	-	-	-
1043	PRE N/mm2	GY	-0.040	-	-	-	-	-
1044	PRE N/mm2	GY	-0.040	-	-	-	-	-
1045	PRE N/mm2	GY	-0.040	-	-	-	-	-
1046	PRE N/mm2	GY	-0.040	-	-	-	-	-
1047	PRE N/mm2	GY	-0.040	-	-	-	-	-
1048	PRE N/mm2	GY	-0.040	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1049	PRE N/mm2	GY	-0.040	-	-	-	-	-
1050	PRE N/mm2	GY	-0.040	-	-	-	-	-
1051	PRE N/mm2	GY	-0.040	-	-	-	-	-
1052	PRE N/mm2	GY	-0.040	-	-	-	-	-
1053	PRE N/mm2	GY	-0.040	-	-	-	-	-
1054	PRE N/mm2	GY	-0.040	-	-	-	-	-
1055	PRE N/mm2	GY	-0.040	-	-	-	-	-
1056	PRE N/mm2	GY	-0.040	-	-	-	-	-
1057	PRE N/mm2	GY	-0.040	-	-	-	-	-
1058	PRE N/mm2	GY	-0.040	-	-	-	-	-
1059	PRE N/mm2	GY	-0.040	-	-	-	-	-
1060	PRE N/mm2	GY	-0.040	-	-	-	-	-
1061	PRE N/mm2	GY	-0.040	-	-	-	-	-
1062	PRE N/mm2	GY	-0.040	-	-	-	-	-
1063	PRE N/mm2	GY	-0.040	-	-	-	-	-
1064	PRE N/mm2	GY	-0.040	-	-	-	-	-
1065	PRE N/mm2	GY	-0.040	-	-	-	-	-
1066	PRE N/mm2	GY	-0.040	-	-	-	-	-
1067	PRE N/mm2	GY	-0.040	-	-	-	-	-
1068	PRE N/mm2	GY	-0.039	-	-	-	-	-
1069	PRE N/mm2	GY	-0.039	-	-	-	-	-
1070	PRE N/mm2	GY	-0.039	-	-	-	-	-
1071	PRE N/mm2	GY	-0.039	-	-	-	-	-
1072	PRE N/mm2	GY	-0.039	-	-	-	-	-
1073	PRE N/mm2	GY	-0.039	-	-	-	-	-
1074	PRE N/mm2	GY	-0.039	-	-	-	-	-
1075	PRE N/mm2	GY	-0.039	-	-	-	-	-
1076	PRE N/mm2	GY	-0.039	-	-	-	-	-
1077	PRE N/mm2	GY	-0.039	-	-	-	-	-
1078	PRE N/mm2	GY	-0.039	-	-	-	-	-
1079	PRE N/mm2	GY	-0.039	-	-	-	-	-
1080	PRE N/mm2	GY	-0.039	-	-	-	-	-
1081	PRE N/mm2	GY	-0.039	-	-	-	-	-
1082	PRE N/mm2	GY	-0.039	-	-	-	-	-
1083	PRE N/mm2	GY	-0.039	-	-	-	-	-
1084	PRE N/mm2	GY	-0.039	-	-	-	-	-
1085	PRE N/mm2	GY	-0.039	-	-	-	-	-
1086	PRE N/mm2	GY	-0.039	-	-	-	-	-
1087	PRE N/mm2	GY	-0.039	-	-	-	-	-
1088	PRE N/mm2	GY	-0.040	-	-	-	-	-
1089	PRE N/mm2	GY	-0.040	-	-	-	-	-
1090	PRE N/mm2	GY	-0.040	-	-	-	-	-
1091	PRE N/mm2	GY	-0.040	-	-	-	-	-
1092	PRE N/mm2	GY	-0.040	-	-	-	-	-
1093	PRE N/mm2	GY	-0.040	-	-	-	-	-
1094	PRE N/mm2	GY	-0.040	-	-	-	-	-
1095	PRE N/mm2	GY	-0.040	-	-	-	-	-
1096	PRE N/mm2	GY	-0.040	-	-	-	-	-
1097	PRE N/mm2	GY	-0.040	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1098	PRE N/mm2	GY	-0.040	-	-	-	-	-
1099	PRE N/mm2	GY	-0.040	-	-	-	-	-
1100	PRE N/mm2	GY	-0.040	-	-	-	-	-
1101	PRE N/mm2	GY	-0.040	-	-	-	-	-
1102	PRE N/mm2	GY	-0.040	-	-	-	-	-
1103	PRE N/mm2	GY	-0.040	-	-	-	-	-
1104	PRE N/mm2	GY	-0.040	-	-	-	-	-
1105	PRE N/mm2	GY	-0.040	-	-	-	-	-
1106	PRE N/mm2	GY	-0.039	-	-	-	-	-
1107	PRE N/mm2	GY	-0.039	-	-	-	-	-
1108	PRE N/mm2	GY	-0.039	-	-	-	-	-
1109	PRE N/mm2	GY	-0.039	-	-	-	-	-
1110	PRE N/mm2	GY	-0.039	-	-	-	-	-
1111	PRE N/mm2	GY	-0.039	-	-	-	-	-
1112	PRE N/mm2	GY	-0.039	-	-	-	-	-
1113	PRE N/mm2	GY	-0.039	-	-	-	-	-
1114	PRE N/mm2	GY	-0.039	-	-	-	-	-
1115	PRE N/mm2	GY	-0.039	-	-	-	-	-
1116	PRE N/mm2	GY	-0.039	-	-	-	-	-
1117	PRE N/mm2	GY	-0.039	-	-	-	-	-
1118	PRE N/mm2	GY	-0.039	-	-	-	-	-
1119	PRE N/mm2	GY	-0.039	-	-	-	-	-
1120	PRE N/mm2	GY	-0.039	-	-	-	-	-
1121	PRE N/mm2	GY	-0.039	-	-	-	-	-
1122	PRE N/mm2	GY	-0.039	-	-	-	-	-
1123	PRE N/mm2	GY	-0.039	-	-	-	-	-
1124	PRE N/mm2	GY	-0.039	-	-	-	-	-
1125	PRE N/mm2	GY	-0.039	-	-	-	-	-
1126	PRE N/mm2	GY	-0.040	-	-	-	-	-
1127	PRE N/mm2	GY	-0.040	-	-	-	-	-
1128	PRE N/mm2	GY	-0.040	-	-	-	-	-
1129	PRE N/mm2	GY	-0.040	-	-	-	-	-
1130	PRE N/mm2	GY	-0.040	-	-	-	-	-
1131	PRE N/mm2	GY	-0.040	-	-	-	-	-
1132	PRE N/mm2	GY	-0.040	-	-	-	-	-
1133	PRE N/mm2	GY	-0.040	-	-	-	-	-
1134	PRE N/mm2	GY	-0.040	-	-	-	-	-
1135	PRE N/mm2	GY	-0.040	-	-	-	-	-
1136	PRE N/mm2	GY	-0.040	-	-	-	-	-
1137	PRE N/mm2	GY	-0.040	-	-	-	-	-
1138	PRE N/mm2	GY	-0.040	-	-	-	-	-
1139	PRE N/mm2	GY	-0.040	-	-	-	-	-
1140	PRE N/mm2	GY	-0.040	-	-	-	-	-
1141	PRE N/mm2	GY	-0.040	-	-	-	-	-
1142	PRE N/mm2	GY	-0.040	-	-	-	-	-
1143	PRE N/mm2	GY	-0.040	-	-	-	-	-
1144	PRE N/mm2	GY	-0.039	-	-	-	-	-
1145	PRE N/mm2	GY	-0.039	-	-	-	-	-
1146	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1147	PRE N/mm2	GY	-0.039	-	-	-	-	-
1148	PRE N/mm2	GY	-0.039	-	-	-	-	-
1149	PRE N/mm2	GY	-0.039	-	-	-	-	-
1150	PRE N/mm2	GY	-0.039	-	-	-	-	-
1151	PRE N/mm2	GY	-0.039	-	-	-	-	-
1152	PRE N/mm2	GY	-0.039	-	-	-	-	-
1153	PRE N/mm2	GY	-0.039	-	-	-	-	-
1154	PRE N/mm2	GY	-0.039	-	-	-	-	-
1155	PRE N/mm2	GY	-0.039	-	-	-	-	-
1156	PRE N/mm2	GY	-0.039	-	-	-	-	-
1157	PRE N/mm2	GY	-0.039	-	-	-	-	-
1158	PRE N/mm2	GY	-0.039	-	-	-	-	-
1159	PRE N/mm2	GY	-0.039	-	-	-	-	-
1160	PRE N/mm2	GY	-0.039	-	-	-	-	-
1161	PRE N/mm2	GY	-0.039	-	-	-	-	-
1162	PRE N/mm2	GY	-0.039	-	-	-	-	-
1163	PRE N/mm2	GY	-0.039	-	-	-	-	-
1164	PRE N/mm2	GY	-0.040	-	-	-	-	-
1165	PRE N/mm2	GY	-0.040	-	-	-	-	-
1166	PRE N/mm2	GY	-0.040	-	-	-	-	-
1167	PRE N/mm2	GY	-0.040	-	-	-	-	-
1168	PRE N/mm2	GY	-0.040	-	-	-	-	-
1169	PRE N/mm2	GY	-0.040	-	-	-	-	-
1170	PRE N/mm2	GY	-0.040	-	-	-	-	-
1171	PRE N/mm2	GY	-0.040	-	-	-	-	-
1172	PRE N/mm2	GY	-0.040	-	-	-	-	-
1173	PRE N/mm2	GY	-0.040	-	-	-	-	-
1174	PRE N/mm2	GY	-0.040	-	-	-	-	-
1175	PRE N/mm2	GY	-0.040	-	-	-	-	-
1176	PRE N/mm2	GY	-0.040	-	-	-	-	-
1177	PRE N/mm2	GY	-0.040	-	-	-	-	-
1178	PRE N/mm2	GY	-0.040	-	-	-	-	-
1179	PRE N/mm2	GY	-0.040	-	-	-	-	-
1180	PRE N/mm2	GY	-0.040	-	-	-	-	-
1181	PRE N/mm2	GY	-0.040	-	-	-	-	-
1182	PRE N/mm2	GY	-0.039	-	-	-	-	-
1183	PRE N/mm2	GY	-0.039	-	-	-	-	-
1184	PRE N/mm2	GY	-0.039	-	-	-	-	-
1185	PRE N/mm2	GY	-0.039	-	-	-	-	-
1186	PRE N/mm2	GY	-0.039	-	-	-	-	-
1187	PRE N/mm2	GY	-0.039	-	-	-	-	-
1188	PRE N/mm2	GY	-0.039	-	-	-	-	-
1189	PRE N/mm2	GY	-0.039	-	-	-	-	-
1190	PRE N/mm2	GY	-0.039	-	-	-	-	-
1191	PRE N/mm2	GY	-0.039	-	-	-	-	-
1192	PRE N/mm2	GY	-0.039	-	-	-	-	-
1193	PRE N/mm2	GY	-0.039	-	-	-	-	-
1194	PRE N/mm2	GY	-0.039	-	-	-	-	-
1195	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1196	PRE N/mm2	GY	-0.039	-	-	-	-	-
1197	PRE N/mm2	GY	-0.039	-	-	-	-	-
1198	PRE N/mm2	GY	-0.039	-	-	-	-	-
1199	PRE N/mm2	GY	-0.039	-	-	-	-	-
1200	PRE N/mm2	GY	-0.039	-	-	-	-	-
1201	PRE N/mm2	GY	-0.039	-	-	-	-	-
1202	PRE N/mm2	GY	-0.040	-	-	-	-	-
1203	PRE N/mm2	GY	-0.040	-	-	-	-	-
1204	PRE N/mm2	GY	-0.040	-	-	-	-	-
1205	PRE N/mm2	GY	-0.040	-	-	-	-	-
1206	PRE N/mm2	GY	-0.040	-	-	-	-	-
1207	PRE N/mm2	GY	-0.040	-	-	-	-	-
1208	PRE N/mm2	GY	-0.039	-	-	-	-	-
1209	PRE N/mm2	GY	-0.039	-	-	-	-	-
1210	PRE N/mm2	GY	-0.039	-	-	-	-	-
1211	PRE N/mm2	GY	-0.039	-	-	-	-	-
1212	PRE N/mm2	GY	-0.039	-	-	-	-	-
1213	PRE N/mm2	GY	-0.039	-	-	-	-	-
1214	PRE N/mm2	GY	-0.039	-	-	-	-	-
1215	PRE N/mm2	GY	-0.039	-	-	-	-	-
1216	PRE N/mm2	GY	-0.039	-	-	-	-	-
1217	PRE N/mm2	GY	-0.039	-	-	-	-	-
1218	PRE N/mm2	GY	-0.039	-	-	-	-	-
1219	PRE N/mm2	GY	-0.039	-	-	-	-	-
1220	PRE N/mm2	GY	-0.039	-	-	-	-	-
1221	PRE N/mm2	GY	-0.039	-	-	-	-	-
1222	PRE N/mm2	GY	-0.039	-	-	-	-	-
1223	PRE N/mm2	GY	-0.039	-	-	-	-	-
1224	PRE N/mm2	GY	-0.039	-	-	-	-	-
1225	PRE N/mm2	GY	-0.039	-	-	-	-	-
1226	PRE N/mm2	GY	-0.039	-	-	-	-	-
1227	PRE N/mm2	GY	-0.039	-	-	-	-	-
1228	PRE N/mm2	GY	-0.040	-	-	-	-	-
1229	PRE N/mm2	GY	-0.040	-	-	-	-	-
1230	PRE N/mm2	GY	-0.040	-	-	-	-	-
1231	PRE N/mm2	GY	-0.040	-	-	-	-	-
1232	PRE N/mm2	GY	-0.040	-	-	-	-	-
1233	PRE N/mm2	GY	-0.040	-	-	-	-	-
1234	PRE N/mm2	GY	-0.039	-	-	-	-	-
1235	PRE N/mm2	GY	-0.039	-	-	-	-	-
1236	PRE N/mm2	GY	-0.039	-	-	-	-	-
1237	PRE N/mm2	GY	-0.039	-	-	-	-	-
1238	PRE N/mm2	GY	-0.039	-	-	-	-	-
1239	PRE N/mm2	GY	-0.039	-	-	-	-	-
1240	PRE N/mm2	GY	-0.039	-	-	-	-	-
1241	PRE N/mm2	GY	-0.039	-	-	-	-	-
1242	PRE N/mm2	GY	-0.039	-	-	-	-	-
1243	PRE N/mm2	GY	-0.039	-	-	-	-	-
1244	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1245	PRE N/mm2	GY	-0.039	-	-	-	-	-
1246	PRE N/mm2	GY	-0.039	-	-	-	-	-
1247	PRE N/mm2	GY	-0.039	-	-	-	-	-
1248	PRE N/mm2	GY	-0.039	-	-	-	-	-
1249	PRE N/mm2	GY	-0.039	-	-	-	-	-
1250	PRE N/mm2	GY	-0.039	-	-	-	-	-
1251	PRE N/mm2	GY	-0.039	-	-	-	-	-
1252	PRE N/mm2	GY	-0.039	-	-	-	-	-
1253	PRE N/mm2	GY	-0.039	-	-	-	-	-
1254	PRE N/mm2	GY	-0.040	-	-	-	-	-
1255	PRE N/mm2	GY	-0.040	-	-	-	-	-
1256	PRE N/mm2	GY	-0.040	-	-	-	-	-
1257	PRE N/mm2	GY	-0.040	-	-	-	-	-
1258	PRE N/mm2	GY	-0.040	-	-	-	-	-
1259	PRE N/mm2	GY	-0.040	-	-	-	-	-
1260	PRE N/mm2	GY	-0.039	-	-	-	-	-
1261	PRE N/mm2	GY	-0.039	-	-	-	-	-
1262	PRE N/mm2	GY	-0.039	-	-	-	-	-
1263	PRE N/mm2	GY	-0.039	-	-	-	-	-
1264	PRE N/mm2	GY	-0.039	-	-	-	-	-
1265	PRE N/mm2	GY	-0.039	-	-	-	-	-
1266	PRE N/mm2	GY	-0.039	-	-	-	-	-
1267	PRE N/mm2	GY	-0.039	-	-	-	-	-
1268	PRE N/mm2	GY	-0.039	-	-	-	-	-
1269	PRE N/mm2	GY	-0.039	-	-	-	-	-
1270	PRE N/mm2	GY	-0.039	-	-	-	-	-
1271	PRE N/mm2	GY	-0.039	-	-	-	-	-
1272	PRE N/mm2	GY	-0.039	-	-	-	-	-
1273	PRE N/mm2	GY	-0.039	-	-	-	-	-
1274	PRE N/mm2	GY	-0.039	-	-	-	-	-
1275	PRE N/mm2	GY	-0.039	-	-	-	-	-
1276	PRE N/mm2	GY	-0.039	-	-	-	-	-
1277	PRE N/mm2	GY	-0.039	-	-	-	-	-
1278	PRE N/mm2	GY	-0.039	-	-	-	-	-
1279	PRE N/mm2	GY	-0.039	-	-	-	-	-
1280	PRE N/mm2	GY	-0.039	-	-	-	-	-
1281	PRE N/mm2	GY	-0.039	-	-	-	-	-
1282	PRE N/mm2	GY	-0.039	-	-	-	-	-
1283	PRE N/mm2	GY	-0.039	-	-	-	-	-
1284	PRE N/mm2	GY	-0.039	-	-	-	-	-
1285	PRE N/mm2	GY	-0.039	-	-	-	-	-
1286	PRE N/mm2	GY	-0.039	-	-	-	-	-
1287	PRE N/mm2	GY	-0.039	-	-	-	-	-
1288	PRE N/mm2	GY	-0.039	-	-	-	-	-
1289	PRE N/mm2	GY	-0.039	-	-	-	-	-
1290	PRE N/mm2	GY	-0.039	-	-	-	-	-
1291	PRE N/mm2	GY	-0.039	-	-	-	-	-
1292	PRE N/mm2	GY	-0.039	-	-	-	-	-
1293	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1294	PRE N/mm2	GY	-0.039	-	-	-	-	-
1295	PRE N/mm2	GY	-0.039	-	-	-	-	-
1296	PRE N/mm2	GY	-0.039	-	-	-	-	-
1297	PRE N/mm2	GY	-0.039	-	-	-	-	-
1298	PRE N/mm2	GY	-0.039	-	-	-	-	-
1299	PRE N/mm2	GY	-0.039	-	-	-	-	-
1300	PRE N/mm2	GY	-0.040	-	-	-	-	-
1301	PRE N/mm2	GY	-0.040	-	-	-	-	-
1302	PRE N/mm2	GY	-0.040	-	-	-	-	-
1303	PRE N/mm2	GY	-0.040	-	-	-	-	-
1304	PRE N/mm2	GY	-0.040	-	-	-	-	-
1305	PRE N/mm2	GY	-0.040	-	-	-	-	-
1306	PRE N/mm2	GY	-0.039	-	-	-	-	-
1307	PRE N/mm2	GY	-0.039	-	-	-	-	-
1308	PRE N/mm2	GY	-0.039	-	-	-	-	-
1309	PRE N/mm2	GY	-0.039	-	-	-	-	-
1310	PRE N/mm2	GY	-0.039	-	-	-	-	-
1311	PRE N/mm2	GY	-0.039	-	-	-	-	-
1312	PRE N/mm2	GY	-0.039	-	-	-	-	-
1313	PRE N/mm2	GY	-0.039	-	-	-	-	-
1314	PRE N/mm2	GY	-0.039	-	-	-	-	-
1315	PRE N/mm2	GY	-0.039	-	-	-	-	-
1316	PRE N/mm2	GY	-0.039	-	-	-	-	-
1317	PRE N/mm2	GY	-0.039	-	-	-	-	-
1318	PRE N/mm2	GY	-0.039	-	-	-	-	-
1319	PRE N/mm2	GY	-0.039	-	-	-	-	-
1320	PRE N/mm2	GY	-0.039	-	-	-	-	-
1321	PRE N/mm2	GY	-0.039	-	-	-	-	-
1322	PRE N/mm2	GY	-0.039	-	-	-	-	-
1323	PRE N/mm2	GY	-0.039	-	-	-	-	-
1324	PRE N/mm2	GY	-0.039	-	-	-	-	-
1325	PRE N/mm2	GY	-0.039	-	-	-	-	-
1326	PRE N/mm2	GY	-0.040	-	-	-	-	-
1327	PRE N/mm2	GY	-0.040	-	-	-	-	-
1328	PRE N/mm2	GY	-0.040	-	-	-	-	-
1329	PRE N/mm2	GY	-0.040	-	-	-	-	-
1330	PRE N/mm2	GY	-0.040	-	-	-	-	-
1331	PRE N/mm2	GY	-0.040	-	-	-	-	-
1332	PRE N/mm2	GY	-0.040	-	-	-	-	-
1333	PRE N/mm2	GY	-0.040	-	-	-	-	-
1334	PRE N/mm2	GY	-0.040	-	-	-	-	-
1335	PRE N/mm2	GY	-0.040	-	-	-	-	-
1336	PRE N/mm2	GY	-0.040	-	-	-	-	-
1337	PRE N/mm2	GY	-0.040	-	-	-	-	-
1338	PRE N/mm2	GY	-0.039	-	-	-	-	-
1339	PRE N/mm2	GY	-0.039	-	-	-	-	-
1340	PRE N/mm2	GY	-0.039	-	-	-	-	-
1341	PRE N/mm2	GY	-0.039	-	-	-	-	-
1342	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1343	PRE N/mm2	GY	-0.039	-	-	-	-	-
1344	PRE N/mm2	GY	-0.039	-	-	-	-	-
1345	PRE N/mm2	GY	-0.039	-	-	-	-	-
1346	PRE N/mm2	GY	-0.039	-	-	-	-	-
1347	PRE N/mm2	GY	-0.039	-	-	-	-	-
1348	PRE N/mm2	GY	-0.039	-	-	-	-	-
1349	PRE N/mm2	GY	-0.039	-	-	-	-	-
1350	PRE N/mm2	GY	-0.039	-	-	-	-	-
1351	PRE N/mm2	GY	-0.039	-	-	-	-	-
1352	PRE N/mm2	GY	-0.039	-	-	-	-	-
1353	PRE N/mm2	GY	-0.039	-	-	-	-	-
1354	PRE N/mm2	GY	-0.039	-	-	-	-	-
1355	PRE N/mm2	GY	-0.039	-	-	-	-	-
1356	PRE N/mm2	GY	-0.039	-	-	-	-	-
1357	PRE N/mm2	GY	-0.039	-	-	-	-	-
1358	PRE N/mm2	GY	-0.040	-	-	-	-	-
1359	PRE N/mm2	GY	-0.040	-	-	-	-	-
1360	PRE N/mm2	GY	-0.040	-	-	-	-	-
1361	PRE N/mm2	GY	-0.040	-	-	-	-	-
1362	PRE N/mm2	GY	-0.040	-	-	-	-	-
1363	PRE N/mm2	GY	-0.040	-	-	-	-	-
1364	PRE N/mm2	GY	-0.039	-	-	-	-	-
1365	PRE N/mm2	GY	-0.039	-	-	-	-	-
1366	PRE N/mm2	GY	-0.039	-	-	-	-	-
1367	PRE N/mm2	GY	-0.039	-	-	-	-	-
1368	PRE N/mm2	GY	-0.039	-	-	-	-	-
1369	PRE N/mm2	GY	-0.039	-	-	-	-	-
1370	PRE N/mm2	GY	-0.039	-	-	-	-	-
1371	PRE N/mm2	GY	-0.039	-	-	-	-	-
1372	PRE N/mm2	GY	-0.039	-	-	-	-	-
1373	PRE N/mm2	GY	-0.039	-	-	-	-	-
1374	PRE N/mm2	GY	-0.039	-	-	-	-	-
1375	PRE N/mm2	GY	-0.039	-	-	-	-	-
1376	PRE N/mm2	GY	-0.039	-	-	-	-	-
1377	PRE N/mm2	GY	-0.039	-	-	-	-	-
1378	PRE N/mm2	GY	-0.039	-	-	-	-	-
1379	PRE N/mm2	GY	-0.039	-	-	-	-	-
1380	PRE N/mm2	GY	-0.039	-	-	-	-	-
1381	PRE N/mm2	GY	-0.039	-	-	-	-	-
1382	PRE N/mm2	GY	-0.039	-	-	-	-	-
1383	PRE N/mm2	GY	-0.039	-	-	-	-	-
1384	PRE N/mm2	GY	-0.040	-	-	-	-	-
1385	PRE N/mm2	GY	-0.040	-	-	-	-	-
1386	PRE N/mm2	GY	-0.040	-	-	-	-	-
1387	PRE N/mm2	GY	-0.040	-	-	-	-	-
1388	PRE N/mm2	GY	-0.040	-	-	-	-	-
1389	PRE N/mm2	GY	-0.040	-	-	-	-	-
1390	PRE N/mm2	GY	-0.039	-	-	-	-	-
1391	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1392	PRE N/mm2	GY	-0.039	-	-	-	-	-
1393	PRE N/mm2	GY	-0.039	-	-	-	-	-
1394	PRE N/mm2	GY	-0.039	-	-	-	-	-
1395	PRE N/mm2	GY	-0.039	-	-	-	-	-
1396	PRE N/mm2	GY	-0.039	-	-	-	-	-
1397	PRE N/mm2	GY	-0.039	-	-	-	-	-
1398	PRE N/mm2	GY	-0.039	-	-	-	-	-
1399	PRE N/mm2	GY	-0.039	-	-	-	-	-
1400	PRE N/mm2	GY	-0.039	-	-	-	-	-
1401	PRE N/mm2	GY	-0.039	-	-	-	-	-
1402	PRE N/mm2	GY	-0.039	-	-	-	-	-
1403	PRE N/mm2	GY	-0.039	-	-	-	-	-
1404	PRE N/mm2	GY	-0.039	-	-	-	-	-
1405	PRE N/mm2	GY	-0.039	-	-	-	-	-
1406	PRE N/mm2	GY	-0.039	-	-	-	-	-
1407	PRE N/mm2	GY	-0.039	-	-	-	-	-
1408	PRE N/mm2	GY	-0.039	-	-	-	-	-
1409	PRE N/mm2	GY	-0.039	-	-	-	-	-
1410	PRE N/mm2	GY	-0.040	-	-	-	-	-
1411	PRE N/mm2	GY	-0.040	-	-	-	-	-
1412	PRE N/mm2	GY	-0.040	-	-	-	-	-
1413	PRE N/mm2	GY	-0.040	-	-	-	-	-
1414	PRE N/mm2	GY	-0.040	-	-	-	-	-
1415	PRE N/mm2	GY	-0.040	-	-	-	-	-
1416	PRE N/mm2	GY	-0.040	-	-	-	-	-
1417	PRE N/mm2	GY	-0.040	-	-	-	-	-
1418	PRE N/mm2	GY	-0.040	-	-	-	-	-
1419	PRE N/mm2	GY	-0.040	-	-	-	-	-
1420	PRE N/mm2	GY	-0.040	-	-	-	-	-
1421	PRE N/mm2	GY	-0.040	-	-	-	-	-
1422	PRE N/mm2	GY	-0.040	-	-	-	-	-
1423	PRE N/mm2	GY	-0.040	-	-	-	-	-
1424	PRE N/mm2	GY	-0.040	-	-	-	-	-
1425	PRE N/mm2	GY	-0.040	-	-	-	-	-
1426	PRE N/mm2	GY	-0.040	-	-	-	-	-
1427	PRE N/mm2	GY	-0.040	-	-	-	-	-
1428	PRE N/mm2	GY	-0.040	-	-	-	-	-
1429	PRE N/mm2	GY	-0.040	-	-	-	-	-
1430	PRE N/mm2	GY	-0.040	-	-	-	-	-
1431	PRE N/mm2	GY	-0.040	-	-	-	-	-
1432	PRE N/mm2	GY	-0.040	-	-	-	-	-
1433	PRE N/mm2	GY	-0.040	-	-	-	-	-
1434	PRE N/mm2	GY	-0.040	-	-	-	-	-
1435	PRE N/mm2	GY	-0.040	-	-	-	-	-
1436	PRE N/mm2	GY	-0.040	-	-	-	-	-
1437	PRE N/mm2	GY	-0.040	-	-	-	-	-
1438	PRE N/mm2	GY	-0.040	-	-	-	-	-
1439	PRE N/mm2	GY	-0.040	-	-	-	-	-
1440	PRE N/mm2	GY	-0.040	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1441	PRE N/mm2	GY	-0.040	-	-	-	-	-
1442	PRE N/mm2	GY	-0.040	-	-	-	-	-
1443	PRE N/mm2	GY	-0.040	-	-	-	-	-
1444	PRE N/mm2	GY	-0.040	-	-	-	-	-
1445	PRE N/mm2	GY	-0.040	-	-	-	-	-
1446	PRE N/mm2	GY	-0.040	-	-	-	-	-
1447	PRE N/mm2	GY	-0.040	-	-	-	-	-
1448	PRE N/mm2	GY	-0.040	-	-	-	-	-
1449	PRE N/mm2	GY	-0.040	-	-	-	-	-
1450	PRE N/mm2	GY	-0.040	-	-	-	-	-
1451	PRE N/mm2	GY	-0.040	-	-	-	-	-
1452	PRE N/mm2	GY	-0.040	-	-	-	-	-
1453	PRE N/mm2	GY	-0.040	-	-	-	-	-
1454	PRE N/mm2	GY	-0.040	-	-	-	-	-
1455	PRE N/mm2	GY	-0.040	-	-	-	-	-
1456	PRE N/mm2	GY	-0.040	-	-	-	-	-
1457	PRE N/mm2	GY	-0.040	-	-	-	-	-
1458	PRE N/mm2	GY	-0.040	-	-	-	-	-
1459	PRE N/mm2	GY	-0.040	-	-	-	-	-
1460	PRE N/mm2	GY	-0.040	-	-	-	-	-
1461	PRE N/mm2	GY	-0.040	-	-	-	-	-
1462	PRE N/mm2	GY	-0.040	-	-	-	-	-
1463	PRE N/mm2	GY	-0.040	-	-	-	-	-
1464	PRE N/mm2	GY	-0.040	-	-	-	-	-
1465	PRE N/mm2	GY	-0.040	-	-	-	-	-
1466	PRE N/mm2	GY	-0.040	-	-	-	-	-
1467	PRE N/mm2	GY	-0.040	-	-	-	-	-
1468	PRE N/mm2	GY	-0.040	-	-	-	-	-
1469	PRE N/mm2	GY	-0.040	-	-	-	-	-
1470	PRE N/mm2	GY	-0.040	-	-	-	-	-
1471	PRE N/mm2	GY	-0.040	-	-	-	-	-
1472	PRE N/mm2	GY	-0.040	-	-	-	-	-
1473	PRE N/mm2	GY	-0.040	-	-	-	-	-
1474	PRE N/mm2	GY	-0.040	-	-	-	-	-
1475	PRE N/mm2	GY	-0.040	-	-	-	-	-
1476	PRE N/mm2	GY	-0.040	-	-	-	-	-
1477	PRE N/mm2	GY	-0.040	-	-	-	-	-
1478	PRE N/mm2	GY	-0.040	-	-	-	-	-
1479	PRE N/mm2	GY	-0.040	-	-	-	-	-
1480	PRE N/mm2	GY	-0.040	-	-	-	-	-
1481	PRE N/mm2	GY	-0.040	-	-	-	-	-
1482	PRE N/mm2	GY	-0.040	-	-	-	-	-
1483	PRE N/mm2	GY	-0.040	-	-	-	-	-
1484	PRE N/mm2	GY	-0.040	-	-	-	-	-
1485	PRE N/mm2	GY	-0.040	-	-	-	-	-
1486	PRE N/mm2	GY	-0.040	-	-	-	-	-
1487	PRE N/mm2	GY	-0.040	-	-	-	-	-
1488	PRE N/mm2	GY	-0.040	-	-	-	-	-
1489	PRE N/mm2	GY	-0.040	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1490	PRE N/mm2	GY	-0.040	-	-	-	-	-
1491	PRE N/mm2	GY	-0.040	-	-	-	-	-
1492	PRE N/mm2	GY	-0.040	-	-	-	-	-
1493	PRE N/mm2	GY	-0.040	-	-	-	-	-
1494	PRE N/mm2	GY	-0.040	-	-	-	-	-
1495	PRE N/mm2	GY	-0.040	-	-	-	-	-
1496	PRE N/mm2	GY	-0.040	-	-	-	-	-
1497	PRE N/mm2	GY	-0.040	-	-	-	-	-
1498	PRE N/mm2	GY	-0.040	-	-	-	-	-
1499	PRE N/mm2	GY	-0.040	-	-	-	-	-
1500	PRE N/mm2	GY	-0.040	-	-	-	-	-
1501	PRE N/mm2	GY	-0.040	-	-	-	-	-
1502	PRE N/mm2	GY	-0.040	-	-	-	-	-
1503	PRE N/mm2	GY	-0.040	-	-	-	-	-
1504	PRE N/mm2	GY	-0.040	-	-	-	-	-
1505	PRE N/mm2	GY	-0.040	-	-	-	-	-
1506	PRE N/mm2	GY	-0.040	-	-	-	-	-
1507	PRE N/mm2	GY	-0.040	-	-	-	-	-
1508	PRE N/mm2	GY	-0.040	-	-	-	-	-
1509	PRE N/mm2	GY	-0.040	-	-	-	-	-
1510	PRE N/mm2	GY	-0.040	-	-	-	-	-
1511	PRE N/mm2	GY	-0.040	-	-	-	-	-
1512	PRE N/mm2	GY	-0.040	-	-	-	-	-
1513	PRE N/mm2	GY	-0.040	-	-	-	-	-
1514	PRE N/mm2	GY	-0.040	-	-	-	-	-
1515	PRE N/mm2	GY	-0.040	-	-	-	-	-
1516	PRE N/mm2	GY	-0.040	-	-	-	-	-
1517	PRE N/mm2	GY	-0.040	-	-	-	-	-
1518	PRE N/mm2	GY	-0.039	-	-	-	-	-
1519	PRE N/mm2	GY	-0.039	-	-	-	-	-
1520	PRE N/mm2	GY	-0.039	-	-	-	-	-
1521	PRE N/mm2	GY	-0.039	-	-	-	-	-
1522	PRE N/mm2	GY	-0.039	-	-	-	-	-
1523	PRE N/mm2	GY	-0.039	-	-	-	-	-
1524	PRE N/mm2	GY	-0.039	-	-	-	-	-
1525	PRE N/mm2	GY	-0.039	-	-	-	-	-
1526	PRE N/mm2	GY	-0.039	-	-	-	-	-
1527	PRE N/mm2	GY	-0.039	-	-	-	-	-
1528	PRE N/mm2	GY	-0.039	-	-	-	-	-
1529	PRE N/mm2	GY	-0.039	-	-	-	-	-
1530	PRE N/mm2	GY	-0.039	-	-	-	-	-
1531	PRE N/mm2	GY	-0.039	-	-	-	-	-
1532	PRE N/mm2	GY	-0.039	-	-	-	-	-
1533	PRE N/mm2	GY	-0.039	-	-	-	-	-
1534	PRE N/mm2	GY	-0.039	-	-	-	-	-
1535	PRE N/mm2	GY	-0.039	-	-	-	-	-
1536	PRE N/mm2	GY	-0.039	-	-	-	-	-
1537	PRE N/mm2	GY	-0.039	-	-	-	-	-
1538	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1539	PRE N/mm2	GY	-0.039	-	-	-	-	-
1540	PRE N/mm2	GY	-0.039	-	-	-	-	-
1541	PRE N/mm2	GY	-0.039	-	-	-	-	-
1542	PRE N/mm2	GY	-0.039	-	-	-	-	-
1543	PRE N/mm2	GY	-0.039	-	-	-	-	-
1544	PRE N/mm2	GY	-0.039	-	-	-	-	-
1545	PRE N/mm2	GY	-0.039	-	-	-	-	-
1546	PRE N/mm2	GY	-0.039	-	-	-	-	-
1547	PRE N/mm2	GY	-0.039	-	-	-	-	-
1548	PRE N/mm2	GY	-0.039	-	-	-	-	-
1549	PRE N/mm2	GY	-0.039	-	-	-	-	-
1550	PRE N/mm2	GY	-0.039	-	-	-	-	-
1551	PRE N/mm2	GY	-0.039	-	-	-	-	-
1552	PRE N/mm2	GY	-0.039	-	-	-	-	-
1553	PRE N/mm2	GY	-0.039	-	-	-	-	-
1554	PRE N/mm2	GY	-0.039	-	-	-	-	-
1555	PRE N/mm2	GY	-0.039	-	-	-	-	-
1556	PRE N/mm2	GY	-0.039	-	-	-	-	-
1557	PRE N/mm2	GY	-0.039	-	-	-	-	-
1558	PRE N/mm2	GY	-0.040	-	-	-	-	-
1559	PRE N/mm2	GY	-0.040	-	-	-	-	-
1560	PRE N/mm2	GY	-0.040	-	-	-	-	-
1561	PRE N/mm2	GY	-0.040	-	-	-	-	-
1562	PRE N/mm2	GY	-0.040	-	-	-	-	-
1563	PRE N/mm2	GY	-0.040	-	-	-	-	-
1564	PRE N/mm2	GY	-0.040	-	-	-	-	-
1565	PRE N/mm2	GY	-0.040	-	-	-	-	-
1566	PRE N/mm2	GY	-0.040	-	-	-	-	-
1567	PRE N/mm2	GY	-0.040	-	-	-	-	-
1568	PRE N/mm2	GY	-0.040	-	-	-	-	-
1569	PRE N/mm2	GY	-0.040	-	-	-	-	-
1570	PRE N/mm2	GY	-0.039	-	-	-	-	-
1571	PRE N/mm2	GY	-0.039	-	-	-	-	-
1572	PRE N/mm2	GY	-0.039	-	-	-	-	-
1573	PRE N/mm2	GY	-0.039	-	-	-	-	-
1574	PRE N/mm2	GY	-0.040	-	-	-	-	-
1575	PRE N/mm2	GY	-0.040	-	-	-	-	-
1576	PRE N/mm2	GY	-0.040	-	-	-	-	-
1577	PRE N/mm2	GY	-0.040	-	-	-	-	-
1578	PRE N/mm2	GY	-0.040	-	-	-	-	-
1579	PRE N/mm2	GY	-0.040	-	-	-	-	-
1580	PRE N/mm2	GY	-0.040	-	-	-	-	-
1581	PRE N/mm2	GY	-0.040	-	-	-	-	-
1582	PRE N/mm2	GY	-0.040	-	-	-	-	-
1583	PRE N/mm2	GY	-0.040	-	-	-	-	-
1584	PRE N/mm2	GY	-0.040	-	-	-	-	-
1585	PRE N/mm2	GY	-0.040	-	-	-	-	-
1586	PRE N/mm2	GY	-0.039	-	-	-	-	-
1587	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1588	PRE N/mm2	GY	-0.039	-	-	-	-	-
1589	PRE N/mm2	GY	-0.039	-	-	-	-	-
1590	PRE N/mm2	GY	-0.040	-	-	-	-	-
1591	PRE N/mm2	GY	-0.040	-	-	-	-	-
1592	PRE N/mm2	GY	-0.040	-	-	-	-	-
1593	PRE N/mm2	GY	-0.040	-	-	-	-	-
1594	PRE N/mm2	GY	-0.040	-	-	-	-	-
1595	PRE N/mm2	GY	-0.040	-	-	-	-	-
1596	PRE N/mm2	GY	-0.040	-	-	-	-	-
1597	PRE N/mm2	GY	-0.040	-	-	-	-	-
1598	PRE N/mm2	GY	-0.040	-	-	-	-	-
1599	PRE N/mm2	GY	-0.040	-	-	-	-	-
1600	PRE N/mm2	GY	-0.040	-	-	-	-	-
1601	PRE N/mm2	GY	-0.040	-	-	-	-	-
1602	PRE N/mm2	GY	-0.039	-	-	-	-	-
1603	PRE N/mm2	GY	-0.039	-	-	-	-	-
1604	PRE N/mm2	GY	-0.039	-	-	-	-	-
1605	PRE N/mm2	GY	-0.039	-	-	-	-	-
1606	PRE N/mm2	GY	-0.040	-	-	-	-	-
1607	PRE N/mm2	GY	-0.040	-	-	-	-	-
1608	PRE N/mm2	GY	-0.040	-	-	-	-	-
1609	PRE N/mm2	GY	-0.040	-	-	-	-	-
1610	PRE N/mm2	GY	-0.040	-	-	-	-	-
1611	PRE N/mm2	GY	-0.040	-	-	-	-	-
1612	PRE N/mm2	GY	-0.040	-	-	-	-	-
1613	PRE N/mm2	GY	-0.040	-	-	-	-	-
1614	PRE N/mm2	GY	-0.040	-	-	-	-	-
1615	PRE N/mm2	GY	-0.040	-	-	-	-	-
1616	PRE N/mm2	GY	-0.040	-	-	-	-	-
1617	PRE N/mm2	GY	-0.040	-	-	-	-	-
1618	PRE N/mm2	GY	-0.039	-	-	-	-	-
1619	PRE N/mm2	GY	-0.039	-	-	-	-	-
1620	PRE N/mm2	GY	-0.039	-	-	-	-	-
1621	PRE N/mm2	GY	-0.039	-	-	-	-	-
1622	PRE N/mm2	GY	-0.040	-	-	-	-	-
1623	PRE N/mm2	GY	-0.040	-	-	-	-	-
1624	PRE N/mm2	GY	-0.040	-	-	-	-	-
1625	PRE N/mm2	GY	-0.040	-	-	-	-	-
1626	PRE N/mm2	GY	-0.040	-	-	-	-	-
1627	PRE N/mm2	GY	-0.040	-	-	-	-	-
1628	PRE N/mm2	GY	-0.040	-	-	-	-	-
1629	PRE N/mm2	GY	-0.040	-	-	-	-	-
1630	PRE N/mm2	GY	-0.040	-	-	-	-	-
1631	PRE N/mm2	GY	-0.040	-	-	-	-	-
1632	PRE N/mm2	GY	-0.040	-	-	-	-	-
1633	PRE N/mm2	GY	-0.040	-	-	-	-	-
1634	PRE N/mm2	GY	-0.039	-	-	-	-	-
1635	PRE N/mm2	GY	-0.039	-	-	-	-	-
1636	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1637	PRE N/mm2	GY	-0.039	-	-	-	-	-
1638	PRE N/mm2	GY	-0.040	-	-	-	-	-
1639	PRE N/mm2	GY	-0.040	-	-	-	-	-
1640	PRE N/mm2	GY	-0.040	-	-	-	-	-
1641	PRE N/mm2	GY	-0.040	-	-	-	-	-
1642	PRE N/mm2	GY	-0.040	-	-	-	-	-
1643	PRE N/mm2	GY	-0.040	-	-	-	-	-
1644	PRE N/mm2	GY	-0.040	-	-	-	-	-
1645	PRE N/mm2	GY	-0.040	-	-	-	-	-
1646	PRE N/mm2	GY	-0.040	-	-	-	-	-
1647	PRE N/mm2	GY	-0.040	-	-	-	-	-
1648	PRE N/mm2	GY	-0.040	-	-	-	-	-
1649	PRE N/mm2	GY	-0.040	-	-	-	-	-
1650	PRE N/mm2	GY	-0.039	-	-	-	-	-
1651	PRE N/mm2	GY	-0.039	-	-	-	-	-
1652	PRE N/mm2	GY	-0.039	-	-	-	-	-
1653	PRE N/mm2	GY	-0.039	-	-	-	-	-
1654	PRE N/mm2	GY	-0.039	-	-	-	-	-
1655	PRE N/mm2	GY	-0.039	-	-	-	-	-
1656	PRE N/mm2	GY	-0.039	-	-	-	-	-
1657	PRE N/mm2	GY	-0.039	-	-	-	-	-
1658	PRE N/mm2	GY	-0.039	-	-	-	-	-
1659	PRE N/mm2	GY	-0.039	-	-	-	-	-
1660	PRE N/mm2	GY	-0.039	-	-	-	-	-
1661	PRE N/mm2	GY	-0.039	-	-	-	-	-
1662	PRE N/mm2	GY	-0.039	-	-	-	-	-
1663	PRE N/mm2	GY	-0.039	-	-	-	-	-
1664	PRE N/mm2	GY	-0.039	-	-	-	-	-
1665	PRE N/mm2	GY	-0.039	-	-	-	-	-
1666	PRE N/mm2	GY	-0.039	-	-	-	-	-
1667	PRE N/mm2	GY	-0.039	-	-	-	-	-
1668	PRE N/mm2	GY	-0.039	-	-	-	-	-
1669	PRE N/mm2	GY	-0.039	-	-	-	-	-
1670	PRE N/mm2	GY	-0.039	-	-	-	-	-
1671	PRE N/mm2	GY	-0.039	-	-	-	-	-
1672	PRE N/mm2	GY	-0.039	-	-	-	-	-
1673	PRE N/mm2	GY	-0.039	-	-	-	-	-
1674	PRE N/mm2	GY	-0.039	-	-	-	-	-
1675	PRE N/mm2	GY	-0.039	-	-	-	-	-
1676	PRE N/mm2	GY	-0.039	-	-	-	-	-
1677	PRE N/mm2	GY	-0.039	-	-	-	-	-
1678	PRE N/mm2	GY	-0.039	-	-	-	-	-
1679	PRE N/mm2	GY	-0.039	-	-	-	-	-
1680	PRE N/mm2	GY	-0.039	-	-	-	-	-
1681	PRE N/mm2	GY	-0.039	-	-	-	-	-
1682	PRE N/mm2	GY	-0.039	-	-	-	-	-
1683	PRE N/mm2	GY	-0.039	-	-	-	-	-
1684	PRE N/mm2	GY	-0.039	-	-	-	-	-
1685	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1686	PRE N/mm2	GY	-0.039	-	-	-	-	-
1687	PRE N/mm2	GY	-0.039	-	-	-	-	-
1688	PRE N/mm2	GY	-0.039	-	-	-	-	-
1689	PRE N/mm2	GY	-0.039	-	-	-	-	-
1690	PRE N/mm2	GY	-0.039	-	-	-	-	-
1691	PRE N/mm2	GY	-0.039	-	-	-	-	-
1692	PRE N/mm2	GY	-0.039	-	-	-	-	-
1693	PRE N/mm2	GY	-0.039	-	-	-	-	-
1694	PRE N/mm2	GY	-0.039	-	-	-	-	-
1695	PRE N/mm2	GY	-0.039	-	-	-	-	-
1696	PRE N/mm2	GY	-0.039	-	-	-	-	-
1697	PRE N/mm2	GY	-0.039	-	-	-	-	-
1698	PRE N/mm2	GY	-0.039	-	-	-	-	-
1699	PRE N/mm2	GY	-0.039	-	-	-	-	-
1700	PRE N/mm2	GY	-0.039	-	-	-	-	-
1701	PRE N/mm2	GY	-0.039	-	-	-	-	-
1702	PRE N/mm2	GY	-0.039	-	-	-	-	-
1703	PRE N/mm2	GY	-0.039	-	-	-	-	-
1704	PRE N/mm2	GY	-0.039	-	-	-	-	-
1705	PRE N/mm2	GY	-0.039	-	-	-	-	-
1706	PRE N/mm2	GY	-0.039	-	-	-	-	-
1707	PRE N/mm2	GY	-0.039	-	-	-	-	-
1708	PRE N/mm2	GY	-0.039	-	-	-	-	-
1709	PRE N/mm2	GY	-0.039	-	-	-	-	-
1710	PRE N/mm2	GY	-0.039	-	-	-	-	-
1711	PRE N/mm2	GY	-0.039	-	-	-	-	-
1712	PRE N/mm2	GY	-0.039	-	-	-	-	-
1713	PRE N/mm2	GY	-0.039	-	-	-	-	-
1714	PRE N/mm2	GY	-0.039	-	-	-	-	-
1715	PRE N/mm2	GY	-0.039	-	-	-	-	-
1716	PRE N/mm2	GY	-0.039	-	-	-	-	-
1717	PRE N/mm2	GY	-0.039	-	-	-	-	-
1718	PRE N/mm2	GY	-0.039	-	-	-	-	-
1719	PRE N/mm2	GY	-0.039	-	-	-	-	-
1720	PRE N/mm2	GY	-0.039	-	-	-	-	-
1721	PRE N/mm2	GY	-0.039	-	-	-	-	-
1722	PRE N/mm2	GY	-0.039	-	-	-	-	-
1723	PRE N/mm2	GY	-0.039	-	-	-	-	-
1724	PRE N/mm2	GY	-0.039	-	-	-	-	-
1725	PRE N/mm2	GY	-0.039	-	-	-	-	-
1726	PRE N/mm2	GY	-0.039	-	-	-	-	-
1727	PRE N/mm2	GY	-0.039	-	-	-	-	-
1728	PRE N/mm2	GY	-0.039	-	-	-	-	-
1729	PRE N/mm2	GY	-0.039	-	-	-	-	-
1730	PRE N/mm2	GY	-0.039	-	-	-	-	-
1731	PRE N/mm2	GY	-0.039	-	-	-	-	-
1732	PRE N/mm2	GY	-0.039	-	-	-	-	-
1733	PRE N/mm2	GY	-0.039	-	-	-	-	-
1734	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1735	PRE N/mm2	GY	-0.039	-	-	-	-	-
1736	PRE N/mm2	GY	-0.039	-	-	-	-	-
1737	PRE N/mm2	GY	-0.039	-	-	-	-	-
1738	PRE N/mm2	GY	-0.039	-	-	-	-	-
1739	PRE N/mm2	GY	-0.039	-	-	-	-	-
1740	PRE N/mm2	GY	-0.039	-	-	-	-	-
1741	PRE N/mm2	GY	-0.039	-	-	-	-	-
1742	PRE N/mm2	GY	-0.039	-	-	-	-	-
1743	PRE N/mm2	GY	-0.039	-	-	-	-	-
1744	PRE N/mm2	GY	-0.039	-	-	-	-	-
1745	PRE N/mm2	GY	-0.039	-	-	-	-	-
1746	PRE N/mm2	GY	-0.039	-	-	-	-	-
1747	PRE N/mm2	GY	-0.039	-	-	-	-	-
1748	PRE N/mm2	GY	-0.039	-	-	-	-	-
1749	PRE N/mm2	GY	-0.039	-	-	-	-	-
1750	PRE N/mm2	GY	-0.039	-	-	-	-	-
1751	PRE N/mm2	GY	-0.039	-	-	-	-	-
1752	PRE N/mm2	GY	-0.039	-	-	-	-	-
1753	PRE N/mm2	GY	-0.039	-	-	-	-	-
1754	PRE N/mm2	GY	-0.039	-	-	-	-	-
1755	PRE N/mm2	GY	-0.039	-	-	-	-	-
1756	PRE N/mm2	GY	-0.039	-	-	-	-	-
1757	PRE N/mm2	GY	-0.039	-	-	-	-	-
1758	PRE N/mm2	GY	-0.039	-	-	-	-	-
1759	PRE N/mm2	GY	-0.039	-	-	-	-	-
1760	PRE N/mm2	GY	-0.039	-	-	-	-	-
1761	PRE N/mm2	GY	-0.039	-	-	-	-	-
1762	PRE N/mm2	GY	-0.039	-	-	-	-	-
1763	PRE N/mm2	GY	-0.039	-	-	-	-	-
1764	PRE N/mm2	GY	-0.039	-	-	-	-	-
1765	PRE N/mm2	GY	-0.039	-	-	-	-	-
1766	PRE N/mm2	GY	-0.039	-	-	-	-	-
1767	PRE N/mm2	GY	-0.039	-	-	-	-	-
1768	PRE N/mm2	GY	-0.039	-	-	-	-	-
1769	PRE N/mm2	GY	-0.039	-	-	-	-	-
1770	PRE N/mm2	GY	-0.039	-	-	-	-	-
1771	PRE N/mm2	GY	-0.039	-	-	-	-	-
1772	PRE N/mm2	GY	-0.039	-	-	-	-	-
1773	PRE N/mm2	GY	-0.039	-	-	-	-	-
1774	PRE N/mm2	GY	-0.039	-	-	-	-	-
1775	PRE N/mm2	GY	-0.039	-	-	-	-	-
1776	PRE N/mm2	GY	-0.039	-	-	-	-	-
1777	PRE N/mm2	GY	-0.039	-	-	-	-	-
1778	PRE N/mm2	GY	-0.039	-	-	-	-	-
1779	PRE N/mm2	GY	-0.039	-	-	-	-	-
1780	PRE N/mm2	GY	-0.039	-	-	-	-	-
1781	PRE N/mm2	GY	-0.039	-	-	-	-	-
1782	PRE N/mm2	GY	-0.039	-	-	-	-	-
1783	PRE N/mm2	GY	-0.039	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1784	PRE N/mm2	GY	-0.039	-	-	-	-	-
1785	PRE N/mm2	GY	-0.039	-	-	-	-	-
1786	PRE N/mm2	GY	-0.039	-	-	-	-	-
1787	PRE N/mm2	GY	-0.039	-	-	-	-	-
1788	PRE N/mm2	GY	-0.039	-	-	-	-	-
1789	PRE N/mm2	GY	-0.039	-	-	-	-	-
1790	PRE N/mm2	GY	-0.039	-	-	-	-	-
1791	PRE N/mm2	GY	-0.039	-	-	-	-	-
1792	PRE N/mm2	GY	-0.039	-	-	-	-	-
1793	PRE N/mm2	GY	-0.039	-	-	-	-	-
1794	PRE N/mm2	GY	-0.039	-	-	-	-	-
1795	PRE N/mm2	GY	-0.039	-	-	-	-	-
1796	PRE N/mm2	GY	-0.039	-	-	-	-	-
1797	PRE N/mm2	GY	-0.039	-	-	-	-	-
1798	PRE N/mm2	GY	-0.039	-	-	-	-	-
1799	PRE N/mm2	GY	-0.039	-	-	-	-	-
1800	PRE N/mm2	GY	-0.041	-	-	-	-	-
1801	PRE N/mm2	GY	-0.041	-	-	-	-	-
1802	PRE N/mm2	GY	-0.041	-	-	-	-	-
1803	PRE N/mm2	GY	-0.041	-	-	-	-	-
1804	PRE N/mm2	GY	-0.041	-	-	-	-	-
1805	PRE N/mm2	GY	-0.041	-	-	-	-	-
1806	PRE N/mm2	GY	-0.041	-	-	-	-	-
1807	PRE N/mm2	GY	-0.041	-	-	-	-	-
1808	PRE N/mm2	GY	-0.041	-	-	-	-	-
1809	PRE N/mm2	GY	-0.041	-	-	-	-	-
1810	PRE N/mm2	GY	-0.041	-	-	-	-	-
1811	PRE N/mm2	GY	-0.041	-	-	-	-	-
1812	PRE N/mm2	GY	-0.041	-	-	-	-	-
1813	PRE N/mm2	GY	-0.041	-	-	-	-	-
1814	PRE N/mm2	GY	-0.041	-	-	-	-	-
1815	PRE N/mm2	GY	-0.041	-	-	-	-	-
1816	PRE N/mm2	GY	-0.030	-	-	-	-	-
1817	PRE N/mm2	GY	-0.030	-	-	-	-	-
1818	PRE N/mm2	GY	-0.030	-	-	-	-	-
1819	PRE N/mm2	GY	-0.030	-	-	-	-	-
1820	PRE N/mm2	GY	-0.030	-	-	-	-	-
1821	PRE N/mm2	GY	-0.030	-	-	-	-	-
1822	PRE N/mm2	GY	-0.030	-	-	-	-	-
1823	PRE N/mm2	GY	-0.030	-	-	-	-	-
1824	PRE N/mm2	GY	-0.030	-	-	-	-	-
1825	PRE N/mm2	GY	-0.030	-	-	-	-	-
1826	PRE N/mm2	GY	-0.030	-	-	-	-	-
1827	PRE N/mm2	GY	-0.030	-	-	-	-	-
1828	PRE N/mm2	GY	-0.030	-	-	-	-	-
1829	PRE N/mm2	GY	-0.030	-	-	-	-	-
1830	PRE N/mm2	GY	-0.030	-	-	-	-	-
1831	PRE N/mm2	GY	-0.030	-	-	-	-	-
1832	PRE N/mm2	GY	-0.030	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1833	PRE N/mm2	GY	-0.030	-	-	-	-	-
1834	PRE N/mm2	GY	-0.030	-	-	-	-	-
1835	PRE N/mm2	GY	-0.030	-	-	-	-	-
1836	PRE N/mm2	GY	-0.030	-	-	-	-	-
1837	PRE N/mm2	GY	-0.030	-	-	-	-	-
1838	PRE N/mm2	GY	-0.030	-	-	-	-	-
1839	PRE N/mm2	GY	-0.030	-	-	-	-	-
1840	PRE N/mm2	GY	-0.030	-	-	-	-	-
1841	PRE N/mm2	GY	-0.030	-	-	-	-	-
1842	PRE N/mm2	GY	-0.030	-	-	-	-	-
1843	PRE N/mm2	GY	-0.030	-	-	-	-	-
1844	PRE N/mm2	GY	-0.030	-	-	-	-	-
1845	PRE N/mm2	GY	-0.030	-	-	-	-	-
1846	PRE N/mm2	GY	-0.030	-	-	-	-	-
1847	PRE N/mm2	GY	-0.030	-	-	-	-	-
1848	PRE N/mm2	GY	-0.030	-	-	-	-	-
1849	PRE N/mm2	GY	-0.030	-	-	-	-	-
1850	PRE N/mm2	GY	-0.030	-	-	-	-	-
1851	PRE N/mm2	GY	-0.030	-	-	-	-	-
1852	PRE N/mm2	GY	-0.030	-	-	-	-	-
1853	PRE N/mm2	GY	-0.030	-	-	-	-	-
1854	PRE N/mm2	GY	-0.030	-	-	-	-	-
1855	PRE N/mm2	GY	-0.030	-	-	-	-	-
1856	PRE N/mm2	GY	-0.030	-	-	-	-	-
1857	PRE N/mm2	GY	-0.030	-	-	-	-	-
1858	PRE N/mm2	GY	-0.030	-	-	-	-	-
1859	PRE N/mm2	GY	-0.030	-	-	-	-	-
1860	PRE N/mm2	GY	-0.030	-	-	-	-	-
1861	PRE N/mm2	GY	-0.030	-	-	-	-	-
1862	PRE N/mm2	GY	-0.030	-	-	-	-	-
1863	PRE N/mm2	GY	-0.030	-	-	-	-	-
1864	PRE N/mm2	GY	-0.030	-	-	-	-	-
1865	PRE N/mm2	GY	-0.030	-	-	-	-	-
1866	PRE N/mm2	GY	-0.030	-	-	-	-	-
1867	PRE N/mm2	GY	-0.030	-	-	-	-	-
1868	PRE N/mm2	GY	-0.030	-	-	-	-	-
1869	PRE N/mm2	GY	-0.030	-	-	-	-	-
1870	PRE N/mm2	GY	-0.030	-	-	-	-	-
1871	PRE N/mm2	GY	-0.030	-	-	-	-	-
1872	PRE N/mm2	GY	-0.030	-	-	-	-	-
1873	PRE N/mm2	GY	-0.030	-	-	-	-	-
1874	PRE N/mm2	GY	-0.030	-	-	-	-	-
1875	PRE N/mm2	GY	-0.030	-	-	-	-	-
1876	PRE N/mm2	GY	-0.030	-	-	-	-	-
1877	PRE N/mm2	GY	-0.030	-	-	-	-	-
1878	PRE N/mm2	GY	-0.030	-	-	-	-	-
1879	PRE N/mm2	GY	-0.030	-	-	-	-	-
1880	PRE N/mm2	GY	-0.030	-	-	-	-	-
1881	PRE N/mm2	GY	-0.030	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1882	PRE N/mm2	GY	-0.030	-	-	-	-	-
1883	PRE N/mm2	GY	-0.030	-	-	-	-	-
1884	PRE N/mm2	GY	-0.030	-	-	-	-	-
1885	PRE N/mm2	GY	-0.030	-	-	-	-	-
1886	PRE N/mm2	GY	-0.030	-	-	-	-	-
1887	PRE N/mm2	GY	-0.030	-	-	-	-	-
1888	PRE N/mm2	GY	-0.030	-	-	-	-	-
1889	PRE N/mm2	GY	-0.030	-	-	-	-	-
1890	PRE N/mm2	GY	-0.030	-	-	-	-	-
1891	PRE N/mm2	GY	-0.030	-	-	-	-	-
1892	PRE N/mm2	GY	-0.030	-	-	-	-	-
1893	PRE N/mm2	GY	-0.030	-	-	-	-	-
1894	PRE N/mm2	GY	-0.028	-	-	-	-	-
1895	PRE N/mm2	GY	-0.028	-	-	-	-	-
1896	PRE N/mm2	GY	-0.028	-	-	-	-	-
1897	PRE N/mm2	GY	-0.028	-	-	-	-	-
1898	PRE N/mm2	GY	-0.028	-	-	-	-	-
1899	PRE N/mm2	GY	-0.028	-	-	-	-	-
1900	PRE N/mm2	GY	-0.028	-	-	-	-	-
1901	PRE N/mm2	GY	-0.028	-	-	-	-	-
1902	PRE N/mm2	GY	-0.028	-	-	-	-	-
1903	PRE N/mm2	GY	-0.028	-	-	-	-	-
1904	PRE N/mm2	GY	-0.028	-	-	-	-	-
1905	PRE N/mm2	GY	-0.028	-	-	-	-	-
1906	PRE N/mm2	GY	-0.028	-	-	-	-	-
1907	PRE N/mm2	GY	-0.028	-	-	-	-	-
1908	PRE N/mm2	GY	-0.028	-	-	-	-	-
1909	PRE N/mm2	GY	-0.028	-	-	-	-	-
1910	PRE N/mm2	GY	-0.028	-	-	-	-	-
1911	PRE N/mm2	GY	-0.028	-	-	-	-	-
1912	PRE N/mm2	GY	-0.028	-	-	-	-	-
1913	PRE N/mm2	GY	-0.028	-	-	-	-	-
1914	PRE N/mm2	GY	-0.028	-	-	-	-	-
1915	PRE N/mm2	GY	-0.028	-	-	-	-	-
1916	PRE N/mm2	GY	-0.028	-	-	-	-	-
1917	PRE N/mm2	GY	-0.028	-	-	-	-	-
1918	PRE N/mm2	GY	-0.028	-	-	-	-	-
1919	PRE N/mm2	GY	-0.028	-	-	-	-	-
1920	PRE N/mm2	GY	-0.028	-	-	-	-	-
1921	PRE N/mm2	GY	-0.028	-	-	-	-	-
1922	PRE N/mm2	GY	-0.028	-	-	-	-	-
1923	PRE N/mm2	GY	-0.028	-	-	-	-	-
1924	PRE N/mm2	GY	-0.028	-	-	-	-	-
1925	PRE N/mm2	GY	-0.028	-	-	-	-	-
1926	PRE N/mm2	GY	-0.028	-	-	-	-	-
1927	PRE N/mm2	GY	-0.028	-	-	-	-	-
1928	PRE N/mm2	GY	-0.028	-	-	-	-	-
1929	PRE N/mm2	GY	-0.028	-	-	-	-	-
1930	PRE N/mm2	GY	-0.028	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1931	PRE N/mm2	GY	-0.028	-	-	-	-	-
1932	PRE N/mm2	GY	-0.028	-	-	-	-	-
1933	PRE N/mm2	GY	-0.028	-	-	-	-	-
1934	PRE N/mm2	GY	-0.028	-	-	-	-	-
1935	PRE N/mm2	GY	-0.028	-	-	-	-	-
1936	PRE N/mm2	GY	-0.028	-	-	-	-	-
1937	PRE N/mm2	GY	-0.028	-	-	-	-	-
1938	PRE N/mm2	GY	-0.028	-	-	-	-	-
1939	PRE N/mm2	GY	-0.028	-	-	-	-	-
1940	PRE N/mm2	GY	-0.028	-	-	-	-	-
1941	PRE N/mm2	GY	-0.028	-	-	-	-	-
1942	PRE N/mm2	GY	-0.028	-	-	-	-	-
1943	PRE N/mm2	GY	-0.028	-	-	-	-	-
1944	PRE N/mm2	GY	-0.028	-	-	-	-	-
1945	PRE N/mm2	GY	-0.028	-	-	-	-	-
1946	PRE N/mm2	GY	-0.028	-	-	-	-	-
1947	PRE N/mm2	GY	-0.028	-	-	-	-	-
1948	PRE N/mm2	GY	-0.028	-	-	-	-	-
1949	PRE N/mm2	GY	-0.028	-	-	-	-	-
1950	PRE N/mm2	GY	-0.028	-	-	-	-	-
1951	PRE N/mm2	GY	-0.028	-	-	-	-	-
1952	PRE N/mm2	GY	-0.028	-	-	-	-	-
1953	PRE N/mm2	GY	-0.028	-	-	-	-	-
1954	PRE N/mm2	GY	-0.028	-	-	-	-	-
1955	PRE N/mm2	GY	-0.028	-	-	-	-	-
1956	PRE N/mm2	GY	-0.028	-	-	-	-	-
1957	PRE N/mm2	GY	-0.028	-	-	-	-	-
1958	PRE N/mm2	GY	-0.028	-	-	-	-	-
1959	PRE N/mm2	GY	-0.028	-	-	-	-	-
1960	PRE N/mm2	GY	-0.028	-	-	-	-	-
1961	PRE N/mm2	GY	-0.028	-	-	-	-	-
1962	PRE N/mm2	GY	-0.028	-	-	-	-	-
1963	PRE N/mm2	GY	-0.028	-	-	-	-	-
1964	PRE N/mm2	GY	-0.028	-	-	-	-	-
1965	PRE N/mm2	GY	-0.028	-	-	-	-	-
1966	PRE N/mm2	GY	-0.028	-	-	-	-	-
1967	PRE N/mm2	GY	-0.028	-	-	-	-	-
1968	PRE N/mm2	GY	-0.028	-	-	-	-	-
1969	PRE N/mm2	GY	-0.028	-	-	-	-	-
1970	PRE N/mm2	GY	-0.028	-	-	-	-	-
1971	PRE N/mm2	GY	-0.028	-	-	-	-	-
1972	PRE N/mm2	GY	-0.028	-	-	-	-	-
1973	PRE N/mm2	GY	-0.028	-	-	-	-	-
1974	PRE N/mm2	GY	-0.028	-	-	-	-	-
1975	PRE N/mm2	GY	-0.028	-	-	-	-	-
1976	PRE N/mm2	GY	-0.028	-	-	-	-	-
1977	PRE N/mm2	GY	-0.028	-	-	-	-	-
1978	PRE N/mm2	GY	-0.028	-	-	-	-	-
1979	PRE N/mm2	GY	-0.028	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
1980	PRE N/mm2	GY	-0.028	-	-	-	-	-
1981	PRE N/mm2	GY	-0.028	-	-	-	-	-
1982	PRE N/mm2	GY	-0.028	-	-	-	-	-
1983	PRE N/mm2	GY	-0.028	-	-	-	-	-
1984	PRE N/mm2	GY	-0.028	-	-	-	-	-
1985	PRE N/mm2	GY	-0.028	-	-	-	-	-
1986	PRE N/mm2	GY	-0.028	-	-	-	-	-
1987	PRE N/mm2	GY	-0.028	-	-	-	-	-
1988	PRE N/mm2	GY	-0.028	-	-	-	-	-
1989	PRE N/mm2	GY	-0.028	-	-	-	-	-
1990	PRE N/mm2	GY	-0.028	-	-	-	-	-
1991	PRE N/mm2	GY	-0.028	-	-	-	-	-
1992	PRE N/mm2	GY	-0.028	-	-	-	-	-
1993	PRE N/mm2	GY	-0.028	-	-	-	-	-
1994	PRE N/mm2	GY	-0.028	-	-	-	-	-
1995	PRE N/mm2	GY	-0.028	-	-	-	-	-
1996	PRE N/mm2	GY	-0.028	-	-	-	-	-
1997	PRE N/mm2	GY	-0.028	-	-	-	-	-
1998	PRE N/mm2	GY	-0.028	-	-	-	-	-
1999	PRE N/mm2	GY	-0.028	-	-	-	-	-
2000	PRE N/mm2	GY	-0.028	-	-	-	-	-
2001	PRE N/mm2	GY	-0.028	-	-	-	-	-
2002	PRE N/mm2	GY	-0.028	-	-	-	-	-
2003	PRE N/mm2	GY	-0.028	-	-	-	-	-
2004	PRE N/mm2	GY	-0.028	-	-	-	-	-
2005	PRE N/mm2	GY	-0.028	-	-	-	-	-
2006	PRE N/mm2	GY	-0.028	-	-	-	-	-
2007	PRE N/mm2	GY	-0.028	-	-	-	-	-
2008	PRE N/mm2	GY	-0.027	-	-	-	-	-
2009	PRE N/mm2	GY	-0.027	-	-	-	-	-
2010	PRE N/mm2	GY	-0.027	-	-	-	-	-
2011	PRE N/mm2	GY	-0.027	-	-	-	-	-
2012	PRE N/mm2	GY	-0.027	-	-	-	-	-
2013	PRE N/mm2	GY	-0.027	-	-	-	-	-
2014	PRE N/mm2	GY	-0.027	-	-	-	-	-
2015	PRE N/mm2	GY	-0.027	-	-	-	-	-
2016	PRE N/mm2	GY	-0.027	-	-	-	-	-
2017	PRE N/mm2	GY	-0.027	-	-	-	-	-
2018	PRE N/mm2	GY	-0.027	-	-	-	-	-
2019	PRE N/mm2	GY	-0.027	-	-	-	-	-
2020	PRE N/mm2	GY	-0.027	-	-	-	-	-
2021	PRE N/mm2	GY	-0.027	-	-	-	-	-
2022	PRE N/mm2	GY	-0.027	-	-	-	-	-
2023	PRE N/mm2	GY	-0.027	-	-	-	-	-
2024	PRE N/mm2	GY	-0.027	-	-	-	-	-
2025	PRE N/mm2	GY	-0.027	-	-	-	-	-
2026	PRE N/mm2	GY	-0.027	-	-	-	-	-
2027	PRE N/mm2	GY	-0.027	-	-	-	-	-
2028	PRE N/mm2	GY	-0.027	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2029	PRE N/mm2	GY	-0.027	-	-	-	-	-
2030	PRE N/mm2	GY	-0.027	-	-	-	-	-
2031	PRE N/mm2	GY	-0.027	-	-	-	-	-
2032	PRE N/mm2	GY	-0.027	-	-	-	-	-
2033	PRE N/mm2	GY	-0.027	-	-	-	-	-
2034	PRE N/mm2	GY	-0.027	-	-	-	-	-
2035	PRE N/mm2	GY	-0.027	-	-	-	-	-
2036	PRE N/mm2	GY	-0.027	-	-	-	-	-
2037	PRE N/mm2	GY	-0.027	-	-	-	-	-
2038	PRE N/mm2	GY	-0.027	-	-	-	-	-
2039	PRE N/mm2	GY	-0.027	-	-	-	-	-
2040	PRE N/mm2	GY	-0.027	-	-	-	-	-
2041	PRE N/mm2	GY	-0.027	-	-	-	-	-
2042	PRE N/mm2	GY	-0.027	-	-	-	-	-
2043	PRE N/mm2	GY	-0.027	-	-	-	-	-
2044	PRE N/mm2	GY	-0.027	-	-	-	-	-
2045	PRE N/mm2	GY	-0.027	-	-	-	-	-
2046	PRE N/mm2	GY	-0.027	-	-	-	-	-
2047	PRE N/mm2	GY	-0.027	-	-	-	-	-
2048	PRE N/mm2	GY	-0.027	-	-	-	-	-
2049	PRE N/mm2	GY	-0.027	-	-	-	-	-
2050	PRE N/mm2	GY	-0.027	-	-	-	-	-
2051	PRE N/mm2	GY	-0.027	-	-	-	-	-
2052	PRE N/mm2	GY	-0.027	-	-	-	-	-
2053	PRE N/mm2	GY	-0.027	-	-	-	-	-
2054	PRE N/mm2	GY	-0.027	-	-	-	-	-
2055	PRE N/mm2	GY	-0.027	-	-	-	-	-
2056	PRE N/mm2	GY	-0.027	-	-	-	-	-
2057	PRE N/mm2	GY	-0.027	-	-	-	-	-
2058	PRE N/mm2	GY	-0.027	-	-	-	-	-
2059	PRE N/mm2	GY	-0.027	-	-	-	-	-
2060	PRE N/mm2	GY	-0.027	-	-	-	-	-
2061	PRE N/mm2	GY	-0.027	-	-	-	-	-
2062	PRE N/mm2	GY	-0.027	-	-	-	-	-
2063	PRE N/mm2	GY	-0.027	-	-	-	-	-
2064	PRE N/mm2	GY	-0.027	-	-	-	-	-
2065	PRE N/mm2	GY	-0.027	-	-	-	-	-
2066	PRE N/mm2	GY	-0.027	-	-	-	-	-
2067	PRE N/mm2	GY	-0.027	-	-	-	-	-
2068	PRE N/mm2	GY	-0.027	-	-	-	-	-
2069	PRE N/mm2	GY	-0.027	-	-	-	-	-
2070	PRE N/mm2	GY	-0.027	-	-	-	-	-
2071	PRE N/mm2	GY	-0.027	-	-	-	-	-
2072	PRE N/mm2	GY	-0.027	-	-	-	-	-
2073	PRE N/mm2	GY	-0.027	-	-	-	-	-
2074	PRE N/mm2	GY	-0.027	-	-	-	-	-
2075	PRE N/mm2	GY	-0.027	-	-	-	-	-
2076	PRE N/mm2	GY	-0.027	-	-	-	-	-
2077	PRE N/mm2	GY	-0.027	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2078	PRE N/mm2	GY	-0.027	-	-	-	-	-
2079	PRE N/mm2	GY	-0.027	-	-	-	-	-
2080	PRE N/mm2	GY	-0.027	-	-	-	-	-
2081	PRE N/mm2	GY	-0.027	-	-	-	-	-
2082	PRE N/mm2	GY	-0.027	-	-	-	-	-
2083	PRE N/mm2	GY	-0.027	-	-	-	-	-
2084	PRE N/mm2	GY	-0.027	-	-	-	-	-
2085	PRE N/mm2	GY	-0.027	-	-	-	-	-
2086	PRE N/mm2	GY	-0.027	-	-	-	-	-
2087	PRE N/mm2	GY	-0.027	-	-	-	-	-
2088	PRE N/mm2	GY	-0.027	-	-	-	-	-
2089	PRE N/mm2	GY	-0.027	-	-	-	-	-
2090	PRE N/mm2	GY	-0.027	-	-	-	-	-
2091	PRE N/mm2	GY	-0.027	-	-	-	-	-
2092	PRE N/mm2	GY	-0.027	-	-	-	-	-
2093	PRE N/mm2	GY	-0.027	-	-	-	-	-
2094	PRE N/mm2	GY	-0.027	-	-	-	-	-
2095	PRE N/mm2	GY	-0.027	-	-	-	-	-
2096	PRE N/mm2	GY	-0.027	-	-	-	-	-
2097	PRE N/mm2	GY	-0.027	-	-	-	-	-
2098	PRE N/mm2	GY	-0.027	-	-	-	-	-
2099	PRE N/mm2	GY	-0.027	-	-	-	-	-
2100	PRE N/mm2	GY	-0.027	-	-	-	-	-
2101	PRE N/mm2	GY	-0.027	-	-	-	-	-
2102	PRE N/mm2	GY	-0.027	-	-	-	-	-
2103	PRE N/mm2	GY	-0.027	-	-	-	-	-
2104	PRE N/mm2	GY	-0.027	-	-	-	-	-
2105	PRE N/mm2	GY	-0.027	-	-	-	-	-
2106	PRE N/mm2	GY	-0.027	-	-	-	-	-
2107	PRE N/mm2	GY	-0.027	-	-	-	-	-
2108	PRE N/mm2	GY	-0.027	-	-	-	-	-
2109	PRE N/mm2	GY	-0.027	-	-	-	-	-
2110	PRE N/mm2	GY	-0.027	-	-	-	-	-
2111	PRE N/mm2	GY	-0.027	-	-	-	-	-
2112	PRE N/mm2	GY	-0.027	-	-	-	-	-
2113	PRE N/mm2	GY	-0.027	-	-	-	-	-
2114	PRE N/mm2	GY	-0.027	-	-	-	-	-
2115	PRE N/mm2	GY	-0.027	-	-	-	-	-
2116	PRE N/mm2	GY	-0.027	-	-	-	-	-
2117	PRE N/mm2	GY	-0.027	-	-	-	-	-
2118	PRE N/mm2	GY	-0.027	-	-	-	-	-
2119	PRE N/mm2	GY	-0.027	-	-	-	-	-
2120	PRE N/mm2	GY	-0.027	-	-	-	-	-
2121	PRE N/mm2	GY	-0.027	-	-	-	-	-
2122	PRE N/mm2	GY	-0.027	-	-	-	-	-
2123	PRE N/mm2	GY	-0.027	-	-	-	-	-
2124	PRE N/mm2	GY	-0.027	-	-	-	-	-
2125	PRE N/mm2	GY	-0.027	-	-	-	-	-
2126	PRE N/mm2	GY	-0.027	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2127	PRE N/mm2	GY	-0.027	-	-	-	-	-
2128	PRE N/mm2	GY	-0.027	-	-	-	-	-
2129	PRE N/mm2	GY	-0.027	-	-	-	-	-
2130	PRE N/mm2	GY	-0.027	-	-	-	-	-
2131	PRE N/mm2	GY	-0.027	-	-	-	-	-
2132	PRE N/mm2	GY	-0.027	-	-	-	-	-
2133	PRE N/mm2	GY	-0.027	-	-	-	-	-
2134	PRE N/mm2	GY	-0.027	-	-	-	-	-
2135	PRE N/mm2	GY	-0.027	-	-	-	-	-
2136	PRE N/mm2	GY	-0.027	-	-	-	-	-
2137	PRE N/mm2	GY	-0.027	-	-	-	-	-
2138	PRE N/mm2	GY	-0.027	-	-	-	-	-
2139	PRE N/mm2	GY	-0.027	-	-	-	-	-
2140	PRE N/mm2	GY	-0.027	-	-	-	-	-
2141	PRE N/mm2	GY	-0.027	-	-	-	-	-
2142	PRE N/mm2	GY	-0.027	-	-	-	-	-
2143	PRE N/mm2	GY	-0.027	-	-	-	-	-
2144	PRE N/mm2	GY	-0.027	-	-	-	-	-
2145	PRE N/mm2	GY	-0.027	-	-	-	-	-
2146	PRE N/mm2	GY	-0.027	-	-	-	-	-
2147	PRE N/mm2	GY	-0.027	-	-	-	-	-
2148	PRE N/mm2	GY	-0.027	-	-	-	-	-
2149	PRE N/mm2	GY	-0.027	-	-	-	-	-
2150	PRE N/mm2	GY	-0.027	-	-	-	-	-
2151	PRE N/mm2	GY	-0.027	-	-	-	-	-
2152	PRE N/mm2	GY	-0.027	-	-	-	-	-
2153	PRE N/mm2	GY	-0.027	-	-	-	-	-
2154	PRE N/mm2	GY	-0.027	-	-	-	-	-
2155	PRE N/mm2	GY	-0.027	-	-	-	-	-
2156	PRE N/mm2	GY	-0.027	-	-	-	-	-
2157	PRE N/mm2	GY	-0.027	-	-	-	-	-
2158	PRE N/mm2	GY	-0.027	-	-	-	-	-
2159	PRE N/mm2	GY	-0.027	-	-	-	-	-
2160	PRE N/mm2	GY	-0.027	-	-	-	-	-
2161	PRE N/mm2	GY	-0.027	-	-	-	-	-
2162	PRE N/mm2	GY	-0.027	-	-	-	-	-
2163	PRE N/mm2	GY	-0.027	-	-	-	-	-
2164	PRE N/mm2	GY	-0.027	-	-	-	-	-
2165	PRE N/mm2	GY	-0.027	-	-	-	-	-
2166	PRE N/mm2	GY	-0.027	-	-	-	-	-
2167	PRE N/mm2	GY	-0.027	-	-	-	-	-
2168	PRE N/mm2	GY	-0.027	-	-	-	-	-
2169	PRE N/mm2	GY	-0.027	-	-	-	-	-
2170	PRE N/mm2	GY	-0.027	-	-	-	-	-
2171	PRE N/mm2	GY	-0.027	-	-	-	-	-
2172	PRE N/mm2	GY	-0.027	-	-	-	-	-
2173	PRE N/mm2	GY	-0.027	-	-	-	-	-
2174	PRE N/mm2	GY	-0.027	-	-	-	-	-
2175	PRE N/mm2	GY	-0.027	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2176	PRE N/mm2	GY	-0.027	-	-	-	-	-
2177	PRE N/mm2	GY	-0.027	-	-	-	-	-
2178	PRE N/mm2	GY	-0.027	-	-	-	-	-
2179	PRE N/mm2	GY	-0.027	-	-	-	-	-
2180	PRE N/mm2	GY	-0.027	-	-	-	-	-
2181	PRE N/mm2	GY	-0.027	-	-	-	-	-
2182	PRE N/mm2	GY	-0.027	-	-	-	-	-
2183	PRE N/mm2	GY	-0.027	-	-	-	-	-
2184	PRE N/mm2	GY	-0.027	-	-	-	-	-
2185	PRE N/mm2	GY	-0.027	-	-	-	-	-
2186	PRE N/mm2	GY	-0.027	-	-	-	-	-
2187	PRE N/mm2	GY	-0.027	-	-	-	-	-
2188	PRE N/mm2	GY	-0.027	-	-	-	-	-
2189	PRE N/mm2	GY	-0.027	-	-	-	-	-
2190	PRE N/mm2	GY	-0.027	-	-	-	-	-
2191	PRE N/mm2	GY	-0.027	-	-	-	-	-
2192	PRE N/mm2	GY	-0.027	-	-	-	-	-
2193	PRE N/mm2	GY	-0.027	-	-	-	-	-
2194	PRE N/mm2	GY	-0.027	-	-	-	-	-
2195	PRE N/mm2	GY	-0.027	-	-	-	-	-
2196	PRE N/mm2	GY	-0.027	-	-	-	-	-
2197	PRE N/mm2	GY	-0.027	-	-	-	-	-
2198	PRE N/mm2	GY	-0.027	-	-	-	-	-
2199	PRE N/mm2	GY	-0.027	-	-	-	-	-
2200	PRE N/mm2	GY	-0.025	-	-	-	-	-
2201	PRE N/mm2	GY	-0.025	-	-	-	-	-
2202	PRE N/mm2	GY	-0.025	-	-	-	-	-
2203	PRE N/mm2	GY	-0.025	-	-	-	-	-
2204	PRE N/mm2	GY	-0.025	-	-	-	-	-
2205	PRE N/mm2	GY	-0.025	-	-	-	-	-
2206	PRE N/mm2	GY	-0.025	-	-	-	-	-
2207	PRE N/mm2	GY	-0.025	-	-	-	-	-
2208	PRE N/mm2	GY	-0.025	-	-	-	-	-
2209	PRE N/mm2	GY	-0.025	-	-	-	-	-
2210	PRE N/mm2	GY	-0.025	-	-	-	-	-
2211	PRE N/mm2	GY	-0.025	-	-	-	-	-
2212	PRE N/mm2	GY	-0.025	-	-	-	-	-
2213	PRE N/mm2	GY	-0.025	-	-	-	-	-
2214	PRE N/mm2	GY	-0.025	-	-	-	-	-
2215	PRE N/mm2	GY	-0.025	-	-	-	-	-
2216	PRE N/mm2	GY	-0.025	-	-	-	-	-
2217	PRE N/mm2	GY	-0.025	-	-	-	-	-
2218	PRE N/mm2	GY	-0.025	-	-	-	-	-
2219	PRE N/mm2	GY	-0.025	-	-	-	-	-
2220	PRE N/mm2	GY	-0.025	-	-	-	-	-
2221	PRE N/mm2	GY	-0.025	-	-	-	-	-
2222	PRE N/mm2	GY	-0.025	-	-	-	-	-
2223	PRE N/mm2	GY	-0.025	-	-	-	-	-
2224	PRE N/mm2	GY	-0.025	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2225	PRE N/mm2	GY	-0.025	-	-	-	-	-
2226	PRE N/mm2	GY	-0.025	-	-	-	-	-
2227	PRE N/mm2	GY	-0.025	-	-	-	-	-
2228	PRE N/mm2	GY	-0.025	-	-	-	-	-
2229	PRE N/mm2	GY	-0.025	-	-	-	-	-
2230	PRE N/mm2	GY	-0.025	-	-	-	-	-
2231	PRE N/mm2	GY	-0.025	-	-	-	-	-
2232	PRE N/mm2	GY	-0.025	-	-	-	-	-
2233	PRE N/mm2	GY	-0.025	-	-	-	-	-
2234	PRE N/mm2	GY	-0.025	-	-	-	-	-
2235	PRE N/mm2	GY	-0.025	-	-	-	-	-
2236	PRE N/mm2	GY	-0.025	-	-	-	-	-
2237	PRE N/mm2	GY	-0.025	-	-	-	-	-
2238	PRE N/mm2	GY	-0.025	-	-	-	-	-
2239	PRE N/mm2	GY	-0.025	-	-	-	-	-
2240	PRE N/mm2	GY	-0.025	-	-	-	-	-
2241	PRE N/mm2	GY	-0.025	-	-	-	-	-
2242	PRE N/mm2	GY	-0.025	-	-	-	-	-
2243	PRE N/mm2	GY	-0.025	-	-	-	-	-
2244	PRE N/mm2	GY	-0.025	-	-	-	-	-
2245	PRE N/mm2	GY	-0.025	-	-	-	-	-
2246	PRE N/mm2	GY	-0.025	-	-	-	-	-
2247	PRE N/mm2	GY	-0.025	-	-	-	-	-
2248	PRE N/mm2	GY	-0.025	-	-	-	-	-
2249	PRE N/mm2	GY	-0.025	-	-	-	-	-
2250	PRE N/mm2	GY	-0.025	-	-	-	-	-
2251	PRE N/mm2	GY	-0.025	-	-	-	-	-
2252	PRE N/mm2	GY	-0.025	-	-	-	-	-
2253	PRE N/mm2	GY	-0.025	-	-	-	-	-
2254	PRE N/mm2	GY	-0.025	-	-	-	-	-
2255	PRE N/mm2	GY	-0.025	-	-	-	-	-
2256	PRE N/mm2	GY	-0.025	-	-	-	-	-
2257	PRE N/mm2	GY	-0.025	-	-	-	-	-
2258	PRE N/mm2	GY	-0.025	-	-	-	-	-
2259	PRE N/mm2	GY	-0.025	-	-	-	-	-
2260	PRE N/mm2	GY	-0.025	-	-	-	-	-
2261	PRE N/mm2	GY	-0.025	-	-	-	-	-
2262	PRE N/mm2	GY	-0.025	-	-	-	-	-
2263	PRE N/mm2	GY	-0.025	-	-	-	-	-
2264	PRE N/mm2	GY	-0.025	-	-	-	-	-
2265	PRE N/mm2	GY	-0.025	-	-	-	-	-
2266	PRE N/mm2	GY	-0.025	-	-	-	-	-
2267	PRE N/mm2	GY	-0.025	-	-	-	-	-
2268	PRE N/mm2	GY	-0.025	-	-	-	-	-
2269	PRE N/mm2	GY	-0.025	-	-	-	-	-
2270	PRE N/mm2	GY	-0.025	-	-	-	-	-
2271	PRE N/mm2	GY	-0.025	-	-	-	-	-
2272	PRE N/mm2	GY	-0.025	-	-	-	-	-
2273	PRE N/mm2	GY	-0.025	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2274	PRE N/mm2	GY	-0.025	-	-	-	-	-
2275	PRE N/mm2	GY	-0.025	-	-	-	-	-
2276	PRE N/mm2	GY	-0.025	-	-	-	-	-
2277	PRE N/mm2	GY	-0.025	-	-	-	-	-
2278	PRE N/mm2	GY	-0.025	-	-	-	-	-
2279	PRE N/mm2	GY	-0.025	-	-	-	-	-
2280	PRE N/mm2	GY	-0.025	-	-	-	-	-
2281	PRE N/mm2	GY	-0.025	-	-	-	-	-
2282	PRE N/mm2	GY	-0.025	-	-	-	-	-
2283	PRE N/mm2	GY	-0.025	-	-	-	-	-
2284	PRE N/mm2	GY	-0.025	-	-	-	-	-
2285	PRE N/mm2	GY	-0.025	-	-	-	-	-
2286	PRE N/mm2	GY	-0.025	-	-	-	-	-
2287	PRE N/mm2	GY	-0.025	-	-	-	-	-
2288	PRE N/mm2	GY	-0.025	-	-	-	-	-
2289	PRE N/mm2	GY	-0.025	-	-	-	-	-
2290	PRE N/mm2	GY	-0.025	-	-	-	-	-
2291	PRE N/mm2	GY	-0.025	-	-	-	-	-
2292	PRE N/mm2	GY	-0.025	-	-	-	-	-
2293	PRE N/mm2	GY	-0.025	-	-	-	-	-
2294	PRE N/mm2	GY	-0.025	-	-	-	-	-
2295	PRE N/mm2	GY	-0.025	-	-	-	-	-
2296	PRE N/mm2	GY	-0.025	-	-	-	-	-
2297	PRE N/mm2	GY	-0.025	-	-	-	-	-
2298	PRE N/mm2	GY	-0.025	-	-	-	-	-
2299	PRE N/mm2	GY	-0.025	-	-	-	-	-
2300	PRE N/mm2	GY	-0.022	-	-	-	-	-
2301	PRE N/mm2	GY	-0.022	-	-	-	-	-
2302	PRE N/mm2	GY	-0.022	-	-	-	-	-
2303	PRE N/mm2	GY	-0.022	-	-	-	-	-
2304	PRE N/mm2	GY	-0.022	-	-	-	-	-
2305	PRE N/mm2	GY	-0.022	-	-	-	-	-
2306	PRE N/mm2	GY	-0.022	-	-	-	-	-
2307	PRE N/mm2	GY	-0.022	-	-	-	-	-
2308	PRE N/mm2	GY	-0.022	-	-	-	-	-
2309	PRE N/mm2	GY	-0.022	-	-	-	-	-
2310	PRE N/mm2	GY	-0.022	-	-	-	-	-
2311	PRE N/mm2	GY	-0.022	-	-	-	-	-
2312	PRE N/mm2	GY	-0.022	-	-	-	-	-
2313	PRE N/mm2	GY	-0.022	-	-	-	-	-
2314	PRE N/mm2	GY	-0.022	-	-	-	-	-
2315	PRE N/mm2	GY	-0.022	-	-	-	-	-
2316	PRE N/mm2	GY	-0.022	-	-	-	-	-
2317	PRE N/mm2	GY	-0.022	-	-	-	-	-
2318	PRE N/mm2	GY	-0.022	-	-	-	-	-
2319	PRE N/mm2	GY	-0.022	-	-	-	-	-
2320	PRE N/mm2	GY	-0.022	-	-	-	-	-
2321	PRE N/mm2	GY	-0.022	-	-	-	-	-
2322	PRE N/mm2	GY	-0.022	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2323	PRE N/mm2	GY	-0.022	-	-	-	-	-
2324	PRE N/mm2	GY	-0.022	-	-	-	-	-
2325	PRE N/mm2	GY	-0.022	-	-	-	-	-
2326	PRE N/mm2	GY	-0.022	-	-	-	-	-
2327	PRE N/mm2	GY	-0.022	-	-	-	-	-
2328	PRE N/mm2	GY	-0.022	-	-	-	-	-
2329	PRE N/mm2	GY	-0.022	-	-	-	-	-
2330	PRE N/mm2	GY	-0.022	-	-	-	-	-
2331	PRE N/mm2	GY	-0.022	-	-	-	-	-
2332	PRE N/mm2	GY	-0.022	-	-	-	-	-
2333	PRE N/mm2	GY	-0.022	-	-	-	-	-
2334	PRE N/mm2	GY	-0.022	-	-	-	-	-
2335	PRE N/mm2	GY	-0.022	-	-	-	-	-
2336	PRE N/mm2	GY	-0.022	-	-	-	-	-
2337	PRE N/mm2	GY	-0.022	-	-	-	-	-
2338	PRE N/mm2	GY	-0.022	-	-	-	-	-
2339	PRE N/mm2	GY	-0.022	-	-	-	-	-
2340	PRE N/mm2	GY	-0.022	-	-	-	-	-
2341	PRE N/mm2	GY	-0.022	-	-	-	-	-
2342	PRE N/mm2	GY	-0.022	-	-	-	-	-
2343	PRE N/mm2	GY	-0.022	-	-	-	-	-
2344	PRE N/mm2	GY	-0.022	-	-	-	-	-
2345	PRE N/mm2	GY	-0.022	-	-	-	-	-
2346	PRE N/mm2	GY	-0.022	-	-	-	-	-
2347	PRE N/mm2	GY	-0.022	-	-	-	-	-
2348	PRE N/mm2	GY	-0.022	-	-	-	-	-
2349	PRE N/mm2	GY	-0.022	-	-	-	-	-
2350	PRE N/mm2	GY	-0.022	-	-	-	-	-
2351	PRE N/mm2	GY	-0.022	-	-	-	-	-
2352	PRE N/mm2	GY	-0.022	-	-	-	-	-
2353	PRE N/mm2	GY	-0.022	-	-	-	-	-
2354	PRE N/mm2	GY	-0.022	-	-	-	-	-
2355	PRE N/mm2	GY	-0.022	-	-	-	-	-
2356	PRE N/mm2	GY	-0.022	-	-	-	-	-
2357	PRE N/mm2	GY	-0.022	-	-	-	-	-
2358	PRE N/mm2	GY	-0.022	-	-	-	-	-
2359	PRE N/mm2	GY	-0.022	-	-	-	-	-
2360	PRE N/mm2	GY	-0.022	-	-	-	-	-
2361	PRE N/mm2	GY	-0.022	-	-	-	-	-
2362	PRE N/mm2	GY	-0.022	-	-	-	-	-
2363	PRE N/mm2	GY	-0.022	-	-	-	-	-
2364	PRE N/mm2	GY	-0.022	-	-	-	-	-
2365	PRE N/mm2	GY	-0.022	-	-	-	-	-
2366	PRE N/mm2	GY	-0.022	-	-	-	-	-
2367	PRE N/mm2	GY	-0.022	-	-	-	-	-
2368	PRE N/mm2	GY	-0.022	-	-	-	-	-
2369	PRE N/mm2	GY	-0.022	-	-	-	-	-
2370	PRE N/mm2	GY	-0.022	-	-	-	-	-
2371	PRE N/mm2	GY	-0.022	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2372	PRE N/mm2	GY	-0.022	-	-	-	-	-
2373	PRE N/mm2	GY	-0.022	-	-	-	-	-
2374	PRE N/mm2	GY	-0.022	-	-	-	-	-
2375	PRE N/mm2	GY	-0.022	-	-	-	-	-
2376	PRE N/mm2	GY	-0.022	-	-	-	-	-
2377	PRE N/mm2	GY	-0.022	-	-	-	-	-
2378	PRE N/mm2	GY	-0.022	-	-	-	-	-
2379	PRE N/mm2	GY	-0.022	-	-	-	-	-
2380	PRE N/mm2	GY	-0.022	-	-	-	-	-
2381	PRE N/mm2	GY	-0.022	-	-	-	-	-
2382	PRE N/mm2	GY	-0.022	-	-	-	-	-
2383	PRE N/mm2	GY	-0.022	-	-	-	-	-
2384	PRE N/mm2	GY	-0.022	-	-	-	-	-
2385	PRE N/mm2	GY	-0.022	-	-	-	-	-
2386	PRE N/mm2	GY	-0.022	-	-	-	-	-
2387	PRE N/mm2	GY	-0.022	-	-	-	-	-
2388	PRE N/mm2	GY	-0.022	-	-	-	-	-
2389	PRE N/mm2	GY	-0.022	-	-	-	-	-
2390	PRE N/mm2	GY	-0.022	-	-	-	-	-
2391	PRE N/mm2	GY	-0.022	-	-	-	-	-
2392	PRE N/mm2	GY	-0.022	-	-	-	-	-
2393	PRE N/mm2	GY	-0.022	-	-	-	-	-
2394	PRE N/mm2	GY	-0.022	-	-	-	-	-
2395	PRE N/mm2	GY	-0.022	-	-	-	-	-
2396	PRE N/mm2	GY	-0.022	-	-	-	-	-
2397	PRE N/mm2	GY	-0.022	-	-	-	-	-
2398	PRE N/mm2	GY	-0.022	-	-	-	-	-
2399	PRE N/mm2	GY	-0.022	-	-	-	-	-
2400	PRE N/mm2	GY	-0.022	-	-	-	-	-
2401	PRE N/mm2	GY	-0.022	-	-	-	-	-
2402	PRE N/mm2	GY	-0.022	-	-	-	-	-
2403	PRE N/mm2	GY	-0.022	-	-	-	-	-
2404	PRE N/mm2	GY	-0.022	-	-	-	-	-
2405	PRE N/mm2	GY	-0.022	-	-	-	-	-
2406	PRE N/mm2	GY	-0.022	-	-	-	-	-
2407	PRE N/mm2	GY	-0.022	-	-	-	-	-
2408	PRE N/mm2	GY	-0.022	-	-	-	-	-
2409	PRE N/mm2	GY	-0.022	-	-	-	-	-
2410	PRE N/mm2	GY	-0.022	-	-	-	-	-
2411	PRE N/mm2	GY	-0.022	-	-	-	-	-
2412	PRE N/mm2	GY	-0.022	-	-	-	-	-
2413	PRE N/mm2	GY	-0.022	-	-	-	-	-
2414	PRE N/mm2	GY	-0.037	-	-	-	-	-
2415	PRE N/mm2	GY	-0.037	-	-	-	-	-
2416	PRE N/mm2	GY	-0.037	-	-	-	-	-
2417	PRE N/mm2	GY	-0.037	-	-	-	-	-
2418	PRE N/mm2	GY	-0.037	-	-	-	-	-
2419	PRE N/mm2	GY	-0.037	-	-	-	-	-
2420	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2421	PRE N/mm2	GY	-0.037	-	-	-	-	-
2422	PRE N/mm2	GY	-0.037	-	-	-	-	-
2423	PRE N/mm2	GY	-0.037	-	-	-	-	-
2424	PRE N/mm2	GY	-0.037	-	-	-	-	-
2425	PRE N/mm2	GY	-0.037	-	-	-	-	-
2426	PRE N/mm2	GY	-0.037	-	-	-	-	-
2427	PRE N/mm2	GY	-0.037	-	-	-	-	-
2428	PRE N/mm2	GY	-0.037	-	-	-	-	-
2429	PRE N/mm2	GY	-0.037	-	-	-	-	-
2430	PRE N/mm2	GY	-0.037	-	-	-	-	-
2431	PRE N/mm2	GY	-0.037	-	-	-	-	-
2432	PRE N/mm2	GY	-0.037	-	-	-	-	-
2433	PRE N/mm2	GY	-0.037	-	-	-	-	-
2434	PRE N/mm2	GY	-0.037	-	-	-	-	-
2435	PRE N/mm2	GY	-0.037	-	-	-	-	-
2436	PRE N/mm2	GY	-0.037	-	-	-	-	-
2437	PRE N/mm2	GY	-0.037	-	-	-	-	-
2438	PRE N/mm2	GY	-0.037	-	-	-	-	-
2439	PRE N/mm2	GY	-0.037	-	-	-	-	-
2440	PRE N/mm2	GY	-0.037	-	-	-	-	-
2441	PRE N/mm2	GY	-0.037	-	-	-	-	-
2442	PRE N/mm2	GY	-0.037	-	-	-	-	-
2443	PRE N/mm2	GY	-0.037	-	-	-	-	-
2444	PRE N/mm2	GY	-0.037	-	-	-	-	-
2445	PRE N/mm2	GY	-0.037	-	-	-	-	-
2446	PRE N/mm2	GY	-0.037	-	-	-	-	-
2447	PRE N/mm2	GY	-0.037	-	-	-	-	-
2448	PRE N/mm2	GY	-0.037	-	-	-	-	-
2449	PRE N/mm2	GY	-0.037	-	-	-	-	-
2450	PRE N/mm2	GY	-0.037	-	-	-	-	-
2451	PRE N/mm2	GY	-0.037	-	-	-	-	-
2452	PRE N/mm2	GY	-0.037	-	-	-	-	-
2453	PRE N/mm2	GY	-0.037	-	-	-	-	-
2454	PRE N/mm2	GY	-0.037	-	-	-	-	-
2455	PRE N/mm2	GY	-0.037	-	-	-	-	-
2456	PRE N/mm2	GY	-0.037	-	-	-	-	-
2457	PRE N/mm2	GY	-0.037	-	-	-	-	-
2458	PRE N/mm2	GY	-0.037	-	-	-	-	-
2459	PRE N/mm2	GY	-0.037	-	-	-	-	-
2460	PRE N/mm2	GY	-0.037	-	-	-	-	-
2461	PRE N/mm2	GY	-0.037	-	-	-	-	-
2462	PRE N/mm2	GY	-0.037	-	-	-	-	-
2463	PRE N/mm2	GY	-0.037	-	-	-	-	-
2464	PRE N/mm2	GY	-0.037	-	-	-	-	-
2465	PRE N/mm2	GY	-0.037	-	-	-	-	-
2466	PRE N/mm2	GY	-0.037	-	-	-	-	-
2467	PRE N/mm2	GY	-0.037	-	-	-	-	-
2468	PRE N/mm2	GY	-0.037	-	-	-	-	-
2469	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2470	PRE N/mm2	GY	-0.037	-	-	-	-	-
2471	PRE N/mm2	GY	-0.037	-	-	-	-	-
2472	PRE N/mm2	GY	-0.037	-	-	-	-	-
2473	PRE N/mm2	GY	-0.037	-	-	-	-	-
2474	PRE N/mm2	GY	-0.037	-	-	-	-	-
2475	PRE N/mm2	GY	-0.037	-	-	-	-	-
2476	PRE N/mm2	GY	-0.037	-	-	-	-	-
2477	PRE N/mm2	GY	-0.037	-	-	-	-	-
2478	PRE N/mm2	GY	-0.037	-	-	-	-	-
2479	PRE N/mm2	GY	-0.037	-	-	-	-	-
2480	PRE N/mm2	GY	-0.037	-	-	-	-	-
2481	PRE N/mm2	GY	-0.037	-	-	-	-	-
2482	PRE N/mm2	GY	-0.037	-	-	-	-	-
2483	PRE N/mm2	GY	-0.037	-	-	-	-	-
2484	PRE N/mm2	GY	-0.037	-	-	-	-	-
2485	PRE N/mm2	GY	-0.037	-	-	-	-	-
2486	PRE N/mm2	GY	-0.037	-	-	-	-	-
2487	PRE N/mm2	GY	-0.037	-	-	-	-	-
2488	PRE N/mm2	GY	-0.037	-	-	-	-	-
2489	PRE N/mm2	GY	-0.037	-	-	-	-	-
2490	PRE N/mm2	GY	-0.037	-	-	-	-	-
2491	PRE N/mm2	GY	-0.037	-	-	-	-	-
2492	PRE N/mm2	GY	-0.037	-	-	-	-	-
2493	PRE N/mm2	GY	-0.037	-	-	-	-	-
2494	PRE N/mm2	GY	-0.037	-	-	-	-	-
2495	PRE N/mm2	GY	-0.037	-	-	-	-	-
2496	PRE N/mm2	GY	-0.037	-	-	-	-	-
2497	PRE N/mm2	GY	-0.037	-	-	-	-	-
2498	PRE N/mm2	GY	-0.037	-	-	-	-	-
2499	PRE N/mm2	GY	-0.037	-	-	-	-	-
2500	PRE N/mm2	GY	-0.037	-	-	-	-	-
2501	PRE N/mm2	GY	-0.037	-	-	-	-	-
2502	PRE N/mm2	GY	-0.037	-	-	-	-	-
2503	PRE N/mm2	GY	-0.037	-	-	-	-	-
2504	PRE N/mm2	GY	-0.037	-	-	-	-	-
2505	PRE N/mm2	GY	-0.037	-	-	-	-	-
2506	PRE N/mm2	GY	-0.037	-	-	-	-	-
2507	PRE N/mm2	GY	-0.037	-	-	-	-	-
2508	PRE N/mm2	GY	-0.037	-	-	-	-	-
2509	PRE N/mm2	GY	-0.037	-	-	-	-	-
2510	PRE N/mm2	GY	-0.037	-	-	-	-	-
2511	PRE N/mm2	GY	-0.037	-	-	-	-	-
2512	PRE N/mm2	GY	-0.037	-	-	-	-	-
2513	PRE N/mm2	GY	-0.037	-	-	-	-	-
2514	PRE N/mm2	GY	-0.037	-	-	-	-	-
2515	PRE N/mm2	GY	-0.037	-	-	-	-	-
2516	PRE N/mm2	GY	-0.037	-	-	-	-	-
2517	PRE N/mm2	GY	-0.037	-	-	-	-	-
2518	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2519	PRE N/mm2	GY	-0.037	-	-	-	-	-
2520	PRE N/mm2	GY	-0.037	-	-	-	-	-
2521	PRE N/mm2	GY	-0.037	-	-	-	-	-
2522	PRE N/mm2	GY	-0.037	-	-	-	-	-
2523	PRE N/mm2	GY	-0.037	-	-	-	-	-
2524	PRE N/mm2	GY	-0.037	-	-	-	-	-
2525	PRE N/mm2	GY	-0.037	-	-	-	-	-
2526	PRE N/mm2	GY	-0.037	-	-	-	-	-
2527	PRE N/mm2	GY	-0.037	-	-	-	-	-
2528	PRE N/mm2	GY	-0.037	-	-	-	-	-
2529	PRE N/mm2	GY	-0.037	-	-	-	-	-
2530	PRE N/mm2	GY	-0.037	-	-	-	-	-
2531	PRE N/mm2	GY	-0.037	-	-	-	-	-
2532	PRE N/mm2	GY	-0.037	-	-	-	-	-
2533	PRE N/mm2	GY	-0.037	-	-	-	-	-
2534	PRE N/mm2	GY	-0.037	-	-	-	-	-
2535	PRE N/mm2	GY	-0.037	-	-	-	-	-
2536	PRE N/mm2	GY	-0.037	-	-	-	-	-
2537	PRE N/mm2	GY	-0.037	-	-	-	-	-
2538	PRE N/mm2	GY	-0.037	-	-	-	-	-
2539	PRE N/mm2	GY	-0.037	-	-	-	-	-
2540	PRE N/mm2	GY	-0.037	-	-	-	-	-
2541	PRE N/mm2	GY	-0.037	-	-	-	-	-
2542	PRE N/mm2	GY	-0.037	-	-	-	-	-
2543	PRE N/mm2	GY	-0.037	-	-	-	-	-
2544	PRE N/mm2	GY	-0.037	-	-	-	-	-
2545	PRE N/mm2	GY	-0.037	-	-	-	-	-
2546	PRE N/mm2	GY	-0.037	-	-	-	-	-
2547	PRE N/mm2	GY	-0.037	-	-	-	-	-
2548	PRE N/mm2	GY	-0.037	-	-	-	-	-
2549	PRE N/mm2	GY	-0.037	-	-	-	-	-
2550	PRE N/mm2	GY	-0.037	-	-	-	-	-
2551	PRE N/mm2	GY	-0.037	-	-	-	-	-
2552	PRE N/mm2	GY	-0.037	-	-	-	-	-
2553	PRE N/mm2	GY	-0.037	-	-	-	-	-
2554	PRE N/mm2	GY	-0.037	-	-	-	-	-
2555	PRE N/mm2	GY	-0.037	-	-	-	-	-
2556	PRE N/mm2	GY	-0.037	-	-	-	-	-
2557	PRE N/mm2	GY	-0.037	-	-	-	-	-
2558	PRE N/mm2	GY	-0.037	-	-	-	-	-
2559	PRE N/mm2	GY	-0.037	-	-	-	-	-
2560	PRE N/mm2	GY	-0.037	-	-	-	-	-
2561	PRE N/mm2	GY	-0.037	-	-	-	-	-
2562	PRE N/mm2	GY	-0.037	-	-	-	-	-
2563	PRE N/mm2	GY	-0.037	-	-	-	-	-
2564	PRE N/mm2	GY	-0.037	-	-	-	-	-
2565	PRE N/mm2	GY	-0.037	-	-	-	-	-
2566	PRE N/mm2	GY	-0.037	-	-	-	-	-
2567	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2568	PRE N/mm2	GY	-0.037	-	-	-	-	-
2569	PRE N/mm2	GY	-0.037	-	-	-	-	-
2570	PRE N/mm2	GY	-0.037	-	-	-	-	-
2571	PRE N/mm2	GY	-0.037	-	-	-	-	-
2572	PRE N/mm2	GY	-0.037	-	-	-	-	-
2573	PRE N/mm2	GY	-0.037	-	-	-	-	-
2574	PRE N/mm2	GY	-0.037	-	-	-	-	-
2575	PRE N/mm2	GY	-0.037	-	-	-	-	-
2576	PRE N/mm2	GY	-0.037	-	-	-	-	-
2577	PRE N/mm2	GY	-0.037	-	-	-	-	-
2578	PRE N/mm2	GY	-0.037	-	-	-	-	-
2579	PRE N/mm2	GY	-0.037	-	-	-	-	-
2580	PRE N/mm2	GY	-0.037	-	-	-	-	-
2581	PRE N/mm2	GY	-0.037	-	-	-	-	-
2582	PRE N/mm2	GY	-0.037	-	-	-	-	-
2583	PRE N/mm2	GY	-0.037	-	-	-	-	-
2584	PRE N/mm2	GY	-0.037	-	-	-	-	-
2585	PRE N/mm2	GY	-0.037	-	-	-	-	-
2586	PRE N/mm2	GY	-0.037	-	-	-	-	-
2587	PRE N/mm2	GY	-0.037	-	-	-	-	-
2588	PRE N/mm2	GY	-0.037	-	-	-	-	-
2589	PRE N/mm2	GY	-0.037	-	-	-	-	-
2590	PRE N/mm2	GY	-0.037	-	-	-	-	-
2591	PRE N/mm2	GY	-0.037	-	-	-	-	-
2592	PRE N/mm2	GY	-0.037	-	-	-	-	-
2593	PRE N/mm2	GY	-0.037	-	-	-	-	-
2594	PRE N/mm2	GY	-0.037	-	-	-	-	-
2595	PRE N/mm2	GY	-0.037	-	-	-	-	-
2596	PRE N/mm2	GY	-0.037	-	-	-	-	-
2597	PRE N/mm2	GY	-0.037	-	-	-	-	-
2598	PRE N/mm2	GY	-0.037	-	-	-	-	-
2599	PRE N/mm2	GY	-0.037	-	-	-	-	-
2600	PRE N/mm2	GY	-0.037	-	-	-	-	-
2601	PRE N/mm2	GY	-0.037	-	-	-	-	-
2602	PRE N/mm2	GY	-0.037	-	-	-	-	-
2603	PRE N/mm2	GY	-0.037	-	-	-	-	-
2604	PRE N/mm2	GY	-0.037	-	-	-	-	-
2605	PRE N/mm2	GY	-0.037	-	-	-	-	-
2606	PRE N/mm2	GY	-0.037	-	-	-	-	-
2607	PRE N/mm2	GY	-0.037	-	-	-	-	-
2608	PRE N/mm2	GY	-0.037	-	-	-	-	-
2609	PRE N/mm2	GY	-0.037	-	-	-	-	-
2610	PRE N/mm2	GY	-0.037	-	-	-	-	-
2611	PRE N/mm2	GY	-0.037	-	-	-	-	-
2612	PRE N/mm2	GY	-0.037	-	-	-	-	-
2613	PRE N/mm2	GY	-0.037	-	-	-	-	-
2614	PRE N/mm2	GY	-0.037	-	-	-	-	-
2615	PRE N/mm2	GY	-0.037	-	-	-	-	-
2616	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Plate Loads Cont...

Plate	Type	Direction	Fa	Fb	X1 (m)	Y1 (m)	X2 (m)	Y2 (m)
2617	PRE N/mm2	GY	-0.037	-	-	-	-	-
2618	PRE N/mm2	GY	-0.037	-	-	-	-	-
2619	PRE N/mm2	GY	-0.037	-	-	-	-	-
2620	PRE N/mm2	GY	-0.037	-	-	-	-	-
2621	PRE N/mm2	GY	-0.037	-	-	-	-	-
2622	PRE N/mm2	GY	-0.037	-	-	-	-	-
2623	PRE N/mm2	GY	-0.037	-	-	-	-	-
2624	PRE N/mm2	GY	-0.037	-	-	-	-	-
2625	PRE N/mm2	GY	-0.037	-	-	-	-	-
2626	PRE N/mm2	GY	-0.037	-	-	-	-	-
2627	PRE N/mm2	GY	-0.037	-	-	-	-	-
2628	PRE N/mm2	GY	-0.037	-	-	-	-	-
2629	PRE N/mm2	GY	-0.037	-	-	-	-	-
2630	PRE N/mm2	GY	-0.037	-	-	-	-	-
2631	PRE N/mm2	GY	-0.037	-	-	-	-	-
2632	PRE N/mm2	GY	-0.037	-	-	-	-	-
2633	PRE N/mm2	GY	-0.037	-	-	-	-	-
2634	PRE N/mm2	GY	-0.037	-	-	-	-	-
2635	PRE N/mm2	GY	-0.037	-	-	-	-	-
2636	PRE N/mm2	GY	-0.037	-	-	-	-	-
2637	PRE N/mm2	GY	-0.037	-	-	-	-	-
2638	PRE N/mm2	GY	-0.037	-	-	-	-	-
2639	PRE N/mm2	GY	-0.037	-	-	-	-	-
2640	PRE N/mm2	GY	-0.037	-	-	-	-	-
2641	PRE N/mm2	GY	-0.037	-	-	-	-	-
2642	PRE N/mm2	GY	-0.037	-	-	-	-	-
2643	PRE N/mm2	GY	-0.037	-	-	-	-	-
2644	PRE N/mm2	GY	-0.037	-	-	-	-	-
2645	PRE N/mm2	GY	-0.037	-	-	-	-	-
2646	PRE N/mm2	GY	-0.037	-	-	-	-	-
2647	PRE N/mm2	GY	-0.037	-	-	-	-	-
2648	PRE N/mm2	GY	-0.037	-	-	-	-	-
2649	PRE N/mm2	GY	-0.037	-	-	-	-	-
2650	PRE N/mm2	GY	-0.037	-	-	-	-	-
2651	PRE N/mm2	GY	-0.037	-	-	-	-	-
2652	PRE N/mm2	GY	-0.037	-	-	-	-	-
2653	PRE N/mm2	GY	-0.037	-	-	-	-	-
2654	PRE N/mm2	GY	-0.037	-	-	-	-	-
2655	PRE N/mm2	GY	-0.037	-	-	-	-	-
2656	PRE N/mm2	GY	-0.037	-	-	-	-	-
2657	PRE N/mm2	GY	-0.037	-	-	-	-	-
2658	PRE N/mm2	GY	-0.037	-	-	-	-	-
2659	PRE N/mm2	GY	-0.037	-	-	-	-	-
2660	PRE N/mm2	GY	-0.037	-	-	-	-	-

1 DEAD LOAD (DL) : Selfweight

Direction	Factor	Assigned Geometry
Y	-1.000	ALL

2 LIVE LOAD (LL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-7.046	-0.807	-	-	-
2	-	-12.180	-1.426	-	-	-
3	-	-6.949	0.414	-	-	-
4	-0.225	-3.999	-0.053	-	-	-
5	0.592	-4.603	-0.004	-	-	-
6	0.012	-2.616	-0.337	-	-	-
7	-	-5.887	-0.014	-	-	-
8	-0.885	-6.662	-0.060	-	-	-
9	0.594	-9.708	-0.592	-	-	-
10	-0.163	-6.788	0.168	-	-	-
11	-	-0.006	-0.004	-	-	-
12	-0.374	-5.101	0.518	-	-	-
13	0.243	-6.156	0.009	-	-	-
14	-	-8.869	0.373	-	-	-
15	-	-8.527	0.953	-	-	-
18	0.018	-6.063	1.055	1.231	-	-
21	-	0.006	-0.004	-	-	-
22	-	-10.288	-1.094	-	-	-
25	0.069	-4.982	-0.144	-0.268	-	-
28	0.066	-5.142	-0.465	-	-	-
29	-0.540	-6.009	-0.541	-	-	-
30	0.418	-3.426	-0.292	-	-	-
31	-	-3.800	0.025	-	-	-
32	0.084	-9.855	0.400	-	-	-
33	-0.811	-11.912	0.539	-	-	-
34	0.785	-7.187	0.351	-	-	-
35	-	-13.325	1.056	-	-	-
36	-0.001	-8.205	-0.078	-	-	-
37	-	-1.506	-0.047	-	-	-
38	-0.717	-5.126	0.013	-	-	-
39	0.801	-6.304	0.102	-	-	-
40	-	-8.688	0.035	-	-	-
41	-	-6.852	-0.021	-	-	-
42	-0.059	-4.505	-0.023	-	-	-

3 OPERATING EQUIPMENT LOAD (OEQL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	0.113	0.042	-	-	-
2	-	0.007	0.006	-	-	-
3	-	0.003	0.001	-	-	-
4	-0.021	-0.030	0.001	-	-	-
5	-0.024	0.033	-	-	-	-
6	-	-0.009	-0.002	-	-	-
7	-	-0.003	0.001	-	-	-
8	0.017	0.025	0.001	-	-	-
9	0.021	-0.023	0.001	-	-	-
10	-	0.009	-0.002	-	-	-
11	-	0.004	0.003	-	-	-
12	-	-0.004	0.002	-	-	-
13	-	-	-	-	-	-
14	-	-2.785	-0.223	-	-	-
15	-	-0.008	0.005	-	-	-
18	0.037	-11.034	0.007	0.039	-	-
21	-	-0.004	0.003	-	-	-
22	-	-6.123	-0.385	-	-	-
25	0.055	-11.144	0.078	0.204	-	-
28	-0.001	0.095	0.022	-	-	-
29	-0.003	0.014	0.006	-	-	-
30	-0.004	-0.003	-0.003	-	-	-
31	-	-0.110	0.021	-	-	-
32	-0.001	-0.096	0.023	-	-	-
33	0.006	-0.004	0.005	-	-	-
34	0.007	-0.006	-0.002	-	-	-
35	-	-1.244	0.326	-	-	-
36	-	0.006	0.002	-	-	-
37	-	0.204	-0.012	-	-	-
38	0.056	0.101	-	-	-	-
39	0.046	-0.107	0.002	-	-	-
40	-	-	-	-	-	-
41	-	-0.002	-	-	-	-
42	-	0.001	-	-	-	-

4 TEST EQUIPMENT LOAD (TEQL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	0.306	0.114	-	-	-
2	-	0.029	0.023	-	-	-
3	-	0.016	0.004	-	-	-
4	-0.142	-0.207	0.003	-	-	-
5	-0.156	0.217	-	-	-	-
6	-	-0.027	-0.007	-	-	-
7	-	-0.016	0.004	-	-	-
8	0.007	-0.003	0.003	-	-	-
9	0.002	0.061	0.026	-	-	-
10	-	0.027	-0.007	-	-	-
11	-	0.016	0.009	-	-	-
12	-	-0.067	0.029	-	-	-
13	-	-0.001	-	-	-	-
14	-	-7.462	-0.593	-	-	-
15	-	-0.032	0.021	-	-	-
18	0.095	-29.359	0.040	0.217	-	-
21	-	-0.016	0.009	-	-	-
22	-	-16.408	-1.027	-	-	-
25	0.144	-29.660	0.194	0.495	-	-
28	-	0.120	0.028	-	-	-
29	-0.006	0.014	0.007	-	-	-
30	-0.007	0.003	-0.003	-	-	-
31	-	-0.282	0.054	-	-	-
32	-0.001	-0.121	0.029	-	-	-
33	0.006	-0.013	0.007	-	-	-
34	0.007	-0.003	-0.003	-	-	-
35	-	-3.332	0.880	-	-	-
36	-	0.016	0.004	-	-	-
37	-	0.537	-0.029	-	-	-
38	0.027	0.037	-	-	-	-
39	0.009	-0.053	0.004	-	-	-
40	-	-	-	-	-	-
41	-	-	-	-	-	-
42	-	-	-	-	-	-

5 CABLE TRAY LOAD (CTL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-	-	-	-	-
2	-	-0.037	-0.003	-	-	-
3	-	-0.029	-0.001	-	-	-
4	-0.023	-0.198	-0.001	-	-	-
5	0.049	-0.609	-0.001	-	-	-
6	0.003	-0.122	-0.026	-	-	-
7	-	-0.057	0.001	-	-	-
8	-0.099	-0.265	0.001	-	-	-
9	0.071	-1.727	-0.045	-	-	-
10	-	-0.507	0.007	-	-	-
11	-	-	-	-	-	-
12	-	-0.026	0.066	-	-	-
13	-0.001	0.001	-	-	-	-
14	-	0.001	0.001	-	-	-
15	-	-0.006	0.002	-	-	-
18	-	-	-	0.003	-	-
21	-	-	-	-	-	-
22	-	-0.001	-	-	-	-
25	-	0.002	0.003	0.011	-	-
28	-	0.066	0.002	-	-	-
29	0.027	0.190	-0.116	-	-	-
30	-0.032	0.387	-0.033	-	-	-
31	-	-0.002	-	-	-	-
32	-	-0.617	0.032	-	-	-
33	-0.158	-2.220	0.067	-	-	-
34	0.148	-1.605	0.095	-	-	-
35	-	-2.233	-0.005	-	-	-
36	-	-0.379	-0.002	-	-	-
37	-	-2.276	-0.004	-	-	-
38	-0.344	-2.939	0.001	-	-	-
39	0.356	-2.333	-0.002	-	-	-
40	-	-3.695	-0.002	-	-	-
41	-	-4.451	-0.023	-	-	-
42	-	-2.644	-0.019	-	-	-

6 PIPE VERTICAL LOAD (PVL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-4.001	-0.545	-	-	-
2	-	-4.487	-0.700	-	-	-
3	-	-1.689	-0.101	-	-	-
4	-0.246	-2.653	-0.102	-	-	-
5	0.164	-2.464	-0.004	-	-	-
6	-	-0.890	-0.059	-	-	-
7	-	-3.364	0.156	-	-	-
8	-0.412	-4.438	0.155	-	-	-
9	0.469	-4.540	-0.127	-	-	-
10	-	-0.692	0.028	-	-	-
11	-	-0.863	0.001	-	-	-
12	-0.001	-0.022	0.148	-	-	-
13	-0.002	0.003	-	-	-	-
14	-	-3.598	0.486	-	-	-
15	-	-2.061	0.363	-	-	-
18	-0.007	-0.837	0.149	0.248	-	-
21	-	-0.866	0.001	-	-	-
22	-	-5.425	-0.579	-	-	-
25	0.021	-1.175	-0.057	-0.051	-	-
28	-	-0.161	-0.043	-	-	-
29	0.003	0.092	0.004	-	-	-
30	0.049	-0.545	-0.059	-	-	-
31	-	-3.272	0.028	-	-	-
32	-	0.009	-0.036	-	-	-
33	-0.107	-0.243	0.006	-	-	-
34	0.054	-1.676	0.048	-	-	-
35	-	-11.212	0.632	-	-	-
36	-	-0.974	0.002	-	-	-
37	-	-5.115	-0.039	-	-	-
38	-0.126	-1.882	0.103	-	-	-
39	0.138	-0.857	0.106	-	-	-
40	-	-0.540	0.001	-	-	-
41	-	-4.890	-0.004	-	-	-
42	-	-1.967	-0.002	-	-	-

7 PIPE HORIZONTAL LOAD (+X) (PHL(+X)) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	0.070	-0.012	-0.008	-	-	-
2	0.070	-0.048	-0.038	-	-	-
3	0.070	-0.036	-0.009	-	-	-
4	1.422	1.903	-0.006	-	-	-
5	1.471	-1.960	-	-	-	-
6	0.014	0.016	-0.003	-	-	-
7	-	0.036	-0.009	-	-	-
8	1.086	1.689	-0.006	-	-	-
9	1.194	-2.054	-0.176	-	-	-
10	-	0.014	-0.004	-	-	-
11	-	-0.004	-0.002	-	-	-
12	0.003	0.400	-0.145	-	-	-
13	0.003	-0.008	-	-	-	-
14	-	-0.004	-0.018	-	-	-
15	-	0.047	-0.035	-	-	-
18	0.023	-0.018	-0.109	-0.583	-	-
21	-	0.004	-0.002	-	-	-
22	-	0.018	-0.037	-	-	-
25	0.028	-0.045	-0.030	-0.112	-	-
28	-0.014	0.857	0.203	-	-	-
29	0.366	0.648	0.054	-	-	-
30	0.217	0.681	0.062	-	-	-
31	-	0.023	-0.004	-	-	-
32	-0.017	-0.876	0.205	-	-	-
33	0.063	0.029	-0.039	-	-	-
34	0.231	-1.897	0.093	-	-	-
35	-	-0.008	-0.047	-	-	-
36	-	0.004	-0.001	-	-	-
37	-	0.046	-0.012	-	-	-
38	3.651	6.785	0.019	-	-	-
39	3.435	-6.789	-0.016	-	-	-
40	-	0.114	-0.001	-	-	-
41	0.001	7.006	0.079	-	-	-
42	0.001	-6.586	-0.057	-	-	-

8 PIPE HORIZONTAL LOAD (+Z) (PHL(+Z)) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	0.287	0.290	-	-	-
2	-	0.352	0.344	-	-	-
3	-	0.195	0.116	-	-	-
4	-1.247	-1.683	0.152	-	-	-
5	-1.242	1.818	0.124	-	-	-
6	-0.001	0.544	0.143	-	-	-
7	-	-0.195	0.055	-	-	-
8	0.918	1.098	0.039	-	-	-
9	0.771	0.881	0.793	-	-	-
10	-	-0.544	0.173	-	-	-
11	-	0.171	0.106	-	-	-
12	0.011	-2.088	0.937	-	-	-
13	0.012	-0.025	-0.001	-	-	-
14	-	0.193	0.423	-	-	-
15	-	-0.352	0.256	-	-	-
18	-0.006	0.005	0.631	3.353	-	-
21	-	-0.171	0.106	-	-	-
22	-	-0.057	0.580	-	-	-
25	-0.009	0.779	0.966	3.563	-	-
28	0.002	1.973	0.482	-	-	-
29	0.607	5.080	1.004	-	-	-
30	-0.131	6.529	1.319	-	-	-
31	-	-0.772	0.130	-	-	-
32	-0.012	-1.810	0.477	-	-	-
33	-0.300	-2.729	0.988	-	-	-
34	-0.102	-4.285	1.177	-	-	-
35	-	0.105	0.550	-	-	-
36	-	0.110	0.043	-	-	-
37	-	-0.536	0.131	-	-	-
38	0.448	0.736	0.126	-	-	-
39	0.296	-0.847	0.142	-	-	-
40	-	-0.173	-0.001	-	-	-
41	0.001	-2.260	-0.161	-	-	-
42	-	-2.335	-0.217	-	-	-

9 MONORAIL LOAD (MRL) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-2.235	-0.334	-	-	-
2	-	-0.021	-0.017	-	-	-
3	-	-0.012	-0.003	-	-	-
4	0.078	0.110	-0.002	-	-	-
5	0.083	-0.118	-	-	-	-
6	-	0.019	0.005	-	-	-
7	-	0.012	-0.003	-	-	-
8	-0.029	-0.034	-0.002	-	-	-
9	-0.027	-0.016	-0.021	-	-	-
10	-	-0.019	0.004	-	-	-
11	-	-1.933	-0.006	-	-	-
12	-	0.056	-0.025	-	-	-
13	-	0.001	-	-	-	-
14	-	-4.694	0.504	-	-	-
15	-	0.021	-0.015	-	-	-
18	-0.003	0.002	-0.034	-0.180	-	-
21	-	-3.088	-0.007	-	-	-
22	-	-2.576	-0.271	-	-	-
25	0.009	-0.045	-0.048	-0.177	-	-
28	-0.018	-1.263	-0.012	-	-	-
29	-0.099	-0.321	-0.097	-	-	-
30	0.045	-1.047	-0.005	-	-	-
31	-	0.038	-0.006	-	-	-
32	-0.002	0.134	0.049	-	-	-
33	-0.025	-1.338	-0.026	-	-	-
34	0.141	-0.668	0.087	-	-	-
35	-	-4.561	0.439	-	-	-
36	-	-0.013	-0.003	-	-	-
37	-	0.360	-0.030	-	-	-
38	-0.013	-0.021	-	-	-	-
39	-0.009	0.034	-0.003	-	-	-
40	-	-	-	-	-	-
41	-	0.665	-	-	-	-
42	-	0.568	0.004	-	-	-

10 TEMPERATURE LOAD (+TL)(+VE) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	-0.154	-0.110	-	-	-
2	-	-0.116	-0.130	-	-	-
3	-	-0.120	-0.034	-	-	-
4	-3.470	0.331	-0.029	-	-	-
5	4.065	-0.429	-0.002	-	-	-
6	0.006	-0.366	-1.308	-	-	-
7	-	0.120	-0.027	-	-	-
8	-4.015	-0.284	-0.023	-	-	-
9	3.485	0.443	-1.065	-	-	-
10	-	0.361	1.127	-	-	-
11	-	0.053	0.020	-	-	-
12	0.009	-0.019	1.109	-	-	-
13	0.021	-0.036	0.001	-	-	-
14	-	0.150	-0.016	-	-	-
15	-	0.116	-0.044	-	-	-
18	-0.028	0.022	0.039	0.207	-	-
21	-	-0.053	0.045	-	-	-
22	-	0.184	0.219	-	-	-
25	-0.025	0.274	0.265	0.958	-	-
28	-0.049	0.579	-0.961	-	-	-
29	-1.168	0.545	-1.252	-	-	-
30	1.425	-1.106	-1.453	-	-	-
31	-	-0.254	0.056	-	-	-
32	-0.080	-0.523	1.185	-	-	-
33	-1.101	1.193	1.288	-	-	-
34	1.535	-0.434	1.195	-	-	-
35	-	0.295	0.477	-	-	-
36	-	0.255	0.061	-	-	-
37	-	-0.574	0.145	-	-	-
38	-2.502	-0.216	0.003	-	-	-
39	2.290	-0.042	0.079	-	-	-
40	-	-0.008	0.004	-	-	-
41	0.013	-0.854	0.036	-	-	-
42	0.017	0.656	0.080	-	-	-

11 WIND LOAD (+X) (WL(+X)) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	0.151	-0.066	-0.041	-	-	-
2	0.151	-0.190	-0.150	-	-	-
3	0.152	-0.135	-0.035	-	-	-
4	3.007	4.151	-0.025	-	-	-
5	3.120	-4.287	-	-	-	-
6	0.121	-0.842	-0.222	-	-	-
7	0.152	0.135	-0.035	-	-	-
8	2.055	3.062	-0.025	-	-	-
9	2.309	-3.787	-0.348	-	-	-
10	0.150	0.873	-0.225	-	-	-
11	0.152	-0.057	-0.035	-	-	-
12	0.074	0.834	-0.328	-	-	-
13	0.079	-0.003	-0.005	-	-	-
14	0.152	0.508	-0.027	-	-	-
15	0.152	0.190	-0.137	-	-	-
18	0.168	-0.948	-0.483	-2.565	-	-
21	0.152	0.057	-0.035	-	-	-
22	0.152	1.164	-0.081	-	-	-
25	0.166	-0.750	0.288	1.054	-	-
28	-0.118	1.621	0.575	-	-	-
29	1.876	2.671	0.011	-	-	-
30	1.466	1.269	0.380	-	-	-
31	0.151	-0.234	0.040	-	-	-
32	-0.155	-2.480	0.628	-	-	-
33	1.083	0.362	-0.267	-	-	-
34	1.620	-5.817	0.432	-	-	-
35	0.152	0.190	-0.235	-	-	-
36	0.151	0.008	0.002	-	-	-
37	0.151	0.137	-0.040	-	-	-
38	6.537	12.231	-	-	-	-
39	6.090	-12.191	-0.006	-	-	-
40	0.152	0.154	-0.001	-	-	-
41	0.126	11.065	0.279	-	-	-
42	0.127	-9.752	-0.201	-	-	-

12 WIND LOAD (+Z) (WL(+Z)) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	0.658	0.627	-	-	-
2	-	0.840	0.765	-	-	-
3	-	0.481	0.224	-	-	-
4	-2.504	-3.311	0.212	-	-	-
5	-2.497	3.653	0.129	-	-	-
6	-0.002	0.854	0.289	-	-	-
7	-	-0.481	0.196	-	-	-
8	2.415	3.016	0.161	-	-	-
9	2.182	1.136	1.789	-	-	-
10	-0.005	-0.885	0.306	-	-	-
11	-	0.334	0.279	-	-	-
12	0.022	-4.413	2.117	-	-	-
13	0.055	-0.049	0.120	-	-	-
14	-	0.967	1.095	-	-	-
15	-	-0.838	0.674	-	-	-
18	-0.016	0.355	0.776	7.362	-	-
21	-	-0.334	0.279	-	-	-
22	-	-0.478	1.258	-	-	-
25	-0.002	2.248	2.147	9.170	-	-
28	0.040	8.361	1.830	-	-	-
29	0.227	7.109	1.827	-	-	-
30	-0.680	7.792	1.563	-	-	-
31	-	-2.589	0.467	-	-	-
32	0.062	-8.387	1.840	-	-	-
33	-0.153	-5.443	1.823	-	-	-
34	0.187	-5.123	1.397	-	-	-
35	-	-0.008	1.359	-	-	-
36	-	0.484	0.188	-	-	-
37	-	-1.137	0.354	-	-	-
38	0.553	0.730	0.077	-	-	-
39	0.191	-1.218	0.182	-	-	-
40	-	-0.390	0.070	-	-	-
41	0.001	-2.179	-0.127	-	-	-
42	0.001	-2.156	-0.116	-	-	-

13 TEMPERATURE LOAD (TL)(-VE) : Node Loads

Node	FX (Mton)	FY (Mton)	FZ (Mton)	MX (MTon-m)	MY (MTon-m)	MZ (MTon-m)
1	-	0.154	0.110	-	-	-
2	-	0.116	0.130	-	-	-
3	-	0.120	0.034	-	-	-
4	3.470	-0.331	0.029	-	-	-
5	-4.065	0.429	0.002	-	-	-
6	-0.006	0.366	1.308	-	-	-
7	-	-0.120	0.027	-	-	-
8	4.015	0.284	0.023	-	-	-
9	-3.485	-0.443	1.065	-	-	-
10	-	-0.361	-1.127	-	-	-
11	-	-0.053	-0.020	-	-	-
12	-0.009	0.019	-1.109	-	-	-
13	-0.021	0.036	-0.001	-	-	-
14	-	-0.150	0.016	-	-	-
15	-	-0.116	0.044	-	-	-
18	0.028	-0.022	-0.039	-0.207	-	-
21	-	0.053	-0.045	-	-	-
22	-	-0.184	-0.219	-	-	-
25	0.025	-0.274	-0.265	-0.958	-	-
28	0.049	-0.579	0.961	-	-	-
29	1.168	-0.545	1.252	-	-	-
30	-1.425	1.106	1.453	-	-	-
31	-	0.254	-0.056	-	-	-
32	0.080	0.523	-1.185	-	-	-
33	1.101	-1.193	-1.288	-	-	-
34	-1.535	0.434	-1.195	-	-	-
35	-	-0.295	-0.477	-	-	-
36	-	-0.255	-0.061	-	-	-
37	-	0.574	-0.145	-	-	-
38	2.502	0.216	-0.003	-	-	-
39	-2.290	0.042	-0.079	-	-	-
40	-	0.008	-0.004	-	-	-
41	-0.013	0.854	-0.036	-	-	-
42	-0.017	-0.656	-0.080	-	-	-

100 DL+CTL+PVL+TEQL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
4	TEST EQUIPMENT LOAD (TEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000

101 DL+OEQL+CTL+PVL+PHL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000

102 DL+OEQL+CTL+PVL+PHL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000

103 DL+OEQL+CTL+PVL-PHL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000

104 DL+OEQL+CTL+PVL-PHL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000

105 DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
10	TEMPERATURE LOAD (+TL)(+VE)	1.000

106 DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
10	TEMPERATURE LOAD (+TL)(+VE)	1.000

107 DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
10	TEMPERATURE LOAD (+TL)(+VE)	1.000

108 DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
10	TEMPERATURE LOAD (+TL)(+VE)	1.000

109 DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
13	TEMPERATURE LOAD (TL)(-VE)	1.000

110 DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
13	TEMPERATURE LOAD (TL)(-VE)	1.000

111 DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
13	TEMPERATURE LOAD (TL)(-VE)	1.000

112 DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(-VE) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
13	TEMPERATURE LOAD (TL)(-VE)	1.000

113 DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(+VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
10	TEMPERATURE LOAD (+TL)(+VE)	0.750

114 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(+VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
10	TEMPERATURE LOAD (+TL)(+VE)	0.750

115 DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(+VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
10	TEMPERATURE LOAD (+TL)(+VE)	0.750

116 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(+VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
10	TEMPERATURE LOAD (+TL)(+VE)	0.750

117 DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(-VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
13	TEMPERATURE LOAD (TL)(-VE)	0.750

118 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(-VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
13	TEMPERATURE LOAD (TL)(-VE)	0.750

119 DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(-VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
13	TEMPERATURE LOAD (TL)(-VE)	0.750

120 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(-VE)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
13	TEMPERATURE LOAD (TL)(-VE)	0.750

121 DL+OEQL+CTL+PVL+PHL(+X)+WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
11	WIND LOAD (+X) (WL(+X))	1.000

122 DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
12	WIND LOAD (+Z) (WL(+Z))	1.000

123 DL+OEQL+CTL+PVL+PHL(+X)-WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
11	WIND LOAD (+X) (WL(+X))	-1.000

124 DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
12	WIND LOAD (+Z) (WL(+Z))	-1.000

125 DL+OEQL+CTL+PVL-PHL(+X)+WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
11	WIND LOAD (+X) (WL(+X))	1.000

126 DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	1.000

127 DL+OEQL+CTL+PVL-PHL(+X)-WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
11	WIND LOAD (+X) (WL(+X))	-1.000

128 DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	-1.000

129 DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
11	WIND LOAD (+X) (WL(+X))	1.000

130 DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
12	WIND LOAD (+Z) (WL(+Z))	1.000

131 DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
11	WIND LOAD (+X) (WL(+X))	-1.000

132 DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
12	WIND LOAD (+Z) (WL(+Z))	-1.000

133 DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
11	WIND LOAD (+X) (WL(+X))	1.000

134 DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	1.000

135 DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
11	WIND LOAD (+X) (WL(+X))	-1.000

136 DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	-1.000

137 DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
11	WIND LOAD (+X) (WL(+X))	0.750

138 DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
12	WIND LOAD (+Z) (WL(+Z))	0.750

139 DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
11	WIND LOAD (+X) (WL(+X))	-0.750

140 DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.000
12	WIND LOAD (+Z) (WL(+Z))	-0.750

141 DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
11	WIND LOAD (+X) (WL(+X))	0.750

142 DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	0.750

143 DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
11	WIND LOAD (+X) (WL(+X))	-0.750

144 DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	-0.750

145 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
11	WIND LOAD (+X) (WL(+X))	0.750

146 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
12	WIND LOAD (+Z) (WL(+Z))	0.750

147 DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
11	WIND LOAD (+X) (WL(+X))	-0.750

148 DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.000
12	WIND LOAD (+Z) (WL(+Z))	-0.750

149 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
11	WIND LOAD (+X) (WL(+X))	0.750

150 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	0.750

151 DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+X)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
11	WIND LOAD (+X) (WL(+X))	-0.750

152 DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+Z)+0.75*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.000
2	LIVE LOAD (LL)	0.750
3	OPERATING EQUIPMENT LOAD (OEQL)	1.000
5	CABLE TRAY LOAD (CTL)	1.000
6	PIPE VERTICAL LOAD (PVL)	1.000
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.000
12	WIND LOAD (+Z) (WL(+Z))	-0.750

153 0.6*(DL+OEQL+CTL)+WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.600
3	OPERATING EQUIPMENT LOAD (OEQL)	0.600
5	CABLE TRAY LOAD (CTL)	0.600
11	WIND LOAD (+X) (WL(+X))	1.000

154 0.6*(DL+OEQL+CTL)+WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.600
3	OPERATING EQUIPMENT LOAD (OEQL)	0.600
5	CABLE TRAY LOAD (CTL)	0.600
12	WIND LOAD (+Z) (WL(+Z))	1.000

155 0.6*(DL+OEQL+CTL)-WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.600
3	OPERATING EQUIPMENT LOAD (OEQL)	0.600
5	CABLE TRAY LOAD (CTL)	0.600
11	WIND LOAD (+X) (WL(+X))	-1.000

156 0.6*(DL+OEQL+CTL)-WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.600
3	OPERATING EQUIPMENT LOAD (OEQL)	0.600
5	CABLE TRAY LOAD (CTL)	0.600
12	WIND LOAD (+Z) (WL(+Z))	-1.000

200 1.4*(DL+CTL+PVL+TEQL) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
4	TEST EQUIPMENT LOAD (TEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400

201 1.4*(DL+OEQL+CTL+PVL+PHL(+X)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.400

202 1.4*(DL+OEQL+CTL+PVL+PHL(+Z)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.400

203 1.4*(DL+OEQL+CTL+PVL-PHL(+X)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.400

204 1.4*(DL+OEQL+CTL+PVL-PHL(+Z)) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.400

205 1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.400
10	TEMPERATURE LOAD (+TL)(+VE)	1.400

206 1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.400
10	TEMPERATURE LOAD (+TL)(+VE)	1.400

207 1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.400
10	TEMPERATURE LOAD (+TL)(+VE)	1.400

208 1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.400
10	TEMPERATURE LOAD (+TL)(+VE)	1.400

209 1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.400
13	TEMPERATURE LOAD (TL)(-VE)	1.400

210 1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.400
13	TEMPERATURE LOAD (TL)(-VE)	1.400

211 1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.400
13	TEMPERATURE LOAD (TL)(-VE)	1.400

212 1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-VE))+1.7*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.400
2	LIVE LOAD (LL)	1.700
3	OPERATING EQUIPMENT LOAD (OEQL)	1.400
5	CABLE TRAY LOAD (CTL)	1.400
6	PIPE VERTICAL LOAD (PVL)	1.400
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.400
13	TEMPERATURE LOAD (TL)(-VE)	1.400

213 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200

214 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200

215 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200

216 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200

217 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200
11	WIND LOAD (+X) (WL(+X))	0.800

218 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200
12	WIND LOAD (+Z) (WL(+Z))	0.800

219 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200
11	WIND LOAD (+X) (WL(+X))	-0.800

220 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200
12	WIND LOAD (+Z) (WL(+Z))	-0.800

221 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)+0.5*LL : Repeat Load

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200
11	WIND LOAD (+X) (WL(+X))	1.600

222 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)+0.5*LL : Repeat Load

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200
12	WIND LOAD (+Z) (WL(+Z))	1.600

223 1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200
11	WIND LOAD (+X) (WL(+X))	-1.600

224 1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	1.200
12	WIND LOAD (+Z) (WL(+Z))	-1.600

225 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)+0.5*LL : Repeat Load

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200
11	WIND LOAD (+X) (WL(+X))	1.600

226 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200
12	WIND LOAD (+Z) (WL(+Z))	1.600

227 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200
11	WIND LOAD (+X) (WL(+X))	-1.600

228 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	1.200
12	WIND LOAD (+Z) (WL(+Z))	-1.600

229 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200
11	WIND LOAD (+X) (WL(+X))	1.600

230 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200
12	WIND LOAD (+Z) (WL(+Z))	1.600

231 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200
11	WIND LOAD (+X) (WL(+X))	-1.600

232 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-1.200
12	WIND LOAD (+Z) (WL(+Z))	-1.600

233 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200
11	WIND LOAD (+X) (WL(+X))	1.600

234 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200
12	WIND LOAD (+Z) (WL(+Z))	1.600

235 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200
11	WIND LOAD (+X) (WL(+X))	-1.600

236 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)+0.5*LL : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	1.200
2	LIVE LOAD (LL)	0.500
3	OPERATING EQUIPMENT LOAD (OEQL)	1.200
5	CABLE TRAY LOAD (CTL)	1.200
6	PIPE VERTICAL LOAD (PVL)	1.200
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-1.200
12	WIND LOAD (+Z) (WL(+Z))	-1.600

237 0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

238 0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

239 0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

240 0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

241 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

242 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

243 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

244 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

245 0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

246 0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

247 0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

248 0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
7	PIPE HORIZONTAL LOAD (+X) (PHL(+X))	-0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

249 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

250 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

251 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-0.900
11	WIND LOAD (+X) (WL(+X))	-1.600

252 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z) : Repeat Loads

Ref	Name	Factor
1	DEAD LOAD (DL)	0.900
3	OPERATING EQUIPMENT LOAD (OEQL)	0.900
5	CABLE TRAY LOAD (CTL)	0.900
6	PIPE VERTICAL LOAD (PVL)	0.900
8	PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))	-0.900
12	WIND LOAD (+Z) (WL(+Z))	-1.600

ATTACHMENT - 3 : STAAD OUTPUT

BALL MILL PLATFORM FOUNDATION

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries6          *
*           Version  20.07.11.70                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    JUL 31, 2020                *
*           Time=    12:52:28                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
    1. STAAD SPACE
INPUT FILE: D:\MAADEN-GOLD-O19045\3220 BALL MILL PLATFORM\CIVIL\LATEST\Ball Mill Platform Foundation_P.. .STD
    2. START JOB INFORMATION
    3. ENGINEER DATE 06-08-2020
    4. JOB NAME MMGP
    5. JOB CLIENT MAADEN
    6. JOB NO O19045
    7. JOB PART BALL MILL PLATFORM FOUNDATION
    8. ENGINEER NAME SUE
    9. CHECKER NAME BDA
   10. APPROVED NAME AG
   11. END JOB INFORMATION
   12. INPUT WIDTH 79
   13. SET NL 125
   14. SET ITERLIM 20
   15. SET PRINT 1
   16. UNIT METER MTON
   17. JOINT COORDINATES
   18. 1 0 913.7 0; 2 4.58 913.7 0; 3 9.98 913.7 0; 4 14.23 913.7 0; 5 21.52 913.7 0
   19. 6 26.17 913.7 0; 7 9.98 913.7 2.7; 8 14.23 913.7 2.7; 9 21.52 913.7 2.7
   20. 10 26.17 913.7 2.7; 11 -8.37 913.7 6.225; 12 21.52 913.7 7.05
   21. 13 26.17 913.7 7.05; 14 0 913.7 8; 15 4.58 913.7 8; 16 -0.9 910.5 -0.9
   22. 17 -0.55 910.5 -0.9; 18 6.835 913.7 9.745; 19 -0.3 910.5 -0.9; 20 0 910.5 -0.9
   23. 21 -8.37 913.7 12.825; 22 0 913.7 12.825; 23 0.3 910.5 -0.9
   24. 24 0.549999 910.5 -0.9; 25 6.835 913.7 15.345; 26 0.9 910.5 -0.9
   25. 27 3.68 910.5 -0.9; 28 14.83 913.7 17.895; 29 21.83 913.7 17.895
   26. 30 26.17 913.7 17.895; 31 6.835 913.7 18.28; 32 14.83 913.7 20.495
   27. 33 21.83 913.7 20.495; 34 26.17 913.7 20.495; 35 0 913.7 22.095
   28. 36 10.83 913.7 22.095; 37 0 913.7 25.045; 38 5.47 913.7 25.045
   29. 39 10.83 913.7 25.045; 40 14.83 913.7 25.045; 41 21.83 913.7 25.045
   30. 42 26.17 913.7 25.045; 43 4.03 910.5 -0.9; 44 4.28 910.5 -0.9
   31. 45 4.58 910.5 -0.9; 46 4.88 910.5 -0.9; 47 5.13 910.5 -0.9; 48 5.48 910.5 -0.9
   32. 49 12.88 910.5 -0.6; 50 13.13 910.5 -0.6; 51 13.38 910.5 -0.6
   33. 52 13.63 910.5 -0.6; 53 13.93 910.5 -0.6; 54 14.23 910.5 -0.6
   34. 55 14.53 910.5 -0.6; 56 14.83 910.5 -0.6; 57 15.08 910.5 -0.6
   35. 58 15.33 910.5 -0.6; 59 15.58 910.5 -0.6; 60 20.17 910.5 -0.6
   36. 61 20.42 910.5 -0.6; 62 20.67 910.5 -0.6; 63 20.92 910.5 -0.6
   37. 64 21.22 910.5 -0.6; 65 21.52 910.5 -0.6; 66 21.82 910.5 -0.6
   38. 67 22.12 910.5 -0.6; 68 22.37 910.5 -0.6; 69 22.62 910.5 -0.6
   39. 70 22.87 910.5 -0.6; 71 -0.9 910.5 -0.55; 72 -0.549999 910.5 -0.55
   40. 73 -0.3 910.5 -0.55; 74 0 910.5 -0.55; 75 0.3 910.5 -0.55
   41. 76 0.549999 910.5 -0.55; 77 0.9 910.5 -0.55; 78 3.68 910.5 -0.55
   42. 79 4.03 910.5 -0.55; 80 4.28 910.5 -0.55; 81 4.58 910.5 -0.55
   43. 82 4.88 910.5 -0.55; 83 5.13 910.5 -0.55; 84 5.48 910.5 -0.55
   44. 85 9.18 910.5 -0.5; 86 9.43 910.5 -0.5; 87 9.68 910.5 -0.5; 88 9.98 910.5 -0.5
   45. 89 10.28 910.5 -0.5; 90 10.53 910.5 -0.5; 91 10.78 910.5 -0.5
   46. 92 -0.9 910.5 -0.3; 93 -0.55 910.5 -0.3; 94 -0.3 910.5 -0.3; 95 0 910.5 -0.3
   47. 96 0.3 910.5 -0.3; 97 0.55 910.5 -0.3; 98 0.9 910.5 -0.3; 99 3.68 910.5 -0.3
   48. 100 4.03 910.5 -0.3; 101 4.28 910.5 -0.3; 102 4.58 910.5 -0.3
   49. 103 4.88 910.5 -0.3; 104 5.13 910.5 -0.3; 105 5.48 910.5 -0.3
   50. 106 9.18 910.5 -0.3; 107 9.43001 910.5 -0.3; 108 9.68 910.5 -0.3
   51. 109 9.98 910.5 -0.3; 110 10.28 910.5 -0.3; 111 10.53 910.5 -0.3
   52. 112 10.78 910.5 -0.3; 113 12.88 910.5 -0.3; 114 13.13 910.5 -0.3
   53. 115 13.38 910.5 -0.3; 116 13.63 910.5 -0.3; 117 13.93 910.5 -0.3
   54. 118 14.23 910.5 -0.3; 119 14.53 910.5 -0.3; 120 14.83 910.5 -0.3
   55. 121 15.08 910.5 -0.3; 122 15.33 910.5 -0.3; 123 15.58 910.5 -0.3
```

56. 124 20.17 910.5 -0.3; 125 20.42 910.5 -0.3; 126 20.67 910.5 -0.3
57. 127 20.92 910.5 -0.3; 128 21.22 910.5 -0.3; 129 21.52 910.5 -0.3
58. 130 21.82 910.5 -0.3; 131 22.12 910.5 -0.3; 132 22.37 910.5 -0.3
59. 133 22.62 910.5 -0.3; 134 22.87 910.5 -0.3; 135 -0.9 910.5 0
60. 136 -0.55 910.5 0; 137 -0.3 910.5 0; 138 0 910.5 0; 139 0.3 910.5 0
61. 140 0.549999 910.5 0; 141 0.9 910.5 0; 142 3.68 910.5 0; 143 4.03 910.5 0
62. 144 4.28 910.5 0; 145 4.58 910.5 0; 146 4.88 910.5 0; 147 5.13 910.5 0
63. 148 5.48 910.5 0; 149 9.18 910.5 0; 150 9.43 910.5 0; 151 9.68 910.5 0
64. 152 9.98 910.5 0; 153 10.28 910.5 0; 154 10.53 910.5 0; 155 10.78 910.5 0
65. 156 12.88 910.5 0; 157 13.13 910.5 0; 158 13.38 910.5 0; 159 13.63 910.5 0
66. 160 13.93 910.5 0; 161 14.23 910.5 0; 162 14.53 910.5 0; 163 14.83 910.5 0
67. 164 15.08 910.5 0; 165 15.33 910.5 0; 166 15.58 910.5 0; 167 20.17 910.5 0
68. 168 20.42 910.5 0; 169 20.67 910.5 0; 170 20.92 910.5 0; 171 21.22 910.5 0
69. 172 21.52 910.5 0; 173 21.82 910.5 0; 174 22.12 910.5 0; 175 22.37 910.5 0
70. 176 22.62 910.5 0; 177 22.87 910.5 0; 178 -0.9 910.5 0.3
71. 179 -0.549999 910.5 0.3; 180 -0.3 910.5 0.3; 181 0 910.5 0.3
72. 182 0.3 910.5 0.3; 183 0.549999 910.5 0.3; 184 0.9 910.5 0.3
73. 185 3.68 910.5 0.3; 186 4.03 910.5 0.3; 187 4.28 910.5 0.3; 188 4.58 910.5 0.3
74. 189 4.88 910.5 0.3; 190 5.13 910.5 0.3; 191 5.48 910.5 0.3; 192 9.18 910.5 0.3
75. 193 9.43 910.5 0.3; 194 9.68 910.5 0.3; 195 9.98 910.5 0.3
76. 196 10.28 910.5 0.3; 197 10.53 910.5 0.3; 198 10.78 910.5 0.3
77. 199 12.88 910.5 0.3; 200 13.13 910.5 0.3; 201 13.38 910.5 0.3
78. 202 13.63 910.5 0.3; 203 13.93 910.5 0.3; 204 14.23 910.5 0.3
79. 205 14.53 910.5 0.3; 206 14.83 910.5 0.3; 207 15.08 910.5 0.3
80. 208 15.33 910.5 0.3; 209 15.58 910.5 0.3; 210 20.17 910.5 0.3
81. 211 20.42 910.5 0.3; 212 20.67 910.5 0.3; 213 20.92 910.5 0.3
82. 214 21.22 910.5 0.3; 215 21.52 910.5 0.3; 216 21.82 910.5 0.3
83. 217 22.12 910.5 0.3; 218 22.37 910.5 0.3; 219 22.62 910.5 0.3
84. 220 22.87 910.5 0.3; 221 -0.9 910.5 0.55; 222 -0.55 910.5 0.55
85. 223 -0.3 910.5 0.55; 224 0 910.5 0.55; 225 0.3 910.5 0.55; 226 0.55 910.5 0.55
86. 227 0.9 910.5 0.55; 228 3.68 910.5 0.55; 229 4.03 910.5 0.55
87. 230 4.28 910.5 0.55; 231 4.58 910.5 0.55; 232 4.88 910.5 0.55
88. 233 5.13 910.5 0.55; 234 5.48 910.5 0.55; 235 9.18 910.5 0.55
89. 236 9.43 910.5 0.55; 237 9.68 910.5 0.55; 238 9.98 910.5 0.55
90. 239 10.28 910.5 0.55; 240 10.53 910.5 0.55; 241 10.78 910.5 0.55
91. 242 12.88 910.5 0.6; 243 13.13 910.5 0.6; 244 13.38 910.5 0.6
92. 245 13.63 910.5 0.6; 246 13.93 910.5 0.6; 247 14.23 910.5 0.6
93. 248 14.53 910.5 0.6; 249 14.83 910.5 0.6; 250 15.08 910.5 0.6
94. 251 15.33 910.5 0.6; 252 15.58 910.5 0.6; 253 20.17 910.5 0.6
95. 254 20.42 910.5 0.6; 255 20.67 910.5 0.6; 256 20.92 910.5 0.6
96. 257 21.22 910.5 0.6; 258 21.52 910.5 0.6; 259 21.82 910.5 0.6
97. 260 22.12 910.5 0.6; 261 22.37 910.5 0.6; 262 22.62 910.5 0.6
98. 263 22.87 910.5 0.6; 264 -0.9 910.5 0.9; 265 -0.55 910.5 0.9
99. 266 -0.3 910.5 0.9; 267 0 910.5 0.9; 268 0.3 910.5 0.9; 269 0.549999 910.5 0.9
100. 270 0.9 910.5 0.9; 271 3.68 910.5 0.9; 272 4.03 910.5 0.9; 273 4.28 910.5 0.9
101. 274 4.58 910.5 0.9; 275 4.88 910.5 0.9; 276 5.13 910.5 0.9; 277 5.48 910.5 0.9
102. 278 9.18 910.5 0.9; 279 9.43 910.5 0.9; 280 9.68 910.5 0.9; 281 9.98 910.5 0.9
103. 282 10.28 910.5 0.9; 283 10.53 910.5 0.9; 284 10.78 910.5 0.9
104. 285 12.88 910.5 0.9; 286 13.13 910.5 0.9; 287 13.38 910.5 0.9
105. 288 13.63 910.5 0.9; 289 13.93 910.5 0.9; 290 14.23 910.5 0.9
106. 291 14.53 910.5 0.9; 292 14.83 910.5 0.9; 293 15.08 910.5 0.9
107. 294 15.33 910.5 0.9; 295 15.58 910.5 0.9; 296 20.17 910.5 0.9
108. 297 20.42 910.5 0.9; 298 20.67 910.5 0.9; 299 20.92 910.5 0.9
109. 300 21.22 910.5 0.9; 301 21.52 910.5 0.9; 302 21.82 910.5 0.9
110. 303 22.12 910.5 0.9; 304 22.37 910.5 0.9; 305 22.62 910.5 0.9
111. 306 22.87 910.5 0.9; 307 9.18 910.5 1.2; 308 9.43 910.5 1.2
112. 309 9.68 910.5 1.2; 310 9.98 910.5 1.2; 311 10.28 910.5 1.2
113. 312 10.53 910.5 1.2; 313 10.78 910.5 1.2; 314 12.88 910.5 1.2
114. 315 13.13 910.5 1.2; 316 13.38 910.5 1.2; 317 13.63 910.5 1.2
115. 318 13.93 910.5 1.2; 319 14.23 910.5 1.2; 320 14.53 910.5 1.2
116. 321 14.83 910.5 1.2; 322 15.08 910.5 1.2; 323 15.33 910.5 1.2
117. 324 15.58 910.5 1.2; 325 20.17 910.5 1.2; 326 20.42 910.5 1.2
118. 327 20.67 910.5 1.2; 328 20.92 910.5 1.2; 329 21.22 910.5 1.2
119. 330 21.52 910.5 1.2; 331 21.82 910.5 1.2; 332 22.12 910.5 1.2
120. 333 22.37 910.5 1.2; 334 22.62 910.5 1.2; 335 22.87 910.5 1.2
121. 336 9.18 910.5 1.5; 337 9.43 910.5 1.5; 338 9.68 910.5 1.5; 339 9.98 910.5 1.5
122. 340 10.28 910.5 1.5; 341 10.53 910.5 1.5; 342 10.78 910.5 1.5
123. 343 12.88 910.5 1.5; 344 13.13 910.5 1.5; 345 13.38 910.5 1.5
124. 346 13.63 910.5 1.5; 347 13.93 910.5 1.5; 348 14.23 910.5 1.5
125. 349 14.53 910.5 1.5; 350 14.83 910.5 1.5; 351 15.08 910.5 1.5
126. 352 15.33 910.5 1.5; 353 15.58 910.5 1.5; 354 20.17 910.5 1.5
127. 355 20.42 910.5 1.5; 356 20.67 910.5 1.5; 357 20.92 910.5 1.5

128. 358 21.22 910.5 1.5; 359 21.52 910.5 1.5; 360 21.82 910.5 1.5
129. 361 22.12 910.5 1.5; 362 22.37 910.5 1.5; 363 22.62 910.5 1.5
130. 364 22.87 910.5 1.5; 365 9.18 910.5 1.8; 366 9.43 910.5 1.8
131. 367 9.68 910.5 1.8; 368 9.98 910.5 1.8; 369 10.28 910.5 1.8
132. 370 10.53 910.5 1.8; 371 10.78 910.5 1.8; 372 12.88 910.5 1.8
133. 373 13.13 910.5 1.8; 374 13.38 910.5 1.8; 375 13.63 910.5 1.8
134. 376 13.93 910.5 1.8; 377 14.23 910.5 1.8; 378 14.53 910.5 1.8
135. 379 14.83 910.5 1.8; 380 15.08 910.5 1.8; 381 15.33 910.5 1.8
136. 382 15.58 910.5 1.8; 383 20.17 910.5 1.8; 384 20.42 910.5 1.8
137. 385 20.67 910.5 1.8; 386 20.92 910.5 1.8; 387 21.22 910.5 1.8
138. 388 21.52 910.5 1.8; 389 21.82 910.5 1.8; 390 22.12 910.5 1.8
139. 391 22.37 910.5 1.8; 392 22.62 910.5 1.8; 393 22.87 910.5 1.8
140. 394 12.88 910.5 2.1; 395 13.13 910.5 2.1; 396 13.38 910.5 2.1
141. 397 13.63 910.5 2.1; 398 13.93 910.5 2.1; 399 14.23 910.5 2.1
142. 400 14.53 910.5 2.1; 401 14.83 910.5 2.1; 402 15.08 910.5 2.1
143. 403 15.33 910.5 2.1; 404 15.58 910.5 2.1; 405 20.17 910.5 2.1
144. 406 20.42 910.5 2.1; 407 20.67 910.5 2.1; 408 20.92 910.5 2.1
145. 409 21.22 910.5 2.1; 410 21.52 910.5 2.1; 411 21.82 910.5 2.1
146. 412 22.12 910.5 2.1; 413 22.37 910.5 2.1; 414 22.62 910.5 2.1
147. 415 22.87 910.5 2.1; 416 9.18 910.5 2.15; 417 9.43001 910.5 2.15
148. 418 9.68 910.5 2.15; 419 9.98 910.5 2.15; 420 10.28 910.5 2.15
149. 421 10.53 910.5 2.15; 422 10.78 910.5 2.15; 423 9.18 910.5 2.4
150. 424 9.43 910.5 2.4; 425 9.68 910.5 2.4; 426 9.98 910.5 2.4
151. 427 10.28 910.5 2.4; 428 10.53 910.5 2.4; 429 10.78 910.5 2.4
152. 430 12.88 910.5 2.4; 431 13.13 910.5 2.4; 432 13.38 910.5 2.4
153. 433 13.63 910.5 2.4; 434 13.93 910.5 2.4; 435 14.23 910.5 2.4
154. 436 14.53 910.5 2.4; 437 14.83 910.5 2.4; 438 15.08 910.5 2.4
155. 439 15.33 910.5 2.4; 440 15.58 910.5 2.4; 441 20.17 910.5 2.4
156. 442 20.42 910.5 2.4; 443 20.67 910.5 2.4; 444 20.92 910.5 2.4
157. 445 21.22 910.5 2.4; 446 21.52 910.5 2.4; 447 21.82 910.5 2.4
158. 448 22.12 910.5 2.4; 449 22.37 910.5 2.4; 450 22.62 910.5 2.4
159. 451 22.87 910.5 2.4; 452 9.18 910.5 2.7; 453 9.43 910.5 2.7
160. 454 9.68 910.5 2.7; 455 9.98 910.5 2.7; 456 10.28 910.5 2.7
161. 457 10.53 910.5 2.7; 458 10.78 910.5 2.7; 459 12.88 910.5 2.7
162. 460 13.13 910.5 2.7; 461 13.38 910.5 2.7; 462 13.63 910.5 2.7
163. 463 13.93 910.5 2.7; 464 14.23 910.5 2.7; 465 14.53 910.5 2.7
164. 466 14.83 910.5 2.7; 467 15.08 910.5 2.7; 468 15.33 910.5 2.7
165. 469 15.58 910.5 2.7; 470 20.17 910.5 2.7; 471 20.42 910.5 2.7
166. 472 20.67 910.5 2.7; 473 20.92 910.5 2.7; 474 21.22 910.5 2.7
167. 475 21.52 910.5 2.7; 476 21.82 910.5 2.7; 477 22.12 910.5 2.7
168. 478 22.37 910.5 2.7; 479 22.62 910.5 2.7; 480 22.87 910.5 2.7
169. 481 9.18 910.5 3; 482 9.43001 910.5 3; 483 9.68 910.5 3; 484 9.98 910.5 3
170. 485 10.28 910.5 3; 486 10.53 910.5 3; 487 10.78 910.5 3; 488 12.88 910.5 3
171. 489 13.13 910.5 3; 490 13.38 910.5 3; 491 13.63 910.5 3; 492 13.93 910.5 3
172. 493 14.23 910.5 3; 494 14.53 910.5 3; 495 14.83 910.5 3; 496 15.08 910.5 3
173. 497 15.33 910.5 3; 498 15.58 910.5 3; 499 20.17 910.5 3; 500 20.42 910.5 3
174. 501 20.67 910.5 3; 502 20.92 910.5 3; 503 21.22 910.5 3; 504 21.52 910.5 3
175. 505 21.82 910.5 3; 506 22.12 910.5 3; 507 22.37 910.5 3; 508 22.62 910.5 3
176. 509 22.87 910.5 3; 510 9.18 910.5 3.2; 511 9.43 910.5 3.2; 512 9.68 910.5 3.2
177. 513 9.98 910.5 3.2; 514 10.28 910.5 3.2; 515 10.53 910.5 3.2
178. 516 10.78 910.5 3.2; 517 12.88 910.5 3.3; 518 13.13 910.5 3.3
179. 519 13.38 910.5 3.3; 520 13.63 910.5 3.3; 521 13.93 910.5 3.3
180. 522 14.23 910.5 3.3; 523 14.53 910.5 3.3; 524 14.83 910.5 3.3
181. 525 15.08 910.5 3.3; 526 15.33 910.5 3.3; 527 15.58 910.5 3.3
182. 528 20.17 910.5 3.3; 529 20.42 910.5 3.3; 530 20.67 910.5 3.3
183. 531 20.92 910.5 3.3; 532 21.22 910.5 3.3; 533 21.52 910.5 3.3
184. 534 21.82 910.5 3.3; 535 22.12 910.5 3.3; 536 22.37 910.5 3.3
185. 537 22.62 910.5 3.3; 538 22.87 910.5 3.3; 539 -9.27 910.5 5.325
186. 540 -8.92 910.5 5.325; 541 -8.67 910.5 5.325; 542 -8.37 910.5 5.325
187. 543 -8.07 910.5 5.325; 544 -7.82 910.5 5.325; 545 -7.47 910.5 5.325
188. 546 -9.27 910.5 5.675; 547 -8.92 910.5 5.675; 548 -8.67 910.5 5.675
189. 549 -8.37 910.5 5.675; 550 -8.07 910.5 5.675; 551 -7.82 910.5 5.675
190. 552 -7.47 910.5 5.675; 553 -9.27 910.5 5.925; 554 -8.92 910.5 5.925
191. 555 -8.67 910.5 5.925; 556 -8.37 910.5 5.925; 557 -8.07 910.5 5.925
192. 558 -7.82 910.5 5.925; 559 -7.47 910.5 5.925; 560 -9.27 910.5 6.225
193. 561 -8.92 910.5 6.225; 562 -8.67 910.5 6.225; 563 -8.37 910.5 6.225
194. 564 -8.07 910.5 6.225; 565 -7.82 910.5 6.225; 566 -7.47 910.5 6.225
195. 567 -9.27 910.5 6.525; 568 -8.92 910.5 6.525; 569 -8.67 910.5 6.525
196. 570 -8.37 910.5 6.525; 571 -8.07 910.5 6.525; 572 -7.82 910.5 6.525
197. 573 -7.47 910.5 6.525; 574 -9.27 910.5 6.775; 575 -8.92 910.5 6.775
198. 576 -8.67 910.5 6.775; 577 -8.37 910.5 6.775; 578 -8.07 910.5 6.775
199. 579 -7.82 910.5 6.775; 580 -7.47 910.5 6.775; 581 -0.9 910.5 7.1

200. 582 -0.55 910.5 7.1; 583 -0.3 910.5 7.1; 584 0 910.5 7.1; 585 0.3 910.5 7.1
201. 586 0.549999 910.5 7.1; 587 0.9 910.5 7.1; 588 3.68 910.5 7.1
202. 589 4.03 910.5 7.1; 590 4.28 910.5 7.1; 591 4.58 910.5 7.1; 592 4.88 910.5 7.1
203. 593 5.13 910.5 7.1; 594 5.48 910.5 7.1; 595 -9.27 910.5 7.125
204. 596 -8.92 910.5 7.125; 597 -8.67 910.5 7.125; 598 -8.37 910.5 7.125
205. 599 -8.07 910.5 7.125; 600 -7.82 910.5 7.125; 601 -7.47 910.5 7.125
206. 602 -0.9 910.5 7.45; 603 -0.549999 910.5 7.45; 604 -0.3 910.5 7.45
207. 605 0 910.5 7.45; 606 0.3 910.5 7.45; 607 0.549999 910.5 7.45
208. 608 0.9 910.5 7.45; 609 3.68 910.5 7.45; 610 4.03 910.5 7.45
209. 611 4.28 910.5 7.45; 612 4.58 910.5 7.45; 613 4.88 910.5 7.45
210. 614 5.13 910.5 7.45; 615 5.48 910.5 7.45; 616 -0.9 910.5 7.7
211. 617 -0.55 910.5 7.7; 618 -0.3 910.5 7.7; 619 0 910.5 7.7; 620 0.3 910.5 7.7
212. 621 0.55 910.5 7.7; 622 0.9 910.5 7.7; 623 3.68 910.5 7.7; 624 4.03 910.5 7.7
213. 625 4.28 910.5 7.7; 626 4.58 910.5 7.7; 627 4.88 910.5 7.7; 628 5.13 910.5 7.7
214. 629 5.48 910.5 7.7; 630 -0.9 910.5 8; 631 -0.55 910.5 8; 632 -0.3 910.5 8
215. 633 0 910.5 8; 634 0.3 910.5 8; 635 0.549999 910.5 8; 636 0.9 910.5 8
216. 637 3.68 910.5 8; 638 4.03 910.5 8; 639 4.28 910.5 8; 640 4.58 910.5 8
217. 641 4.88 910.5 8; 642 5.13 910.5 8; 643 5.48 910.5 8; 644 -0.9 910.5 8.3
218. 645 -0.549999 910.5 8.3; 646 -0.3 910.5 8.3; 647 0 910.5 8.3
219. 648 0.3 910.5 8.3; 649 0.549999 910.5 8.3; 650 0.9 910.5 8.3
220. 651 3.68 910.5 8.3; 652 4.03 910.5 8.3; 653 4.28 910.5 8.3; 654 4.58 910.5 8.3
221. 655 4.88 910.5 8.3; 656 5.13 910.5 8.3; 657 5.48 910.5 8.3
222. 658 -0.9 910.5 8.55; 659 -0.55 910.5 8.55; 660 -0.3 910.5 8.55
223. 661 0 910.5 8.55; 662 0.3 910.5 8.55; 663 0.55 910.5 8.55; 664 0.9 910.5 8.55
224. 665 3.68 910.5 8.55; 666 4.03 910.5 8.55; 667 4.28 910.5 8.55
225. 668 4.58 910.5 8.55; 669 4.88 910.5 8.55; 670 5.13 910.5 8.55
226. 671 5.48 910.5 8.55; 672 -0.9 910.5 8.9; 673 -0.55 910.5 8.9
227. 674 -0.3 910.5 8.9; 675 0 910.5 8.9; 676 0.3 910.5 8.9; 677 0.549999 910.5 8.9
228. 678 0.9 910.5 8.9; 679 3.68 910.5 8.9; 680 4.03 910.5 8.9; 681 4.28 910.5 8.9
229. 682 4.58 910.5 8.9; 683 4.88 910.5 8.9; 684 5.13 910.5 8.9; 685 5.48 910.5 8.9
230. 686 6.285 910.5 9.245; 687 6.535 910.5 9.245; 688 6.835 910.5 9.245
231. 689 7.135 910.5 9.245; 690 7.385 910.5 9.245; 691 6.285 910.5 9.445
232. 692 6.535 910.5 9.445; 693 6.835 910.5 9.445; 694 7.135 910.5 9.445
233. 695 7.385 910.5 9.445; 696 6.285 910.5 9.745; 697 6.535 910.5 9.745
234. 698 6.835 910.5 9.745; 699 7.135 910.5 9.745; 700 7.385 910.5 9.745
235. 701 6.285 910.5 10.045; 702 6.535 910.5 10.045; 703 6.835 910.5 10.045
236. 704 7.135 910.5 10.045; 705 7.385 910.5 10.045; 706 6.285 910.5 10.345
237. 707 6.535 910.5 10.345; 708 6.835 910.5 10.345; 709 7.135 910.5 10.345
238. 710 7.385 910.5 10.345; 711 6.285 910.5 10.645; 712 6.535 910.5 10.645
239. 713 6.835 910.5 10.645; 714 7.135 910.5 10.645; 715 7.385 910.5 10.645
240. 716 6.285 910.5 10.945; 717 6.535 910.5 10.945; 718 6.835 910.5 10.945
241. 719 7.135 910.5 10.945; 720 7.385 910.5 10.945; 721 6.285 910.5 11.245
242. 722 6.535 910.5 11.245; 723 6.835 910.5 11.245; 724 7.135 910.5 11.245
243. 725 7.385 910.5 11.245; 726 6.285 910.5 11.545; 727 6.535 910.5 11.545
244. 728 6.835 910.5 11.545; 729 7.135 910.5 11.545; 730 7.385 910.5 11.545
245. 731 6.285 910.5 11.845; 732 6.535 910.5 11.845; 733 6.835 910.5 11.845
246. 734 7.135 910.5 11.845; 735 7.385 910.5 11.845; 736 -9.27 910.5 11.925
247. 737 -8.92 910.5 11.925; 738 -8.67 910.5 11.925; 739 -8.37 910.5 11.925
248. 740 -8.07 910.5 11.925; 741 -7.82 910.5 11.925; 742 -7.47 910.5 11.925
249. 743 -0.9 910.5 11.925; 744 -0.55 910.5 11.925; 745 -0.3 910.5 11.925
250. 746 0 910.5 11.925; 747 0.3 910.5 11.925; 748 0.549999 910.5 11.925
251. 749 0.9 910.5 11.925; 750 6.285 910.5 12.145; 751 6.535 910.5 12.145
252. 752 6.835 910.5 12.145; 753 7.135 910.5 12.145; 754 7.385 910.5 12.145
253. 755 -9.27 910.5 12.275; 756 -8.92 910.5 12.275; 757 -8.67 910.5 12.275
254. 758 -8.37 910.5 12.275; 759 -8.07 910.5 12.275; 760 -7.82 910.5 12.275
255. 761 -7.47 910.5 12.275; 762 -0.9 910.5 12.275; 763 -0.549999 910.5 12.275
256. 764 -0.3 910.5 12.275; 765 0 910.5 12.275; 766 0.3 910.5 12.275
257. 767 0.549999 910.5 12.275; 768 0.9 910.5 12.275; 769 6.285 910.5 12.445
258. 770 6.535 910.5 12.445; 771 6.835 910.5 12.445; 772 7.135 910.5 12.445
259. 773 7.385 910.5 12.445; 774 -9.27 910.5 12.525; 775 -8.92 910.5 12.525
260. 776 -8.67 910.5 12.525; 777 -8.37 910.5 12.525; 778 -8.07 910.5 12.525
261. 779 -7.82 910.5 12.525; 780 -7.47 910.5 12.525; 781 -0.9 910.5 12.525
262. 782 -0.55 910.5 12.525; 783 -0.3 910.5 12.525; 784 0 910.5 12.525
263. 785 0.3 910.5 12.525; 786 0.55 910.5 12.525; 787 0.9 910.5 12.525
264. 788 6.285 910.5 12.645; 789 6.535 910.5 12.645; 790 6.835 910.5 12.645
265. 791 7.135 910.5 12.645; 792 7.385 910.5 12.645; 793 -9.27 910.5 12.825
266. 794 -8.92 910.5 12.825; 795 -8.67 910.5 12.825; 796 -8.37 910.5 12.825
267. 797 -8.07 910.5 12.825; 798 -7.82 910.5 12.825; 799 -7.47 910.5 12.825
268. 800 -0.9 910.5 12.825; 801 -0.55 910.5 12.825; 802 -0.3 910.5 12.825
269. 803 0 910.5 12.825; 804 0.3 910.5 12.825; 805 0.549999 910.5 12.825
270. 806 0.9 910.5 12.825; 807 6.285 910.5 12.945; 808 6.535 910.5 12.945

272. 812 -9.27 910.5 13.125; 813 -8.92 910.5 13.125; 814 -8.67 910.5 13.125
273. 815 -8.37 910.5 13.125; 816 -8.07 910.5 13.125; 817 -7.82 910.5 13.125
274. 818 -7.47 910.5 13.125; 819 -0.9 910.5 13.125; 820 -0.549999 910.5 13.125
275. 821 -0.3 910.5 13.125; 822 0 910.5 13.125; 823 0.3 910.5 13.125
276. 824 0.549999 910.5 13.125; 825 0.9 910.5 13.125; 826 6.285 910.5 13.245
277. 827 6.535 910.5 13.245; 828 6.835 910.5 13.245; 829 7.135 910.5 13.245
278. 830 7.385 910.5 13.245; 831 -9.27 910.5 13.375; 832 -8.92 910.5 13.375
279. 833 -8.67 910.5 13.375; 834 -8.37 910.5 13.375; 835 -8.07 910.5 13.375
280. 836 -7.82 910.5 13.375; 837 -7.47 910.5 13.375; 838 -0.9 910.5 13.375
281. 839 -0.55 910.5 13.375; 840 -0.3 910.5 13.375; 841 0 910.5 13.375
282. 842 0.3 910.5 13.375; 843 0.55 910.5 13.375; 844 0.9 910.5 13.375
283. 845 6.285 910.5 13.545; 846 6.535 910.5 13.545; 847 6.835 910.5 13.545
284. 848 7.135 910.5 13.545; 849 7.385 910.5 13.545; 850 -9.27 910.5 13.725
285. 851 -8.92 910.5 13.725; 852 -8.67 910.5 13.725; 853 -8.37 910.5 13.725
286. 854 -8.07 910.5 13.725; 855 -7.82 910.5 13.725; 856 -7.47 910.5 13.725
287. 857 -0.9 910.5 13.725; 858 -0.55 910.5 13.725; 859 -0.3 910.5 13.725
288. 860 0 910.5 13.725; 861 0.3 910.5 13.725; 862 0.549999 910.5 13.725
289. 863 0.9 910.5 13.725; 864 6.285 910.5 13.845; 865 6.535 910.5 13.845
290. 866 6.835 910.5 13.845; 867 7.135 910.5 13.845; 868 7.385 910.5 13.845
291. 869 6.285 910.5 14.145; 870 6.535 910.5 14.145; 871 6.835 910.5 14.145
292. 872 7.135 910.5 14.145; 873 7.385 910.5 14.145; 874 6.285 910.5 14.445
293. 875 6.535 910.5 14.445; 876 6.835 910.5 14.445; 877 7.135 910.5 14.445
294. 878 7.385 910.5 14.445; 879 6.285 910.5 14.745; 880 6.535 910.5 14.745
295. 881 6.835 910.5 14.745; 882 7.135 910.5 14.745; 883 7.385 910.5 14.745
296. 884 6.285 910.5 15.045; 885 6.535 910.5 15.045; 886 6.835 910.5 15.045
297. 887 7.135 910.5 15.045; 888 7.385 910.5 15.045; 889 6.285 910.5 15.345
298. 890 6.535 910.5 15.345; 891 6.835 910.5 15.345; 892 7.135 910.5 15.345
299. 893 7.385 910.5 15.345; 894 6.285 910.5 15.645; 895 6.535 910.5 15.645
300. 896 6.835 910.5 15.645; 897 7.135 910.5 15.645; 898 7.385 910.5 15.645
301. 899 6.285 910.5 15.945; 900 6.535 910.5 15.945; 901 6.835 910.5 15.945
302. 902 7.135 910.5 15.945; 903 7.385 910.5 15.945; 904 6.285 910.5 16.245
303. 905 6.535 910.5 16.245; 906 6.835 910.5 16.245; 907 7.135 910.5 16.245
304. 908 7.385 910.5 16.245; 909 6.285 910.5 16.545; 910 6.535 910.5 16.545
305. 911 6.835 910.5 16.545; 912 7.135 910.5 16.545; 913 7.385 910.5 16.545
306. 914 6.285 910.5 16.78; 915 6.535 910.5 16.78; 916 6.835 910.5 16.78
307. 917 7.135 910.5 16.78; 918 7.385 910.5 16.78; 919 6.285 910.5 17.08
308. 920 6.535 910.5 17.08; 921 6.835 910.5 17.08; 922 7.135 910.5 17.08
309. 923 7.385 910.5 17.08; 924 13.98 910.5 17.195; 925 14.23 910.5 17.195
310. 926 14.53 910.5 17.195; 927 14.83 910.5 17.195; 928 15.13 910.5 17.195
311. 929 15.43 910.5 17.195; 930 15.68 910.5 17.195; 931 6.285 910.5 17.38
312. 932 6.535 910.5 17.38; 933 6.835 910.5 17.38; 934 7.135 910.5 17.38
313. 935 7.385 910.5 17.38; 936 13.98 910.5 17.595; 937 14.23 910.5 17.595
314. 938 14.53 910.5 17.595; 939 14.83 910.5 17.595; 940 15.13 910.5 17.595
315. 941 15.43 910.5 17.595; 942 15.68 910.5 17.595; 943 6.285 910.5 17.68
316. 944 6.535 910.5 17.68; 945 6.835 910.5 17.68; 946 7.135 910.5 17.68
317. 947 7.385 910.5 17.68; 948 13.98 910.5 17.895; 949 14.23 910.5 17.895
318. 950 14.53 910.5 17.895; 951 14.83 910.5 17.895; 952 15.13 910.5 17.895
319. 953 15.43 910.5 17.895; 954 15.68 910.5 17.895; 955 6.285 910.5 17.98
320. 956 6.535 910.5 17.98; 957 6.835 910.5 17.98; 958 7.135 910.5 17.98
321. 959 7.385 910.5 17.98; 960 13.98 910.5 18.195; 961 14.23 910.5 18.195
322. 962 14.53 910.5 18.195; 963 14.83 910.5 18.195; 964 15.13 910.5 18.195
323. 965 15.43 910.5 18.195; 966 15.68 910.5 18.195; 967 6.285 910.5 18.28
324. 968 6.535 910.5 18.28; 969 6.835 910.5 18.28; 970 7.135 910.5 18.28
325. 971 7.385 910.5 18.28; 972 13.98 910.5 18.495; 973 14.23 910.5 18.495
326. 974 14.53 910.5 18.495; 975 14.83 910.5 18.495; 976 15.13 910.5 18.495
327. 977 15.43 910.5 18.495; 978 15.68 910.5 18.495; 979 6.285 910.5 18.58
328. 980 6.535 910.5 18.58; 981 6.835 910.5 18.58; 982 7.135 910.5 18.58
329. 983 7.385 910.5 18.58; 984 6.285 910.5 18.78; 985 6.535 910.5 18.78
330. 986 6.835 910.5 18.78; 987 7.135 910.5 18.78; 988 7.385 910.5 18.78
331. 989 13.98 910.5 18.795; 990 14.23 910.5 18.795; 991 14.53 910.5 18.795
332. 992 14.83 910.5 18.795; 993 15.13 910.5 18.795; 994 15.43 910.5 18.795
333. 995 15.68 910.5 18.795; 996 13.98 910.5 19.095; 997 14.23 910.5 19.095
334. 998 14.53 910.5 19.095; 999 14.83 910.5 19.095; 1000 15.13 910.5 19.095
335. 1001 15.43 910.5 19.095; 1002 15.68 910.5 19.095; 1003 13.98 910.5 19.295
336. 1004 14.23 910.5 19.295; 1005 14.53 910.5 19.295; 1006 14.83 910.5 19.295
337. 1007 15.13 910.5 19.295; 1008 15.43 910.5 19.295; 1009 15.68 910.5 19.295
338. 1010 13.98 910.5 19.595; 1011 14.23 910.5 19.595; 1012 14.53 910.5 19.595
339. 1013 14.83 910.5 19.595; 1014 15.13 910.5 19.595; 1015 15.43 910.5 19.595
340. 1016 15.68 910.5 19.595; 1017 13.98 910.5 19.895; 1018 14.23 910.5 19.895
341. 1019 14.53 910.5 19.895; 1020 14.83 910.5 19.895; 1021 15.13 910.5 19.895
342. 1022 15.43 910.5 19.895; 1023 15.68 910.5 19.895; 1024 13.98 910.5 20.195
343. 1025 14.23 910.5 20.195; 1026 14.53 910.5 20.195; 1027 14.83 910.5 20.195

344. 1028 15.13 910.5 20.195; 1029 15.43 910.5 20.195; 1030 15.68 910.5 20.195
345. 1031 13.98 910.5 20.495; 1032 14.23 910.5 20.495; 1033 14.53 910.5 20.495
346. 1034 14.83 910.5 20.495; 1035 15.13 910.5 20.495; 1036 15.43 910.5 20.495
347. 1037 15.68 910.5 20.495; 1038 13.98 910.5 20.795; 1039 14.23 910.5 20.795
348. 1040 14.53 910.5 20.795; 1041 14.83 910.5 20.795; 1042 15.13 910.5 20.795
349. 1043 15.43 910.5 20.795; 1044 15.68 910.5 20.795; 1045 13.98 910.5 21.195
350. 1046 14.23 910.5 21.195; 1047 14.53 910.5 21.195; 1048 14.83 910.5 21.195
351. 1049 15.13 910.5 21.195; 1050 15.43 910.5 21.195; 1051 15.68 910.5 21.195
352. 1052 10.23 910.5 21.595; 1053 10.53 910.5 21.595; 1054 10.83 910.5 21.595
353. 1055 11.13 910.5 21.595; 1056 11.43 910.5 21.595; 1057 10.23 910.5 21.795
354. 1058 10.53 910.5 21.795; 1059 10.83 910.5 21.795; 1060 11.13 910.5 21.795
355. 1061 11.43 910.5 21.795; 1062 10.23 910.5 22.095; 1063 10.53 910.5 22.095
356. 1064 10.83 910.5 22.095; 1065 11.13 910.5 22.095; 1066 11.43 910.5 22.095
357. 1067 10.23 910.5 22.395; 1068 10.53 910.5 22.395; 1069 10.83 910.5 22.395
358. 1070 11.13 910.5 22.395; 1071 11.43 910.5 22.395; 1072 10.23 910.5 22.595
359. 1073 10.53 910.5 22.595; 1074 10.83 910.5 22.595; 1075 11.13 910.5 22.595
360. 1076 11.43 910.5 22.595; 1077 25.37 911.05 -0.5; 1078 25.62 911.05 -0.5
361. 1079 25.87 911.05 -0.5; 1080 26.17 911.05 -0.5; 1081 26.47 911.05 -0.5
362. 1082 26.72 911.05 -0.5; 1083 26.97 911.05 -0.5; 1084 25.37 911.05 -0.3
363. 1085 25.62 911.05 -0.3; 1086 25.87 911.05 -0.3; 1087 26.17 911.05 -0.3
364. 1088 26.47 911.05 -0.3; 1089 26.72 911.05 -0.3; 1090 26.97 911.05 -0.3
365. 1091 25.37 911.05 0; 1092 25.62 911.05 0; 1093 25.87 911.05 0
366. 1094 26.17 911.05 0; 1095 26.47 911.05 0; 1096 26.72 911.05 0
367. 1097 26.97 911.05 0; 1098 25.37 911.05 0.3; 1099 25.62 911.05 0.3
368. 1100 25.87 911.05 0.3; 1101 26.17 911.05 0.3; 1102 26.47 911.05 0.3
369. 1103 26.72 911.05 0.3; 1104 26.97 911.05 0.3; 1105 25.37 911.05 0.55
370. 1106 25.62 911.05 0.55; 1107 25.87 911.05 0.55; 1108 26.17 911.05 0.55
371. 1109 26.47 911.05 0.55; 1110 26.72 911.05 0.55; 1111 26.97 911.05 0.55
372. 1112 25.37 911.05 0.9; 1113 25.62 911.05 0.9; 1114 25.87 911.05 0.9
373. 1115 26.17 911.05 0.9; 1116 26.47 911.05 0.9; 1117 26.72 911.05 0.9
374. 1118 26.97 911.05 0.9; 1119 25.37 911.05 1.2; 1120 25.62 911.05 1.2
375. 1121 25.87 911.05 1.2; 1122 26.17 911.05 1.2; 1123 26.47 911.05 1.2
376. 1124 26.72 911.05 1.2; 1125 26.97 911.05 1.2; 1126 25.37 911.05 1.5
377. 1127 25.62 911.05 1.5; 1128 25.87 911.05 1.5; 1129 26.17 911.05 1.5
378. 1130 26.47 911.05 1.5; 1131 26.72 911.05 1.5; 1132 26.97 911.05 1.5
379. 1133 25.37 911.05 1.8; 1134 25.62 911.05 1.8; 1135 25.87 911.05 1.8
380. 1136 26.17 911.05 1.8; 1137 26.47 911.05 1.8; 1138 26.72 911.05 1.8
381. 1139 26.97 911.05 1.8; 1140 25.37 911.05 2.15; 1141 25.62 911.05 2.15
382. 1142 25.87 911.05 2.15; 1143 26.17 911.05 2.15; 1144 26.47 911.05 2.15
383. 1145 26.72 911.05 2.15; 1146 26.97 911.05 2.15; 1147 25.37 911.05 2.4
384. 1148 25.62 911.05 2.4; 1149 25.87 911.05 2.4; 1150 26.17 911.05 2.4
385. 1151 26.47 911.05 2.4; 1152 26.72 911.05 2.4; 1153 26.97 911.05 2.4
386. 1154 25.37 911.05 2.7; 1155 25.62 911.05 2.7; 1156 25.87 911.05 2.7
387. 1157 26.17 911.05 2.7; 1158 26.47 911.05 2.7; 1159 26.72 911.05 2.7
388. 1160 26.97 911.05 2.7; 1161 25.37 911.05 3; 1162 25.62 911.05 3
389. 1163 25.87 911.05 3; 1164 26.17 911.05 3; 1165 26.47 911.05 3
390. 1166 26.72 911.05 3; 1167 26.97 911.05 3; 1168 25.37 911.05 3.2
391. 1169 25.62 911.05 3.2; 1170 25.87 911.05 3.2; 1171 26.17 911.05 3.2
392. 1172 26.47 911.05 3.2; 1173 26.72 911.05 3.2; 1174 26.97 911.05 3.2
393. 1175 21.23 911.05 24.045; 1176 21.53 911.05 24.045; 1177 21.83 911.05 24.045
394. 1178 22.13 911.05 24.045; 1179 22.48 911.05 24.045; 1180 22.78 911.05 24.045
395. 1181 23.08 911.05 24.045; 1182 23.38 911.05 24.045; 1183 23.63 911.05 24.045
396. 1184 23.88 911.05 24.045; 1185 24.12 911.05 24.045; 1186 24.37 911.05 24.045
397. 1187 24.62 911.05 24.045; 1188 24.92 911.05 24.045; 1189 25.22 911.05 24.045
398. 1190 25.52 911.05 24.045; 1191 25.87 911.05 24.045; 1192 26.17 911.05 24.045
399. 1193 26.47 911.05 24.045; 1194 26.77 911.05 24.045; 1195 21.23 911.05 24.395
400. 1196 21.53 911.05 24.395; 1197 21.83 911.05 24.395; 1198 22.13 911.05 24.395
401. 1199 22.48 911.05 24.395; 1200 22.78 911.05 24.395; 1201 23.08 911.05 24.395
402. 1202 23.38 911.05 24.395; 1203 23.63 911.05 24.395; 1204 23.88 911.05 24.395
403. 1205 24.12 911.05 24.395; 1206 24.37 911.05 24.395; 1207 24.62 911.05 24.395
404. 1208 24.92 911.05 24.395; 1209 25.22 911.05 24.395; 1210 25.52 911.05 24.395
405. 1211 25.87 911.05 24.395; 1212 26.17 911.05 24.395; 1213 26.47 911.05 24.395
406. 1214 26.77 911.05 24.395; 1215 21.23 911.05 24.745; 1216 21.53 911.05 24.745
407. 1217 21.83 911.05 24.745; 1218 22.13 911.05 24.745; 1219 22.48 911.05 24.745
408. 1220 22.78 911.05 24.745; 1221 23.08 911.05 24.745; 1222 23.38 911.05 24.745
409. 1223 23.63 911.05 24.745; 1224 23.88 911.05 24.745; 1225 24.12 911.05 24.745
410. 1226 24.37 911.05 24.745; 1227 24.62 911.05 24.745; 1228 24.92 911.05 24.745
411. 1229 25.22 911.05 24.745; 1230 25.52 911.05 24.745; 1231 25.87 911.05 24.745
412. 1232 26.17 911.05 24.745; 1233 26.47 911.05 24.745; 1234 26.77 911.05 24.745
413. 1235 21.23 911.05 25.045; 1236 21.53 911.05 25.045; 1237 21.83 911.05 25.045
414. 1238 22.13 911.05 25.045; 1239 22.48 911.05 25.045; 1240 22.78 911.05 25.045
415. 1241 23.08 911.05 25.045; 1242 23.38 911.05 25.045; 1243 23.63 911.05 25.045

416. 1244 23.88 911.05 25.045; 1245 24.12 911.05 25.045; 1246 24.37 911.05 25.045
417. 1247 24.62 911.05 25.045; 1248 24.92 911.05 25.045; 1249 25.22 911.05 25.045
418. 1250 25.52 911.05 25.045; 1251 25.87 911.05 25.045; 1252 26.17 911.05 25.045
419. 1253 26.47 911.05 25.045; 1254 26.77 911.05 25.045; 1255 21.23 911.05 25.345
420. 1256 21.53 911.05 25.345; 1257 21.83 911.05 25.345; 1258 22.13 911.05 25.345
421. 1259 22.48 911.05 25.345; 1260 22.78 911.05 25.345; 1261 23.08 911.05 25.345
422. 1262 23.38 911.05 25.345; 1263 23.63 911.05 25.345; 1264 23.88 911.05 25.345
423. 1265 24.12 911.05 25.345; 1266 24.37 911.05 25.345; 1267 24.62 911.05 25.345
424. 1268 24.92 911.05 25.345; 1269 25.22 911.05 25.345; 1270 25.52 911.05 25.345
425. 1271 25.87 911.05 25.345; 1272 26.17 911.05 25.345; 1273 26.47 911.05 25.345
426. 1274 26.77 911.05 25.345; 1275 21.23 911.05 25.695; 1276 21.53 911.05 25.695
427. 1277 21.83 911.05 25.695; 1278 22.13 911.05 25.695; 1279 22.48 911.05 25.695
428. 1280 22.78 911.05 25.695; 1281 23.08 911.05 25.695; 1282 23.38 911.05 25.695
429. 1283 23.63 911.05 25.695; 1284 23.88 911.05 25.695; 1285 24.12 911.05 25.695
430. 1286 24.37 911.05 25.695; 1287 24.62 911.05 25.695; 1288 24.92 911.05 25.695
431. 1289 25.22 911.05 25.695; 1290 25.52 911.05 25.695; 1291 25.87 911.05 25.695
432. 1292 26.17 911.05 25.695; 1293 26.47 911.05 25.695; 1294 26.77 911.05 25.695
433. 1295 21.23 911.05 26.045; 1296 21.53 911.05 26.045; 1297 21.83 911.05 26.045
434. 1298 22.13 911.05 26.045; 1299 22.48 911.05 26.045; 1300 22.78 911.05 26.045
435. 1301 23.08 911.05 26.045; 1302 23.38 911.05 26.045; 1303 23.63 911.05 26.045
436. 1304 23.88 911.05 26.045; 1305 24.12 911.05 26.045; 1306 24.37 911.05 26.045
437. 1307 24.62 911.05 26.045; 1308 24.92 911.05 26.045; 1309 25.22 911.05 26.045
438. 1310 25.52 911.05 26.045; 1311 25.87 911.05 26.045; 1312 26.17 911.05 26.045
439. 1313 26.47 911.05 26.045; 1314 26.77 911.05 26.045
440. 1315 -0.799999 911.1 21.595; 1316 -0.600001 911.1 21.595
441. 1317 -0.299999 911.1 21.595; 1318 0 911.1 21.595; 1319 0.299999 911.1 21.595
442. 1320 0.599997 911.1 21.595; 1321 0.799999 911.1 21.595
443. 1322 -0.800001 911.1 21.795; 1323 -0.599994 911.1 21.795
444. 1324 -0.299995 911.1 21.795; 1325 1.90735E-006 911.1 21.795
445. 1326 0.299999 911.1 21.795; 1327 0.599995 911.1 21.795
446. 1328 0.799997 911.1 21.795; 1329 -0.799999 911.1 22.095
447. 1330 -0.600001 911.1 22.095; 1331 -0.299999 911.1 22.095; 1332 0 911.1 22.095
448. 1333 0.299999 911.1 22.095; 1334 0.599997 911.1 22.095
449. 1335 0.799999 911.1 22.095; 1336 -0.799999 911.1 22.395
450. 1337 -0.599997 911.1 22.395; 1338 -0.299995 911.1 22.395
451. 1339 1.90735E-006 911.1 22.395; 1340 0.299999 911.1 22.395
452. 1341 0.599997 911.1 22.395; 1342 0.799999 911.1 22.395
453. 1343 -0.800001 911.1 22.745; 1344 -0.600001 911.1 22.745
454. 1345 -0.299999 911.1 22.745; 1346 0 911.1 22.745; 1347 0.299999 911.1 22.745
455. 1348 0.600001 911.1 22.745; 1349 0.800003 911.1 22.745
456. 1350 -0.799997 911.1 23.095; 1351 -0.599997 911.1 23.095
457. 1352 -0.299997 911.1 23.095; 1353 1.90735E-006 911.1 23.095
458. 1354 0.300001 911.1 23.095; 1355 0.600001 911.1 23.095
459. 1356 0.800001 911.1 23.095; 1357 -0.799997 911.1 23.395
460. 1358 -0.599999 911.1 23.395; 1359 -0.300001 911.1 23.395
461. 1360 -1.90735E-006 911.1 23.395; 1361 0.300001 911.1 23.395
462. 1362 0.599999 911.1 23.395; 1363 0.799997 911.1 23.395
463. 1364 -0.799997 911.1 23.745; 1365 -0.599999 911.1 23.745
464. 1366 -0.300001 911.1 23.745; 1367 -1.90735E-006 911.1 23.745
465. 1368 0.299999 911.1 23.745; 1369 0.599995 911.1 23.745
466. 1370 0.799997 911.1 23.745; 1371 10.23 911.1 23.995; 1372 10.53 911.1 23.995
467. 1373 10.83 911.1 23.995; 1374 11.13 911.1 23.995; 1375 11.48 911.1 23.995
468. 1376 11.73 911.1 23.995; 1377 11.98 911.1 23.995; 1378 12.23 911.1 23.995
469. 1379 12.48 911.1 23.995; 1380 12.73 911.1 23.995; 1381 12.93 911.1 23.995
470. 1382 13.18 911.1 23.995; 1383 13.43 911.1 23.995; 1384 13.68 911.1 23.995
471. 1385 13.93 911.1 23.995; 1386 14.18 911.1 23.995; 1387 14.53 911.1 23.995
472. 1388 14.83 911.1 23.995; 1389 15.13 911.1 23.995; 1390 15.43 911.1 23.995
473. 1391 -0.800001 911.1 24.045; 1392 -0.600001 911.1 24.045
474. 1393 -0.299999 911.1 24.045; 1394 0 911.1 24.045; 1395 0.300001 911.1 24.045
475. 1396 0.600001 911.1 24.045; 1397 0.799999 911.1 24.045
476. 1398 -0.799995 911.1 24.395; 1399 -0.599995 911.1 24.395
477. 1400 -0.300001 911.1 24.395; 1401 0 911.1 24.395; 1402 0.300003 911.1 24.395
478. 1403 0.600001 911.1 24.395; 1404 0.799999 911.1 24.395
479. 1405 10.23 911.1 24.395; 1406 10.53 911.1 24.395; 1407 10.83 911.1 24.395
480. 1408 11.13 911.1 24.395; 1409 11.48 911.1 24.395; 1410 11.73 911.1 24.395
481. 1411 11.98 911.1 24.395; 1412 12.23 911.1 24.395; 1413 12.48 911.1 24.395
482. 1414 12.73 911.1 24.395; 1415 12.93 911.1 24.395; 1416 13.18 911.1 24.395
483. 1417 13.43 911.1 24.395; 1418 13.68 911.1 24.395; 1419 13.93 911.1 24.395
484. 1420 14.18 911.1 24.395; 1421 14.53 911.1 24.395; 1422 14.83 911.1 24.395
485. 1423 15.13 911.1 24.395; 1424 15.43 911.1 24.395; 1425 -0.799999 911.1 24.745
486. 1426 -0.599997 911.1 24.745; 1427 -0.299995 911.1 24.745

488. 1430 0.599997 911.1 24.745; 1431 0.799999 911.1 24.745
489. 1432 10.23 911.1 24.745; 1433 10.53 911.1 24.745; 1434 10.83 911.1 24.745
490. 1435 11.13 911.1 24.745; 1436 11.48 911.1 24.745; 1437 11.73 911.1 24.745
491. 1438 11.98 911.1 24.745; 1439 12.23 911.1 24.745; 1440 12.48 911.1 24.745
492. 1441 12.73 911.1 24.745; 1442 12.93 911.1 24.745; 1443 13.18 911.1 24.745
493. 1444 13.43 911.1 24.745; 1445 13.68 911.1 24.745; 1446 13.93 911.1 24.745
494. 1447 14.18 911.1 24.745; 1448 14.53 911.1 24.745; 1449 14.83 911.1 24.745
495. 1450 15.13 911.1 24.745; 1451 15.43 911.1 24.745; 1452 -0.799999 911.1 25.045
496. 1453 -0.600001 911.1 25.045; 1454 -0.299999 911.1 25.045; 1455 0 911.1 25.045
497. 1456 0.299999 911.1 25.045; 1457 0.599997 911.1 25.045
498. 1458 0.799999 911.1 25.045; 1459 10.23 911.1 25.045; 1460 10.53 911.1 25.045
499. 1461 10.83 911.1 25.045; 1462 11.13 911.1 25.045; 1463 11.48 911.1 25.045
500. 1464 11.73 911.1 25.045; 1465 11.98 911.1 25.045; 1466 12.23 911.1 25.045
501. 1467 12.48 911.1 25.045; 1468 12.73 911.1 25.045; 1469 12.93 911.1 25.045
502. 1470 13.18 911.1 25.045; 1471 13.43 911.1 25.045; 1472 13.68 911.1 25.045
503. 1473 13.93 911.1 25.045; 1474 14.18 911.1 25.045; 1475 14.53 911.1 25.045
504. 1476 14.83 911.1 25.045; 1477 15.13 911.1 25.045; 1478 15.43 911.1 25.045
505. 1479 -0.800001 911.1 25.345; 1480 -0.599994 911.1 25.345
506. 1481 -0.299995 911.1 25.345; 1482 1.90735E-006 911.1 25.345
507. 1483 0.299999 911.1 25.345; 1484 0.599995 911.1 25.345
508. 1485 0.799997 911.1 25.345; 1486 10.23 911.1 25.345; 1487 10.53 911.1 25.345
509. 1488 10.83 911.1 25.345; 1489 11.13 911.1 25.345; 1490 11.48 911.1 25.345
510. 1491 11.73 911.1 25.345; 1492 11.98 911.1 25.345; 1493 12.23 911.1 25.345
511. 1494 12.48 911.1 25.345; 1495 12.73 911.1 25.345; 1496 12.93 911.1 25.345
512. 1497 13.18 911.1 25.345; 1498 13.43 911.1 25.345; 1499 13.68 911.1 25.345
513. 1500 13.93 911.1 25.345; 1501 14.18 911.1 25.345; 1502 14.53 911.1 25.345
514. 1503 14.83 911.1 25.345; 1504 15.13 911.1 25.345; 1505 15.43 911.1 25.345
515. 1506 -0.799999 911.1 25.545; 1507 -0.600001 911.1 25.545
516. 1508 -0.299999 911.1 25.545; 1509 0 911.1 25.545; 1510 0.299999 911.1 25.545
517. 1511 0.599997 911.1 25.545; 1512 0.799999 911.1 25.545
518. 1513 10.23 911.1 25.695; 1514 10.53 911.1 25.695; 1515 10.83 911.1 25.695
519. 1516 11.13 911.1 25.695; 1517 11.48 911.1 25.695; 1518 11.73 911.1 25.695
520. 1519 11.98 911.1 25.695; 1520 12.23 911.1 25.695; 1521 12.48 911.1 25.695
521. 1522 12.73 911.1 25.695; 1523 12.93 911.1 25.695; 1524 13.18 911.1 25.695
522. 1525 13.43 911.1 25.695; 1526 13.68 911.1 25.695; 1527 13.93 911.1 25.695
523. 1528 14.18 911.1 25.695; 1529 14.53 911.1 25.695; 1530 14.83 911.1 25.695
524. 1531 15.13 911.1 25.695; 1532 15.43 911.1 25.695; 1533 10.23 911.1 26.095
525. 1534 10.53 911.1 26.095; 1535 10.83 911.1 26.095; 1536 11.13 911.1 26.095
526. 1537 11.48 911.1 26.095; 1538 11.73 911.1 26.095; 1539 11.98 911.1 26.095
527. 1540 12.23 911.1 26.095; 1541 12.48 911.1 26.095; 1542 12.73 911.1 26.095
528. 1543 12.93 911.1 26.095; 1544 13.18 911.1 26.095; 1545 13.43 911.1 26.095
529. 1546 13.68 911.1 26.095; 1547 13.93 911.1 26.095; 1548 14.18 911.1 26.095
530. 1549 14.53 911.1 26.095; 1550 14.83 911.1 26.095; 1551 15.13 911.1 26.095
531. 1552 15.43 911.1 26.095; 1553 3.82 911.15 23.395; 1554 4.17 911.15 23.395
532. 1555 4.47 911.15 23.395; 1556 4.77 911.15 23.395; 1557 5.17 911.15 23.395
533. 1558 5.47 911.15 23.395; 1559 5.77 911.15 23.395; 1560 6.17 911.15 23.395
534. 1561 6.47 911.15 23.395; 1562 6.77 911.15 23.395; 1563 7.12 911.15 23.395
535. 1564 3.82 911.15 23.745; 1565 4.17 911.15 23.745; 1566 4.47 911.15 23.745
536. 1567 4.77 911.15 23.745; 1568 5.17 911.15 23.745; 1569 5.47 911.15 23.745
537. 1570 5.77 911.15 23.745; 1571 6.17 911.15 23.745; 1572 6.47 911.15 23.745
538. 1573 6.77 911.15 23.745; 1574 7.12 911.15 23.745; 1575 3.82 911.15 24.045
539. 1576 4.17 911.15 24.045; 1577 4.47 911.15 24.045; 1578 4.77 911.15 24.045
540. 1579 5.17 911.15 24.045; 1580 5.47 911.15 24.045; 1581 5.77 911.15 24.045
541. 1582 6.17 911.15 24.045; 1583 6.47 911.15 24.045; 1584 6.77 911.15 24.045
542. 1585 7.12 911.15 24.045; 1586 3.82 911.15 24.345; 1587 4.17 911.15 24.345
543. 1588 4.47 911.15 24.345; 1589 4.77 911.15 24.345; 1590 5.17 911.15 24.345
544. 1591 5.47 911.15 24.345; 1592 5.77 911.15 24.345; 1593 6.17 911.15 24.345
545. 1594 6.47 911.15 24.345; 1595 6.77 911.15 24.345; 1596 7.12 911.15 24.345
546. 1597 3.82 911.15 24.745; 1598 4.17 911.15 24.745; 1599 4.47 911.15 24.745
547. 1600 4.77 911.15 24.745; 1601 5.17 911.15 24.745; 1602 5.47 911.15 24.745
548. 1603 5.77 911.15 24.745; 1604 6.17 911.15 24.745; 1605 6.47 911.15 24.745
549. 1606 6.77 911.15 24.745; 1607 7.12 911.15 24.745; 1608 3.82 911.15 25.045
550. 1609 4.17 911.15 25.045; 1610 4.47 911.15 25.045; 1611 4.77 911.15 25.045
551. 1612 5.17 911.15 25.045; 1613 5.47 911.15 25.045; 1614 5.77 911.15 25.045
552. 1615 6.17 911.15 25.045; 1616 6.47 911.15 25.045; 1617 6.77 911.15 25.045
553. 1618 7.12 911.15 25.045; 1619 3.82 911.15 25.345; 1620 4.17 911.15 25.345
554. 1621 4.47 911.15 25.345; 1622 4.77 911.15 25.345; 1623 5.17 911.15 25.345
555. 1624 5.47 911.15 25.345; 1625 5.77 911.15 25.345; 1626 6.17 911.15 25.345
556. 1627 6.47 911.15 25.345; 1628 6.77 911.15 25.345; 1629 7.12 911.15 25.345
557. 1630 3.82 911.15 25.745; 1631 4.17 911.15 25.745; 1632 4.47 911.15 25.745
558. 1633 4.77 911.15 25.745; 1634 5.17 911.15 25.745; 1635 5.47 911.15 25.745
559. 1636 5.77 911.15 25.745; 1637 6.17 911.15 25.745; 1638 6.47 911.15 25.745

560. 1639 6.77 911.15 25.745; 1640 7.12 911.15 25.745; 1641 3.82 911.15 26.045
561. 1642 4.17 911.15 26.045; 1643 4.47 911.15 26.045; 1644 4.77 911.15 26.045
562. 1645 5.17 911.15 26.045; 1646 5.47 911.15 26.045; 1647 5.77 911.15 26.045
563. 1648 6.17 911.15 26.045; 1649 6.47 911.15 26.045; 1650 6.77 911.15 26.045
564. 1651 7.12 911.15 26.045; 1652 3.82 911.15 26.345; 1653 4.17 911.15 26.345
565. 1654 4.47 911.15 26.345; 1655 4.77 911.15 26.345; 1656 5.17 911.15 26.345
566. 1657 5.47 911.15 26.345; 1658 5.77 911.15 26.345; 1659 6.17 911.15 26.345
567. 1660 6.47 911.15 26.345; 1661 6.77 911.15 26.345; 1662 7.12 911.15 26.345
568. 1663 3.82 911.15 26.695; 1664 4.17 911.15 26.695; 1665 4.47 911.15 26.695
569. 1666 4.77 911.15 26.695; 1667 5.17 911.15 26.695; 1668 5.47 911.15 26.695
570. 1669 5.77 911.15 26.695; 1670 6.17 911.15 26.695; 1671 6.47 911.15 26.695
571. 1672 6.77 911.15 26.695; 1673 7.12 911.15 26.695; 1674 21.02 911.3 6.15
572. 1675 21.22 911.3 6.15; 1676 21.52 911.3 6.15; 1677 21.82 911.3 6.15
573. 1678 22.22 911.3 6.15; 1679 22.52 911.3 6.15; 1680 22.82 911.3 6.15
574. 1681 23.12 911.3 6.15; 1682 23.42 911.3 6.15; 1683 23.72 911.3 6.15
575. 1684 23.97 911.3 6.15; 1685 24.27 911.3 6.15; 1686 24.57 911.3 6.15
576. 1687 24.87 911.3 6.15; 1688 25.17 911.3 6.15; 1689 25.47 911.3 6.15
577. 1690 25.87 911.3 6.15; 1691 26.17 911.3 6.15; 1692 26.47 911.3 6.15
578. 1693 26.67 911.3 6.15; 1694 21.02 911.3 6.35; 1695 21.22 911.3 6.35
579. 1696 21.52 911.3 6.35; 1697 21.82 911.3 6.35; 1698 22.22 911.3 6.35
580. 1699 22.52 911.3 6.35; 1700 22.82 911.3 6.35; 1701 23.12 911.3 6.35
581. 1702 23.42 911.3 6.35; 1703 23.72 911.3 6.35; 1704 23.97 911.3 6.35
582. 1705 24.27 911.3 6.35; 1706 24.57 911.3 6.35; 1707 24.87 911.3 6.35
583. 1708 25.17 911.3 6.35; 1709 25.47 911.3 6.35; 1710 25.87 911.3 6.35
584. 1711 26.17 911.3 6.35; 1712 26.47 911.3 6.35; 1713 26.67 911.3 6.35
585. 1714 21.02 911.3 6.75; 1715 21.22 911.3 6.75; 1716 21.52 911.3 6.75
586. 1717 21.82 911.3 6.75; 1718 22.22 911.3 6.75; 1719 22.52 911.3 6.75
587. 1720 22.82 911.3 6.75; 1721 23.12 911.3 6.75; 1722 23.42 911.3 6.75
588. 1723 23.72 911.3 6.75; 1724 23.97 911.3 6.75; 1725 24.27 911.3 6.75
589. 1726 24.57 911.3 6.75; 1727 24.87 911.3 6.75; 1728 25.17 911.3 6.75
590. 1729 25.47 911.3 6.75; 1730 25.87 911.3 6.75; 1731 26.17 911.3 6.75
591. 1732 26.47 911.3 6.75; 1733 26.67 911.3 6.75; 1734 21.02 911.3 7.05
592. 1735 21.22 911.3 7.05; 1736 21.52 911.3 7.05; 1737 21.82 911.3 7.05
593. 1738 22.22 911.3 7.05; 1739 22.52 911.3 7.05; 1740 22.82 911.3 7.05
594. 1741 23.12 911.3 7.05; 1742 23.42 911.3 7.05; 1743 23.72 911.3 7.05
595. 1744 23.97 911.3 7.05; 1745 24.27 911.3 7.05; 1746 24.57 911.3 7.05
596. 1747 24.87 911.3 7.05; 1748 25.17 911.3 7.05; 1749 25.47 911.3 7.05
597. 1750 25.87 911.3 7.05; 1751 26.17 911.3 7.05; 1752 26.47 911.3 7.05
598. 1753 26.67 911.3 7.05; 1754 21.02 911.3 7.35; 1755 21.22 911.3 7.35
599. 1756 21.52 911.3 7.35; 1757 21.82 911.3 7.35; 1758 22.22 911.3 7.35
600. 1759 22.52 911.3 7.35; 1760 22.82 911.3 7.35; 1761 23.12 911.3 7.35
601. 1762 23.42 911.3 7.35; 1763 23.72 911.3 7.35; 1764 23.97 911.3 7.35
602. 1765 24.27 911.3 7.35; 1766 24.57 911.3 7.35; 1767 24.87 911.3 7.35
603. 1768 25.17 911.3 7.35; 1769 25.47 911.3 7.35; 1770 25.87 911.3 7.35
604. 1771 26.17 911.3 7.35; 1772 26.47 911.3 7.35; 1773 26.67 911.3 7.35
605. 1774 21.02 911.3 7.75; 1775 21.22 911.3 7.75; 1776 21.52 911.3 7.75
606. 1777 21.82 911.3 7.75; 1778 22.22 911.3 7.75; 1779 22.52 911.3 7.75
607. 1780 22.82 911.3 7.75; 1781 23.12 911.3 7.75; 1782 23.42 911.3 7.75
608. 1783 23.72 911.3 7.75; 1784 23.97 911.3 7.75; 1785 24.27 911.3 7.75
609. 1786 24.57 911.3 7.75; 1787 24.87 911.3 7.75; 1788 25.17 911.3 7.75
610. 1789 25.47 911.3 7.75; 1790 25.87 911.3 7.75; 1791 26.17 911.3 7.75
611. 1792 26.47 911.3 7.75; 1793 26.67 911.3 7.75; 1794 21.02 911.3 7.95
612. 1795 21.22 911.3 7.95; 1796 21.52 911.3 7.95; 1797 21.82 911.3 7.95
613. 1798 22.22 911.3 7.95; 1799 22.52 911.3 7.95; 1800 22.82 911.3 7.95
614. 1801 23.12 911.3 7.95; 1802 23.42 911.3 7.95; 1803 23.72 911.3 7.95
615. 1804 23.97 911.3 7.95; 1805 24.27 911.3 7.95; 1806 24.57 911.3 7.95
616. 1807 24.87 911.3 7.95; 1808 25.17 911.3 7.95; 1809 25.47 911.3 7.95
617. 1810 25.87 911.3 7.95; 1811 26.17 911.3 7.95; 1812 26.47 911.3 7.95
618. 1813 26.67 911.3 7.95; 1814 21.23 911.3 17.295; 1815 21.53 911.3 17.295
619. 1816 21.83 911.3 17.295; 1817 22.13 911.3 17.295; 1818 22.53 911.3 17.295
620. 1819 22.78 911.3 17.295; 1820 23.03 911.3 17.295; 1821 23.28 911.3 17.295
621. 1822 23.58 911.3 17.295; 1823 23.88 911.3 17.295; 1824 24.12 911.3 17.295
622. 1825 24.42 911.3 17.295; 1826 24.72 911.3 17.295; 1827 24.97 911.3 17.295
623. 1828 25.22 911.3 17.295; 1829 25.47 911.3 17.295; 1830 25.87 911.3 17.295
624. 1831 26.17 911.3 17.295; 1832 26.47 911.3 17.295; 1833 26.77 911.3 17.295
625. 1834 21.23 911.3 17.595; 1835 21.53 911.3 17.595; 1836 21.83 911.3 17.595
626. 1837 22.13 911.3 17.595; 1838 22.53 911.3 17.595; 1839 22.78 911.3 17.595
627. 1840 23.03 911.3 17.595; 1841 23.28 911.3 17.595; 1842 23.58 911.3 17.595
628. 1843 23.88 911.3 17.595; 1844 24.12 911.3 17.595; 1845 24.42 911.3 17.595
629. 1846 24.72 911.3 17.595; 1847 24.97 911.3 17.595; 1848 25.22 911.3 17.595
630. 1849 25.47 911.3 17.595; 1850 25.87 911.3 17.595; 1851 26.17 911.3 17.595
631. 1852 26.47 911.3 17.595; 1853 26.77 911.3 17.595; 1854 21.23 911.3 17.895

632. 1855 21.53 911.3 17.895; 1856 21.83 911.3 17.895; 1857 22.13 911.3 17.895
633. 1858 22.53 911.3 17.895; 1859 22.78 911.3 17.895; 1860 23.03 911.3 17.895
634. 1861 23.28 911.3 17.895; 1862 23.58 911.3 17.895; 1863 23.88 911.3 17.895
635. 1864 24.12 911.3 17.895; 1865 24.42 911.3 17.895; 1866 24.72 911.3 17.895
636. 1867 24.97 911.3 17.895; 1868 25.22 911.3 17.895; 1869 25.47 911.3 17.895
637. 1870 25.87 911.3 17.895; 1871 26.17 911.3 17.895; 1872 26.47 911.3 17.895
638. 1873 26.77 911.3 17.895; 1874 21.23 911.3 18.195; 1875 21.53 911.3 18.195
639. 1876 21.83 911.3 18.195; 1877 22.13 911.3 18.195; 1878 22.53 911.3 18.195
640. 1879 22.78 911.3 18.195; 1880 23.03 911.3 18.195; 1881 23.28 911.3 18.195
641. 1882 23.58 911.3 18.195; 1883 23.88 911.3 18.195; 1884 24.12 911.3 18.195
642. 1885 24.42 911.3 18.195; 1886 24.72 911.3 18.195; 1887 24.97 911.3 18.195
643. 1888 25.22 911.3 18.195; 1889 25.47 911.3 18.195; 1890 25.87 911.3 18.195
644. 1891 26.17 911.3 18.195; 1892 26.47 911.3 18.195; 1893 26.77 911.3 18.195
645. 1894 21.23 911.3 18.595; 1895 21.53 911.3 18.595; 1896 21.83 911.3 18.595
646. 1897 22.13 911.3 18.595; 1898 22.53 911.3 18.595; 1899 22.78 911.3 18.595
647. 1900 23.03 911.3 18.595; 1901 23.28 911.3 18.595; 1902 23.58 911.3 18.595
648. 1903 23.88 911.3 18.595; 1904 24.12 911.3 18.595; 1905 24.42 911.3 18.595
649. 1906 24.72 911.3 18.595; 1907 24.97 911.3 18.595; 1908 25.22 911.3 18.595
650. 1909 25.47 911.3 18.595; 1910 25.87 911.3 18.595; 1911 26.17 911.3 18.595
651. 1912 26.47 911.3 18.595; 1913 26.77 911.3 18.595; 1914 21.23 911.3 18.845
652. 1915 21.53 911.3 18.845; 1916 21.83 911.3 18.845; 1917 22.13 911.3 18.845
653. 1918 22.53 911.3 18.845; 1919 22.78 911.3 18.845; 1920 23.03 911.3 18.845
654. 1921 23.28 911.3 18.845; 1922 23.58 911.3 18.845; 1923 23.88 911.3 18.845
655. 1924 24.12 911.3 18.845; 1925 24.42 911.3 18.845; 1926 24.72 911.3 18.845
656. 1927 24.97 911.3 18.845; 1928 25.22 911.3 18.845; 1929 25.47 911.3 18.845
657. 1930 25.87 911.3 18.845; 1931 26.17 911.3 18.845; 1932 26.47 911.3 18.845
658. 1933 26.77 911.3 18.845; 1934 21.23 911.3 19.095; 1935 21.53 911.3 19.095
659. 1936 21.83 911.3 19.095; 1937 22.13 911.3 19.095; 1938 22.53 911.3 19.095
660. 1939 22.78 911.3 19.095; 1940 23.03 911.3 19.095; 1941 23.28 911.3 19.095
661. 1942 23.58 911.3 19.095; 1943 23.88 911.3 19.095; 1944 24.12 911.3 19.095
662. 1945 24.42 911.3 19.095; 1946 24.72 911.3 19.095; 1947 24.97 911.3 19.095
663. 1948 25.22 911.3 19.095; 1949 25.47 911.3 19.095; 1950 25.87 911.3 19.095
664. 1951 26.17 911.3 19.095; 1952 26.47 911.3 19.095; 1953 26.77 911.3 19.095
665. 1954 21.23 911.3 19.295; 1955 21.53 911.3 19.295; 1956 21.83 911.3 19.295
666. 1957 22.13 911.3 19.295; 1958 22.53 911.3 19.295; 1959 22.78 911.3 19.295
667. 1960 23.03 911.3 19.295; 1961 23.28 911.3 19.295; 1962 23.58 911.3 19.295
668. 1963 23.88 911.3 19.295; 1964 24.12 911.3 19.295; 1965 24.42 911.3 19.295
669. 1966 24.72 911.3 19.295; 1967 24.97 911.3 19.295; 1968 25.22 911.3 19.295
670. 1969 25.47 911.3 19.295; 1970 25.87 911.3 19.295; 1971 26.17 911.3 19.295
671. 1972 26.47 911.3 19.295; 1973 26.77 911.3 19.295; 1974 21.23 911.3 19.545
672. 1975 21.53 911.3 19.545; 1976 21.83 911.3 19.545; 1977 22.13 911.3 19.545
673. 1978 22.53 911.3 19.545; 1979 22.78 911.3 19.545; 1980 23.03 911.3 19.545
674. 1981 23.28 911.3 19.545; 1982 23.58 911.3 19.545; 1983 23.88 911.3 19.545
675. 1984 24.12 911.3 19.545; 1985 24.42 911.3 19.545; 1986 24.72 911.3 19.545
676. 1987 24.97 911.3 19.545; 1988 25.22 911.3 19.545; 1989 25.47 911.3 19.545
677. 1990 25.87 911.3 19.545; 1991 26.17 911.3 19.545; 1992 26.47 911.3 19.545
678. 1993 26.77 911.3 19.545; 1994 21.23 911.3 19.795; 1995 21.53 911.3 19.795
679. 1996 21.83 911.3 19.795; 1997 22.13 911.3 19.795; 1998 22.53 911.3 19.795
680. 1999 22.78 911.3 19.795; 2000 23.03 911.3 19.795; 2001 23.28 911.3 19.795
681. 2002 23.58 911.3 19.795; 2003 23.88 911.3 19.795; 2004 24.12 911.3 19.795
682. 2005 24.42 911.3 19.795; 2006 24.72 911.3 19.795; 2007 24.97 911.3 19.795
683. 2008 25.22 911.3 19.795; 2009 25.47 911.3 19.795; 2010 25.87 911.3 19.795
684. 2011 26.17 911.3 19.795; 2012 26.47 911.3 19.795; 2013 26.77 911.3 19.795
685. 2014 21.23 911.3 20.195; 2015 21.53 911.3 20.195; 2016 21.83 911.3 20.195
686. 2017 22.13 911.3 20.195; 2018 22.53 911.3 20.195; 2019 22.78 911.3 20.195
687. 2020 23.03 911.3 20.195; 2021 23.28 911.3 20.195; 2022 23.58 911.3 20.195
688. 2023 23.88 911.3 20.195; 2024 24.12 911.3 20.195; 2025 24.42 911.3 20.195
689. 2026 24.72 911.3 20.195; 2027 24.97 911.3 20.195; 2028 25.22 911.3 20.195
690. 2029 25.47 911.3 20.195; 2030 25.87 911.3 20.195; 2031 26.17 911.3 20.195
691. 2032 26.47 911.3 20.195; 2033 26.77 911.3 20.195; 2034 21.23 911.3 20.495
692. 2035 21.53 911.3 20.495; 2036 21.83 911.3 20.495; 2037 22.13 911.3 20.495
693. 2038 22.53 911.3 20.495; 2039 22.78 911.3 20.495; 2040 23.03 911.3 20.495
694. 2041 23.28 911.3 20.495; 2042 23.58 911.3 20.495; 2043 23.88 911.3 20.495
695. 2044 24.12 911.3 20.495; 2045 24.42 911.3 20.495; 2046 24.72 911.3 20.495
696. 2047 24.97 911.3 20.495; 2048 25.22 911.3 20.495; 2049 25.47 911.3 20.495
697. 2050 25.87 911.3 20.495; 2051 26.17 911.3 20.495; 2052 26.47 911.3 20.495
698. 2053 26.77 911.3 20.495; 2054 21.23 911.3 20.795; 2055 21.53 911.3 20.795
699. 2056 21.83 911.3 20.795; 2057 22.13 911.3 20.795; 2058 22.53 911.3 20.795
700. 2059 22.78 911.3 20.795; 2060 23.03 911.3 20.795; 2061 23.28 911.3 20.795
701. 2062 23.58 911.3 20.795; 2063 23.88 911.3 20.795; 2064 24.12 911.3 20.795
702. 2065 24.42 911.3 20.795; 2066 24.72 911.3 20.795; 2067 24.97 911.3 20.795
703. 2068 25.22 911.3 20.795; 2069 25.47 911.3 20.795; 2070 25.87 911.3 20.795

704. 2071 26.17 911.3 20.795; 2072 26.47 911.3 20.795; 2073 26.77 911.3 20.795
705. 2074 21.23 911.3 21.095; 2075 21.53 911.3 21.095; 2076 21.83 911.3 21.095
706. 2077 22.13 911.3 21.095; 2078 22.53 911.3 21.095; 2079 22.78 911.3 21.095
707. 2080 23.03 911.3 21.095; 2081 23.28 911.3 21.095; 2082 23.58 911.3 21.095
708. 2083 23.88 911.3 21.095; 2084 24.12 911.3 21.095; 2085 24.42 911.3 21.095
709. 2086 24.72 911.3 21.095; 2087 24.97 911.3 21.095; 2088 25.22 911.3 21.095
710. 2089 25.47 911.3 21.095; 2090 25.87 911.3 21.095; 2091 26.17 911.3 21.095
711. 2092 26.47 911.3 21.095; 2093 26.77 911.3 21.095
712. MEMBER INCIDENCES
713. 1 138 1; 2 145 2; 3 152 3; 4 161 4; 5 172 5; 6 1094 6; 7 455 7; 8 464 8
714. 9 475 9; 10 1157 10; 11 563 11; 12 1736 12; 13 1751 13; 14 633 14; 15 640 15
715. 16 698 18; 17 796 21; 18 803 22; 19 891 25; 20 951 28; 21 1856 29; 22 1871 30
716. 23 969 31; 24 1034 32; 25 2036 33; 26 2051 34; 27 1332 35; 28 1064 36
717. 29 1455 37; 30 1613 38; 31 1461 39; 32 1476 40; 33 1237 41; 34 1252 42
718. ELEMENT INCIDENCES SHELL
719. 1000 71 72 17 16; 1001 72 73 19 17; 1002 73 74 20 19; 1003 74 75 23 20
720. 1004 75 76 24 23; 1005 76 77 26 24; 1006 78 79 43 27; 1007 79 80 44 43
721. 1008 80 81 45 44; 1009 81 82 46 45; 1010 82 83 47 46; 1011 83 84 48 47
722. 1012 113 114 50 49; 1013 114 115 51 50; 1014 115 116 52 51; 1015 116 117 53 52
723. 1016 117 118 54 53; 1017 118 119 55 54; 1018 119 120 56 55; 1019 120 121 57 56
724. 1020 121 122 58 57; 1021 122 123 59 58; 1022 124 125 61 60; 1023 125 126 62 61
725. 1024 126 127 63 62; 1025 127 128 64 63; 1026 128 129 65 64; 1027 129 130 66 65
726. 1028 130 131 67 66; 1029 131 132 68 67; 1030 132 133 69 68; 1031 133 134 70 69
727. 1032 92 93 72 71; 1033 93 94 73 72; 1034 94 95 74 73; 1035 95 96 75 74
728. 1036 96 97 76 75; 1037 97 98 77 76; 1038 99 100 79 78; 1039 100 101 80 79
729. 1040 101 102 81 80; 1041 102 103 82 81; 1042 103 104 83 82; 1043 104 105 84 83
730. 1044 106 107 86 85; 1045 107 108 87 86; 1046 108 109 88 87; 1047 109 110 89 88
731. 1048 110 111 90 89; 1049 111 112 91 90; 1050 135 136 93 92; 1051 136 137 94 93
732. 1052 137 138 95 94; 1053 138 139 96 95; 1054 139 140 97 96; 1055 140 141 98 97
733. 1056 142 143 100 99; 1057 143 144 101 100; 1058 144 145 102 101
734. 1059 145 146 103 102; 1060 146 147 104 103; 1061 147 148 105 104
735. 1062 149 150 107 106; 1063 150 151 108 107; 1064 151 152 109 108
736. 1065 152 153 110 109; 1066 153 154 111 110; 1067 154 155 112 111
737. 1068 156 157 114 113; 1069 157 158 115 114; 1070 158 159 116 115
738. 1071 159 160 117 116; 1072 160 161 118 117; 1073 161 162 119 118
739. 1074 162 163 120 119; 1075 163 164 121 120; 1076 164 165 122 121
740. 1077 165 166 123 122; 1078 167 168 125 124; 1079 168 169 126 125
741. 1080 169 170 127 126; 1081 170 171 128 127; 1082 171 172 129 128
742. 1083 172 173 130 129; 1084 173 174 131 130; 1085 174 175 132 131
743. 1086 175 176 133 132; 1087 176 177 134 133; 1088 178 179 136 135
744. 1089 179 180 137 136; 1090 180 181 138 137; 1091 181 182 139 138
745. 1092 182 183 140 139; 1093 183 184 141 140; 1094 185 186 143 142
746. 1095 186 187 144 143; 1096 187 188 145 144; 1097 188 189 146 145
747. 1098 189 190 147 146; 1099 190 191 148 147; 1100 192 193 150 149
748. 1101 193 194 151 150; 1102 194 195 152 151; 1103 195 196 153 152
749. 1104 196 197 154 153; 1105 197 198 155 154; 1106 199 200 157 156
750. 1107 200 201 158 157; 1108 201 202 159 158; 1109 202 203 160 159
751. 1110 203 204 161 160; 1111 204 205 162 161; 1112 205 206 163 162
752. 1113 206 207 164 163; 1114 207 208 165 164; 1115 208 209 166 165
753. 1116 210 211 168 167; 1117 211 212 169 168; 1118 212 213 170 169
754. 1119 213 214 171 170; 1120 214 215 172 171; 1121 215 216 173 172
755. 1122 216 217 174 173; 1123 217 218 175 174; 1124 218 219 176 175
756. 1125 219 220 177 176; 1126 221 222 179 178; 1127 222 223 180 179
757. 1128 223 224 181 180; 1129 224 225 182 181; 1130 225 226 183 182
758. 1131 226 227 184 183; 1132 228 229 186 185; 1133 229 230 187 186
759. 1134 230 231 188 187; 1135 231 232 189 188; 1136 232 233 190 189
760. 1137 233 234 191 190; 1138 235 236 193 192; 1139 236 237 194 193
761. 1140 237 238 195 194; 1141 238 239 196 195; 1142 239 240 197 196
762. 1143 240 241 198 197; 1144 242 243 200 199; 1145 243 244 201 200
763. 1146 244 245 202 201; 1147 245 246 203 202; 1148 246 247 204 203
764. 1149 247 248 205 204; 1150 248 249 206 205; 1151 249 250 207 206
765. 1152 250 251 208 207; 1153 251 252 209 208; 1154 253 254 211 210
766. 1155 254 255 212 211; 1156 255 256 213 212; 1157 256 257 214 213
767. 1158 257 258 215 214; 1159 258 259 216 215; 1160 259 260 217 216
768. 1161 260 261 218 217; 1162 261 262 219 218; 1163 262 263 220 219
769. 1164 264 265 222 221; 1165 265 266 223 222; 1166 266 267 224 223
770. 1167 267 268 225 224; 1168 268 269 226 225; 1169 269 270 227 226
771. 1170 271 272 229 228; 1171 272 273 230 229; 1172 273 274 231 230
772. 1173 274 275 232 231; 1174 275 276 233 232; 1175 276 277 234 233
773. 1176 278 279 236 235; 1177 279 280 237 236; 1178 280 281 238 237
774. 1179 281 282 239 238; 1180 282 283 240 239; 1181 283 284 241 240

776. 1185 288 289 246 245; 1186 289 290 247 246; 1187 290 291 248 247
777. 1188 291 292 249 248; 1189 292 293 250 249; 1190 293 294 251 250
778. 1191 294 295 252 251; 1192 296 297 254 253; 1193 297 298 255 254
779. 1194 298 299 256 255; 1195 299 300 257 256; 1196 300 301 258 257
780. 1197 301 302 259 258; 1198 302 303 260 259; 1199 303 304 261 260
781. 1200 304 305 262 261; 1201 305 306 263 262; 1202 307 308 279 278
782. 1203 308 309 280 279; 1204 309 310 281 280; 1205 310 311 282 281
783. 1206 311 312 283 282; 1207 312 313 284 283; 1208 314 315 286 285
784. 1209 315 316 287 286; 1210 316 317 288 287; 1211 317 318 289 288
785. 1212 318 319 290 289; 1213 319 320 291 290; 1214 320 321 292 291
786. 1215 321 322 293 292; 1216 322 323 294 293; 1217 323 324 295 294
787. 1218 325 326 297 296; 1219 326 327 298 297; 1220 327 328 299 298
788. 1221 328 329 300 299; 1222 329 330 301 300; 1223 330 331 302 301
789. 1224 331 332 303 302; 1225 332 333 304 303; 1226 333 334 305 304
790. 1227 334 335 306 305; 1228 336 337 308 307; 1229 337 338 309 308
791. 1230 338 339 310 309; 1231 339 340 311 310; 1232 340 341 312 311
792. 1233 341 342 313 312; 1234 343 344 315 314; 1235 344 345 316 315
793. 1236 345 346 317 316; 1237 346 347 318 317; 1238 347 348 319 318
794. 1239 348 349 320 319; 1240 349 350 321 320; 1241 350 351 322 321
795. 1242 351 352 323 322; 1243 352 353 324 323; 1244 354 355 326 325
796. 1245 355 356 327 326; 1246 356 357 328 327; 1247 357 358 329 328
797. 1248 358 359 330 329; 1249 359 360 331 330; 1250 360 361 332 331
798. 1251 361 362 333 332; 1252 362 363 334 333; 1253 363 364 335 334
799. 1254 365 366 337 336; 1255 366 367 338 337; 1256 367 368 339 338
800. 1257 368 369 340 339; 1258 369 370 341 340; 1259 370 371 342 341
801. 1260 372 373 344 343; 1261 373 374 345 344; 1262 374 375 346 345
802. 1263 375 376 347 346; 1264 376 377 348 347; 1265 377 378 349 348
803. 1266 378 379 350 349; 1267 379 380 351 350; 1268 380 381 352 351
804. 1269 381 382 353 352; 1270 383 384 355 354; 1271 384 385 356 355
805. 1272 385 386 357 356; 1273 386 387 358 357; 1274 387 388 359 358
806. 1275 388 389 360 359; 1276 389 390 361 360; 1277 390 391 362 361
807. 1278 391 392 363 362; 1279 392 393 364 363; 1280 394 395 373 372
808. 1281 395 396 374 373; 1282 396 397 375 374; 1283 397 398 376 375
809. 1284 398 399 377 376; 1285 399 400 378 377; 1286 400 401 379 378
810. 1287 401 402 380 379; 1288 402 403 381 380; 1289 403 404 382 381
811. 1290 405 406 384 383; 1291 406 407 385 384; 1292 407 408 386 385
812. 1293 408 409 387 386; 1294 409 410 388 387; 1295 410 411 389 388
813. 1296 411 412 390 389; 1297 412 413 391 390; 1298 413 414 392 391
814. 1299 414 415 393 392; 1300 416 417 366 365; 1301 417 418 367 366
815. 1302 418 419 368 367; 1303 419 420 369 368; 1304 420 421 370 369
816. 1305 421 422 371 370; 1306 430 431 395 394; 1307 431 432 396 395
817. 1308 432 433 397 396; 1309 433 434 398 397; 1310 434 435 399 398
818. 1311 435 436 400 399; 1312 436 437 401 400; 1313 437 438 402 401
819. 1314 438 439 403 402; 1315 439 440 404 403; 1316 441 442 406 405
820. 1317 442 443 407 406; 1318 443 444 408 407; 1319 444 445 409 408
821. 1320 445 446 410 409; 1321 446 447 411 410; 1322 447 448 412 411
822. 1323 448 449 413 412; 1324 449 450 414 413; 1325 450 451 415 414
823. 1326 423 424 417 416; 1327 424 425 418 417; 1328 425 426 419 418
824. 1329 426 427 420 419; 1330 427 428 421 420; 1331 428 429 422 421
825. 1332 452 453 424 423; 1333 453 454 425 424; 1334 454 455 426 425
826. 1335 455 456 427 426; 1336 456 457 428 427; 1337 457 458 429 428
827. 1338 459 460 431 430; 1339 460 461 432 431; 1340 461 462 433 432
828. 1341 462 463 434 433; 1342 463 464 435 434; 1343 464 465 436 435
829. 1344 465 466 437 436; 1345 466 467 438 437; 1346 467 468 439 438
830. 1347 468 469 440 439; 1348 470 471 442 441; 1349 471 472 443 442
831. 1350 472 473 444 443; 1351 473 474 445 444; 1352 474 475 446 445
832. 1353 475 476 447 446; 1354 476 477 448 447; 1355 477 478 449 448
833. 1356 478 479 450 449; 1357 479 480 451 450; 1358 481 482 453 452
834. 1359 482 483 454 453; 1360 483 484 455 454; 1361 484 485 456 455
835. 1362 485 486 457 456; 1363 486 487 458 457; 1364 488 489 460 459
836. 1365 489 490 461 460; 1366 490 491 462 461; 1367 491 492 463 462
837. 1368 492 493 464 463; 1369 493 494 465 464; 1370 494 495 466 465
838. 1371 495 496 467 466; 1372 496 497 468 467; 1373 497 498 469 468
839. 1374 499 500 471 470; 1375 500 501 472 471; 1376 501 502 473 472
840. 1377 502 503 474 473; 1378 503 504 475 474; 1379 504 505 476 475
841. 1380 505 506 477 476; 1381 506 507 478 477; 1382 507 508 479 478
842. 1383 508 509 480 479; 1384 510 511 482 481; 1385 511 512 483 482
843. 1386 512 513 484 483; 1387 513 514 485 484; 1388 514 515 486 485
844. 1389 515 516 487 486; 1390 517 518 489 488; 1391 518 519 490 489
845. 1392 519 520 491 490; 1393 520 521 492 491; 1394 521 522 493 492
846. 1395 522 523 494 493; 1396 523 524 495 494; 1397 524 525 496 495
847. 1398 525 526 497 496; 1399 526 527 498 497; 1400 528 529 500 499

848. 1401 529 530 501 500; 1402 530 531 502 501; 1403 531 532 503 502
849. 1404 532 533 504 503; 1405 533 534 505 504; 1406 534 535 506 505
850. 1407 535 536 507 506; 1408 536 537 508 507; 1409 537 538 509 508
851. 1410 546 547 540 539; 1411 547 548 541 540; 1412 548 549 542 541
852. 1413 549 550 543 542; 1414 550 551 544 543; 1415 551 552 545 544
853. 1416 553 554 547 546; 1417 554 555 548 547; 1418 555 556 549 548
854. 1419 556 557 550 549; 1420 557 558 551 550; 1421 558 559 552 551
855. 1422 560 561 554 553; 1423 561 562 555 554; 1424 562 563 556 555
856. 1425 563 564 557 556; 1426 564 565 558 557; 1427 565 566 559 558
857. 1428 567 568 561 560; 1429 568 569 562 561; 1430 569 570 563 562
858. 1431 570 571 564 563; 1432 571 572 565 564; 1433 572 573 566 565
859. 1434 574 575 568 567; 1435 575 576 569 568; 1436 576 577 570 569
860. 1437 577 578 571 570; 1438 578 579 572 571; 1439 579 580 573 572
861. 1440 595 596 575 574; 1441 596 597 576 575; 1442 597 598 577 576
862. 1443 598 599 578 577; 1444 599 600 579 578; 1445 600 601 580 579
863. 1446 602 603 582 581; 1447 603 604 583 582; 1448 604 605 584 583
864. 1449 605 606 585 584; 1450 606 607 586 585; 1451 607 608 587 586
865. 1452 609 610 589 588; 1453 610 611 590 589; 1454 611 612 591 590
866. 1455 612 613 592 591; 1456 613 614 593 592; 1457 614 615 594 593
867. 1458 616 617 603 602; 1459 617 618 604 603; 1460 618 619 605 604
868. 1461 619 620 606 605; 1462 620 621 607 606; 1463 621 622 608 607
869. 1464 623 624 610 609; 1465 624 625 611 610; 1466 625 626 612 611
870. 1467 626 627 613 612; 1468 627 628 614 613; 1469 628 629 615 614
871. 1470 630 631 617 616; 1471 631 632 618 617; 1472 632 633 619 618
872. 1473 633 634 620 619; 1474 634 635 621 620; 1475 635 636 622 621
873. 1476 637 638 624 623; 1477 638 639 625 624; 1478 639 640 626 625
874. 1479 640 641 627 626; 1480 641 642 628 627; 1481 642 643 629 628
875. 1482 644 645 631 630; 1483 645 646 632 631; 1484 646 647 633 632
876. 1485 647 648 634 633; 1486 648 649 635 634; 1487 649 650 636 635
877. 1488 651 652 638 637; 1489 652 653 639 638; 1490 653 654 640 639
878. 1491 654 655 641 640; 1492 655 656 642 641; 1493 656 657 643 642
879. 1494 658 659 645 644; 1495 659 660 646 645; 1496 660 661 647 646
880. 1497 661 662 648 647; 1498 662 663 649 648; 1499 663 664 650 649
881. 1500 665 666 652 651; 1501 666 667 653 652; 1502 667 668 654 653
882. 1503 668 669 655 654; 1504 669 670 656 655; 1505 670 671 657 656
883. 1506 672 673 659 658; 1507 673 674 660 659; 1508 674 675 661 660
884. 1509 675 676 662 661; 1510 676 677 663 662; 1511 677 678 664 663
885. 1512 679 680 666 665; 1513 680 681 667 666; 1514 681 682 668 667
886. 1515 682 683 669 668; 1516 683 684 670 669; 1517 684 685 671 670
887. 1518 691 692 687 686; 1519 692 693 688 687; 1520 693 694 689 688
888. 1521 694 695 690 689; 1522 696 697 692 691; 1523 697 698 693 692
889. 1524 698 699 694 693; 1525 699 700 695 694; 1526 701 702 697 696
890. 1527 702 703 698 697; 1528 703 704 699 698; 1529 704 705 700 699
891. 1530 706 707 702 701; 1531 707 708 703 702; 1532 708 709 704 703
892. 1533 709 710 705 704; 1534 711 712 707 706; 1535 712 713 708 707
893. 1536 713 714 709 708; 1537 714 715 710 709; 1538 716 717 712 711
894. 1539 717 718 713 712; 1540 718 719 714 713; 1541 719 720 715 714
895. 1542 721 722 717 716; 1543 722 723 718 717; 1544 723 724 719 718
896. 1545 724 725 720 719; 1546 726 727 722 721; 1547 727 728 723 722
897. 1548 728 729 724 723; 1549 729 730 725 724; 1550 731 732 727 726
898. 1551 732 733 728 727; 1552 733 734 729 728; 1553 734 735 730 729
899. 1554 750 751 732 731; 1555 751 752 733 732; 1556 752 753 734 733
900. 1557 753 754 735 734; 1558 755 756 737 736; 1559 756 757 738 737
901. 1560 757 758 739 738; 1561 758 759 740 739; 1562 759 760 741 740
902. 1563 760 761 742 741; 1564 762 763 744 743; 1565 763 764 745 744
903. 1566 764 765 746 745; 1567 765 766 747 746; 1568 766 767 748 747
904. 1569 767 768 749 748; 1570 769 770 751 750; 1571 770 771 752 751
905. 1572 771 772 753 752; 1573 772 773 754 753; 1574 774 775 756 755
906. 1575 775 776 757 756; 1576 776 777 758 757; 1577 777 778 759 758
907. 1578 778 779 760 759; 1579 779 780 761 760; 1580 781 782 763 762
908. 1581 782 783 764 763; 1582 783 784 765 764; 1583 784 785 766 765
909. 1584 785 786 767 766; 1585 786 787 768 767; 1586 788 789 770 769
910. 1587 789 790 771 770; 1588 790 791 772 771; 1589 791 792 773 772
911. 1590 793 794 775 774; 1591 794 795 776 775; 1592 795 796 777 776
912. 1593 796 797 778 777; 1594 797 798 779 778; 1595 798 799 780 779
913. 1596 800 801 782 781; 1597 801 802 783 782; 1598 802 803 784 783
914. 1599 803 804 785 784; 1600 804 805 786 785; 1601 805 806 787 786
915. 1602 807 808 789 788; 1603 808 809 790 789; 1604 809 810 791 790
916. 1605 810 811 792 791; 1606 812 813 794 793; 1607 813 814 795 794
917. 1608 814 815 796 795; 1609 815 816 797 796; 1610 816 817 798 797
918. 1611 817 818 799 798; 1612 819 820 801 800; 1613 820 821 802 801
919. 1614 821 822 803 802; 1615 822 823 804 803; 1616 823 824 805 804

920. 1617 824 825 806 805; 1618 826 827 808 807; 1619 827 828 809 808
921. 1620 828 829 810 809; 1621 829 830 811 810; 1622 831 832 813 812
922. 1623 832 833 814 813; 1624 833 834 815 814; 1625 834 835 816 815
923. 1626 835 836 817 816; 1627 836 837 818 817; 1628 838 839 820 819
924. 1629 839 840 821 820; 1630 840 841 822 821; 1631 841 842 823 822
925. 1632 842 843 824 823; 1633 843 844 825 824; 1634 845 846 827 826
926. 1635 846 847 828 827; 1636 847 848 829 828; 1637 848 849 830 829
927. 1638 850 851 832 831; 1639 851 852 833 832; 1640 852 853 834 833
928. 1641 853 854 835 834; 1642 854 855 836 835; 1643 855 856 837 836
929. 1644 857 858 839 838; 1645 858 859 840 839; 1646 859 860 841 840
930. 1647 860 861 842 841; 1648 861 862 843 842; 1649 862 863 844 843
931. 1650 864 865 846 845; 1651 865 866 847 846; 1652 866 867 848 847
932. 1653 867 868 849 848; 1654 869 870 865 864; 1655 870 871 866 865
933. 1656 871 872 867 866; 1657 872 873 868 867; 1658 874 875 870 869
934. 1659 875 876 871 870; 1660 876 877 872 871; 1661 877 878 873 872
935. 1662 879 880 875 874; 1663 880 881 876 875; 1664 881 882 877 876
936. 1665 882 883 878 877; 1666 884 885 880 879; 1667 885 886 881 880
937. 1668 886 887 882 881; 1669 887 888 883 882; 1670 889 890 885 884
938. 1671 890 891 886 885; 1672 891 892 887 886; 1673 892 893 888 887
939. 1674 894 895 890 889; 1675 895 896 891 890; 1676 896 897 892 891
940. 1677 897 898 893 892; 1678 899 900 895 894; 1679 900 901 896 895
941. 1680 901 902 897 896; 1681 902 903 898 897; 1682 904 905 900 899
942. 1683 905 906 901 900; 1684 906 907 902 901; 1685 907 908 903 902
943. 1686 909 910 905 904; 1687 910 911 906 905; 1688 911 912 907 906
944. 1689 912 913 908 907; 1690 914 915 910 909; 1691 915 916 911 910
945. 1692 916 917 912 911; 1693 917 918 913 912; 1694 919 920 915 914
946. 1695 920 921 916 915; 1696 921 922 917 916; 1697 922 923 918 917
947. 1698 931 932 920 919; 1699 932 933 921 920; 1700 933 934 922 921
948. 1701 934 935 923 922; 1702 936 937 925 924; 1703 937 938 926 925
949. 1704 938 939 927 926; 1705 939 940 928 927; 1706 940 941 929 928
950. 1707 941 942 930 929; 1708 943 944 932 931; 1709 944 945 933 932
951. 1710 945 946 934 933; 1711 946 947 935 934; 1712 948 949 937 936
952. 1713 949 950 938 937; 1714 950 951 939 938; 1715 951 952 940 939
953. 1716 952 953 941 940; 1717 953 954 942 941; 1718 955 956 944 943
954. 1719 956 957 945 944; 1720 957 958 946 945; 1721 958 959 947 946
955. 1722 960 961 949 948; 1723 961 962 950 949; 1724 962 963 951 950
956. 1725 963 964 952 951; 1726 964 965 953 952; 1727 965 966 954 953
957. 1728 967 968 956 955; 1729 968 969 957 956; 1730 969 970 958 957
958. 1731 970 971 959 958; 1732 972 973 961 960; 1733 973 974 962 961
959. 1734 974 975 963 962; 1735 975 976 964 963; 1736 976 977 965 964
960. 1737 977 978 966 965; 1738 979 980 968 967; 1739 980 981 969 968
961. 1740 981 982 970 969; 1741 982 983 971 970; 1742 989 990 973 972
962. 1743 990 991 974 973; 1744 991 992 975 974; 1745 992 993 976 975
963. 1746 993 994 977 976; 1747 994 995 978 977; 1748 984 985 980 979
964. 1749 985 986 981 980; 1750 986 987 982 981; 1751 987 988 983 982
965. 1752 996 997 990 989; 1753 997 998 991 990; 1754 998 999 992 991
966. 1755 999 1000 993 992; 1756 1000 1001 994 993; 1757 1001 1002 995 994
967. 1758 1003 1004 997 996; 1759 1004 1005 998 997; 1760 1005 1006 999 998
968. 1761 1006 1007 1000 999; 1762 1007 1008 1001 1000; 1763 1008 1009 1002 1001
969. 1764 1010 1011 1004 1003; 1765 1011 1012 1005 1004; 1766 1012 1013 1006 1005
970. 1767 1013 1014 1007 1006; 1768 1014 1015 1008 1007; 1769 1015 1016 1009 1008
971. 1770 1017 1018 1011 1010; 1771 1018 1019 1012 1011; 1772 1019 1020 1013 1012
972. 1773 1020 1021 1014 1013; 1774 1021 1022 1015 1014; 1775 1022 1023 1016 1015
973. 1776 1024 1025 1018 1017; 1777 1025 1026 1019 1018; 1778 1026 1027 1020 1019
974. 1779 1027 1028 1021 1020; 1780 1028 1029 1022 1021; 1781 1029 1030 1023 1022
975. 1782 1031 1032 1025 1024; 1783 1032 1033 1026 1025; 1784 1033 1034 1027 1026
976. 1785 1034 1035 1028 1027; 1786 1035 1036 1029 1028; 1787 1036 1037 1030 1029
977. 1788 1038 1039 1032 1031; 1789 1039 1040 1033 1032; 1790 1040 1041 1034 1033
978. 1791 1041 1042 1035 1034; 1792 1042 1043 1036 1035; 1793 1043 1044 1037 1036
979. 1794 1045 1046 1039 1038; 1795 1046 1047 1040 1039; 1796 1047 1048 1041 1040
980. 1797 1048 1049 1042 1041; 1798 1049 1050 1043 1042; 1799 1050 1051 1044 1043
981. 1800 1057 1058 1053 1052; 1801 1058 1059 1054 1053; 1802 1059 1060 1055 1054
982. 1803 1060 1061 1056 1055; 1804 1062 1063 1058 1057; 1805 1063 1064 1059 1058
983. 1806 1064 1065 1060 1059; 1807 1065 1066 1061 1060; 1808 1067 1068 1063 1062
984. 1809 1068 1069 1064 1063; 1810 1069 1070 1065 1064; 1811 1070 1071 1066 1065
985. 1812 1072 1073 1068 1067; 1813 1073 1074 1069 1068; 1814 1074 1075 1070 1069
986. 1815 1075 1076 1071 1070; 1816 1084 1085 1078 1077; 1817 1085 1086 1079 1078
987. 1818 1086 1087 1080 1079; 1819 1087 1088 1081 1080; 1820 1088 1089 1082 1081
988. 1821 1089 1090 1083 1082; 1822 1091 1092 1085 1084; 1823 1092 1093 1086 1085
989. 1824 1093 1094 1087 1086; 1825 1094 1095 1088 1087; 1826 1095 1096 1089 1088
990. 1827 1096 1097 1090 1089; 1828 1098 1099 1092 1091; 1829 1099 1100 1093 1092

992. 1833 1103 1104 1097 1096; 1834 1105 1106 1099 1098; 1835 1106 1107 1100 1099
993. 1836 1107 1108 1101 1100; 1837 1108 1109 1102 1101; 1838 1109 1110 1103 1102
994. 1839 1110 1111 1104 1103; 1840 1112 1113 1106 1105; 1841 1113 1114 1107 1106
995. 1842 1114 1115 1108 1107; 1843 1115 1116 1109 1108; 1844 1116 1117 1110 1109
996. 1845 1117 1118 1111 1110; 1846 1119 1120 1113 1112; 1847 1120 1121 1114 1113
997. 1848 1121 1122 1115 1114; 1849 1122 1123 1116 1115; 1850 1123 1124 1117 1116
998. 1851 1124 1125 1118 1117; 1852 1126 1127 1120 1119; 1853 1127 1128 1121 1120
999. 1854 1128 1129 1122 1121; 1855 1129 1130 1123 1122; 1856 1130 1131 1124 1123
1000. 1857 1131 1132 1125 1124; 1858 1133 1134 1127 1126; 1859 1134 1135 1128 1127
1001. 1860 1135 1136 1129 1128; 1861 1136 1137 1130 1129; 1862 1137 1138 1131 1130
1002. 1863 1138 1139 1132 1131; 1864 1140 1141 1134 1133; 1865 1141 1142 1135 1134
1003. 1866 1142 1143 1136 1135; 1867 1143 1144 1137 1136; 1868 1144 1145 1138 1137
1004. 1869 1145 1146 1139 1138; 1870 1147 1148 1141 1140; 1871 1148 1149 1142 1141
1005. 1872 1149 1150 1143 1142; 1873 1150 1151 1144 1143; 1874 1151 1152 1145 1144
1006. 1875 1152 1153 1146 1145; 1876 1154 1155 1148 1147; 1877 1155 1156 1149 1148
1007. 1878 1156 1157 1150 1149; 1879 1157 1158 1151 1150; 1880 1158 1159 1152 1151
1008. 1881 1159 1160 1153 1152; 1882 1161 1162 1155 1154; 1883 1162 1163 1156 1155
1009. 1884 1163 1164 1157 1156; 1885 1164 1165 1158 1157; 1886 1165 1166 1159 1158
1010. 1887 1166 1167 1160 1159; 1888 1168 1169 1162 1161; 1889 1169 1170 1163 1162
1011. 1890 1170 1171 1164 1163; 1891 1171 1172 1165 1164; 1892 1172 1173 1166 1165
1012. 1893 1173 1174 1167 1166; 1894 1195 1196 1176 1175; 1895 1196 1197 1177 1176
1013. 1896 1197 1198 1178 1177; 1897 1198 1199 1179 1178; 1898 1199 1200 1180 1179
1014. 1899 1200 1201 1181 1180; 1900 1201 1202 1182 1181; 1901 1202 1203 1183 1182
1015. 1902 1203 1204 1184 1183; 1903 1204 1205 1185 1184; 1904 1205 1206 1186 1185
1016. 1905 1206 1207 1187 1186; 1906 1207 1208 1188 1187; 1907 1208 1209 1189 1188
1017. 1908 1209 1210 1190 1189; 1909 1210 1211 1191 1190; 1910 1211 1212 1192 1191
1018. 1911 1212 1213 1193 1192; 1912 1213 1214 1194 1193; 1913 1215 1216 1196 1195
1019. 1914 1216 1217 1197 1196; 1915 1217 1218 1198 1197; 1916 1218 1219 1199 1198
1020. 1917 1219 1220 1200 1199; 1918 1220 1221 1201 1200; 1919 1221 1222 1202 1201
1021. 1920 1222 1223 1203 1202; 1921 1223 1224 1204 1203; 1922 1224 1225 1205 1204
1022. 1923 1225 1226 1206 1205; 1924 1226 1227 1207 1206; 1925 1227 1228 1208 1207
1023. 1926 1228 1229 1209 1208; 1927 1229 1230 1210 1209; 1928 1230 1231 1211 1210
1024. 1929 1231 1232 1212 1211; 1930 1232 1233 1213 1212; 1931 1233 1234 1214 1213
1025. 1932 1235 1236 1216 1215; 1933 1236 1237 1217 1216; 1934 1237 1238 1218 1217
1026. 1935 1238 1239 1219 1218; 1936 1239 1240 1220 1219; 1937 1240 1241 1221 1220
1027. 1938 1241 1242 1222 1221; 1939 1242 1243 1223 1222; 1940 1243 1244 1224 1223
1028. 1941 1244 1245 1225 1224; 1942 1245 1246 1226 1225; 1943 1246 1247 1227 1226
1029. 1944 1247 1248 1228 1227; 1945 1248 1249 1229 1228; 1946 1249 1250 1230 1229
1030. 1947 1250 1251 1231 1230; 1948 1251 1252 1232 1231; 1949 1252 1253 1233 1232
1031. 1950 1253 1254 1234 1233; 1951 1255 1256 1236 1235; 1952 1256 1257 1237 1236
1032. 1953 1257 1258 1238 1237; 1954 1258 1259 1239 1238; 1955 1259 1260 1240 1239
1033. 1956 1260 1261 1241 1240; 1957 1261 1262 1242 1241; 1958 1262 1263 1243 1242
1034. 1959 1263 1264 1244 1243; 1960 1264 1265 1245 1244; 1961 1265 1266 1246 1245
1035. 1962 1266 1267 1247 1246; 1963 1267 1268 1248 1247; 1964 1268 1269 1249 1248
1036. 1965 1269 1270 1250 1249; 1966 1270 1271 1251 1250; 1967 1271 1272 1252 1251
1037. 1968 1272 1273 1253 1252; 1969 1273 1274 1254 1253; 1970 1275 1276 1256 1255
1038. 1971 1276 1277 1257 1256; 1972 1277 1278 1258 1257; 1973 1278 1279 1259 1258
1039. 1974 1279 1280 1260 1259; 1975 1280 1281 1261 1260; 1976 1281 1282 1262 1261
1040. 1977 1282 1283 1263 1262; 1978 1283 1284 1264 1263; 1979 1284 1285 1265 1264
1041. 1980 1285 1286 1266 1265; 1981 1286 1287 1267 1266; 1982 1287 1288 1268 1267
1042. 1983 1288 1289 1269 1268; 1984 1289 1290 1270 1269; 1985 1290 1291 1271 1270
1043. 1986 1291 1292 1272 1271; 1987 1292 1293 1273 1272; 1988 1293 1294 1274 1273
1044. 1989 1295 1296 1276 1275; 1990 1296 1297 1277 1276; 1991 1297 1298 1278 1277
1045. 1992 1298 1299 1279 1278; 1993 1299 1300 1280 1279; 1994 1300 1301 1281 1280
1046. 1995 1301 1302 1282 1281; 1996 1302 1303 1283 1282; 1997 1303 1304 1284 1283
1047. 1998 1304 1305 1285 1284; 1999 1305 1306 1286 1285; 2000 1306 1307 1287 1286
1048. 2001 1307 1308 1288 1287; 2002 1308 1309 1289 1288; 2003 1309 1310 1290 1289
1049. 2004 1310 1311 1291 1290; 2005 1311 1312 1292 1291; 2006 1312 1313 1293 1292
1050. 2007 1313 1314 1294 1293; 2008 1322 1323 1316 1315; 2009 1323 1324 1317 1316
1051. 2010 1324 1325 1318 1317; 2011 1325 1326 1319 1318; 2012 1326 1327 1320 1319
1052. 2013 1327 1328 1321 1320; 2014 1329 1330 1323 1322; 2015 1330 1331 1324 1323
1053. 2016 1331 1332 1325 1324; 2017 1332 1333 1326 1325; 2018 1333 1334 1327 1326
1054. 2019 1334 1335 1328 1327; 2020 1336 1337 1330 1329; 2021 1337 1338 1331 1330
1055. 2022 1338 1339 1332 1331; 2023 1339 1340 1333 1332; 2024 1340 1341 1334 1333
1056. 2025 1341 1342 1335 1334; 2026 1343 1344 1337 1336; 2027 1344 1345 1338 1337
1057. 2028 1345 1346 1339 1338; 2029 1346 1347 1340 1339; 2030 1347 1348 1341 1340
1058. 2031 1348 1349 1342 1341; 2032 1350 1351 1344 1343; 2033 1351 1352 1345 1344
1059. 2034 1352 1353 1346 1345; 2035 1353 1354 1347 1346; 2036 1354 1355 1348 1347
1060. 2037 1355 1356 1349 1348; 2038 1357 1358 1351 1350; 2039 1358 1359 1352 1351
1061. 2040 1359 1360 1353 1352; 2041 1360 1361 1354 1353; 2042 1361 1362 1355 1354
1062. 2043 1362 1363 1356 1355; 2044 1364 1365 1358 1357; 2045 1365 1366 1359 1358
1063. 2046 1366 1367 1360 1359; 2047 1367 1368 1361 1360; 2048 1368 1369 1362 1361

1064. 2049 1369 1370 1363 1362; 2050 1391 1392 1365 1364; 2051 1392 1393 1366 1365
1065. 2052 1393 1394 1367 1366; 2053 1394 1395 1368 1367; 2054 1395 1396 1369 1368
1066. 2055 1396 1397 1370 1369; 2056 1405 1406 1372 1371; 2057 1406 1407 1373 1372
1067. 2058 1407 1408 1374 1373; 2059 1408 1409 1375 1374; 2060 1409 1410 1376 1375
1068. 2061 1410 1411 1377 1376; 2062 1411 1412 1378 1377; 2063 1412 1413 1379 1378
1069. 2064 1413 1414 1380 1379; 2065 1414 1415 1381 1380; 2066 1415 1416 1382 1381
1070. 2067 1416 1417 1383 1382; 2068 1417 1418 1384 1383; 2069 1418 1419 1385 1384
1071. 2070 1419 1420 1386 1385; 2071 1420 1421 1387 1386; 2072 1421 1422 1388 1387
1072. 2073 1422 1423 1389 1388; 2074 1423 1424 1390 1389; 2075 1398 1399 1392 1391
1073. 2076 1399 1400 1393 1392; 2077 1400 1401 1394 1393; 2078 1401 1402 1395 1394
1074. 2079 1402 1403 1396 1395; 2080 1403 1404 1397 1396; 2081 1425 1426 1399 1398
1075. 2082 1426 1427 1400 1399; 2083 1427 1428 1401 1400; 2084 1428 1429 1402 1401
1076. 2085 1429 1430 1403 1402; 2086 1430 1431 1404 1403; 2087 1432 1433 1406 1405
1077. 2088 1433 1434 1407 1406; 2089 1434 1435 1408 1407; 2090 1435 1436 1409 1408
1078. 2091 1436 1437 1410 1409; 2092 1437 1438 1411 1410; 2093 1438 1439 1412 1411
1079. 2094 1439 1440 1413 1412; 2095 1440 1441 1414 1413; 2096 1441 1442 1415 1414
1080. 2097 1442 1443 1416 1415; 2098 1443 1444 1417 1416; 2099 1444 1445 1418 1417
1081. 2100 1445 1446 1419 1418; 2101 1446 1447 1420 1419; 2102 1447 1448 1421 1420
1082. 2103 1448 1449 1422 1421; 2104 1449 1450 1423 1422; 2105 1450 1451 1424 1423
1083. 2106 1452 1453 1426 1425; 2107 1453 1454 1427 1426; 2108 1454 1455 1428 1427
1084. 2109 1455 1456 1429 1428; 2110 1456 1457 1430 1429; 2111 1457 1458 1431 1430
1085. 2112 1459 1460 1433 1432; 2113 1460 1461 1434 1433; 2114 1461 1462 1435 1434
1086. 2115 1462 1463 1436 1435; 2116 1463 1464 1437 1436; 2117 1464 1465 1438 1437
1087. 2118 1465 1466 1439 1438; 2119 1466 1467 1440 1439; 2120 1467 1468 1441 1440
1088. 2121 1468 1469 1442 1441; 2122 1469 1470 1443 1442; 2123 1470 1471 1444 1443
1089. 2124 1471 1472 1445 1444; 2125 1472 1473 1446 1445; 2126 1473 1474 1447 1446
1090. 2127 1474 1475 1448 1447; 2128 1475 1476 1449 1448; 2129 1476 1477 1450 1449
1091. 2130 1477 1478 1451 1450; 2131 1479 1480 1453 1452; 2132 1480 1481 1454 1453
1092. 2133 1481 1482 1455 1454; 2134 1482 1483 1456 1455; 2135 1483 1484 1457 1456
1093. 2136 1484 1485 1458 1457; 2137 1486 1487 1460 1459; 2138 1487 1488 1461 1460
1094. 2139 1488 1489 1462 1461; 2140 1489 1490 1463 1462; 2141 1490 1491 1464 1463
1095. 2142 1491 1492 1465 1464; 2143 1492 1493 1466 1465; 2144 1493 1494 1467 1466
1096. 2145 1494 1495 1468 1467; 2146 1495 1496 1469 1468; 2147 1496 1497 1470 1469
1097. 2148 1497 1498 1471 1470; 2149 1498 1499 1472 1471; 2150 1499 1500 1473 1472
1098. 2151 1500 1501 1474 1473; 2152 1501 1502 1475 1474; 2153 1502 1503 1476 1475
1099. 2154 1503 1504 1477 1476; 2155 1504 1505 1478 1477; 2156 1506 1507 1480 1479
1100. 2157 1507 1508 1481 1480; 2158 1508 1509 1482 1481; 2159 1509 1510 1483 1482
1101. 2160 1510 1511 1484 1483; 2161 1511 1512 1485 1484; 2162 1513 1514 1487 1486
1102. 2163 1514 1515 1488 1487; 2164 1515 1516 1489 1488; 2165 1516 1517 1490 1489
1103. 2166 1517 1518 1491 1490; 2167 1518 1519 1492 1491; 2168 1519 1520 1493 1492
1104. 2169 1520 1521 1494 1493; 2170 1521 1522 1495 1494; 2171 1522 1523 1496 1495
1105. 2172 1523 1524 1497 1496; 2173 1524 1525 1498 1497; 2174 1525 1526 1499 1498
1106. 2175 1526 1527 1500 1499; 2176 1527 1528 1501 1500; 2177 1528 1529 1502 1501
1107. 2178 1529 1530 1503 1502; 2179 1530 1531 1504 1503; 2180 1531 1532 1505 1504
1108. 2181 1533 1534 1514 1513; 2182 1534 1535 1515 1514; 2183 1535 1536 1516 1515
1109. 2184 1536 1537 1517 1516; 2185 1537 1538 1518 1517; 2186 1538 1539 1519 1518
1110. 2187 1539 1540 1520 1519; 2188 1540 1541 1521 1520; 2189 1541 1542 1522 1521
1111. 2190 1542 1543 1523 1522; 2191 1543 1544 1524 1523; 2192 1544 1545 1525 1524
1112. 2193 1545 1546 1526 1525; 2194 1546 1547 1527 1526; 2195 1547 1548 1528 1527
1113. 2196 1548 1549 1529 1528; 2197 1549 1550 1530 1529; 2198 1550 1551 1531 1530
1114. 2199 1551 1552 1532 1531; 2200 1564 1565 1554 1553; 2201 1565 1566 1555 1554
1115. 2202 1566 1567 1556 1555; 2203 1567 1568 1557 1556; 2204 1568 1569 1558 1557
1116. 2205 1569 1570 1559 1558; 2206 1570 1571 1560 1559; 2207 1571 1572 1561 1560
1117. 2208 1572 1573 1562 1561; 2209 1573 1574 1563 1562; 2210 1575 1576 1565 1564
1118. 2211 1576 1577 1566 1565; 2212 1577 1578 1567 1566; 2213 1578 1579 1568 1567
1119. 2214 1579 1580 1569 1568; 2215 1580 1581 1570 1569; 2216 1581 1582 1571 1570
1120. 2217 1582 1583 1572 1571; 2218 1583 1584 1573 1572; 2219 1584 1585 1574 1573
1121. 2220 1586 1587 1576 1575; 2221 1587 1588 1577 1576; 2222 1588 1589 1578 1577
1122. 2223 1589 1590 1579 1578; 2224 1590 1591 1580 1579; 2225 1591 1592 1581 1580
1123. 2226 1592 1593 1582 1581; 2227 1593 1594 1583 1582; 2228 1594 1595 1584 1583
1124. 2229 1595 1596 1585 1584; 2230 1597 1598 1587 1586; 2231 1598 1599 1588 1587
1125. 2232 1599 1600 1589 1588; 2233 1600 1601 1590 1589; 2234 1601 1602 1591 1590
1126. 2235 1602 1603 1592 1591; 2236 1603 1604 1593 1592; 2237 1604 1605 1594 1593
1127. 2238 1605 1606 1595 1594; 2239 1606 1607 1596 1595; 2240 1608 1609 1598 1597
1128. 2241 1609 1610 1599 1598; 2242 1610 1611 1600 1599; 2243 1611 1612 1601 1600
1129. 2244 1612 1613 1602 1601; 2245 1613 1614 1603 1602; 2246 1614 1615 1604 1603
1130. 2247 1615 1616 1605 1604; 2248 1616 1617 1606 1605; 2249 1617 1618 1607 1606
1131. 2250 1619 1620 1609 1608; 2251 1620 1621 1610 1609; 2252 1621 1622 1611 1610
1132. 2253 1622 1623 1612 1611; 2254 1623 1624 1613 1612; 2255 1624 1625 1614 1613
1133. 2256 1625 1626 1615 1614; 2257 1626 1627 1616 1615; 2258 1627 1628 1617 1616
1134. 2259 1628 1629 1618 1617; 2260 1630 1631 1620 1619; 2261 1631 1632 1621 1620
1135. 2262 1632 1633 1622 1621; 2263 1633 1634 1623 1622; 2264 1634 1635 1624 1623

1136. 2265 1635 1636 1625 1624; 2266 1636 1637 1626 1625; 2267 1637 1638 1627 1626
1137. 2268 1638 1639 1628 1627; 2269 1639 1640 1629 1628; 2270 1641 1642 1631 1630
1138. 2271 1642 1643 1632 1631; 2272 1643 1644 1633 1632; 2273 1644 1645 1634 1633
1139. 2274 1645 1646 1635 1634; 2275 1646 1647 1636 1635; 2276 1647 1648 1637 1636
1140. 2277 1648 1649 1638 1637; 2278 1649 1650 1639 1638; 2279 1650 1651 1640 1639
1141. 2280 1652 1653 1642 1641; 2281 1653 1654 1643 1642; 2282 1654 1655 1644 1643
1142. 2283 1655 1656 1645 1644; 2284 1656 1657 1646 1645; 2285 1657 1658 1647 1646
1143. 2286 1658 1659 1648 1647; 2287 1659 1660 1649 1648; 2288 1660 1661 1650 1649
1144. 2289 1661 1662 1651 1650; 2290 1663 1664 1653 1652; 2291 1664 1665 1654 1653
1145. 2292 1665 1666 1655 1654; 2293 1666 1667 1656 1655; 2294 1667 1668 1657 1656
1146. 2295 1668 1669 1658 1657; 2296 1669 1670 1659 1658; 2297 1670 1671 1660 1659
1147. 2298 1671 1672 1661 1660; 2299 1672 1673 1662 1661; 2300 1694 1695 1675 1674
1148. 2301 1695 1696 1676 1675; 2302 1696 1697 1677 1676; 2303 1697 1698 1678 1677
1149. 2304 1698 1699 1679 1678; 2305 1699 1700 1680 1679; 2306 1700 1701 1681 1680
1150. 2307 1701 1702 1682 1681; 2308 1702 1703 1683 1682; 2309 1703 1704 1684 1683
1151. 2310 1704 1705 1685 1684; 2311 1705 1706 1686 1685; 2312 1706 1707 1687 1686
1152. 2313 1707 1708 1688 1687; 2314 1708 1709 1689 1688; 2315 1709 1710 1690 1689
1153. 2316 1710 1711 1691 1690; 2317 1711 1712 1692 1691; 2318 1712 1713 1693 1692
1154. 2319 1714 1715 1695 1694; 2320 1715 1716 1696 1695; 2321 1716 1717 1697 1696
1155. 2322 1717 1718 1698 1697; 2323 1718 1719 1699 1698; 2324 1719 1720 1700 1699
1156. 2325 1720 1721 1701 1700; 2326 1721 1722 1702 1701; 2327 1722 1723 1703 1702
1157. 2328 1723 1724 1704 1703; 2329 1724 1725 1705 1704; 2330 1725 1726 1706 1705
1158. 2331 1726 1727 1707 1706; 2332 1727 1728 1708 1707; 2333 1728 1729 1709 1708
1159. 2334 1729 1730 1710 1709; 2335 1730 1731 1711 1710; 2336 1731 1732 1712 1711
1160. 2337 1732 1733 1713 1712; 2338 1734 1735 1715 1714; 2339 1735 1736 1716 1715
1161. 2340 1736 1737 1717 1716; 2341 1737 1738 1718 1717; 2342 1738 1739 1719 1718
1162. 2343 1739 1740 1720 1719; 2344 1740 1741 1721 1720; 2345 1741 1742 1722 1721
1163. 2346 1742 1743 1723 1722; 2347 1743 1744 1724 1723; 2348 1744 1745 1725 1724
1164. 2349 1745 1746 1726 1725; 2350 1746 1747 1727 1726; 2351 1747 1748 1728 1727
1165. 2352 1748 1749 1729 1728; 2353 1749 1750 1730 1729; 2354 1750 1751 1731 1730
1166. 2355 1751 1752 1732 1731; 2356 1752 1753 1733 1732; 2357 1754 1755 1735 1734
1167. 2358 1755 1756 1736 1735; 2359 1756 1757 1737 1736; 2360 1757 1758 1738 1737
1168. 2361 1758 1759 1739 1738; 2362 1759 1760 1740 1739; 2363 1760 1761 1741 1740
1169. 2364 1761 1762 1742 1741; 2365 1762 1763 1743 1742; 2366 1763 1764 1744 1743
1170. 2367 1764 1765 1745 1744; 2368 1765 1766 1746 1745; 2369 1766 1767 1747 1746
1171. 2370 1767 1768 1748 1747; 2371 1768 1769 1749 1748; 2372 1769 1770 1750 1749
1172. 2373 1770 1771 1751 1750; 2374 1771 1772 1752 1751; 2375 1772 1773 1753 1752
1173. 2376 1774 1775 1755 1754; 2377 1775 1776 1756 1755; 2378 1776 1777 1757 1756
1174. 2379 1777 1778 1758 1757; 2380 1778 1779 1759 1758; 2381 1779 1780 1760 1759
1175. 2382 1780 1781 1761 1760; 2383 1781 1782 1762 1761; 2384 1782 1783 1763 1762
1176. 2385 1783 1784 1764 1763; 2386 1784 1785 1765 1764; 2387 1785 1786 1766 1765
1177. 2388 1786 1787 1767 1766; 2389 1787 1788 1768 1767; 2390 1788 1789 1769 1768
1178. 2391 1789 1790 1770 1769; 2392 1790 1791 1771 1770; 2393 1791 1792 1772 1771
1179. 2394 1792 1793 1773 1772; 2395 1794 1795 1775 1774; 2396 1795 1796 1776 1775
1180. 2397 1796 1797 1777 1776; 2398 1797 1798 1778 1777; 2399 1798 1799 1779 1778
1181. 2400 1799 1800 1780 1779; 2401 1800 1801 1781 1780; 2402 1801 1802 1782 1781
1182. 2403 1802 1803 1783 1782; 2404 1803 1804 1784 1783; 2405 1804 1805 1785 1784
1183. 2406 1805 1806 1786 1785; 2407 1806 1807 1787 1786; 2408 1807 1808 1788 1787
1184. 2409 1808 1809 1789 1788; 2410 1809 1810 1790 1789; 2411 1810 1811 1791 1790
1185. 2412 1811 1812 1792 1791; 2413 1812 1813 1793 1792; 2414 1834 1835 1815 1814
1186. 2415 1835 1836 1816 1815; 2416 1836 1837 1817 1816; 2417 1837 1838 1818 1817
1187. 2418 1838 1839 1819 1818; 2419 1839 1840 1820 1819; 2420 1840 1841 1821 1820
1188. 2421 1841 1842 1822 1821; 2422 1842 1843 1823 1822; 2423 1843 1844 1824 1823
1189. 2424 1844 1845 1825 1824; 2425 1845 1846 1826 1825; 2426 1846 1847 1827 1826
1190. 2427 1847 1848 1828 1827; 2428 1848 1849 1829 1828; 2429 1849 1850 1830 1829
1191. 2430 1850 1851 1831 1830; 2431 1851 1852 1832 1831; 2432 1852 1853 1833 1832
1192. 2433 1854 1855 1835 1834; 2434 1855 1856 1836 1835; 2435 1856 1857 1837 1836
1193. 2436 1857 1858 1838 1837; 2437 1858 1859 1839 1838; 2438 1859 1860 1840 1839
1194. 2439 1860 1861 1841 1840; 2440 1861 1862 1842 1841; 2441 1862 1863 1843 1842
1195. 2442 1863 1864 1844 1843; 2443 1864 1865 1845 1844; 2444 1865 1866 1846 1845
1196. 2445 1866 1867 1847 1846; 2446 1867 1868 1848 1847; 2447 1868 1869 1849 1848
1197. 2448 1869 1870 1850 1849; 2449 1870 1871 1851 1850; 2450 1871 1872 1852 1851
1198. 2451 1872 1873 1853 1852; 2452 1874 1875 1855 1854; 2453 1875 1876 1856 1855
1199. 2454 1876 1877 1857 1856; 2455 1877 1878 1858 1857; 2456 1878 1879 1859 1858
1200. 2457 1879 1880 1860 1859; 2458 1880 1881 1861 1860; 2459 1881 1882 1862 1861
1201. 2460 1882 1883 1863 1862; 2461 1883 1884 1864 1863; 2462 1884 1885 1865 1864
1202. 2463 1885 1886 1866 1865; 2464 1886 1887 1867 1866; 2465 1887 1888 1868 1867
1203. 2466 1888 1889 1869 1868; 2467 1889 1890 1870 1869; 2468 1890 1891 1871 1870
1204. 2469 1891 1892 1872 1871; 2470 1892 1893 1873 1872; 2471 1894 1895 1875 1874
1205. 2472 1895 1896 1876 1875; 2473 1896 1897 1877 1876; 2474 1897 1898 1878 1877
1206. 2475 1898 1899 1879 1878; 2476 1899 1900 1880 1879; 2477 1900 1901 1881 1880
1207. 2478 1901 1902 1882 1881; 2479 1902 1903 1883 1882; 2480 1903 1904 1884 1883

```
1208. 2481 1904 1905 1885 1884; 2482 1905 1906 1886 1885; 2483 1906 1907 1887 1886
1209. 2484 1907 1908 1888 1887; 2485 1908 1909 1889 1888; 2486 1909 1910 1890 1889
1210. 2487 1910 1911 1891 1890; 2488 1911 1912 1892 1891; 2489 1912 1913 1893 1892
1211. 2490 1914 1915 1895 1894; 2491 1915 1916 1896 1895; 2492 1916 1917 1897 1896
1212. 2493 1917 1918 1898 1897; 2494 1918 1919 1899 1898; 2495 1919 1920 1900 1899
1213. 2496 1920 1921 1901 1900; 2497 1921 1922 1902 1901; 2498 1922 1923 1903 1902
1214. 2499 1923 1924 1904 1903; 2500 1924 1925 1905 1904; 2501 1925 1926 1906 1905
1215. 2502 1926 1927 1907 1906; 2503 1927 1928 1908 1907; 2504 1928 1929 1909 1908
1216. 2505 1929 1930 1910 1909; 2506 1930 1931 1911 1910; 2507 1931 1932 1912 1911
1217. 2508 1932 1933 1913 1912; 2509 1934 1935 1915 1914; 2510 1935 1936 1916 1915
1218. 2511 1936 1937 1917 1916; 2512 1937 1938 1918 1917; 2513 1938 1939 1919 1918
1219. 2514 1939 1940 1920 1919; 2515 1940 1941 1921 1920; 2516 1941 1942 1922 1921
1220. 2517 1942 1943 1923 1922; 2518 1943 1944 1924 1923; 2519 1944 1945 1925 1924
1221. 2520 1945 1946 1926 1925; 2521 1946 1947 1927 1926; 2522 1947 1948 1928 1927
1222. 2523 1948 1949 1929 1928; 2524 1949 1950 1930 1929; 2525 1950 1951 1931 1930
1223. 2526 1951 1952 1932 1931; 2527 1952 1953 1933 1932; 2528 1954 1955 1935 1934
1224. 2529 1955 1956 1936 1935; 2530 1956 1957 1937 1936; 2531 1957 1958 1938 1937
1225. 2532 1958 1959 1939 1938; 2533 1959 1960 1940 1939; 2534 1960 1961 1941 1940
1226. 2535 1961 1962 1942 1941; 2536 1962 1963 1943 1942; 2537 1963 1964 1944 1943
1227. 2538 1964 1965 1945 1944; 2539 1965 1966 1946 1945; 2540 1966 1967 1947 1946
1228. 2541 1967 1968 1948 1947; 2542 1968 1969 1949 1948; 2543 1969 1970 1950 1949
1229. 2544 1970 1971 1951 1950; 2545 1971 1972 1952 1951; 2546 1972 1973 1953 1952
1230. 2547 1974 1975 1955 1954; 2548 1975 1976 1956 1955; 2549 1976 1977 1957 1956
1231. 2550 1977 1978 1958 1957; 2551 1978 1979 1959 1958; 2552 1979 1980 1960 1959
1232. 2553 1980 1981 1961 1960; 2554 1981 1982 1962 1961; 2555 1982 1983 1963 1962
1233. 2556 1983 1984 1964 1963; 2557 1984 1985 1965 1964; 2558 1985 1986 1966 1965
1234. 2559 1986 1987 1967 1966; 2560 1987 1988 1968 1967; 2561 1988 1989 1969 1968
1235. 2562 1989 1990 1970 1969; 2563 1990 1991 1971 1970; 2564 1991 1992 1972 1971
1236. 2565 1992 1993 1973 1972; 2566 1994 1995 1975 1974; 2567 1995 1996 1976 1975
1237. 2568 1996 1997 1977 1976; 2569 1997 1998 1978 1977; 2570 1998 1999 1979 1978
1238. 2571 1999 2000 1980 1979; 2572 2000 2001 1981 1980; 2573 2001 2002 1982 1981
1239. 2574 2002 2003 1983 1982; 2575 2003 2004 1984 1983; 2576 2004 2005 1985 1984
1240. 2577 2005 2006 1986 1985; 2578 2006 2007 1987 1986; 2579 2007 2008 1988 1987
1241. 2580 2008 2009 1989 1988; 2581 2009 2010 1990 1989; 2582 2010 2011 1991 1990
1242. 2583 2011 2012 1992 1991; 2584 2012 2013 1993 1992; 2585 2014 2015 1995 1994
1243. 2586 2015 2016 1996 1995; 2587 2016 2017 1997 1996; 2588 2017 2018 1998 1997
1244. 2589 2018 2019 1999 1998; 2590 2019 2020 2000 1999; 2591 2020 2021 2001 2000
1245. 2592 2021 2022 2002 2001; 2593 2022 2023 2003 2002; 2594 2023 2024 2004 2003
1246. 2595 2024 2025 2005 2004; 2596 2025 2026 2006 2005; 2597 2026 2027 2007 2006
1247. 2598 2027 2028 2008 2007; 2599 2028 2029 2009 2008; 2600 2029 2030 2010 2009
1248. 2601 2030 2031 2011 2010; 2602 2031 2032 2012 2011; 2603 2032 2033 2013 2012
1249. 2604 2034 2035 2015 2014; 2605 2035 2036 2016 2015; 2606 2036 2037 2017 2016
1250. 2607 2037 2038 2018 2017; 2608 2038 2039 2019 2018; 2609 2039 2040 2020 2019
1251. 2610 2040 2041 2021 2020; 2611 2041 2042 2022 2021; 2612 2042 2043 2023 2022
1252. 2613 2043 2044 2024 2023; 2614 2044 2045 2025 2024; 2615 2045 2046 2026 2025
1253. 2616 2046 2047 2027 2026; 2617 2047 2048 2028 2027; 2618 2048 2049 2029 2028
1254. 2619 2049 2050 2030 2029; 2620 2050 2051 2031 2030; 2621 2051 2052 2032 2031
1255. 2622 2052 2053 2033 2032; 2623 2054 2055 2035 2034; 2624 2055 2056 2036 2035
1256. 2625 2056 2057 2037 2036; 2626 2057 2058 2038 2037; 2627 2058 2059 2039 2038
1257. 2628 2059 2060 2040 2039; 2629 2060 2061 2041 2040; 2630 2061 2062 2042 2041
1258. 2631 2062 2063 2043 2042; 2632 2063 2064 2044 2043; 2633 2064 2065 2045 2044
1259. 2634 2065 2066 2046 2045; 2635 2066 2067 2047 2046; 2636 2067 2068 2048 2047
1260. 2637 2068 2069 2049 2048; 2638 2069 2070 2050 2049; 2639 2070 2071 2051 2050
1261. 2640 2071 2072 2052 2051; 2641 2072 2073 2053 2052; 2642 2074 2075 2055 2054
1262. 2643 2075 2076 2056 2055; 2644 2076 2077 2057 2056; 2645 2077 2078 2058 2057
1263. 2646 2078 2079 2059 2058; 2647 2079 2080 2060 2059; 2648 2080 2081 2061 2060
1264. 2649 2081 2082 2062 2061; 2650 2082 2083 2063 2062; 2651 2083 2084 2064 2063
1265. 2652 2084 2085 2065 2064; 2653 2085 2086 2066 2065; 2654 2086 2087 2067 2066
1266. 2655 2087 2088 2068 2067; 2656 2088 2089 2069 2068; 2657 2089 2090 2070 2069
1267. 2658 2090 2091 2071 2070; 2659 2091 2092 2072 2071; 2660 2092 2093 2073 2072
1268. START GROUP DEFINITION
1269. JOINT
1270. MEMBER
1271. _C1 5 9 25 26 33 34
1272. _C2 1 15
1273. _C3 18 27
1274. _C4 2 14
1275. _C6 3 4 6 TO 8 10 TO 13 17 20 TO 24 28 TO 32
1276. _C7 16 19
1277. ELEMENT
1278. _F1_BP 2414 TO 2660
```

```
1280. 2608 TO 2619 2622 2623 2626 TO 2638 2641 TO 2660
1281. _F1_SF 2418 TO 2428 2437 TO 2447 2456 TO 2466 2475 TO 2485 2490 TO 2584 2589 -
1282. 2590 TO 2599 2608 TO 2618 2627 TO 2637 2646 TO 2656
1283. _F2_BP 1894 TO 2007
1284. _F2_BM 1894 TO 1932 1935 TO 1947 1950 1951 1954 TO 1966 1969 TO 2007
1285. _F2_SF 1894 TO 1912 1917 TO 1927 1936 TO 1946 1955 TO 1965 1974 TO 1984 1989 -
1286. 1990 TO 2007
1287. _F3_BP 2056 TO 2074 2087 TO 2105 2112 TO 2130 2137 TO 2155 2162 TO 2199
1288. _F3_BM 2056 TO 2074 2087 TO 2105 2112 2115 TO 2127 2130 2137 2140 TO 2152 -
1289. 2155 2162 TO 2199
1290. _F3_SF 2056 TO 2074 2091 TO 2101 2116 TO 2126 2141 TO 2151 2166 TO 2176 2181 -
1291. 2182 TO 2199
1292. _F4_BP 1702 TO 1707 1712 TO 1717 1722 TO 1727 1732 TO 1737 1742 TO 1747 1752 -
1293. 1753 TO 1799
1294. _F4_BM 1702 TO 1707 1712 1713 1716 1717 1722 1723 1726 1727 1732 TO 1737 1742 -
1295. 1743 TO 1747 1752 TO 1783 1786 TO 1789 1792 TO 1799
1296. _F4_SF 1702 1707 1712 1717 1722 1727 1732 1737 1742 TO 1747 1752 TO 1776 1781 -
1297. 1782 1787 1788 1793 1794 1799
1298. _F5_BP 2008 TO 2055 2075 TO 2086 2106 TO 2111 2131 TO 2136 2156 TO 2161
1299. _F5_BM 2008 TO 2015 2018 TO 2021 2024 TO 2055 2075 TO 2086 2106 2107 2110 -
1300. 2111 2131 2132 2135 2136 2156 TO 2161
1301. _F5_SF 2008 2013 2014 2019 2020 2025 2026 2031 TO 2055 2075 TO 2081 2086 2106 -
1302. 2111 2131 2136 2156 2161
1303. _F6_BP 2300 TO 2413
1304. _F6_BM 2300 TO 2338 2341 TO 2353 2356 2357 2360 TO 2372 2375 TO 2413
1305. _F6_SF 2300 TO 2318 2323 TO 2333 2342 TO 2352 2361 TO 2371 2380 TO 2390 2395 -
1306. 2396 TO 2413
1307. _F7A_BP 1816 TO 1893
1308. _F7A_BM 1816 TO 1823 1826 TO 1829 1832 TO 1877 1880 TO 1883 1886 TO 1893
1309. _F7A_SF 1816 1821 1822 1827 1828 1833 1834 1839 TO 1870 1875 1876 1881 1882 -
1310. 1887 1888 1893
1311. _F7_BP 1044 TO 1049 1062 TO 1067 1100 TO 1105 1138 TO 1143 1176 TO 1181 1202 -
1312. 1203 TO 1207 1228 TO 1233 1254 TO 1259 1300 TO 1305 1326 TO 1337 1358 TO 1363 -
1313. 1384 TO 1389
1314. _F7_BM 1044 TO 1049 1062 1063 1066 1067 1100 1101 1104 1105 1138 TO 1143 1176 -
1315. 1177 TO 1181 1202 TO 1207 1228 TO 1233 1254 TO 1259 1300 TO 1305 1326 TO 1333 -
1316. 1336 1337 1358 1359 1362 1363 1384 TO 1389
1317. _F7_SF 1044 1049 1062 1067 1100 1105 1138 1143 1176 TO 1181 1202 TO 1207 1228 -
1318. 1229 TO 1233 1254 TO 1259 1300 TO 1305 1326 1331 1332 1337 1358 1363 1384 -
1319. 1389
1320. _F8_BP 1022 TO 1031 1078 TO 1087 1116 TO 1125 1154 TO 1163 1192 TO 1201 1218 -
1321. 1219 TO 1227 1244 TO 1253 1270 TO 1279 1290 TO 1299 1316 TO 1325 1348 TO 1357 -
1322. 1374 TO 1383 1400 TO 1409
1323. _F8_BM 1022 TO 1031 1078 TO 1081 1084 TO 1087 1116 TO 1119 1122 TO 1125 1154 -
1324. 1155 TO 1163 1192 TO 1201 1218 TO 1227 1244 TO 1253 1270 TO 1279 1290 TO 1299 -
1325. 1316 TO 1325 1348 TO 1351 1354 TO 1357 1374 TO 1377 1380 TO 1383 -
1326. 1400 TO 1409
1327. _F8_SF 1022 TO 1024 1029 TO 1031 1078 TO 1080 1085 TO 1087 1116 TO 1118 1123 -
1328. 1124 TO 1125 1154 TO 1156 1161 TO 1163 1192 TO 1201 1218 TO 1227 1244 TO 1253 -
1329. 1270 TO 1279 1290 TO 1299 1316 TO 1318 1323 TO 1325 1348 TO 1350 -
1330. 1355 TO 1357 1374 TO 1376 1381 TO 1383 1400 TO 1402 1407 TO 1409
1331. _F9_BP 1012 TO 1021 1068 TO 1077 1106 TO 1115 1144 TO 1153 1182 TO 1191 1208 -
1332. 1209 TO 1217 1234 TO 1243 1260 TO 1269 1280 TO 1289 1306 TO 1315 1338 TO 1347 -
1333. 1364 TO 1373 1390 TO 1399
1334. _F9_BM 1012 TO 1021 1068 TO 1071 1074 TO 1077 1106 TO 1109 1112 TO 1115 1144 -
1335. 1145 TO 1153 1182 TO 1191 1208 TO 1217 1234 TO 1243 1260 TO 1269 1280 TO 1289 -
1336. 1306 TO 1315 1338 TO 1341 1344 TO 1347 1364 TO 1367 1370 TO 1373 -
1337. 1390 TO 1399
1338. _F9_SF 1012 TO 1014 1019 TO 1021 1068 TO 1070 1075 TO 1077 1106 TO 1108 1113 -
1339. 1114 TO 1115 1144 TO 1146 1151 TO 1153 1182 TO 1191 1208 TO 1217 1234 TO 1243 -
1340. 1260 TO 1269 1280 TO 1289 1306 TO 1308 1313 TO 1315 1338 TO 1340 -
1341. 1345 TO 1347 1364 TO 1366 1371 TO 1373 1390 TO 1392 1397 TO 1399
1342. _F10_BP 1006 TO 1011 1038 TO 1043 1056 TO 1061 1094 TO 1099 1132 TO 1137 1170 -
1343. 1171 TO 1175 1446 TO 1451 1458 TO 1463 1470 TO 1475 1482 TO 1487 1494 TO 1499 -
1344. 1506 TO 1511
1345. _F10_BM 1006 TO 1011 1038 TO 1043 1056 1057 1060 1061 1094 1095 1098 1099 -
1346. 1132 TO 1137 1170 TO 1175 1446 TO 1451 1458 TO 1463 1470 1471 1474 1475 1482 -
1347. 1483 1486 1487 1494 TO 1499 1506 TO 1511
1348. _F10_SF 1006 TO 1011 1038 1043 1056 1061 1094 1099 1132 1137 1170 TO 1175 -
1349. 1446 TO 1451 1458 1463 1470 1475 1482 1487 1494 1499 1506 TO 1511
1350. _F11_BP 1000 TO 1005 1032 TO 1037 1050 TO 1055 1088 TO 1093 1126 TO 1131 1164 -
1351. 1165 TO 1169 1452 TO 1457 1464 TO 1469 1476 TO 1481 1488 TO 1493 1500 TO 1505 -
```

```
1512 TO 1517
_F11_BM 1000 TO 1005 1032 TO 1037 1050 1051 1054 1055 1088 1089 1092 1093 -
1126 TO 1131 1164 TO 1169 1452 TO 1457 1464 TO 1469 1476 1477 1480 1481 1488 -
1489 1492 1493 1500 TO 1505 1512 TO 1517
_F11_SF 1000 TO 1005 1032 1037 1050 1055 1088 1093 1126 1131 1164 TO 1169 -
1452 TO 1457 1464 1469 1476 1481 1488 1493 1500 1505 1512 TO 1517
_F12_BP 1410 TO 1445 1558 TO 1563 1574 TO 1579 1590 TO 1595 1606 TO 1611 1622 -
1623 TO 1627 1638 TO 1643
_F12_BM 1410 TO 1423 1426 TO 1429 1432 TO 1445 1558 TO 1563 1574 TO 1579 1590 -
1591 1594 1595 1606 1607 1610 1611 1622 TO 1627 1638 TO 1643
_F12_SF 1410 TO 1416 1421 1422 1427 1428 1433 1434 1439 TO 1445 1558 TO 1563 -
1574 1579 1590 1595 1606 1611 1622 1627 1638 TO 1643
_F13_BP 1564 TO 1569 1580 TO 1585 1596 TO 1601 1612 TO 1617 1628 TO 1633 1644 -
1645 TO 1649
_F13_BM 1564 TO 1569 1580 TO 1585 1596 1597 1600 1601 1612 1613 1616 1617 -
1628 TO 1633 1644 TO 1649
_F13_SF 1564 TO 1569 1580 1585 1596 1601 1612 1617 1628 1633 1644 TO 1649
_F14_BP 2200 TO 2299
_F14_BM 2200 TO 2243 2246 TO 2253 2256 TO 2299
_F14_SF 2200 TO 2232 2237 TO 2242 2247 TO 2252 2257 TO 2262 2267 TO 2299
_F15_BP 1800 TO 1815
_F15_BM 1800 TO 1804 1807 1808 1811 TO 1815
_F16_BP 1518 TO 1557 1570 TO 1573 1586 TO 1589 1602 TO 1605 1618 TO 1621 1634 -
1635 TO 1637 1650 TO 1701 1708 TO 1711 1718 TO 1721 1728 TO 1731 1738 TO 1741 -
1748 TO 1751
_F16_BM 1518 TO 1522 1525 1526 1529 TO 1557 1570 TO 1573 1586 TO 1589 1602 -
1603 TO 1605 1618 TO 1621 1634 TO 1637 1650 TO 1670 1673 1674 1677 TO 1701 -
1708 TO 1711 1718 TO 1721 1728 1731 1738 1741 1748 TO 1751
_F16_SF 1534 TO 1557 1570 TO 1573 1586 TO 1589 1602 TO 1605 1618 TO 1621 1634 -
1635 TO 1637 1650 TO 1665 1682 TO 1701 1708 TO 1711
END GROUP DEFINITION
ELEMENT PROPERTY
1800 TO 1815 THICKNESS 0.3
1000 TO 1011 1032 TO 1067 1088 TO 1105 1126 TO 1143 1164 TO 1181 1202 TO 1207 -
1228 TO 1233 1254 TO 1259 1300 TO 1305 1326 TO 1337 1358 TO 1363 -
1384 TO 1389 1410 TO 1517 1558 TO 1569 1574 TO 1585 1590 TO 1601 -
1606 TO 1617 1622 TO 1633 1638 TO 1649 1816 TO 1893 THICKNESS 0.35
1012 TO 1031 1068 TO 1087 1106 TO 1125 1144 TO 1163 1182 TO 1201 1208 TO 1227 -
1234 TO 1253 1260 TO 1299 1306 TO 1325 1338 TO 1357 1364 TO 1383 -
1390 TO 1409 1702 TO 1707 1712 TO 1717 1722 TO 1727 1732 TO 1737 -
1742 TO 1747 1752 TO 1799 THICKNESS 0.4
1894 TO 2199 THICKNESS 0.45
1518 TO 1557 1570 TO 1573 1586 TO 1589 1602 TO 1605 1618 TO 1621 1634 TO 1637 -
1650 TO 1701 1708 TO 1711 1718 TO 1721 1728 TO 1731 1738 TO 1741 -
1748 TO 1751 2200 TO 2660 THICKNESS 0.5
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467E+006
POISSON 0.17
DENSITY 2.40261
ALPHA 1E-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY INDIAN
1 3 TO 13 15 17 18 20 TO 34 PRIS YD 0.6 ZD 0.6
2 14 PRIS YD 0.5 ZD 0.65
16 19 PRIS YD 0.5 ZD 0.75
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
*** MODULAS OF SUBGARDE REACTION = 67*3/0.025 = 8040 MTON/SQM/M
1000 TO 2660 PLATE MAT DIRECT Y SUBGRADE 8040
LOAD 1 DEAD LOAD (DL)
 **WARNING- THIS STRUCTURE IS DISJOINTED. IGNORE IF
            MASTER/SLAVE OR IF UNCONNECTED JOINTS.
SELFWEIGHT Y -1
JOINT LOAD
1 FX 0 FY -2.369 FZ -0.238
2 FX 0 FY -3.231 FZ -0.295
3 FX 0 FY -1.851 FZ 0.132
```

```
1422. 4 FX -0.18 FY -1.42 FZ 0
1423. 5 FX 0.319 FY -1.792 FZ -0.001
1424. 6 FX 0.001 FY -0.89 FZ -0.054
1425. 7 FX 0 FY -1.675 FZ -0.04
1426. 8 FX -0.404 FY -2.444 FZ -0.07
1427. 9 FX 0.276 FY -3.146 FZ -0.261
1428. 10 FX -0.029 FY -1.524 FZ 0.07
1429. 11 FX 0 FY -1.176 FZ -0.037
1430. 12 FX -0.027 FY -2.426 FZ 0.205
1431. 13 FX 0.002 FY -1.77 FZ -0.033
1432. 14 FX 0 FY -3.849 FZ 0.138
1433. 15 FX 0 FY -2.106 FZ 0.189
1434. 18 FX 0.009 FY -3.292 FZ 0.375 MX 0.391
1435. 21 FX 0 FY -1.546 FZ 0.029
1436. 22 FX 0 FY -5.335 FZ -0.41
1437. 25 FX 0.026 FY -2.704 FZ -0.058 MX -0.144
1438. 28 FX 0.009 FY -2.953 FZ -0.188
1439. 29 FX -0.313 FY -2.684 FZ -0.237
1440. 30 FX 0.253 FY -2.784 FZ -0.159
1441. 31 FX -0.006 FY -1.626 FZ 0.005
1442. 32 FX 0.012 FY -3.545 FZ 0.197
1443. 33 FX -0.312 FY -4.531 FZ 0.194
1444. 34 FX 0.384 FY -3.553 FZ 0.198
1445. 35 FX 0 FY -5.702 FZ 0.41
1446. 36 FX 0 FY -2.985 FZ -0.02
1447. 37 FX 0 FY -0.526 FZ -0.023
1448. 38 FX -0.257 FY -1.593 FZ 0.004
1449. 39 FX 0.287 FY -2.031 FZ 0.026
1450. 40 FX 0 FY -2.609 FZ 0.007
1451. 41 FX 0 FY -3.062 FZ -0.002
1452. 42 FX -0.014 FY -2.602 FZ 0
1453. ELEMENT LOAD
1454. *** SOIL LOAD OVER FOUNDATION MKD. F1 = (2.5-0.5)*1.9 = 3.8 MTON/SQ.M ***
1455. 2414 TO 2660 PR GY -3.8
1456. *** SOIL LOAD OVER FOUNDATION MKD. F2 = (1.95-0.45)*1.9 = 2.85 MTON/SQ.M ***
1457. 1894 TO 2007 PR GY -2.85
1458. *** SOIL LOAD OVER FOUNDATION MKD. F3 = (1.9-0.45)*1.9 = 2.755 MTON/SQ.M ***
1459. 2056 TO 2074 2087 TO 2105 2112 TO 2130 2137 TO 2155 2162 TO 2199 PR GY -2.755
1460. *** SOIL LOAD OVER FOUNDATION MKD. F4 = (2.5-0.4)*1.9 = 3.99 MTON/SQ.M ***
1461. 1702 TO 1707 1712 TO 1717 1722 TO 1727 1732 TO 1737 1742 TO 1747 1752 TO 1798 -
1462. 1799 PR GY -3.99
1463. *** SOIL LOAD OVER FOUNDATION MKD. F5 = (1.9-0.45)*1.9 = 2.755 MTON/SQ.M ***
1464. 2008 TO 2055 2075 TO 2086 2106 TO 2111 2131 TO 2136 2156 TO 2161 PR GY -2.755
1465. *** SOIL LOAD OVER FOUNDATION MKD. F6 = (1.7-0.5)*1.9 = 2.28 MTON/SQ.M ***
1466. 2300 TO 2413 PR GY -2.28
1467. *** SOIL LOAD OVER FOUNDATION MKD. F7A = (1.95-0.35)*1.9 = 3.04 MTON/SQ.M ***
1468. 1816 TO 1893 PR GY -3.04
1469. *** SOIL LOAD OVER FOUNDATION MKD. F7 = (2.5-0.35)*1.9 = 4.085 MTON/SQ.M ***
1470. 1044 TO 1049 1062 TO 1067 1100 TO 1105 1138 TO 1143 1176 TO 1181 1202 TO 1207 -
1471. 1228 TO 1233 1254 TO 1259 1300 TO 1305 1326 TO 1337 1358 TO 1363 -
1472. 1384 TO 1389 PR GY -4.085
1473. *** SOIL LOAD OVER FOUNDATION MKD. F8 = (2.5-0.4)*1.9 = 3.99 MTON/SQ.M ***
1474. 1022 TO 1031 1078 TO 1087 1116 TO 1125 1154 TO 1163 1192 TO 1201 1218 TO 1227 -
1475. 1244 TO 1253 1270 TO 1279 1290 TO 1299 1316 TO 1325 1348 TO 1357 -
1476. 1374 TO 1383 1400 TO 1409 PR GY -3.99
1477. *** SOIL LOAD OVER FOUNDATION MKD. F9 = (2.5-0.4)*1.9 = 3.99 MTON/SQ.M ***
1478. 1012 TO 1021 1068 TO 1077 1106 TO 1115 1144 TO 1153 1182 TO 1191 1208 TO 1217 -
1479. 1234 TO 1243 1260 TO 1269 1280 TO 1289 1306 TO 1315 1338 TO 1347 -
1480. 1364 TO 1373 1390 TO 1399 PR GY -3.99
1481. *** SOIL LOAD OVER FOUNDATION MKD. F10 = (2.5-0.35)*1.9 = 4.085 MTON/SQ.M ***
1482. 1006 TO 1011 1038 TO 1043 1056 TO 1061 1094 TO 1099 1132 TO 1137 1170 TO 1175 -
1483. 1446 TO 1451 1458 TO 1463 1470 TO 1475 1482 TO 1487 1494 TO 1499 -
1484. 1506 TO 1511 PR GY -4.085
1485. *** SOIL LOAD OVER FOUNDATION MKD. F11 = (2.5-0.35)*1.9 = 4.085 MTON/SQ.M ***
1486. 1000 TO 1005 1032 TO 1037 1050 TO 1055 1088 TO 1093 1126 TO 1131 1164 TO 1169 -
1487. 1452 TO 1457 1464 TO 1469 1476 TO 1481 1488 TO 1493 1500 TO 1505 -
1488. 1512 TO 1517 PR GY -4.085
1489. *** SOIL LOAD OVER FOUNDATION MKD. F12 = (2.5-0.35)*1.9 = 4.085 MTON/SQ.M ***
1490. 1410 TO 1445 1558 TO 1563 1574 TO 1579 1590 TO 1595 1606 TO 1611 1622 TO 1627 -
1491. 1638 TO 1643 PR GY -4.085
1492. *** SOIL LOAD OVER FOUNDATION MKD. F13 = (2.5-0.35)*1.9 = 4.085 MTON/SQ.M ***
```

```
1649 PR GY -4.085
*** SOIL LOAD OVER FOUNDATION MKD. F14 = (1.85-0.5)*1.9 = 2.565 MTON/SQ.M ***
2200 TO 2299 PR GY -2.565
*** SOIL LOAD OVER FOUNDATION MKD. F15 = (2.5-0.3)*1.9 = 4.18 MTON/SQ.M ***
1800 TO 1815 PR GY -4.18
*** SOIL LOAD OVER FOUNDATION MKD. F16 = (2.5-0.4)*1.9 = 3.99 MTON/SQ.M ***
1518 TO 1557 1570 TO 1573 1586 TO 1589 1602 TO 1605 1618 TO 1621 1634 TO 1637 -
1650 TO 1701 1708 TO 1711 1718 TO 1721 1728 TO 1731 1738 TO 1741 -
1748 TO 1751 PR GY -3.99
LOAD 2 LIVE LOAD (LL)
JOINT LOAD
1 FX 0 FY -7.046 FZ -0.807
2 FX 0 FY -12.18 FZ -1.426
3 FX 0 FY -6.949 FZ 0.414
4 FX -0.225 FY -3.999 FZ -0.053
5 FX 0.592 FY -4.603 FZ -0.004
6 FX 0.012 FY -2.616 FZ -0.337
7 FX 0 FY -5.887 FZ -0.014
8 FX -0.885 FY -6.662 FZ -0.06
9 FX 0.594 FY -9.708 FZ -0.592
10 FX -0.163 FY -6.788 FZ 0.168
11 FX 0 FY -0.006 FZ -0.004
12 FX -0.374 FY -5.101 FZ 0.518
13 FX 0.243 FY -6.156 FZ 0.009
14 FX 0 FY -8.869 FZ 0.373
15 FX 0 FY -8.527 FZ 0.953
18 FX 0.018 FY -6.063 FZ 1.055 MX 1.231
21 FX 0 FY 0.006 FZ -0.004
22 FX 0 FY -10.288 FZ -1.094
25 FX 0.069 FY -4.982 FZ -0.144 MX -0.268
28 FX 0.066 FY -5.142 FZ -0.465
29 FX -0.54 FY -6.009 FZ -0.541
30 FX 0.418 FY -3.426 FZ -0.292
31 FX 0 FY -3.8 FZ 0.025
32 FX 0.084 FY -9.855 FZ 0.4
33 FX -0.811 FY -11.912 FZ 0.539
34 FX 0.785 FY -7.187 FZ 0.351
35 FX 0 FY -13.325 FZ 1.056
36 FX -0.001 FY -8.205 FZ -0.078
37 FX 0 FY -1.506 FZ -0.047
38 FX -0.717 FY -5.126 FZ 0.013
39 FX 0.801 FY -6.304 FZ 0.102
40 FX 0 FY -8.688 FZ 0.035
41 FX 0 FY -6.852 FZ -0.021
42 FX -0.059 FY -4.505 FZ -0.023
LOAD 3 OPERATING EQUIPMENT LOAD (OEQL)
JOINT LOAD
1 FX 0 FY 0.113 FZ 0.042
2 FX 0 FY 0.007 FZ 0.006
3 FX 0 FY 0.003 FZ 0.001
4 FX -0.021 FY -0.03 FZ 0.001
5 FX -0.024 FY 0.033 FZ 0
6 FX 0 FY -0.009 FZ -0.002
7 FX 0 FY -0.003 FZ 0.001
8 FX 0.017 FY 0.025 FZ 0.001
9 FX 0.021 FY -0.023 FZ 0.001
10 FX 0 FY 0.009 FZ -0.002
11 FX 0 FY 0.004 FZ 0.003
12 FX 0 FY -0.004 FZ 0.002
13 FX 0 FY 0 FZ 0
14 FX 0 FY -2.785 FZ -0.223
15 FX 0 FY -0.008 FZ 0.005
18 FX 0.037 FY -11.034 FZ 0.007 MX 0.039
21 FX 0 FY -0.004 FZ 0.003
22 FX 0 FY -6.123 FZ -0.385
25 FX 0.055 FY -11.144 FZ 0.078 MX 0.204
28 FX -0.001 FY 0.095 FZ 0.022
29 FX -0.003 FY 0.014 FZ 0.006
30 FX -0.004 FY -0.003 FZ -0.003
31 FX 0 FY -0.11 FZ 0.021
32 FX -0.001 FY -0.096 FZ 0.023
33 FX 0.006 FY -0.004 FZ 0.005
```

1566. 34 FX 0.007 FY -0.006 FZ -0.002
1567. 35 FX 0 FY -1.244 FZ 0.326
1568. 36 FX 0 FY 0.006 FZ 0.002
1569. 37 FX 0 FY 0.204 FZ -0.012
1570. 38 FX 0.056 FY 0.101 FZ 0
1571. 39 FX 0.046 FY -0.107 FZ 0.002
1572. 40 FX 0 FY 0 FZ 0
1573. 41 FX 0 FY -0.002 FZ 0
1574. 42 FX 0 FY 0.001 FZ 0
1575. LOAD 4 TEST EQUIPMENT LOAD (TEQL)
1576. JOINT LOAD
1577. 1 FX 0 FY 0.306 FZ 0.114
1578. 2 FX 0 FY 0.029 FZ 0.023
1579. 3 FX 0 FY 0.016 FZ 0.004
1580. 4 FX -0.142 FY -0.207 FZ 0.003
1581. 5 FX -0.156 FY 0.217 FZ 0
1582. 6 FX 0 FY -0.027 FZ -0.007
1583. 7 FX 0 FY -0.016 FZ 0.004
1584. 8 FX 0.007 FY -0.003 FZ 0.003
1585. 9 FX 0.002 FY 0.061 FZ 0.026
1586. 10 FX 0 FY 0.027 FZ -0.007
1587. 11 FX 0 FY 0.016 FZ 0.009
1588. 12 FX 0 FY -0.067 FZ 0.029
1589. 13 FX 0 FY -0.001 FZ 0
1590. 14 FX 0 FY -7.462 FZ -0.593
1591. 15 FX 0 FY -0.032 FZ 0.021
1592. 18 FX 0.095 FY -29.359 FZ 0.04 MX 0.217
1593. 21 FX 0 FY -0.016 FZ 0.009
1594. 22 FX 0 FY -16.408 FZ -1.027
1595. 25 FX 0.144 FY -29.66 FZ 0.194 MX 0.495
1596. 28 FX 0 FY 0.12 FZ 0.028
1597. 29 FX -0.006 FY 0.014 FZ 0.007
1598. 30 FX -0.007 FY 0.003 FZ -0.003
1599. 31 FX 0 FY -0.282 FZ 0.054
1600. 32 FX -0.001 FY -0.121 FZ 0.029
1601. 33 FX 0.006 FY -0.013 FZ 0.007
1602. 34 FX 0.007 FY -0.003 FZ -0.003
1603. 35 FX 0 FY -3.332 FZ 0.88
1604. 36 FX 0 FY 0.016 FZ 0.004
1605. 37 FX 0 FY 0.537 FZ -0.029
1606. 38 FX 0.027 FY 0.037 FZ 0
1607. 39 FX 0.009 FY -0.053 FZ 0.004
1608. 40 FX 0 FY 0 FZ 0
1609. 41 FX 0 FY 0 FZ 0
1610. 42 FX 0 FY 0 FZ 0
1611. LOAD 5 CABLE TRAY LOAD (CTL)
1612. JOINT LOAD
1613. 1 FX 0 FY 0 FZ 0
1614. 2 FX 0 FY -0.037 FZ -0.003
1615. 3 FX 0 FY -0.029 FZ -0.001
1616. 4 FX -0.023 FY -0.198 FZ -0.001
1617. 5 FX 0.049 FY -0.609 FZ -0.001
1618. 6 FX 0.003 FY -0.122 FZ -0.026
1619. 7 FX 0 FY -0.057 FZ 0.001
1620. 8 FX -0.099 FY -0.265 FZ 0.001
1621. 9 FX 0.071 FY -1.727 FZ -0.045
1622. 10 FX 0 FY -0.507 FZ 0.007
1623. 11 FX 0 FY 0 FZ 0
1624. 12 FX 0 FY -0.026 FZ 0.066
1625. 13 FX -0.001 FY 0.001 FZ 0
1626. 14 FX 0 FY 0.001 FZ 0.001
1627. 15 FX 0 FY -0.006 FZ 0.002
1628. 18 FX 0 FY 0 FZ 0 MX 0.003
1629. 21 FX 0 FY 0 FZ 0
1630. 22 FX 0 FY -0.001 FZ 0
1631. 25 FX 0 FY 0.002 FZ 0.003 MX 0.011
1632. 28 FX 0 FY 0.066 FZ 0.002
1633. 29 FX 0.027 FY 0.19 FZ -0.116
1634. 30 FX -0.032 FY 0.387 FZ -0.033
1635. 31 FX 0 FY -0.002 FZ 0
1636. 32 FX 0 FY -0.617 FZ 0.032
1637. 33 FX -0.158 FY -2.22 FZ 0.067

1638. 34 FX 0.148 FY -1.605 FZ 0.095
1639. 35 FX 0 FY -2.233 FZ -0.005
1640. 36 FX 0 FY -0.379 FZ -0.002
1641. 37 FX 0 FY -2.276 FZ -0.004
1642. 38 FX -0.344 FY -2.939 FZ 0.001
1643. 39 FX 0.356 FY -2.333 FZ -0.002
1644. 40 FX 0 FY -3.695 FZ -0.002
1645. 41 FX 0 FY -4.451 FZ -0.023
1646. 42 FX 0 FY -2.644 FZ -0.019
1647. LOAD 6 PIPE VERTICAL LOAD (PVL)
1648. JOINT LOAD
1649. 1 FX 0 FY -4.001 FZ -0.545
1650. 2 FX 0 FY -4.487 FZ -0.7
1651. 3 FX 0 FY -1.689 FZ -0.101
1652. 4 FX -0.246 FY -2.653 FZ -0.102
1653. 5 FX 0.164 FY -2.464 FZ -0.004
1654. 6 FX 0 FY -0.89 FZ -0.059
1655. 7 FX 0 FY -3.364 FZ 0.156
1656. 8 FX -0.412 FY -4.438 FZ 0.155
1657. 9 FX 0.469 FY -4.54 FZ -0.127
1658. 10 FX 0 FY -0.692 FZ 0.028
1659. 11 FX 0 FY -0.863 FZ 0.001
1660. 12 FX -0.001 FY -0.022 FZ 0.148
1661. 13 FX -0.002 FY 0.003 FZ 0
1662. 14 FX 0 FY -3.598 FZ 0.486
1663. 15 FX 0 FY -2.061 FZ 0.363
1664. 18 FX -0.007 FY -0.837 FZ 0.149 MX 0.248
1665. 21 FX 0 FY -0.866 FZ 0.001
1666. 22 FX 0 FY -5.425 FZ -0.579
1667. 25 FX 0.021 FY -1.175 FZ -0.057 MX -0.051
1668. 28 FX 0 FY -0.161 FZ -0.043
1669. 29 FX 0.003 FY 0.092 FZ 0.004
1670. 30 FX 0.049 FY -0.545 FZ -0.059
1671. 31 FX 0 FY -3.272 FZ 0.028
1672. 32 FX 0 FY 0.009 FZ -0.036
1673. 33 FX -0.107 FY -0.243 FZ 0.006
1674. 34 FX 0.054 FY -1.676 FZ 0.048
1675. 35 FX 0 FY -11.212 FZ 0.632
1676. 36 FX 0 FY -0.974 FZ 0.002
1677. 37 FX 0 FY -5.115 FZ -0.039
1678. 38 FX -0.126 FY -1.882 FZ 0.103
1679. 39 FX 0.138 FY -0.857 FZ 0.106
1680. 40 FX 0 FY -0.54 FZ 0.001
1681. 41 FX 0 FY -4.89 FZ -0.004
1682. 42 FX 0 FY -1.967 FZ -0.002
1683. LOAD 7 PIPE HORIZONTAL LOAD (+X) (PHL(+X))
1684. JOINT LOAD
1685. 1 FX 0.07 FY -0.012 FZ -0.008
1686. 2 FX 0.07 FY -0.048 FZ -0.038
1687. 3 FX 0.07 FY -0.036 FZ -0.009
1688. 4 FX 1.422 FY 1.903 FZ -0.006
1689. 5 FX 1.471 FY -1.96 FZ 0
1690. 6 FX 0.014 FY 0.016 FZ -0.003
1691. 7 FX 0 FY 0.036 FZ -0.009
1692. 8 FX 1.086 FY 1.689 FZ -0.006
1693. 9 FX 1.194 FY -2.054 FZ -0.176
1694. 10 FX 0 FY 0.014 FZ -0.004
1695. 11 FX 0 FY -0.004 FZ -0.002
1696. 12 FX 0.003 FY 0.4 FZ -0.145
1697. 13 FX 0.003 FY -0.008 FZ 0
1698. 14 FX 0 FY -0.004 FZ -0.018
1699. 15 FX 0 FY 0.047 FZ -0.035
1700. 18 FX 0.023 FY -0.018 FZ -0.109 MX -0.583
1701. 21 FX 0 FY 0.004 FZ -0.002
1702. 22 FX 0 FY 0.018 FZ -0.037
1703. 25 FX 0.028 FY -0.045 FZ -0.03 MX -0.112
1704. 28 FX -0.014 FY 0.857 FZ 0.203
1705. 29 FX 0.366 FY 0.648 FZ 0.054
1706. 30 FX 0.217 FY 0.681 FZ 0.062
1707. 31 FX 0 FY 0.023 FZ -0.004
1708. 32 FX -0.017 FY -0.876 FZ 0.205
1709. 33 FX 0.063 FY 0.029 FZ -0.039

1710. 34 FX 0.231 FY -1.897 FZ 0.093
1711. 35 FX 0 FY -0.008 FZ -0.047
1712. 36 FX 0 FY 0.004 FZ -0.001
1713. 37 FX 0 FY 0.046 FZ -0.012
1714. 38 FX 3.651 FY 6.785 FZ 0.019
1715. 39 FX 3.435 FY -6.789 FZ -0.016
1716. 40 FX 0 FY 0.114 FZ -0.001
1717. 41 FX 0.001 FY 7.006 FZ 0.079
1718. 42 FX 0.001 FY -6.586 FZ -0.057
1719. LOAD 8 PIPE HORIZONTAL LOAD (+Z) (PHL(+Z))
1720. JOINT LOAD
1721. 1 FX 0 FY 0.287 FZ 0.29
1722. 2 FX 0 FY 0.352 FZ 0.344
1723. 3 FX 0 FY 0.195 FZ 0.116
1724. 4 FX -1.247 FY -1.683 FZ 0.152
1725. 5 FX -1.242 FY 1.818 FZ 0.124
1726. 6 FX -0.001 FY 0.544 FZ 0.143
1727. 7 FX 0 FY -0.195 FZ 0.055
1728. 8 FX 0.918 FY 1.098 FZ 0.039
1729. 9 FX 0.771 FY 0.881 FZ 0.793
1730. 10 FX 0 FY -0.544 FZ 0.173
1731. 11 FX 0 FY 0.171 FZ 0.106
1732. 12 FX 0.011 FY -2.088 FZ 0.937
1733. 13 FX 0.012 FY -0.025 FZ -0.001
1734. 14 FX 0 FY 0.193 FZ 0.423
1735. 15 FX 0 FY -0.352 FZ 0.256
1736. 18 FX -0.006 FY 0.005 FZ 0.631 MX 3.353
1737. 21 FX 0 FY -0.171 FZ 0.106
1738. 22 FX 0 FY -0.057 FZ 0.58
1739. 25 FX -0.009 FY 0.779 FZ 0.966 MX 3.563
1740. 28 FX 0.002 FY 1.973 FZ 0.482
1741. 29 FX 0.607 FY 5.08 FZ 1.004
1742. 30 FX -0.131 FY 6.529 FZ 1.319
1743. 31 FX 0 FY -0.772 FZ 0.13
1744. 32 FX -0.012 FY -1.81 FZ 0.477
1745. 33 FX -0.3 FY -2.729 FZ 0.988
1746. 34 FX -0.102 FY -4.285 FZ 1.177
1747. 35 FX 0 FY 0.105 FZ 0.55
1748. 36 FX 0 FY 0.11 FZ 0.043
1749. 37 FX 0 FY -0.536 FZ 0.131
1750. 38 FX 0.448 FY 0.736 FZ 0.126
1751. 39 FX 0.296 FY -0.847 FZ 0.142
1752. 40 FX 0 FY -0.173 FZ -0.001
1753. 41 FX 0.001 FY -2.26 FZ -0.161
1754. 42 FX 0 FY -2.335 FZ -0.217
1755. LOAD 9 MONORAIL LOAD (MRL)
1756. JOINT LOAD
1757. 1 FX 0 FY -2.235 FZ -0.334
1758. 2 FX 0 FY -0.021 FZ -0.017
1759. 3 FX 0 FY -0.012 FZ -0.003
1760. 4 FX 0.078 FY 0.11 FZ -0.002
1761. 5 FX 0.083 FY -0.118 FZ 0
1762. 6 FX 0 FY 0.019 FZ 0.005
1763. 7 FX 0 FY 0.012 FZ -0.003
1764. 8 FX -0.029 FY -0.034 FZ -0.002
1765. 9 FX -0.027 FY -0.016 FZ -0.021
1766. 10 FX 0 FY -0.019 FZ 0.004
1767. 11 FX 0 FY -1.933 FZ -0.006
1768. 12 FX 0 FY 0.056 FZ -0.025
1769. 13 FX 0 FY 0.001 FZ 0
1770. 14 FX 0 FY -4.694 FZ 0.504
1771. 15 FX 0 FY 0.021 FZ -0.015
1772. 18 FX -0.003 FY 0.002 FZ -0.034 MX -0.18
1773. 21 FX 0 FY -3.088 FZ -0.007
1774. 22 FX 0 FY -2.576 FZ -0.271
1775. 25 FX 0.009 FY -0.045 FZ -0.048 MX -0.177
1776. 28 FX -0.018 FY -1.263 FZ -0.012
1777. 29 FX -0.099 FY -0.321 FZ -0.097
1778. 30 FX 0.045 FY -1.047 FZ -0.005
1779. 31 FX 0 FY 0.038 FZ -0.006
1780. 32 FX -0.002 FY 0.134 FZ 0.049

1782. 34 FX 0.141 FY -0.668 FZ 0.087
1783. 35 FX 0 FY -4.561 FZ 0.439
1784. 36 FX 0 FY -0.013 FZ -0.003
1785. 37 FX 0 FY 0.36 FZ -0.03
1786. 38 FX -0.013 FY -0.021 FZ 0
1787. 39 FX -0.009 FY 0.034 FZ -0.003
1788. 40 FX 0 FY 0 FZ 0
1789. 41 FX 0 FY 0.665 FZ 0
1790. 42 FX 0 FY 0.568 FZ 0.004
1791. LOAD 10 TEMPERATURE LOAD (+TL)(+VE)
1792. JOINT LOAD
1793. 1 FX 0 FY -0.154 FZ -0.11
1794. 2 FX 0 FY -0.116 FZ -0.13
1795. 3 FX 0 FY -0.12 FZ -0.034
1796. 4 FX -3.47 FY 0.331 FZ -0.029
1797. 5 FX 4.065 FY -0.429 FZ -0.002
1798. 6 FX 0.006 FY -0.366 FZ -1.308
1799. 7 FX 0 FY 0.12 FZ -0.027
1800. 8 FX -4.015 FY -0.284 FZ -0.023
1801. 9 FX 3.485 FY 0.443 FZ -1.065
1802. 10 FX 0 FY 0.361 FZ 1.127
1803. 11 FX 0 FY 0.053 FZ 0.02
1804. 12 FX 0.009 FY -0.019 FZ 1.109
1805. 13 FX 0.021 FY -0.036 FZ 0.001
1806. 14 FX 0 FY 0.15 FZ -0.016
1807. 15 FX 0 FY 0.116 FZ -0.044
1808. 18 FX -0.028 FY 0.022 FZ 0.039 MX 0.207
1809. 21 FX 0 FY -0.053 FZ 0.045
1810. 22 FX 0 FY 0.184 FZ 0.219
1811. 25 FX -0.025 FY 0.274 FZ 0.265 MX 0.958
1812. 28 FX -0.049 FY 0.579 FZ -0.961
1813. 29 FX -1.168 FY 0.545 FZ -1.252
1814. 30 FX 1.425 FY -1.106 FZ -1.453
1815. 31 FX 0 FY -0.254 FZ 0.056
1816. 32 FX -0.08 FY -0.523 FZ 1.185
1817. 33 FX -1.101 FY 1.193 FZ 1.288
1818. 34 FX 1.535 FY -0.434 FZ 1.195
1819. 35 FX 0 FY 0.295 FZ 0.477
1820. 36 FX 0 FY 0.255 FZ 0.061
1821. 37 FX 0 FY -0.574 FZ 0.145
1822. 38 FX -2.502 FY -0.216 FZ 0.003
1823. 39 FX 2.29 FY -0.042 FZ 0.079
1824. 40 FX 0 FY -0.008 FZ 0.004
1825. 41 FX 0.013 FY -0.854 FZ 0.036
1826. 42 FX 0.017 FY 0.656 FZ 0.08
1827. LOAD 11 WIND LOAD (+X) (WL(+X))
1828. JOINT LOAD
1829. 1 FX 0.151 FY -0.066 FZ -0.041
1830. 2 FX 0.151 FY -0.19 FZ -0.15
1831. 3 FX 0.152 FY -0.135 FZ -0.035
1832. 4 FX 3.007 FY 4.151 FZ -0.025
1833. 5 FX 3.12 FY -4.287 FZ 0
1834. 6 FX 0.121 FY -0.842 FZ -0.222
1835. 7 FX 0.152 FY 0.135 FZ -0.035
1836. 8 FX 2.055 FY 3.062 FZ -0.025
1837. 9 FX 2.309 FY -3.787 FZ -0.348
1838. 10 FX 0.15 FY 0.873 FZ -0.225
1839. 11 FX 0.152 FY -0.057 FZ -0.035
1840. 12 FX 0.074 FY 0.834 FZ -0.328
1841. 13 FX 0.079 FY -0.003 FZ -0.005
1842. 14 FX 0.152 FY 0.508 FZ -0.027
1843. 15 FX 0.152 FY 0.19 FZ -0.137
1844. 18 FX 0.168 FY -0.948 FZ -0.483 MX -2.565
1845. 21 FX 0.152 FY 0.057 FZ -0.035
1846. 22 FX 0.152 FY 1.164 FZ -0.081
1847. 25 FX 0.166 FY -0.75 FZ 0.288 MX 1.054
1848. 28 FX -0.118 FY 1.621 FZ 0.575
1849. 29 FX 1.876 FY 2.671 FZ 0.011
1850. 30 FX 1.466 FY 1.269 FZ 0.38
1851. 31 FX 0.151 FY -0.234 FZ 0.04
1852. 32 FX -0.155 FY -2.48 FZ 0.628
1853. 33 FX 1.083 FY 0.362 FZ -0.267

1854. 34 FX 1.62 FY -5.817 FZ 0.432
1855. 35 FX 0.152 FY 0.19 FZ -0.235
1856. 36 FX 0.151 FY 0.008 FZ 0.002
1857. 37 FX 0.151 FY 0.137 FZ -0.04
1858. 38 FX 6.537 FY 12.231 FZ 0
1859. 39 FX 6.09 FY -12.191 FZ -0.006
1860. 40 FX 0.152 FY 0.154 FZ -0.001
1861. 41 FX 0.126 FY 11.065 FZ 0.279
1862. 42 FX 0.127 FY -9.752 FZ -0.201
1863. LOAD 12 WIND LOAD (+Z) (WL(+Z))
1864. JOINT LOAD
1865. 1 FX 0 FY 0.658 FZ 0.627
1866. 2 FX 0 FY 0.84 FZ 0.765
1867. 3 FX 0 FY 0.481 FZ 0.224
1868. 4 FX -2.504 FY -3.311 FZ 0.212
1869. 5 FX -2.497 FY 3.653 FZ 0.129
1870. 6 FX -0.002 FY 0.854 FZ 0.289
1871. 7 FX 0 FY -0.481 FZ 0.196
1872. 8 FX 2.415 FY 3.016 FZ 0.161
1873. 9 FX 2.182 FY 1.136 FZ 1.789
1874. 10 FX -0.005 FY -0.885 FZ 0.306
1875. 11 FX 0 FY 0.334 FZ 0.279
1876. 12 FX 0.022 FY -4.413 FZ 2.117
1877. 13 FX 0.055 FY -0.049 FZ 0.12
1878. 14 FX 0 FY 0.967 FZ 1.095
1879. 15 FX 0 FY -0.838 FZ 0.674
1880. 18 FX -0.016 FY 0.355 FZ 0.776 MX 7.362
1881. 21 FX 0 FY -0.334 FZ 0.279
1882. 22 FX 0 FY -0.478 FZ 1.258
1883. 25 FX -0.002 FY 2.248 FZ 2.147 MX 9.17
1884. 28 FX 0.04 FY 8.361 FZ 1.83
1885. 29 FX 0.227 FY 7.109 FZ 1.827
1886. 30 FX -0.68 FY 7.792 FZ 1.563
1887. 31 FX 0 FY -2.589 FZ 0.467
1888. 32 FX 0.062 FY -8.387 FZ 1.84
1889. 33 FX -0.153 FY -5.443 FZ 1.823
1890. 34 FX 0.187 FY -5.123 FZ 1.397
1891. 35 FX 0 FY -0.008 FZ 1.359
1892. 36 FX 0 FY 0.484 FZ 0.188
1893. 37 FX 0 FY -1.137 FZ 0.354
1894. 38 FX 0.553 FY 0.73 FZ 0.077
1895. 39 FX 0.191 FY -1.218 FZ 0.182
1896. 40 FX 0 FY -0.39 FZ 0.07
1897. 41 FX 0.001 FY -2.179 FZ -0.127
1898. 42 FX 0.001 FY -2.156 FZ -0.116
1899. LOAD 13 TEMPERATURE LOAD (TL)(-VE)
1900. JOINT LOAD
1901. 1 FX 0 FY 0.154 FZ 0.11
1902. 2 FX 0 FY 0.116 FZ 0.13
1903. 3 FX 0 FY 0.12 FZ 0.034
1904. 4 FX 3.47 FY -0.331 FZ 0.029
1905. 5 FX -4.065 FY 0.429 FZ 0.002
1906. 6 FX -0.006 FY 0.366 FZ 1.308
1907. 7 FX 0 FY -0.12 FZ 0.027
1908. 8 FX 4.015 FY 0.284 FZ 0.023
1909. 9 FX -3.485 FY -0.443 FZ 1.065
1910. 10 FX 0 FY -0.361 FZ -1.127
1911. 11 FX 0 FY -0.053 FZ -0.02
1912. 12 FX -0.009 FY 0.019 FZ -1.109
1913. 13 FX -0.021 FY 0.036 FZ -0.001
1914. 14 FX 0 FY -0.15 FZ 0.016
1915. 15 FX 0 FY -0.116 FZ 0.044
1916. 18 FX 0.028 FY -0.022 FZ -0.039 MX -0.207
1917. 21 FX 0 FY 0.053 FZ -0.045
1918. 22 FX 0 FY -0.184 FZ -0.219
1919. 25 FX 0.025 FY -0.274 FZ -0.265 MX -0.958
1920. 28 FX 0.049 FY -0.579 FZ 0.961
1921. 29 FX 1.168 FY -0.545 FZ 1.252
1922. 30 FX -1.425 FY 1.106 FZ 1.453
1923. 31 FX 0 FY 0.254 FZ -0.056
1924. 32 FX 0.08 FY 0.523 FZ -1.185
1925. 33 FX 1.101 FY -1.193 FZ -1.288

```
1926. 34 FX -1.535 FY 0.434 FZ -1.195
1927. 35 FX 0 FY -0.295 FZ -0.477
1928. 36 FX 0 FY -0.255 FZ -0.061
1929. 37 FX 0 FY 0.574 FZ -0.145
1930. 38 FX 2.502 FY 0.216 FZ -0.003
1931. 39 FX -2.29 FY 0.042 FZ -0.079
1932. 40 FX 0 FY 0.008 FZ -0.004
1933. 41 FX -0.013 FY 0.854 FZ -0.036
1934. 42 FX -0.017 FY -0.656 FZ -0.08
1935. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**2093**	**NUMBER OF MEMBERS**	**34**
NUMBER OF PLATES	**1661**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**2059**

SOLVER USED IS THE IN-CORE ADVANCED MATH SOLVER

TOTAL PRIMARY LOAD CASES = 13, TOTAL DEGREES OF FREEDOM = 6381
TOTAL LOAD COMBINATION CASES = 0 SO FAR.

```
1936. CHANGE
1937. SUPPORTS
1938. 1000 TO 2660 PLATE MAT DIRECT Y SUBGRADE 8040 COMPRESSION
1939. ***UNFACTORED LOAD COMBINATION***
1940. ***FOR STRESS CALCULATION***
1941. LOAD 100 DL+CTL+PVL+TEQL
1942. REPEAT LOAD
1943. 1 1.0 5 1.0 6 1.0 4 1.0
1944. ***
1945. LOAD 101 DL+OEQL+CTL+PVL+PHL(+X)
1946. REPEAT LOAD
1947. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0
1948. LOAD 102 DL+OEQL+CTL+PVL+PHL(+Z)
1949. REPEAT LOAD
1950. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0
1951. LOAD 103 DL+OEQL+CTL+PVL-PHL(+X)
1952. REPEAT LOAD
1953. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0
1954. LOAD 104 DL+OEQL+CTL+PVL-PHL(+Z)
1955. REPEAT LOAD
1956. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0
1957. ***
1958. LOAD 105 DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+VE)
1959. REPEAT LOAD
1960. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 2 1.0 10 1.0
1961. LOAD 106 DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+VE)
1962. REPEAT LOAD
1963. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 2 1.0 10 1.0
1964. LOAD 107 DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+VE)
1965. REPEAT LOAD
1966. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 2 1.0 10 1.0
1967. LOAD 108 DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+VE)
1968. REPEAT LOAD
1969. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 2 1.0 10 1.0
1970. LOAD 109 DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-VE)
1971. REPEAT LOAD
1972. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 2 1.0 13 1.0
1973. LOAD 110 DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-VE)
1974. REPEAT LOAD
1975. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 2 1.0 13 1.0
1976. LOAD 111 DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE)
1977. REPEAT LOAD
1978. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 2 1.0 13 1.0
```

```
1980. REPEAT LOAD
1981. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 2 1.0 13 1.0
1982. ***
1983. LOAD 113 DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(+VE))
1984. REPEAT LOAD
1985. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 2 0.75 10 0.75
1986. LOAD 114 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(+VE))
1987. REPEAT LOAD
1988. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 2 0.75 10 0.75
1989. LOAD 115 DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(+VE))
1990. REPEAT LOAD
1991. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 2 0.75 10 0.75
1992. LOAD 116 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(+VE))
1993. REPEAT LOAD
1994. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 2 0.75 10 0.75
1995. LOAD 117 DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(-VE))
1996. REPEAT LOAD
1997. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 2 0.75 13 0.75
1998. LOAD 118 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(-VE))
1999. REPEAT LOAD
2000. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 2 0.75 13 0.75
2001. LOAD 119 DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(-VE))
2002. REPEAT LOAD
2003. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 2 0.75 13 0.75
2004. LOAD 120 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(-VE))
2005. REPEAT LOAD
2006. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 2 0.75 13 0.75
2007. ***
2008. LOAD 121 DL+OEQL+CTL+PVL+PHL(+X)+WL(+X)
2009. REPEAT LOAD
2010. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 11 1.0
2011. LOAD 122 DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z)
2012. REPEAT LOAD
2013. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 12 1.0
2014. LOAD 123 DL+OEQL+CTL+PVL+PHL(+X)-WL(+X)
2015. REPEAT LOAD
2016. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 11 -1.0
2017. LOAD 124 DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z)
2018. REPEAT LOAD
2019. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 12 -1.0
2020. ***
2021. LOAD 125 DL+OEQL+CTL+PVL-PHL(+X)+WL(+X)
2022. REPEAT LOAD
2023. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 11 1.0
2024. LOAD 126 DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z)
2025. REPEAT LOAD
2026. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 12 1.0
2027. LOAD 127 DL+OEQL+CTL+PVL-PHL(+X)-WL(+X)
2028. REPEAT LOAD
2029. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 11 -1.0
2030. LOAD 128 DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z)
2031. REPEAT LOAD
2032. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 12 -1.0
2033. ***
2034. LOAD 129 DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X)
2035. REPEAT LOAD
2036. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 11 1.0
2037. LOAD 130 DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z)
2038. REPEAT LOAD
2039. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 12 1.0
2040. LOAD 131 DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X)
2041. REPEAT LOAD
2042. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 11 -1.0
2043. LOAD 132 DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z)
2044. REPEAT LOAD
2045. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 12 -1.0
2046. ***
2047. LOAD 133 DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X)
2048. REPEAT LOAD
2049. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 11 1.0
2050. LOAD 134 DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z)
2051. REPEAT LOAD
```

```
2052. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 12 1.0
2053. LOAD 135 DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X)
2054. REPEAT LOAD
2055. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 11 -1.0
2056. LOAD 136 DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z)
2057. REPEAT LOAD
2058. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 12 -1.0
2059. ***
2060. LOAD 137 DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+X)+0.75*LL
2061. REPEAT LOAD
2062. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 11 0.75 2 0.75
2063. LOAD 138 DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+Z)+0.75*LL
2064. REPEAT LOAD
2065. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 12 0.75 2 0.75
2066. LOAD 139 DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+X)+0.75*LL
2067. REPEAT LOAD
2068. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 11 -0.75 2 0.75
2069. LOAD 140 DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+Z)+0.75*LL
2070. REPEAT LOAD
2071. 1 1.0 3 1.0 5 1.0 6 1.0 7 1.0 12 -0.75 2 0.75
2072. ***
2073. LOAD 141 DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+X)+0.75*LL
2074. REPEAT LOAD
2075. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 11 0.75 2 0.75
2076. LOAD 142 DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+Z)+0.75*LL
2077. REPEAT LOAD
2078. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 12 0.75 2 0.75
2079. LOAD 143 DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+X)+0.75*LL
2080. REPEAT LOAD
2081. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 11 -0.75 2 0.75
2082. LOAD 144 DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+Z)+0.75*LL
2083. REPEAT LOAD
2084. 1 1.0 3 1.0 5 1.0 6 1.0 7 -1.0 12 -0.75 2 0.75
2085. ***
2086. LOAD 145 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+X)+0.75*LL
2087. REPEAT LOAD
2088. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 11 0.75 2 0.75
2089. LOAD 146 DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+Z)+0.75*LL
2090. REPEAT LOAD
2091. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 12 0.75 2 0.75
2092. LOAD 147 DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+X)+0.75*LL
2093. REPEAT LOAD
2094. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 11 -0.75 2 0.75
2095. LOAD 148 DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+Z)+0.75*LL
2096. REPEAT LOAD
2097. 1 1.0 3 1.0 5 1.0 6 1.0 8 1.0 12 -0.75 2 0.75
2098. ***
2099. LOAD 149 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+X)+0.75*LL
2100. REPEAT LOAD
2101. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 11 0.75 2 0.75
2102. LOAD 150 DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+Z)+0.75*LL
2103. REPEAT LOAD
2104. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 12 0.75 2 0.75
2105. LOAD 151 DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+X)+0.75*LL
2106. REPEAT LOAD
2107. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 11 -0.75 2 0.75
2108. LOAD 152 DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+Z)+0.75*LL
2109. REPEAT LOAD
2110. 1 1.0 3 1.0 5 1.0 6 1.0 8 -1.0 12 -0.75 2 0.75
2111. ***
2112. LOAD 153 0.6*(DL+OEQL+CTL)+WL(+X)
2113. REPEAT LOAD
2114. 1 0.6 3 0.6 5 0.6 11 1.0
2115. LOAD 154 0.6*(DL+OEQL+CTL)+WL(+Z)
2116. REPEAT LOAD
2117. 1 0.6 3 0.6 5 0.6 12 1.0
2118. LOAD 155 0.6*(DL+OEQL+CTL)-WL(+X)
2119. REPEAT LOAD
2120. 1 0.6 3 0.6 5 0.6 11 -1.0
2121. LOAD 156 0.6*(DL+OEQL+CTL)-WL(+Z)
2122. REPEAT LOAD
2123. 1 0.6 3 0.6 5 0.6 12 -1.0
```

```
***FACTORED LOAD COMBINATION***
***FOR STRENGTH CALCULATION***
LOAD 200 1.4*(DL+CTL+PVL+TEQL)
REPEAT LOAD
1 1.4 5 1.4 6 1.4 4 1.4
***
LOAD 201 1.4*(DL+OEQL+CTL+PVL+PHL(+X))
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 1.4
LOAD 202 1.4*(DL+OEQL+CTL+PVL+PHL(+Z))
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 1.4
LOAD 203 1.4*(DL+OEQL+CTL+PVL-PHL(+X))
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 -1.4
LOAD 204 1.4*(DL+OEQL+CTL+PVL-PHL(+Z))
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 -1.4
***
LOAD 205 1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 1.4 10 1.4 2 1.7
LOAD 206 1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 1.4 10 1.4 2 1.7
LOAD 207 1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 -1.4 10 1.4 2 1.7
LOAD 208 1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 -1.4 10 1.4 2 1.7
LOAD 209 1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 1.4 13 1.4 2 1.7
LOAD 210 1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 1.4 13 1.4 2 1.7
LOAD 211 1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 7 -1.4 13 1.4 2 1.7
LOAD 212 1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-VE))+1.7*LL
REPEAT LOAD
1 1.4 3 1.4 5 1.4 6 1.4 8 -1.4 13 1.4 2 1.7
***
LOAD 213 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*LL
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 2 0.5
LOAD 214 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*LL
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 2 0.5
LOAD 215 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*LL
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 2 0.5
LOAD 216 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*LL
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 2 0.5
***
LOAD 217 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*WL(+X)
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 11 0.8
LOAD 218 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*WL(+Z)
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 12 0.8
LOAD 219 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*WL(+X)
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 11 -0.8
LOAD 220 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*WL(+Z)
REPEAT LOAD
1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 12 -0.8
***
LOAD 221 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)+0.5*LL
REPEAT LOAD
```

```
2196. 1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 11 1.6 2 0.5
2197. LOAD 222 1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)+0.5*LL
2198. REPEAT LOAD
2199. 1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 12 1.6 2 0.5
2200. LOAD 223 1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)+0.5*LL
2201. REPEAT LOAD
2202. 1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 11 -1.6 2 0.5
2203. LOAD 224 1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)+0.5*LL
2204. REPEAT LOAD
2205. 1 1.2 3 1.2 5 1.2 6 1.2 7 1.2 12 -1.6 2 0.5
2206. ***
2207. LOAD 225 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)+0.5*LL
2208. REPEAT LOAD
2209. 1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 11 1.6 2 0.5
2210. LOAD 226 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)+0.5*LL
2211. REPEAT LOAD
2212. 1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 12 1.6 2 0.5
2213. LOAD 227 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)+0.5*LL
2214. REPEAT LOAD
2215. 1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 11 -1.6 2 0.5
2216. LOAD 228 1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)+0.5*LL
2217. REPEAT LOAD
2218. 1 1.2 3 1.2 5 1.2 6 1.2 8 1.2 12 -1.6 2 0.5
2219. ***
2220. LOAD 229 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)+0.5*LL
2221. REPEAT LOAD
2222. 1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 11 1.6 2 0.5
2223. LOAD 230 1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)+0.5*LL
2224. REPEAT LOAD
2225. 1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 12 1.6 2 0.5
2226. LOAD 231 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)+0.5*LL
2227. REPEAT LOAD
2228. 1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 11 -1.6 2 0.5
2229. LOAD 232 1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)+0.5*LL
2230. REPEAT LOAD
2231. 1 1.2 3 1.2 5 1.2 6 1.2 7 -1.2 12 -1.6 2 0.5
2232. ***
2233. LOAD 233 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)+0.5*LL
2234. REPEAT LOAD
2235. 1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 11 1.6 2 0.5
2236. LOAD 234 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)+0.5*LL
2237. REPEAT LOAD
2238. 1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 12 1.6 2 0.5
2239. LOAD 235 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)+0.5*LL
2240. REPEAT LOAD
2241. 1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 11 -1.6 2 0.5
2242. LOAD 236 1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)+0.5*LL
2243. REPEAT LOAD
2244. 1 1.2 3 1.2 5 1.2 6 1.2 8 -1.2 12 -1.6 2 0.5
2245. ***
2246. LOAD 237 0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)
2247. REPEAT LOAD
2248. 1 0.9 3 0.9 5 0.9 6 0.9 7 0.9 11 -1.6
2249. LOAD 238 0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)
2250. REPEAT LOAD
2251. 1 0.9 3 0.9 5 0.9 6 0.9 7 0.9 12 -1.6
2252. LOAD 239 0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)
2253. REPEAT LOAD
2254. 1 0.9 3 0.9 5 0.9 6 0.9 7 0.9 11 -1.6
2255. LOAD 240 0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)
2256. REPEAT LOAD
2257. 1 0.9 3 0.9 5 0.9 6 0.9 7 0.9 12 -1.6
2258. ***
2259. LOAD 241 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)
2260. REPEAT LOAD
2261. 1 0.9 3 0.9 5 0.9 6 0.9 8 0.9 11 -1.6
2262. LOAD 242 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)
2263. REPEAT LOAD
2264. 1 0.9 3 0.9 5 0.9 6 0.9 8 0.9 12 -1.6
2265. LOAD 243 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)
2266. REPEAT LOAD
```

```
2268. LOAD 244 0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)
2269. REPEAT LOAD
2270. 1 0.9 3 0.9 5 0.9 6 0.9 8 0.9 12 -1.6
2271. ***
2272. LOAD 245 0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)
2273. REPEAT LOAD
2274. 1 0.9 3 0.9 5 0.9 6 0.9 7 -0.9 11 -1.6
2275. LOAD 246 0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)
2276. REPEAT LOAD
2277. 1 0.9 3 0.9 5 0.9 6 0.9 7 -0.9 12 -1.6
2278. LOAD 247 0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)
2279. REPEAT LOAD
2280. 1 0.9 3 0.9 5 0.9 6 0.9 7 -0.9 11 -1.6
2281. LOAD 248 0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)
2282. REPEAT LOAD
2283. 1 0.9 3 0.9 5 0.9 6 0.9 7 -0.9 12 -1.6
2284. ***
2285. LOAD 249 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)
2286. REPEAT LOAD
2287. 1 0.9 3 0.9 5 0.9 6 0.9 8 -0.9 11 -1.6
2288. LOAD 250 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)
2289. REPEAT LOAD
2290. 1 0.9 3 0.9 5 0.9 6 0.9 8 -0.9 12 -1.6
2291. LOAD 251 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)
2292. REPEAT LOAD
2293. 1 0.9 3 0.9 5 0.9 6 0.9 8 -0.9 11 -1.6
2294. LOAD 252 0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)
2295. REPEAT LOAD
2296. 1 0.9 3 0.9 5 0.9 6 0.9 8 -0.9 12 -1.6
2297. PERFORM ANALYSIS PRINT STATICS CHECK

**NOTE-Tension/Compression converged after  1 iterations, Case=  100



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   100
        DL+CTL+PVL+TEQL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.120930208E+02
                      Y =  0.911732891E+03
                      Z =  0.131519993E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   100 )
     SUMMATION FORCE-X =           0.01
     SUMMATION FORCE-Y =       -1017.25
     SUMMATION FORCE-Z =          -0.17

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       13224.44  MY=           0.61  MZ=      -12315.32


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   100 )
     SUMMATION FORCE-X =          -0.01
     SUMMATION FORCE-Y =        1017.25
     SUMMATION FORCE-Z =           0.17

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -13224.44  MY=          -0.61  MZ=       12315.32


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    100)
           MAXIMUMS    AT NODE
    X = -1.09224E-01       8
    Y = -3.64527E-01     690
    Z = -4.71767E-01      22
    RX= -1.61116E-03      22
    RY=  0.00000E+00       0
```

RZ= 4.02979E-04 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 101
DL+OEQL+CTL+PVL+PHL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.140243254E+02
Y = 0.913700001E+03
Z = 0.151103333E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126054016E+02
Y = 0.911623661E+03
Z = 0.131828770E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 101)
SUMMATION FORCE-X = 13.61
SUMMATION FORCE-Y = -963.74
SUMMATION FORCE-Z = -0.16

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 12556.78 MY= 201.41 MZ= -24582.81

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 101)
SUMMATION FORCE-X = -13.61
SUMMATION FORCE-Y = 963.74
SUMMATION FORCE-Z = 0.16

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -12556.78 MY= -201.41 MZ= 24582.81

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 101)

	MAXIMUMS	AT NODE
X =	2.51966E-01	9
Y =	-2.13989E-01	690
Z =	-3.30190E-01	22
RX=	-1.12765E-03	22
RY=	0.00000E+00	0
RZ=	-9.77350E-04	39

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 102
DL+OEQL+CTL+PVL+PHL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125044466E+02
Y = 0.911623620E+03
Z = 0.132789678E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 102)

```
     SUMMATION FORCE-Y =        -963.72
     SUMMATION FORCE-Z =          12.36

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       24090.49  MY=        -155.57  MZ=      -12267.28


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   102 )
     SUMMATION FORCE-X =          -0.24
     SUMMATION FORCE-Y =         963.72
     SUMMATION FORCE-Z =         -12.36

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -24090.49  MY=         155.57  MZ=       12267.28


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    102)
          MAXIMUMS    AT NODE
   X = -1.93287E-01       4
   Y = -1.75947E-01     690
   Z =  1.91042E-01      14
   RX=  7.07605E-04      25
   RY=  0.00000E+00       0
   RZ=  7.20608E-04       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  103



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   103
        DL+OEQL+CTL+PVL-PHL(+X)


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.117472270E+02
                     Y =  0.913700001E+03
                     Z =  0.147964097E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124031292E+02
                     Y =  0.911623554E+03
                     Z =  0.131835228E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   103 )
     SUMMATION FORCE-X =         -13.17
     SUMMATION FORCE-Y =        -963.69
     SUMMATION FORCE-Z =           0.04

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       12737.66  MY=        -195.34  MZ=          77.98


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   103 )
     SUMMATION FORCE-X =          13.17
     SUMMATION FORCE-Y =         963.69
     SUMMATION FORCE-Z =          -0.04

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -12737.66  MY=         195.34  MZ=         -77.98


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    103)
          MAXIMUMS    AT NODE
   X = -2.45655E-01       8
   Y = -2.00162E-01     690
   Z = -3.12873E-01      22
```

```
      RX= -1.06851E-03      22
      RY=  0.00000E+00       0
      RZ=  9.56883E-04      38


  **NOTE-Tension/Compression converged after  1 iterations, Case=  104



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   104
          DL+OEQL+CTL+PVL-PHL(+Z)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.125040895E+02
                       Y =  0.911623595E+03
                       Z =  0.130874308E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   104 )
       SUMMATION FORCE-X =           0.20
       SUMMATION FORCE-Y =        -963.70
       SUMMATION FORCE-Z =         -12.49

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=        1203.95  MY=         161.64  MZ=      -12237.55


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   104 )
       SUMMATION FORCE-X =          -0.20
       SUMMATION FORCE-Y =         963.70
       SUMMATION FORCE-Z =          12.49

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -1203.95  MY=        -161.64  MZ=       12237.55


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    104)
             MAXIMUMS    AT NODE
      X =  1.98008E-01       5
      Y = -2.38204E-01     690
      Z = -4.57259E-01      22
      RX= -1.56161E-03      22
      RY=  0.00000E+00       0
      RZ= -7.37602E-04       5

*** LOAD CASE   105 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  105



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   105
          DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(+VE)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.126262746E+02
                       Y =  0.912007090E+03
                       Z =  0.131133979E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   105 )
       SUMMATION FORCE-X =          13.94
       SUMMATION FORCE-Y =       -1182.01
       SUMMATION FORCE-Z =           0.82

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
```

```
      MX=       16252.17  MY=         206.90  MZ=      -27665.04


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   105 )
       SUMMATION FORCE-X =         -13.94
       SUMMATION FORCE-Y =        1182.01
       SUMMATION FORCE-Z =          -0.82

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -16252.17  MY=        -206.90  MZ=       27665.04


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    105)
             MAXIMUMS    AT NODE
      X =  8.21183E-01       5
      Y = -2.61428E-01     746
      Z = -5.98830E-01       2
      RX= -2.03561E-03       2
      RY=  0.00000E+00       0
      RZ= -3.01678E-03       5

*** LOAD CASE   106 -- START ITERATION NO.   2
*** LOAD CASE   106 -- START ITERATION NO.   3

  **NOTE-Tension/Compression converged after  3 iterations, Case=  106



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   106
          DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(+VE)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.125439631E+02
                       Y =  0.912007063E+03
                       Z =  0.131917426E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   106 )
       SUMMATION FORCE-X =           0.57
       SUMMATION FORCE-Y =       -1181.99
       SUMMATION FORCE-Z =          13.34

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       27785.87  MY=        -150.08  MZ=      -15349.51


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   106 )
       SUMMATION FORCE-X =          -0.57
       SUMMATION FORCE-Y =        1181.99
       SUMMATION FORCE-Z =         -13.34

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -27785.87  MY=         150.08  MZ=       15349.51


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    106)
             MAXIMUMS    AT NODE
      X =  6.86674E-01       9
      Y = -2.37777E-01     746
      Z = -5.10372E-01       2
      RX= -1.73491E-03       2
      RY=  0.00000E+00       0
      RZ= -2.53201E-03       9

*** LOAD CASE   107 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  107
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 107
DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(+VE)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124613574E+02
Y = 0.912007018E+03
Z = 0.131139214E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 107)
SUMMATION FORCE-X = -12.83
SUMMATION FORCE-Y = -1181.96
SUMMATION FORCE-Z = 1.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 16433.04 MY= -189.86 MZ= -3004.25

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 107)
SUMMATION FORCE-X = 12.83
SUMMATION FORCE-Y = 1181.96
SUMMATION FORCE-Z = -1.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -16433.04 MY= 189.86 MZ= 3004.25

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 107)

	MAXIMUMS	AT NODE
X =	-8.43673E-01	8
Y =	-2.58693E-01	746
Z =	-5.81231E-01	2
RX=	-1.97578E-03	2
RY=	0.00000E+00	0
RZ=	3.10390E-03	8

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 108
DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(+VE)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125436724E+02
Y = 0.912007046E+03
Z = 0.130355759E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 108)
SUMMATION FORCE-X = 0.54
SUMMATION FORCE-Y = -1181.98
SUMMATION FORCE-Z = -11.50

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 4899.34 MY= 167.12 MZ= -15319.78

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 108)
SUMMATION FORCE-X = -0.54
SUMMATION FORCE-Y = 1181.98
SUMMATION FORCE-Z = 11.50

SUMMATION OF MOMENTS AROUND THE ORIGIN-

MX= -4899.34 MY= -167.12 MZ= 15319.78

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 108)

	MAXIMUMS	AT NODE
X =	-7.90943E-01	8
Y =	-2.82344E-01	746
Z =	-6.69690E-01	2
RX=	-2.27648E-03	2
RY=	0.00000E+00	0
RZ=	2.92772E-03	8

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 109
DL+OEQL+CTL+PVL+PHL(+X)+LL+TL(-VE)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126227462E+02
Y = 0.912007058E+03
Z = 0.131058644E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 109)
SUMMATION FORCE-X = 13.09
SUMMATION FORCE-Y = -1181.99
SUMMATION FORCE-Z = -1.14

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 14452.12 MY= 193.39 MZ= -26878.46

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 109)
SUMMATION FORCE-X = -13.09
SUMMATION FORCE-Y = 1181.99
SUMMATION FORCE-Z = 1.14

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -14452.12 MY= -193.39 MZ= 26878.47

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 109)

	MAXIMUMS	AT NODE
X =	5.11691E-01	4
Y =	-2.79797E-01	746
Z =	-6.37448E-01	22
RX=	-2.17698E-03	22
RY=	0.00000E+00	0
RZ=	-1.88401E-03	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 110
DL+OEQL+CTL+PVL+PHL(+Z)+LL+TL(-VE)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125404332E+02
Y = 0.912007031E+03
Z = 0.131842105E+02

```
***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   110 )
    SUMMATION FORCE-X =          -0.28
    SUMMATION FORCE-Y =       -1181.97
    SUMMATION FORCE-Z =          11.38

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       25985.83  MY=        -163.59  MZ=      -14562.94


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   110 )
    SUMMATION FORCE-X =           0.28
    SUMMATION FORCE-Y =        1181.97
    SUMMATION FORCE-Z =         -11.38

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -25985.83  MY=         163.59  MZ=       14562.94


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    110)
          MAXIMUMS    AT NODE
   X = -4.89110E-01       5
   Y = -2.56146E-01     746
   Z = -4.93062E-01      22
   RX= -1.68388E-03      22
   RY=  0.00000E+00       0
   RZ=  1.81413E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  111



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   111
        DL+OEQL+CTL+PVL-PHL(+X)+LL+TL(-VE)


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124578259E+02
                     Y =  0.912006987E+03
                     Z =  0.131063877E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   111 )
    SUMMATION FORCE-X =         -13.69
    SUMMATION FORCE-Y =       -1181.94
    SUMMATION FORCE-Z =          -0.94

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       14633.00  MY=        -203.36  MZ=       -2217.68


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   111 )
    SUMMATION FORCE-X =          13.69
    SUMMATION FORCE-Y =        1181.94
    SUMMATION FORCE-Z =           0.94

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -14633.00  MY=         203.36  MZ=        2217.68


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    111)
          MAXIMUMS    AT NODE
   X = -5.37813E-01       5
   Y = -2.77062E-01     746
   Z = -6.20131E-01      22
   RX= -2.11784E-03      22
   RY=  0.00000E+00       0
   RZ=  1.98187E-03       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 112
DL+OEQL+CTL+PVL-PHL(+Z)+LL+TL(-VE)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125401424E+02
Y = 0.912007014E+03
Z = 0.130280408E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 112)
SUMMATION FORCE-X = -0.32
SUMMATION FORCE-Y = -1181.96
SUMMATION FORCE-Z = -13.46

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 3099.30 MY= 153.62 MZ= -14533.21

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 112)
SUMMATION FORCE-X = 0.32
SUMMATION FORCE-Y = 1181.96
SUMMATION FORCE-Z = 13.46

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -3099.30 MY= -153.62 MZ= 14533.21

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 112)

	MAXIMUMS	AT NODE
X =	4.68621E-01	4
Y =	-3.00712E-01	746
Z =	-7.64516E-01	22
RX=	-2.61094E-03	22
RY=	0.00000E+00	0
RZ=	-1.73754E-03	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 113
DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(+VE))

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126218140E+02
Y = 0.911925152E+03
Z = 0.131282455E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 113)
SUMMATION FORCE-X = 13.86
SUMMATION FORCE-Y = -1127.44
SUMMATION FORCE-Z = 0.58

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 15328.32 MY= 205.53 MZ= -26894.48

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 113)
SUMMATION FORCE-X = -13.86

```
     SUMMATION FORCE-Y =        1127.44
     SUMMATION FORCE-Z =          -0.58

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -15328.32  MY=        -205.53  MZ=       26894.48


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    113)
          MAXIMUMS    AT NODE
    X =  6.76012E-01       5
    Y = -2.43473E-01     746
    Z = -5.08751E-01       2
    RX= -1.72940E-03       2
    RY=  0.00000E+00       0
    RZ= -2.48407E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  114



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   114
        DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(+VE))


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125355185E+02
                     Y =  0.911925122E+03
                     Z =  0.132103825E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   114 )
     SUMMATION FORCE-X =           0.49
     SUMMATION FORCE-Y =       -1127.42
     SUMMATION FORCE-Z =          13.10

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       26862.03  MY=        -151.46  MZ=      -14578.96


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   114 )
     SUMMATION FORCE-X =          -0.49
     SUMMATION FORCE-Y =        1127.42
     SUMMATION FORCE-Z =         -13.10

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -26862.03  MY=         151.46  MZ=       14578.96


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    114)
          MAXIMUMS    AT NODE
    X =  5.58177E-01       9
    Y = -2.19822E-01     746
    Z = -4.20293E-01       2
    RX= -1.42870E-03       2
    RY=  0.00000E+00       0
    RZ= -2.06121E-03       9


**NOTE-Tension/Compression converged after  1 iterations, Case=  115



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   115
        DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(+VE))


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)
```

```
                    X =  0.124489142E+02
                    Y =  0.911925073E+03
                    Z =  0.131287951E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   115 )
    SUMMATION FORCE-X =         -12.92
    SUMMATION FORCE-Y =       -1127.39
    SUMMATION FORCE-Z =           0.77

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       15509.20  MY=        -191.23  MZ=       -2233.70


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   115 )
    SUMMATION FORCE-X =          12.92
    SUMMATION FORCE-Y =        1127.39
    SUMMATION FORCE-Z =          -0.77

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -15509.20  MY=         191.23  MZ=        2233.69


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    115)
          MAXIMUMS    AT NODE
   X = -6.92143E-01       8
   Y = -2.40738E-01     746
   Z = -4.91152E-01       2
   RX= -1.66958E-03       2
   RY=  0.00000E+00       0
   RZ=  2.54719E-03       8


**NOTE-Tension/Compression converged after  1 iterations, Case=  116



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   116
        DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(+VE))


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.125352136E+02
                    Y =  0.911925103E+03
                    Z =  0.130466572E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   116 )
    SUMMATION FORCE-X =           0.46
    SUMMATION FORCE-Y =       -1127.41
    SUMMATION FORCE-Z =         -11.75

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=        3975.49  MY=         165.75  MZ=      -14549.22


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   116 )
    SUMMATION FORCE-X =          -0.46
    SUMMATION FORCE-Y =        1127.41
    SUMMATION FORCE-Z =          11.75

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       -3975.49  MY=        -165.75  MZ=       14549.22


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    116)
          MAXIMUMS    AT NODE
   X = -6.42114E-01       8
   Y = -2.64389E-01     746
```

```
    RX= -2.08608E-03      22
    RY=  0.00000E+00       0
    RZ=  2.37945E-03       8
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 117

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   117
        DL+OEQL+CTL+PVL+PHL(+X)+0.75*(LL+TL(-VE))

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.126190396E+02
                     Y =  0.911925126E+03
                     Z =  0.131223222E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   117 )
     SUMMATION FORCE-X =          13.22
     SUMMATION FORCE-Y =       -1127.43
     SUMMATION FORCE-Z =          -0.89

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       13978.29  MY=         195.40  MZ=      -26304.55


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   117 )
     SUMMATION FORCE-X =         -13.22
     SUMMATION FORCE-Y =        1127.43
     SUMMATION FORCE-Z =           0.89

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -13978.29  MY=        -195.40  MZ=       26304.55


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    117)
           MAXIMUMS    AT NODE
    X =  4.11140E-01       4
    Y = -2.57250E-01     746
    Z = -5.60633E-01      22
    RX= -1.91465E-03      22
    RY=  0.00000E+00       0
    RZ= -1.51471E-03       4
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   118
        DL+OEQL+CTL+PVL+PHL(+Z)+0.75*(LL+TL(-VE))

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125327427E+02
                     Y =  0.911925096E+03
                     Z =  0.132044603E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   118 )
     SUMMATION FORCE-X =          -0.15
     SUMMATION FORCE-Y =       -1127.41
     SUMMATION FORCE-Z =          11.63

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       25511.99  MY=        -161.58  MZ=      -13989.02
```

```
 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   118 )
     SUMMATION FORCE-X =           0.15
     SUMMATION FORCE-Y =        1127.41
     SUMMATION FORCE-Z =         -11.63

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -25511.99  MY=         161.58  MZ=       13989.02


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    118)
           MAXIMUMS    AT NODE
    X = -3.82832E-01       5
    Y = -2.33599E-01     746
    Z = -4.16248E-01      22
    RX= -1.42155E-03      22
    RY=  0.00000E+00       0
    RZ=  1.42305E-03       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   119
         DL+OEQL+CTL+PVL-PHL(+X)+0.75*(LL+TL(-VE))


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.124461371E+02
                       Y =  0.911925047E+03
                       Z =  0.131228715E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   119 )
     SUMMATION FORCE-X =         -13.56
     SUMMATION FORCE-Y =       -1127.38
     SUMMATION FORCE-Z =          -0.70

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       14159.16  MY=        -201.36  MZ=       -1643.76


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   119 )
     SUMMATION FORCE-X =          13.56
     SUMMATION FORCE-Y =        1127.38
     SUMMATION FORCE-Z =           0.70

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -14159.16  MY=         201.36  MZ=        1643.76


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    119)
           MAXIMUMS    AT NODE
    X = -4.31534E-01       5
    Y = -2.54514E-01     746
    Z = -5.43316E-01      22
    RX= -1.85551E-03      22
    RY=  0.00000E+00       0
    RZ=  1.59080E-03       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   120
         DL+OEQL+CTL+PVL-PHL(+Z)+0.75*(LL+TL(-VE))
```

```
          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.125324378E+02
                        Y =  0.911925077E+03
                        Z =  0.130407325E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   120 )
       SUMMATION FORCE-X =          -0.19
       SUMMATION FORCE-Y =       -1127.40
       SUMMATION FORCE-Z =         -13.22

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=        2625.46  MY=         155.62  MZ=      -13959.29


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   120 )
       SUMMATION FORCE-X =           0.19
       SUMMATION FORCE-Y =        1127.40
       SUMMATION FORCE-Z =          13.22

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -2625.46  MY=        -155.62  MZ=       13959.29


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    120)
             MAXIMUMS    AT NODE
      X =  3.68070E-01       4
      Y = -2.78165E-01     746
      Z = -6.87702E-01      22
      RX= -2.34861E-03      22
      RY=  0.00000E+00       0
      RZ= -1.36823E-03       4

*** LOAD CASE   121 -- START ITERATION NO.   2
*** LOAD CASE   121 -- START ITERATION NO.   3
*** LOAD CASE   121 -- START ITERATION NO.   4

  **NOTE-Tension/Compression converged after  4 iterations, Case=  121



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   121
          DL+OEQL+CTL+PVL+PHL(+X)+WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.142144558E+02
                        Y =  0.913700001E+03
                        Z =  0.149083524E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.128094241E+02
                        Y =  0.911625506E+03
                        Z =  0.131852299E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   121 )
       SUMMATION FORCE-X =          45.63
       SUMMATION FORCE-Y =        -964.59
       SUMMATION FORCE-Z =          -0.51

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       12248.73  MY=         671.39  MZ=      -54050.74
```

```
   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   121 )
       SUMMATION FORCE-X =         -45.63
       SUMMATION FORCE-Y =         964.59
       SUMMATION FORCE-Z =           0.51

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -12248.73  MY=        -671.39  MZ=       54050.74


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    121)
             MAXIMUMS    AT NODE
      X =  6.25260E-01       5
      Y = -2.57306E-01     690
      Z = -3.49145E-01      22
      RX= -1.19239E-03      22
      RY=  0.00000E+00       0
      RZ= -2.47944E-03      39

*** LOAD CASE   122 -- START ITERATION NO.   2
*** LOAD CASE   122 -- START ITERATION NO.   3

  **NOTE-Tension/Compression converged after  3 iterations, Case=  122



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   122
          DL+OEQL+CTL+PVL+PHL(+X)+WL(+Z)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.126063758E+02
                        Y =  0.911624525E+03
                        Z =  0.133618372E+02

           CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.136685318E+02
                        Y =  0.914335711E+03
                        Z =  0.149563465E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   122 )
       SUMMATION FORCE-X =          13.69
       SUMMATION FORCE-Y =        -964.14
       SUMMATION FORCE-Z =          26.02

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       36652.53  MY=        -123.94  MZ=      -24659.16


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   122 )
       SUMMATION FORCE-X =         -13.69
       SUMMATION FORCE-Y =         964.14
       SUMMATION FORCE-Z =         -26.02

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -36652.53  MY=         123.94  MZ=       24659.16


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    122)
             MAXIMUMS    AT NODE
      X =  4.68805E-01       9
      Y = -2.03722E-01    1048
      Z =  3.96641E-01      32
      RX=  1.61121E-03      25
      RY=  0.00000E+00       0
      RZ= -1.75108E-03       9
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 123
DL+OEQL+CTL+PVL+PHL(+X)-WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.144954750E+02
Y = 0.913700001E+03
Z = 0.146098178E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124010158E+02
Y = 0.911621813E+03
Z = 0.131805199E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 123)
SUMMATION FORCE-X = -18.41
SUMMATION FORCE-Y = -962.88
SUMMATION FORCE-Z = 0.19

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 12864.84 MY= -268.56 MZ= 4885.12

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 123)
SUMMATION FORCE-X = 18.41
SUMMATION FORCE-Y = 962.88
SUMMATION FORCE-Z = -0.19

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -12864.84 MY= 268.56 MZ= -4885.12

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 123)

	MAXIMUMS	AT NODE
X =	-2.53366E-01	4
Y =	-1.91889E-01	745
Z =	-3.11235E-01	22
RX=	-1.06292E-03	22
RY=	0.00000E+00	0
RZ=	9.31304E-04	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 124
DL+OEQL+CTL+PVL+PHL(+X)-WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126044265E+02
Y = 0.911622797E+03
Z = 0.130037679E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.131795876E+02
Y = 0.914327435E+03

```
                    Z =  0.117551412E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   124 )
     SUMMATION FORCE-X =          13.53
     SUMMATION FORCE-Y =        -963.33
     SUMMATION FORCE-Z =         -26.34

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -11538.97  MY=         526.76  MZ=      -24506.46


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   124 )
     SUMMATION FORCE-X =         -13.53
     SUMMATION FORCE-Y =         963.33
     SUMMATION FORCE-Z =          26.34

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       11538.97  MY=        -526.76  MZ=       24506.46


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    124)
           MAXIMUMS    AT NODE
    X =  5.02723E-01       5
    Y = -2.72451E-01     690
    Z = -6.24578E-01      22
    RX= -2.13303E-03      22
    RY=  0.00000E+00       0
    RZ= -1.87493E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  125



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   125
         DL+OEQL+CTL+PVL-PHL(+X)+WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.160744275E+02
                      Y =  0.913700001E+03
                      Z =  0.148407485E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.126073421E+02
                      Y =  0.911625399E+03
                      Z =  0.131858752E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   125 )
     SUMMATION FORCE-X =          18.86
     SUMMATION FORCE-Y =        -964.54
     SUMMATION FORCE-Z =          -0.32

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       12429.60  MY=         274.63  MZ=      -29389.95


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   125 )
     SUMMATION FORCE-X =         -18.86
     SUMMATION FORCE-Y =         964.54
     SUMMATION FORCE-Z =           0.32

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -12429.60  MY=        -274.63  MZ=       29389.95
```

```
            MAXIMUMS    AT NODE
     X =  2.65852E-01       5
     Y = -2.43480E-01     690
     Z = -3.31828E-01      22
     RX= -1.13325E-03      22
     RY=  0.00000E+00       0
     RZ= -9.77249E-04       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   126
        DL+OEQL+CTL+PVL-PHL(+X)+WL(+Z)


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124041876E+02
                     Y =  0.911624417E+03
                     Z =  0.133624920E+02

         CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.134239417E+02
                     Y =  0.914383936E+03
                     Z =  0.143721845E+02

  ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   126 )
      SUMMATION FORCE-X =         -13.09
      SUMMATION FORCE-Y =        -964.09
      SUMMATION FORCE-Z =          26.21

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=       36833.41  MY=        -520.69  MZ=           1.63


  ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   126 )
      SUMMATION FORCE-X =          13.09
      SUMMATION FORCE-Y =         964.09
      SUMMATION FORCE-Z =         -26.21

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=      -36833.41  MY=         520.69  MZ=          -1.63


  MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    126)
            MAXIMUMS    AT NODE
     X = -4.90445E-01       4
     Y = -1.82396E-01    1049
     Z =  3.76728E-01      25
     RX=  1.64643E-03      25
     RY=  0.00000E+00       0
     RZ=  1.83113E-03       4

*** LOAD CASE   127 -- START ITERATION NO.   2
```

**NOTE-Tension/Compression converged after 2 iterations, Case= 127

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   127
        DL+OEQL+CTL+PVL-PHL(+X)-WL(+X)


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)
```

```
                        X =  0.135528524E+02
                        Y =  0.913700001E+03
                        Z =  0.148149111E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.121985528E+02
                        Y =  0.911621705E+03
                        Z =  0.131811661E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   127 )
       SUMMATION FORCE-X =         -45.19
       SUMMATION FORCE-Y =        -962.83
       SUMMATION FORCE-Z =           0.39

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       13045.71  MY=        -665.32  MZ=       29545.91


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   127 )
       SUMMATION FORCE-X =          45.19
       SUMMATION FORCE-Y =         962.83
       SUMMATION FORCE-Z =          -0.39

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -13045.71  MY=         665.32  MZ=      -29545.91


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    127)
             MAXIMUMS    AT NODE
      X = -5.99212E-01       4
      Y = -2.15604E-01    1215
      Z = -2.93918E-01      22
      RX= -1.00378E-03      22
      RY=  0.00000E+00       0
      RZ=  2.40416E-03      38

*** LOAD CASE   128 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  128



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   128
          DL+OEQL+CTL+PVL-PHL(+X)-WL(+Z)


            CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
          (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.124020699E+02
                        Y =  0.911622689E+03
                        Z =  0.130044046E+02

            CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
          (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.134211479E+02
                        Y =  0.914279014E+03
                        Z =  0.123166652E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   128 )
       SUMMATION FORCE-X =         -13.24
       SUMMATION FORCE-Y =        -963.28
       SUMMATION FORCE-Z =         -26.14

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -11358.09  MY=         130.00  MZ=         154.33
```

```
   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   128 )
       SUMMATION FORCE-X =          13.24
       SUMMATION FORCE-Y =         963.28
       SUMMATION FORCE-Z =          26.14

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       11358.10  MY=        -130.00  MZ=        -154.33


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    128)
             MAXIMUMS    AT NODE
      X = -4.88674E-01       8
      Y = -2.58625E-01     690
      Z = -6.07261E-01      22
      RX= -2.07389E-03      22
      RY=  0.00000E+00       0
      RZ=  1.82580E-03       8


  **NOTE-Tension/Compression converged after  1 iterations, Case=  129



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   129
          DL+OEQL+CTL+PVL+PHL(+Z)+WL(+X)


           CENTER OF FORCE BASED ON X FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.144949108E+02
                        Y =  0.913700001E+03
                        Z =  0.156019869E+02

           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.127085629E+02
                        Y =  0.911625465E+03
                        Z =  0.132812354E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   129 )
       SUMMATION FORCE-X =          32.26
       SUMMATION FORCE-Y =        -964.57
       SUMMATION FORCE-Z =          12.01

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       23782.43  MY=         314.41  MZ=      -41735.21


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   129 )
       SUMMATION FORCE-X =         -32.26
       SUMMATION FORCE-Y =         964.57
       SUMMATION FORCE-Z =         -12.01

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -23782.43  MY=        -314.41  MZ=       41735.21


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    129)
             MAXIMUMS    AT NODE
      X =  4.69275E-01       9
      Y = -2.19265E-01     690
      Z =  2.25500E-01      32
      RX=  9.09929E-04      25
      RY=  0.00000E+00       0
      RZ= -1.73245E-03       9

*** LOAD CASE   130 -- START ITERATION NO.   2
```

**NOTE-Tension/Compression converged after 3 iterations, Case= 130

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 130
DL+OEQL+CTL+PVL+PHL(+Z)+WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125054628E+02
Y = 0.911624484E+03
Z = 0.134578915E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.138980754E+02
Y = 0.914326645E+03
Z = 0.142346207E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 130)
SUMMATION FORCE-X = 0.31
SUMMATION FORCE-Y = -964.12
SUMMATION FORCE-Z = 38.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 48186.24 MY= -480.92 MZ= -12343.63

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 130)
SUMMATION FORCE-X = -0.31
SUMMATION FORCE-Y = 964.12
SUMMATION FORCE-Z = -38.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -48186.24 MY= 480.92 MZ= 12343.63

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 130)

	MAXIMUMS	AT NODE
X =	-4.47374E-01	4
Y =	-2.19255E-01	1048
Z =	5.14308E-01	25
RX=	2.25613E-03	25
RY=	0.00000E+00	0
RZ=	1.68465E-03	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 131

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 131
DL+OEQL+CTL+PVL+PHL(+Z)-WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.140926202E+02
Y = 0.913700001E+03
Z = 0.140314262E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.122999669E+02

```
                    Y =  0.911621772E+03
                    Z =  0.132766962E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   131 )
     SUMMATION FORCE-X =         -31.79
     SUMMATION FORCE-Y =        -962.86
     SUMMATION FORCE-Z =          12.71

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       24398.54  MY=        -625.55  MZ=       17200.65


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   131 )
     SUMMATION FORCE-X =          31.79
     SUMMATION FORCE-Y =         962.86
     SUMMATION FORCE-Z =         -12.71

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -24398.54  MY=         625.55  MZ=      -17200.65


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    131)
           MAXIMUMS    AT NODE
    X = -5.56142E-01       4
    Y = -1.88381E-01    1215
    Z =  2.22779E-01      15
    RX=  9.63044E-04      18
    RY=  0.00000E+00       0
    RZ=  2.05870E-03       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  132



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   132
         DL+OEQL+CTL+PVL+PHL(+Z)-WL(+Z)


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.125034295E+02
                    Y =  0.911622756E+03
                    Z =  0.130998951E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.120962497E+02
                    Y =  0.914345220E+03
                    Z =  0.108669350E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   132 )
     SUMMATION FORCE-X =           0.16
     SUMMATION FORCE-Y =        -963.32
     SUMMATION FORCE-Z =         -13.82

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=          -5.27  MY=         169.78  MZ=      -12190.93


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   132 )
     SUMMATION FORCE-X =          -0.16
     SUMMATION FORCE-Y =         963.32
     SUMMATION FORCE-Z =          13.82

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=           5.27  MY=        -169.78  MZ=       12190.93
```

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 132)

	MAXIMUMS	AT NODE
X =	-2.60768E-01	8
Y =	-2.34410E-01	690
Z =	-4.80192E-01	22
RX=	-1.63993E-03	22
RY=	0.00000E+00	0
RZ=	9.77521E-04	8

**NOTE-Tension/Compression converged after 1 iterations, Case= 133

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 133
DL+OEQL+CTL+PVL-PHL(+Z)+WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.150219810E+02
Y = 0.913700001E+03
Z = 0.141744746E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.127082086E+02
Y = 0.911625439E+03
Z = 0.130898686E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 133)
SUMMATION FORCE-X = 32.23
SUMMATION FORCE-Y = -964.56
SUMMATION FORCE-Z = -12.84

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 895.90 MY= 631.61 MZ= -41705.48

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 133)
SUMMATION FORCE-X = -32.23
SUMMATION FORCE-Y = 964.56
SUMMATION FORCE-Z = 12.84

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -895.90 MY= -631.61 MZ= 41705.48

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 133)

	MAXIMUMS	AT NODE
X =	5.76558E-01	5
Y =	-2.81521E-01	690
Z =	-4.76214E-01	22
RX=	-1.62635E-03	22
RY=	0.00000E+00	0
RZ=	-2.13242E-03	5

**NOTE-Tension/Compression converged after 1 iterations, Case= 134

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 134
DL+OEQL+CTL+PVL-PHL(+Z)+WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                    X =  0.125051059E+02
                    Y =  0.911624458E+03
                    Z =  0.132664364E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   134 )
     SUMMATION FORCE-X =           0.28
     SUMMATION FORCE-Y =        -964.11
     SUMMATION FORCE-Z =          13.69

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       25299.70  MY=        -163.71  MZ=      -12313.90


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   134 )
     SUMMATION FORCE-X =          -0.28
     SUMMATION FORCE-Y =         964.11
     SUMMATION FORCE-Z =         -13.69

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -25299.71  MY=         163.71  MZ=       12313.90


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    134)
           MAXIMUMS    AT NODE
    X =  2.44666E-01       9
    Y = -1.79741E-01     690
    Z =  2.82896E-01      32
    RX=  1.00150E-03      25
    RY=  0.00000E+00       0
    RZ= -9.17221E-04       9


**NOTE-Tension/Compression converged after  1 iterations, Case=  135



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   135
         DL+OEQL+CTL+PVL-PHL(+Z)-WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.135591631E+02
                    Y =  0.913700001E+03
                    Z =  0.154789119E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.122996070E+02
                    Y =  0.911621746E+03
                    Z =  0.130849886E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   135 )
     SUMMATION FORCE-X =         -31.82
     SUMMATION FORCE-Y =        -962.85
     SUMMATION FORCE-Z =         -12.13

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        1512.01  MY=        -308.34  MZ=       17230.38


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   135 )
     SUMMATION FORCE-X =          31.82
     SUMMATION FORCE-Y =         962.85
     SUMMATION FORCE-Z =          12.13

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -1512.01  MY=         308.34  MZ=      -17230.38
```

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 135)

	MAXIMUMS	AT NODE
X =	-4.62273E-01	8
Y =	-2.12722E-01	745
Z =	-4.38304E-01	22
RX=	-1.49688E-03	22
RY=	0.00000E+00	0
RZ=	1.70745E-03	8

*** LOAD CASE 136 -- START ITERATION NO. 2
*** LOAD CASE 136 -- START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 136

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 136
DL+OEQL+CTL+PVL-PHL(+Z)-WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125030722E+02
Y = 0.911622730E+03
Z = 0.129082761E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.137300650E+02
Y = 0.914288341E+03
Z = 0.124522197E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 136)
SUMMATION FORCE-X = 0.13
SUMMATION FORCE-Y = -963.30
SUMMATION FORCE-Z = -38.66

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -22891.80 MY= 486.98 MZ= -12161.20

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 136)
SUMMATION FORCE-X = -0.13
SUMMATION FORCE-Y = 963.30
SUMMATION FORCE-Z = 38.66

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 22891.80 MY= -486.98 MZ= 12161.20

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 136)

	MAXIMUMS	AT NODE
X =	4.54021E-01	5
Y =	-2.96666E-01	690
Z =	-7.51646E-01	22
RX=	-2.56699E-03	22
RY=	0.00000E+00	0
RZ=	-1.70719E-03	5

**NOTE-Tension/Compression converged after 1 iterations, Case= 137

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 137
DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+X)+0.75*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.144651398E+02
Y = 0.913700001E+03
Z = 0.149518503E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.127512594E+02
Y = 0.911926150E+03
Z = 0.131268256E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 137)
SUMMATION FORCE-X = 37.56
SUMMATION FORCE-Y = -1128.08
SUMMATION FORCE-Z = -0.42

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 14422.26 MY= 552.94 MZ= -48700.46

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 137)
SUMMATION FORCE-X = -37.56
SUMMATION FORCE-Y = 1128.08
SUMMATION FORCE-Z = 0.42

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -14422.26 MY= -552.94 MZ= 48700.47

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 137)

	MAXIMUMS	AT NODE
X =	5.85855E-01	5
Y =	-2.65621E-01	690
Z =	-5.36413E-01	22
RX=	-1.83193E-03	22
RY=	0.00000E+00	0
RZ=	-2.21037E-03	39

**NOTE-Tension/Compression converged after 1 iterations, Case= 138

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 138
DL+OEQL+CTL+PVL+PHL(+X)+0.75*WL(+Z)+0.75*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126210475E+02
Y = 0.911925612E+03
Z = 0.132400482E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 138)
SUMMATION FORCE-X = 13.60
SUMMATION FORCE-Y = -1127.74
SUMMATION FORCE-Z = 19.47

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 32725.12 MY= -43.55 MZ= -26656.78

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 138)
SUMMATION FORCE-X = -13.60

```
     SUMMATION FORCE-Z =         -19.47

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -32725.12  MY=          43.55  MZ=       26656.78


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    138)
          MAXIMUMS    AT NODE
    X =  4.69979E-01       9
    Y = -2.19683E-01    1049
    Z =  4.08175E-01      15
    RX=  1.39398E-03      15
    RY=  0.00000E+00       0
    RZ= -1.74796E-03       9
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 139

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   139
        DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+X)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124894450E+02
                     Y =  0.911924126E+03
                     Z =  0.131237404E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   139 )
     SUMMATION FORCE-X =         -10.48
     SUMMATION FORCE-Y =       -1126.79
     SUMMATION FORCE-Z =           0.11

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       14884.35  MY=        -152.02  MZ=       -4498.57


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   139 )
     SUMMATION FORCE-X =          10.48
     SUMMATION FORCE-Y =        1126.79
     SUMMATION FORCE-Z =          -0.11

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -14884.35  MY=         152.02  MZ=        4498.57


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    139)
          MAXIMUMS    AT NODE
    X = -2.44481E-01       8
    Y = -2.51489E-01     745
    Z = -5.07980E-01      22
    RX= -1.73483E-03      22
    RY=  0.00000E+00       0
    RZ=  9.00959E-04       8
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 140

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   140
        DL+OEQL+CTL+PVL+PHL(+X)-0.75*WL(+Z)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)
```

```
                    X =  0.126198058E+02
                    Y =  0.911924665E+03
                    Z =  0.130104583E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   140 )
    SUMMATION FORCE-X =          13.48
    SUMMATION FORCE-Y =       -1127.13
    SUMMATION FORCE-Z =         -19.79

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       -3418.51  MY=         444.47  MZ=      -26542.26


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   140 )
    SUMMATION FORCE-X =         -13.48
    SUMMATION FORCE-Y =        1127.13
    SUMMATION FORCE-Z =          19.79

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=        3418.51  MY=        -444.47  MZ=       26542.26


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    140)
          MAXIMUMS    AT NODE
   X =  4.93952E-01       5
   Y = -2.85613E-01     746
   Z = -7.42987E-01      22
   RX= -2.53742E-03      22
   RY=  0.00000E+00       0
   RZ= -1.83528E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  141



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   141
        DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+X)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.125784626E+02
                    Y =  0.911926071E+03
                    Z =  0.131273748E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   141 )
    SUMMATION FORCE-X =          10.78
    SUMMATION FORCE-Y =       -1128.03
    SUMMATION FORCE-Z =          -0.22

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       14603.14  MY=         156.19  MZ=      -24039.68


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   141 )
    SUMMATION FORCE-X =         -10.78
    SUMMATION FORCE-Y =        1128.03
    SUMMATION FORCE-Z =           0.22

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -14603.14  MY=        -156.19  MZ=       24039.68


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    141)
          MAXIMUMS    AT NODE
   X =  2.26447E-01       5
   Y = -2.51795E-01     690
   Z = -5.19096E-01      22
   RX= -1.77279E-03      22
```

```
    RY=  0.00000E+00       0
    RZ= -8.31295E-04       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 142

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   142
        DL+OEQL+CTL+PVL-PHL(+X)+0.75*WL(+Z)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.124481925E+02
                      Y =  0.911925533E+03
                      Z =  0.132406026E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   142 )
     SUMMATION FORCE-X =         -13.18
     SUMMATION FORCE-Y =       -1127.69
     SUMMATION FORCE-Z =          19.67

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       32905.99  MY=        -440.30  MZ=       -1995.99


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   142 )
     SUMMATION FORCE-X =          13.18
     SUMMATION FORCE-Y =        1127.69
     SUMMATION FORCE-Z =         -19.67

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -32906.00  MY=         440.30  MZ=        1995.99


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    142)
           MAXIMUMS    AT NODE
    X = -4.53675E-01       4
    Y = -2.12374E-01     746
    Z =  4.24556E-01      15
    RX=  1.44993E-03      15
    RY=  0.00000E+00       0
    RZ=  1.68518E-03       4
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 143

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   143
        DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+X)+0.75*LL


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.131244671E+02
                      Y =  0.913700001E+03
                      Z =  0.147880459E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.123164394E+02
                      Y =  0.911924047E+03
                      Z =  0.131242901E+02
```

```
     SUMMATION FORCE-X =         -37.25
     SUMMATION FORCE-Y =       -1126.74
     SUMMATION FORCE-Z =           0.30

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       15065.22  MY=        -548.78  MZ=       20162.22


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   143 )
     SUMMATION FORCE-X =          37.25
     SUMMATION FORCE-Y =        1126.74
     SUMMATION FORCE-Z =          -0.30

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -15065.22  MY=         548.78  MZ=      -20162.22


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    143)
           MAXIMUMS    AT NODE
    X = -5.35250E-01       4
    Y = -2.48763E-01     745
    Z = -4.90664E-01      22
    RX= -1.67569E-03      22
    RY=  0.00000E+00       0
    RZ=  2.16140E-03      38


**NOTE-Tension/Compression converged after  1 iterations, Case=  144



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   144
        DL+OEQL+CTL+PVL-PHL(+X)-0.75*WL(+Z)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124468585E+02
                     Y =  0.911924586E+03
                     Z =  0.130110028E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   144 )
     SUMMATION FORCE-X =         -13.29
     SUMMATION FORCE-Y =       -1127.08
     SUMMATION FORCE-Z =         -19.59

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -3237.63  MY=          47.72  MZ=       -1881.47


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   144 )
     SUMMATION FORCE-X =          13.29
     SUMMATION FORCE-Y =        1127.08
     SUMMATION FORCE-Z =          19.59

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        3237.63  MY=         -47.72  MZ=        1881.47


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    144)
           MAXIMUMS    AT NODE
    X = -5.04695E-01       8
    Y = -2.82878E-01     746
    Z = -7.25671E-01      22
    RX= -2.47828E-03      22
    RY=  0.00000E+00       0
    RZ=  1.87994E-03       8


**NOTE-Tension/Compression converged after  1 iterations, Case=  145
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 145
DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+X)+0.75*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.149778451E+02
Y = 0.913700001E+03
Z = 0.159011477E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126650146E+02
Y = 0.911926120E+03
Z = 0.132089164E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 145)
SUMMATION FORCE-X = 24.19
SUMMATION FORCE-Y = -1128.06
SUMMATION FORCE-Z = 12.10

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 25955.97 MY= 195.96 MZ= -36384.94

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 145)
SUMMATION FORCE-X = -24.19
SUMMATION FORCE-Y = 1128.06
SUMMATION FORCE-Z = -12.10

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -25955.97 MY= -195.96 MZ= 36384.94

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 145)

	MAXIMUMS	AT NODE
X =	4.50511E-01	9
Y =	-2.27580E-01	690
Z =	-4.23766E-01	2
RX=	-1.44051E-03	2
RY=	0.00000E+00	0
RZ=	-1.66487E-03	9

*** LOAD CASE 146 -- START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 146

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 146
DL+OEQL+CTL+PVL+PHL(+Z)+0.75*WL(+Z)+0.75*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125347743E+02
Y = 0.911925582E+03
Z = 0.133221658E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.140204888E+02
Y = 0.914348142E+03

```
                    Z =  0.152046113E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   146 )
     SUMMATION FORCE-X =           0.22
     SUMMATION FORCE-Y =       -1127.72
     SUMMATION FORCE-Z =          32.00

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       44258.82  MY=        -400.53  MZ=      -14341.25


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   146 )
     SUMMATION FORCE-X =          -0.22
     SUMMATION FORCE-Y =        1127.72
     SUMMATION FORCE-Z =         -32.00

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -44258.82  MY=         400.53  MZ=       14341.25


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    146)
           MAXIMUMS    AT NODE
    X = -4.10605E-01       4
    Y = -2.33694E-01    2074
    Z =  4.76273E-01      15
    RX=  1.84238E-03      25
    RY=  0.00000E+00       0
    RZ=  1.53870E-03       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  147



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   147
         DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+X)+0.75*LL


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.136030902E+02
                      Y =  0.913700001E+03
                      Z =  0.137287612E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.124030973E+02
                      Y =  0.911924096E+03
                      Z =  0.132059248E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   147 )
     SUMMATION FORCE-X =         -23.85
     SUMMATION FORCE-Y =       -1126.77
     SUMMATION FORCE-Z =          12.63

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       26418.05  MY=        -509.00  MZ=        7816.96


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   147 )
     SUMMATION FORCE-X =          23.85
     SUMMATION FORCE-Y =        1126.77
     SUMMATION FORCE-Z =         -12.63

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -26418.05  MY=         509.00  MZ=       -7816.96
```

```
          MAXIMUMS    AT NODE
   X = -4.92180E-01       4
   Y = -2.27930E-01     745
   Z =  3.82024E-01      15
   RX=  1.30467E-03      15
   RY=  0.00000E+00       0
   RZ=  1.81924E-03       4
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 148

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   148
        DL+OEQL+CTL+PVL+PHL(+Z)-0.75*WL(+Z)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125334866E+02
                     Y =  0.911924635E+03
                     Z =  0.130926158E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   148 )
     SUMMATION FORCE-X =           0.11
     SUMMATION FORCE-Y =       -1127.11
     SUMMATION FORCE-Z =          -7.27

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        8115.20  MY=          87.49  MZ=      -14226.73


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   148 )
     SUMMATION FORCE-X =          -0.11
     SUMMATION FORCE-Y =        1127.11
     SUMMATION FORCE-Z =           7.27

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -8115.19  MY=         -87.49  MZ=       14226.73


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    148)
          MAXIMUMS    AT NODE
    X = -2.76789E-01       8
    Y = -2.61963E-01     746
    Z = -5.98602E-01      22
    RX= -2.04432E-03      22
    RY=  0.00000E+00       0
    RZ=  1.03166E-03       8
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 149

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   149
        DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+X)+0.75*LL


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.156817834E+02
                     Y =  0.913700001E+03
                     Z =  0.139967365E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)
```

```
                    X =  0.126647112E+02
                    Y =  0.911926101E+03
                    Z =  0.130452832E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   149 )
     SUMMATION FORCE-X =          24.15
     SUMMATION FORCE-Y =       -1128.05
     SUMMATION FORCE-Z =         -12.75

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        3069.44  MY=         513.17  MZ=      -36355.20


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   149 )
     SUMMATION FORCE-X =         -24.15
     SUMMATION FORCE-Y =        1128.05
     SUMMATION FORCE-Z =          12.75

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -3069.43  MY=        -513.17  MZ=       36355.20


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    149)
           MAXIMUMS    AT NODE
    X =  5.37153E-01       5
    Y = -2.89836E-01     690
    Z = -6.63482E-01      22
    RX= -2.26589E-03      22
    RY=  0.00000E+00       0
    RZ= -1.98646E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  150



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   150
         DL+OEQL+CTL+PVL-PHL(+Z)+0.75*WL(+Z)+0.75*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.125344695E+02
                    Y =  0.911925563E+03
                    Z =  0.131584841E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   150 )
     SUMMATION FORCE-X =           0.19
     SUMMATION FORCE-Y =       -1127.70
     SUMMATION FORCE-Z =           7.15

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       21372.29  MY=         -83.32  MZ=      -14311.52


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   150 )
     SUMMATION FORCE-X =          -0.19
     SUMMATION FORCE-Y =        1127.70
     SUMMATION FORCE-Z =          -7.15

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -21372.29  MY=          83.32  MZ=       14311.52


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    150)
           MAXIMUMS    AT NODE
    X =  2.45840E-01       9
    Y = -2.36025E-01     746
    Z = -4.28475E-01      22
    RX= -1.46331E-03      22
```

```
    RY=  0.00000E+00       0
    RZ= -9.14100E-04       9
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 151

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   151
        DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+X)+0.75*LL


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.128930209E+02
                     Y =  0.913700001E+03
                     Z =  0.156576527E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124027909E+02
                     Y =  0.911924077E+03
                     Z =  0.130421048E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   151 )
     SUMMATION FORCE-X =         -23.88
     SUMMATION FORCE-Y =       -1126.76
     SUMMATION FORCE-Z =         -12.22

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        3531.52  MY=        -191.80  MZ=        7846.69


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   151 )
     SUMMATION FORCE-X =          23.88
     SUMMATION FORCE-Y =        1126.76
     SUMMATION FORCE-Z =          12.22

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -3531.52  MY=         191.80  MZ=       -7846.69


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    151)
           MAXIMUMS    AT NODE
    X = -4.72388E-01       8
    Y = -2.72322E-01     745
    Z = -6.35049E-01      22
    RX= -2.16879E-03      22
    RY=  0.00000E+00       0
    RZ=  1.74924E-03       8
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 152

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   152
        DL+OEQL+CTL+PVL-PHL(+Z)-0.75*WL(+Z)+0.75*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125331816E+02
                     Y =  0.911924616E+03
                     Z =  0.129288444E+02
```

(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.137676494E+02
Y = 0.914257116E+03
Z = 0.114846144E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 152)
SUMMATION FORCE-X = 0.08
SUMMATION FORCE-Y = -1127.10
SUMMATION FORCE-Z = -32.11

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -14771.34 MY= 404.70 MZ= -14197.00

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 152)
SUMMATION FORCE-X = -0.08
SUMMATION FORCE-Y = 1127.10
SUMMATION FORCE-Z = 32.11

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 14771.34 MY= -404.70 MZ= 14197.00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 152)

	MAXIMUMS	AT NODE
X =	-4.54667E-01	8
Y =	-3.06529E-01	746
Z =	-8.70056E-01	22
RX=	-2.97138E-03	22
RY=	0.00000E+00	0
RZ=	1.71219E-03	8

*** LOAD CASE 153 -- START ITERATION NO. 2
*** LOAD CASE 153 -- START ITERATION NO. 3
*** LOAD CASE 153 -- START ITERATION NO. 4
*** LOAD CASE 153 -- START ITERATION NO. 5

**NOTE-Tension/Compression converged after 5 iterations, Case= 153

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 153
0.6*(DL+OEQL+CTL)+WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.144702135E+02
Y = 0.913700001E+03
Z = 0.148515164E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.132241448E+02
Y = 0.911446179E+03
Z = 0.132604495E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 153)
SUMMATION FORCE-X = 32.16
SUMMATION FORCE-Y = -532.71
SUMMATION FORCE-Z = -0.37

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 6729.69 MY= 471.77 MZ= -36427.71

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 153)
SUMMATION FORCE-X = -32.16

```
       SUMMATION FORCE-Y =         532.71
       SUMMATION FORCE-Z =           0.37

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -6729.69  MY=        -471.77  MZ=       36427.71


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    153)
            MAXIMUMS    AT NODE
      X =  4.04385E-01       5
      Y = -1.65816E-01     690
      Z = -2.28956E-01      18
      RX= -8.20516E-04      18
      RY=  0.00000E+00       0
      RZ= -1.56350E-03      39

*** LOAD CASE   154 -- START ITERATION NO.   2
*** LOAD CASE   154 -- START ITERATION NO.   3
*** LOAD CASE   154 -- START ITERATION NO.   4

  **NOTE-Tension/Compression converged after  4 iterations, Case=  154



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   154
         0.6*(DL+OEQL+CTL)+WL(+Z)


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.128566913E+02
                      Y =  0.911444248E+03
                      Z =  0.135804265E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.134729143E+02
                      Y =  0.914343439E+03
                      Z =  0.136903019E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   154 )
       SUMMATION FORCE-X =           0.21
       SUMMATION FORCE-Y =        -532.25
       SUMMATION FORCE-Z =          26.16

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       31133.50  MY=        -323.55  MZ=       -7036.13


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   154 )
       SUMMATION FORCE-X =          -0.21
       SUMMATION FORCE-Y =         532.25
       SUMMATION FORCE-Z =         -26.16

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -31133.50  MY=         323.55  MZ=        7036.13


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    154)
            MAXIMUMS    AT NODE
      X = -2.72632E-01       4
      Y = -1.81446E-01    1049
      Z =  4.63412E-01      28
      RX=  1.59191E-03      25
      RY=  0.00000E+00       0
      RZ=  1.03112E-03       4

*** LOAD CASE   155 -- START ITERATION NO.   2
*** LOAD CASE   155 -- START ITERATION NO.   3
```

**NOTE-Tension/Compression converged after 3 iterations, Case= 155

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 155
0.6*(DL+OEQL+CTL)-WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.141188199E+02
Y = 0.913700001E+03
Z = 0.147932754E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124848935E+02
Y = 0.911438904E+03
Z = 0.132521514E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 155)
SUMMATION FORCE-X = -31.89
SUMMATION FORCE-Y = -530.99
SUMMATION FORCE-Z = 0.34

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 7345.80 MY= -468.18 MZ= 22508.15

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 155)
SUMMATION FORCE-X = 31.89
SUMMATION FORCE-Y = 530.99
SUMMATION FORCE-Z = -0.34

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -7345.80 MY= 468.18 MZ= -22508.15

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 155)

	MAXIMUMS	AT NODE
X =	-3.81400E-01	4
Y =	-1.17589E-01	1215
Z =	-1.06931E-01	28
RX=	-3.79885E-04	28
RY=	0.00000E+00	0
RZ=	1.51968E-03	38

*** LOAD CASE 156 -- START ITERATION NO. 2
*** LOAD CASE 156 -- START ITERATION NO. 3
*** LOAD CASE 156 -- START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 156

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 156
0.6*(DL+OEQL+CTL)-WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.128535357E+02
Y = 0.911440844E+03
Z = 0.129316988E+02

(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.133722322E+02
Y = 0.914319669E+03
Z = 0.130017377E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 156)
SUMMATION FORCE-X = 0.06
SUMMATION FORCE-Y = -531.45
SUMMATION FORCE-Z = -26.19

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -17058.01 MY= 327.14 MZ= -6883.43

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 156)
SUMMATION FORCE-X = -0.06
SUMMATION FORCE-Y = 531.45
SUMMATION FORCE-Z = 26.19

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 17058.01 MY= -327.14 MZ= 6883.43

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 156)

	MAXIMUMS	AT NODE
X =	2.81848E-01	5
Y =	-1.80960E-01	690
Z =	-4.06590E-01	22
RX=	-1.56508E-03	18
RY=	0.00000E+00	0
RZ=	-1.06434E-03	5

**NOTE-Tension/Compression converged after 1 iterations, Case= 200

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 200
1.4*(DL+CTL+PVL+TEQL)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.120930209E+02
Y = 0.911732891E+03
Z = 0.131519993E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 200)
SUMMATION FORCE-X = 0.02
SUMMATION FORCE-Y = -1424.15
SUMMATION FORCE-Z = -0.24

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 18514.22 MY= 0.86 MZ= -17241.45

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 200)
SUMMATION FORCE-X = -0.02
SUMMATION FORCE-Y = 1424.15
SUMMATION FORCE-Z = 0.24

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -18514.22 MY= -0.86 MZ= 17241.45

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 200)

	MAXIMUMS	AT NODE
X =	-1.52914E-01	8
Y =	-5.10338E-01	690

```
    Z = -6.60474E-01      22
    RX= -2.25562E-03      22
    RY=  0.00000E+00       0
    RZ=  5.64171E-04       8


**NOTE-Tension/Compression converged after  1 iterations, Case=  201



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   201
        1.4*(DL+OEQL+CTL+PVL+PHL(+X))


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.140243253E+02
                     Y =  0.913700001E+03
                     Z =  0.151103333E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.126054017E+02
                     Y =  0.911623661E+03
                     Z =  0.131828771E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   201 )
     SUMMATION FORCE-X =          19.05
     SUMMATION FORCE-Y =       -1349.23
     SUMMATION FORCE-Z =          -0.23

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       17579.49  MY=         281.98  MZ=      -34415.93


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   201 )
     SUMMATION FORCE-X =         -19.05
     SUMMATION FORCE-Y =        1349.23
     SUMMATION FORCE-Z =           0.23

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -17579.49  MY=        -281.98  MZ=       34415.94


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    201)
           MAXIMUMS    AT NODE
    X =  3.52752E-01       9
    Y = -2.99584E-01     690
    Z = -4.62266E-01      22
    RX= -1.57871E-03      22
    RY=  0.00000E+00       0
    RZ= -1.36829E-03      39


**NOTE-Tension/Compression converged after  1 iterations, Case=  202



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   202
        1.4*(DL+OEQL+CTL+PVL+PHL(+Z))


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125044467E+02
                     Y =  0.911623620E+03
                     Z =  0.132789679E+02
```

```
***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   202 )
    SUMMATION FORCE-X =           0.33
    SUMMATION FORCE-Y =       -1349.20
    SUMMATION FORCE-Z =          17.30

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       33726.68  MY=        -217.80  MZ=      -17174.20


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   202 )
    SUMMATION FORCE-X =          -0.33
    SUMMATION FORCE-Y =        1349.20
    SUMMATION FORCE-Z =         -17.30

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -33726.68  MY=         217.80  MZ=       17174.20


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    202)
          MAXIMUMS    AT NODE
   X = -2.70602E-01       4
   Y = -2.46326E-01     690
   Z =  2.67458E-01      14
   RX=  9.90646E-04      25
   RY=  0.00000E+00       0
   RZ=  1.00885E-03       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  203



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   203
        1.4*(DL+OEQL+CTL+PVL-PHL(+X))


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.117472269E+02
                     Y =  0.913700001E+03
                     Z =  0.147964097E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.124031294E+02
                     Y =  0.911623554E+03
                     Z =  0.131835228E+02

***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   203 )
    SUMMATION FORCE-X =         -18.43
    SUMMATION FORCE-Y =       -1349.16
    SUMMATION FORCE-Z =           0.05

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=       17832.72  MY=        -273.48  MZ=         109.17


***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   203 )
    SUMMATION FORCE-X =          18.43
    SUMMATION FORCE-Y =        1349.16
    SUMMATION FORCE-Z =          -0.05

   SUMMATION OF MOMENTS AROUND THE ORIGIN-
   MX=      -17832.72  MY=         273.48  MZ=        -109.17


MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    203)
```

```
      X = -3.43917E-01       8
      Y = -2.80227E-01     690
      Z = -4.38022E-01      22
      RX= -1.49592E-03      22
      RY=  0.00000E+00       0
      RZ=  1.33964E-03      38


  **NOTE-Tension/Compression converged after  1 iterations, Case=  204



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   204
          1.4*(DL+OEQL+CTL+PVL-PHL(+Z))


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.125040896E+02
                        Y =  0.911623595E+03
                        Z =  0.130874308E+02

    ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   204 )
        SUMMATION FORCE-X =           0.29
        SUMMATION FORCE-Y =       -1349.19
        SUMMATION FORCE-Z =         -17.48

       SUMMATION OF MOMENTS AROUND THE ORIGIN-
       MX=        1685.53  MY=         226.29  MZ=      -17132.57


    ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   204 )
        SUMMATION FORCE-X =          -0.29
        SUMMATION FORCE-Y =        1349.19
        SUMMATION FORCE-Z =          17.48

       SUMMATION OF MOMENTS AROUND THE ORIGIN-
       MX=       -1685.53  MY=        -226.29  MZ=       17132.57


    MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    204)
              MAXIMUMS    AT NODE
       X =  2.77212E-01       5
       Y = -3.33485E-01     690
       Z = -6.40162E-01      22
       RX= -2.18625E-03      22
       RY=  0.00000E+00       0
       RZ= -1.03264E-03       5

*** LOAD CASE   205 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  205



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   205
          1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(+VE))+1.7*LL


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.126294190E+02
                        Y =  0.912071527E+03
                        Z =  0.131009445E+02

    ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   205 )
        SUMMATION FORCE-X =          19.49
        SUMMATION FORCE-Y =       -1720.30
```

```
      SUMMATION FORCE-Z =           1.15

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=       23591.65  MY=         289.27  MZ=      -39537.74


  ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   205 )
      SUMMATION FORCE-X =         -19.49
      SUMMATION FORCE-Y =        1720.30
      SUMMATION FORCE-Z =          -1.15

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=      -23591.65  MY=        -289.27  MZ=       39537.74


  MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    205)
           MAXIMUMS    AT NODE
     X =  1.17173E+00       5
     Y = -3.90301E-01     746
     Z = -9.37427E-01       2
     RX= -3.18660E-03       2
     RY=  0.00000E+00       0
     RZ= -4.30454E-03       5


 **NOTE-Tension/Compression converged after  1 iterations, Case=  206



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   206
         1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(+VE))+1.7*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.125502407E+02
                       Y =  0.912071502E+03
                       Z =  0.131763070E+02

  ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   206 )
      SUMMATION FORCE-X =           0.77
      SUMMATION FORCE-Y =       -1720.27
      SUMMATION FORCE-Z =          18.68

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=       39738.83  MY=        -210.50  MZ=      -22296.00


  ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   206 )
      SUMMATION FORCE-X =          -0.77
      SUMMATION FORCE-Y =        1720.27
      SUMMATION FORCE-Z =         -18.68

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=      -39738.83  MY=         210.50  MZ=       22296.00


  MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    206)
           MAXIMUMS    AT NODE
     X =  9.83498E-01       9
     Y = -3.57190E-01     746
     Z = -8.13585E-01       2
     RX= -2.76563E-03       2
     RY=  0.00000E+00       0
     RZ= -3.62614E-03       9

*** LOAD CASE   207 -- START ITERATION NO.   2

 **NOTE-Tension/Compression converged after  2 iterations, Case=  207
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 207
1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(+VE))+1.7*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124707795E+02
Y = 0.912071461E+03
Z = 0.131014476E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 207)
SUMMATION FORCE-X = -17.99
SUMMATION FORCE-Y = -1720.23
SUMMATION FORCE-Z = 1.43

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 23844.87 MY= -266.18 MZ= -5012.64

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 207)
SUMMATION FORCE-X = 17.99
SUMMATION FORCE-Y = 1720.23
SUMMATION FORCE-Z = -1.43

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -23844.87 MY= 266.18 MZ= 5012.64

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 207)

	MAXIMUMS	AT NODE
X =	-1.21167E+00	8
Y =	-3.86472E-01	746
Z =	-9.12788E-01	2
RX=	-3.10285E-03	2
RY=	0.00000E+00	0
RZ=	4.45890E-03	8

*** LOAD CASE 208 -- START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 208

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 208
1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(+VE))+1.7*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125499611E+02
Y = 0.912071486E+03
Z = 0.130260845E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 208)
SUMMATION FORCE-X = 0.73
SUMMATION FORCE-Y = -1720.25
SUMMATION FORCE-Z = -16.10

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 7697.69 MY= 233.59 MZ= -22254.38

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 208)
SUMMATION FORCE-X = -0.73
SUMMATION FORCE-Y = 1720.25
SUMMATION FORCE-Z = 16.10

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -7697.69 MY= -233.59 MZ= 22254.38

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 208)

	MAXIMUMS	AT NODE
X =	-1.13803E+00	8
Y =	-4.19583E-01	746
Z =	-1.03663E+00	2
RX=	-3.52382E-03	2
RY=	0.00000E+00	0
RZ=	4.21280E-03	8

**NOTE-Tension/Compression converged after 1 iterations, Case= 209

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 209
1.4*(DL+OEQL+CTL+PVL+PHL(+X)+TL(-VE))+1.7*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126260250E+02
Y = 0.912071498E+03
Z = 0.130936976E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 209)
SUMMATION FORCE-X = 18.30
SUMMATION FORCE-Y = -1720.27
SUMMATION FORCE-Z = -1.59

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 21071.58 MY= 270.37 MZ= -38436.53

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 209)
SUMMATION FORCE-X = -18.30
SUMMATION FORCE-Y = 1720.27
SUMMATION FORCE-Z = 1.59

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -21071.58 MY= -270.37 MZ= 38436.54

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 209)

	MAXIMUMS	AT NODE
X =	7.05667E-01	4
Y =	-4.16017E-01	746
Z =	-9.69229E-01	22
RX=	-3.31007E-03	22
RY=	0.00000E+00	0
RZ=	-2.59959E-03	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 210

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 210
1.4*(DL+OEQL+CTL+PVL+PHL(+Z)+TL(-VE))+1.7*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                    Y =  0.912071473E+03
                    Z =  0.131690613E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   210 )
     SUMMATION FORCE-X =          -0.43
     SUMMATION FORCE-Y =       -1720.24
     SUMMATION FORCE-Z =          15.94

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       37218.77  MY=        -229.40  MZ=      -21194.80


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   210 )
     SUMMATION FORCE-X =           0.43
     SUMMATION FORCE-Y =        1720.24
     SUMMATION FORCE-Z =         -15.94

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -37218.77  MY=         229.40  MZ=       21194.80


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    210)
           MAXIMUMS    AT NODE
    X = -6.62662E-01       5
    Y = -3.82906E-01     746
    Z = -7.67089E-01      22
    RX= -2.61973E-03      22
    RY=  0.00000E+00       0
    RZ=  2.45868E-03       5


**NOTE-Tension/Compression converged after  1 iterations, Case=  211



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   211
        1.4*(DL+OEQL+CTL+PVL-PHL(+X)+TL(-VE))+1.7*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.124673825E+02
                    Y =  0.912071432E+03
                    Z =  0.130942004E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   211 )
     SUMMATION FORCE-X =         -19.19
     SUMMATION FORCE-Y =       -1720.20
     SUMMATION FORCE-Z =          -1.31

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       21324.81  MY=        -285.09  MZ=       -3911.43


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   211 )
     SUMMATION FORCE-X =          19.19
     SUMMATION FORCE-Y =        1720.20
     SUMMATION FORCE-Z =           1.31

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -21324.81  MY=         285.09  MZ=        3911.43


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    211)
           MAXIMUMS    AT NODE
    X = -7.30845E-01       5
    Y = -4.12188E-01     746
    Z = -9.44986E-01      22
    RX= -3.22727E-03      22
    RY=  0.00000E+00       0
```

```
    RZ=  2.69352E-03       5

**NOTE-Tension/Compression converged after  1 iterations, Case=  212



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   212
        1.4*(DL+OEQL+CTL+PVL-PHL(+Z)+TL(-VE))+1.7*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.125465655E+02
                      Y =  0.912071457E+03
                      Z =  0.130188360E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   212 )
     SUMMATION FORCE-X =          -0.47
     SUMMATION FORCE-Y =       -1720.22
     SUMMATION FORCE-Z =         -18.84

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        5177.62  MY=         214.68  MZ=      -21153.17


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   212 )
     SUMMATION FORCE-X =           0.47
     SUMMATION FORCE-Y =        1720.22
     SUMMATION FORCE-Z =          18.84

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -5177.62  MY=        -214.68  MZ=       21153.17


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    212)
           MAXIMUMS    AT NODE
    X =  6.45368E-01       4
    Y = -4.45299E-01     746
    Z = -1.14713E+00      22
    RX= -3.91761E-03      22
    RY=  0.00000E+00       0
    RZ= -2.39453E-03       4

**NOTE-Tension/Compression converged after  1 iterations, Case=  213



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   213
        1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.5*LL


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.144357077E+02
                      Y =  0.913700001E+03
                      Z =  0.151496578E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.126143248E+02
                      Y =  0.911802703E+03
                      Z =  0.131486736E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   213 )
     SUMMATION FORCE-X =          16.28
```

```
     SUMMATION FORCE-Y =       -1265.62
     SUMMATION FORCE-Z =          -0.19

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       16465.82  MY=         241.06  MZ=      -30843.84


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   213 )
     SUMMATION FORCE-X =         -16.28
     SUMMATION FORCE-Y =        1265.62
     SUMMATION FORCE-Z =           0.19

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -16465.82  MY=        -241.06  MZ=       30843.85


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    213)
          MAXIMUMS    AT NODE
    X =  3.39281E-01       9
    Y = -2.69549E-01     690
    Z = -5.24233E-01      22
    RX= -1.79034E-03      22
    RY=  0.00000E+00       0
    RZ= -1.24591E-03       9


**NOTE-Tension/Compression converged after  1 iterations, Case=  214



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   214
        1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.5*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.125220754E+02
                     Y =  0.911802668E+03
                     Z =  0.132364778E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   214 )
     SUMMATION FORCE-X =           0.24
     SUMMATION FORCE-Y =       -1265.59
     SUMMATION FORCE-Z =          14.83

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       30306.27  MY=        -187.32  MZ=      -16065.21


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   214 )
     SUMMATION FORCE-X =          -0.24
     SUMMATION FORCE-Y =        1265.59
     SUMMATION FORCE-Z =         -14.83

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -30306.27  MY=         187.32  MZ=       16065.21


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    214)
          MAXIMUMS    AT NODE
    X = -2.49779E-01       4
    Y = -2.39650E-01     746
    Z = -3.50970E-01      22
    RX= -1.19862E-03      22
    RY=  0.00000E+00       0
    RZ=  9.28101E-04       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  215
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 215
1.2*(DL+OEQL+CTL+PVL-PHL(+X))+0.5*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.113311716E+02
Y = 0.913700001E+03
Z = 0.147569208E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124294956E+02
Y = 0.911802613E+03
Z = 0.131492621E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 215)
SUMMATION FORCE-X = -15.85
SUMMATION FORCE-Y = -1265.56
SUMMATION FORCE-Z = 0.05

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 16682.87 MY= -235.05 MZ= -1250.90

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 215)
SUMMATION FORCE-X = 15.85
SUMMATION FORCE-Y = 1265.56
SUMMATION FORCE-Z = -0.05

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -16682.87 MY= 235.05 MZ= 1250.90

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 215)

	MAXIMUMS	AT NODE
X =	-3.45970E-01	8
Y =	-2.64749E-01	746
Z =	-5.03452E-01	22
RX=	-1.71937E-03	22
RY=	0.00000E+00	0
RZ=	1.27286E-03	8

**NOTE-Tension/Compression converged after 1 iterations, Case= 216

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 216
1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+0.5*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125217493E+02
Y = 0.911802647E+03
Z = 0.130614569E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 216)
SUMMATION FORCE-X = 0.20
SUMMATION FORCE-Y = -1265.58
SUMMATION FORCE-Z = -14.98

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2842.43 MY= 193.33 MZ= -16029.53

```
   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   216 )
       SUMMATION FORCE-X =          -0.20
       SUMMATION FORCE-Y =        1265.58
       SUMMATION FORCE-Z =          14.98

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -2842.42  MY=        -193.33  MZ=       16029.53


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    216)
             MAXIMUMS    AT NODE
      X = -2.85936E-01       8
      Y = -2.98607E-01     690
      Z = -6.76715E-01      22
      RX= -2.31109E-03      22
      RY=  0.00000E+00       0
      RZ=  1.07156E-03       8


  **NOTE-Tension/Compression converged after  1 iterations, Case=  217



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   217
          1.2*(DL+OEQL+CTL+PVL+PHL(+X))+0.8*WL(+X)


           CENTER OF FORCE BASED ON X FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.141897837E+02
                        Y =  0.913700001E+03
                        Z =  0.149345623E+02

           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.127414570E+02
                        Y =  0.911624892E+03
                        Z =  0.131844460E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   217 )
       SUMMATION FORCE-X =          41.95
       SUMMATION FORCE-Y =       -1157.17
       SUMMATION FORCE-Z =          -0.48

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       14821.69  MY=         617.68  MZ=      -53073.72


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   217 )
       SUMMATION FORCE-X =         -41.95
       SUMMATION FORCE-Y =        1157.17
       SUMMATION FORCE-Z =           0.48

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -14821.69  MY=        -617.68  MZ=       53073.72


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    217)
             MAXIMUMS    AT NODE
      X =  5.98892E-01       5
      Y = -2.91440E-01     690
      Z = -4.11392E-01      22
      RX= -1.40497E-03      22
      RY=  0.00000E+00       0
      RZ= -2.37449E-03      39

*** LOAD CASE   218 -- START ITERATION NO.   2
```

*** LOAD CASE 218 -- START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 218

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 218
1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+0.8*WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125051242E+02
Y = 0.911624196E+03
Z = 0.133982668E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.140372609E+02
Y = 0.914325210E+03
Z = 0.144947641E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 218)
SUMMATION FORCE-X = 0.35
SUMMATION FORCE-Y = -1156.78
SUMMATION FORCE-Z = 35.77

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 48185.18 MY= -446.96 MZ= -14781.82

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 218)
SUMMATION FORCE-X = -0.35
SUMMATION FORCE-Y = 1156.78
SUMMATION FORCE-Z = -35.77

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -48185.19 MY= 446.96 MZ= 14781.82

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 218)

	MAXIMUMS	AT NODE
X =	-4.35214E-01	4
Y =	-2.19507E-01	1048
Z =	4.78336E-01	25
RX=	2.08795E-03	25
RY=	0.00000E+00	0
RZ=	1.63596E-03	4

**NOTE-Tension/Compression converged after 1 iterations, Case= 219

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 219
1.2*(DL+OEQL+CTL+PVL-PHL(+X))-0.8*WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.133232541E+02
Y = 0.913700001E+03
Z = 0.148125585E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                    X =  0.122667855E+02
                    Y =  0.911622322E+03
                    Z =  0.131819522E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   219 )
     SUMMATION FORCE-X =         -41.42
     SUMMATION FORCE-Y =       -1155.74
     SUMMATION FORCE-Z =           0.32

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       15531.63  MY=        -610.39  MZ=       23667.92


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   219 )
     SUMMATION FORCE-X =          41.42
     SUMMATION FORCE-Y =        1155.74
     SUMMATION FORCE-Z =          -0.32

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -15531.63  MY=         610.39  MZ=      -23667.92


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    219)
           MAXIMUMS    AT NODE
    X = -5.73913E-01       4
    Y = -2.34107E-01    1235
    Z = -3.60284E-01      22
    RX= -1.23043E-03      22
    RY=  0.00000E+00       0
    RZ=  2.30608E-03      38


**NOTE-Tension/Compression converged after  1 iterations, Case=  220



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   220
         1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-0.8*WL(+Z)


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.125034115E+02
                    Y =  0.911623018E+03
                    Z =  0.129680109E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                    X =  0.138196957E+02
                    Y =  0.914275748E+03
                    Z =  0.121917617E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   220 )
     SUMMATION FORCE-X =           0.18
     SUMMATION FORCE-Y =       -1156.12
     SUMMATION FORCE-Z =         -35.92

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -17831.86  MY=         454.24  MZ=      -14623.98


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   220 )
     SUMMATION FORCE-X =          -0.18
     SUMMATION FORCE-Y =        1156.12
     SUMMATION FORCE-Z =          35.92

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       17831.86  MY=        -454.24  MZ=       14623.98
```

```
   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    220)
             MAXIMUMS    AT NODE
      X =  4.42420E-01       5
      Y = -3.32614E-01     690
      Z = -7.84221E-01      22
      RX= -2.67824E-03      22
      RY=  0.00000E+00       0
      RZ= -1.66079E-03       5

*** LOAD CASE   221 -- START ITERATION NO.   2
*** LOAD CASE   221 -- START ITERATION NO.   3
*** LOAD CASE   221 -- START ITERATION NO.   4
*** LOAD CASE   221 -- START ITERATION NO.   5
```

**NOTE-Tension/Compression converged after 5 iterations, Case= 221

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   221
         1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)+0.5*LL


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.143291269E+02
                      Y =  0.913700001E+03
                      Z =  0.149014137E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.128628401E+02
                      Y =  0.911804756E+03
                      Z =  0.131515767E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   221 )
       SUMMATION FORCE-X =          67.52
       SUMMATION FORCE-Y =       -1266.99
       SUMMATION FORCE-Z =          -0.76

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       15972.93  MY=         993.02  MZ=      -77992.53


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   221 )
       SUMMATION FORCE-X =         -67.52
       SUMMATION FORCE-Y =        1266.99
       SUMMATION FORCE-Z =           0.76

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -15972.93  MY=        -993.02  MZ=       77992.54


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    221)
             MAXIMUMS    AT NODE
      X =  9.38705E-01       5
      Y = -3.38857E-01     690
      Z = -5.54561E-01      22
      RX= -1.89391E-03      22
      RY=  0.00000E+00       0
      RZ= -3.64714E-03      39

*** LOAD CASE   222 -- START ITERATION NO.   2
*** LOAD CASE   222 -- START ITERATION NO.   3
```

**NOTE-Tension/Compression converged after 3 iterations, Case= 222

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 222
1.2*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)+0.5*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126155072E+02
Y = 0.911803664E+03
Z = 0.133667092E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.136196358E+02
Y = 0.914346176E+03
Z = 0.149551029E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 222)
SUMMATION FORCE-X = 16.41
SUMMATION FORCE-Y = -1266.26
SUMMATION FORCE-Z = 41.69

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 55019.02 MY= -279.49 MZ= -30966.00

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 222)
SUMMATION FORCE-X = -16.41
SUMMATION FORCE-Y = 1266.26
SUMMATION FORCE-Z = -41.69

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -55019.03 MY= 279.49 MZ= 30966.00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 222)

	MAXIMUMS	AT NODE
X =	6.86225E-01	9
Y =	-3.18257E-01	1049
Z =	6.65371E-01	32
RX=	2.53511E-03	25
RY=	0.00000E+00	0
RZ=	-2.56716E-03	9

**NOTE-Tension/Compression converged after 1 iterations, Case= 223

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 223
1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)+0.5*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.142298199E+02
Y = 0.913700001E+03
Z = 0.146701114E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.123652705E+02
Y = 0.911800645E+03
Z = 0.131457642E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 223)

```
     SUMMATION FORCE-Y =       -1264.24
     SUMMATION FORCE-Z =           0.37

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       16958.71  MY=        -510.90  MZ=       16304.84


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   223 )
     SUMMATION FORCE-X =          34.95
     SUMMATION FORCE-Y =        1264.24
     SUMMATION FORCE-Z =          -0.37

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -16958.71  MY=         510.90  MZ=      -16304.84


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    223)
           MAXIMUMS    AT NODE
    X = -4.67016E-01       4
    Y = -2.71771E-01     745
    Z = -4.93904E-01      22
    RX= -1.68676E-03      22
    RY=  0.00000E+00       0
    RZ=  1.71618E-03       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  224



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   224
        1.2*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)+0.5*LL


         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.126131413E+02
                     Y =  0.911801740E+03
                     Z =  0.129304168E+02

         CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.132272554E+02
                     Y =  0.914317052E+03
                     Z =  0.117512532E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   224 )
     SUMMATION FORCE-X =          16.16
     SUMMATION FORCE-Y =       -1264.97
     SUMMATION FORCE-Z =         -42.08

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -22087.38  MY=         761.62  MZ=      -30721.69


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   224 )
     SUMMATION FORCE-X =         -16.16
     SUMMATION FORCE-Y =        1264.97
     SUMMATION FORCE-Z =          42.08

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       22087.39  MY=        -761.62  MZ=       30721.69


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    224)
           MAXIMUMS    AT NODE
    X =  7.42494E-01       5
    Y = -3.63089E-01     690
    Z = -9.95253E-01      22
```

```
      RX= -3.39894E-03      22
      RY=  0.00000E+00       0
      RZ= -2.77292E-03       5

*** LOAD CASE   225 -- START ITERATION NO.   2
*** LOAD CASE   225 -- START ITERATION NO.   3
```

**NOTE-Tension/Compression converged after 3 iterations, Case= 225

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   225
         1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)+0.5*LL


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.145757913E+02
                      Y =  0.913700001E+03
                      Z =  0.154209046E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.127706950E+02
                      Y =  0.911804722E+03
                      Z =  0.132392860E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   225 )
       SUMMATION FORCE-X =          51.48
       SUMMATION FORCE-Y =       -1266.96
       SUMMATION FORCE-Z =          14.27

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       29813.38  MY=         564.65  MZ=      -63213.90


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   225 )
       SUMMATION FORCE-X =         -51.48
       SUMMATION FORCE-Y =        1266.96
       SUMMATION FORCE-Z =         -14.27

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -29813.38  MY=        -564.65  MZ=       63213.90


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    225)
             MAXIMUMS    AT NODE
      X =  7.18689E-01       9
      Y = -2.93208E-01     690
      Z = -4.00749E-01       2
      RX= -1.36227E-03       2
      RY=  0.00000E+00       0
      RZ= -2.71058E-03      39

*** LOAD CASE   226 -- START ITERATION NO.   2
*** LOAD CASE   226 -- START ITERATION NO.   3
*** LOAD CASE   226 -- START ITERATION NO.   4
```

**NOTE-Tension/Compression converged after 4 iterations, Case= 226

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   226
         1.2*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)+0.5*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)
```

```
                        X =  0.125233045E+02
                        Y =  0.911803630E+03
                        Z =  0.134544729E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.138197469E+02
                        Y =  0.914336012E+03
                        Z =  0.143669781E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   226 )
       SUMMATION FORCE-X =           0.36
       SUMMATION FORCE-Y =       -1266.23
       SUMMATION FORCE-Z =          56.72

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       68859.47  MY=        -707.87  MZ=      -16187.37


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   226 )
       SUMMATION FORCE-X =          -0.36
       SUMMATION FORCE-Y =        1266.23
       SUMMATION FORCE-Z =         -56.72

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -68859.47  MY=         707.87  MZ=       16187.37


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    226)
             MAXIMUMS    AT NODE
      X = -6.56319E-01       4
      Y = -3.43181E-01    1049
      Z =  7.53020E-01      25
      RX=  3.30902E-03      25
      RY=  0.00000E+00       0
      RZ=  2.47057E-03       4

*** LOAD CASE   227 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  227



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   227
          1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)+0.5*LL


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.140120995E+02
                        Y =  0.913700001E+03
                        Z =  0.142185491E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.122729165E+02
                        Y =  0.911800610E+03
                        Z =  0.132336636E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   227 )
       SUMMATION FORCE-X =         -51.00
       SUMMATION FORCE-Y =       -1264.22
       SUMMATION FORCE-Z =          15.40

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       30799.15  MY=        -939.28  MZ=       31083.47
```

```
 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   227 )
     SUMMATION FORCE-X =          51.00
     SUMMATION FORCE-Y =        1264.22
     SUMMATION FORCE-Z =         -15.40

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -30799.15  MY=         939.28  MZ=      -31083.48


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    227)
           MAXIMUMS    AT NODE
    X = -8.30346E-01       4
    Y = -2.66313E-01    1215
    Z =  3.91666E-01      15
    RX=  1.56272E-03      18
    RY=  0.00000E+00       0
    RZ=  3.06906E-03       4


**NOTE-Tension/Compression converged after  1 iterations, Case=  228



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   228
         1.2*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)+0.5*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.125208451E+02
                       Y =  0.911801706E+03
                       Z =  0.130182616E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                       X =  0.125896683E+02
                       Y =  0.914322186E+03
                       Z =  0.112046376E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   228 )
     SUMMATION FORCE-X =           0.11
     SUMMATION FORCE-Y =       -1264.95
     SUMMATION FORCE-Z =         -27.05

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -8246.94  MY=         333.24  MZ=      -15943.05


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   228 )
     SUMMATION FORCE-X =          -0.11
     SUMMATION FORCE-Y =        1264.95
     SUMMATION FORCE-Z =          27.05

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        8246.94  MY=        -333.24  MZ=       15943.05


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    228)
           MAXIMUMS    AT NODE
    X = -4.61313E-01       8
    Y = -3.17440E-01     690
    Z = -8.21990E-01      22
    RX= -2.80722E-03      22
    RY=  0.00000E+00       0
    RZ=  1.73239E-03       8


**NOTE-Tension/Compression converged after  1 iterations, Case=  229
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 229
1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)+0.5*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.156224518E+02
Y = 0.913700001E+03
Z = 0.148518900E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126782226E+02
Y = 0.911804666E+03
Z = 0.131521647E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 229)
SUMMATION FORCE-X = 35.39
SUMMATION FORCE-Y = -1266.93
SUMMATION FORCE-Z = -0.52

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 16189.98 MY= 516.92 MZ= -48399.58

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 229)
SUMMATION FORCE-X = -35.39
SUMMATION FORCE-Y = 1266.93
SUMMATION FORCE-Z = 0.52

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -16189.98 MY= -516.92 MZ= 48399.59

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 229)

	MAXIMUMS	AT NODE
X =	5.07264E-01	5
Y =	-3.22266E-01	690
Z =	-5.33780E-01	22
RX=	-1.82294E-03	22
RY=	0.00000E+00	0
RZ=	-1.86579E-03	5

*** LOAD CASE 230 -- START ITERATION NO. 2
*** LOAD CASE 230 -- START ITERATION NO. 3
*** LOAD CASE 230 -- START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 230

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 230
1.2*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)+0.5*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124307716E+02
Y = 0.911803574E+03
Z = 0.133673078E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                        X =  0.134364183E+02
                        Y =  0.914382296E+03
                        Z =  0.145168641E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   230 )
       SUMMATION FORCE-X =         -15.72
       SUMMATION FORCE-Y =       -1266.20
       SUMMATION FORCE-Z =          41.93

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       55236.07  MY=        -755.60  MZ=       -1373.06


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   230 )
       SUMMATION FORCE-X =          15.72
       SUMMATION FORCE-Y =        1266.20
       SUMMATION FORCE-Z =         -41.93

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -55236.08  MY=         755.60  MZ=        1373.06


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    230)
             MAXIMUMS    AT NODE
      X = -7.08003E-01       4
      Y = -2.86712E-01    1049
      Z =  5.87924E-01      25
      RX=  2.57738E-03      25
      RY=  0.00000E+00       0
      RZ=  2.64635E-03       4

*** LOAD CASE   231 -- START ITERATION NO.   2
*** LOAD CASE   231 -- START ITERATION NO.   3

  **NOTE-Tension/Compression converged after  3 iterations, Case=  231



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   231
          1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)+0.5*LL


           CENTER OF FORCE BASED ON X FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.135950780E+02
                        Y =  0.913700001E+03
                        Z =  0.148070227E+02

           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.121802289E+02
                        Y =  0.911800555E+03
                        Z =  0.131463531E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   231 )
       SUMMATION FORCE-X =         -67.09
       SUMMATION FORCE-Y =       -1264.18
       SUMMATION FORCE-Z =           0.61

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       17175.76  MY=        -987.01  MZ=       45897.79


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   231 )
       SUMMATION FORCE-X =          67.09
       SUMMATION FORCE-Y =        1264.18
       SUMMATION FORCE-Z =          -0.61

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
```

```
      MX=      -17175.76  MY=         987.01  MZ=      -45897.79


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    231)
            MAXIMUMS    AT NODE
      X = -8.82031E-01       4
      Y = -2.99868E-01    1215
      Z = -4.73124E-01      22
      RX= -1.61579E-03      22
      RY=  0.00000E+00       0
      RZ=  3.54328E-03      38

*** LOAD CASE   232 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  232



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   232
         1.2*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)+0.5*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.124282182E+02
                      Y =  0.911801650E+03
                      Z =  0.129309952E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.134086449E+02
                      Y =  0.914280688E+03
                      Z =  0.121722543E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   232 )
       SUMMATION FORCE-X =         -15.97
       SUMMATION FORCE-Y =       -1264.91
       SUMMATION FORCE-Z =         -41.84

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -21870.33  MY=         285.51  MZ=       -1128.74


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   232 )
       SUMMATION FORCE-X =          15.97
       SUMMATION FORCE-Y =        1264.91
       SUMMATION FORCE-Z =          41.84

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       21870.33  MY=        -285.51  MZ=        1128.74


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    232)
            MAXIMUMS    AT NODE
      X = -7.34801E-01       8
      Y = -3.46498E-01     690
      Z = -9.74472E-01      22
      RX= -3.32798E-03      22
      RY=  0.00000E+00       0
      RZ=  2.75032E-03       8

*** LOAD CASE   233 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  233



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   233
```

1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)+0.5*LL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.149721418E+02
Y = 0.913700001E+03
Z = 0.143474605E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.127703721E+02
Y = 0.911804700E+03
Z = 0.130644545E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 233)
SUMMATION FORCE-X = 51.44
SUMMATION FORCE-Y = -1266.95
SUMMATION FORCE-Z = -15.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2349.54 MY= 945.29 MZ= -63178.22

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 233)
SUMMATION FORCE-X = -51.44
SUMMATION FORCE-Y = 1266.95
SUMMATION FORCE-Z = 15.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2349.54 MY= -945.29 MZ= 63178.22

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 233)

	MAXIMUMS	AT NODE
X =	8.80111E-01	5
Y =	-3.67915E-01	690
Z =	-7.07043E-01	22
RX=	-2.41466E-03	22
RY=	0.00000E+00	0
RZ=	-3.25199E-03	5

*** LOAD CASE 234 -- START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 234

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 234
1.2*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)+0.5*LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125229786E+02
Y = 0.911803608E+03
Z = 0.132795431E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.129121943E+02
Y = 0.914423900E+03
Z = 0.155120108E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 234)
SUMMATION FORCE-X = 0.32

```
     SUMMATION FORCE-Z =          26.90

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       41395.63  MY=        -327.23  MZ=      -16151.69


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   234 )
     SUMMATION FORCE-X =          -0.32
     SUMMATION FORCE-Y =        1266.22
     SUMMATION FORCE-Z =         -26.90

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=      -41395.63  MY=         327.23  MZ=       16151.69


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    234)
           MAXIMUMS    AT NODE
    X =  4.17257E-01       9
    Y = -2.70382E-01    1049
    Z =  5.11377E-01      32
    RX=  1.80347E-03      25
    RY=  0.00000E+00       0
    RZ= -1.56653E-03       9


**NOTE-Tension/Compression converged after  1 iterations, Case=  235



        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   235
        1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)+0.5*LL


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.136130746E+02
                     Y =  0.913700001E+03
                     Z =  0.153012895E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.122725873E+02
                     Y =  0.911800589E+03
                     Z =  0.130584527E+02

 ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   235 )
     SUMMATION FORCE-X =          -51.04
     SUMMATION FORCE-Y =        -1264.21
     SUMMATION FORCE-Z =          -14.42

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=        3335.31  MY=        -558.63  MZ=       31119.15


 ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   235 )
     SUMMATION FORCE-X =          51.04
     SUMMATION FORCE-Y =        1264.21
     SUMMATION FORCE-Z =          14.42

    SUMMATION OF MOMENTS AROUND THE ORIGIN-
    MX=       -3335.31  MY=         558.63  MZ=      -31119.16


 MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    235)
           MAXIMUMS    AT NODE
    X = -7.12571E-01       8
    Y = -2.96771E-01     745
    Z = -6.46387E-01      22
    RX= -2.20751E-03      22
```

```
      RY=  0.00000E+00       0
      RZ=  2.69231E-03      38

*** LOAD CASE   236 -- START ITERATION NO.   2

  **NOTE-Tension/Compression converged after  2 iterations, Case=  236



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   236
         1.2*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)+0.5*LL


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.125205188E+02
                      Y =  0.911801684E+03
                      Z =  0.128431494E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.136639962E+02
                      Y =  0.914287855E+03
                      Z =  0.123210149E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   236 )
       SUMMATION FORCE-X =           0.08
       SUMMATION FORCE-Y =       -1264.94
       SUMMATION FORCE-Z =         -56.86

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -35710.78  MY=         713.89  MZ=      -15907.37


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   236 )
       SUMMATION FORCE-X =          -0.08
       SUMMATION FORCE-Y =        1264.94
       SUMMATION FORCE-Z =          56.86

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       35710.78  MY=        -713.89  MZ=       15907.37


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    236)
             MAXIMUMS    AT NODE
      X =  6.84052E-01       5
      Y = -3.92147E-01     690
      Z = -1.16774E+00      22
      RX= -3.98223E-03      22
      RY=  0.00000E+00       0
      RZ= -2.57163E-03       5


  **NOTE-Tension/Compression converged after  1 iterations, Case=  237



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   237
         0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.143803613E+02
                      Y =  0.913700001E+03
                      Z =  0.147321064E+02
```

```
          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.122417974E+02
                        Y =  0.911620374E+03
                        Z =  0.131786837E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   237 )
       SUMMATION FORCE-X =         -38.99
       SUMMATION FORCE-Y =        -865.99
       SUMMATION FORCE-Z =           0.42

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       11793.99  MY=        -570.69  MZ=       25024.16


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   237 )
       SUMMATION FORCE-X =          38.99
       SUMMATION FORCE-Y =         865.99
       SUMMATION FORCE-Z =          -0.42

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -11793.99  MY=         570.69  MZ=      -25024.16


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    237)
             MAXIMUMS    AT NODE
      X = -4.82027E-01       4
      Y = -1.76378E-01     743
      Z = -2.66843E-01      22
      RX= -9.11311E-04      22
      RY=  0.00000E+00       0
      RZ=  1.77484E-03       4

*** LOAD CASE   238 -- START ITERATION NO.   2
*** LOAD CASE   238 -- START ITERATION NO.   3
*** LOAD CASE   238 -- START ITERATION NO.   4

  **NOTE-Tension/Compression converged after  4 iterations, Case=  238



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   238
          0.9*(DL+OEQL+CTL+PVL+PHL(+X))+1.6*WL(+Z)


          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.126036676E+02
                        Y =  0.911622124E+03
                        Z =  0.128643575E+02

          CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                        X =  0.132855134E+02
                        Y =  0.914329228E+03
                        Z =  0.124486570E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   238 )
       SUMMATION FORCE-X =          12.12
       SUMMATION FORCE-Y =        -866.72
       SUMMATION FORCE-Z =         -42.03

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -27252.10  MY=         701.83  MZ=      -22002.37


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   238 )
       SUMMATION FORCE-X =         -12.12
```

```
      SUMMATION FORCE-Y =         866.72
      SUMMATION FORCE-Z =          42.03

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=       27252.10  MY=        -701.83  MZ=       22002.37


  MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    238)
           MAXIMUMS    AT NODE
     X =  6.31659E-01       5
     Y = -2.86130E-01     690
     Z = -7.82414E-01      22
     RX= -2.66794E-03      22
     RY=  0.00000E+00       0
     RZ= -2.36615E-03       5
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 239

```
        STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   239
        0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+X)


         CENTER OF FORCE BASED ON X FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.143803613E+02
                     Y =  0.913700001E+03
                     Z =  0.147321064E+02

         CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
       (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                     X =  0.122417974E+02
                     Y =  0.911620374E+03
                     Z =  0.131786837E+02

  ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   239 )
      SUMMATION FORCE-X =         -38.99
      SUMMATION FORCE-Y =        -865.99
      SUMMATION FORCE-Z =           0.42

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=       11793.99  MY=        -570.69  MZ=       25024.16


  ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   239 )
      SUMMATION FORCE-X =          38.99
      SUMMATION FORCE-Y =         865.99
      SUMMATION FORCE-Z =          -0.42

     SUMMATION OF MOMENTS AROUND THE ORIGIN-
     MX=      -11793.99  MY=         570.69  MZ=      -25024.16


  MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    239)
           MAXIMUMS    AT NODE
     X = -4.82027E-01       4
     Y = -1.76378E-01     743
     Z = -2.66843E-01      22
     RX= -9.11311E-04      22
     RY=  0.00000E+00       0
     RZ=  1.77484E-03       4

*** LOAD CASE   240 -- START ITERATION NO.   2
*** LOAD CASE   240 -- START ITERATION NO.   3
*** LOAD CASE   240 -- START ITERATION NO.   4
```

**NOTE-Tension/Compression converged after 4 iterations, Case= 240

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 240
0.9*(DL+OEQL+CTL+PVL+PHL(+X))-1.6*WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.126036676E+02
Y = 0.911622124E+03
Z = 0.128643575E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.132855134E+02
Y = 0.914329228E+03
Z = 0.124486570E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 240)
SUMMATION FORCE-X = 12.12
SUMMATION FORCE-Y = -866.72
SUMMATION FORCE-Z = -42.03

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -27252.10 MY= 701.83 MZ= -22002.37

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 240)
SUMMATION FORCE-X = -12.12
SUMMATION FORCE-Y = 866.72
SUMMATION FORCE-Z = 42.03

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 27252.10 MY= -701.83 MZ= 22002.37

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 240)

	MAXIMUMS	AT NODE
X =	6.31659E-01	5
Y =	-2.86130E-01	690
Z =	-7.82414E-01	22
RX=	-2.66794E-03	22
RY=	0.00000E+00	0
RZ=	-2.36615E-03	5

*** LOAD CASE 241 -- START ITERATION NO. 2
*** LOAD CASE 241 -- START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 241

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 241
0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.141816430E+02
Y = 0.913700001E+03
Z = 0.143789757E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                      Y =  0.911620333E+03
                      Z =  0.132749265E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   241 )
       SUMMATION FORCE-X =         -51.03
       SUMMATION FORCE-Y =        -865.97
       SUMMATION FORCE-Z =          11.69

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       22174.32  MY=        -891.97  MZ=       36108.13


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   241 )
       SUMMATION FORCE-X =          51.03
       SUMMATION FORCE-Y =         865.97
       SUMMATION FORCE-Z =         -11.69

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -22174.32  MY=         891.97  MZ=      -36108.14


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    241)
             MAXIMUMS    AT NODE
      X = -7.54923E-01       4
      Y = -2.12605E-01    1215
      Z =  2.84024E-01      18
      RX=  1.27916E-03      18
      RY=  0.00000E+00       0
      RZ=  2.79074E-03       4

*** LOAD CASE   242 -- START ITERATION NO.   2
*** LOAD CASE   242 -- START ITERATION NO.   3
*** LOAD CASE   242 -- START ITERATION NO.   4

  **NOTE-Tension/Compression converged after  4 iterations, Case=  242



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   242
          0.9*(DL+OEQL+CTL+PVL+PHL(+Z))+1.6*WL(+Z)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.125026378E+02
                      Y =  0.911622083E+03
                      Z =  0.129605131E+02

           CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.128863526E+02
                      Y =  0.914337075E+03
                      Z =  0.123436697E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   242 )
       SUMMATION FORCE-X =           0.09
       SUMMATION FORCE-Y =        -866.70
       SUMMATION FORCE-Z =         -30.76

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -16871.77  MY=         380.54  MZ=      -10918.40


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   242 )
       SUMMATION FORCE-X =          -0.09
       SUMMATION FORCE-Y =         866.70
       SUMMATION FORCE-Z =          30.76

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
```

```
      MX=       16871.77  MY=        -380.54  MZ=       10918.40


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    242)
            MAXIMUMS    AT NODE
      X = -4.04805E-01       8
      Y = -2.51893E-01     690
      Z = -6.38244E-01      22
      RX= -2.17970E-03      22
      RY=  0.00000E+00       0
      RZ=  1.52616E-03       8

*** LOAD CASE   243 -- START ITERATION NO.   2
*** LOAD CASE   243 -- START ITERATION NO.   3
```

**NOTE-Tension/Compression converged after 3 iterations, Case= 243

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   243
         0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.141816430E+02
                      Y =  0.913700001E+03
                      Z =  0.143789757E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.121406754E+02
                      Y =  0.911620333E+03
                      Z =  0.132749265E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   243 )
       SUMMATION FORCE-X =         -51.03
       SUMMATION FORCE-Y =        -865.97
       SUMMATION FORCE-Z =          11.69

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       22174.32  MY=        -891.97  MZ=       36108.13


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   243 )
       SUMMATION FORCE-X =          51.03
       SUMMATION FORCE-Y =         865.97
       SUMMATION FORCE-Z =         -11.69

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -22174.32  MY=         891.97  MZ=      -36108.14


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    243)
            MAXIMUMS    AT NODE
      X = -7.54923E-01       4
      Y = -2.12605E-01    1215
      Z =  2.84024E-01      18
      RX=  1.27916E-03      18
      RY=  0.00000E+00       0
      RZ=  2.79074E-03       4

*** LOAD CASE   244 -- START ITERATION NO.   2
*** LOAD CASE   244 -- START ITERATION NO.   3
*** LOAD CASE   244 -- START ITERATION NO.   4
```

**NOTE-Tension/Compression converged after 4 iterations, Case= 244

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 244
0.9*(DL+OEQL+CTL+PVL+PHL(+Z))-1.6*WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125026378E+02
Y = 0.911622083E+03
Z = 0.129605131E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.128863526E+02
Y = 0.914337075E+03
Z = 0.123436697E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 244)
SUMMATION FORCE-X = 0.09
SUMMATION FORCE-Y = -866.70
SUMMATION FORCE-Z = -30.76

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -16871.77 MY= 380.54 MZ= -10918.40

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 244)
SUMMATION FORCE-X = -0.09
SUMMATION FORCE-Y = 866.70
SUMMATION FORCE-Z = 30.76

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 16871.77 MY= -380.54 MZ= 10918.40

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 244)

	MAXIMUMS	AT NODE
X =	-4.04805E-01	8
Y =	-2.51893E-01	690
Z =	-6.38244E-01	22
RX=	-2.17970E-03	22
RY=	0.00000E+00	0
RZ=	1.52616E-03	8

*** LOAD CASE 245 -- START ITERATION NO. 2
*** LOAD CASE 245 -- START ITERATION NO. 3
*** LOAD CASE 245 -- START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 245

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 245
0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.138166440E+02
Y = 0.913700001E+03
Z = 0.148176139E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.120391859E+02

```
                      Z =  0.131793302E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   245 )
       SUMMATION FORCE-X =         -63.09
       SUMMATION FORCE-Y =        -865.95
       SUMMATION FORCE-Z =           0.60

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       11956.78  MY=        -927.77  MZ=       47218.86


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   245 )
       SUMMATION FORCE-X =          63.09
       SUMMATION FORCE-Y =         865.95
       SUMMATION FORCE-Z =          -0.60

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -11956.78  MY=         927.77  MZ=      -47218.87


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    245)
             MAXIMUMS    AT NODE
      X = -7.97015E-01       4
      Y = -2.57926E-01    1215
      Z = -2.51258E-01      22
      RX= -8.58085E-04      22
      RY=  0.00000E+00       0
      RZ=  3.17684E-03      38

*** LOAD CASE   246 -- START ITERATION NO.   2
*** LOAD CASE   246 -- START ITERATION NO.   3
*** LOAD CASE   246 -- START ITERATION NO.   4
*** LOAD CASE   246 -- START ITERATION NO.   5

  **NOTE-Tension/Compression converged after  5 iterations, Case=  246



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   246
          0.9*(DL+OEQL+CTL+PVL-PHL(+X))+1.6*WL(+Z)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.124012454E+02
                      Y =  0.911622016E+03
                      Z =  0.128649872E+02

           CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.134217603E+02
                      Y =  0.914302015E+03
                      Z =  0.127672771E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   246 )
       SUMMATION FORCE-X =         -11.97
       SUMMATION FORCE-Y =        -866.67
       SUMMATION FORCE-Z =         -41.85

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -27089.31  MY=         344.75  MZ=         192.34


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   246 )
       SUMMATION FORCE-X =          11.97
       SUMMATION FORCE-Y =         866.67
       SUMMATION FORCE-Z =          41.85

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
```

```
      MX=       27089.31  MY=        -344.75  MZ=        -192.34


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    246)
            MAXIMUMS    AT NODE
      X = -6.09920E-01       8
      Y =  3.45735E-01    1050
      Z = -8.37974E-01      32
      RX= -2.81790E-03      32
      RY=  0.00000E+00       0
      RZ=  2.28961E-03       8

*** LOAD CASE   247 -- START ITERATION NO.   2
*** LOAD CASE   247 -- START ITERATION NO.   3
*** LOAD CASE   247 -- START ITERATION NO.   4
```

**NOTE-Tension/Compression converged after 4 iterations, Case= 247

```
         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   247
         0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.138166440E+02
                      Y =  0.913700001E+03
                      Z =  0.148176139E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.120391859E+02
                      Y =  0.911620266E+03
                      Z =  0.131793302E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   247 )
       SUMMATION FORCE-X =         -63.09
       SUMMATION FORCE-Y =        -865.95
       SUMMATION FORCE-Z =           0.60

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       11956.78  MY=        -927.77  MZ=       47218.86


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   247 )
       SUMMATION FORCE-X =          63.09
       SUMMATION FORCE-Y =         865.95
       SUMMATION FORCE-Z =          -0.60

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -11956.78  MY=         927.77  MZ=      -47218.87


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    247)
            MAXIMUMS    AT NODE
      X = -7.97015E-01       4
      Y = -2.57926E-01    1215
      Z = -2.51258E-01      22
      RX= -8.58085E-04      22
      RY=  0.00000E+00       0
      RZ=  3.17684E-03      38

*** LOAD CASE   248 -- START ITERATION NO.   2
*** LOAD CASE   248 -- START ITERATION NO.   3
*** LOAD CASE   248 -- START ITERATION NO.   4
*** LOAD CASE   248 -- START ITERATION NO.   5
```

**NOTE-Tension/Compression converged after 5 iterations, Case= 248

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 248
0.9*(DL+OEQL+CTL+PVL-PHL(+X))-1.6*WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.124012454E+02
Y = 0.911622016E+03
Z = 0.128649872E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.134217603E+02
Y = 0.914302015E+03
Z = 0.127672771E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 248)
SUMMATION FORCE-X = -11.97
SUMMATION FORCE-Y = -866.67
SUMMATION FORCE-Z = -41.85

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -27089.31 MY= 344.75 MZ= 192.34

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 248)
SUMMATION FORCE-X = 11.97
SUMMATION FORCE-Y = 866.67
SUMMATION FORCE-Z = 41.85

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 27089.31 MY= -344.75 MZ= -192.34

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 248)

	MAXIMUMS	AT NODE
X =	-6.09920E-01	8
Y =	3.45735E-01	1050
Z =	-8.37974E-01	32
RX=	-2.81790E-03	32
RY=	0.00000E+00	0
RZ=	2.28961E-03	8

*** LOAD CASE 249 -- START ITERATION NO. 2
*** LOAD CASE 249 -- START ITERATION NO. 3
*** LOAD CASE 249 -- START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 249

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 249
0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+X)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.138823666E+02
Y = 0.913700001E+03
Z = 0.151907019E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

```
                      X =  0.121403132E+02
                      Y =  0.911620307E+03
                      Z =  0.130830862E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   249 )
       SUMMATION FORCE-X =         -51.05
       SUMMATION FORCE-Y =        -865.96
       SUMMATION FORCE-Z =         -10.67

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=        1576.45  MY=        -606.49  MZ=       36134.89


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   249 )
       SUMMATION FORCE-X =          51.05
       SUMMATION FORCE-Y =         865.96
       SUMMATION FORCE-Z =          10.67

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -1576.45  MY=         606.49  MZ=      -36134.89


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    249)
             MAXIMUMS    AT NODE
      X = -6.02699E-01       8
      Y = -1.95369E-01    1235
      Z = -3.81205E-01      22
      RX= -1.30187E-03      22
      RY=  0.00000E+00       0
      RZ=  2.53862E-03      38

*** LOAD CASE   250 -- START ITERATION NO.   2
*** LOAD CASE   250 -- START ITERATION NO.   3
*** LOAD CASE   250 -- START ITERATION NO.   4
*** LOAD CASE   250 -- START ITERATION NO.   5

  **NOTE-Tension/Compression converged after  5 iterations, Case=  250



          STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   250
          0.9*(DL+OEQL+CTL+PVL-PHL(+Z))+1.6*WL(+Z)


           CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.125022805E+02
                      Y =  0.911622057E+03
                      Z =  0.127688303E+02

           CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
         (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.136239868E+02
                      Y =  0.914303245E+03
                      Z =  0.127604726E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   250 )
       SUMMATION FORCE-X =           0.06
       SUMMATION FORCE-Y =        -866.69
       SUMMATION FORCE-Z =         -53.12

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=      -37469.65  MY=         666.03  MZ=      -10891.64


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   250 )
       SUMMATION FORCE-X =          -0.06
       SUMMATION FORCE-Y =         866.69
       SUMMATION FORCE-Z =          53.12
```

```
      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       37469.65  MY=        -666.03  MZ=       10891.64


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    250)
            MAXIMUMS    AT NODE
      X =  5.87827E-01       5
      Y =  5.24677E-01    1051
      Z = -1.06344E+00      32
      RX= -3.53911E-03      32
      RY=  0.00000E+00       0
      RZ= -2.21518E-03       5

*** LOAD CASE   251 -- START ITERATION NO.   2
*** LOAD CASE   251 -- START ITERATION NO.   3
*** LOAD CASE   251 -- START ITERATION NO.   4

  **NOTE-Tension/Compression converged after  4 iterations, Case=  251



         STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO.   251
         0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+X)


          CENTER OF FORCE BASED ON X FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.138823666E+02
                      Y =  0.913700001E+03
                      Z =  0.151907019E+02

          CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
        (FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

                      X =  0.121403132E+02
                      Y =  0.911620307E+03
                      Z =  0.130830862E+02

   ***TOTAL APPLIED LOAD ( MTON METE ) SUMMARY (LOADING   251 )
       SUMMATION FORCE-X =         -51.05
       SUMMATION FORCE-Y =        -865.96
       SUMMATION FORCE-Z =         -10.67

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=        1576.45  MY=        -606.49  MZ=       36134.89


   ***TOTAL REACTION LOAD( MTON METE ) SUMMARY (LOADING   251 )
       SUMMATION FORCE-X =          51.05
       SUMMATION FORCE-Y =         865.96
       SUMMATION FORCE-Z =          10.67

      SUMMATION OF MOMENTS AROUND THE ORIGIN-
      MX=       -1576.45  MY=         606.49  MZ=      -36134.89


   MAXIMUM DISPLACEMENTS (  CM  /RADIANS) (LOADING    251)
            MAXIMUMS    AT NODE
      X = -6.02699E-01       8
      Y = -1.95369E-01    1235
      Z = -3.81205E-01      22
      RX= -1.30187E-03      22
      RY=  0.00000E+00       0
      RZ=  2.53862E-03      38

*** LOAD CASE   252 -- START ITERATION NO.   2
*** LOAD CASE   252 -- START ITERATION NO.   3
*** LOAD CASE   252 -- START ITERATION NO.   4
*** LOAD CASE   252 -- START ITERATION NO.   5
```

**NOTE-Tension/Compression converged after 5 iterations, Case= 252

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 252
0.9*(DL+OEQL+CTL+PVL-PHL(+Z))-1.6*WL(+Z)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.125022805E+02
Y = 0.911622057E+03
Z = 0.127688303E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.136239868E+02
Y = 0.914303245E+03
Z = 0.127604726E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 252)
SUMMATION FORCE-X = 0.06
SUMMATION FORCE-Y = -866.69
SUMMATION FORCE-Z = -53.12

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -37469.65 MY= 666.03 MZ= -10891.64

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 252)
SUMMATION FORCE-X = -0.06
SUMMATION FORCE-Y = 866.69
SUMMATION FORCE-Z = 53.12

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 37469.65 MY= -666.03 MZ= 10891.64

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 252)

	MAXIMUMS	AT NODE
X =	5.87827E-01	5
Y =	5.24677E-01	1051
Z =	-1.06344E+00	32
RX=	-3.53911E-03	32
RY=	0.00000E+00	0
RZ=	-2.21518E-03	5

********** END OF DATA FROM INTERNAL STORAGE **********

```
2298. LOAD LIST 200 TO 252
2299. START CONCRETE DESIGN
2300. CODE ACI
2301. FC 3568.88 MEMB 1 TO 34
2302. FYMAIN 42826.6 MEMB 1 TO 34
2303. CLB 0.05 MEMB 1 TO 34
2304. CLS 0.05 ALL
2305. CLT 0.05 MEMB 1 TO 34
2306. MAXMAIN 20 ALL
2307. MINMAIN 20 ALL
2308. MINSEC 10 ALL
2309. SFACE 0.35 MEMB 1 TO 3 6 7 10 11 14 15 17 18
2310. SFACE 0.4 MEMB 4 5 8 9 20 24
2311. SFACE 0.45 MEMB 27 29 31 TO 34
2312. SFACE 0.5 MEMB 12 13 16 19 21 TO 23 25 26 30
```

2314. DESIGN COLUMN 1 TO 34

ACI 318-11 COLUMN NO. 1 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 2 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, RECT SIZE - 650.0 X 500.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3250.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.160	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 3 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 4 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 5 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 6 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 7 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 8 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 9 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 10 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 11 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 12 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 13 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 14 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, RECT SIZE - 650.0 X 500.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3250.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.160	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 15 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 16 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, RECT SIZE - 750.0 X 500.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3750.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.005	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 17 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 18 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 19 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, RECT SIZE - 750.0 X 500.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3750.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.005	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 20 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 21 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 22 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 23 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 24 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 25 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 26 DESIGN RESULTS
==========

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 27 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 28 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 29 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 30 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
AREA OF STEEL REQUIRED = 4456.8 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
16 - 20 MM	1.396	231	STA	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 31 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
AREA OF STEEL REQUIRED = 4305.6 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
16 - 20 MM	1.396	221	STA	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 32 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 33 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 10 SPACING 320.00 MM

ACI 318-11 COLUMN NO. 34 DESIGN RESULTS

FY - 420.0 FC - 35.0 MPA, SQRE SIZE - 600.0 X 600.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 3600.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
12 - 20 MM	1.047	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)

TIE BAR NUMBER 10 SPACING 320.00 MM

**********END OF COLUMN DESIGN RESULTS**********

2315. END CONCRETE DESIGN
2316. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= JUL 31,2020 TIME= 12:59:34 ****

****
* For technical assistance on STAAD.Pro, please visit *
* http://selectservices.bentley.com/en-US/ *
* *
* Details about additional assistance from *
* Bentley and Partners can be found at program menu *
* Help->Technical Support *
* *
* Copyright (c) 1997-2016 Bentley Systems, Inc. *
* http://www.bentley.com *
****


ATTACHMENT - 4 : INPUT DRAWING.

PROPRIETARY & CONFIDENTIAL


The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

DRAWING NUMBER: MD-216-3220-EG-ST-GAD-2140 | REV: A03

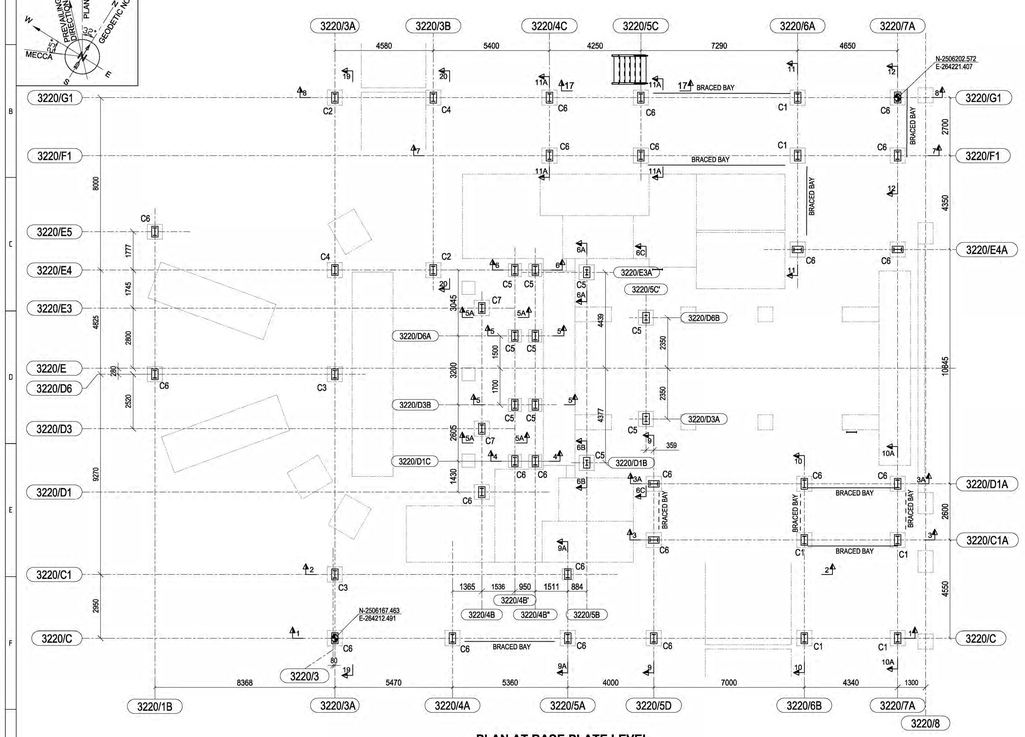


PLAN AT BASE PLATE LEVEL
(SCALE 1:100)

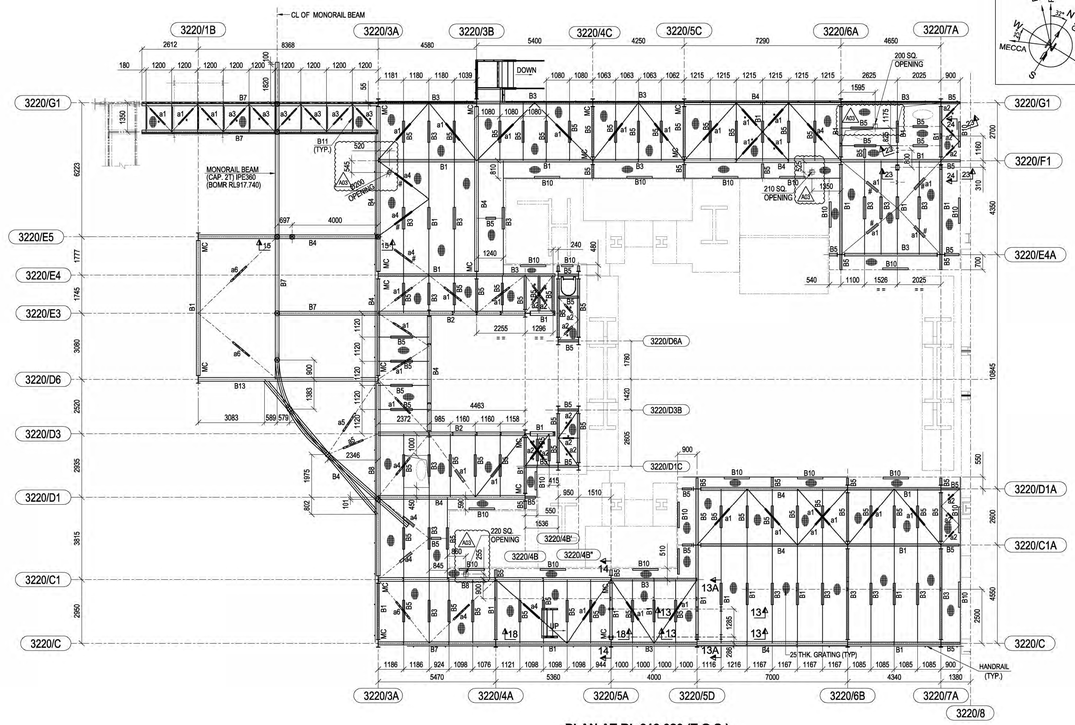

PLAN AT RL 919.020 (T.O.S.)
(SCALE 1:100)

(TOP OF FLOOR BRACING SHOULD BE KEPT 220mm BELOW T.O.S. U.N.O.)
(TOP OF " MARKED FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S.)
(TOP OF 'F' MARKED FLOOR BRACING SHOULD BE KEPT 260mm BELOW T.O.S.)




KEY PLAN
(SCALE 1:1000)

SCHEDULE OF MEMBERS


MEMBER MARKED	MEMBER	SECTON	FACTORED AXIAL FORCE(KN)	FACTORED SHEAR FORCE(KN)	REMARKS
B1	IPE300	I	175	80	MATERIAL GRADE:S275 JR
B2	IPE500	I	200	250	
B3	IPE240	I	160	60	
B4	IPE400	I	240	200	
B5	IPE200	I	205	60	
B6	UPN140	[	130	-	
B7	IPE360	I	310	150	
B8	IPE600	I	230	300	
B10	UPN240	[	25	35	
B11	UPN100	[	-	-	
B12	HEA300	I	185	140	
B13	IPE450	I	25	90	
a1	L 90X90X8	⌐	150	-	
a2	L 50X50X6	⌐	40	-	
a3	L 75X75X8	⌐	60	-	
a4	L 100X100X10	⌐	165	-	
a5	L 100X100X8	⌐	85	-	
a6	L 130X130X10	⌐	135	-	
a7	2L130X130X13	⌐	50	-	
a8	L 65X65X6	⌐	50	-	
b1	L 50X50X6	⌐	55	-	
b3	UPN140	[	130	-	
b4	L 130X130X10	⌐	220	-	
b5	L 100X100X8	⌐	85	-	
b6	L 75X75X8	⌐	85	-	
b7	L 90X90X8	⌐	280	-	
b8	L 100X100X10	⌐	85	-	
b9	L 65X65X6	⌐	60	-	
b10	UPN140	⊓	30	-	
b11	UPN200	⊓	30	-	
b12	UPN200	[	-	-	
b13	L 100X100X10	⌐	-	-	
P1	IPE200	I	-	-	
P2	IPE240	I	400	-	

MINIMUM GUSSET PLATE ARE 8mm THK.
FOR DEVELOPING CONNECTIONS MEMBER END FORCES MENTIONED IN SCHEDULE OF MEMBERS SHALL BE FOLLOWED.
MINIMUM 6mm FILLET WELD OF 150 mm LENGTH SHALL BE PROVIDED FOR WELDED CONNECTION. FOR BOLTED CONNECTION, MINIMUM 2 Nos. M20 BOLTS SHALL BE PROVIDED.




PLAN AT RL 916.650 (T.O.S.)
(SCALE 1:100)

(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)




PLAN AT RL 916.230 (T.O.S.)
(SCALE 1:100)

(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)




PLAN AT RL 916.200(T.O.S.)
(SCALE 1:100)


(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)




DETAIL OF BASE PLATE MARKED C1, C2 & C3
(SCALE 1:15)



VIEW A-A
(SCALE 1:15)




VIEW B-B
(SCALE 1:15)




PLAN AT RL 916.200(T.O.S.)
(SCALE 1:100)


(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)




DETAIL OF BASE PLATE MARKED C4
(SCALE 1:15)




DETAIL OF BASE PLATE MARKED C5
(SCALE 1:15)



DETAIL OF BASE PLATE MARKED C7
(SCALE 1:15)



VIEW G-G
(SCALE 1:15)



VIEW H-H
(SCALE 1:15)

VIEW C-C
(SCALE 1:15)




VIEW D-D
(SCALE 1:15)

DETAIL OF BASE PLATE MARKED C6
(SCALE 1:15)

VIEW A1-A1
(SCALE 1:15)

VIEW B1-B1
(SCALE 1:15)



SECTION 7B-7B
(SCALE 1:10)

SECTION 15-15
(SCALE 1:100)



PLAN AT RL 920.345 (T.O.S.)
(SCALE 1:50)

(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)

SECTION 23-23
(SCALE 1:50)

SECTION 24-24
(SCALE 1:50)

SECTION 7C-7C
(SCALE 1:10)

SECTION- 6A-6A
SCALE: 1:100

SECTION- 6B-6B
SCALE: 1:100

SECTION- 6C-6C
SCALE: 1:100

SECTION- 7A-7A
SCALE: 1:50

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRE AND LEVELS & COORDINATES ARE IN METRE UNO.
2. ANCHOR BOLT MATERIAL SHALL BE AS PER ASTM F 1554 Gr.36.
3. SIZE OF WELD SHALL BE DECIDED BASED ON LESSER THICKNESS OF THE JOINED MEMBER UNO.
4. ALL WELDS ARE MINIMUM 6 mm LENGTH SIZE CONTINUOUS FILLET UNO.
5. ALL PERMANENT HOLES SHALL BE 21.5 Ø FOR M20 BOLT AS PER (ASTM - A325M) UNO.
6. THREAD TO BE PERMANENTLY DAMAGED AFTER TIGHTENING OF NUT FOR ALL PERMANENT BOLTS BELOW GRIP LENGTH.
7. PROPER ERECTION SEQUENCE TO BE MAINTAINED TO ENSURE STABILITY AND SAFETY OF THE STRUCTURE.
8. GROUTING TO BE DONE AFTER ERECTION AND ALIGNMENT OF STEEL COLUMN(FIRST LIFT).
9. GRADE OF STEEL USED IS S275R AS PER EN10025.
10. ALL STRUCTURAL WORK SHALL CONFORM TO CIVIL STRUCTURAL DESIGN CRITERIA NO MD - 216 - 1000 -EG -ST - CRT - 1001
11. FOR ALL SHEAR CONNECTION DETAILS REFER DRAWING NO. MD-216-1000-EG-ST-DED-1009.
12. FOR LADDER DETAILS REFER DRAWING NO. MD-216-1000-EG-ST-DED-1005 & 1006.
13. FOR ALL OTHER GENERAL NOTES REFER DRAWING NO. MD-216-1000-EG-ST-DED-1001.
14. PAINTING ON ALL STRUCTURAL MEMBERS SHALL BE DONE AS PER DESIGN BASIS REPORT (DBR).
15. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH DRAWING NO. MD - 216 - 3220 -EG -ST - GAD - 2141.

SCHEDULE OF COLUMN

COLUMN MKD.	COLUMN SECTION
C1	IPE360
C1A	1/2 CUT IPE300 + IPE360
C2	IPE400
C3	HEA400
C4	IPE450
C5	IPE200
C6	IPE300
C6A	1/2 CUT IPE300 + IPE300
C7	1/2 CUT IPE450 + IPE450

LEGEND:

LG - LONG
FGL - FINISHED GROUND LEVEL.
RL - REDUCED LEVEL
GST - GUSSET
STIFF - STIFENER
THK - THICKNESS
PL - PLATE
UNO - UNLESS NOTED OTHERWISE
MM - MILLIMETER
TYP - TYPICAL
GA - GENERAL ARRANGEMENT
DRG - DRAWING
CL - CENTER LINE
TOS - TOP OF STEEL
B.O.S - BOTTOM OF STEEL
MC - MOMENT CONNECTION
BOMR - BOTTOM OF MONORAIL
B.O.B - BOTTOM OF BEAM

DOCUMENT NUMBER	REFERENCE DOCUMENTS	REV	DATE	REVISION DESCRIPTION	DRN	CHK	ENG	APP	EMP
MD-216-1000-EG-ST-DED-1004	STRUCTURAL STANDARD OF GRATING								
MD-216-1000-EG-ST-DED-1003	STRUCTURAL STANDARD OF HANDRAIL								
MD-216-1000-EG-ST-DED-1002	STRUCTURAL STANDARD OF STAIR								
MD-216-1000-EG-ST-DED-1001	GENERAL NOTES FOR STRUCTURAL WORKS								
MD-216-1000-EG-CV-DED-1003	ANCHOR BOLTS STANDARD DETAILS.	A03	16/09/2020	ISSUED FOR REFERENCE & REVISED AS MARKED A03	SUS	SYC	APL	PRI	
MD-216-1000-EG-ST-CRT-1001	CIVIL, STRUCTURAL AND ARCHITECTURAL DESIGN CRITERIA	A02	03/07/2020	REVISED AS PER EMPLOYER COMMENTS	SUS	SYC	APL	PRI	
MD-216-3220-EG-ME-GAD-1089	LOAD TABLE			DATED 29/04/2020 & REVISED AS MARKED A02					
MD-216-3220-EG-ME-GAD-1086	PLAN AT EL (+922.150)	A01	06/04/2020	ISSUED FOR REFERENCE	SJU	PRI	KDU	AG	

RESERVED FOR VENDOR LOGO AND DRAWING NUMBER

This drawing is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

The content of these documents are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without prior written permission of Outotec is prohibited.

This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.


LARSEN & TOUBRO DRAWING NUMBER	019045_100_S_G_26025_004
REVISION	2
OUTOTEC DRAWING NUMBER	900707__GAU01__ZG01__MTL01__32212
DOCUMENT ID	OU100664452
REVISION	2

DRAWN	SJU	01/04/2020
CHECKED	PRI	02/04/2020
ENGINEER	KDU	03/04/2020
APPROVED	AG	06/04/2020
EMPLOYER		
SCALE	1:100,20	A0


MANSOURAH - MASSARAH GOLD PROJECT
GENERAL ARRANGEMENT DRAWING
GRINDING AND CLASSIFICATION
BALL MILL PLATFORM PLAN & SECTIONS

DRAWING NUMBER: MD - 216 - 3220 - EG - ST - GAD - 2140 | REV: A03


DRAWING NUMBER: MD - 216 - 3220 - EG - ST - GAD - 2141 | REV: D01

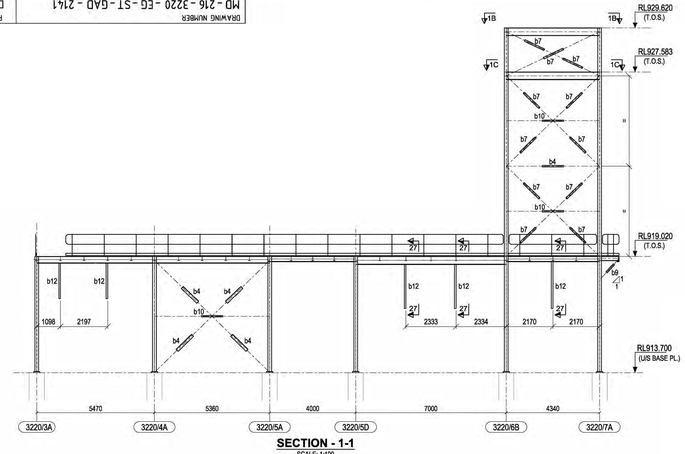


SECTION - 1-1
SCALE: 1:100

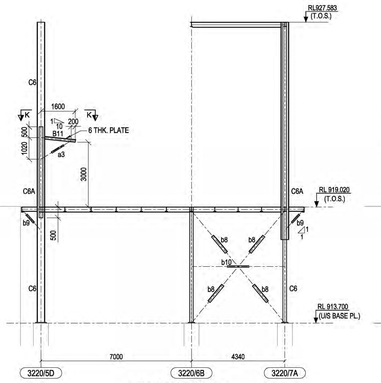


SECTION - 3A-3A
SCALE: 1:100

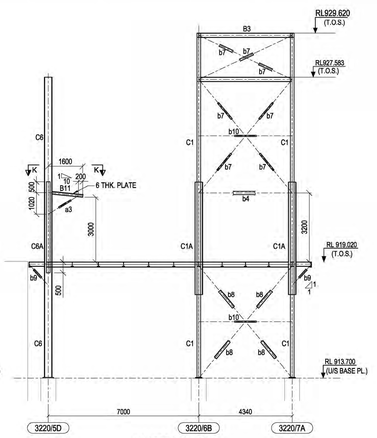


SECTION - 3-3
SCALE: 1:100



SECTION- 4-4
SCALE: 1:100

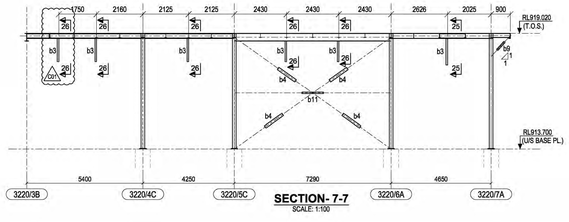


SECTION- 7-7
SCALE: 1:100

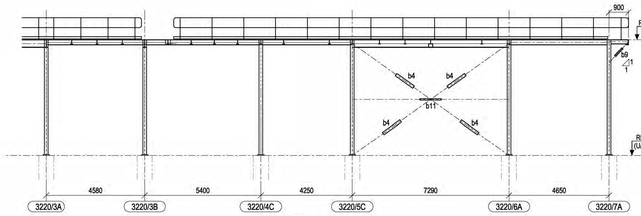


SECTION- 8-8
SCALE: 1:100



SECTION- J-J
SCALE: 1:50

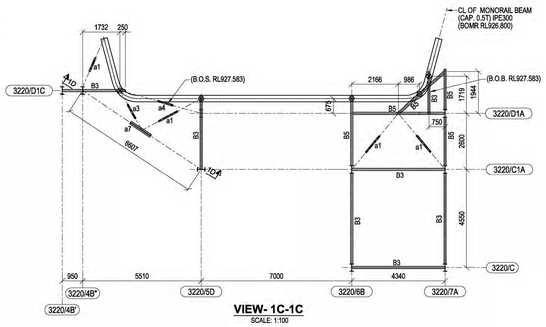


VIEW- 1C-1C
SCALE: 1:100




VIEW- 1B-1B
SCALE: 1:100


(TOP OF FLOOR BRACING SHOULD BE KEPT 50mm BELOW T.O.S. U.N.O.)

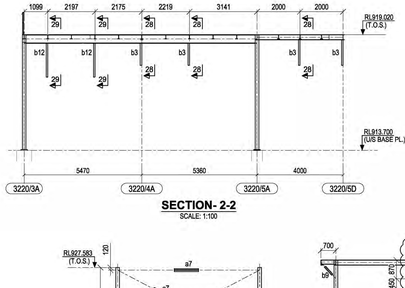


SECTION- 2-2
SCALE: 1:100




SECTION- 5-5
SCALE: 1:100




SECTION- 6-6
SCALE: 1:100




SECTION- 5A-5A
SCALE: 1:100




SECTION - 9-9
SCALE: 1:100




SECTION - 10-10
SCALE: 1:100




SECTION - 10A-10A
SCALE: 1:100

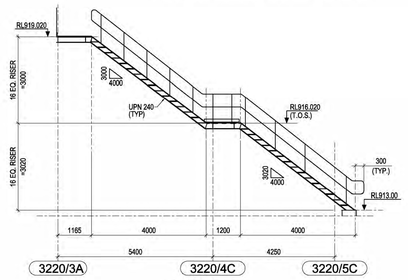


SECTION- 17-17
SCALE: 1:75




SECTION- 18-18
SCALE: 1:100



SECTION- 1D-1D
SCALE: 1:100




SECTION- 9A-9A
SCALE: 1:100




SECTION- 13-13
SCALE: 1:100




SECTION- 13A-13A
SCALE: 1:100




SECTION- 14-14
SCALE: 1:100

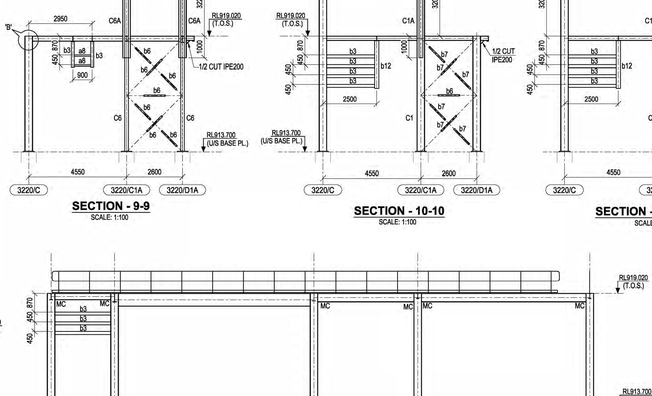


SECTION- 19-19
SCALE: 1:100



PLAN- K-K
SCALE: 1:50

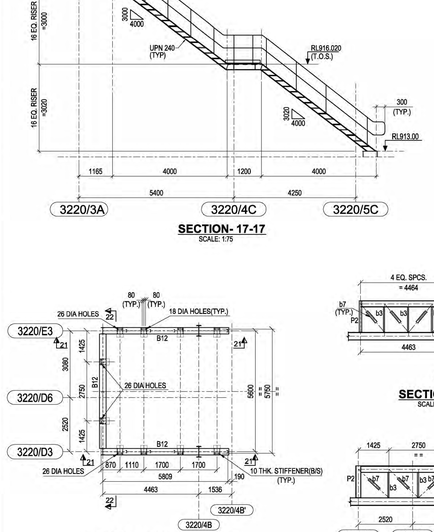


PLAN AT RL 920.500(T.O.S.)
(HOOD SUPPORTING ARRANGEMENT)
(SCALE 1:100)




SECTION - 21-21
SCALE: 1:100


SECTION - 22-22
SCALE: 1:100




SECTION- 11A-11A
SCALE: 1:100




SECTION- 25-25
SCALE: 1:50




SECTION- 26-26
SCALE: 1:50




DETAIL - A
SCALE: 1:15




PLAN- A1-A1
SCALE: 1:15




SECTION- 29-29
SCALE: 1:50




SECTION- 28-28
SCALE: 1:50



SECTION- 27-27
SCALE: 1:50



SECTION- 20-20
SCALE: 1:100



DETAIL - B
SCALE: 1:15

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRE AND LEVELS & COORDINATES ARE IN METRE UNO.
2. ANCHOR BOLT MATERIAL SHALL BE AS PER ASTM F 1554 Gr.36.
3. SIZE OF WELD SHALL BE DECIDED BASED ON LESSER THICKNESS OF THE JOINED MEMBER UNO.
4. ALL WELDS ARE MINIMUM 6 mm LENGTH SIZE CONTINUOUS FILLET UNO.
5. ALL PERMANENT HOLES SHALL BE 21.5 Ø FOR M20 BOLT AS PER (ASTM - A325M) UNO.
6. THREAD TO BE PERMANENTLY DAMAGED AFTER TIGHTENING OF NUT FOR ALL PERMANENT BOLTS BELOW GRIP LENGTH.
7. PROPER ERECTION SEQUENCE TO BE MAINTAINED TO ENSURE STABILITY AND SAFETY OF THE STRUCTURE.
8. GROUTING TO BE DONE AFTER ERECTION AND ALIGNMENT OF STEEL COLUMN(FIRST LIFT).
9. GRADE OF STEEL USED IS S275R AS PER EN10025.
10. ALL STRUCTURAL WORK SHALL CONFORM TO CIVIL STRUCTURAL DESIGN CRITERIA NO. MD - 216 - 1000 -EG- ST - CRT - 1001
11. FOR ALL SHEAR CONNECTION DETAILS REFER DRAWING NO. MD-216-1000-EG-ST-DED-1009.
12. FOR LADDER DETAILS REFER DRAWING NO. MD-216-1000-EG-ST-DED-1005 & 1006.
13. FOR ALL OTHER GENERAL NOTES REFER DRAWING NO. MD-216-1000-EG-ST-DED-1001.
14. PAINTING ON ALL STRUCTURAL MEMBERS SHALL BE DONE AS PER DESIGN BASIS REPORT (DBR).
15. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH DRAWING NO. MD - 216 - 3220 -EG -ST - GAD - 2140.

DOCUMENT NUMBER	REFERENCE DOCUMENTS	REV	DATE	REVISION DESCRIPTION	DRN	CHK	ENG	APP	EMP
MD-216-1000-EG-ST-DED-1004	STRUCTURAL STANDARD OF GRATING								
MD-216-1000-EG-ST-DED-1003	STRUCTURAL STANDARD OF HANDRAIL								
MD-216-1000-EG-ST-DED-1002	STRUCTURAL STANDARD OF STAIR								
MD-216-1000-EG-ST-DED-1001	GENERAL NOTES FOR STRUCTURAL WORKS	D01	08/11/2023	AS BUILT	SUS	SYC	APL	PRI	
MD-216-1000-EG-LV-DED-1003	ANCHOR BOLTS STANDARD DETAILS.	C01	14/09/2020	ISSUED FOR CONSTRUCTION & REVISED AS MARKED C01	SUS	SYC	APL	PRI	
MD-216-1000-EG-ST-CRT-1001	CIVIL, STRUCTURAL AND ARCHITECTURAL DESIGN CRITERIA	A02	03/09/2020	REVISED AS PER EMPLOYER COMMENTS	SUS	SYC	APL	PRI	
MD-216-3220-EG-ME-GAD-1089	LOAD TABLE			DATED 29/04/2020 & REVISED AS MARKED A02					
MD-216-3220-EG-ME-GAD-1086	PLAN AT EL (+922.150)	A01	06/04/2020	ISSUED FOR REFERENCE	SJH	PRI	KDU	AG	

RESERVED FOR VENDOR LOGO AND DRAWING NUMBER

LARSEN & TOUBRO

This drawing is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Outotec

The content of these documents are the sole property of Outotec Oy. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without prior written permission of Outotec is prohibited.

MA'ADEN معادن
Saudi Arabian Mining Company شركة معادن العربية السعودية

This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.

LARSEN & TOUBRO DRAWING NUMBER: 019045_100_S_G_26025_005 | REVISION: 3
OUTOTEC DRAWING NUMBER: 900707__GAU01__ZG01__MTL01__32213 | DOCUMENT ID: OU100664453 | REVISION: 3

DRAWN	SJU	01/04/2020	MANSOURAH - MASSARAH GOLD PROJECT
CHECKED	PRI	02/04/2020	GENERAL ARRANGEMENT DRAWING
ENGINEER	KDU	03/04/2020	GRINDING AND CLASSIFICATION
APPROVED	AG	06/04/2020	BALL MILL PLATFORM PLAN & SECTIONS
EMPLOYER			

SCALE: 1:100,20 | A0

DRAWING NUMBER: MD - 216 - 3220 - EG - ST - GAD - 2141 | REV: D01

ATTACHMENT - 5 : COMMENT RESOLUTION SHEET

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Mansourah Massarah Gold Project
Comment Resolution Log Sheet / Compliance Report

PROJECT: MANSOURAH MASSARAH GOLD PROJECT **PROJECT NO.: 216**

STAGE: 4 - PROJECT EXECUTION. **REVIEW LOG DOC. NO. & REV.:**

ACONEX REF. NO. & DATE: BECHTEL-WTRAN-004993, 18 September 2020

STATUS CODE: A - APPROVED, C - APPROVED WITH COMMENTS, R - REVISE & RESUBMIT & O - OTHERS (INFORMATION, REFERENCE, REVIEWED)

DOCUMENT NUMBER	Area / Title	Comment No.	PMC/PMT COMMENT DATE: 18 September 2020	Comment by	EPC Response DATE: 24 September 2020	Status	Remarks
			General Comments (cc)				
MD-216-3220-EG-CV-CAL-1161-A01	3220	1	this is the Ball MIll platform analysis - why use Reagents shed data?	Mr. Doron Golan - Bechtel	Design calculation revised. 3220 - BALL MILL PLATFORM foundation the primary load values are taken from the steel structure Desin Calculation No. : MD-216-3220-EG-ST-CAL-2147.	Closed	