MA'ADEN معادن
Saudi Arabian Mining Company شركة التعدين العربية السعودية

Project Customer: Mansourah Massarah Gold Project
MA'ADEN GOLD AND BASE METALS (MA'ADEN)

Title: CALCULATION
49WF POTABLE WATER TREATMENT PLANT
PWTP SUMP DESIGN

Document Number: MD-216-49WF-EG-CV-CAL-2002
Revision: D01
Revision Date: 27.10.2023
Status: AS BUILT

Outotec Document Number:	900707	GAU01	AG32	CED03	53002	OU100691543	2
L&T Document Number:	O19045	080	C	K	24373	002	2

REVISION HISTORY

Rev	Date	Revision Text	Prepared By	Reviewed By	Approved By	Employer
A01	13.10.2020	FIRST ISSUE	BJB	SJM	AG	
C01	17.11.2020	ISSUED FOR CONSTRUCTION	BJB	SJM	AG	
D01	27.10.2023	AS BUILT	BJB	SJM	AG	

TABLE OF CONTENTS

DEFINITIONS AND ABBREVIATIONS 3

1. INTENT 4

2. EXECUTIVE SUMMARY 4

3. SCOPE 4

4. DESIGN REQUIREMENTS 5

4.1 Design Loads 5

4.2 Load Combination 5

5. CONCRETE FOUNDATIONS 5

5.1 Design 5

5.2 Materials 6

5.3 Minimum Concrete Cover 6

5.4 Minimum Reinforcement Steel (Rebar) Size 6

5.5 Allowable Bearing Capacity 6

6. STAAD GEOMETRY 7

7. DESIGN CALCULATION FOR SUMP TANK 8

References 16

ATTACHMENT 1 STAAD INPUT FOR SUMP TANK 17

ATTACHMENT 2 STAAD OUTPUT FOR SUMP TANK 35

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

DEFINITIONS AND ABBREVIATIONS

Document	:	Information and the medium on which it is contained (ISO 9000:2015)
EMPLOYER	:	'EMPLOYER' means MA'ADEN GOLD AND BASE METALS (MGBM) and the PMC American Bechtel Inc. or their representatives
Contractor	:	Contractor' means consortium composed of LARSEN & TOUBRO LIMITED, Saudi Arabia AND OUTOTEC SAUDI ARABIA LLC, Saudi Arabia (for IK Contract) and LARSEN & TOUBRO LIMITED – ECC Construction Group – (SHJ BR) and OUTOTEC ENGINEERING DMCC, Dubai (for OOK Contract).
'PMT'	:	Ma'aden Project Management Team
'MMGP Project'	:	Mansourah Massarah Gold Processing Project
Attribute	:	Information element that describes a document or tag.
Supplier	:	An entity (supplier, consultant, sub-contractor) under the direct project management of Contractor
Sub-Supplier	:	A sub entity (supplier, consultant, sub-contractor) under the direct project management of Contractor.
QA	:	Quality Assurance
QC	:	Quality Control
Works	:	Full scope of the EPC Contract including the engineering, procurement, construction, commissioning and associated activities
RC	:	Reinforced Concrete

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

1. INTENT

This document is to Prepare for design of sump tank of **Potable Water Treatment Plant**. The analysis & design is carried out in accordance with project specifications and codes & standards. The design calculation ensures the safety and serviceability of the sump tank.

2. EXECUTIVE SUMMARY

The Saudi Arabian Mining Company (Ma'aden) has announced that its wholly-owned subsidiary, Ma'aden Gold and Base Metals Company, have issued a Notice of Award to Outotec and Larsen & Toubro Consortium to complete the engineering, procurement, construction, pre-commissioning, commissioning and start-up assistance of the Mansourah & Massarah (MMGP) Gold Project.

MMGP project will become Ma'aden's largest ever gold project, producing an average of 250,000 ounces of gold per year over the life of mine. Mansourah-Massarah is situated within the Central Arabian Gold Region (CAGR), approximately 320km northeast of Taif towards Riyadh and about 35 km southeast of Hufairah, which is a small village situated on Jeddah - Riyadh highway. Mansourah - Massarah gold deposits are located 22°38'6.40"N; 42°44'22.90"E, and 22°42'1.40"N; 42°41'58.40"E respectively, approximately 537 km east of Jeddah and 77 km southeast of the town of Zalim.

The plant throughput capacity is 4000000t/a and is required to operate on a continuous basis at nominally 24 hours per day and 7 days a week.

3. SCOPE

The analysis has been carried out in Excel & STAAD. For member strength calculation force values are directly taken from STAAD Output.

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

4. DESIGN REQUIREMENTS

4.1 Design Load

All Design Loads are as per Civil, Structural and Architectural Design Criteria (Doc. No. MD-216-1000-EG-ST-CRT-1001).

4.2 Load Combination

Load combinations are based on SBC-301,2007, MD-216-1000-EG-ST-CRT-1001, ACI 318M

Basic Load cases are –

I. Dead Load (D)
II. Live Load (L)
III. Water Pressure (F)
IV. Soil Pressure (H)

Allowable Stress Design

Load Case	Load Combination
201	D + F
202	D + F + L + H
203	D + F + H

Ultimate Strength Design

Load Case	Load Combination
101	1.4 (D + F1)
102	1.2 (D + F) + 1.6 (L+ H)
103	1.4 (D + H)

5. CONCRETE SUMP TANK

5.1 Design

Design of concrete structures are in accordance with SBC-304, ACI 318M and API 650. The analysis has been carried out in Staad pro & designed by Excel Sheet. For all design strength

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

calculation force values are directly taken from STAAD Pro & designed in excel sheet. Base Pressure check are shown in STAAD Pro. (for mat footing). For Base slab, Wall and Top slab STAAD modelling has been done with Plate Elements. Plate mat with Vertical Subgrade Modulus of 66000 kN/m2/m has been considered (as per soil report Table no 10-BH-21).

5.2 Materials

Concrete Strength of 28 days

- Foundation and Structural Members: 35 MPa
- Blinding Concrete below foundation bases: 15 MPa

Reinforcement Grade

- Deformed Bar: ASTM A 615 / A 615M Grade 60 (fy = 420MPa)
- Welded Wire Fabric: ASTM A 185(Plain) / A 497(Deformed)

5.3 Minimum Concrete Cover

Concrete Exposure	Member	Minimum Cover(mm)
Exposed to weather or contact with ground	Foundation & Wall	50

5.4 Minimum Reinforcing Steel (Rebar) Size


The minimum rebar size for use as tension, compression reinforcement shall be 12 mm, except where welded wire fabric is used. For ties and spirals the minimum rebar size shall be 10 mm.

5.5 Allowable Soil Bearing Capacity

The net safe bearing capacity of soil for foundations design has been considered as 550 kN/m^2 at 1.5m depth below EGL (ie. RL 917.00m) refer Table 5 - BH-11 of Geotechnical Report (MD-216-3000-EG-CV-RPT-1008).

PROPRIETARY & CONFIDENTIAL
The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

6. STAAD GEOMETRY

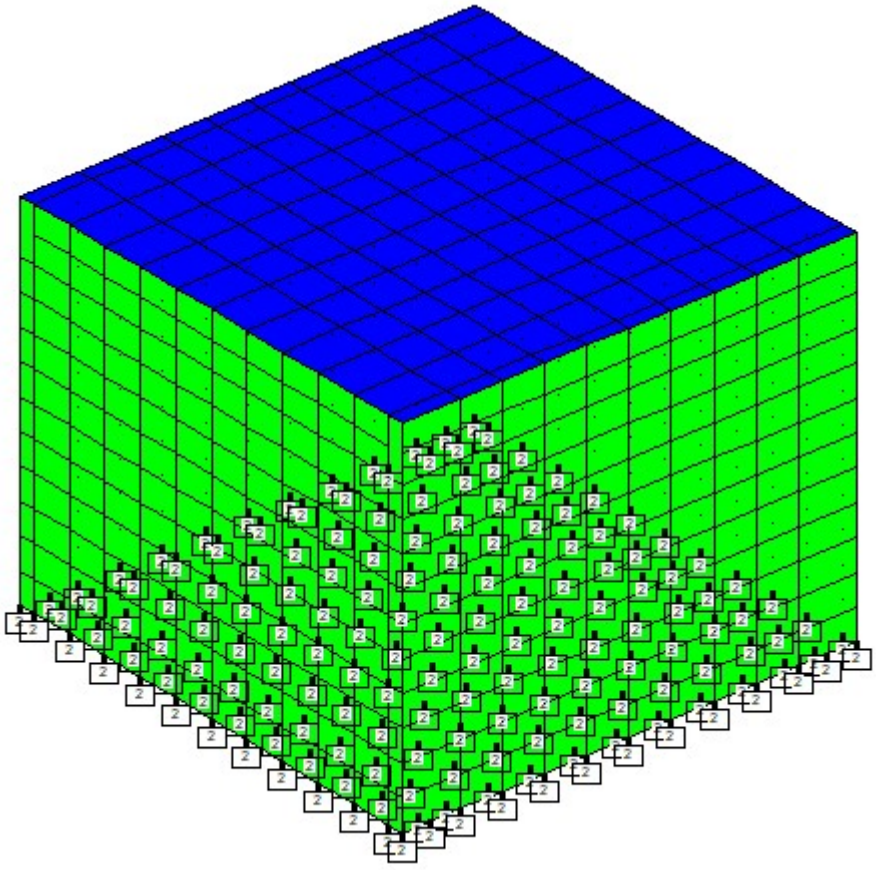

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.


7. DESIGN CALCULATION FOR SUMP TANK

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Table 6.3 Load calculation for side wall in basement

Unit wt of soil =	1.8	T/cu.m		33	degree
Surchage =	1.0	T/sq.m	Coefficient of lateral pressure at rest =		0.50

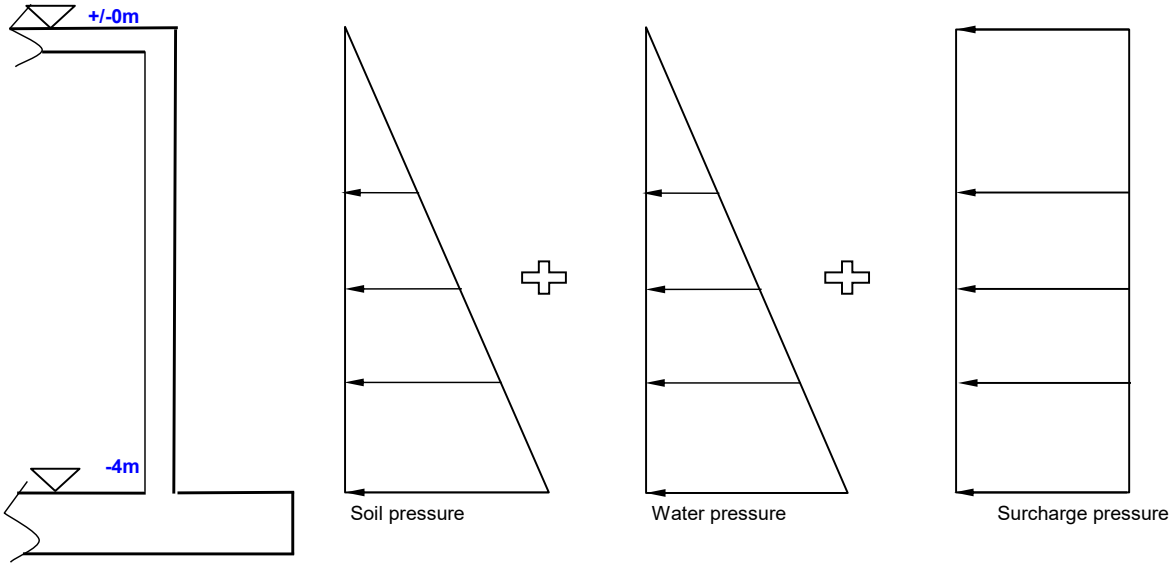

At top of raft:

Lateral earth pressure =	3.60	T/sq.m
Water pressure =	4.00	T/sq.m
Lateral surcharge pressure =	0.50	T/sq.m

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Crack Width Calculation

Overall Depth,D		=	400 mm		
Width,b		=	1000 mm		
Grade of Steel		=	Fe 420		
Grade of Concrete		=	M 35		
λ		=	1		
Es		=	2.00E+05 N/mm^2		
Ec	4700 √fc'	=	2.78E+04 N/mm^2		
n	Es / Ec	=	7.19		
fr	0.62.λ.√fc'	=	3.67		
Dia of Bar used		=	16		
Cover to reinforcement (C_c)		=	50		
Spacing of reinforcement		=	100		
Effective depth,d		=	342 mm		
d_c		=	58 mm		
Ast		=	2010.62 mm^2		
Ig		b.h3/12 =	0.0053 m4		
y_t		=	0.2 m		
d		=	0.342 m		
Moment, My		=	5.59 T m		(service load moment)
Moment, Mcr	fr. Ig / yt	=	9.78 T-m	**ok**	(crack moment)

B = b / (n.As) = 0.07 mm^{-1}

c = $\frac{\sqrt{(2.B.d + 1)} - 1}{B}$ = 86.04 mm

Nutral Axis Depth = 86.04 mm

Icr = $b.c^3 / 3 + n.As.(d-c)^2$ = 318550121.9 mm^4

f_s = $M_{srv} / As. (d-c/3)$ = 88.735 Mpa

f_s = $M_{srv}. N. (d-c) / Icr$ = 431567.74 Mpa

fc = $M_{srv.} c / Icr$ = 15.09896 Mpa

Smax = 380 . 280 / fs - 2.5 . C_c

= 1074.08 mm **OK**

Calculation of Crack Width :

β = (h-c) / (d-c) d_c = 58 mm

= 1.23

A = 2. dc.s = 11600 mm4

w = 2. fs . β. $\sqrt{(d_c^2 + (s/2)^2)}$ / Es

= 0.0833 mm **ok** **<0.1**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Design of Wall :

Characteristic strength of concrete, f'_c=	35	N/mm^2
Yield stress of steel reinforcement, f_y=	420	N/mm^2
Clear cover for main reinforcement bars =	50	mm
Depth of Wall =	400	mm


Max BM (-) (M_y)= 48 kN m (VERTICAL MOMENT IN OUTSIDE FACE)


Max BM (+) (M_x)= 75 kN m (HORIZONTAL MOMENT IN INSIDE FACE)

Effective depth of wall in Vertical direction = 342 mm

Effective depth of wall in Horizontal direction = 326 mm

Moment	Mux (kN-m)	f Kn = M_{u1}/bd^2 (N/mm^2)	Kn (N/mm^2)	r=	Ast (mm^2)	Minm. Ast (mm^2)	Bar Dia	Spacing reqd.(mm)	Spacing provd. (mm)	Ast (mm^2)
My	48.00	0.41	0.55	0.001	449.73	615.60	D16	327	100	2011
Mx	75.00	0.71	0.94	0.0023	742.28	586.80	D16	271	100	2011

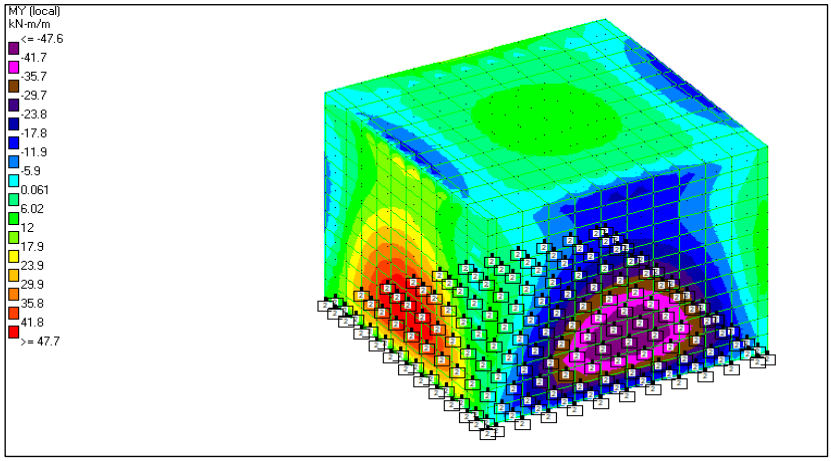

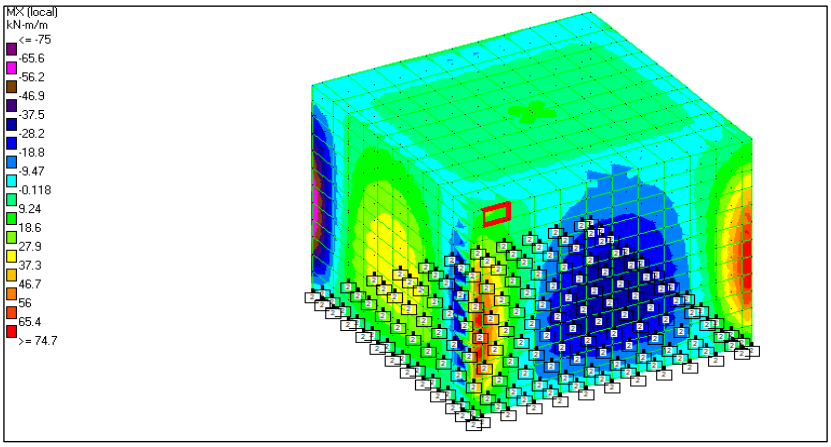


PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Shear Check

Shear stress , t_v=	0.34	N/mm^2
Allowable shear stress, (f Vc)/bd =	0.74	**OK**

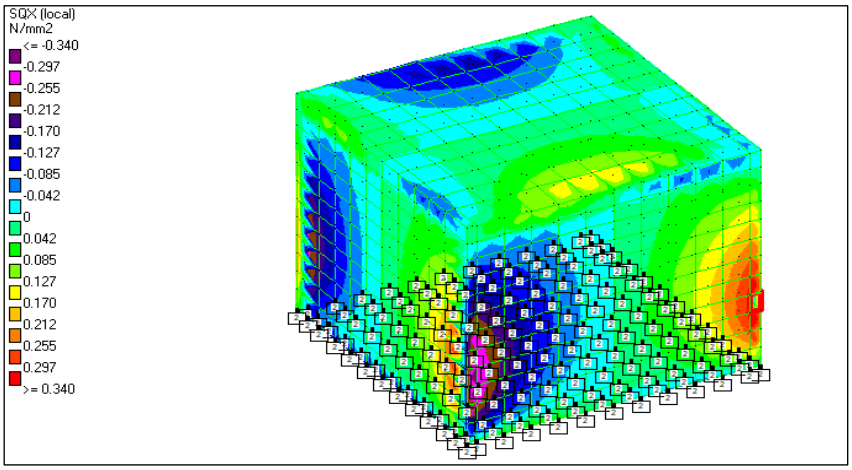


SUMMARY OF REINFORCEMENT IN WALL:		**0**	**mm**
VERTICAL REIN. IN INSIDE FACE	**16**	**100**	**c/c**
VERTICAL REIN. IN OUTSIDE FACE	**16**	**100**	**c/c**
HORIZONTAL REIN. IN INSIDE FACE	**16**	**100**	**c/c**
HORIZONTAL REIN. IN OUTSIDE FACE)	**16**	**100**	**c/c**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

DESIGN OF BASE SLAB :

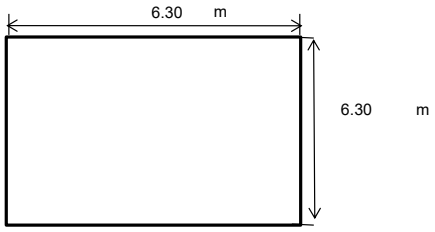


Characteristic strength of concrete, f'_c =	35	Mpa
Yield stress of steel reinforcement, f_y =	420	Mpa
Assume the thickness of base slab =	400	mm
Clear cover on all sides =	50	mm
Effective depth for longitudinal =	342	mm
Effective depth for Transverse =	326	mm
Minimum reinforcement =	0.18	%

Base Pressure Check

	Node	L/C	Horizontal Fx N/mm2	Vertical Fy N/mm2	Horizontal Fz N/mm2
Max Px	3	201 1.0*(D+F)	0	0.107	0
Min Px	3	201 1.0*(D+F)	0	0.107	0
Max Py	12	202 1.0*(D+F)+1.0*(L+H)	0	0.119	0
Min Py	808	203 1.0*(D+H)	0	0.02	0
Max Pz	3	201 1.0*(D+F)	0	0.107	0
Min Pz	3	201 1.0*(D+F)	0	0.107	0

Max = 0.119 MPa
= 119 kN/m2

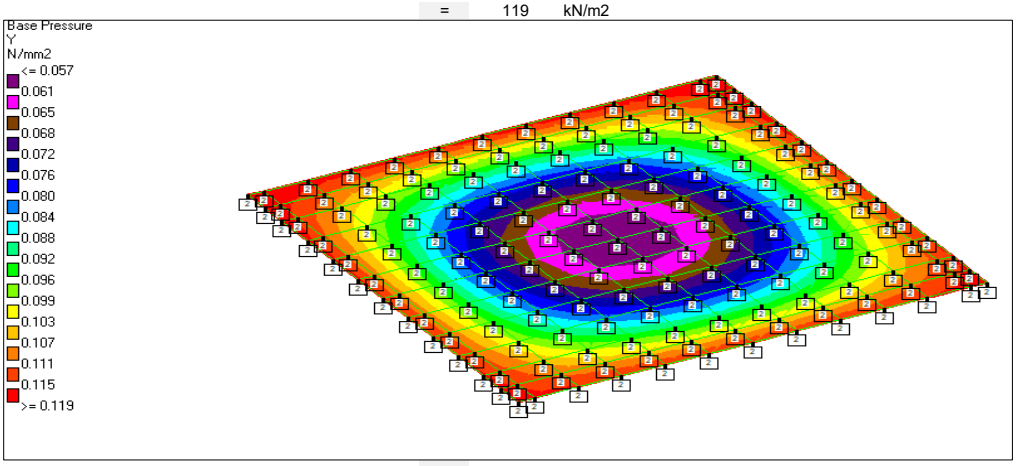


PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.


Moment & Shear Check:

My (kN-m)	f Kn = M_{u1}/bd^2 (N/mm^2)	Kn (N/mm^2)	r=	Ast (mm^2)	Minm. Ast (mm^2)	Bar Dia	Spacing reqd. (mm)	Maxm spacing (mm)	Spacing provd. (mm)	Ast (mm^2)
37.00	0.32	0.42	0.001	345.921	615.60	D16	326.61	300	100	2010.62

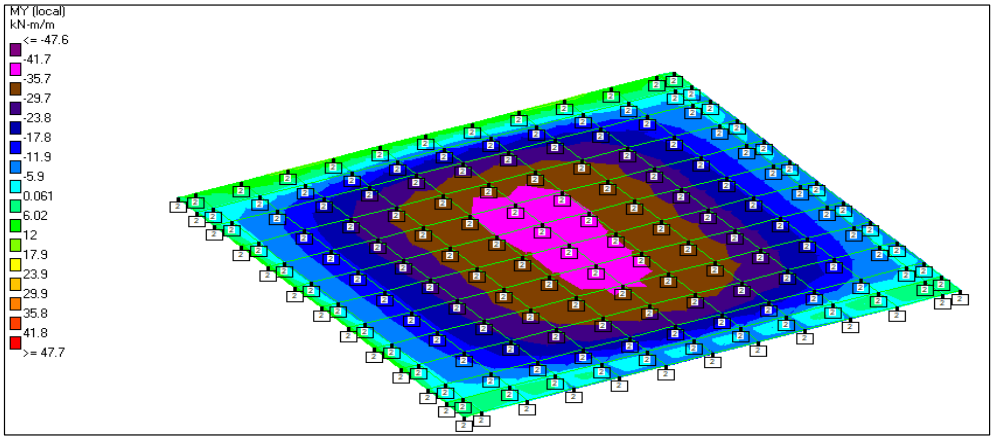

Check against one-way shear force

Allowable shear stress, (f Vc)/bd =	0.74	N/mm^2	
Shear stress , t_v=	0.28	N/mm^2	**OK**

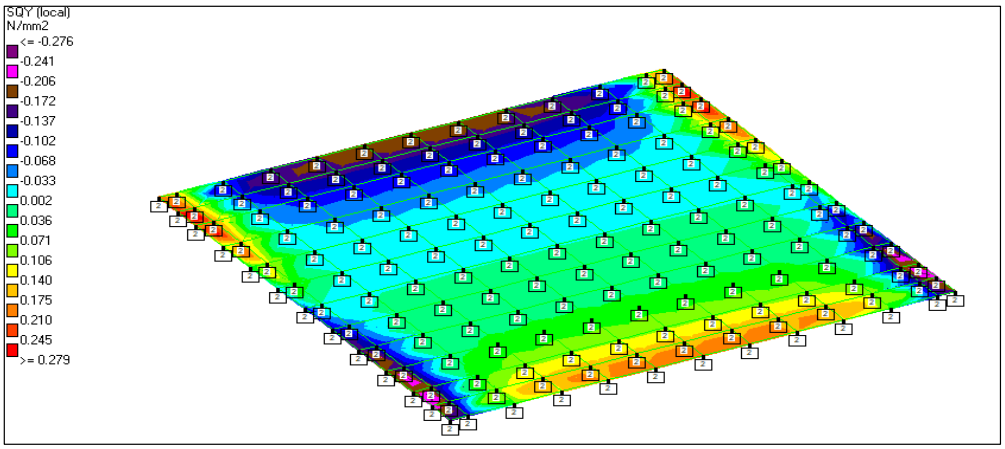

SUMMARY OF REINFORCEMENT IN RAFT:


Depth of base slab		**400**	**mm**
(HORIZONTAL REIN. IN TOP FACE)	**D16**	**100**	**c/c**

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.


This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

DESIGN OF TOP SLAB :




Assume the thickness of base slab	=	150	mm
Clear cover on all sides	=	25	mm
Effective depth for longitudinal	=	120	mm
Effective depth for Transverse	=	110	mm
Minimum reinforcement	=	0.18	%

Mux (kN-m)	f Kn = M_{u1}/bd^2 (N/mm^2)	Kn (N/mm^2)	r=	Ast (mm^2)	Minm. Ast (mm^2)	Bar Dia	Spacing reqd. (mm)	Maxm spacing (mm)	Spacing provd. (mm)	Ast (mm^2)
17.00	1.18	1.57	0.004	462.3	216.00	D10	169.89	300	150	523.60

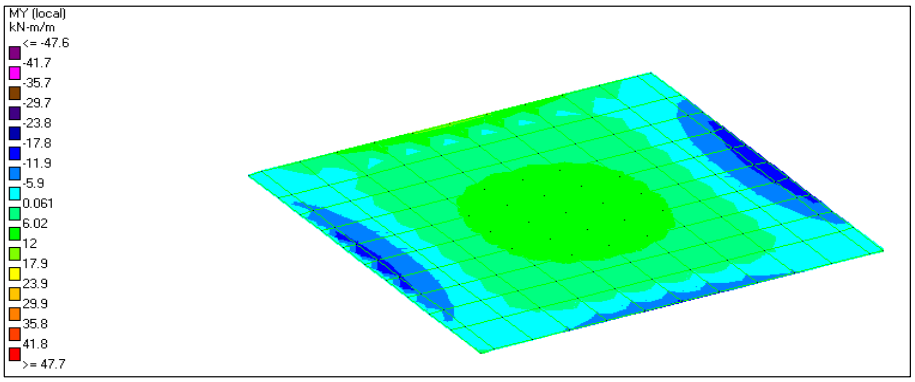

Check against one-way shear force

Allowable shear stress, (f Vc)/bd =	0.74	N/mm^2	
Shear stress , t_v=	0.20	N/mm^2	**OK**

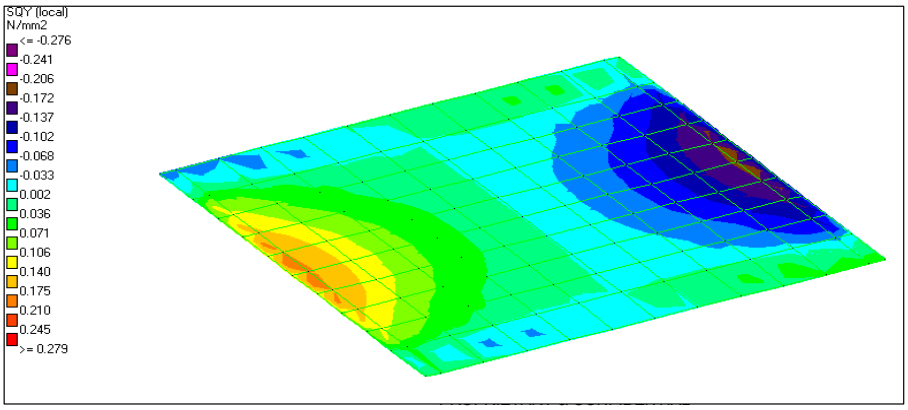

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

REFERENCES

Reference is made to codes, standards and specifications as indicated in Civil, Structural and Architectural Design Criteria (Doc. No. MD-216-1000-EG-ST-CRT-1001) Clause 4.1.

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

ATTACHMENT 1 STAAD INPUT FOR SUMP TANK

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

```
STAAD SPACE
START JOB INFORMATION
ENGINEER DATE 01-Oct-20
ENGINEER NAME BJB
CHECKER NAME SJM
END JOB INFORMATION
INPUT WIDTH 79
UNIT METER KN
JOINT COORDINATES
3 0.2 0.4 -0.2; 4 0.4 0.4 -0.2; 5 0.2 4.4 -0.2; 6 0.4 4.4 -0.2; 7 0.2 5.1 -0.2;
8 0.4 5.1 -0.2; 11 5.9 0.4 -0.2; 12 6.1 0.4 -0.2; 13 5.9 4.4 -0.2;
14 6.1 4.4 -0.2; 15 5.9 5.1 -0.2; 16 6.1 5.1 -0.2; 19 0.2 0.4 5.7;
20 0.4 0.4 5.7; 21 0.2 4.4 5.7; 22 0.4 4.4 5.7; 23 0.2 5.1 5.7; 24 0.4 5.1 5.7;
27 5.9 0.4 5.7; 28 6.1 0.4 5.7; 29 5.9 4.4 5.7; 30 6.1 4.4 5.7; 31 5.9 5.1 5.7;
32 6.1 5.1 5.7; 33 0.95 5.1 5.7; 34 0.95 4.75 5.7; 35 0.4 4.75 5.7;
36 1.5 5.1 5.7; 37 1.5 4.75 5.7; 38 2.05 5.1 5.7; 39 2.05 4.75 5.7;
40 2.6 5.1 5.7; 41 2.6 4.75 5.7; 42 3.15 5.1 5.7; 43 3.15 4.75 5.7;
44 3.7 5.1 5.7; 45 3.7 4.75 5.7; 46 4.25 5.1 5.7; 47 4.25 4.75 5.7;
48 4.8 5.1 5.7; 49 4.8 4.75 5.7; 50 5.35 5.1 5.7; 51 5.35 4.75 5.7;
52 5.9 4.75 5.7; 53 0.95 4.4 5.7; 54 1.5 4.4 5.7; 55 2.05 4.4 5.7;
56 2.6 4.4 5.7; 57 3.15 4.4 5.7; 58 3.7 4.4 5.7; 59 4.25 4.4 5.7;
60 4.8 4.4 5.7; 61 5.35 4.4 5.7; 62 0.95 4 5.7; 63 0.4 4 5.7; 64 1.5 4 5.7;
65 2.05 4 5.7; 66 2.6 4 5.7; 67 3.15 4 5.7; 68 3.7 4 5.7; 69 4.25 4 5.7;
70 4.8 4 5.7; 71 5.35 4 5.7; 72 5.9 4 5.7; 73 0.95 3.6 5.7; 74 0.4 3.6 5.7;
75 1.5 3.6 5.7; 76 2.05 3.6 5.7; 77 2.6 3.6 5.7; 78 3.15 3.6 5.7;
79 3.7 3.6 5.7; 80 4.25 3.6 5.7; 81 4.8 3.6 5.7; 82 5.35 3.6 5.7;
83 5.9 3.6 5.7; 84 0.95 3.2 5.7; 85 0.4 3.2 5.7; 86 1.5 3.2 5.7;
87 2.05 3.2 5.7; 88 2.6 3.2 5.7; 89 3.15 3.2 5.7; 90 3.7 3.2 5.7;
91 4.25 3.2 5.7; 92 4.8 3.2 5.7; 93 5.35 3.2 5.7; 94 5.9 3.2 5.7;
95 0.95 2.8 5.7; 96 0.4 2.8 5.7; 97 1.5 2.8 5.7; 98 2.05 2.8 5.7;
99 2.6 2.8 5.7; 100 3.15 2.8 5.7; 101 3.7 2.8 5.7; 102 4.25 2.8 5.7;
103 4.8 2.8 5.7; 104 5.35 2.8 5.7; 105 5.9 2.8 5.7; 106 0.95 2.4 5.7;
107 0.4 2.4 5.7; 108 1.5 2.4 5.7; 109 2.05 2.4 5.7; 110 2.6 2.4 5.7;
111 3.15 2.4 5.7; 112 3.7 2.4 5.7; 113 4.25 2.4 5.7; 114 4.8 2.4 5.7;
115 5.35 2.4 5.7; 116 5.9 2.4 5.7; 117 0.95 2 5.7; 118 0.4 2 5.7;
119 1.5 2 5.7; 120 2.05 2 5.7; 121 2.6 2 5.7; 122 3.15 2 5.7; 123 3.7 2 5.7;
124 4.25 2 5.7; 125 4.8 2 5.7; 126 5.35 2 5.7; 127 5.9 2 5.7; 128 0.95 1.6 5.7;
129 0.4 1.6 5.7; 130 1.5 1.6 5.7; 131 2.05 1.6 5.7; 132 2.6 1.6 5.7;
133 3.15 1.6 5.7; 134 3.7 1.6 5.7; 135 4.25 1.6 5.7; 136 4.8 1.6 5.7;
137 5.35 1.6 5.7; 138 5.9 1.6 5.7; 139 0.95 1.2 5.7; 140 0.4 1.2 5.7;
141 1.5 1.2 5.7; 142 2.05 1.2 5.7; 143 2.6 1.2 5.7; 144 3.15 1.2 5.7;
145 3.7 1.2 5.7; 146 4.25 1.2 5.7; 147 4.8 1.2 5.7; 148 5.35 1.2 5.7;
149 5.9 1.2 5.7; 150 0.95 0.8 5.7; 151 0.4 0.8 5.7; 152 1.5 0.8 5.7;
153 2.05 0.8 5.7; 154 2.6 0.8 5.7; 155 3.15 0.8 5.7; 156 3.7 0.8 5.7;
157 4.25 0.8 5.7; 158 4.8 0.8 5.7; 159 5.35 0.8 5.7; 160 5.9 0.8 5.7;
170 0.95 0.4 5.7; 171 1.5 0.4 5.7; 172 2.05 0.4 5.7; 173 2.6 0.4 5.7;
174 3.15 0.4 5.7; 175 3.7 0.4 5.7; 176 4.25 0.4 5.7; 177 4.8 0.4 5.7;
178 5.35 0.4 5.7; 179 0.2 4.75 5.7; 180 6.1 4.75 5.7; 181 6.1 4 5.7;
182 6.1 3.6 5.7; 183 6.1 3.2 5.7; 184 6.1 2.8 5.7; 185 6.1 2.4 5.7;
186 6.1 2 5.7; 187 6.1 1.6 5.7; 188 6.1 1.2 5.7; 189 6.1 0.8 5.7;
190 0.2 4 5.7; 191 0.2 3.6 5.7; 192 0.2 3.2 5.7; 193 0.2 2.8 5.7;
194 0.2 2.4 5.7; 195 0.2 2 5.7; 196 0.2 1.6 5.7; 197 0.2 1.2 5.7;
198 0.2 0.8 5.7; 199 0.2 5.1 4.95; 200 0.4 5.1 4.95; 201 0.2 5.1 4.4;
202 0.4 5.1 4.4; 203 0.2 5.1 3.85; 204 0.4 5.1 3.85; 205 0.2 5.1 3.3;
206 0.4 5.1 3.3; 207 0.2 5.1 2.75; 208 0.4 5.1 2.75; 209 0.2 5.1 2.2;
210 0.4 5.1 2.2; 211 0.2 5.1 1.65; 212 0.4 5.1 1.65; 213 0.2 5.1 1.1;
214 0.4 5.1 1.1; 215 0.2 5.1 0.55; 216 0.4 5.1 0.55; 217 5.9 5.1 4.95;
218 6.1 5.1 4.95; 219 5.9 5.1 4.4; 220 6.1 5.1 4.4; 221 5.9 5.1 3.85;
222 6.1 5.1 3.85; 223 5.9 5.1 3.3; 224 6.1 5.1 3.3; 225 5.9 5.1 2.75;
226 6.1 5.1 2.75; 227 5.9 5.1 2.2; 228 6.1 5.1 2.2; 229 5.9 5.1 1.65;
230 6.1 5.1 1.65; 231 5.9 5.1 1.1; 232 6.1 5.1 1.1; 233 5.9 5.1 0.55;
234 6.1 5.1 0.55; 235 0.95 5.1 4.95; 236 0.95 5.1 4.4; 237 0.95 5.1 3.85;
238 0.95 5.1 3.3; 239 0.95 5.1 2.75; 240 0.95 5.1 2.2; 241 0.95 5.1 1.65;
242 0.95 5.1 1.1; 243 0.95 5.1 0.55; 244 0.95 5.1 -0.2; 245 1.5 5.1 4.95;
246 1.5 5.1 4.4; 247 1.5 5.1 3.85; 248 1.5 5.1 3.3; 249 1.5 5.1 2.75;
250 1.5 5.1 2.2; 251 1.5 5.1 1.65; 252 1.5 5.1 1.1; 253 1.5 5.1 0.55;
254 1.5 5.1 -0.2; 255 2.05 5.1 4.95; 256 2.05 5.1 4.4; 257 2.05 5.1 3.85;
258 2.05 5.1 3.3; 259 2.05 5.1 2.75; 260 2.05 5.1 2.2; 261 2.05 5.1 1.65;
262 2.05 5.1 1.1; 263 2.05 5.1 0.55; 264 2.05 5.1 -0.2; 265 2.6 5.1 4.95;
266 2.6 5.1 4.4; 267 2.6 5.1 3.85; 268 2.6 5.1 3.3; 269 2.6 5.1 2.75;
270 2.6 5.1 2.2; 271 2.6 5.1 1.65; 272 2.6 5.1 1.1; 273 2.6 5.1 0.55;
274 2.6 5.1 -0.2; 275 3.15 5.1 4.95; 276 3.15 5.1 4.4; 277 3.15 5.1 3.85;
278 3.15 5.1 3.3; 279 3.15 5.1 2.75; 280 3.15 5.1 2.2; 281 3.15 5.1 1.65;
282 3.15 5.1 1.1; 283 3.15 5.1 0.55; 284 3.15 5.1 -0.2; 285 3.7 5.1 4.95;
286 3.7 5.1 4.4; 287 3.7 5.1 3.85; 288 3.7 5.1 3.3; 289 3.7 5.1 2.75;
290 3.7 5.1 2.2; 291 3.7 5.1 1.65; 292 3.7 5.1 1.1; 293 3.7 5.1 0.55;
294 3.7 5.1 -0.2; 295 4.25 5.1 4.95; 296 4.25 5.1 4.4; 297 4.25 5.1 3.85;
298 4.25 5.1 3.3; 299 4.25 5.1 2.75; 300 4.25 5.1 2.2; 301 4.25 5.1 1.65;
302 4.25 5.1 1.1; 303 4.25 5.1 0.55; 304 4.25 5.1 -0.2; 305 4.8 5.1 4.95;
306 4.8 5.1 4.4; 307 4.8 5.1 3.85; 308 4.8 5.1 3.3; 309 4.8 5.1 2.75;
310 4.8 5.1 2.2; 311 4.8 5.1 1.65; 312 4.8 5.1 1.1; 313 4.8 5.1 0.55;
314 4.8 5.1 -0.2; 315 5.35 5.1 4.95; 316 5.35 5.1 4.4; 317 5.35 5.1 3.85;
318 5.35 5.1 3.3; 319 5.35 5.1 2.75; 320 5.35 5.1 2.2; 321 5.35 5.1 1.65;
322 5.35 5.1 1.1; 323 5.35 5.1 0.55; 324 5.35 5.1 -0.2; 325 6.1 4.4 4.95;
```

326 6.1 4 4.95; 327 6.1 4.4 4.4; 328 6.1 4 4.4; 329 6.1 4.4 3.85;
330 6.1 4 3.85; 331 6.1 4.4 3.3; 332 6.1 4 3.3; 333 6.1 4.4 2.75;
334 6.1 4 2.75; 335 6.1 4.4 2.2; 336 6.1 4 2.2; 337 6.1 4.4 1.65;
338 6.1 4 1.65; 339 6.1 4.4 1.1; 340 6.1 4 1.1; 341 6.1 4.4 0.55;
342 6.1 4 0.55; 343 6.1 4 -0.2; 344 6.1 3.6 4.95; 345 6.1 3.6 4.4;
346 6.1 3.6 3.85; 347 6.1 3.6 3.3; 348 6.1 3.6 2.75; 349 6.1 3.6 2.2;
350 6.1 3.6 1.65; 351 6.1 3.6 1.1; 352 6.1 3.6 0.55; 353 6.1 3.6 -0.2;
354 6.1 3.2 4.95; 355 6.1 3.2 4.4; 356 6.1 3.2 3.85; 357 6.1 3.2 3.3;
358 6.1 3.2 2.75; 359 6.1 3.2 2.2; 360 6.1 3.2 1.65; 361 6.1 3.2 1.1;
362 6.1 3.2 0.55; 363 6.1 3.2 -0.2; 364 6.1 2.8 4.95; 365 6.1 2.8 4.4;
366 6.1 2.8 3.85; 367 6.1 2.8 3.3; 368 6.1 2.8 2.75; 369 6.1 2.8 2.2;
370 6.1 2.8 1.65; 371 6.1 2.8 1.1; 372 6.1 2.8 0.55; 373 6.1 2.8 -0.2;
374 6.1 2.4 4.95; 375 6.1 2.4 4.4; 376 6.1 2.4 3.85; 377 6.1 2.4 3.3;
378 6.1 2.4 2.75; 379 6.1 2.4 2.2; 380 6.1 2.4 1.65; 381 6.1 2.4 1.1;
382 6.1 2.4 0.55; 383 6.1 2.4 -0.2; 384 6.1 2 4.95; 385 6.1 2 4.4;
386 6.1 2 3.85; 387 6.1 2 3.3; 388 6.1 2 2.75; 389 6.1 2 2.2; 390 6.1 2 1.65;
391 6.1 2 1.1; 392 6.1 2 0.55; 393 6.1 2 -0.2; 394 6.1 1.6 4.95;
395 6.1 1.6 4.4; 396 6.1 1.6 3.85; 397 6.1 1.6 3.3; 398 6.1 1.6 2.75;
399 6.1 1.6 2.2; 400 6.1 1.6 1.65; 401 6.1 1.6 1.1; 402 6.1 1.6 0.55;
403 6.1 1.6 -0.2; 404 6.1 1.2 4.95; 405 6.1 1.2 4.4; 406 6.1 1.2 3.85;
407 6.1 1.2 3.3; 408 6.1 1.2 2.75; 409 6.1 1.2 2.2; 410 6.1 1.2 1.65;
411 6.1 1.2 1.1; 412 6.1 1.2 0.55; 413 6.1 1.2 -0.2; 414 6.1 0.8 4.95;
415 6.1 0.8 4.4; 416 6.1 0.8 3.85; 417 6.1 0.8 3.3; 418 6.1 0.8 2.75;
419 6.1 0.8 2.2; 420 6.1 0.8 1.65; 421 6.1 0.8 1.1; 422 6.1 0.8 0.55;
423 6.1 0.8 -0.2; 433 0.2 4.4 4.95; 434 0.2 4 4.95; 435 0.2 4.4 4.4;
436 0.2 4 4.4; 437 0.2 4.4 3.85; 438 0.2 4 3.85; 439 0.2 4.4 3.3;
440 0.2 4 3.3; 441 0.2 4.4 2.75; 442 0.2 4 2.75; 443 0.2 4.4 2.2;
444 0.2 4 2.2; 445 0.2 4.4 1.65; 446 0.2 4 1.65; 447 0.2 4.4 1.1;
448 0.2 4 1.1; 449 0.2 4.4 0.55; 450 0.2 4 0.55; 451 0.2 4 -0.2;
452 0.2 3.6 4.95; 453 0.2 3.6 4.4; 454 0.2 3.6 3.85; 455 0.2 3.6 3.3;
456 0.2 3.6 2.75; 457 0.2 3.6 2.2; 458 0.2 3.6 1.65; 459 0.2 3.6 1.1;
460 0.2 3.6 0.55; 461 0.2 3.6 -0.2; 462 0.2 3.2 4.95; 463 0.2 3.2 4.4;
464 0.2 3.2 3.85; 465 0.2 3.2 3.3; 466 0.2 3.2 2.75; 467 0.2 3.2 2.2;
468 0.2 3.2 1.65; 469 0.2 3.2 1.1; 470 0.2 3.2 0.55; 471 0.2 3.2 -0.2;
472 0.2 2.8 4.95; 473 0.2 2.8 4.4; 474 0.2 2.8 3.85; 475 0.2 2.8 3.3;
476 0.2 2.8 2.75; 477 0.2 2.8 2.2; 478 0.2 2.8 1.65; 479 0.2 2.8 1.1;
480 0.2 2.8 0.55; 481 0.2 2.8 -0.2; 482 0.2 2.4 4.95; 483 0.2 2.4 4.4;
484 0.2 2.4 3.85; 485 0.2 2.4 3.3; 486 0.2 2.4 2.75; 487 0.2 2.4 2.2;
488 0.2 2.4 1.65; 489 0.2 2.4 1.1; 490 0.2 2.4 0.55; 491 0.2 2.4 -0.2;
492 0.2 2 4.95; 493 0.2 2 4.4; 494 0.2 2 3.85; 495 0.2 2 3.3; 496 0.2 2 2.75;
497 0.2 2 2.2; 498 0.2 2 1.65; 499 0.2 2 1.1; 500 0.2 2 0.55; 501 0.2 2 -0.2;
502 0.2 1.6 4.95; 503 0.2 1.6 4.4; 504 0.2 1.6 3.85; 505 0.2 1.6 3.3;
506 0.2 1.6 2.75; 507 0.2 1.6 2.2; 508 0.2 1.6 1.65; 509 0.2 1.6 1.1;
510 0.2 1.6 0.55; 511 0.2 1.6 -0.2; 512 0.2 1.2 4.95; 513 0.2 1.2 4.4;
514 0.2 1.2 3.85; 515 0.2 1.2 3.3; 516 0.2 1.2 2.75; 517 0.2 1.2 2.2;
518 0.2 1.2 1.65; 519 0.2 1.2 1.1; 520 0.2 1.2 0.55; 521 0.2 1.2 -0.2;
522 0.2 0.8 4.95; 523 0.2 0.8 4.4; 524 0.2 0.8 3.85; 525 0.2 0.8 3.3;
526 0.2 0.8 2.75; 527 0.2 0.8 2.2; 528 0.2 0.8 1.65; 529 0.2 0.8 1.1;
530 0.2 0.8 0.55; 531 0.2 0.8 -0.2; 541 6.1 0.4 4.95; 542 6.1 0.4 4.4;
543 6.1 0.4 3.85; 544 6.1 0.4 3.3; 545 6.1 0.4 2.75; 546 6.1 0.4 2.2;
547 6.1 0.4 1.65; 548 6.1 0.4 1.1; 549 6.1 0.4 0.55; 550 0.2 0.4 4.95;
551 0.2 0.4 4.4; 552 0.2 0.4 3.85; 553 0.2 0.4 3.3; 554 0.2 0.4 2.75;
555 0.2 0.4 2.2; 556 0.2 0.4 1.65; 557 0.2 0.4 1.1; 558 0.2 0.4 0.55;
559 6.1 4.75 4.95; 560 6.1 4.75 4.4; 561 6.1 4.75 3.85; 562 6.1 4.75 3.3;
563 6.1 4.75 2.75; 564 6.1 4.75 2.2; 565 6.1 4.75 1.65; 566 6.1 4.75 1.1;
567 6.1 4.75 0.55; 568 6.1 4.75 -0.2; 569 0.2 4.75 4.95; 570 0.2 4.75 4.4;
571 0.2 4.75 3.85; 572 0.2 4.75 3.3; 573 0.2 4.75 2.75; 574 0.2 4.75 2.2;
575 0.2 4.75 1.65; 576 0.2 4.75 1.1; 577 0.2 4.75 0.55; 578 0.2 4.75 -0.2;
579 0.95 4.75 -0.2; 580 0.4 4.75 -0.2; 581 1.5 4.75 -0.2; 582 2.05 4.75 -0.2;
583 2.6 4.75 -0.2; 584 3.15 4.75 -0.2; 585 3.7 4.75 -0.2; 586 4.25 4.75 -0.2;
587 4.8 4.75 -0.2; 588 5.35 4.75 -0.2; 589 5.9 4.75 -0.2; 590 0.95 4.4 -0.2;
591 1.5 4.4 -0.2; 592 2.05 4.4 -0.2; 593 2.6 4.4 -0.2; 594 3.15 4.4 -0.2;
595 3.7 4.4 -0.2; 596 4.25 4.4 -0.2; 597 4.8 4.4 -0.2; 598 5.35 4.4 -0.2;
599 0.95 4 -0.2; 600 0.4 4 -0.2; 601 1.5 4 -0.2; 602 2.05 4 -0.2;
603 2.6 4 -0.2; 604 3.15 4 -0.2; 605 3.7 4 -0.2; 606 4.25 4 -0.2;
607 4.8 4 -0.2; 608 5.35 4 -0.2; 609 5.9 4 -0.2; 610 0.95 3.6 -0.2;
611 0.4 3.6 -0.2; 612 1.5 3.6 -0.2; 613 2.05 3.6 -0.2; 614 2.6 3.6 -0.2;
615 3.15 3.6 -0.2; 616 3.7 3.6 -0.2; 617 4.25 3.6 -0.2; 618 4.8 3.6 -0.2;
619 5.35 3.6 -0.2; 620 5.9 3.6 -0.2; 621 0.95 3.2 -0.2; 622 0.4 3.2 -0.2;
623 1.5 3.2 -0.2; 624 2.05 3.2 -0.2; 625 2.6 3.2 -0.2; 626 3.15 3.2 -0.2;
627 3.7 3.2 -0.2; 628 4.25 3.2 -0.2; 629 4.8 3.2 -0.2; 630 5.35 3.2 -0.2;
631 5.9 3.2 -0.2; 632 0.95 2.8 -0.2; 633 0.4 2.8 -0.2; 634 1.5 2.8 -0.2;
635 2.05 2.8 -0.2; 636 2.6 2.8 -0.2; 637 3.15 2.8 -0.2; 638 3.7 2.8 -0.2;
639 4.25 2.8 -0.2; 640 4.8 2.8 -0.2; 641 5.35 2.8 -0.2; 642 5.9 2.8 -0.2;
643 0.95 2.4 -0.2; 644 0.4 2.4 -0.2; 645 1.5 2.4 -0.2; 646 2.05 2.4 -0.2;
647 2.6 2.4 -0.2; 648 3.15 2.4 -0.2; 649 3.7 2.4 -0.2; 650 4.25 2.4 -0.2;
651 4.8 2.4 -0.2; 652 5.35 2.4 -0.2; 653 5.9 2.4 -0.2; 654 0.95 2 -0.2;
655 0.4 2 -0.2; 656 1.5 2 -0.2; 657 2.05 2 -0.2; 658 2.6 2 -0.2;
659 3.15 2 -0.2; 660 3.7 2 -0.2; 661 4.25 2 -0.2; 662 4.8 2 -0.2;
663 5.35 2 -0.2; 664 5.9 2 -0.2; 665 0.95 1.6 -0.2; 666 0.4 1.6 -0.2;
667 1.5 1.6 -0.2; 668 2.05 1.6 -0.2; 669 2.6 1.6 -0.2; 670 3.15 1.6 -0.2;
671 3.7 1.6 -0.2; 672 4.25 1.6 -0.2; 673 4.8 1.6 -0.2; 674 5.35 1.6 -0.2;
675 5.9 1.6 -0.2; 676 0.95 1.2 -0.2; 677 0.4 1.2 -0.2; 678 1.5 1.2 -0.2;
679 2.05 1.2 -0.2; 680 2.6 1.2 -0.2; 681 3.15 1.2 -0.2; 682 3.7 1.2 -0.2;

683 4.25 1.2 -0.2; 684 4.8 1.2 -0.2; 685 5.35 1.2 -0.2; 686 5.9 1.2 -0.2;
687 0.95 0.8 -0.2; 688 0.4 0.8 -0.2; 689 1.5 0.8 -0.2; 690 2.05 0.8 -0.2;
691 2.6 0.8 -0.2; 692 3.15 0.8 -0.2; 693 3.7 0.8 -0.2; 694 4.25 0.8 -0.2;
695 4.8 0.8 -0.2; 696 5.35 0.8 -0.2; 697 5.9 0.8 -0.2; 707 0.95 0.4 -0.2;
708 1.5 0.4 -0.2; 709 2.05 0.4 -0.2; 710 2.6 0.4 -0.2; 711 3.15 0.4 -0.2;
712 3.7 0.4 -0.2; 713 4.25 0.4 -0.2; 714 4.8 0.4 -0.2; 715 5.35 0.4 -0.2;
716 0.4 0.4 0.55; 720 0.4 0.4 2.75; 722 0.4 0.4 3.85; 724 0.4 0.4 4.95;
725 5.9 0.4 0.55; 729 5.9 0.4 2.75; 731 5.9 0.4 3.85; 733 5.9 0.4 4.95;
734 0.4 0.4 0.175; 735 0.2 0.4 0.175; 736 0.4 0.4 5.325; 737 0.2 0.4 5.325;
738 6.1 0.4 0.175; 739 5.9 0.4 0.175; 740 6.1 0.4 5.325; 741 5.9 0.4 5.325;
742 0.95 0.4 0.175; 743 1.5 0.4 0.175; 744 2.05 0.4 0.175; 745 2.6 0.4 0.175;
746 3.15 0.4 0.175; 747 3.7 0.4 0.175; 748 4.25 0.4 0.175; 749 4.8 0.4 0.175;
750 5.35 0.4 0.175; 751 0.95 0.4 0.55; 752 1.5 0.4 0.55; 753 2.05 0.4 0.55;
754 2.6 0.4 0.55; 755 3.15 0.4 0.55; 756 3.7 0.4 0.55; 757 4.25 0.4 0.55;
758 4.8 0.4 0.55; 759 5.35 0.4 0.55; 760 0.95 0.4 1.1; 761 0.4 0.4 1.1;
762 1.5 0.4 1.1; 763 2.05 0.4 1.1; 764 2.6 0.4 1.1; 765 3.15 0.4 1.1;
766 3.7 0.4 1.1; 767 4.25 0.4 1.1; 768 4.8 0.4 1.1; 769 5.35 0.4 1.1;
770 5.9 0.4 1.1; 782 0.95 0.4 1.65; 783 0.4 0.4 1.65; 784 1.5 0.4 1.65;
785 2.05 0.4 1.65; 786 2.6 0.4 1.65; 787 3.15 0.4 1.65; 788 3.7 0.4 1.65;
789 4.25 0.4 1.65; 790 4.8 0.4 1.65; 791 5.35 0.4 1.65; 792 5.9 0.4 1.65;
793 0.95 0.4 2.2; 794 0.4 0.4 2.2; 795 1.5 0.4 2.2; 796 2.05 0.4 2.2;
797 2.6 0.4 2.2; 798 3.15 0.4 2.2; 799 3.7 0.4 2.2; 800 4.25 0.4 2.2;
801 4.8 0.4 2.2; 802 5.35 0.4 2.2; 803 5.9 0.4 2.2; 804 0.95 0.4 2.75;
805 1.5 0.4 2.75; 806 2.05 0.4 2.75; 807 2.6 0.4 2.75; 808 3.15 0.4 2.75;
809 3.7 0.4 2.75; 810 4.25 0.4 2.75; 811 4.8 0.4 2.75; 812 5.35 0.4 2.75;
813 0.95 0.4 3.3; 814 0.4 0.4 3.3; 815 1.5 0.4 3.3; 816 2.05 0.4 3.3;
817 2.6 0.4 3.3; 818 3.15 0.4 3.3; 819 3.7 0.4 3.3; 820 4.25 0.4 3.3;
821 4.8 0.4 3.3; 822 5.35 0.4 3.3; 823 5.9 0.4 3.3; 824 0.95 0.4 3.85;
826 1.5 0.4 3.85; 827 2.05 0.4 3.85; 828 2.6 0.4 3.85; 829 3.15 0.4 3.85;
830 3.7 0.4 3.85; 831 4.25 0.4 3.85; 832 4.8 0.4 3.85; 833 5.35 0.4 3.85;
846 0.95 0.4 4.4; 847 0.4 0.4 4.4; 848 1.5 0.4 4.4; 849 2.05 0.4 4.4;
850 2.6 0.4 4.4; 851 3.15 0.4 4.4; 852 3.7 0.4 4.4; 853 4.25 0.4 4.4;
854 4.8 0.4 4.4; 855 5.35 0.4 4.4; 856 5.9 0.4 4.4; 857 0.95 0.4 4.95;
858 1.5 0.4 4.95; 859 2.05 0.4 4.95; 860 2.6 0.4 4.95; 861 3.15 0.4 4.95;
862 3.7 0.4 4.95; 863 4.25 0.4 4.95; 864 4.8 0.4 4.95; 865 5.35 0.4 4.95;
866 0.95 0.4 5.325; 867 1.5 0.4 5.325; 868 2.05 0.4 5.325; 869 2.6 0.4 5.325;
870 3.15 0.4 5.325; 871 3.7 0.4 5.325; 872 4.25 0.4 5.325; 873 4.8 0.4 5.325;
874 5.35 0.4 5.325;
ELEMENT INCIDENCES SHELL
13 15 16 14 13; 16 7 8 6 5; 34 24 33 34 35; 35 33 36 37 34; 36 36 38 39 37;
37 38 40 41 39; 38 40 42 43 41; 39 42 44 45 43; 40 44 46 47 45; 41 46 48 49 47;
42 48 50 51 49; 43 50 31 52 51; 44 35 34 53 22; 45 34 37 54 53; 46 37 39 55 54;
47 39 41 56 55; 48 41 43 57 56; 49 43 45 58 57; 50 45 47 59 58; 51 47 49 60 59;
52 49 51 61 60; 53 51 52 29 61; 54 22 53 62 63; 55 53 54 64 62; 56 54 55 65 64;
57 55 56 66 65; 58 56 57 67 66; 59 57 58 68 67; 60 58 59 69 68; 61 59 60 70 69;
62 60 61 71 70; 63 61 29 72 71; 64 63 62 73 74; 65 62 64 75 73; 66 64 65 76 75;
67 65 66 77 76; 68 66 67 78 77; 69 67 68 79 78; 70 68 69 80 79; 71 69 70 81 80;
72 70 71 82 81; 73 71 72 83 82; 74 74 73 84 85; 75 73 75 86 84; 76 75 76 87 86;
77 76 77 88 87; 78 77 78 89 88; 79 78 79 90 89; 80 79 80 91 90; 81 80 81 92 91;
82 81 82 93 92; 83 82 83 94 93; 84 85 84 95 96; 85 84 86 97 95; 86 86 87 98 97;
87 87 88 99 98; 88 88 89 100 99; 89 89 90 101 100; 90 90 91 102 101;
91 91 92 103 102; 92 92 93 104 103; 93 93 94 105 104; 94 96 95 106 107;
95 95 97 108 106; 96 97 98 109 108; 97 98 99 110 109; 98 99 100 111 110;
99 100 101 112 111; 100 101 102 113 112; 101 102 103 114 113;
102 103 104 115 114; 103 104 105 116 115; 104 107 106 117 118;
105 106 108 119 117; 106 108 109 120 119; 107 109 110 121 120;
108 110 111 122 121; 109 111 112 123 122; 110 112 113 124 123;
111 113 114 125 124; 112 114 115 126 125; 113 115 116 127 126;
114 118 117 128 129; 115 117 119 130 128; 116 119 120 131 130;
117 120 121 132 131; 118 121 122 133 132; 119 122 123 134 133;
120 123 124 135 134; 121 124 125 136 135; 122 125 126 137 136;
123 126 127 138 137; 124 129 128 139 140; 125 128 130 141 139;
126 130 131 142 141; 127 131 132 143 142; 128 132 133 144 143;
129 133 134 145 144; 130 134 135 146 145; 131 135 136 147 146;
132 136 137 148 147; 133 137 138 149 148; 134 140 139 150 151;
135 139 141 152 150; 136 141 142 153 152; 137 142 143 154 153;
138 143 144 155 154; 139 144 145 156 155; 140 145 146 157 156;
141 146 147 158 157; 142 147 148 159 158; 143 148 149 160 159;
144 151 150 170 20; 145 150 152 171 170; 146 152 153 172 171;
147 153 154 173 172; 148 154 155 174 173; 149 155 156 175 174;
150 156 157 176 175; 151 157 158 177 176; 152 158 159 178 177;
153 159 160 27 178; 164 23 24 35 179; 165 179 35 22 21; 166 31 32 180 52;
167 52 180 30 29; 168 29 30 181 72; 169 72 181 182 83; 170 83 182 183 94;
171 94 183 184 105; 172 105 184 185 116; 173 116 185 186 127;
174 127 186 187 138; 175 138 187 188 149; 176 149 188 189 160;
177 160 189 28 27; 178 21 22 63 190; 179 190 63 74 191; 180 191 74 85 192;
181 192 85 96 193; 182 193 96 107 194; 183 194 107 118 195;
184 195 118 129 196; 185 196 129 140 197; 186 197 140 151 198;
187 198 151 20 19; 188 23 199 200 24; 189 199 201 202 200; 190 201 203 204 202;
191 203 205 206 204; 192 205 207 208 206; 193 207 209 210 208;
194 209 211 212 210; 195 211 213 214 212; 196 213 215 216 214; 197 215 7 8 216;
198 31 217 218 32; 199 217 219 220 218; 200 219 221 222 220;
201 221 223 224 222; 202 223 225 226 224; 203 225 227 228 226;
204 227 229 230 228; 205 229 231 232 230; 206 231 233 234 232;

207 233 15 16 234; 208 24 200 235 33; 209 200 202 236 235; 210 202 204 237 236;
211 204 206 238 237; 212 206 208 239 238; 213 208 210 240 239;
214 210 212 241 240; 215 212 214 242 241; 216 214 216 243 242;
217 216 8 244 243; 218 33 235 245 36; 219 235 236 246 245; 220 236 237 247 246;
221 237 238 248 247; 222 238 239 249 248; 223 239 240 250 249;
224 240 241 251 250; 225 241 242 252 251; 226 242 243 253 252;
227 243 244 254 253; 228 36 245 255 38; 229 245 246 256 255;
230 246 247 257 256; 231 247 248 258 257; 232 248 249 259 258;
233 249 250 260 259; 234 250 251 261 260; 235 251 252 262 261;
236 252 253 263 262; 237 253 254 264 263; 238 38 255 265 40;
239 255 256 266 265; 240 256 257 267 266; 241 257 258 268 267;
242 258 259 269 268; 243 259 260 270 269; 244 260 261 271 270;
245 261 262 272 271; 246 262 263 273 272; 247 263 264 274 273;
248 40 265 275 42; 249 265 266 276 275; 250 266 267 277 276;
251 267 268 278 277; 252 268 269 279 278; 253 269 270 280 279;
254 270 271 281 280; 255 271 272 282 281; 256 272 273 283 282;
257 273 274 284 283; 258 42 275 285 44; 259 275 276 286 285;
260 276 277 287 286; 261 277 278 288 287; 262 278 279 289 288;
263 279 280 290 289; 264 280 281 291 290; 265 281 282 292 291;
266 282 283 293 292; 267 283 284 294 293; 268 44 285 295 46;
269 285 286 296 295; 270 286 287 297 296; 271 287 288 298 297;
272 288 289 299 298; 273 289 290 300 299; 274 290 291 301 300;
275 291 292 302 301; 276 292 293 303 302; 277 293 294 304 303;
278 46 295 305 48; 279 295 296 306 305; 280 296 297 307 306;
281 297 298 308 307; 282 298 299 309 308; 283 299 300 310 309;
284 300 301 311 310; 285 301 302 312 311; 286 302 303 313 312;
287 303 304 314 313; 288 48 305 315 50; 289 305 306 316 315;
290 306 307 317 316; 291 307 308 318 317; 292 308 309 319 318;
293 309 310 320 319; 294 310 311 321 320; 295 311 312 322 321;
296 312 313 323 322; 297 313 314 324 323; 298 50 315 217 31;
299 315 316 219 217; 300 316 317 221 219; 301 317 318 223 221;
302 318 319 225 223; 303 319 320 227 225; 304 320 321 229 227;
305 321 322 231 229; 306 322 323 233 231; 307 323 324 15 233;
308 30 325 326 181; 309 325 327 328 326; 310 327 329 330 328;
311 329 331 332 330; 312 331 333 334 332; 313 333 335 336 334;
314 335 337 338 336; 315 337 339 340 338; 316 339 341 342 340;
317 341 14 343 342; 318 181 326 344 182; 319 326 328 345 344;
320 328 330 346 345; 321 330 332 347 346; 322 332 334 348 347;
323 334 336 349 348; 324 336 338 350 349; 325 338 340 351 350;
326 340 342 352 351; 327 342 343 353 352; 328 182 344 354 183;
329 344 345 355 354; 330 345 346 356 355; 331 346 347 357 356;
332 347 348 358 357; 333 348 349 359 358; 334 349 350 360 359;
335 350 351 361 360; 336 351 352 362 361; 337 352 353 363 362;
338 183 354 364 184; 339 354 355 365 364; 340 355 356 366 365;
341 356 357 367 366; 342 357 358 368 367; 343 358 359 369 368;
344 359 360 370 369; 345 360 361 371 370; 346 361 362 372 371;
347 362 363 373 372; 348 184 364 374 185; 349 364 365 375 374;
350 365 366 376 375; 351 366 367 377 376; 352 367 368 378 377;
353 368 369 379 378; 354 369 370 380 379; 355 370 371 381 380;
356 371 372 382 381; 357 372 373 383 382; 358 185 374 384 186;
359 374 375 385 384; 360 375 376 386 385; 361 376 377 387 386;
362 377 378 388 387; 363 378 379 389 388; 364 379 380 390 389;
365 380 381 391 390; 366 381 382 392 391; 367 382 383 393 392;
368 186 384 394 187; 369 384 385 395 394; 370 385 386 396 395;
371 386 387 397 396; 372 387 388 398 397; 373 388 389 399 398;
374 389 390 400 399; 375 390 391 401 400; 376 391 392 402 401;
377 392 393 403 402; 378 187 394 404 188; 379 394 395 405 404;
380 395 396 406 405; 381 396 397 407 406; 382 397 398 408 407;
383 398 399 409 408; 384 399 400 410 409; 385 400 401 411 410;
386 401 402 412 411; 387 402 403 413 412; 388 188 404 414 189;
389 404 405 415 414; 390 405 406 416 415; 391 406 407 417 416;
392 407 408 418 417; 393 408 409 419 418; 394 409 410 420 419;
395 410 411 421 420; 396 411 412 422 421; 397 412 413 423 422;
398 189 414 541 28; 399 414 415 542 541; 400 415 416 543 542;
401 416 417 544 543; 402 417 418 545 544; 403 418 419 546 545;
404 419 420 547 546; 405 420 421 548 547; 406 421 422 549 548;
407 422 423 12 549; 408 21 433 434 190; 409 433 435 436 434;
410 435 437 438 436; 411 437 439 440 438; 412 439 441 442 440;
413 441 443 444 442; 414 443 445 446 444; 415 445 447 448 446;
416 447 449 450 448; 417 449 5 451 450; 418 190 434 452 191;
419 434 436 453 452; 420 436 438 454 453; 421 438 440 455 454;
422 440 442 456 455; 423 442 444 457 456; 424 444 446 458 457;
425 446 448 459 458; 426 448 450 460 459; 427 450 451 461 460;
428 191 452 462 192; 429 452 453 463 462; 430 453 454 464 463;
431 454 455 465 464; 432 455 456 466 465; 433 456 457 467 466;
434 457 458 468 467; 435 458 459 469 468; 436 459 460 470 469;
437 460 461 471 470; 438 192 462 472 193; 439 462 463 473 472;
440 463 464 474 473; 441 464 465 475 474; 442 465 466 476 475;
443 466 467 477 476; 444 467 468 478 477; 445 468 469 479 478;
446 469 470 480 479; 447 470 471 481 480; 448 193 472 482 194;
449 472 473 483 482; 450 473 474 484 483; 451 474 475 485 484;
452 475 476 486 485; 453 476 477 487 486; 454 477 478 488 487;
455 478 479 489 488; 456 479 480 490 489; 457 480 481 491 490;
458 194 482 492 195; 459 482 483 493 492; 460 483 484 494 493;

461 484 485 495 494; 462 485 486 496 495; 463 486 487 497 496;
464 487 488 498 497; 465 488 489 499 498; 466 489 490 500 499;
467 490 491 501 500; 468 195 492 502 196; 469 492 493 503 502;
470 493 494 504 503; 471 494 495 505 504; 472 495 496 506 505;
473 496 497 507 506; 474 497 498 508 507; 475 498 499 509 508;
476 499 500 510 509; 477 500 501 511 510; 478 196 502 512 197;
479 502 503 513 512; 480 503 504 514 513; 481 504 505 515 514;
482 505 506 516 515; 483 506 507 517 516; 484 507 508 518 517;
485 508 509 519 518; 486 509 510 520 519; 487 510 511 521 520;
488 197 512 522 198; 489 512 513 523 522; 490 513 514 524 523;
491 514 515 525 524; 492 515 516 526 525; 493 516 517 527 526;
494 517 518 528 527; 495 518 519 529 528; 496 519 520 530 529;
497 520 521 531 530; 498 198 522 550 19; 499 522 523 551 550;
500 523 524 552 551; 501 524 525 553 552; 502 525 526 554 553;
503 526 527 555 554; 504 527 528 556 555; 505 528 529 557 556;
506 529 530 558 557; 507 530 531 3 558; 528 32 218 559 180;
529 218 220 560 559; 530 220 222 561 560; 531 222 224 562 561;
532 224 226 563 562; 533 226 228 564 563; 534 228 230 565 564;
535 230 232 566 565; 536 232 234 567 566; 537 234 16 568 567;
538 180 559 325 30; 539 559 560 327 325; 540 560 561 329 327;
541 561 562 331 329; 542 562 563 333 331; 543 563 564 335 333;
544 564 565 337 335; 545 565 566 339 337; 546 566 567 341 339;
547 567 568 14 341; 548 23 199 569 179; 549 199 201 570 569;
550 201 203 571 570; 551 203 205 572 571; 552 205 207 573 572;
553 207 209 574 573; 554 209 211 575 574; 555 211 213 576 575;
556 213 215 577 576; 557 215 7 578 577; 558 179 569 433 21;
559 569 570 435 433; 560 570 571 437 435; 561 571 572 439 437;
562 572 573 441 439; 563 573 574 443 441; 564 574 575 445 443;
565 575 576 447 445; 566 576 577 449 447; 567 577 578 5 449; 568 8 244 579 580;
569 244 254 581 579; 570 254 264 582 581; 571 264 274 583 582;
572 274 284 584 583; 573 284 294 585 584; 574 294 304 586 585;
575 304 314 587 586; 576 314 324 588 587; 577 324 15 589 588;
578 580 579 590 6; 579 579 581 591 590; 580 581 582 592 591;
581 582 583 593 592; 582 583 584 594 593; 583 584 585 595 594;
584 585 586 596 595; 585 586 587 597 596; 586 587 588 598 597;
587 588 589 13 598; 588 6 590 599 600; 589 590 591 601 599;
590 591 592 602 601; 591 592 593 603 602; 592 593 594 604 603;
593 594 595 605 604; 594 595 596 606 605; 595 596 597 607 606;
596 597 598 608 607; 597 598 13 609 608; 598 600 599 610 611;
599 599 601 612 610; 600 601 602 613 612; 601 602 603 614 613;
602 603 604 615 614; 603 604 605 616 615; 604 605 606 617 616;
605 606 607 618 617; 606 607 608 619 618; 607 608 609 620 619;
608 611 610 621 622; 609 610 612 623 621; 610 612 613 624 623;
611 613 614 625 624; 612 614 615 626 625; 613 615 616 627 626;
614 616 617 628 627; 615 617 618 629 628; 616 618 619 630 629;
617 619 620 631 630; 618 622 621 632 633; 619 621 623 634 632;
620 623 624 635 634; 621 624 625 636 635; 622 625 626 637 636;
623 626 627 638 637; 624 627 628 639 638; 625 628 629 640 639;
626 629 630 641 640; 627 630 631 642 641; 628 633 632 643 644;
629 632 634 645 643; 630 634 635 646 645; 631 635 636 647 646;
632 636 637 648 647; 633 637 638 649 648; 634 638 639 650 649;
635 639 640 651 650; 636 640 641 652 651; 637 641 642 653 652;
638 644 643 654 655; 639 643 645 656 654; 640 645 646 657 656;
641 646 647 658 657; 642 647 648 659 658; 643 648 649 660 659;
644 649 650 661 660; 645 650 651 662 661; 646 651 652 663 662;
647 652 653 664 663; 648 655 654 665 666; 649 654 656 667 665;
650 656 657 668 667; 651 657 658 669 668; 652 658 659 670 669;
653 659 660 671 670; 654 660 661 672 671; 655 661 662 673 672;
656 662 663 674 673; 657 663 664 675 674; 658 666 665 676 677;
659 665 667 678 676; 660 667 668 679 678; 661 668 669 680 679;
662 669 670 681 680; 663 670 671 682 681; 664 671 672 683 682;
665 672 673 684 683; 666 673 674 685 684; 667 674 675 686 685;
668 677 676 687 688; 669 676 678 689 687; 670 678 679 690 689;
671 679 680 691 690; 672 680 681 692 691; 673 681 682 693 692;
674 682 683 694 693; 675 683 684 695 694; 676 684 685 696 695;
677 685 686 697 696; 678 688 687 707 4; 679 687 689 708 707;
680 689 690 709 708; 681 690 691 710 709; 682 691 692 711 710;
683 692 693 712 711; 684 693 694 713 712; 685 694 695 714 713;
686 695 696 715 714; 687 696 697 11 715; 702 558 716 761 557;
703 557 761 783 556; 704 556 783 794 555; 705 555 794 720 554;
706 554 720 814 553; 707 553 814 722 552; 708 552 722 847 551;
709 551 847 724 550; 712 725 549 548 770; 713 770 548 547 792;
714 792 547 546 803; 715 803 546 545 729; 716 729 545 544 823;
717 823 544 543 731; 718 731 543 542 856; 719 856 542 541 733; 724 3 4 734 735;
725 735 734 716 558; 726 550 724 736 737; 727 737 736 20 19; 728 11 12 738 739;
729 739 738 549 725; 730 733 541 740 741; 731 741 740 28 27; 732 4 707 742 734;
733 707 708 743 742; 734 708 709 744 743; 735 709 710 745 744;
736 710 711 746 745; 737 711 712 747 746; 738 712 713 748 747;
739 713 714 749 748; 740 714 715 750 749; 741 715 11 739 750;
742 734 742 751 716; 743 742 743 752 751; 744 743 744 753 752;
745 744 745 754 753; 746 745 746 755 754; 747 746 747 756 755;
748 747 748 757 756; 749 748 749 758 757; 750 749 750 759 758;
751 750 739 725 759; 752 716 751 760 761; 753 751 752 762 760;
754 752 753 763 762; 755 753 754 764 763; 756 754 755 765 764;

```
757 755 756 766 765; 758 756 757 767 766; 759 757 758 768 767;
760 758 759 769 768; 761 759 725 770 769; 762 761 760 782 783;
763 760 762 784 782; 764 762 763 785 784; 765 763 764 786 785;
766 764 765 787 786; 767 765 766 788 787; 768 766 767 789 788;
769 767 768 790 789; 770 768 769 791 790; 771 769 770 792 791;
782 783 782 793 794; 783 782 784 795 793; 784 784 785 796 795;
785 785 786 797 796; 786 786 787 798 797; 787 787 788 799 798;
788 788 789 800 799; 789 789 790 801 800; 790 790 791 802 801;
791 791 792 803 802; 792 794 793 804 720; 793 793 795 805 804;
794 795 796 806 805; 795 796 797 807 806; 796 797 798 808 807;
797 798 799 809 808; 798 799 800 810 809; 799 800 801 811 810;
800 801 802 812 811; 801 802 803 729 812; 802 720 804 813 814;
803 804 805 815 813; 804 805 806 816 815; 805 806 807 817 816;
806 807 808 818 817; 807 808 809 819 818; 808 809 810 820 819;
809 810 811 821 820; 810 811 812 822 821; 811 812 729 823 822;
812 814 813 824 722; 813 813 815 826 824; 814 815 816 827 826;
815 816 817 828 827; 816 817 818 829 828; 817 818 819 830 829;
818 819 820 831 830; 819 820 821 832 831; 820 821 822 833 832;
821 822 823 731 833; 822 722 824 846 847; 823 824 826 848 846;
824 826 827 849 848; 825 827 828 850 849; 826 828 829 851 850;
827 829 830 852 851; 828 830 831 853 852; 829 831 832 854 853;
830 832 833 855 854; 831 833 731 856 855; 842 847 846 857 724;
843 846 848 858 857; 844 848 849 859 858; 845 849 850 860 859;
846 850 851 861 860; 847 851 852 862 861; 848 852 853 863 862;
849 853 854 864 863; 850 854 855 865 864; 851 855 856 733 865;
852 724 857 866 736; 853 857 858 867 866; 854 858 859 868 867;
855 859 860 869 868; 856 860 861 870 869; 857 861 862 871 870;
858 862 863 872 871; 859 863 864 873 872; 860 864 865 874 873;
861 865 733 741 874; 862 736 866 170 20; 863 866 867 171 170;
864 867 868 172 171; 865 868 869 173 172; 866 869 870 174 173;
867 870 871 175 174; 868 871 872 176 175; 869 872 873 177 176;
870 873 874 178 177; 871 874 741 27 178; 872 13 14 343 609;
873 609 343 353 620; 874 620 353 363 631; 875 631 363 373 642;
876 642 373 383 653; 877 653 383 393 664; 878 664 393 403 675;
879 675 403 413 686; 880 686 413 423 697; 881 697 423 12 11; 882 5 6 600 451;
883 451 600 611 461; 884 461 611 622 471; 885 471 622 633 481;
886 481 633 644 491; 887 491 644 655 501; 888 501 655 666 511;
889 511 666 677 521; 890 521 677 688 531; 891 531 688 4 3;
START GROUP DEFINITION
ELEMENT
END GROUP DEFINITION
ELEMENT PROPERTY
188 TO 307 THICKNESS 0.15
702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 871 THICKNESS 0.4
13 16 34 TO 153 164 TO 187 308 TO 507 528 TO 687 872 TO 891 THICKNESS 0.4
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.17185e+007
POISSON 0.17
DENSITY 25
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 35000
END DEFINE MATERIAL
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 870 -
871 PLATE MAT DIRECT Y SUBGRADE 66000 PRINT
LOAD 1 LOADTYPE Dead  TITLE DEAD LOAD
SELFWEIGHT Y -1
LOAD 2 LOADTYPE Live  TITLE LIVE LOAD
ELEMENT LOAD
188 TO 307 PR GY -5
LOAD 3 LOADTYPE Fluids  TITLE WATER PRESSURE
ELEMENT LOAD
409 TRAP JT 0.0999976 0.0999976 4.09 4.09
410 TRAP JT 0.0999976 0.0999976 4.09 4.09
411 TRAP JT 0.0999976 0.0999976 4.09 4.09
412 TRAP JT 0.0999976 0.0999976 4.09 4.09
413 TRAP JT 0.0999976 0.0999976 4.09 4.09
414 TRAP JT 0.0999976 0.0999976 4.09 4.09
415 TRAP JT 0.0999976 0.0999976 4.09 4.09
416 TRAP JT 0.0999976 0.0999976 4.09 4.09
417 TRAP JT 0.0999976 0.0999976 4.09 4.09
418 TRAP JT 4.09 4.09 8.08 8.08
419 TRAP JT 4.09 4.09 8.08 8.08
420 TRAP JT 4.09 4.09 8.08 8.08
421 TRAP JT 4.09 4.09 8.08 8.08
422 TRAP JT 4.09 4.09 8.08 8.08
423 TRAP JT 4.09 4.09 8.08 8.08
424 TRAP JT 4.09 4.09 8.08 8.08
425 TRAP JT 4.09 4.09 8.08 8.08
```

```
426 TRAP JT 4.09 4.09 8.08 8.08
427 TRAP JT 4.09 4.09 8.08 8.08
428 TRAP JT 8.08 8.08 12.07 12.07
429 TRAP JT 8.08 8.08 12.07 12.07
430 TRAP JT 8.08 8.08 12.07 12.07
431 TRAP JT 8.08 8.08 12.07 12.07
432 TRAP JT 8.08 8.08 12.07 12.07
433 TRAP JT 8.08 8.08 12.07 12.07
434 TRAP JT 8.08 8.08 12.07 12.07
435 TRAP JT 8.08 8.08 12.07 12.07
436 TRAP JT 8.08 8.08 12.07 12.07
437 TRAP JT 8.08 8.08 12.07 12.07
438 TRAP JT 12.07 12.07 16.06 16.06
439 TRAP JT 12.07 12.07 16.06 16.06
440 TRAP JT 12.07 12.07 16.06 16.06
441 TRAP JT 12.07 12.07 16.06 16.06
442 TRAP JT 12.07 12.07 16.06 16.06
443 TRAP JT 12.07 12.07 16.06 16.06
444 TRAP JT 12.07 12.07 16.06 16.06
445 TRAP JT 12.07 12.07 16.06 16.06
446 TRAP JT 12.07 12.07 16.06 16.06
447 TRAP JT 12.07 12.07 16.06 16.06
448 TRAP JT 16.06 16.06 20.05 20.05
449 TRAP JT 16.06 16.06 20.05 20.05
450 TRAP JT 16.06 16.06 20.05 20.05
451 TRAP JT 16.06 16.06 20.05 20.05
452 TRAP JT 16.06 16.06 20.05 20.05
453 TRAP JT 16.06 16.06 20.05 20.05
454 TRAP JT 16.06 16.06 20.05 20.05
455 TRAP JT 16.06 16.06 20.05 20.05
456 TRAP JT 16.06 16.06 20.05 20.05
457 TRAP JT 16.06 16.06 20.05 20.05
458 TRAP JT 20.05 20.05 24.04 24.04
459 TRAP JT 20.05 20.05 24.04 24.04
460 TRAP JT 20.05 20.05 24.04 24.04
461 TRAP JT 20.05 20.05 24.04 24.04
462 TRAP JT 20.05 20.05 24.04 24.04
463 TRAP JT 20.05 20.05 24.04 24.04
464 TRAP JT 20.05 20.05 24.04 24.04
465 TRAP JT 20.05 20.05 24.04 24.04
466 TRAP JT 20.05 20.05 24.04 24.04
467 TRAP JT 20.05 20.05 24.04 24.04
468 TRAP JT 24.04 24.04 28.03 28.03
469 TRAP JT 24.04 24.04 28.03 28.03
470 TRAP JT 24.04 24.04 28.03 28.03
471 TRAP JT 24.04 24.04 28.03 28.03
472 TRAP JT 24.04 24.04 28.03 28.03
473 TRAP JT 24.04 24.04 28.03 28.03
474 TRAP JT 24.04 24.04 28.03 28.03
475 TRAP JT 24.04 24.04 28.03 28.03
476 TRAP JT 24.04 24.04 28.03 28.03
477 TRAP JT 24.04 24.04 28.03 28.03
478 TRAP JT 28.03 28.03 32.02 32.02
479 TRAP JT 28.03 28.03 32.02 32.02
480 TRAP JT 28.03 28.03 32.02 32.02
481 TRAP JT 28.03 28.03 32.02 32.02
482 TRAP JT 28.03 28.03 32.02 32.02
483 TRAP JT 28.03 28.03 32.02 32.02
484 TRAP JT 28.03 28.03 32.02 32.02
485 TRAP JT 28.03 28.03 32.02 32.02
486 TRAP JT 28.03 28.03 32.02 32.02
487 TRAP JT 28.03 28.03 32.02 32.02
488 TRAP JT 32.02 32.02 36.01 36.01
489 TRAP JT 32.02 32.02 36.01 36.01
490 TRAP JT 32.02 32.02 36.01 36.01
491 TRAP JT 32.02 32.02 36.01 36.01
492 TRAP JT 32.02 32.02 36.01 36.01
493 TRAP JT 32.02 32.02 36.01 36.01
494 TRAP JT 32.02 32.02 36.01 36.01
495 TRAP JT 32.02 32.02 36.01 36.01
496 TRAP JT 32.02 32.02 36.01 36.01
497 TRAP JT 32.02 32.02 36.01 36.01
498 TRAP JT 36.01 36.01 40 40
499 TRAP JT 36.01 36.01 40 40
500 TRAP JT 36.01 36.01 40 40
501 TRAP JT 36.01 36.01 40 40
502 TRAP JT 36.01 36.01 40 40
503 TRAP JT 36.01 36.01 40 40
504 TRAP JT 36.01 36.01 40 40
505 TRAP JT 36.01 36.01 40 40
506 TRAP JT 36.01 36.01 40 40
507 TRAP JT 36.01 36.01 40 40
408 TRAP JT 0.0999976 0.0999976 4.09 4.09
308 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
```

309 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
310 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
311 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
312 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
313 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
314 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
315 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
316 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
317 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
318 TRAP JT -4.09 -4.09 -8.08 -8.08
319 TRAP JT -4.09 -4.09 -8.08 -8.08
320 TRAP JT -4.09 -4.09 -8.08 -8.08
321 TRAP JT -4.09 -4.09 -8.08 -8.08
322 TRAP JT -4.09 -4.09 -8.08 -8.08
323 TRAP JT -4.09 -4.09 -8.08 -8.08
324 TRAP JT -4.09 -4.09 -8.08 -8.08
325 TRAP JT -4.09 -4.09 -8.08 -8.08
326 TRAP JT -4.09 -4.09 -8.08 -8.08
327 TRAP JT -4.09 -4.09 -8.08 -8.08
328 TRAP JT -8.08 -8.08 -12.07 -12.07
329 TRAP JT -8.08 -8.08 -12.07 -12.07
330 TRAP JT -8.08 -8.08 -12.07 -12.07
331 TRAP JT -8.08 -8.08 -12.07 -12.07
332 TRAP JT -8.08 -8.08 -12.07 -12.07
333 TRAP JT -8.08 -8.08 -12.07 -12.07
334 TRAP JT -8.08 -8.08 -12.07 -12.07
335 TRAP JT -8.08 -8.08 -12.07 -12.07
336 TRAP JT -8.08 -8.08 -12.07 -12.07
337 TRAP JT -8.08 -8.08 -12.07 -12.07
338 TRAP JT -12.07 -12.07 -16.06 -16.06
339 TRAP JT -12.07 -12.07 -16.06 -16.06
340 TRAP JT -12.07 -12.07 -16.06 -16.06
341 TRAP JT -12.07 -12.07 -16.06 -16.06
342 TRAP JT -12.07 -12.07 -16.06 -16.06
343 TRAP JT -12.07 -12.07 -16.06 -16.06
344 TRAP JT -12.07 -12.07 -16.06 -16.06
345 TRAP JT -12.07 -12.07 -16.06 -16.06
346 TRAP JT -12.07 -12.07 -16.06 -16.06
347 TRAP JT -12.07 -12.07 -16.06 -16.06
348 TRAP JT -16.06 -16.06 -20.05 -20.05
349 TRAP JT -16.06 -16.06 -20.05 -20.05
350 TRAP JT -16.06 -16.06 -20.05 -20.05
351 TRAP JT -16.06 -16.06 -20.05 -20.05
352 TRAP JT -16.06 -16.06 -20.05 -20.05
353 TRAP JT -16.06 -16.06 -20.05 -20.05
354 TRAP JT -16.06 -16.06 -20.05 -20.05
355 TRAP JT -16.06 -16.06 -20.05 -20.05
356 TRAP JT -16.06 -16.06 -20.05 -20.05
357 TRAP JT -16.06 -16.06 -20.05 -20.05
358 TRAP JT -20.05 -20.05 -24.04 -24.04
359 TRAP JT -20.05 -20.05 -24.04 -24.04
360 TRAP JT -20.05 -20.05 -24.04 -24.04
361 TRAP JT -20.05 -20.05 -24.04 -24.04
362 TRAP JT -20.05 -20.05 -24.04 -24.04
363 TRAP JT -20.05 -20.05 -24.04 -24.04
364 TRAP JT -20.05 -20.05 -24.04 -24.04
365 TRAP JT -20.05 -20.05 -24.04 -24.04
366 TRAP JT -20.05 -20.05 -24.04 -24.04
367 TRAP JT -20.05 -20.05 -24.04 -24.04
368 TRAP JT -24.04 -24.04 -28.03 -28.03
369 TRAP JT -24.04 -24.04 -28.03 -28.03
370 TRAP JT -24.04 -24.04 -28.03 -28.03
371 TRAP JT -24.04 -24.04 -28.03 -28.03
372 TRAP JT -24.04 -24.04 -28.03 -28.03
373 TRAP JT -24.04 -24.04 -28.03 -28.03
374 TRAP JT -24.04 -24.04 -28.03 -28.03
375 TRAP JT -24.04 -24.04 -28.03 -28.03
376 TRAP JT -24.04 -24.04 -28.03 -28.03
377 TRAP JT -24.04 -24.04 -28.03 -28.03
378 TRAP JT -28.03 -28.03 -32.02 -32.02
379 TRAP JT -28.03 -28.03 -32.02 -32.02
380 TRAP JT -28.03 -28.03 -32.02 -32.02
381 TRAP JT -28.03 -28.03 -32.02 -32.02
382 TRAP JT -28.03 -28.03 -32.02 -32.02
383 TRAP JT -28.03 -28.03 -32.02 -32.02
384 TRAP JT -28.03 -28.03 -32.02 -32.02
385 TRAP JT -28.03 -28.03 -32.02 -32.02
386 TRAP JT -28.03 -28.03 -32.02 -32.02
387 TRAP JT -28.03 -28.03 -32.02 -32.02
388 TRAP JT -32.02 -32.02 -36.01 -36.01
389 TRAP JT -32.02 -32.02 -36.01 -36.01
390 TRAP JT -32.02 -32.02 -36.01 -36.01
391 TRAP JT -32.02 -32.02 -36.01 -36.01
392 TRAP JT -32.02 -32.02 -36.01 -36.01

393 TRAP JT -32.02 -32.02 -36.01 -36.01
394 TRAP JT -32.02 -32.02 -36.01 -36.01
395 TRAP JT -32.02 -32.02 -36.01 -36.01
396 TRAP JT -32.02 -32.02 -36.01 -36.01
397 TRAP JT -32.02 -32.02 -36.01 -36.01
398 TRAP JT -36.01 -36.01 -40 -40
399 TRAP JT -36.01 -36.01 -40 -40
400 TRAP JT -36.01 -36.01 -40 -40
401 TRAP JT -36.01 -36.01 -40 -40
402 TRAP JT -36.01 -36.01 -40 -40
403 TRAP JT -36.01 -36.01 -40 -40
404 TRAP JT -36.01 -36.01 -40 -40
405 TRAP JT -36.01 -36.01 -40 -40
406 TRAP JT -36.01 -36.01 -40 -40
407 TRAP JT -36.01 -36.01 -40 -40
54 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
55 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
56 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
57 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
58 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
59 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
60 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
61 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
62 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
63 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
64 TRAP JT -4.09 -4.09 -8.08 -8.08
65 TRAP JT -4.09 -4.09 -8.08 -8.08
66 TRAP JT -4.09 -4.09 -8.08 -8.08
67 TRAP JT -4.09 -4.09 -8.08 -8.08
68 TRAP JT -4.09 -4.09 -8.08 -8.08
69 TRAP JT -4.09 -4.09 -8.08 -8.08
70 TRAP JT -4.09 -4.09 -8.08 -8.08
71 TRAP JT -4.09 -4.09 -8.08 -8.08
72 TRAP JT -4.09 -4.09 -8.08 -8.08
73 TRAP JT -4.09 -4.09 -8.08 -8.08
74 TRAP JT -8.08 -8.08 -12.07 -12.07
75 TRAP JT -8.08 -8.08 -12.07 -12.07
76 TRAP JT -8.08 -8.08 -12.07 -12.07
77 TRAP JT -8.08 -8.08 -12.07 -12.07
78 TRAP JT -8.08 -8.08 -12.07 -12.07
79 TRAP JT -8.08 -8.08 -12.07 -12.07
80 TRAP JT -8.08 -8.08 -12.07 -12.07
81 TRAP JT -8.08 -8.08 -12.07 -12.07
82 TRAP JT -8.08 -8.08 -12.07 -12.07
83 TRAP JT -8.08 -8.08 -12.07 -12.07
84 TRAP JT -12.07 -12.07 -16.06 -16.06
85 TRAP JT -12.07 -12.07 -16.06 -16.06
86 TRAP JT -12.07 -12.07 -16.06 -16.06
87 TRAP JT -12.07 -12.07 -16.06 -16.06
88 TRAP JT -12.07 -12.07 -16.06 -16.06
89 TRAP JT -12.07 -12.07 -16.06 -16.06
90 TRAP JT -12.07 -12.07 -16.06 -16.06
91 TRAP JT -12.07 -12.07 -16.06 -16.06
92 TRAP JT -12.07 -12.07 -16.06 -16.06
93 TRAP JT -12.07 -12.07 -16.06 -16.06
94 TRAP JT -16.06 -16.06 -20.05 -20.05
95 TRAP JT -16.06 -16.06 -20.05 -20.05
96 TRAP JT -16.06 -16.06 -20.05 -20.05
97 TRAP JT -16.06 -16.06 -20.05 -20.05
98 TRAP JT -16.06 -16.06 -20.05 -20.05
99 TRAP JT -16.06 -16.06 -20.05 -20.05
100 TRAP JT -16.06 -16.06 -20.05 -20.05
101 TRAP JT -16.06 -16.06 -20.05 -20.05
102 TRAP JT -16.06 -16.06 -20.05 -20.05
103 TRAP JT -16.06 -16.06 -20.05 -20.05
104 TRAP JT -20.05 -20.05 -24.04 -24.04
105 TRAP JT -20.05 -20.05 -24.04 -24.04
106 TRAP JT -20.05 -20.05 -24.04 -24.04
107 TRAP JT -20.05 -20.05 -24.04 -24.04
108 TRAP JT -20.05 -20.05 -24.04 -24.04
109 TRAP JT -20.05 -20.05 -24.04 -24.04
110 TRAP JT -20.05 -20.05 -24.04 -24.04
111 TRAP JT -20.05 -20.05 -24.04 -24.04
112 TRAP JT -20.05 -20.05 -24.04 -24.04
113 TRAP JT -20.05 -20.05 -24.04 -24.04
114 TRAP JT -24.04 -24.04 -28.03 -28.03
115 TRAP JT -24.04 -24.04 -28.03 -28.03
116 TRAP JT -24.04 -24.04 -28.03 -28.03
117 TRAP JT -24.04 -24.04 -28.03 -28.03
118 TRAP JT -24.04 -24.04 -28.03 -28.03
119 TRAP JT -24.04 -24.04 -28.03 -28.03
120 TRAP JT -24.04 -24.04 -28.03 -28.03
121 TRAP JT -24.04 -24.04 -28.03 -28.03
122 TRAP JT -24.04 -24.04 -28.03 -28.03

```
123 TRAP JT -24.04 -24.04 -28.03 -28.03
124 TRAP JT -28.03 -28.03 -32.02 -32.02
125 TRAP JT -28.03 -28.03 -32.02 -32.02
126 TRAP JT -28.03 -28.03 -32.02 -32.02
127 TRAP JT -28.03 -28.03 -32.02 -32.02
128 TRAP JT -28.03 -28.03 -32.02 -32.02
129 TRAP JT -28.03 -28.03 -32.02 -32.02
130 TRAP JT -28.03 -28.03 -32.02 -32.02
131 TRAP JT -28.03 -28.03 -32.02 -32.02
132 TRAP JT -28.03 -28.03 -32.02 -32.02
133 TRAP JT -28.03 -28.03 -32.02 -32.02
134 TRAP JT -32.02 -32.02 -36.01 -36.01
135 TRAP JT -32.02 -32.02 -36.01 -36.01
136 TRAP JT -32.02 -32.02 -36.01 -36.01
137 TRAP JT -32.02 -32.02 -36.01 -36.01
138 TRAP JT -32.02 -32.02 -36.01 -36.01
139 TRAP JT -32.02 -32.02 -36.01 -36.01
140 TRAP JT -32.02 -32.02 -36.01 -36.01
141 TRAP JT -32.02 -32.02 -36.01 -36.01
142 TRAP JT -32.02 -32.02 -36.01 -36.01
143 TRAP JT -32.02 -32.02 -36.01 -36.01
144 TRAP JT -36.01 -36.01 -40 -40
145 TRAP JT -36.01 -36.01 -40 -40
146 TRAP JT -36.01 -36.01 -40 -40
147 TRAP JT -36.01 -36.01 -40 -40
148 TRAP JT -36.01 -36.01 -40 -40
149 TRAP JT -36.01 -36.01 -40 -40
150 TRAP JT -36.01 -36.01 -40 -40
151 TRAP JT -36.01 -36.01 -40 -40
152 TRAP JT -36.01 -36.01 -40 -40
153 TRAP JT -36.01 -36.01 -40 -40
168 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
169 TRAP JT -4.09 -4.09 -8.08 -8.08
170 TRAP JT -8.08 -8.08 -12.07 -12.07
171 TRAP JT -12.07 -12.07 -16.06 -16.06
172 TRAP JT -16.06 -16.06 -20.05 -20.05
173 TRAP JT -20.05 -20.05 -24.04 -24.04
174 TRAP JT -24.04 -24.04 -28.03 -28.03
175 TRAP JT -28.03 -28.03 -32.02 -32.02
176 TRAP JT -32.02 -32.02 -36.01 -36.01
177 TRAP JT -36.01 -36.01 -40 -40
178 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
179 TRAP JT -4.09 -4.09 -8.08 -8.08
180 TRAP JT -8.08 -8.08 -12.07 -12.07
181 TRAP JT -12.07 -12.07 -16.06 -16.06
182 TRAP JT -16.06 -16.06 -20.05 -20.05
183 TRAP JT -20.05 -20.05 -24.04 -24.04
184 TRAP JT -24.04 -24.04 -28.03 -28.03
185 TRAP JT -28.03 -28.03 -32.02 -32.02
186 TRAP JT -32.02 -32.02 -36.01 -36.01
187 TRAP JT -36.01 -36.01 -40 -40
872 TO 881 TRAP JT 0.0999976 0.0999976 40 40
882 TO 891 TRAP JT 0.0999976 0.0999976 40 40
588 TRAP JT 0.0999976 0.0999976 4.09 4.09
589 TRAP JT 0.0999976 0.0999976 4.09 4.09
590 TRAP JT 0.0999976 0.0999976 4.09 4.09
591 TRAP JT 0.0999976 0.0999976 4.09 4.09
592 TRAP JT 0.0999976 0.0999976 4.09 4.09
593 TRAP JT 0.0999976 0.0999976 4.09 4.09
594 TRAP JT 0.0999976 0.0999976 4.09 4.09
595 TRAP JT 0.0999976 0.0999976 4.09 4.09
596 TRAP JT 0.0999976 0.0999976 4.09 4.09
597 TRAP JT 0.0999976 0.0999976 4.09 4.09
598 TRAP JT 4.09 4.09 8.08 8.08
599 TRAP JT 4.09 4.09 8.08 8.08
600 TRAP JT 4.09 4.09 8.08 8.08
601 TRAP JT 4.09 4.09 8.08 8.08
602 TRAP JT 4.09 4.09 8.08 8.08
603 TRAP JT 4.09 4.09 8.08 8.08
604 TRAP JT 4.09 4.09 8.08 8.08
605 TRAP JT 4.09 4.09 8.08 8.08
606 TRAP JT 4.09 4.09 8.08 8.08
607 TRAP JT 4.09 4.09 8.08 8.08
608 TRAP JT 8.08 8.08 12.07 12.07
609 TRAP JT 8.08 8.08 12.07 12.07
610 TRAP JT 8.08 8.08 12.07 12.07
611 TRAP JT 8.08 8.08 12.07 12.07
612 TRAP JT 8.08 8.08 12.07 12.07
613 TRAP JT 8.08 8.08 12.07 12.07
614 TRAP JT 8.08 8.08 12.07 12.07
615 TRAP JT 8.08 8.08 12.07 12.07
616 TRAP JT 8.08 8.08 12.07 12.07
617 TRAP JT 8.08 8.08 12.07 12.07
618 TRAP JT 12.07 12.07 16.06 16.06
```

619 TRAP JT 12.07 12.07 16.06 16.06
620 TRAP JT 12.07 12.07 16.06 16.06
621 TRAP JT 12.07 12.07 16.06 16.06
622 TRAP JT 12.07 12.07 16.06 16.06
623 TRAP JT 12.07 12.07 16.06 16.06
624 TRAP JT 12.07 12.07 16.06 16.06
625 TRAP JT 12.07 12.07 16.06 16.06
626 TRAP JT 12.07 12.07 16.06 16.06
627 TRAP JT 12.07 12.07 16.06 16.06
628 TRAP JT 16.06 16.06 20.05 20.05
629 TRAP JT 16.06 16.06 20.05 20.05
630 TRAP JT 16.06 16.06 20.05 20.05
631 TRAP JT 16.06 16.06 20.05 20.05
632 TRAP JT 16.06 16.06 20.05 20.05
633 TRAP JT 16.06 16.06 20.05 20.05
634 TRAP JT 16.06 16.06 20.05 20.05
635 TRAP JT 16.06 16.06 20.05 20.05
636 TRAP JT 16.06 16.06 20.05 20.05
637 TRAP JT 16.06 16.06 20.05 20.05
638 TRAP JT 20.05 20.05 24.04 24.04
639 TRAP JT 20.05 20.05 24.04 24.04
640 TRAP JT 20.05 20.05 24.04 24.04
641 TRAP JT 20.05 20.05 24.04 24.04
642 TRAP JT 20.05 20.05 24.04 24.04
643 TRAP JT 20.05 20.05 24.04 24.04
644 TRAP JT 20.05 20.05 24.04 24.04
645 TRAP JT 20.05 20.05 24.04 24.04
646 TRAP JT 20.05 20.05 24.04 24.04
647 TRAP JT 20.05 20.05 24.04 24.04
648 TRAP JT 24.04 24.04 28.03 28.03
649 TRAP JT 24.04 24.04 28.03 28.03
650 TRAP JT 24.04 24.04 28.03 28.03
651 TRAP JT 24.04 24.04 28.03 28.03
652 TRAP JT 24.04 24.04 28.03 28.03
653 TRAP JT 24.04 24.04 28.03 28.03
654 TRAP JT 24.04 24.04 28.03 28.03
655 TRAP JT 24.04 24.04 28.03 28.03
656 TRAP JT 24.04 24.04 28.03 28.03
657 TRAP JT 24.04 24.04 28.03 28.03
658 TRAP JT 28.03 28.03 32.02 32.02
659 TRAP JT 28.03 28.03 32.02 32.02
660 TRAP JT 28.03 28.03 32.02 32.02
661 TRAP JT 28.03 28.03 32.02 32.02
662 TRAP JT 28.03 28.03 32.02 32.02
663 TRAP JT 28.03 28.03 32.02 32.02
664 TRAP JT 28.03 28.03 32.02 32.02
665 TRAP JT 28.03 28.03 32.02 32.02
666 TRAP JT 28.03 28.03 32.02 32.02
667 TRAP JT 28.03 28.03 32.02 32.02
668 TRAP JT 32.02 32.02 36.01 36.01
669 TRAP JT 32.02 32.02 36.01 36.01
670 TRAP JT 32.02 32.02 36.01 36.01
671 TRAP JT 32.02 32.02 36.01 36.01
672 TRAP JT 32.02 32.02 36.01 36.01
673 TRAP JT 32.02 32.02 36.01 36.01
674 TRAP JT 32.02 32.02 36.01 36.01
675 TRAP JT 32.02 32.02 36.01 36.01
676 TRAP JT 32.02 32.02 36.01 36.01
677 TRAP JT 32.02 32.02 36.01 36.01
678 TRAP JT 36.01 36.01 40 40
679 TRAP JT 36.01 36.01 40 40
680 TRAP JT 36.01 36.01 40 40
681 TRAP JT 36.01 36.01 40 40
682 TRAP JT 36.01 36.01 40 40
683 TRAP JT 36.01 36.01 40 40
684 TRAP JT 36.01 36.01 40 40
685 TRAP JT 36.01 36.01 40 40
686 TRAP JT 36.01 36.01 40 40
687 TRAP JT 36.01 36.01 40 40
702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 871 PR GY -40
LOAD 4 LOADTYPE Soil TITLE SOIL PRESSURE
ELEMENT LOAD
409 TRAP JT 0.0999977 0.0999977 3.69 3.69
410 TRAP JT 0.0999977 0.0999977 3.69 3.69
411 TRAP JT 0.0999977 0.0999977 3.69 3.69
412 TRAP JT 0.0999977 0.0999977 3.69 3.69
413 TRAP JT 0.0999977 0.0999977 3.69 3.69
414 TRAP JT 0.0999977 0.0999977 3.69 3.69
415 TRAP JT 0.0999977 0.0999977 3.69 3.69
416 TRAP JT 0.0999977 0.0999977 3.69 3.69
417 TRAP JT 0.0999977 0.0999977 3.69 3.69
418 TRAP JT 3.69 3.69 7.28 7.28
419 TRAP JT 3.69 3.69 7.28 7.28
420 TRAP JT 3.69 3.69 7.28 7.28

```
421 TRAP JT 3.69 3.69 7.28 7.28
422 TRAP JT 3.69 3.69 7.28 7.28
423 TRAP JT 3.69 3.69 7.28 7.28
424 TRAP JT 3.69 3.69 7.28 7.28
425 TRAP JT 3.69 3.69 7.28 7.28
426 TRAP JT 3.69 3.69 7.28 7.28
427 TRAP JT 3.69 3.69 7.28 7.28
428 TRAP JT 7.28 7.28 10.87 10.87
429 TRAP JT 7.28 7.28 10.87 10.87
430 TRAP JT 7.28 7.28 10.87 10.87
431 TRAP JT 7.28 7.28 10.87 10.87
432 TRAP JT 7.28 7.28 10.87 10.87
433 TRAP JT 7.28 7.28 10.87 10.87
434 TRAP JT 7.28 7.28 10.87 10.87
435 TRAP JT 7.28 7.28 10.87 10.87
436 TRAP JT 7.28 7.28 10.87 10.87
437 TRAP JT 7.28 7.28 10.87 10.87
438 TRAP JT 10.87 10.87 14.46 14.46
439 TRAP JT 10.87 10.87 14.46 14.46
440 TRAP JT 10.87 10.87 14.46 14.46
441 TRAP JT 10.87 10.87 14.46 14.46
442 TRAP JT 10.87 10.87 14.46 14.46
443 TRAP JT 10.87 10.87 14.46 14.46
444 TRAP JT 10.87 10.87 14.46 14.46
445 TRAP JT 10.87 10.87 14.46 14.46
446 TRAP JT 10.87 10.87 14.46 14.46
447 TRAP JT 10.87 10.87 14.46 14.46
448 TRAP JT 14.46 14.46 18.05 18.05
449 TRAP JT 14.46 14.46 18.05 18.05
450 TRAP JT 14.46 14.46 18.05 18.05
451 TRAP JT 14.46 14.46 18.05 18.05
452 TRAP JT 14.46 14.46 18.05 18.05
453 TRAP JT 14.46 14.46 18.05 18.05
454 TRAP JT 14.46 14.46 18.05 18.05
455 TRAP JT 14.46 14.46 18.05 18.05
456 TRAP JT 14.46 14.46 18.05 18.05
457 TRAP JT 14.46 14.46 18.05 18.05
458 TRAP JT 18.05 18.05 21.64 21.64
459 TRAP JT 18.05 18.05 21.64 21.64
460 TRAP JT 18.05 18.05 21.64 21.64
461 TRAP JT 18.05 18.05 21.64 21.64
462 TRAP JT 18.05 18.05 21.64 21.64
463 TRAP JT 18.05 18.05 21.64 21.64
464 TRAP JT 18.05 18.05 21.64 21.64
465 TRAP JT 18.05 18.05 21.64 21.64
466 TRAP JT 18.05 18.05 21.64 21.64
467 TRAP JT 18.05 18.05 21.64 21.64
468 TRAP JT 21.64 21.64 25.23 25.23
469 TRAP JT 21.64 21.64 25.23 25.23
470 TRAP JT 21.64 21.64 25.23 25.23
471 TRAP JT 21.64 21.64 25.23 25.23
472 TRAP JT 21.64 21.64 25.23 25.23
473 TRAP JT 21.64 21.64 25.23 25.23
474 TRAP JT 21.64 21.64 25.23 25.23
475 TRAP JT 21.64 21.64 25.23 25.23
476 TRAP JT 21.64 21.64 25.23 25.23
477 TRAP JT 21.64 21.64 25.23 25.23
478 TRAP JT 25.23 25.23 28.82 28.82
479 TRAP JT 25.23 25.23 28.82 28.82
480 TRAP JT 25.23 25.23 28.82 28.82
481 TRAP JT 25.23 25.23 28.82 28.82
482 TRAP JT 25.23 25.23 28.82 28.82
483 TRAP JT 25.23 25.23 28.82 28.82
484 TRAP JT 25.23 25.23 28.82 28.82
485 TRAP JT 25.23 25.23 28.82 28.82
486 TRAP JT 25.23 25.23 28.82 28.82
487 TRAP JT 25.23 25.23 28.82 28.82
488 TRAP JT 28.82 28.82 32.41 32.41
489 TRAP JT 28.82 28.82 32.41 32.41
490 TRAP JT 28.82 28.82 32.41 32.41
491 TRAP JT 28.82 28.82 32.41 32.41
492 TRAP JT 28.82 28.82 32.41 32.41
493 TRAP JT 28.82 28.82 32.41 32.41
494 TRAP JT 28.82 28.82 32.41 32.41
495 TRAP JT 28.82 28.82 32.41 32.41
496 TRAP JT 28.82 28.82 32.41 32.41
497 TRAP JT 28.82 28.82 32.41 32.41
498 TRAP JT 32.41 32.41 36 36
499 TRAP JT 32.41 32.41 36 36
500 TRAP JT 32.41 32.41 36 36
501 TRAP JT 32.41 32.41 36 36
502 TRAP JT 32.41 32.41 36 36
503 TRAP JT 32.41 32.41 36 36
504 TRAP JT 32.41 32.41 36 36
```

```
505 TRAP JT 32.41 32.41 36 36
506 TRAP JT 32.41 32.41 36 36
507 TRAP JT 32.41 32.41 36 36
408 TRAP JT 0.0999977 0.0999977 3.69 3.69
308 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
309 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
310 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
311 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
312 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
313 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
314 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
315 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
316 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
317 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
318 TRAP JT -3.69 -3.69 -7.28 -7.28
319 TRAP JT -3.69 -3.69 -7.28 -7.28
320 TRAP JT -3.69 -3.69 -7.28 -7.28
321 TRAP JT -3.69 -3.69 -7.28 -7.28
322 TRAP JT -3.69 -3.69 -7.28 -7.28
323 TRAP JT -3.69 -3.69 -7.28 -7.28
324 TRAP JT -3.69 -3.69 -7.28 -7.28
325 TRAP JT -3.69 -3.69 -7.28 -7.28
326 TRAP JT -3.69 -3.69 -7.28 -7.28
327 TRAP JT -3.69 -3.69 -7.28 -7.28
328 TRAP JT -7.28 -7.28 -10.87 -10.87
329 TRAP JT -7.28 -7.28 -10.87 -10.87
330 TRAP JT -7.28 -7.28 -10.87 -10.87
331 TRAP JT -7.28 -7.28 -10.87 -10.87
332 TRAP JT -7.28 -7.28 -10.87 -10.87
333 TRAP JT -7.28 -7.28 -10.87 -10.87
334 TRAP JT -7.28 -7.28 -10.87 -10.87
335 TRAP JT -7.28 -7.28 -10.87 -10.87
336 TRAP JT -7.28 -7.28 -10.87 -10.87
337 TRAP JT -7.28 -7.28 -10.87 -10.87
338 TRAP JT -10.87 -10.87 -14.46 -14.46
339 TRAP JT -10.87 -10.87 -14.46 -14.46
340 TRAP JT -10.87 -10.87 -14.46 -14.46
341 TRAP JT -10.87 -10.87 -14.46 -14.46
342 TRAP JT -10.87 -10.87 -14.46 -14.46
343 TRAP JT -10.87 -10.87 -14.46 -14.46
344 TRAP JT -10.87 -10.87 -14.46 -14.46
345 TRAP JT -10.87 -10.87 -14.46 -14.46
346 TRAP JT -10.87 -10.87 -14.46 -14.46
347 TRAP JT -10.87 -10.87 -14.46 -14.46
348 TRAP JT -14.46 -14.46 -18.05 -18.05
349 TRAP JT -14.46 -14.46 -18.05 -18.05
350 TRAP JT -14.46 -14.46 -18.05 -18.05
351 TRAP JT -14.46 -14.46 -18.05 -18.05
352 TRAP JT -14.46 -14.46 -18.05 -18.05
353 TRAP JT -14.46 -14.46 -18.05 -18.05
354 TRAP JT -14.46 -14.46 -18.05 -18.05
355 TRAP JT -14.46 -14.46 -18.05 -18.05
356 TRAP JT -14.46 -14.46 -18.05 -18.05
357 TRAP JT -14.46 -14.46 -18.05 -18.05
358 TRAP JT -18.05 -18.05 -21.64 -21.64
359 TRAP JT -18.05 -18.05 -21.64 -21.64
360 TRAP JT -18.05 -18.05 -21.64 -21.64
361 TRAP JT -18.05 -18.05 -21.64 -21.64
362 TRAP JT -18.05 -18.05 -21.64 -21.64
363 TRAP JT -18.05 -18.05 -21.64 -21.64
364 TRAP JT -18.05 -18.05 -21.64 -21.64
365 TRAP JT -18.05 -18.05 -21.64 -21.64
366 TRAP JT -18.05 -18.05 -21.64 -21.64
367 TRAP JT -18.05 -18.05 -21.64 -21.64
368 TRAP JT -21.64 -21.64 -25.23 -25.23
369 TRAP JT -21.64 -21.64 -25.23 -25.23
370 TRAP JT -21.64 -21.64 -25.23 -25.23
371 TRAP JT -21.64 -21.64 -25.23 -25.23
372 TRAP JT -21.64 -21.64 -25.23 -25.23
373 TRAP JT -21.64 -21.64 -25.23 -25.23
374 TRAP JT -21.64 -21.64 -25.23 -25.23
375 TRAP JT -21.64 -21.64 -25.23 -25.23
376 TRAP JT -21.64 -21.64 -25.23 -25.23
377 TRAP JT -21.64 -21.64 -25.23 -25.23
378 TRAP JT -25.23 -25.23 -28.82 -28.82
379 TRAP JT -25.23 -25.23 -28.82 -28.82
380 TRAP JT -25.23 -25.23 -28.82 -28.82
381 TRAP JT -25.23 -25.23 -28.82 -28.82
382 TRAP JT -25.23 -25.23 -28.82 -28.82
383 TRAP JT -25.23 -25.23 -28.82 -28.82
384 TRAP JT -25.23 -25.23 -28.82 -28.82
385 TRAP JT -25.23 -25.23 -28.82 -28.82
386 TRAP JT -25.23 -25.23 -28.82 -28.82
387 TRAP JT -25.23 -25.23 -28.82 -28.82
```

```
388 TRAP JT -28.82 -28.82 -32.41 -32.41
389 TRAP JT -28.82 -28.82 -32.41 -32.41
390 TRAP JT -28.82 -28.82 -32.41 -32.41
391 TRAP JT -28.82 -28.82 -32.41 -32.41
392 TRAP JT -28.82 -28.82 -32.41 -32.41
393 TRAP JT -28.82 -28.82 -32.41 -32.41
394 TRAP JT -28.82 -28.82 -32.41 -32.41
395 TRAP JT -28.82 -28.82 -32.41 -32.41
396 TRAP JT -28.82 -28.82 -32.41 -32.41
397 TRAP JT -28.82 -28.82 -32.41 -32.41
398 TRAP JT -32.41 -32.41 -36 -36
399 TRAP JT -32.41 -32.41 -36 -36
400 TRAP JT -32.41 -32.41 -36 -36
401 TRAP JT -32.41 -32.41 -36 -36
402 TRAP JT -32.41 -32.41 -36 -36
403 TRAP JT -32.41 -32.41 -36 -36
404 TRAP JT -32.41 -32.41 -36 -36
405 TRAP JT -32.41 -32.41 -36 -36
406 TRAP JT -32.41 -32.41 -36 -36
407 TRAP JT -32.41 -32.41 -36 -36
872 TO 881 TRAP JT 0.0999977 0.0999977 36 36
882 TO 891 TRAP JT 0.0999977 0.0999977 36 36
588 TRAP JT 0.0999977 0.0999977 3.69 3.69
589 TRAP JT 0.0999977 0.0999977 3.69 3.69
590 TRAP JT 0.0999977 0.0999977 3.69 3.69
591 TRAP JT 0.0999977 0.0999977 3.69 3.69
592 TRAP JT 0.0999977 0.0999977 3.69 3.69
593 TRAP JT 0.0999977 0.0999977 3.69 3.69
594 TRAP JT 0.0999977 0.0999977 3.69 3.69
595 TRAP JT 0.0999977 0.0999977 3.69 3.69
596 TRAP JT 0.0999977 0.0999977 3.69 3.69
597 TRAP JT 0.0999977 0.0999977 3.69 3.69
598 TRAP JT 3.69 3.69 7.28 7.28
599 TRAP JT 3.69 3.69 7.28 7.28
600 TRAP JT 3.69 3.69 7.28 7.28
601 TRAP JT 3.69 3.69 7.28 7.28
602 TRAP JT 3.69 3.69 7.28 7.28
603 TRAP JT 3.69 3.69 7.28 7.28
604 TRAP JT 3.69 3.69 7.28 7.28
605 TRAP JT 3.69 3.69 7.28 7.28
606 TRAP JT 3.69 3.69 7.28 7.28
607 TRAP JT 3.69 3.69 7.28 7.28
608 TRAP JT 7.28 7.28 10.87 10.87
609 TRAP JT 7.28 7.28 10.87 10.87
610 TRAP JT 7.28 7.28 10.87 10.87
611 TRAP JT 7.28 7.28 10.87 10.87
612 TRAP JT 7.28 7.28 10.87 10.87
613 TRAP JT 7.28 7.28 10.87 10.87
614 TRAP JT 7.28 7.28 10.87 10.87
615 TRAP JT 7.28 7.28 10.87 10.87
616 TRAP JT 7.28 7.28 10.87 10.87
617 TRAP JT 7.28 7.28 10.87 10.87
618 TRAP JT 10.87 10.87 14.46 14.46
619 TRAP JT 10.87 10.87 14.46 14.46
620 TRAP JT 10.87 10.87 14.46 14.46
621 TRAP JT 10.87 10.87 14.46 14.46
622 TRAP JT 10.87 10.87 14.46 14.46
623 TRAP JT 10.87 10.87 14.46 14.46
624 TRAP JT 10.87 10.87 14.46 14.46
625 TRAP JT 10.87 10.87 14.46 14.46
626 TRAP JT 10.87 10.87 14.46 14.46
627 TRAP JT 10.87 10.87 14.46 14.46
628 TRAP JT 14.46 14.46 18.05 18.05
629 TRAP JT 14.46 14.46 18.05 18.05
630 TRAP JT 14.46 14.46 18.05 18.05
631 TRAP JT 14.46 14.46 18.05 18.05
632 TRAP JT 14.46 14.46 18.05 18.05
633 TRAP JT 14.46 14.46 18.05 18.05
634 TRAP JT 14.46 14.46 18.05 18.05
635 TRAP JT 14.46 14.46 18.05 18.05
636 TRAP JT 14.46 14.46 18.05 18.05
637 TRAP JT 14.46 14.46 18.05 18.05
638 TRAP JT 18.05 18.05 21.64 21.64
639 TRAP JT 18.05 18.05 21.64 21.64
640 TRAP JT 18.05 18.05 21.64 21.64
641 TRAP JT 18.05 18.05 21.64 21.64
642 TRAP JT 18.05 18.05 21.64 21.64
643 TRAP JT 18.05 18.05 21.64 21.64
644 TRAP JT 18.05 18.05 21.64 21.64
645 TRAP JT 18.05 18.05 21.64 21.64
646 TRAP JT 18.05 18.05 21.64 21.64
647 TRAP JT 18.05 18.05 21.64 21.64
648 TRAP JT 21.64 21.64 25.23 25.23
649 TRAP JT 21.64 21.64 25.23 25.23
```

650 TRAP JT 21.64 21.64 25.23 25.23
651 TRAP JT 21.64 21.64 25.23 25.23
652 TRAP JT 21.64 21.64 25.23 25.23
653 TRAP JT 21.64 21.64 25.23 25.23
654 TRAP JT 21.64 21.64 25.23 25.23
655 TRAP JT 21.64 21.64 25.23 25.23
656 TRAP JT 21.64 21.64 25.23 25.23
657 TRAP JT 21.64 21.64 25.23 25.23
658 TRAP JT 25.23 25.23 28.82 28.82
659 TRAP JT 25.23 25.23 28.82 28.82
660 TRAP JT 25.23 25.23 28.82 28.82
661 TRAP JT 25.23 25.23 28.82 28.82
662 TRAP JT 25.23 25.23 28.82 28.82
663 TRAP JT 25.23 25.23 28.82 28.82
664 TRAP JT 25.23 25.23 28.82 28.82
665 TRAP JT 25.23 25.23 28.82 28.82
666 TRAP JT 25.23 25.23 28.82 28.82
667 TRAP JT 25.23 25.23 28.82 28.82
668 TRAP JT 28.82 28.82 32.41 32.41
669 TRAP JT 28.82 28.82 32.41 32.41
670 TRAP JT 28.82 28.82 32.41 32.41
671 TRAP JT 28.82 28.82 32.41 32.41
672 TRAP JT 28.82 28.82 32.41 32.41
673 TRAP JT 28.82 28.82 32.41 32.41
674 TRAP JT 28.82 28.82 32.41 32.41
675 TRAP JT 28.82 28.82 32.41 32.41
676 TRAP JT 28.82 28.82 32.41 32.41
677 TRAP JT 28.82 28.82 32.41 32.41
678 TRAP JT 32.41 32.41 36 36
679 TRAP JT 32.41 32.41 36 36
680 TRAP JT 32.41 32.41 36 36
681 TRAP JT 32.41 32.41 36 36
682 TRAP JT 32.41 32.41 36 36
683 TRAP JT 32.41 32.41 36 36
684 TRAP JT 32.41 32.41 36 36
685 TRAP JT 32.41 32.41 36 36
686 TRAP JT 32.41 32.41 36 36
687 TRAP JT 32.41 32.41 36 36
54 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
55 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
56 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
57 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
58 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
59 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
60 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
61 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
62 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
63 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
64 TRAP JT -3.69 -3.69 -7.28 -7.28
65 TRAP JT -3.69 -3.69 -7.28 -7.28
66 TRAP JT -3.69 -3.69 -7.28 -7.28
67 TRAP JT -3.69 -3.69 -7.28 -7.28
68 TRAP JT -3.69 -3.69 -7.28 -7.28
69 TRAP JT -3.69 -3.69 -7.28 -7.28
70 TRAP JT -3.69 -3.69 -7.28 -7.28
71 TRAP JT -3.69 -3.69 -7.28 -7.28
72 TRAP JT -3.69 -3.69 -7.28 -7.28
73 TRAP JT -3.69 -3.69 -7.28 -7.28
74 TRAP JT -7.28 -7.28 -10.87 -10.87
75 TRAP JT -7.28 -7.28 -10.87 -10.87
76 TRAP JT -7.28 -7.28 -10.87 -10.87
77 TRAP JT -7.28 -7.28 -10.87 -10.87
78 TRAP JT -7.28 -7.28 -10.87 -10.87
79 TRAP JT -7.28 -7.28 -10.87 -10.87
80 TRAP JT -7.28 -7.28 -10.87 -10.87
81 TRAP JT -7.28 -7.28 -10.87 -10.87
82 TRAP JT -7.28 -7.28 -10.87 -10.87
83 TRAP JT -7.28 -7.28 -10.87 -10.87
84 TRAP JT -10.87 -10.87 -14.46 -14.46
85 TRAP JT -10.87 -10.87 -14.46 -14.46
86 TRAP JT -10.87 -10.87 -14.46 -14.46
87 TRAP JT -10.87 -10.87 -14.46 -14.46
88 TRAP JT -10.87 -10.87 -14.46 -14.46
89 TRAP JT -10.87 -10.87 -14.46 -14.46
90 TRAP JT -10.87 -10.87 -14.46 -14.46
91 TRAP JT -10.87 -10.87 -14.46 -14.46
92 TRAP JT -10.87 -10.87 -14.46 -14.46
93 TRAP JT -10.87 -10.87 -14.46 -14.46
94 TRAP JT -14.46 -14.46 -18.05 -18.05
95 TRAP JT -14.46 -14.46 -18.05 -18.05
96 TRAP JT -14.46 -14.46 -18.05 -18.05
97 TRAP JT -14.46 -14.46 -18.05 -18.05
98 TRAP JT -14.46 -14.46 -18.05 -18.05
99 TRAP JT -14.46 -14.46 -18.05 -18.05

```
100 TRAP JT -14.46 -14.46 -18.05 -18.05
101 TRAP JT -14.46 -14.46 -18.05 -18.05
102 TRAP JT -14.46 -14.46 -18.05 -18.05
103 TRAP JT -14.46 -14.46 -18.05 -18.05
104 TRAP JT -18.05 -18.05 -21.64 -21.64
105 TRAP JT -18.05 -18.05 -21.64 -21.64
106 TRAP JT -18.05 -18.05 -21.64 -21.64
107 TRAP JT -18.05 -18.05 -21.64 -21.64
108 TRAP JT -18.05 -18.05 -21.64 -21.64
109 TRAP JT -18.05 -18.05 -21.64 -21.64
110 TRAP JT -18.05 -18.05 -21.64 -21.64
111 TRAP JT -18.05 -18.05 -21.64 -21.64
112 TRAP JT -18.05 -18.05 -21.64 -21.64
113 TRAP JT -18.05 -18.05 -21.64 -21.64
114 TRAP JT -21.64 -21.64 -25.23 -25.23
115 TRAP JT -21.64 -21.64 -25.23 -25.23
116 TRAP JT -21.64 -21.64 -25.23 -25.23
117 TRAP JT -21.64 -21.64 -25.23 -25.23
118 TRAP JT -21.64 -21.64 -25.23 -25.23
119 TRAP JT -21.64 -21.64 -25.23 -25.23
120 TRAP JT -21.64 -21.64 -25.23 -25.23
121 TRAP JT -21.64 -21.64 -25.23 -25.23
122 TRAP JT -21.64 -21.64 -25.23 -25.23
123 TRAP JT -21.64 -21.64 -25.23 -25.23
124 TRAP JT -25.23 -25.23 -28.82 -28.82
125 TRAP JT -25.23 -25.23 -28.82 -28.82
126 TRAP JT -25.23 -25.23 -28.82 -28.82
127 TRAP JT -25.23 -25.23 -28.82 -28.82
128 TRAP JT -25.23 -25.23 -28.82 -28.82
129 TRAP JT -25.23 -25.23 -28.82 -28.82
130 TRAP JT -25.23 -25.23 -28.82 -28.82
131 TRAP JT -25.23 -25.23 -28.82 -28.82
132 TRAP JT -25.23 -25.23 -28.82 -28.82
133 TRAP JT -25.23 -25.23 -28.82 -28.82
134 TRAP JT -28.82 -28.82 -32.41 -32.41
135 TRAP JT -28.82 -28.82 -32.41 -32.41
136 TRAP JT -28.82 -28.82 -32.41 -32.41
137 TRAP JT -28.82 -28.82 -32.41 -32.41
138 TRAP JT -28.82 -28.82 -32.41 -32.41
139 TRAP JT -28.82 -28.82 -32.41 -32.41
140 TRAP JT -28.82 -28.82 -32.41 -32.41
141 TRAP JT -28.82 -28.82 -32.41 -32.41
142 TRAP JT -28.82 -28.82 -32.41 -32.41
143 TRAP JT -28.82 -28.82 -32.41 -32.41
144 TRAP JT -32.41 -32.41 -36 -36
145 TRAP JT -32.41 -32.41 -36 -36
146 TRAP JT -32.41 -32.41 -36 -36
147 TRAP JT -32.41 -32.41 -36 -36
148 TRAP JT -32.41 -32.41 -36 -36
149 TRAP JT -32.41 -32.41 -36 -36
150 TRAP JT -32.41 -32.41 -36 -36
151 TRAP JT -32.41 -32.41 -36 -36
152 TRAP JT -32.41 -32.41 -36 -36
153 TRAP JT -32.41 -32.41 -36 -36
168 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
169 TRAP JT -3.69 -3.69 -7.28 -7.28
170 TRAP JT -7.28 -7.28 -10.87 -10.87
171 TRAP JT -10.87 -10.87 -14.46 -14.46
172 TRAP JT -14.46 -14.46 -18.05 -18.05
173 TRAP JT -18.05 -18.05 -21.64 -21.64
174 TRAP JT -21.64 -21.64 -25.23 -25.23
175 TRAP JT -25.23 -25.23 -28.82 -28.82
176 TRAP JT -28.82 -28.82 -32.41 -32.41
177 TRAP JT -32.41 -32.41 -36 -36
178 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
179 TRAP JT -3.69 -3.69 -7.28 -7.28
180 TRAP JT -7.28 -7.28 -10.87 -10.87
181 TRAP JT -10.87 -10.87 -14.46 -14.46
182 TRAP JT -14.46 -14.46 -18.05 -18.05
183 TRAP JT -18.05 -18.05 -21.64 -21.64
184 TRAP JT -21.64 -21.64 -25.23 -25.23
185 TRAP JT -25.23 -25.23 -28.82 -28.82
186 TRAP JT -28.82 -28.82 -32.41 -32.41
187 TRAP JT -32.41 -32.41 -36 -36
408 TO 507 588 TO 687 872 TO 891 PR -5
54 TO 153 168 TO 187 308 TO 407 PR 5
******FACTORED LOAD COMBINATIONS*****
LOAD COMB 101 1.4*(D+F)
1 1.4 3 1.4
LOAD COMB 102 1.2*(D+F)+1.6*(L+H)
1 1.2 3 1.2 2 1.6 4 1.6
LOAD COMB 103 1.4*(D+H)
1 1.4 4 1.4
******UNFACTORED LOAD COMBINATIONS*****
```

```
LOAD COMB 201 1.0*(D+F)
1 1.0 3 1.0
LOAD COMB 202 1.0*(D+F)+1.0*(L+H)
1 1.0 3 1.0 2 1.0 4 1.0
LOAD COMB 203 1.0*(D+H)
1 1.0 4 1.0
PERFORM ANALYSIS
LOAD LIST 101 TO 103
START CONCRETE DESIGN
CODE ACI
FC 35000 ALL
CLB 0.05 ALL
CLS 0.05 ALL
CLT 0.05 ALL
MINSEC 10 ALL
MAXMAIN 20 ALL
FYMAIN 420000 ALL
DESIGN ELEMENT 13 16 34 TO 153 164 TO 507 528 TO 687 702 TO 709 712 TO 719 -
724 TO 771 782 TO 831 842 TO 891
END CONCRETE DESIGN
FINISH
```

ATTACHMENT 2 STAAD OUTPUT FOR SUMP TANK

PROPRIETARY & CONFIDENTIAL

The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.
This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries6           *
*           Version  20.07.11.70                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    OCT  8, 2020                *
*           Time=    11:13:27                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
    1. STAAD SPACE
INPUT FILE: D:\MAADEN\Potable Water Treatment Plant\Sump Tank\STAAD\SUMP TANK.STD
    2. START JOB INFORMATION
    3. ENGINEER DATE 01-OCT-20
    4. ENGINEER NAME BJB
    5. CHECKER NAME SJM
    6. END JOB INFORMATION
    7. INPUT WIDTH 79
    8. UNIT METER KN
    9. JOINT COORDINATES
   10. 3 0.2 0.4 -0.2; 4 0.4 0.4 -0.2; 5 0.2 4.4 -0.2; 6 0.4 4.4 -0.2; 7 0.2 5.1 -0.2
   11. 8 0.4 5.1 -0.2; 11 5.9 0.4 -0.2; 12 6.1 0.4 -0.2; 13 5.9 4.4 -0.2
   12. 14 6.1 4.4 -0.2; 15 5.9 5.1 -0.2; 16 6.1 5.1 -0.2; 19 0.2 0.4 5.7
   13. 20 0.4 0.4 5.7; 21 0.2 4.4 5.7; 22 0.4 4.4 5.7; 23 0.2 5.1 5.7; 24 0.4 5.1 5.7
   14. 27 5.9 0.4 5.7; 28 6.1 0.4 5.7; 29 5.9 4.4 5.7; 30 6.1 4.4 5.7; 31 5.9 5.1 5.7
   15. 32 6.1 5.1 5.7; 33 0.95 5.1 5.7; 34 0.95 4.75 5.7; 35 0.4 4.75 5.7
   16. 36 1.5 5.1 5.7; 37 1.5 4.75 5.7; 38 2.05 5.1 5.7; 39 2.05 4.75 5.7
   17. 40 2.6 5.1 5.7; 41 2.6 4.75 5.7; 42 3.15 5.1 5.7; 43 3.15 4.75 5.7
   18. 44 3.7 5.1 5.7; 45 3.7 4.75 5.7; 46 4.25 5.1 5.7; 47 4.25 4.75 5.7
   19. 48 4.8 5.1 5.7; 49 4.8 4.75 5.7; 50 5.35 5.1 5.7; 51 5.35 4.75 5.7
   20. 52 5.9 4.75 5.7; 53 0.95 4.4 5.7; 54 1.5 4.4 5.7; 55 2.05 4.4 5.7
   21. 56 2.6 4.4 5.7; 57 3.15 4.4 5.7; 58 3.7 4.4 5.7; 59 4.25 4.4 5.7
   22. 60 4.8 4.4 5.7; 61 5.35 4.4 5.7; 62 0.95 4 5.7; 63 0.4 4 5.7; 64 1.5 4 5.7
   23. 65 2.05 4 5.7; 66 2.6 4 5.7; 67 3.15 4 5.7; 68 3.7 4 5.7; 69 4.25 4 5.7
   24. 70 4.8 4 5.7; 71 5.35 4 5.7; 72 5.9 4 5.7; 73 0.95 3.6 5.7; 74 0.4 3.6 5.7
   25. 75 1.5 3.6 5.7; 76 2.05 3.6 5.7; 77 2.6 3.6 5.7; 78 3.15 3.6 5.7
   26. 79 3.7 3.6 5.7; 80 4.25 3.6 5.7; 81 4.8 3.6 5.7; 82 5.35 3.6 5.7
   27. 83 5.9 3.6 5.7; 84 0.95 3.2 5.7; 85 0.4 3.2 5.7; 86 1.5 3.2 5.7
   28. 87 2.05 3.2 5.7; 88 2.6 3.2 5.7; 89 3.15 3.2 5.7; 90 3.7 3.2 5.7
   29. 91 4.25 3.2 5.7; 92 4.8 3.2 5.7; 93 5.35 3.2 5.7; 94 5.9 3.2 5.7
   30. 95 0.95 2.8 5.7; 96 0.4 2.8 5.7; 97 1.5 2.8 5.7; 98 2.05 2.8 5.7
   31. 99 2.6 2.8 5.7; 100 3.15 2.8 5.7; 101 3.7 2.8 5.7; 102 4.25 2.8 5.7
   32. 103 4.8 2.8 5.7; 104 5.35 2.8 5.7; 105 5.9 2.8 5.7; 106 0.95 2.4 5.7
   33. 107 0.4 2.4 5.7; 108 1.5 2.4 5.7; 109 2.05 2.4 5.7; 110 2.6 2.4 5.7
   34. 111 3.15 2.4 5.7; 112 3.7 2.4 5.7; 113 4.25 2.4 5.7; 114 4.8 2.4 5.7
   35. 115 5.35 2.4 5.7; 116 5.9 2.4 5.7; 117 0.95 2 5.7; 118 0.4 2 5.7
   36. 119 1.5 2 5.7; 120 2.05 2 5.7; 121 2.6 2 5.7; 122 3.15 2 5.7; 123 3.7 2 5.7
   37. 124 4.25 2 5.7; 125 4.8 2 5.7; 126 5.35 2 5.7; 127 5.9 2 5.7; 128 0.95 1.6 5.7
   38. 129 0.4 1.6 5.7; 130 1.5 1.6 5.7; 131 2.05 1.6 5.7; 132 2.6 1.6 5.7
```

39. 133 3.15 1.6 5.7; 134 3.7 1.6 5.7; 135 4.25 1.6 5.7; 136 4.8 1.6 5.7
40. 137 5.35 1.6 5.7; 138 5.9 1.6 5.7; 139 0.95 1.2 5.7; 140 0.4 1.2 5.7
41. 141 1.5 1.2 5.7; 142 2.05 1.2 5.7; 143 2.6 1.2 5.7; 144 3.15 1.2 5.7
42. 145 3.7 1.2 5.7; 146 4.25 1.2 5.7; 147 4.8 1.2 5.7; 148 5.35 1.2 5.7
43. 149 5.9 1.2 5.7; 150 0.95 0.8 5.7; 151 0.4 0.8 5.7; 152 1.5 0.8 5.7
44. 153 2.05 0.8 5.7; 154 2.6 0.8 5.7; 155 3.15 0.8 5.7; 156 3.7 0.8 5.7
45. 157 4.25 0.8 5.7; 158 4.8 0.8 5.7; 159 5.35 0.8 5.7; 160 5.9 0.8 5.7
46. 170 0.95 0.4 5.7; 171 1.5 0.4 5.7; 172 2.05 0.4 5.7; 173 2.6 0.4 5.7
47. 174 3.15 0.4 5.7; 175 3.7 0.4 5.7; 176 4.25 0.4 5.7; 177 4.8 0.4 5.7
48. 178 5.35 0.4 5.7; 179 0.2 4.75 5.7; 180 6.1 4.75 5.7; 181 6.1 4 5.7
49. 182 6.1 3.6 5.7; 183 6.1 3.2 5.7; 184 6.1 2.8 5.7; 185 6.1 2.4 5.7
50. 186 6.1 2 5.7; 187 6.1 1.6 5.7; 188 6.1 1.2 5.7; 189 6.1 0.8 5.7
51. 190 0.2 4 5.7; 191 0.2 3.6 5.7; 192 0.2 3.2 5.7; 193 0.2 2.8 5.7
52. 194 0.2 2.4 5.7; 195 0.2 2 5.7; 196 0.2 1.6 5.7; 197 0.2 1.2 5.7
53. 198 0.2 0.8 5.7; 199 0.2 5.1 4.95; 200 0.4 5.1 4.95; 201 0.2 5.1 4.4
54. 202 0.4 5.1 4.4; 203 0.2 5.1 3.85; 204 0.4 5.1 3.85; 205 0.2 5.1 3.3
55. 206 0.4 5.1 3.3; 207 0.2 5.1 2.75; 208 0.4 5.1 2.75; 209 0.2 5.1 2.2
56. 210 0.4 5.1 2.2; 211 0.2 5.1 1.65; 212 0.4 5.1 1.65; 213 0.2 5.1 1.1
57. 214 0.4 5.1 1.1; 215 0.2 5.1 0.55; 216 0.4 5.1 0.55; 217 5.9 5.1 4.95
58. 218 6.1 5.1 4.95; 219 5.9 5.1 4.4; 220 6.1 5.1 4.4; 221 5.9 5.1 3.85
59. 222 6.1 5.1 3.85; 223 5.9 5.1 3.3; 224 6.1 5.1 3.3; 225 5.9 5.1 2.75
60. 226 6.1 5.1 2.75; 227 5.9 5.1 2.2; 228 6.1 5.1 2.2; 229 5.9 5.1 1.65
61. 230 6.1 5.1 1.65; 231 5.9 5.1 1.1; 232 6.1 5.1 1.1; 233 5.9 5.1 0.55
62. 234 6.1 5.1 0.55; 235 0.95 5.1 4.95; 236 0.95 5.1 4.4; 237 0.95 5.1 3.85
63. 238 0.95 5.1 3.3; 239 0.95 5.1 2.75; 240 0.95 5.1 2.2; 241 0.95 5.1 1.65
64. 242 0.95 5.1 1.1; 243 0.95 5.1 0.55; 244 0.95 5.1 -0.2; 245 1.5 5.1 4.95
65. 246 1.5 5.1 4.4; 247 1.5 5.1 3.85; 248 1.5 5.1 3.3; 249 1.5 5.1 2.75
66. 250 1.5 5.1 2.2; 251 1.5 5.1 1.65; 252 1.5 5.1 1.1; 253 1.5 5.1 0.55
67. 254 1.5 5.1 -0.2; 255 2.05 5.1 4.95; 256 2.05 5.1 4.4; 257 2.05 5.1 3.85
68. 258 2.05 5.1 3.3; 259 2.05 5.1 2.75; 260 2.05 5.1 2.2; 261 2.05 5.1 1.65
69. 262 2.05 5.1 1.1; 263 2.05 5.1 0.55; 264 2.05 5.1 -0.2; 265 2.6 5.1 4.95
70. 266 2.6 5.1 4.4; 267 2.6 5.1 3.85; 268 2.6 5.1 3.3; 269 2.6 5.1 2.75
71. 270 2.6 5.1 2.2; 271 2.6 5.1 1.65; 272 2.6 5.1 1.1; 273 2.6 5.1 0.55
72. 274 2.6 5.1 -0.2; 275 3.15 5.1 4.95; 276 3.15 5.1 4.4; 277 3.15 5.1 3.85
73. 278 3.15 5.1 3.3; 279 3.15 5.1 2.75; 280 3.15 5.1 2.2; 281 3.15 5.1 1.65
74. 282 3.15 5.1 1.1; 283 3.15 5.1 0.55; 284 3.15 5.1 -0.2; 285 3.7 5.1 4.95
75. 286 3.7 5.1 4.4; 287 3.7 5.1 3.85; 288 3.7 5.1 3.3; 289 3.7 5.1 2.75
76. 290 3.7 5.1 2.2; 291 3.7 5.1 1.65; 292 3.7 5.1 1.1; 293 3.7 5.1 0.55
77. 294 3.7 5.1 -0.2; 295 4.25 5.1 4.95; 296 4.25 5.1 4.4; 297 4.25 5.1 3.85
78. 298 4.25 5.1 3.3; 299 4.25 5.1 2.75; 300 4.25 5.1 2.2; 301 4.25 5.1 1.65
79. 302 4.25 5.1 1.1; 303 4.25 5.1 0.55; 304 4.25 5.1 -0.2; 305 4.8 5.1 4.95
80. 306 4.8 5.1 4.4; 307 4.8 5.1 3.85; 308 4.8 5.1 3.3; 309 4.8 5.1 2.75
81. 310 4.8 5.1 2.2; 311 4.8 5.1 1.65; 312 4.8 5.1 1.1; 313 4.8 5.1 0.55
82. 314 4.8 5.1 -0.2; 315 5.35 5.1 4.95; 316 5.35 5.1 4.4; 317 5.35 5.1 3.85
83. 318 5.35 5.1 3.3; 319 5.35 5.1 2.75; 320 5.35 5.1 2.2; 321 5.35 5.1 1.65
84. 322 5.35 5.1 1.1; 323 5.35 5.1 0.55; 324 5.35 5.1 -0.2; 325 6.1 4.4 4.95
85. 326 6.1 4 4.95; 327 6.1 4.4 4.4; 328 6.1 4 4.4; 329 6.1 4.4 3.85
86. 330 6.1 4 3.85; 331 6.1 4.4 3.3; 332 6.1 4 3.3; 333 6.1 4.4 2.75
87. 334 6.1 4 2.75; 335 6.1 4.4 2.2; 336 6.1 4 2.2; 337 6.1 4.4 1.65
88. 338 6.1 4 1.65; 339 6.1 4.4 1.1; 340 6.1 4 1.1; 341 6.1 4.4 0.55
89. 342 6.1 4 0.55; 343 6.1 4 -0.2; 344 6.1 3.6 4.95; 345 6.1 3.6 4.4
90. 346 6.1 3.6 3.85; 347 6.1 3.6 3.3; 348 6.1 3.6 2.75; 349 6.1 3.6 2.2
91. 350 6.1 3.6 1.65; 351 6.1 3.6 1.1; 352 6.1 3.6 0.55; 353 6.1 3.6 -0.2
92. 354 6.1 3.2 4.95; 355 6.1 3.2 4.4; 356 6.1 3.2 3.85; 357 6.1 3.2 3.3
93. 358 6.1 3.2 2.75; 359 6.1 3.2 2.2; 360 6.1 3.2 1.65; 361 6.1 3.2 1.1
94. 362 6.1 3.2 0.55; 363 6.1 3.2 -0.2; 364 6.1 2.8 4.95; 365 6.1 2.8 4.4

95. 366 6.1 2.8 3.85; 367 6.1 2.8 3.3; 368 6.1 2.8 2.75; 369 6.1 2.8 2.2
96. 370 6.1 2.8 1.65; 371 6.1 2.8 1.1; 372 6.1 2.8 0.55; 373 6.1 2.8 -0.2
97. 374 6.1 2.4 4.95; 375 6.1 2.4 4.4; 376 6.1 2.4 3.85; 377 6.1 2.4 3.3
98. 378 6.1 2.4 2.75; 379 6.1 2.4 2.2; 380 6.1 2.4 1.65; 381 6.1 2.4 1.1
99. 382 6.1 2.4 0.55; 383 6.1 2.4 -0.2; 384 6.1 2 4.95; 385 6.1 2 4.4
100. 386 6.1 2 3.85; 387 6.1 2 3.3; 388 6.1 2 2.75; 389 6.1 2 2.2; 390 6.1 2 1.65
101. 391 6.1 2 1.1; 392 6.1 2 0.55; 393 6.1 2 -0.2; 394 6.1 1.6 4.95
102. 395 6.1 1.6 4.4; 396 6.1 1.6 3.85; 397 6.1 1.6 3.3; 398 6.1 1.6 2.75
103. 399 6.1 1.6 2.2; 400 6.1 1.6 1.65; 401 6.1 1.6 1.1; 402 6.1 1.6 0.55
104. 403 6.1 1.6 -0.2; 404 6.1 1.2 4.95; 405 6.1 1.2 4.4; 406 6.1 1.2 3.85
105. 407 6.1 1.2 3.3; 408 6.1 1.2 2.75; 409 6.1 1.2 2.2; 410 6.1 1.2 1.65
106. 411 6.1 1.2 1.1; 412 6.1 1.2 0.55; 413 6.1 1.2 -0.2; 414 6.1 0.8 4.95
107. 415 6.1 0.8 4.4; 416 6.1 0.8 3.85; 417 6.1 0.8 3.3; 418 6.1 0.8 2.75
108. 419 6.1 0.8 2.2; 420 6.1 0.8 1.65; 421 6.1 0.8 1.1; 422 6.1 0.8 0.55
109. 423 6.1 0.8 -0.2; 433 0.2 4.4 4.95; 434 0.2 4 4.95; 435 0.2 4.4 4.4
110. 436 0.2 4 4.4; 437 0.2 4.4 3.85; 438 0.2 4 3.85; 439 0.2 4.4 3.3
111. 440 0.2 4 3.3; 441 0.2 4.4 2.75; 442 0.2 4 2.75; 443 0.2 4.4 2.2
112. 444 0.2 4 2.2; 445 0.2 4.4 1.65; 446 0.2 4 1.65; 447 0.2 4.4 1.1
113. 448 0.2 4 1.1; 449 0.2 4.4 0.55; 450 0.2 4 0.55; 451 0.2 4 -0.2
114. 452 0.2 3.6 4.95; 453 0.2 3.6 4.4; 454 0.2 3.6 3.85; 455 0.2 3.6 3.3
115. 456 0.2 3.6 2.75; 457 0.2 3.6 2.2; 458 0.2 3.6 1.65; 459 0.2 3.6 1.1
116. 460 0.2 3.6 0.55; 461 0.2 3.6 -0.2; 462 0.2 3.2 4.95; 463 0.2 3.2 4.4
117. 464 0.2 3.2 3.85; 465 0.2 3.2 3.3; 466 0.2 3.2 2.75; 467 0.2 3.2 2.2
118. 468 0.2 3.2 1.65; 469 0.2 3.2 1.1; 470 0.2 3.2 0.55; 471 0.2 3.2 -0.2
119. 472 0.2 2.8 4.95; 473 0.2 2.8 4.4; 474 0.2 2.8 3.85; 475 0.2 2.8 3.3
120. 476 0.2 2.8 2.75; 477 0.2 2.8 2.2; 478 0.2 2.8 1.65; 479 0.2 2.8 1.1
121. 480 0.2 2.8 0.55; 481 0.2 2.8 -0.2; 482 0.2 2.4 4.95; 483 0.2 2.4 4.4
122. 484 0.2 2.4 3.85; 485 0.2 2.4 3.3; 486 0.2 2.4 2.75; 487 0.2 2.4 2.2
123. 488 0.2 2.4 1.65; 489 0.2 2.4 1.1; 490 0.2 2.4 0.55; 491 0.2 2.4 -0.2
124. 492 0.2 2 4.95; 493 0.2 2 4.4; 494 0.2 2 3.85; 495 0.2 2 3.3; 496 0.2 2 2.75
125. 497 0.2 2 2.2; 498 0.2 2 1.65; 499 0.2 2 1.1; 500 0.2 2 0.55; 501 0.2 2 -0.2
126. 502 0.2 1.6 4.95; 503 0.2 1.6 4.4; 504 0.2 1.6 3.85; 505 0.2 1.6 3.3
127. 506 0.2 1.6 2.75; 507 0.2 1.6 2.2; 508 0.2 1.6 1.65; 509 0.2 1.6 1.1
128. 510 0.2 1.6 0.55; 511 0.2 1.6 -0.2; 512 0.2 1.2 4.95; 513 0.2 1.2 4.4
129. 514 0.2 1.2 3.85; 515 0.2 1.2 3.3; 516 0.2 1.2 2.75; 517 0.2 1.2 2.2
130. 518 0.2 1.2 1.65; 519 0.2 1.2 1.1; 520 0.2 1.2 0.55; 521 0.2 1.2 -0.2
131. 522 0.2 0.8 4.95; 523 0.2 0.8 4.4; 524 0.2 0.8 3.85; 525 0.2 0.8 3.3
132. 526 0.2 0.8 2.75; 527 0.2 0.8 2.2; 528 0.2 0.8 1.65; 529 0.2 0.8 1.1
133. 530 0.2 0.8 0.55; 531 0.2 0.8 -0.2; 541 6.1 0.4 4.95; 542 6.1 0.4 4.4
134. 543 6.1 0.4 3.85; 544 6.1 0.4 3.3; 545 6.1 0.4 2.75; 546 6.1 0.4 2.2
135. 547 6.1 0.4 1.65; 548 6.1 0.4 1.1; 549 6.1 0.4 0.55; 550 0.2 0.4 4.95
136. 551 0.2 0.4 4.4; 552 0.2 0.4 3.85; 553 0.2 0.4 3.3; 554 0.2 0.4 2.75
137. 555 0.2 0.4 2.2; 556 0.2 0.4 1.65; 557 0.2 0.4 1.1; 558 0.2 0.4 0.55
138. 559 6.1 4.75 4.95; 560 6.1 4.75 4.4; 561 6.1 4.75 3.85; 562 6.1 4.75 3.3
139. 563 6.1 4.75 2.75; 564 6.1 4.75 2.2; 565 6.1 4.75 1.65; 566 6.1 4.75 1.1
140. 567 6.1 4.75 0.55; 568 6.1 4.75 -0.2; 569 0.2 4.75 4.95; 570 0.2 4.75 4.4
141. 571 0.2 4.75 3.85; 572 0.2 4.75 3.3; 573 0.2 4.75 2.75; 574 0.2 4.75 2.2
142. 575 0.2 4.75 1.65; 576 0.2 4.75 1.1; 577 0.2 4.75 0.55; 578 0.2 4.75 -0.2
143. 579 0.95 4.75 -0.2; 580 0.4 4.75 -0.2; 581 1.5 4.75 -0.2; 582 2.05 4.75 -0.2
144. 583 2.6 4.75 -0.2; 584 3.15 4.75 -0.2; 585 3.7 4.75 -0.2; 586 4.25 4.75 -0.2
145. 587 4.8 4.75 -0.2; 588 5.35 4.75 -0.2; 589 5.9 4.75 -0.2; 590 0.95 4.4 -0.2
146. 591 1.5 4.4 -0.2; 592 2.05 4.4 -0.2; 593 2.6 4.4 -0.2; 594 3.15 4.4 -0.2
147. 595 3.7 4.4 -0.2; 596 4.25 4.4 -0.2; 597 4.8 4.4 -0.2; 598 5.35 4.4 -0.2
148. 599 0.95 4 -0.2; 600 0.4 4 -0.2; 601 1.5 4 -0.2; 602 2.05 4 -0.2
149. 603 2.6 4 -0.2; 604 3.15 4 -0.2; 605 3.7 4 -0.2; 606 4.25 4 -0.2
150. 607 4.8 4 -0.2; 608 5.35 4 -0.2; 609 5.9 4 -0.2; 610 0.95 3.6 -0.2

151. 611 0.4 3.6 -0.2; 612 1.5 3.6 -0.2; 613 2.05 3.6 -0.2; 614 2.6 3.6 -0.2
152. 615 3.15 3.6 -0.2; 616 3.7 3.6 -0.2; 617 4.25 3.6 -0.2; 618 4.8 3.6 -0.2
153. 619 5.35 3.6 -0.2; 620 5.9 3.6 -0.2; 621 0.95 3.2 -0.2; 622 0.4 3.2 -0.2
154. 623 1.5 3.2 -0.2; 624 2.05 3.2 -0.2; 625 2.6 3.2 -0.2; 626 3.15 3.2 -0.2
155. 627 3.7 3.2 -0.2; 628 4.25 3.2 -0.2; 629 4.8 3.2 -0.2; 630 5.35 3.2 -0.2
156. 631 5.9 3.2 -0.2; 632 0.95 2.8 -0.2; 633 0.4 2.8 -0.2; 634 1.5 2.8 -0.2
157. 635 2.05 2.8 -0.2; 636 2.6 2.8 -0.2; 637 3.15 2.8 -0.2; 638 3.7 2.8 -0.2
158. 639 4.25 2.8 -0.2; 640 4.8 2.8 -0.2; 641 5.35 2.8 -0.2; 642 5.9 2.8 -0.2
159. 643 0.95 2.4 -0.2; 644 0.4 2.4 -0.2; 645 1.5 2.4 -0.2; 646 2.05 2.4 -0.2
160. 647 2.6 2.4 -0.2; 648 3.15 2.4 -0.2; 649 3.7 2.4 -0.2; 650 4.25 2.4 -0.2
161. 651 4.8 2.4 -0.2; 652 5.35 2.4 -0.2; 653 5.9 2.4 -0.2; 654 0.95 2 -0.2
162. 655 0.4 2 -0.2; 656 1.5 2 -0.2; 657 2.05 2 -0.2; 658 2.6 2 -0.2
163. 659 3.15 2 -0.2; 660 3.7 2 -0.2; 661 4.25 2 -0.2; 662 4.8 2 -0.2
164. 663 5.35 2 -0.2; 664 5.9 2 -0.2; 665 0.95 1.6 -0.2; 666 0.4 1.6 -0.2
165. 667 1.5 1.6 -0.2; 668 2.05 1.6 -0.2; 669 2.6 1.6 -0.2; 670 3.15 1.6 -0.2
166. 671 3.7 1.6 -0.2; 672 4.25 1.6 -0.2; 673 4.8 1.6 -0.2; 674 5.35 1.6 -0.2
167. 675 5.9 1.6 -0.2; 676 0.95 1.2 -0.2; 677 0.4 1.2 -0.2; 678 1.5 1.2 -0.2
168. 679 2.05 1.2 -0.2; 680 2.6 1.2 -0.2; 681 3.15 1.2 -0.2; 682 3.7 1.2 -0.2
169. 683 4.25 1.2 -0.2; 684 4.8 1.2 -0.2; 685 5.35 1.2 -0.2; 686 5.9 1.2 -0.2
170. 687 0.95 0.8 -0.2; 688 0.4 0.8 -0.2; 689 1.5 0.8 -0.2; 690 2.05 0.8 -0.2
171. 691 2.6 0.8 -0.2; 692 3.15 0.8 -0.2; 693 3.7 0.8 -0.2; 694 4.25 0.8 -0.2
172. 695 4.8 0.8 -0.2; 696 5.35 0.8 -0.2; 697 5.9 0.8 -0.2; 707 0.95 0.4 -0.2
173. 708 1.5 0.4 -0.2; 709 2.05 0.4 -0.2; 710 2.6 0.4 -0.2; 711 3.15 0.4 -0.2
174. 712 3.7 0.4 -0.2; 713 4.25 0.4 -0.2; 714 4.8 0.4 -0.2; 715 5.35 0.4 -0.2
175. 716 0.4 0.4 0.55; 720 0.4 0.4 2.75; 722 0.4 0.4 3.85; 724 0.4 0.4 4.95
176. 725 5.9 0.4 0.55; 729 5.9 0.4 2.75; 731 5.9 0.4 3.85; 733 5.9 0.4 4.95
177. 734 0.4 0.4 0.175; 735 0.2 0.4 0.175; 736 0.4 0.4 5.325; 737 0.2 0.4 5.325
178. 738 6.1 0.4 0.175; 739 5.9 0.4 0.175; 740 6.1 0.4 5.325; 741 5.9 0.4 5.325
179. 742 0.95 0.4 0.175; 743 1.5 0.4 0.175; 744 2.05 0.4 0.175; 745 2.6 0.4 0.175
180. 746 3.15 0.4 0.175; 747 3.7 0.4 0.175; 748 4.25 0.4 0.175; 749 4.8 0.4 0.175
181. 750 5.35 0.4 0.175; 751 0.95 0.4 0.55; 752 1.5 0.4 0.55; 753 2.05 0.4 0.55
182. 754 2.6 0.4 0.55; 755 3.15 0.4 0.55; 756 3.7 0.4 0.55; 757 4.25 0.4 0.55
183. 758 4.8 0.4 0.55; 759 5.35 0.4 0.55; 760 0.95 0.4 1.1; 761 0.4 0.4 1.1
184. 762 1.5 0.4 1.1; 763 2.05 0.4 1.1; 764 2.6 0.4 1.1; 765 3.15 0.4 1.1
185. 766 3.7 0.4 1.1; 767 4.25 0.4 1.1; 768 4.8 0.4 1.1; 769 5.35 0.4 1.1
186. 770 5.9 0.4 1.1; 782 0.95 0.4 1.65; 783 0.4 0.4 1.65; 784 1.5 0.4 1.65
187. 785 2.05 0.4 1.65; 786 2.6 0.4 1.65; 787 3.15 0.4 1.65; 788 3.7 0.4 1.65
188. 789 4.25 0.4 1.65; 790 4.8 0.4 1.65; 791 5.35 0.4 1.65; 792 5.9 0.4 1.65
189. 793 0.95 0.4 2.2; 794 0.4 0.4 2.2; 795 1.5 0.4 2.2; 796 2.05 0.4 2.2
190. 797 2.6 0.4 2.2; 798 3.15 0.4 2.2; 799 3.7 0.4 2.2; 800 4.25 0.4 2.2
191. 801 4.8 0.4 2.2; 802 5.35 0.4 2.2; 803 5.9 0.4 2.2; 804 0.95 0.4 2.75
192. 805 1.5 0.4 2.75; 806 2.05 0.4 2.75; 807 2.6 0.4 2.75; 808 3.15 0.4 2.75
193. 809 3.7 0.4 2.75; 810 4.25 0.4 2.75; 811 4.8 0.4 2.75; 812 5.35 0.4 2.75
194. 813 0.95 0.4 3.3; 814 0.4 0.4 3.3; 815 1.5 0.4 3.3; 816 2.05 0.4 3.3
195. 817 2.6 0.4 3.3; 818 3.15 0.4 3.3; 819 3.7 0.4 3.3; 820 4.25 0.4 3.3
196. 821 4.8 0.4 3.3; 822 5.35 0.4 3.3; 823 5.9 0.4 3.3; 824 0.95 0.4 3.85
197. 826 1.5 0.4 3.85; 827 2.05 0.4 3.85; 828 2.6 0.4 3.85; 829 3.15 0.4 3.85
198. 830 3.7 0.4 3.85; 831 4.25 0.4 3.85; 832 4.8 0.4 3.85; 833 5.35 0.4 3.85
199. 846 0.95 0.4 4.4; 847 0.4 0.4 4.4; 848 1.5 0.4 4.4; 849 2.05 0.4 4.4
200. 850 2.6 0.4 4.4; 851 3.15 0.4 4.4; 852 3.7 0.4 4.4; 853 4.25 0.4 4.4
201. 854 4.8 0.4 4.4; 855 5.35 0.4 4.4; 856 5.9 0.4 4.4; 857 0.95 0.4 4.95
202. 858 1.5 0.4 4.95; 859 2.05 0.4 4.95; 860 2.6 0.4 4.95; 861 3.15 0.4 4.95
203. 862 3.7 0.4 4.95; 863 4.25 0.4 4.95; 864 4.8 0.4 4.95; 865 5.35 0.4 4.95
204. 866 0.95 0.4 5.325; 867 1.5 0.4 5.325; 868 2.05 0.4 5.325; 869 2.6 0.4 5.325
205. 870 3.15 0.4 5.325; 871 3.7 0.4 5.325; 872 4.25 0.4 5.325; 873 4.8 0.4 5.325
206. 874 5.35 0.4 5.325

207. ELEMENT INCIDENCES SHELL
208. 13 15 16 14 13; 16 7 8 6 5; 34 24 33 34 35; 35 33 36 37 34; 36 36 38 39 37
209. 37 38 40 41 39; 38 40 42 43 41; 39 42 44 45 43; 40 44 46 47 45; 41 46 48 49 47
210. 42 48 50 51 49; 43 50 31 52 51; 44 35 34 53 22; 45 34 37 54 53; 46 37 39 55 54
211. 47 39 41 56 55; 48 41 43 57 56; 49 43 45 58 57; 50 45 47 59 58; 51 47 49 60 59
212. 52 49 51 61 60; 53 51 52 29 61; 54 22 53 62 63; 55 53 54 64 62; 56 54 55 65 64
213. 57 55 56 66 65; 58 56 57 67 66; 59 57 58 68 67; 60 58 59 69 68; 61 59 60 70 69
214. 62 60 61 71 70; 63 61 29 72 71; 64 63 62 73 74; 65 62 64 75 73; 66 64 65 76 75
215. 67 65 66 77 76; 68 66 67 78 77; 69 67 68 79 78; 70 68 69 80 79; 71 69 70 81 80
216. 72 70 71 82 81; 73 71 72 83 82; 74 74 73 84 85; 75 73 75 86 84; 76 75 76 87 86
217. 77 76 77 88 87; 78 77 78 89 88; 79 78 79 90 89; 80 79 80 91 90; 81 80 81 92 91
218. 82 81 82 93 92; 83 82 83 94 93; 84 85 84 95 96; 85 84 86 97 95; 86 86 87 98 97
219. 87 87 88 99 98; 88 88 89 100 99; 89 89 90 101 100; 90 90 91 102 101
220. 91 91 92 103 102; 92 92 93 104 103; 93 93 94 105 104; 94 96 95 106 107
221. 95 95 97 108 106; 96 97 98 109 108; 97 98 99 110 109; 98 99 100 111 110
222. 99 100 101 112 111; 100 101 102 113 112; 101 102 103 114 113
223. 102 103 104 115 114; 103 104 105 116 115; 104 107 106 117 118
224. 105 106 108 119 117; 106 108 109 120 119; 107 109 110 121 120
225. 108 110 111 122 121; 109 111 112 123 122; 110 112 113 124 123
226. 111 113 114 125 124; 112 114 115 126 125; 113 115 116 127 126
227. 114 118 117 128 129; 115 117 119 130 128; 116 119 120 131 130
228. 117 120 121 132 131; 118 121 122 133 132; 119 122 123 134 133
229. 120 123 124 135 134; 121 124 125 136 135; 122 125 126 137 136
230. 123 126 127 138 137; 124 129 128 139 140; 125 128 130 141 139
231. 126 130 131 142 141; 127 131 132 143 142; 128 132 133 144 143
232. 129 133 134 145 144; 130 134 135 146 145; 131 135 136 147 146
233. 132 136 137 148 147; 133 137 138 149 148; 134 140 139 150 151
234. 135 139 141 152 150; 136 141 142 153 152; 137 142 143 154 153
235. 138 143 144 155 154; 139 144 145 156 155; 140 145 146 157 156
236. 141 146 147 158 157; 142 147 148 159 158; 143 148 149 160 159
237. 144 151 150 170 20; 145 150 152 171 170; 146 152 153 172 171
238. 147 153 154 173 172; 148 154 155 174 173; 149 155 156 175 174
239. 150 156 157 176 175; 151 157 158 177 176; 152 158 159 178 177
240. 153 159 160 27 178; 164 23 24 35 179; 165 179 35 22 21; 166 31 32 180 52
241. 167 52 180 30 29; 168 29 30 181 72; 169 72 181 182 83; 170 83 182 183 94
242. 171 94 183 184 105; 172 105 184 185 116; 173 116 185 186 127
243. 174 127 186 187 138; 175 138 187 188 149; 176 149 188 189 160
244. 177 160 189 28 27; 178 21 22 63 190; 179 190 63 74 191; 180 191 74 85 192
245. 181 192 85 96 193; 182 193 96 107 194; 183 194 107 118 195
246. 184 195 118 129 196; 185 196 129 140 197; 186 197 140 151 198
247. 187 198 151 20 19; 188 23 199 200 24; 189 199 201 202 200; 190 201 203 204 202
248. 191 203 205 206 204; 192 205 207 208 206; 193 207 209 210 208
249. 194 209 211 212 210; 195 211 213 214 212; 196 213 215 216 214; 197 215 7 8 216
250. 198 31 217 218 32; 199 217 219 220 218; 200 219 221 222 220
251. 201 221 223 224 222; 202 223 225 226 224; 203 225 227 228 226
252. 204 227 229 230 228; 205 229 231 232 230; 206 231 233 234 232
253. 207 233 15 16 234; 208 24 200 235 33; 209 200 202 236 235; 210 202 204 237 236
254. 211 204 206 238 237; 212 206 208 239 238; 213 208 210 240 239
255. 214 210 212 241 240; 215 212 214 242 241; 216 214 216 243 242
256. 217 216 8 244 243; 218 33 235 245 36; 219 235 236 246 245; 220 236 237 247 246
257. 221 237 238 248 247; 222 238 239 249 248; 223 239 240 250 249
258. 224 240 241 251 250; 225 241 242 252 251; 226 242 243 253 252
259. 227 243 244 254 253; 228 36 245 255 38; 229 245 246 256 255
260. 230 246 247 257 256; 231 247 248 258 257; 232 248 249 259 258
261. 233 249 250 260 259; 234 250 251 261 260; 235 251 252 262 261
262. 236 252 253 263 262; 237 253 254 264 263; 238 38 255 265 40

263. 239 255 256 266 265; 240 256 257 267 266; 241 257 258 268 267
264. 242 258 259 269 268; 243 259 260 270 269; 244 260 261 271 270
265. 245 261 262 272 271; 246 262 263 273 272; 247 263 264 274 273
266. 248 40 265 275 42; 249 265 266 276 275; 250 266 267 277 276
267. 251 267 268 278 277; 252 268 269 279 278; 253 269 270 280 279
268. 254 270 271 281 280; 255 271 272 282 281; 256 272 273 283 282
269. 257 273 274 284 283; 258 42 275 285 44; 259 275 276 286 285
270. 260 276 277 287 286; 261 277 278 288 287; 262 278 279 289 288
271. 263 279 280 290 289; 264 280 281 291 290; 265 281 282 292 291
272. 266 282 283 293 292; 267 283 284 294 293; 268 44 285 295 46
273. 269 285 286 296 295; 270 286 287 297 296; 271 287 288 298 297
274. 272 288 289 299 298; 273 289 290 300 299; 274 290 291 301 300
275. 275 291 292 302 301; 276 292 293 303 302; 277 293 294 304 303
276. 278 46 295 305 48; 279 295 296 306 305; 280 296 297 307 306
277. 281 297 298 308 307; 282 298 299 309 308; 283 299 300 310 309
278. 284 300 301 311 310; 285 301 302 312 311; 286 302 303 313 312
279. 287 303 304 314 313; 288 48 305 315 50; 289 305 306 316 315
280. 290 306 307 317 316; 291 307 308 318 317; 292 308 309 319 318
281. 293 309 310 320 319; 294 310 311 321 320; 295 311 312 322 321
282. 296 312 313 323 322; 297 313 314 324 323; 298 50 315 217 31
283. 299 315 316 219 217; 300 316 317 221 219; 301 317 318 223 221
284. 302 318 319 225 223; 303 319 320 227 225; 304 320 321 229 227
285. 305 321 322 231 229; 306 322 323 233 231; 307 323 324 15 233
286. 308 30 325 326 181; 309 325 327 328 326; 310 327 329 330 328
287. 311 329 331 332 330; 312 331 333 334 332; 313 333 335 336 334
288. 314 335 337 338 336; 315 337 339 340 338; 316 339 341 342 340
289. 317 341 14 343 342; 318 181 326 344 182; 319 326 328 345 344
290. 320 328 330 346 345; 321 330 332 347 346; 322 332 334 348 347
291. 323 334 336 349 348; 324 336 338 350 349; 325 338 340 351 350
292. 326 340 342 352 351; 327 342 343 353 352; 328 182 344 354 183
293. 329 344 345 355 354; 330 345 346 356 355; 331 346 347 357 356
294. 332 347 348 358 357; 333 348 349 359 358; 334 349 350 360 359
295. 335 350 351 361 360; 336 351 352 362 361; 337 352 353 363 362
296. 338 183 354 364 184; 339 354 355 365 364; 340 355 356 366 365
297. 341 356 357 367 366; 342 357 358 368 367; 343 358 359 369 368
298. 344 359 360 370 369; 345 360 361 371 370; 346 361 362 372 371
299. 347 362 363 373 372; 348 184 364 374 185; 349 364 365 375 374
300. 350 365 366 376 375; 351 366 367 377 376; 352 367 368 378 377
301. 353 368 369 379 378; 354 369 370 380 379; 355 370 371 381 380
302. 356 371 372 382 381; 357 372 373 383 382; 358 185 374 384 186
303. 359 374 375 385 384; 360 375 376 386 385; 361 376 377 387 386
304. 362 377 378 388 387; 363 378 379 389 388; 364 379 380 390 389
305. 365 380 381 391 390; 366 381 382 392 391; 367 382 383 393 392
306. 368 186 384 394 187; 369 384 385 395 394; 370 385 386 396 395
307. 371 386 387 397 396; 372 387 388 398 397; 373 388 389 399 398
308. 374 389 390 400 399; 375 390 391 401 400; 376 391 392 402 401
309. 377 392 393 403 402; 378 187 394 404 188; 379 394 395 405 404
310. 380 395 396 406 405; 381 396 397 407 406; 382 397 398 408 407
311. 383 398 399 409 408; 384 399 400 410 409; 385 400 401 411 410
312. 386 401 402 412 411; 387 402 403 413 412; 388 188 404 414 189
313. 389 404 405 415 414; 390 405 406 416 415; 391 406 407 417 416
314. 392 407 408 418 417; 393 408 409 419 418; 394 409 410 420 419
315. 395 410 411 421 420; 396 411 412 422 421; 397 412 413 423 422
316. 398 189 414 541 28; 399 414 415 542 541; 400 415 416 543 542
317. 401 416 417 544 543; 402 417 418 545 544; 403 418 419 546 545
318. 404 419 420 547 546; 405 420 421 548 547; 406 421 422 549 548

319. 407 422 423 12 549; 408 21 433 434 190; 409 433 435 436 434
320. 410 435 437 438 436; 411 437 439 440 438; 412 439 441 442 440
321. 413 441 443 444 442; 414 443 445 446 444; 415 445 447 448 446
322. 416 447 449 450 448; 417 449 5 451 450; 418 190 434 452 191
323. 419 434 436 453 452; 420 436 438 454 453; 421 438 440 455 454
324. 422 440 442 456 455; 423 442 444 457 456; 424 444 446 458 457
325. 425 446 448 459 458; 426 448 450 460 459; 427 450 451 461 460
326. 428 191 452 462 192; 429 452 453 463 462; 430 453 454 464 463
327. 431 454 455 465 464; 432 455 456 466 465; 433 456 457 467 466
328. 434 457 458 468 467; 435 458 459 469 468; 436 459 460 470 469
329. 437 460 461 471 470; 438 192 462 472 193; 439 462 463 473 472
330. 440 463 464 474 473; 441 464 465 475 474; 442 465 466 476 475
331. 443 466 467 477 476; 444 467 468 478 477; 445 468 469 479 478
332. 446 469 470 480 479; 447 470 471 481 480; 448 193 472 482 194
333. 449 472 473 483 482; 450 473 474 484 483; 451 474 475 485 484
334. 452 475 476 486 485; 453 476 477 487 486; 454 477 478 488 487
335. 455 478 479 489 488; 456 479 480 490 489; 457 480 481 491 490
336. 458 194 482 492 195; 459 482 483 493 492; 460 483 484 494 493
337. 461 484 485 495 494; 462 485 486 496 495; 463 486 487 497 496
338. 464 487 488 498 497; 465 488 489 499 498; 466 489 490 500 499
339. 467 490 491 501 500; 468 195 492 502 196; 469 492 493 503 502
340. 470 493 494 504 503; 471 494 495 505 504; 472 495 496 506 505
341. 473 496 497 507 506; 474 497 498 508 507; 475 498 499 509 508
342. 476 499 500 510 509; 477 500 501 511 510; 478 196 502 512 197
343. 479 502 503 513 512; 480 503 504 514 513; 481 504 505 515 514
344. 482 505 506 516 515; 483 506 507 517 516; 484 507 508 518 517
345. 485 508 509 519 518; 486 509 510 520 519; 487 510 511 521 520
346. 488 197 512 522 198; 489 512 513 523 522; 490 513 514 524 523
347. 491 514 515 525 524; 492 515 516 526 525; 493 516 517 527 526
348. 494 517 518 528 527; 495 518 519 529 528; 496 519 520 530 529
349. 497 520 521 531 530; 498 198 522 550 19; 499 522 523 551 550
350. 500 523 524 552 551; 501 524 525 553 552; 502 525 526 554 553
351. 503 526 527 555 554; 504 527 528 556 555; 505 528 529 557 556
352. 506 529 530 558 557; 507 530 531 3 558; 528 32 218 559 180
353. 529 218 220 560 559; 530 220 222 561 560; 531 222 224 562 561
354. 532 224 226 563 562; 533 226 228 564 563; 534 228 230 565 564
355. 535 230 232 566 565; 536 232 234 567 566; 537 234 16 568 567
356. 538 180 559 325 30; 539 559 560 327 325; 540 560 561 329 327
357. 541 561 562 331 329; 542 562 563 333 331; 543 563 564 335 333
358. 544 564 565 337 335; 545 565 566 339 337; 546 566 567 341 339
359. 547 567 568 14 341; 548 23 199 569 179; 549 199 201 570 569
360. 550 201 203 571 570; 551 203 205 572 571; 552 205 207 573 572
361. 553 207 209 574 573; 554 209 211 575 574; 555 211 213 576 575
362. 556 213 215 577 576; 557 215 7 578 577; 558 179 569 433 21
363. 559 569 570 435 433; 560 570 571 437 435; 561 571 572 439 437
364. 562 572 573 441 439; 563 573 574 443 441; 564 574 575 445 443
365. 565 575 576 447 445; 566 576 577 449 447; 567 577 578 5 449; 568 8 244 579 580
366. 569 244 254 581 579; 570 254 264 582 581; 571 264 274 583 582
367. 572 274 284 584 583; 573 284 294 585 584; 574 294 304 586 585
368. 575 304 314 587 586; 576 314 324 588 587; 577 324 15 589 588
369. 578 580 579 590 6; 579 579 581 591 590; 580 581 582 592 591
370. 581 582 583 593 592; 582 583 584 594 593; 583 584 585 595 594
371. 584 585 586 596 595; 585 586 587 597 596; 586 587 588 598 597
372. 587 588 589 13 598; 588 6 590 599 600; 589 590 591 601 599
373. 590 591 592 602 601; 591 592 593 603 602; 592 593 594 604 603
374. 593 594 595 605 604; 594 595 596 606 605; 595 596 597 607 606

375. 596 597 598 608 607; 597 598 13 609 608; 598 600 599 610 611
376. 599 599 601 612 610; 600 601 602 613 612; 601 602 603 614 613
377. 602 603 604 615 614; 603 604 605 616 615; 604 605 606 617 616
378. 605 606 607 618 617; 606 607 608 619 618; 607 608 609 620 619
379. 608 611 610 621 622; 609 610 612 623 621; 610 612 613 624 623
380. 611 613 614 625 624; 612 614 615 626 625; 613 615 616 627 626
381. 614 616 617 628 627; 615 617 618 629 628; 616 618 619 630 629
382. 617 619 620 631 630; 618 622 621 632 633; 619 621 623 634 632
383. 620 623 624 635 634; 621 624 625 636 635; 622 625 626 637 636
384. 623 626 627 638 637; 624 627 628 639 638; 625 628 629 640 639
385. 626 629 630 641 640; 627 630 631 642 641; 628 633 632 643 644
386. 629 632 634 645 643; 630 634 635 646 645; 631 635 636 647 646
387. 632 636 637 648 647; 633 637 638 649 648; 634 638 639 650 649
388. 635 639 640 651 650; 636 640 641 652 651; 637 641 642 653 652
389. 638 644 643 654 655; 639 643 645 656 654; 640 645 646 657 656
390. 641 646 647 658 657; 642 647 648 659 658; 643 648 649 660 659
391. 644 649 650 661 660; 645 650 651 662 661; 646 651 652 663 662
392. 647 652 653 664 663; 648 655 654 665 666; 649 654 656 667 665
393. 650 656 657 668 667; 651 657 658 669 668; 652 658 659 670 669
394. 653 659 660 671 670; 654 660 661 672 671; 655 661 662 673 672
395. 656 662 663 674 673; 657 663 664 675 674; 658 666 665 676 677
396. 659 665 667 678 676; 660 667 668 679 678; 661 668 669 680 679
397. 662 669 670 681 680; 663 670 671 682 681; 664 671 672 683 682
398. 665 672 673 684 683; 666 673 674 685 684; 667 674 675 686 685
399. 668 677 676 687 688; 669 676 678 689 687; 670 678 679 690 689
400. 671 679 680 691 690; 672 680 681 692 691; 673 681 682 693 692
401. 674 682 683 694 693; 675 683 684 695 694; 676 684 685 696 695
402. 677 685 686 697 696; 678 688 687 707 4; 679 687 689 708 707
403. 680 689 690 709 708; 681 690 691 710 709; 682 691 692 711 710
404. 683 692 693 712 711; 684 693 694 713 712; 685 694 695 714 713
405. 686 695 696 715 714; 687 696 697 11 715; 702 558 716 761 557
406. 703 557 761 783 556; 704 556 783 794 555; 705 555 794 720 554
407. 706 554 720 814 553; 707 553 814 722 552; 708 552 722 847 551
408. 709 551 847 724 550; 712 725 549 548 770; 713 770 548 547 792
409. 714 792 547 546 803; 715 803 546 545 729; 716 729 545 544 823
410. 717 823 544 543 731; 718 731 543 542 856; 719 856 542 541 733; 724 3 4 734 735
411. 725 735 734 716 558; 726 550 724 736 737; 727 737 736 20 19; 728 11 12 738 739
412. 729 739 738 549 725; 730 733 541 740 741; 731 741 740 28 27; 732 4 707 742 734
413. 733 707 708 743 742; 734 708 709 744 743; 735 709 710 745 744
414. 736 710 711 746 745; 737 711 712 747 746; 738 712 713 748 747
415. 739 713 714 749 748; 740 714 715 750 749; 741 715 11 739 750
416. 742 734 742 751 716; 743 742 743 752 751; 744 743 744 753 752
417. 745 744 745 754 753; 746 745 746 755 754; 747 746 747 756 755
418. 748 747 748 757 756; 749 748 749 758 757; 750 749 750 759 758
419. 751 750 739 725 759; 752 716 751 760 761; 753 751 752 762 760
420. 754 752 753 763 762; 755 753 754 764 763; 756 754 755 765 764
421. 757 755 756 766 765; 758 756 757 767 766; 759 757 758 768 767
422. 760 758 759 769 768; 761 759 725 770 769; 762 761 760 782 783
423. 763 760 762 784 782; 764 762 763 785 784; 765 763 764 786 785
424. 766 764 765 787 786; 767 765 766 788 787; 768 766 767 789 788
425. 769 767 768 790 789; 770 768 769 791 790; 771 769 770 792 791
426. 782 783 782 793 794; 783 782 784 795 793; 784 784 785 796 795
427. 785 785 786 797 796; 786 786 787 798 797; 787 787 788 799 798
428. 788 788 789 800 799; 789 789 790 801 800; 790 790 791 802 801
429. 791 791 792 803 802; 792 794 793 804 720; 793 793 795 805 804
430. 794 795 796 806 805; 795 796 797 807 806; 796 797 798 808 807

```
431. 797 798 799 809 808; 798 799 800 810 809; 799 800 801 811 810
432. 800 801 802 812 811; 801 802 803 729 812; 802 720 804 813 814
433. 803 804 805 815 813; 804 805 806 816 815; 805 806 807 817 816
434. 806 807 808 818 817; 807 808 809 819 818; 808 809 810 820 819
435. 809 810 811 821 820; 810 811 812 822 821; 811 812 729 823 822
436. 812 814 813 824 722; 813 813 815 826 824; 814 815 816 827 826
437. 815 816 817 828 827; 816 817 818 829 828; 817 818 819 830 829
438. 818 819 820 831 830; 819 820 821 832 831; 820 821 822 833 832
439. 821 822 823 731 833; 822 722 824 846 847; 823 824 826 848 846
440. 824 826 827 849 848; 825 827 828 850 849; 826 828 829 851 850
441. 827 829 830 852 851; 828 830 831 853 852; 829 831 832 854 853
442. 830 832 833 855 854; 831 833 731 856 855; 842 847 846 857 724
443. 843 846 848 858 857; 844 848 849 859 858; 845 849 850 860 859
444. 846 850 851 861 860; 847 851 852 862 861; 848 852 853 863 862
445. 849 853 854 864 863; 850 854 855 865 864; 851 855 856 733 865
446. 852 724 857 866 736; 853 857 858 867 866; 854 858 859 868 867
447. 855 859 860 869 868; 856 860 861 870 869; 857 861 862 871 870
448. 858 862 863 872 871; 859 863 864 873 872; 860 864 865 874 873
449. 861 865 733 741 874; 862 736 866 170 20; 863 866 867 171 170
450. 864 867 868 172 171; 865 868 869 173 172; 866 869 870 174 173
451. 867 870 871 175 174; 868 871 872 176 175; 869 872 873 177 176
452. 870 873 874 178 177; 871 874 741 27 178; 872 13 14 343 609
453. 873 609 343 353 620; 874 620 353 363 631; 875 631 363 373 642
454. 876 642 373 383 653; 877 653 383 393 664; 878 664 393 403 675
455. 879 675 403 413 686; 880 686 413 423 697; 881 697 423 12 11; 882 5 6 600 451
456. 883 451 600 611 461; 884 461 611 622 471; 885 471 622 633 481
457. 886 481 633 644 491; 887 491 644 655 501; 888 501 655 666 511
458. 889 511 666 677 521; 890 521 677 688 531; 891 531 688 4 3
459. START GROUP DEFINITION
460. ELEMENT
461. END GROUP DEFINITION

** WARNING: NO VALID GROUPS IN GROUP DEFINITION DATA **
462. ELEMENT PROPERTY
463. 188 TO 307 THICKNESS 0.15
464. 702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 871 THICKNESS 0.4
465. 13 16 34 TO 153 164 TO 187 308 TO 507 528 TO 687 872 TO 891 THICKNESS 0.4
466. DEFINE MATERIAL START
467. ISOTROPIC CONCRETE
468. E 2.17185E+007
469. POISSON 0.17
470. DENSITY 25
471. ALPHA 1E-005
472. DAMP 0.05
473. TYPE CONCRETE
474. STRENGTH FCU 35000
475. END DEFINE MATERIAL
476. CONSTANTS
477. MATERIAL CONCRETE ALL
478. SUPPORTS
479. 702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 870 -
480. 871 PLATE MAT DIRECT Y SUBGRADE 66000 PRINT

     JOINT      INFLUENCE AREA
     -----      --------------
```

3	0.018750
4	0.070312
11	0.070312
12	0.018750
19	0.018750
20	0.070312
27	0.070312
28	0.018750
170	0.103125
171	0.103125
172	0.103125
173	0.103125
174	0.103125
175	0.103125
176	0.103125
177	0.103125
178	0.103125
541	0.046250
542	0.055000
543	0.055000
544	0.055000
545	0.055000
546	0.055000
547	0.055000
548	0.055000
549	0.046250
550	0.046250
551	0.055000
552	0.055000
553	0.055000
554	0.055000
555	0.055000
556	0.055000
557	0.055000
558	0.046250
707	0.103125
708	0.103125
709	0.103125
710	0.103125
711	0.103125
712	0.103125
713	0.103125
714	0.103125
715	0.103125
716	0.173437
720	0.206250
722	0.206250
724	0.173438
725	0.173437
729	0.206250
731	0.206250
733	0.173438
734	0.140625
735	0.037500
736	0.140625
737	0.037500

738	0.037500
739	0.140625
740	0.037500
741	0.140625
742	0.206250
743	0.206250
744	0.206250
745	0.206250
746	0.206250
747	0.206250
748	0.206250
749	0.206250
750	0.206250
751	0.254375
752	0.254375
753	0.254375
754	0.254375
755	0.254375
756	0.254375
757	0.254375
758	0.254375
759	0.254375
760	0.302500
761	0.206250
762	0.302500
763	0.302500
764	0.302500
765	0.302500
766	0.302500
767	0.302500
768	0.302500
769	0.302500
770	0.206250
782	0.302500
783	0.206250
784	0.302500
785	0.302500
786	0.302500
787	0.302500
788	0.302500
789	0.302500
790	0.302500
791	0.302500
792	0.206250
793	0.302500
794	0.206250
795	0.302500
796	0.302500
797	0.302500
798	0.302500
799	0.302500
800	0.302500
801	0.302500
802	0.302500
803	0.206250
804	0.302500

805	0.302500
806	0.302500
807	0.302500
808	0.302500
809	0.302500
810	0.302500
811	0.302500
812	0.302500
813	0.302500
814	0.206250
815	0.302500
816	0.302500
817	0.302500
818	0.302500
819	0.302500
820	0.302500
821	0.302500
822	0.302500
823	0.206250
824	0.302500
826	0.302500
827	0.302500
828	0.302500
829	0.302500
830	0.302500
831	0.302500
832	0.302500
833	0.302500
846	0.302500
847	0.206250
848	0.302500
849	0.302500
850	0.302500
851	0.302500
852	0.302500
853	0.302500
854	0.302500
855	0.302500
856	0.206250
857	0.254375
858	0.254375
859	0.254375
860	0.254375
861	0.254375
862	0.254375
863	0.254375
864	0.254375
865	0.254375
866	0.206250
867	0.206250
868	0.206250
869	0.206250
870	0.206250
871	0.206250
872	0.206250
873	0.206250

```
       874          0.206250
    TOTAL          34.809982
481. LOAD 1 LOADTYPE DEAD  TITLE DEAD LOAD
482. SELFWEIGHT Y -1
483. LOAD 2 LOADTYPE LIVE  TITLE LIVE LOAD
484. ELEMENT LOAD
485. 188 TO 307 PR GY -5
486. LOAD 3 LOADTYPE FLUIDS  TITLE WATER PRESSURE
487. ELEMENT LOAD
488. 409 TRAP JT 0.0999976 0.0999976 4.09 4.09
489. 410 TRAP JT 0.0999976 0.0999976 4.09 4.09
490. 411 TRAP JT 0.0999976 0.0999976 4.09 4.09
491. 412 TRAP JT 0.0999976 0.0999976 4.09 4.09
492. 413 TRAP JT 0.0999976 0.0999976 4.09 4.09
493. 414 TRAP JT 0.0999976 0.0999976 4.09 4.09
494. 415 TRAP JT 0.0999976 0.0999976 4.09 4.09
495. 416 TRAP JT 0.0999976 0.0999976 4.09 4.09
496. 417 TRAP JT 0.0999976 0.0999976 4.09 4.09
497. 418 TRAP JT 4.09 4.09 8.08 8.08
498. 419 TRAP JT 4.09 4.09 8.08 8.08
499. 420 TRAP JT 4.09 4.09 8.08 8.08
500. 421 TRAP JT 4.09 4.09 8.08 8.08
501. 422 TRAP JT 4.09 4.09 8.08 8.08
502. 423 TRAP JT 4.09 4.09 8.08 8.08
503. 424 TRAP JT 4.09 4.09 8.08 8.08
504. 425 TRAP JT 4.09 4.09 8.08 8.08
505. 426 TRAP JT 4.09 4.09 8.08 8.08
506. 427 TRAP JT 4.09 4.09 8.08 8.08
507. 428 TRAP JT 8.08 8.08 12.07 12.07
508. 429 TRAP JT 8.08 8.08 12.07 12.07
509. 430 TRAP JT 8.08 8.08 12.07 12.07
510. 431 TRAP JT 8.08 8.08 12.07 12.07
511. 432 TRAP JT 8.08 8.08 12.07 12.07
512. 433 TRAP JT 8.08 8.08 12.07 12.07
513. 434 TRAP JT 8.08 8.08 12.07 12.07
514. 435 TRAP JT 8.08 8.08 12.07 12.07
515. 436 TRAP JT 8.08 8.08 12.07 12.07
516. 437 TRAP JT 8.08 8.08 12.07 12.07
517. 438 TRAP JT 12.07 12.07 16.06 16.06
518. 439 TRAP JT 12.07 12.07 16.06 16.06
519. 440 TRAP JT 12.07 12.07 16.06 16.06
520. 441 TRAP JT 12.07 12.07 16.06 16.06
521. 442 TRAP JT 12.07 12.07 16.06 16.06
522. 443 TRAP JT 12.07 12.07 16.06 16.06
523. 444 TRAP JT 12.07 12.07 16.06 16.06
524. 445 TRAP JT 12.07 12.07 16.06 16.06
525. 446 TRAP JT 12.07 12.07 16.06 16.06
526. 447 TRAP JT 12.07 12.07 16.06 16.06
527. 448 TRAP JT 16.06 16.06 20.05 20.05
528. 449 TRAP JT 16.06 16.06 20.05 20.05
529. 450 TRAP JT 16.06 16.06 20.05 20.05
530. 451 TRAP JT 16.06 16.06 20.05 20.05
531. 452 TRAP JT 16.06 16.06 20.05 20.05
532. 453 TRAP JT 16.06 16.06 20.05 20.05
533. 454 TRAP JT 16.06 16.06 20.05 20.05
534. 455 TRAP JT 16.06 16.06 20.05 20.05
```

```
535. 456 TRAP JT 16.06 16.06 20.05 20.05
536. 457 TRAP JT 16.06 16.06 20.05 20.05
537. 458 TRAP JT 20.05 20.05 24.04 24.04
538. 459 TRAP JT 20.05 20.05 24.04 24.04
539. 460 TRAP JT 20.05 20.05 24.04 24.04
540. 461 TRAP JT 20.05 20.05 24.04 24.04
541. 462 TRAP JT 20.05 20.05 24.04 24.04
542. 463 TRAP JT 20.05 20.05 24.04 24.04
543. 464 TRAP JT 20.05 20.05 24.04 24.04
544. 465 TRAP JT 20.05 20.05 24.04 24.04
545. 466 TRAP JT 20.05 20.05 24.04 24.04
546. 467 TRAP JT 20.05 20.05 24.04 24.04
547. 468 TRAP JT 24.04 24.04 28.03 28.03
548. 469 TRAP JT 24.04 24.04 28.03 28.03
549. 470 TRAP JT 24.04 24.04 28.03 28.03
550. 471 TRAP JT 24.04 24.04 28.03 28.03
551. 472 TRAP JT 24.04 24.04 28.03 28.03
552. 473 TRAP JT 24.04 24.04 28.03 28.03
553. 474 TRAP JT 24.04 24.04 28.03 28.03
554. 475 TRAP JT 24.04 24.04 28.03 28.03
555. 476 TRAP JT 24.04 24.04 28.03 28.03
556. 477 TRAP JT 24.04 24.04 28.03 28.03
557. 478 TRAP JT 28.03 28.03 32.02 32.02
558. 479 TRAP JT 28.03 28.03 32.02 32.02
559. 480 TRAP JT 28.03 28.03 32.02 32.02
560. 481 TRAP JT 28.03 28.03 32.02 32.02
561. 482 TRAP JT 28.03 28.03 32.02 32.02
562. 483 TRAP JT 28.03 28.03 32.02 32.02
563. 484 TRAP JT 28.03 28.03 32.02 32.02
564. 485 TRAP JT 28.03 28.03 32.02 32.02
565. 486 TRAP JT 28.03 28.03 32.02 32.02
566. 487 TRAP JT 28.03 28.03 32.02 32.02
567. 488 TRAP JT 32.02 32.02 36.01 36.01
568. 489 TRAP JT 32.02 32.02 36.01 36.01
569. 490 TRAP JT 32.02 32.02 36.01 36.01
570. 491 TRAP JT 32.02 32.02 36.01 36.01
571. 492 TRAP JT 32.02 32.02 36.01 36.01
572. 493 TRAP JT 32.02 32.02 36.01 36.01
573. 494 TRAP JT 32.02 32.02 36.01 36.01
574. 495 TRAP JT 32.02 32.02 36.01 36.01
575. 496 TRAP JT 32.02 32.02 36.01 36.01
576. 497 TRAP JT 32.02 32.02 36.01 36.01
577. 498 TRAP JT 36.01 36.01 40 40
578. 499 TRAP JT 36.01 36.01 40 40
579. 500 TRAP JT 36.01 36.01 40 40
580. 501 TRAP JT 36.01 36.01 40 40
581. 502 TRAP JT 36.01 36.01 40 40
582. 503 TRAP JT 36.01 36.01 40 40
583. 504 TRAP JT 36.01 36.01 40 40
584. 505 TRAP JT 36.01 36.01 40 40
585. 506 TRAP JT 36.01 36.01 40 40
586. 507 TRAP JT 36.01 36.01 40 40
587. 408 TRAP JT 0.0999976 0.0999976 4.09 4.09
588. 308 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
589. 309 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
590. 310 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
```

591. 311 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
592. 312 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
593. 313 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
594. 314 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
595. 315 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
596. 316 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
597. 317 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
598. 318 TRAP JT -4.09 -4.09 -8.08 -8.08
599. 319 TRAP JT -4.09 -4.09 -8.08 -8.08
600. 320 TRAP JT -4.09 -4.09 -8.08 -8.08
601. 321 TRAP JT -4.09 -4.09 -8.08 -8.08
602. 322 TRAP JT -4.09 -4.09 -8.08 -8.08
603. 323 TRAP JT -4.09 -4.09 -8.08 -8.08
604. 324 TRAP JT -4.09 -4.09 -8.08 -8.08
605. 325 TRAP JT -4.09 -4.09 -8.08 -8.08
606. 326 TRAP JT -4.09 -4.09 -8.08 -8.08
607. 327 TRAP JT -4.09 -4.09 -8.08 -8.08
608. 328 TRAP JT -8.08 -8.08 -12.07 -12.07
609. 329 TRAP JT -8.08 -8.08 -12.07 -12.07
610. 330 TRAP JT -8.08 -8.08 -12.07 -12.07
611. 331 TRAP JT -8.08 -8.08 -12.07 -12.07
612. 332 TRAP JT -8.08 -8.08 -12.07 -12.07
613. 333 TRAP JT -8.08 -8.08 -12.07 -12.07
614. 334 TRAP JT -8.08 -8.08 -12.07 -12.07
615. 335 TRAP JT -8.08 -8.08 -12.07 -12.07
616. 336 TRAP JT -8.08 -8.08 -12.07 -12.07
617. 337 TRAP JT -8.08 -8.08 -12.07 -12.07
618. 338 TRAP JT -12.07 -12.07 -16.06 -16.06
619. 339 TRAP JT -12.07 -12.07 -16.06 -16.06
620. 340 TRAP JT -12.07 -12.07 -16.06 -16.06
621. 341 TRAP JT -12.07 -12.07 -16.06 -16.06
622. 342 TRAP JT -12.07 -12.07 -16.06 -16.06
623. 343 TRAP JT -12.07 -12.07 -16.06 -16.06
624. 344 TRAP JT -12.07 -12.07 -16.06 -16.06
625. 345 TRAP JT -12.07 -12.07 -16.06 -16.06
626. 346 TRAP JT -12.07 -12.07 -16.06 -16.06
627. 347 TRAP JT -12.07 -12.07 -16.06 -16.06
628. 348 TRAP JT -16.06 -16.06 -20.05 -20.05
629. 349 TRAP JT -16.06 -16.06 -20.05 -20.05
630. 350 TRAP JT -16.06 -16.06 -20.05 -20.05
631. 351 TRAP JT -16.06 -16.06 -20.05 -20.05
632. 352 TRAP JT -16.06 -16.06 -20.05 -20.05
633. 353 TRAP JT -16.06 -16.06 -20.05 -20.05
634. 354 TRAP JT -16.06 -16.06 -20.05 -20.05
635. 355 TRAP JT -16.06 -16.06 -20.05 -20.05
636. 356 TRAP JT -16.06 -16.06 -20.05 -20.05
637. 357 TRAP JT -16.06 -16.06 -20.05 -20.05
638. 358 TRAP JT -20.05 -20.05 -24.04 -24.04
639. 359 TRAP JT -20.05 -20.05 -24.04 -24.04
640. 360 TRAP JT -20.05 -20.05 -24.04 -24.04
641. 361 TRAP JT -20.05 -20.05 -24.04 -24.04
642. 362 TRAP JT -20.05 -20.05 -24.04 -24.04
643. 363 TRAP JT -20.05 -20.05 -24.04 -24.04
644. 364 TRAP JT -20.05 -20.05 -24.04 -24.04
645. 365 TRAP JT -20.05 -20.05 -24.04 -24.04
646. 366 TRAP JT -20.05 -20.05 -24.04 -24.04

647. 367 TRAP JT -20.05 -20.05 -24.04 -24.04
648. 368 TRAP JT -24.04 -24.04 -28.03 -28.03
649. 369 TRAP JT -24.04 -24.04 -28.03 -28.03
650. 370 TRAP JT -24.04 -24.04 -28.03 -28.03
651. 371 TRAP JT -24.04 -24.04 -28.03 -28.03
652. 372 TRAP JT -24.04 -24.04 -28.03 -28.03
653. 373 TRAP JT -24.04 -24.04 -28.03 -28.03
654. 374 TRAP JT -24.04 -24.04 -28.03 -28.03
655. 375 TRAP JT -24.04 -24.04 -28.03 -28.03
656. 376 TRAP JT -24.04 -24.04 -28.03 -28.03
657. 377 TRAP JT -24.04 -24.04 -28.03 -28.03
658. 378 TRAP JT -28.03 -28.03 -32.02 -32.02
659. 379 TRAP JT -28.03 -28.03 -32.02 -32.02
660. 380 TRAP JT -28.03 -28.03 -32.02 -32.02
661. 381 TRAP JT -28.03 -28.03 -32.02 -32.02
662. 382 TRAP JT -28.03 -28.03 -32.02 -32.02
663. 383 TRAP JT -28.03 -28.03 -32.02 -32.02
664. 384 TRAP JT -28.03 -28.03 -32.02 -32.02
665. 385 TRAP JT -28.03 -28.03 -32.02 -32.02
666. 386 TRAP JT -28.03 -28.03 -32.02 -32.02
667. 387 TRAP JT -28.03 -28.03 -32.02 -32.02
668. 388 TRAP JT -32.02 -32.02 -36.01 -36.01
669. 389 TRAP JT -32.02 -32.02 -36.01 -36.01
670. 390 TRAP JT -32.02 -32.02 -36.01 -36.01
671. 391 TRAP JT -32.02 -32.02 -36.01 -36.01
672. 392 TRAP JT -32.02 -32.02 -36.01 -36.01
673. 393 TRAP JT -32.02 -32.02 -36.01 -36.01
674. 394 TRAP JT -32.02 -32.02 -36.01 -36.01
675. 395 TRAP JT -32.02 -32.02 -36.01 -36.01
676. 396 TRAP JT -32.02 -32.02 -36.01 -36.01
677. 397 TRAP JT -32.02 -32.02 -36.01 -36.01
678. 398 TRAP JT -36.01 -36.01 -40 -40
679. 399 TRAP JT -36.01 -36.01 -40 -40
680. 400 TRAP JT -36.01 -36.01 -40 -40
681. 401 TRAP JT -36.01 -36.01 -40 -40
682. 402 TRAP JT -36.01 -36.01 -40 -40
683. 403 TRAP JT -36.01 -36.01 -40 -40
684. 404 TRAP JT -36.01 -36.01 -40 -40
685. 405 TRAP JT -36.01 -36.01 -40 -40
686. 406 TRAP JT -36.01 -36.01 -40 -40
687. 407 TRAP JT -36.01 -36.01 -40 -40
688. 54 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
689. 55 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
690. 56 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
691. 57 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
692. 58 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
693. 59 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
694. 60 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
695. 61 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
696. 62 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
697. 63 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
698. 64 TRAP JT -4.09 -4.09 -8.08 -8.08
699. 65 TRAP JT -4.09 -4.09 -8.08 -8.08
700. 66 TRAP JT -4.09 -4.09 -8.08 -8.08
701. 67 TRAP JT -4.09 -4.09 -8.08 -8.08
702. 68 TRAP JT -4.09 -4.09 -8.08 -8.08

703. 69 TRAP JT -4.09 -4.09 -8.08 -8.08
704. 70 TRAP JT -4.09 -4.09 -8.08 -8.08
705. 71 TRAP JT -4.09 -4.09 -8.08 -8.08
706. 72 TRAP JT -4.09 -4.09 -8.08 -8.08
707. 73 TRAP JT -4.09 -4.09 -8.08 -8.08
708. 74 TRAP JT -8.08 -8.08 -12.07 -12.07
709. 75 TRAP JT -8.08 -8.08 -12.07 -12.07
710. 76 TRAP JT -8.08 -8.08 -12.07 -12.07
711. 77 TRAP JT -8.08 -8.08 -12.07 -12.07
712. 78 TRAP JT -8.08 -8.08 -12.07 -12.07
713. 79 TRAP JT -8.08 -8.08 -12.07 -12.07
714. 80 TRAP JT -8.08 -8.08 -12.07 -12.07
715. 81 TRAP JT -8.08 -8.08 -12.07 -12.07
716. 82 TRAP JT -8.08 -8.08 -12.07 -12.07
717. 83 TRAP JT -8.08 -8.08 -12.07 -12.07
718. 84 TRAP JT -12.07 -12.07 -16.06 -16.06
719. 85 TRAP JT -12.07 -12.07 -16.06 -16.06
720. 86 TRAP JT -12.07 -12.07 -16.06 -16.06
721. 87 TRAP JT -12.07 -12.07 -16.06 -16.06
722. 88 TRAP JT -12.07 -12.07 -16.06 -16.06
723. 89 TRAP JT -12.07 -12.07 -16.06 -16.06
724. 90 TRAP JT -12.07 -12.07 -16.06 -16.06
725. 91 TRAP JT -12.07 -12.07 -16.06 -16.06
726. 92 TRAP JT -12.07 -12.07 -16.06 -16.06
727. 93 TRAP JT -12.07 -12.07 -16.06 -16.06
728. 94 TRAP JT -16.06 -16.06 -20.05 -20.05
729. 95 TRAP JT -16.06 -16.06 -20.05 -20.05
730. 96 TRAP JT -16.06 -16.06 -20.05 -20.05
731. 97 TRAP JT -16.06 -16.06 -20.05 -20.05
732. 98 TRAP JT -16.06 -16.06 -20.05 -20.05
733. 99 TRAP JT -16.06 -16.06 -20.05 -20.05
734. 100 TRAP JT -16.06 -16.06 -20.05 -20.05
735. 101 TRAP JT -16.06 -16.06 -20.05 -20.05
736. 102 TRAP JT -16.06 -16.06 -20.05 -20.05
737. 103 TRAP JT -16.06 -16.06 -20.05 -20.05
738. 104 TRAP JT -20.05 -20.05 -24.04 -24.04
739. 105 TRAP JT -20.05 -20.05 -24.04 -24.04
740. 106 TRAP JT -20.05 -20.05 -24.04 -24.04
741. 107 TRAP JT -20.05 -20.05 -24.04 -24.04
742. 108 TRAP JT -20.05 -20.05 -24.04 -24.04
743. 109 TRAP JT -20.05 -20.05 -24.04 -24.04
744. 110 TRAP JT -20.05 -20.05 -24.04 -24.04
745. 111 TRAP JT -20.05 -20.05 -24.04 -24.04
746. 112 TRAP JT -20.05 -20.05 -24.04 -24.04
747. 113 TRAP JT -20.05 -20.05 -24.04 -24.04
748. 114 TRAP JT -24.04 -24.04 -28.03 -28.03
749. 115 TRAP JT -24.04 -24.04 -28.03 -28.03
750. 116 TRAP JT -24.04 -24.04 -28.03 -28.03
751. 117 TRAP JT -24.04 -24.04 -28.03 -28.03
752. 118 TRAP JT -24.04 -24.04 -28.03 -28.03
753. 119 TRAP JT -24.04 -24.04 -28.03 -28.03
754. 120 TRAP JT -24.04 -24.04 -28.03 -28.03
755. 121 TRAP JT -24.04 -24.04 -28.03 -28.03
756. 122 TRAP JT -24.04 -24.04 -28.03 -28.03
757. 123 TRAP JT -24.04 -24.04 -28.03 -28.03
758. 124 TRAP JT -28.03 -28.03 -32.02 -32.02

759. 125 TRAP JT -28.03 -28.03 -32.02 -32.02
760. 126 TRAP JT -28.03 -28.03 -32.02 -32.02
761. 127 TRAP JT -28.03 -28.03 -32.02 -32.02
762. 128 TRAP JT -28.03 -28.03 -32.02 -32.02
763. 129 TRAP JT -28.03 -28.03 -32.02 -32.02
764. 130 TRAP JT -28.03 -28.03 -32.02 -32.02
765. 131 TRAP JT -28.03 -28.03 -32.02 -32.02
766. 132 TRAP JT -28.03 -28.03 -32.02 -32.02
767. 133 TRAP JT -28.03 -28.03 -32.02 -32.02
768. 134 TRAP JT -32.02 -32.02 -36.01 -36.01
769. 135 TRAP JT -32.02 -32.02 -36.01 -36.01
770. 136 TRAP JT -32.02 -32.02 -36.01 -36.01
771. 137 TRAP JT -32.02 -32.02 -36.01 -36.01
772. 138 TRAP JT -32.02 -32.02 -36.01 -36.01
773. 139 TRAP JT -32.02 -32.02 -36.01 -36.01
774. 140 TRAP JT -32.02 -32.02 -36.01 -36.01
775. 141 TRAP JT -32.02 -32.02 -36.01 -36.01
776. 142 TRAP JT -32.02 -32.02 -36.01 -36.01
777. 143 TRAP JT -32.02 -32.02 -36.01 -36.01
778. 144 TRAP JT -36.01 -36.01 -40 -40
779. 145 TRAP JT -36.01 -36.01 -40 -40
780. 146 TRAP JT -36.01 -36.01 -40 -40
781. 147 TRAP JT -36.01 -36.01 -40 -40
782. 148 TRAP JT -36.01 -36.01 -40 -40
783. 149 TRAP JT -36.01 -36.01 -40 -40
784. 150 TRAP JT -36.01 -36.01 -40 -40
785. 151 TRAP JT -36.01 -36.01 -40 -40
786. 152 TRAP JT -36.01 -36.01 -40 -40
787. 153 TRAP JT -36.01 -36.01 -40 -40
788. 168 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
789. 169 TRAP JT -4.09 -4.09 -8.08 -8.08
790. 170 TRAP JT -8.08 -8.08 -12.07 -12.07
791. 171 TRAP JT -12.07 -12.07 -16.06 -16.06
792. 172 TRAP JT -16.06 -16.06 -20.05 -20.05
793. 173 TRAP JT -20.05 -20.05 -24.04 -24.04
794. 174 TRAP JT -24.04 -24.04 -28.03 -28.03
795. 175 TRAP JT -28.03 -28.03 -32.02 -32.02
796. 176 TRAP JT -32.02 -32.02 -36.01 -36.01
797. 177 TRAP JT -36.01 -36.01 -40 -40
798. 178 TRAP JT -0.0999976 -0.0999976 -4.09 -4.09
799. 179 TRAP JT -4.09 -4.09 -8.08 -8.08
800. 180 TRAP JT -8.08 -8.08 -12.07 -12.07
801. 181 TRAP JT -12.07 -12.07 -16.06 -16.06
802. 182 TRAP JT -16.06 -16.06 -20.05 -20.05
803. 183 TRAP JT -20.05 -20.05 -24.04 -24.04
804. 184 TRAP JT -24.04 -24.04 -28.03 -28.03
805. 185 TRAP JT -28.03 -28.03 -32.02 -32.02
806. 186 TRAP JT -32.02 -32.02 -36.01 -36.01
807. 187 TRAP JT -36.01 -36.01 -40 -40
808. 872 TO 881 TRAP JT 0.0999976 0.0999976 40 40
809. 882 TO 891 TRAP JT 0.0999976 0.0999976 40 40
810. 588 TRAP JT 0.0999976 0.0999976 4.09 4.09
811. 589 TRAP JT 0.0999976 0.0999976 4.09 4.09
812. 590 TRAP JT 0.0999976 0.0999976 4.09 4.09
813. 591 TRAP JT 0.0999976 0.0999976 4.09 4.09
814. 592 TRAP JT 0.0999976 0.0999976 4.09 4.09

815. 593 TRAP JT 0.0999976 0.0999976 4.09 4.09
816. 594 TRAP JT 0.0999976 0.0999976 4.09 4.09
817. 595 TRAP JT 0.0999976 0.0999976 4.09 4.09
818. 596 TRAP JT 0.0999976 0.0999976 4.09 4.09
819. 597 TRAP JT 0.0999976 0.0999976 4.09 4.09
820. 598 TRAP JT 4.09 4.09 8.08 8.08
821. 599 TRAP JT 4.09 4.09 8.08 8.08
822. 600 TRAP JT 4.09 4.09 8.08 8.08
823. 601 TRAP JT 4.09 4.09 8.08 8.08
824. 602 TRAP JT 4.09 4.09 8.08 8.08
825. 603 TRAP JT 4.09 4.09 8.08 8.08
826. 604 TRAP JT 4.09 4.09 8.08 8.08
827. 605 TRAP JT 4.09 4.09 8.08 8.08
828. 606 TRAP JT 4.09 4.09 8.08 8.08
829. 607 TRAP JT 4.09 4.09 8.08 8.08
830. 608 TRAP JT 8.08 8.08 12.07 12.07
831. 609 TRAP JT 8.08 8.08 12.07 12.07
832. 610 TRAP JT 8.08 8.08 12.07 12.07
833. 611 TRAP JT 8.08 8.08 12.07 12.07
834. 612 TRAP JT 8.08 8.08 12.07 12.07
835. 613 TRAP JT 8.08 8.08 12.07 12.07
836. 614 TRAP JT 8.08 8.08 12.07 12.07
837. 615 TRAP JT 8.08 8.08 12.07 12.07
838. 616 TRAP JT 8.08 8.08 12.07 12.07
839. 617 TRAP JT 8.08 8.08 12.07 12.07
840. 618 TRAP JT 12.07 12.07 16.06 16.06
841. 619 TRAP JT 12.07 12.07 16.06 16.06
842. 620 TRAP JT 12.07 12.07 16.06 16.06
843. 621 TRAP JT 12.07 12.07 16.06 16.06
844. 622 TRAP JT 12.07 12.07 16.06 16.06
845. 623 TRAP JT 12.07 12.07 16.06 16.06
846. 624 TRAP JT 12.07 12.07 16.06 16.06
847. 625 TRAP JT 12.07 12.07 16.06 16.06
848. 626 TRAP JT 12.07 12.07 16.06 16.06
849. 627 TRAP JT 12.07 12.07 16.06 16.06
850. 628 TRAP JT 16.06 16.06 20.05 20.05
851. 629 TRAP JT 16.06 16.06 20.05 20.05
852. 630 TRAP JT 16.06 16.06 20.05 20.05
853. 631 TRAP JT 16.06 16.06 20.05 20.05
854. 632 TRAP JT 16.06 16.06 20.05 20.05
855. 633 TRAP JT 16.06 16.06 20.05 20.05
856. 634 TRAP JT 16.06 16.06 20.05 20.05
857. 635 TRAP JT 16.06 16.06 20.05 20.05
858. 636 TRAP JT 16.06 16.06 20.05 20.05
859. 637 TRAP JT 16.06 16.06 20.05 20.05
860. 638 TRAP JT 20.05 20.05 24.04 24.04
861. 639 TRAP JT 20.05 20.05 24.04 24.04
862. 640 TRAP JT 20.05 20.05 24.04 24.04
863. 641 TRAP JT 20.05 20.05 24.04 24.04
864. 642 TRAP JT 20.05 20.05 24.04 24.04
865. 643 TRAP JT 20.05 20.05 24.04 24.04
866. 644 TRAP JT 20.05 20.05 24.04 24.04
867. 645 TRAP JT 20.05 20.05 24.04 24.04
868. 646 TRAP JT 20.05 20.05 24.04 24.04
869. 647 TRAP JT 20.05 20.05 24.04 24.04
870. 648 TRAP JT 24.04 24.04 28.03 28.03

```
871. 649 TRAP JT 24.04 24.04 28.03 28.03
872. 650 TRAP JT 24.04 24.04 28.03 28.03
873. 651 TRAP JT 24.04 24.04 28.03 28.03
874. 652 TRAP JT 24.04 24.04 28.03 28.03
875. 653 TRAP JT 24.04 24.04 28.03 28.03
876. 654 TRAP JT 24.04 24.04 28.03 28.03
877. 655 TRAP JT 24.04 24.04 28.03 28.03
878. 656 TRAP JT 24.04 24.04 28.03 28.03
879. 657 TRAP JT 24.04 24.04 28.03 28.03
880. 658 TRAP JT 28.03 28.03 32.02 32.02
881. 659 TRAP JT 28.03 28.03 32.02 32.02
882. 660 TRAP JT 28.03 28.03 32.02 32.02
883. 661 TRAP JT 28.03 28.03 32.02 32.02
884. 662 TRAP JT 28.03 28.03 32.02 32.02
885. 663 TRAP JT 28.03 28.03 32.02 32.02
886. 664 TRAP JT 28.03 28.03 32.02 32.02
887. 665 TRAP JT 28.03 28.03 32.02 32.02
888. 666 TRAP JT 28.03 28.03 32.02 32.02
889. 667 TRAP JT 28.03 28.03 32.02 32.02
890. 668 TRAP JT 32.02 32.02 36.01 36.01
891. 669 TRAP JT 32.02 32.02 36.01 36.01
892. 670 TRAP JT 32.02 32.02 36.01 36.01
893. 671 TRAP JT 32.02 32.02 36.01 36.01
894. 672 TRAP JT 32.02 32.02 36.01 36.01
895. 673 TRAP JT 32.02 32.02 36.01 36.01
896. 674 TRAP JT 32.02 32.02 36.01 36.01
897. 675 TRAP JT 32.02 32.02 36.01 36.01
898. 676 TRAP JT 32.02 32.02 36.01 36.01
899. 677 TRAP JT 32.02 32.02 36.01 36.01
900. 678 TRAP JT 36.01 36.01 40 40
901. 679 TRAP JT 36.01 36.01 40 40
902. 680 TRAP JT 36.01 36.01 40 40
903. 681 TRAP JT 36.01 36.01 40 40
904. 682 TRAP JT 36.01 36.01 40 40
905. 683 TRAP JT 36.01 36.01 40 40
906. 684 TRAP JT 36.01 36.01 40 40
907. 685 TRAP JT 36.01 36.01 40 40
908. 686 TRAP JT 36.01 36.01 40 40
909. 687 TRAP JT 36.01 36.01 40 40
910. 702 TO 709 712 TO 719 724 TO 771 782 TO 831 842 TO 871 PR GY -40
911. LOAD 4 LOADTYPE SOIL  TITLE SOIL PRESSURE
912. ELEMENT LOAD
913. 409 TRAP JT 0.0999977 0.0999977 3.69 3.69
914. 410 TRAP JT 0.0999977 0.0999977 3.69 3.69
915. 411 TRAP JT 0.0999977 0.0999977 3.69 3.69
916. 412 TRAP JT 0.0999977 0.0999977 3.69 3.69
917. 413 TRAP JT 0.0999977 0.0999977 3.69 3.69
918. 414 TRAP JT 0.0999977 0.0999977 3.69 3.69
919. 415 TRAP JT 0.0999977 0.0999977 3.69 3.69
920. 416 TRAP JT 0.0999977 0.0999977 3.69 3.69
921. 417 TRAP JT 0.0999977 0.0999977 3.69 3.69
922. 418 TRAP JT 3.69 3.69 7.28 7.28
923. 419 TRAP JT 3.69 3.69 7.28 7.28
924. 420 TRAP JT 3.69 3.69 7.28 7.28
925. 421 TRAP JT 3.69 3.69 7.28 7.28
926. 422 TRAP JT 3.69 3.69 7.28 7.28
```

927. 423 TRAP JT 3.69 3.69 7.28 7.28
928. 424 TRAP JT 3.69 3.69 7.28 7.28
929. 425 TRAP JT 3.69 3.69 7.28 7.28
930. 426 TRAP JT 3.69 3.69 7.28 7.28
931. 427 TRAP JT 3.69 3.69 7.28 7.28
932. 428 TRAP JT 7.28 7.28 10.87 10.87
933. 429 TRAP JT 7.28 7.28 10.87 10.87
934. 430 TRAP JT 7.28 7.28 10.87 10.87
935. 431 TRAP JT 7.28 7.28 10.87 10.87
936. 432 TRAP JT 7.28 7.28 10.87 10.87
937. 433 TRAP JT 7.28 7.28 10.87 10.87
938. 434 TRAP JT 7.28 7.28 10.87 10.87
939. 435 TRAP JT 7.28 7.28 10.87 10.87
940. 436 TRAP JT 7.28 7.28 10.87 10.87
941. 437 TRAP JT 7.28 7.28 10.87 10.87
942. 438 TRAP JT 10.87 10.87 14.46 14.46
943. 439 TRAP JT 10.87 10.87 14.46 14.46
944. 440 TRAP JT 10.87 10.87 14.46 14.46
945. 441 TRAP JT 10.87 10.87 14.46 14.46
946. 442 TRAP JT 10.87 10.87 14.46 14.46
947. 443 TRAP JT 10.87 10.87 14.46 14.46
948. 444 TRAP JT 10.87 10.87 14.46 14.46
949. 445 TRAP JT 10.87 10.87 14.46 14.46
950. 446 TRAP JT 10.87 10.87 14.46 14.46
951. 447 TRAP JT 10.87 10.87 14.46 14.46
952. 448 TRAP JT 14.46 14.46 18.05 18.05
953. 449 TRAP JT 14.46 14.46 18.05 18.05
954. 450 TRAP JT 14.46 14.46 18.05 18.05
955. 451 TRAP JT 14.46 14.46 18.05 18.05
956. 452 TRAP JT 14.46 14.46 18.05 18.05
957. 453 TRAP JT 14.46 14.46 18.05 18.05
958. 454 TRAP JT 14.46 14.46 18.05 18.05
959. 455 TRAP JT 14.46 14.46 18.05 18.05
960. 456 TRAP JT 14.46 14.46 18.05 18.05
961. 457 TRAP JT 14.46 14.46 18.05 18.05
962. 458 TRAP JT 18.05 18.05 21.64 21.64
963. 459 TRAP JT 18.05 18.05 21.64 21.64
964. 460 TRAP JT 18.05 18.05 21.64 21.64
965. 461 TRAP JT 18.05 18.05 21.64 21.64
966. 462 TRAP JT 18.05 18.05 21.64 21.64
967. 463 TRAP JT 18.05 18.05 21.64 21.64
968. 464 TRAP JT 18.05 18.05 21.64 21.64
969. 465 TRAP JT 18.05 18.05 21.64 21.64
970. 466 TRAP JT 18.05 18.05 21.64 21.64
971. 467 TRAP JT 18.05 18.05 21.64 21.64
972. 468 TRAP JT 21.64 21.64 25.23 25.23
973. 469 TRAP JT 21.64 21.64 25.23 25.23
974. 470 TRAP JT 21.64 21.64 25.23 25.23
975. 471 TRAP JT 21.64 21.64 25.23 25.23
976. 472 TRAP JT 21.64 21.64 25.23 25.23
977. 473 TRAP JT 21.64 21.64 25.23 25.23
978. 474 TRAP JT 21.64 21.64 25.23 25.23
979. 475 TRAP JT 21.64 21.64 25.23 25.23
980. 476 TRAP JT 21.64 21.64 25.23 25.23
981. 477 TRAP JT 21.64 21.64 25.23 25.23
982. 478 TRAP JT 25.23 25.23 28.82 28.82

```
 983. 479 TRAP JT 25.23 25.23 28.82 28.82
 984. 480 TRAP JT 25.23 25.23 28.82 28.82
 985. 481 TRAP JT 25.23 25.23 28.82 28.82
 986. 482 TRAP JT 25.23 25.23 28.82 28.82
 987. 483 TRAP JT 25.23 25.23 28.82 28.82
 988. 484 TRAP JT 25.23 25.23 28.82 28.82
 989. 485 TRAP JT 25.23 25.23 28.82 28.82
 990. 486 TRAP JT 25.23 25.23 28.82 28.82
 991. 487 TRAP JT 25.23 25.23 28.82 28.82
 992. 488 TRAP JT 28.82 28.82 32.41 32.41
 993. 489 TRAP JT 28.82 28.82 32.41 32.41
 994. 490 TRAP JT 28.82 28.82 32.41 32.41
 995. 491 TRAP JT 28.82 28.82 32.41 32.41
 996. 492 TRAP JT 28.82 28.82 32.41 32.41
 997. 493 TRAP JT 28.82 28.82 32.41 32.41
 998. 494 TRAP JT 28.82 28.82 32.41 32.41
 999. 495 TRAP JT 28.82 28.82 32.41 32.41
1000. 496 TRAP JT 28.82 28.82 32.41 32.41
1001. 497 TRAP JT 28.82 28.82 32.41 32.41
1002. 498 TRAP JT 32.41 32.41 36 36
1003. 499 TRAP JT 32.41 32.41 36 36
1004. 500 TRAP JT 32.41 32.41 36 36
1005. 501 TRAP JT 32.41 32.41 36 36
1006. 502 TRAP JT 32.41 32.41 36 36
1007. 503 TRAP JT 32.41 32.41 36 36
1008. 504 TRAP JT 32.41 32.41 36 36
1009. 505 TRAP JT 32.41 32.41 36 36
1010. 506 TRAP JT 32.41 32.41 36 36
1011. 507 TRAP JT 32.41 32.41 36 36
1012. 408 TRAP JT 0.0999977 0.0999977 3.69 3.69
1013. 308 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1014. 309 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1015. 310 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1016. 311 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1017. 312 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1018. 313 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1019. 314 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1020. 315 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1021. 316 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1022. 317 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1023. 318 TRAP JT -3.69 -3.69 -7.28 -7.28
1024. 319 TRAP JT -3.69 -3.69 -7.28 -7.28
1025. 320 TRAP JT -3.69 -3.69 -7.28 -7.28
1026. 321 TRAP JT -3.69 -3.69 -7.28 -7.28
1027. 322 TRAP JT -3.69 -3.69 -7.28 -7.28
1028. 323 TRAP JT -3.69 -3.69 -7.28 -7.28
1029. 324 TRAP JT -3.69 -3.69 -7.28 -7.28
1030. 325 TRAP JT -3.69 -3.69 -7.28 -7.28
1031. 326 TRAP JT -3.69 -3.69 -7.28 -7.28
1032. 327 TRAP JT -3.69 -3.69 -7.28 -7.28
1033. 328 TRAP JT -7.28 -7.28 -10.87 -10.87
1034. 329 TRAP JT -7.28 -7.28 -10.87 -10.87
1035. 330 TRAP JT -7.28 -7.28 -10.87 -10.87
1036. 331 TRAP JT -7.28 -7.28 -10.87 -10.87
1037. 332 TRAP JT -7.28 -7.28 -10.87 -10.87
1038. 333 TRAP JT -7.28 -7.28 -10.87 -10.87
```

1039. 334 TRAP JT -7.28 -7.28 -10.87 -10.87
1040. 335 TRAP JT -7.28 -7.28 -10.87 -10.87
1041. 336 TRAP JT -7.28 -7.28 -10.87 -10.87
1042. 337 TRAP JT -7.28 -7.28 -10.87 -10.87
1043. 338 TRAP JT -10.87 -10.87 -14.46 -14.46
1044. 339 TRAP JT -10.87 -10.87 -14.46 -14.46
1045. 340 TRAP JT -10.87 -10.87 -14.46 -14.46
1046. 341 TRAP JT -10.87 -10.87 -14.46 -14.46
1047. 342 TRAP JT -10.87 -10.87 -14.46 -14.46
1048. 343 TRAP JT -10.87 -10.87 -14.46 -14.46
1049. 344 TRAP JT -10.87 -10.87 -14.46 -14.46
1050. 345 TRAP JT -10.87 -10.87 -14.46 -14.46
1051. 346 TRAP JT -10.87 -10.87 -14.46 -14.46
1052. 347 TRAP JT -10.87 -10.87 -14.46 -14.46
1053. 348 TRAP JT -14.46 -14.46 -18.05 -18.05
1054. 349 TRAP JT -14.46 -14.46 -18.05 -18.05
1055. 350 TRAP JT -14.46 -14.46 -18.05 -18.05
1056. 351 TRAP JT -14.46 -14.46 -18.05 -18.05
1057. 352 TRAP JT -14.46 -14.46 -18.05 -18.05
1058. 353 TRAP JT -14.46 -14.46 -18.05 -18.05
1059. 354 TRAP JT -14.46 -14.46 -18.05 -18.05
1060. 355 TRAP JT -14.46 -14.46 -18.05 -18.05
1061. 356 TRAP JT -14.46 -14.46 -18.05 -18.05
1062. 357 TRAP JT -14.46 -14.46 -18.05 -18.05
1063. 358 TRAP JT -18.05 -18.05 -21.64 -21.64
1064. 359 TRAP JT -18.05 -18.05 -21.64 -21.64
1065. 360 TRAP JT -18.05 -18.05 -21.64 -21.64
1066. 361 TRAP JT -18.05 -18.05 -21.64 -21.64
1067. 362 TRAP JT -18.05 -18.05 -21.64 -21.64
1068. 363 TRAP JT -18.05 -18.05 -21.64 -21.64
1069. 364 TRAP JT -18.05 -18.05 -21.64 -21.64
1070. 365 TRAP JT -18.05 -18.05 -21.64 -21.64
1071. 366 TRAP JT -18.05 -18.05 -21.64 -21.64
1072. 367 TRAP JT -18.05 -18.05 -21.64 -21.64
1073. 368 TRAP JT -21.64 -21.64 -25.23 -25.23
1074. 369 TRAP JT -21.64 -21.64 -25.23 -25.23
1075. 370 TRAP JT -21.64 -21.64 -25.23 -25.23
1076. 371 TRAP JT -21.64 -21.64 -25.23 -25.23
1077. 372 TRAP JT -21.64 -21.64 -25.23 -25.23
1078. 373 TRAP JT -21.64 -21.64 -25.23 -25.23
1079. 374 TRAP JT -21.64 -21.64 -25.23 -25.23
1080. 375 TRAP JT -21.64 -21.64 -25.23 -25.23
1081. 376 TRAP JT -21.64 -21.64 -25.23 -25.23
1082. 377 TRAP JT -21.64 -21.64 -25.23 -25.23
1083. 378 TRAP JT -25.23 -25.23 -28.82 -28.82
1084. 379 TRAP JT -25.23 -25.23 -28.82 -28.82
1085. 380 TRAP JT -25.23 -25.23 -28.82 -28.82
1086. 381 TRAP JT -25.23 -25.23 -28.82 -28.82
1087. 382 TRAP JT -25.23 -25.23 -28.82 -28.82
1088. 383 TRAP JT -25.23 -25.23 -28.82 -28.82
1089. 384 TRAP JT -25.23 -25.23 -28.82 -28.82
1090. 385 TRAP JT -25.23 -25.23 -28.82 -28.82
1091. 386 TRAP JT -25.23 -25.23 -28.82 -28.82
1092. 387 TRAP JT -25.23 -25.23 -28.82 -28.82
1093. 388 TRAP JT -28.82 -28.82 -32.41 -32.41
1094. 389 TRAP JT -28.82 -28.82 -32.41 -32.41

```
1095. 390 TRAP JT -28.82 -28.82 -32.41 -32.41
1096. 391 TRAP JT -28.82 -28.82 -32.41 -32.41
1097. 392 TRAP JT -28.82 -28.82 -32.41 -32.41
1098. 393 TRAP JT -28.82 -28.82 -32.41 -32.41
1099. 394 TRAP JT -28.82 -28.82 -32.41 -32.41
1100. 395 TRAP JT -28.82 -28.82 -32.41 -32.41
1101. 396 TRAP JT -28.82 -28.82 -32.41 -32.41
1102. 397 TRAP JT -28.82 -28.82 -32.41 -32.41
1103. 398 TRAP JT -32.41 -32.41 -36 -36
1104. 399 TRAP JT -32.41 -32.41 -36 -36
1105. 400 TRAP JT -32.41 -32.41 -36 -36
1106. 401 TRAP JT -32.41 -32.41 -36 -36
1107. 402 TRAP JT -32.41 -32.41 -36 -36
1108. 403 TRAP JT -32.41 -32.41 -36 -36
1109. 404 TRAP JT -32.41 -32.41 -36 -36
1110. 405 TRAP JT -32.41 -32.41 -36 -36
1111. 406 TRAP JT -32.41 -32.41 -36 -36
1112. 407 TRAP JT -32.41 -32.41 -36 -36
1113. 872 TO 881 TRAP JT 0.0999977 0.0999977 36 36
1114. 882 TO 891 TRAP JT 0.0999977 0.0999977 36 36
1115. 588 TRAP JT 0.0999977 0.0999977 3.69 3.69
1116. 589 TRAP JT 0.0999977 0.0999977 3.69 3.69
1117. 590 TRAP JT 0.0999977 0.0999977 3.69 3.69
1118. 591 TRAP JT 0.0999977 0.0999977 3.69 3.69
1119. 592 TRAP JT 0.0999977 0.0999977 3.69 3.69
1120. 593 TRAP JT 0.0999977 0.0999977 3.69 3.69
1121. 594 TRAP JT 0.0999977 0.0999977 3.69 3.69
1122. 595 TRAP JT 0.0999977 0.0999977 3.69 3.69
1123. 596 TRAP JT 0.0999977 0.0999977 3.69 3.69
1124. 597 TRAP JT 0.0999977 0.0999977 3.69 3.69
1125. 598 TRAP JT 3.69 3.69 7.28 7.28
1126. 599 TRAP JT 3.69 3.69 7.28 7.28
1127. 600 TRAP JT 3.69 3.69 7.28 7.28
1128. 601 TRAP JT 3.69 3.69 7.28 7.28
1129. 602 TRAP JT 3.69 3.69 7.28 7.28
1130. 603 TRAP JT 3.69 3.69 7.28 7.28
1131. 604 TRAP JT 3.69 3.69 7.28 7.28
1132. 605 TRAP JT 3.69 3.69 7.28 7.28
1133. 606 TRAP JT 3.69 3.69 7.28 7.28
1134. 607 TRAP JT 3.69 3.69 7.28 7.28
1135. 608 TRAP JT 7.28 7.28 10.87 10.87
1136. 609 TRAP JT 7.28 7.28 10.87 10.87
1137. 610 TRAP JT 7.28 7.28 10.87 10.87
1138. 611 TRAP JT 7.28 7.28 10.87 10.87
1139. 612 TRAP JT 7.28 7.28 10.87 10.87
1140. 613 TRAP JT 7.28 7.28 10.87 10.87
1141. 614 TRAP JT 7.28 7.28 10.87 10.87
1142. 615 TRAP JT 7.28 7.28 10.87 10.87
1143. 616 TRAP JT 7.28 7.28 10.87 10.87
1144. 617 TRAP JT 7.28 7.28 10.87 10.87
1145. 618 TRAP JT 10.87 10.87 14.46 14.46
1146. 619 TRAP JT 10.87 10.87 14.46 14.46
1147. 620 TRAP JT 10.87 10.87 14.46 14.46
1148. 621 TRAP JT 10.87 10.87 14.46 14.46
1149. 622 TRAP JT 10.87 10.87 14.46 14.46
1150. 623 TRAP JT 10.87 10.87 14.46 14.46
```

```
1151. 624 TRAP JT 10.87 10.87 14.46 14.46
1152. 625 TRAP JT 10.87 10.87 14.46 14.46
1153. 626 TRAP JT 10.87 10.87 14.46 14.46
1154. 627 TRAP JT 10.87 10.87 14.46 14.46
1155. 628 TRAP JT 14.46 14.46 18.05 18.05
1156. 629 TRAP JT 14.46 14.46 18.05 18.05
1157. 630 TRAP JT 14.46 14.46 18.05 18.05
1158. 631 TRAP JT 14.46 14.46 18.05 18.05
1159. 632 TRAP JT 14.46 14.46 18.05 18.05
1160. 633 TRAP JT 14.46 14.46 18.05 18.05
1161. 634 TRAP JT 14.46 14.46 18.05 18.05
1162. 635 TRAP JT 14.46 14.46 18.05 18.05
1163. 636 TRAP JT 14.46 14.46 18.05 18.05
1164. 637 TRAP JT 14.46 14.46 18.05 18.05
1165. 638 TRAP JT 18.05 18.05 21.64 21.64
1166. 639 TRAP JT 18.05 18.05 21.64 21.64
1167. 640 TRAP JT 18.05 18.05 21.64 21.64
1168. 641 TRAP JT 18.05 18.05 21.64 21.64
1169. 642 TRAP JT 18.05 18.05 21.64 21.64
1170. 643 TRAP JT 18.05 18.05 21.64 21.64
1171. 644 TRAP JT 18.05 18.05 21.64 21.64
1172. 645 TRAP JT 18.05 18.05 21.64 21.64
1173. 646 TRAP JT 18.05 18.05 21.64 21.64
1174. 647 TRAP JT 18.05 18.05 21.64 21.64
1175. 648 TRAP JT 21.64 21.64 25.23 25.23
1176. 649 TRAP JT 21.64 21.64 25.23 25.23
1177. 650 TRAP JT 21.64 21.64 25.23 25.23
1178. 651 TRAP JT 21.64 21.64 25.23 25.23
1179. 652 TRAP JT 21.64 21.64 25.23 25.23
1180. 653 TRAP JT 21.64 21.64 25.23 25.23
1181. 654 TRAP JT 21.64 21.64 25.23 25.23
1182. 655 TRAP JT 21.64 21.64 25.23 25.23
1183. 656 TRAP JT 21.64 21.64 25.23 25.23
1184. 657 TRAP JT 21.64 21.64 25.23 25.23
1185. 658 TRAP JT 25.23 25.23 28.82 28.82
1186. 659 TRAP JT 25.23 25.23 28.82 28.82
1187. 660 TRAP JT 25.23 25.23 28.82 28.82
1188. 661 TRAP JT 25.23 25.23 28.82 28.82
1189. 662 TRAP JT 25.23 25.23 28.82 28.82
1190. 663 TRAP JT 25.23 25.23 28.82 28.82
1191. 664 TRAP JT 25.23 25.23 28.82 28.82
1192. 665 TRAP JT 25.23 25.23 28.82 28.82
1193. 666 TRAP JT 25.23 25.23 28.82 28.82
1194. 667 TRAP JT 25.23 25.23 28.82 28.82
1195. 668 TRAP JT 28.82 28.82 32.41 32.41
1196. 669 TRAP JT 28.82 28.82 32.41 32.41
1197. 670 TRAP JT 28.82 28.82 32.41 32.41
1198. 671 TRAP JT 28.82 28.82 32.41 32.41
1199. 672 TRAP JT 28.82 28.82 32.41 32.41
1200. 673 TRAP JT 28.82 28.82 32.41 32.41
1201. 674 TRAP JT 28.82 28.82 32.41 32.41
1202. 675 TRAP JT 28.82 28.82 32.41 32.41
1203. 676 TRAP JT 28.82 28.82 32.41 32.41
1204. 677 TRAP JT 28.82 28.82 32.41 32.41
1205. 678 TRAP JT 32.41 32.41 36 36
1206. 679 TRAP JT 32.41 32.41 36 36
```

1207. 680 TRAP JT 32.41 32.41 36 36
1208. 681 TRAP JT 32.41 32.41 36 36
1209. 682 TRAP JT 32.41 32.41 36 36
1210. 683 TRAP JT 32.41 32.41 36 36
1211. 684 TRAP JT 32.41 32.41 36 36
1212. 685 TRAP JT 32.41 32.41 36 36
1213. 686 TRAP JT 32.41 32.41 36 36
1214. 687 TRAP JT 32.41 32.41 36 36
1215. 54 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1216. 55 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1217. 56 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1218. 57 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1219. 58 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1220. 59 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1221. 60 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1222. 61 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1223. 62 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1224. 63 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1225. 64 TRAP JT -3.69 -3.69 -7.28 -7.28
1226. 65 TRAP JT -3.69 -3.69 -7.28 -7.28
1227. 66 TRAP JT -3.69 -3.69 -7.28 -7.28
1228. 67 TRAP JT -3.69 -3.69 -7.28 -7.28
1229. 68 TRAP JT -3.69 -3.69 -7.28 -7.28
1230. 69 TRAP JT -3.69 -3.69 -7.28 -7.28
1231. 70 TRAP JT -3.69 -3.69 -7.28 -7.28
1232. 71 TRAP JT -3.69 -3.69 -7.28 -7.28
1233. 72 TRAP JT -3.69 -3.69 -7.28 -7.28
1234. 73 TRAP JT -3.69 -3.69 -7.28 -7.28
1235. 74 TRAP JT -7.28 -7.28 -10.87 -10.87
1236. 75 TRAP JT -7.28 -7.28 -10.87 -10.87
1237. 76 TRAP JT -7.28 -7.28 -10.87 -10.87
1238. 77 TRAP JT -7.28 -7.28 -10.87 -10.87
1239. 78 TRAP JT -7.28 -7.28 -10.87 -10.87
1240. 79 TRAP JT -7.28 -7.28 -10.87 -10.87
1241. 80 TRAP JT -7.28 -7.28 -10.87 -10.87
1242. 81 TRAP JT -7.28 -7.28 -10.87 -10.87
1243. 82 TRAP JT -7.28 -7.28 -10.87 -10.87
1244. 83 TRAP JT -7.28 -7.28 -10.87 -10.87
1245. 84 TRAP JT -10.87 -10.87 -14.46 -14.46
1246. 85 TRAP JT -10.87 -10.87 -14.46 -14.46
1247. 86 TRAP JT -10.87 -10.87 -14.46 -14.46
1248. 87 TRAP JT -10.87 -10.87 -14.46 -14.46
1249. 88 TRAP JT -10.87 -10.87 -14.46 -14.46
1250. 89 TRAP JT -10.87 -10.87 -14.46 -14.46
1251. 90 TRAP JT -10.87 -10.87 -14.46 -14.46
1252. 91 TRAP JT -10.87 -10.87 -14.46 -14.46
1253. 92 TRAP JT -10.87 -10.87 -14.46 -14.46
1254. 93 TRAP JT -10.87 -10.87 -14.46 -14.46
1255. 94 TRAP JT -14.46 -14.46 -18.05 -18.05
1256. 95 TRAP JT -14.46 -14.46 -18.05 -18.05
1257. 96 TRAP JT -14.46 -14.46 -18.05 -18.05
1258. 97 TRAP JT -14.46 -14.46 -18.05 -18.05
1259. 98 TRAP JT -14.46 -14.46 -18.05 -18.05
1260. 99 TRAP JT -14.46 -14.46 -18.05 -18.05
1261. 100 TRAP JT -14.46 -14.46 -18.05 -18.05
1262. 101 TRAP JT -14.46 -14.46 -18.05 -18.05

```
1263. 102 TRAP JT -14.46 -14.46 -18.05 -18.05
1264. 103 TRAP JT -14.46 -14.46 -18.05 -18.05
1265. 104 TRAP JT -18.05 -18.05 -21.64 -21.64
1266. 105 TRAP JT -18.05 -18.05 -21.64 -21.64
1267. 106 TRAP JT -18.05 -18.05 -21.64 -21.64
1268. 107 TRAP JT -18.05 -18.05 -21.64 -21.64
1269. 108 TRAP JT -18.05 -18.05 -21.64 -21.64
1270. 109 TRAP JT -18.05 -18.05 -21.64 -21.64
1271. 110 TRAP JT -18.05 -18.05 -21.64 -21.64
1272. 111 TRAP JT -18.05 -18.05 -21.64 -21.64
1273. 112 TRAP JT -18.05 -18.05 -21.64 -21.64
1274. 113 TRAP JT -18.05 -18.05 -21.64 -21.64
1275. 114 TRAP JT -21.64 -21.64 -25.23 -25.23
1276. 115 TRAP JT -21.64 -21.64 -25.23 -25.23
1277. 116 TRAP JT -21.64 -21.64 -25.23 -25.23
1278. 117 TRAP JT -21.64 -21.64 -25.23 -25.23
1279. 118 TRAP JT -21.64 -21.64 -25.23 -25.23
1280. 119 TRAP JT -21.64 -21.64 -25.23 -25.23
1281. 120 TRAP JT -21.64 -21.64 -25.23 -25.23
1282. 121 TRAP JT -21.64 -21.64 -25.23 -25.23
1283. 122 TRAP JT -21.64 -21.64 -25.23 -25.23
1284. 123 TRAP JT -21.64 -21.64 -25.23 -25.23
1285. 124 TRAP JT -25.23 -25.23 -28.82 -28.82
1286. 125 TRAP JT -25.23 -25.23 -28.82 -28.82
1287. 126 TRAP JT -25.23 -25.23 -28.82 -28.82
1288. 127 TRAP JT -25.23 -25.23 -28.82 -28.82
1289. 128 TRAP JT -25.23 -25.23 -28.82 -28.82
1290. 129 TRAP JT -25.23 -25.23 -28.82 -28.82
1291. 130 TRAP JT -25.23 -25.23 -28.82 -28.82
1292. 131 TRAP JT -25.23 -25.23 -28.82 -28.82
1293. 132 TRAP JT -25.23 -25.23 -28.82 -28.82
1294. 133 TRAP JT -25.23 -25.23 -28.82 -28.82
1295. 134 TRAP JT -28.82 -28.82 -32.41 -32.41
1296. 135 TRAP JT -28.82 -28.82 -32.41 -32.41
1297. 136 TRAP JT -28.82 -28.82 -32.41 -32.41
1298. 137 TRAP JT -28.82 -28.82 -32.41 -32.41
1299. 138 TRAP JT -28.82 -28.82 -32.41 -32.41
1300. 139 TRAP JT -28.82 -28.82 -32.41 -32.41
1301. 140 TRAP JT -28.82 -28.82 -32.41 -32.41
1302. 141 TRAP JT -28.82 -28.82 -32.41 -32.41
1303. 142 TRAP JT -28.82 -28.82 -32.41 -32.41
1304. 143 TRAP JT -28.82 -28.82 -32.41 -32.41
1305. 144 TRAP JT -32.41 -32.41 -36 -36
1306. 145 TRAP JT -32.41 -32.41 -36 -36
1307. 146 TRAP JT -32.41 -32.41 -36 -36
1308. 147 TRAP JT -32.41 -32.41 -36 -36
1309. 148 TRAP JT -32.41 -32.41 -36 -36
1310. 149 TRAP JT -32.41 -32.41 -36 -36
1311. 150 TRAP JT -32.41 -32.41 -36 -36
1312. 151 TRAP JT -32.41 -32.41 -36 -36
1313. 152 TRAP JT -32.41 -32.41 -36 -36
1314. 153 TRAP JT -32.41 -32.41 -36 -36
1315. 168 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1316. 169 TRAP JT -3.69 -3.69 -7.28 -7.28
1317. 170 TRAP JT -7.28 -7.28 -10.87 -10.87
1318. 171 TRAP JT -10.87 -10.87 -14.46 -14.46
```

```
1319. 172 TRAP JT -14.46 -14.46 -18.05 -18.05
1320. 173 TRAP JT -18.05 -18.05 -21.64 -21.64
1321. 174 TRAP JT -21.64 -21.64 -25.23 -25.23
1322. 175 TRAP JT -25.23 -25.23 -28.82 -28.82
1323. 176 TRAP JT -28.82 -28.82 -32.41 -32.41
1324. 177 TRAP JT -32.41 -32.41 -36 -36
1325. 178 TRAP JT -0.0999977 -0.0999977 -3.69 -3.69
1326. 179 TRAP JT -3.69 -3.69 -7.28 -7.28
1327. 180 TRAP JT -7.28 -7.28 -10.87 -10.87
1328. 181 TRAP JT -10.87 -10.87 -14.46 -14.46
1329. 182 TRAP JT -14.46 -14.46 -18.05 -18.05
1330. 183 TRAP JT -18.05 -18.05 -21.64 -21.64
1331. 184 TRAP JT -21.64 -21.64 -25.23 -25.23
1332. 185 TRAP JT -25.23 -25.23 -28.82 -28.82
1333. 186 TRAP JT -28.82 -28.82 -32.41 -32.41
1334. 187 TRAP JT -32.41 -32.41 -36 -36
1335. 408 TO 507 588 TO 687 872 TO 891 PR -5
1336. 54 TO 153 168 TO 187 308 TO 407 PR 5
1337. ******FACTORED LOAD COMBINATIONS*****
1338. LOAD COMB 101 1.4*(D+F)
1339. 1 1.4 3 1.4
1340. LOAD COMB 102 1.2*(D+F)+1.6*(L+H)
1341. 1 1.2 3 1.2 2 1.6 4 1.6
1342. LOAD COMB 103 1.4*(D+H)
1343. 1 1.4 4 1.4
1344. ******UNFACTORED LOAD COMBINATIONS*****
1345. LOAD COMB 201 1.0*(D+F)
1346. 1 1.0 3 1.0
1347. LOAD COMB 202 1.0*(D+F)+1.0*(L+H)
1348. 1 1.0 3 1.0 2 1.0 4 1.0
1349. LOAD COMB 203 1.0*(D+H)
1350. 1 1.0 4 1.0
1351. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**796**	**NUMBER OF MEMBERS**	**0**
NUMBER OF PLATES	**790**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**169**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 777/ 50/ 306 DOF
TOTAL PRIMARY LOAD CASES = 4, TOTAL DEGREES OF FREEDOM = 4269
TOTAL LOAD COMBINATION CASES = 6 SO FAR.
SIZE OF STIFFNESS MATRIX = 1307 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 30.3/ 324018.9 MB

```
1352. LOAD LIST 101 TO 103
1353. START CONCRETE DESIGN
```

```
1354. CODE ACI
1355. FC 35000 ALL
1356. CLB 0.05 ALL
1357. CLS 0.05 ALL
1358. CLT 0.05 ALL
1359. MINSEC 10 ALL
1360. MAXMAIN 20 ALL
1361. FYMAIN 420000 ALL
1362. DESIGN ELEMENT 13 16 34 TO 153 164 TO 507 528 TO 687 702 TO 709 712 TO 719 -
1363. 724 TO 771 782 TO 831 842 TO 891
```

ACI 318-11 ELEMENT DESIGN SUMMARY
==========

ELEMENT	LONG. REINF (SQ.MM/MM)	MOM-X /LOAD (KN-MM/MM)	TRANS. REINF (SQ.MM/MM)	MOM-Y /LOAD (KN-MM/MM)
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
13	TOP : Longitudinal direction - Only minimum steel required.			
13	BOTT: Longitudinal direction - Only minimum steel required.			
13	TOP : Transverse direction - Only minimum steel required.			
13	BOTT: Transverse direction - Only minimum steel required.			
13	TOP : 0.355	0.00 / 0	0.355	0.00 / 0
	BOTT: 0.355	12.09 / 102	0.355	1.10 / 102
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
16	TOP : Longitudinal direction - Only minimum steel required.			
16	BOTT: Longitudinal direction - Only minimum steel required.			
16	TOP : Transverse direction - Only minimum steel required.			
16	BOTT: Transverse direction - Only minimum steel required.			
16	TOP : 0.355	0.00 / 0	0.355	0.00 / 0
	BOTT: 0.355	12.09 / 102	0.355	1.10 / 102
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
34	TOP : Longitudinal direction - Only minimum steel required.			
34	BOTT: Longitudinal direction - Only minimum steel required.			
34	TOP : Transverse direction - Only minimum steel required.			
34	BOTT: Transverse direction - Only minimum steel required.			
34	TOP : 0.355	7.47 / 102	0.355	0.00 / 0
	BOTT: 0.355	0.00 / 102	0.355	0.95 / 102
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
35	TOP : Longitudinal direction - Only minimum steel required.			
35	BOTT: Longitudinal direction - Only minimum steel required.			
35	TOP : Transverse direction - Only minimum steel required.			
35	BOTT: Transverse direction - Only minimum steel required.			
35	TOP : 0.355	1.19 / 102	0.355	0.00 / 0
	BOTT: 0.355	0.00 / 102	0.355	6.85 / 102
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
36	TOP : Longitudinal direction - Only minimum steel required.			
36	BOTT: Longitudinal direction - Only minimum steel required.			
36	TOP : Transverse direction - Only minimum steel required.			
36	BOTT: Transverse direction - Only minimum steel required.			
36	TOP : 0.355	0.00 / 102	0.355	0.00 / 0
	BOTT: 0.355	4.34 / 102	0.355	12.92 / 102
	FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM			
	COVER (BOTTOM): 50.000 MM TH: 400.000 MM			
37	TOP : Longitudinal direction - Only minimum steel required.			
37	BOTT: Longitudinal direction - Only minimum steel required.			
37	TOP : Transverse direction - Only minimum steel required.			

```
 37 BOTT: Transverse direction   - Only minimum steel required.
 37 TOP :     0.355         0.00 /  102       0.355          0.00 /    0
    BOTT:     0.355         7.88 /  102       0.355         17.37 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 38 TOP : Longitudinal direction - Only minimum steel required.
 38 BOTT: Longitudinal direction - Only minimum steel required.
 38 TOP : Transverse direction   - Only minimum steel required.
 38 BOTT: Transverse direction   - Only minimum steel required.
 38 TOP :     0.355         0.00 /  102       0.355          0.00 /    0
    BOTT:     0.355         9.54 /  102       0.355         19.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 39 TOP : Longitudinal direction - Only minimum steel required.
 39 BOTT: Longitudinal direction - Only minimum steel required.
 39 TOP : Transverse direction   - Only minimum steel required.
 39 BOTT: Transverse direction   - Only minimum steel required.
 39 TOP :     0.355         0.00 /  102       0.355          0.00 /    0
    BOTT:     0.355         9.54 /  102       0.355         19.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 40 TOP : Longitudinal direction - Only minimum steel required.
 40 BOTT: Longitudinal direction - Only minimum steel required.
 40 TOP : Transverse direction   - Only minimum steel required.
 40 BOTT: Transverse direction   - Only minimum steel required.
 40 TOP :     0.355         0.00 /  102       0.355          0.00 /    0
    BOTT:     0.355         7.88 /  102       0.355         17.37 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 41 TOP : Longitudinal direction - Only minimum steel required.
 41 BOTT: Longitudinal direction - Only minimum steel required.
 41 TOP : Transverse direction   - Only minimum steel required.
 41 BOTT: Transverse direction   - Only minimum steel required.
 41 TOP :     0.355         0.00 /  102       0.355          0.00 /    0
    BOTT:     0.355         4.34 /  102       0.355         12.92 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 42 TOP : Longitudinal direction - Only minimum steel required.
 42 BOTT: Longitudinal direction - Only minimum steel required.
 42 TOP : Transverse direction   - Only minimum steel required.
 42 BOTT: Transverse direction   - Only minimum steel required.
 42 TOP :     0.355         1.19 /  102       0.355          0.00 /    0
    BOTT:     0.355         0.00 /  102       0.355          6.85 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 43 TOP : Longitudinal direction - Only minimum steel required.
 43 BOTT: Longitudinal direction - Only minimum steel required.
 43 TOP : Transverse direction   - Only minimum steel required.
 43 BOTT: Transverse direction   - Only minimum steel required.
```

```
 43 TOP :     0.355         7.47 /  102       0.355          0.00 /    0
    BOTT:     0.355         0.00 /  102       0.355          0.95 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 44 TOP : Longitudinal direction - Only minimum steel required.
 44 BOTT: Longitudinal direction - Only minimum steel required.
 44 TOP : Transverse direction   - Only minimum steel required.
 44 BOTT: Transverse direction   - Only minimum steel required.
 44 TOP :     0.355        12.37 /  102       0.355          0.07 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.53 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 45 TOP : Longitudinal direction - Only minimum steel required.
 45 BOTT: Longitudinal direction - Only minimum steel required.
 45 TOP : Transverse direction   - Only minimum steel required.
 45 BOTT: Transverse direction   - Only minimum steel required.
 45 TOP :     0.355         2.42 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          5.05 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 46 TOP : Longitudinal direction - Only minimum steel required.
 46 BOTT: Longitudinal direction - Only minimum steel required.
 46 TOP : Transverse direction   - Only minimum steel required.
 46 BOTT: Transverse direction   - Only minimum steel required.
 46 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         5.58 /  102       0.355         10.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 47 TOP : Longitudinal direction - Only minimum steel required.
 47 BOTT: Longitudinal direction - Only minimum steel required.
 47 TOP : Transverse direction   - Only minimum steel required.
 47 BOTT: Transverse direction   - Only minimum steel required.
 47 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        10.66 /  102       0.355         14.51 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 48 TOP : Longitudinal direction - Only minimum steel required.
 48 BOTT: Longitudinal direction - Only minimum steel required.
 48 TOP : Transverse direction   - Only minimum steel required.
 48 BOTT: Transverse direction   - Only minimum steel required.
 48 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        13.07 /  102       0.355         16.84 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 49 TOP : Longitudinal direction - Only minimum steel required.
 49 BOTT: Longitudinal direction - Only minimum steel required.
 49 TOP : Transverse direction   - Only minimum steel required.
 49 BOTT: Transverse direction   - Only minimum steel required.
```

```
 49 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        13.07 /  102       0.355         16.84 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 50 TOP : Longitudinal direction - Only minimum steel required.
 50 BOTT: Longitudinal direction - Only minimum steel required.
 50 TOP : Transverse direction   - Only minimum steel required.
 50 BOTT: Transverse direction   - Only minimum steel required.
 50 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        10.66 /  102       0.355         14.51 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 51 TOP : Longitudinal direction - Only minimum steel required.
 51 BOTT: Longitudinal direction - Only minimum steel required.
 51 TOP : Transverse direction   - Only minimum steel required.
 51 BOTT: Transverse direction   - Only minimum steel required.
 51 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         5.58 /  102       0.355         10.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 52 TOP : Longitudinal direction - Only minimum steel required.
 52 BOTT: Longitudinal direction - Only minimum steel required.
 52 TOP : Transverse direction   - Only minimum steel required.
 52 BOTT: Transverse direction   - Only minimum steel required.
 52 TOP :     0.355         2.42 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          5.05 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 53 TOP : Longitudinal direction - Only minimum steel required.
 53 BOTT: Longitudinal direction - Only minimum steel required.
 53 TOP : Transverse direction   - Only minimum steel required.
 53 BOTT: Transverse direction   - Only minimum steel required.
 53 TOP :     0.355        12.37 /  102       0.355          0.07 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.53 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 54 TOP : Longitudinal direction - Only minimum steel required.
 54 BOTT: Longitudinal direction - Only minimum steel required.
 54 TOP : Transverse direction   - Only minimum steel required.
 54 BOTT: Transverse direction   - Only minimum steel required.
 54 TOP :     0.355        19.52 /  102       0.355          1.10 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 55 TOP : Longitudinal direction - Only minimum steel required.
 55 BOTT: Longitudinal direction - Only minimum steel required.
 55 TOP : Transverse direction   - Only minimum steel required.
 55 BOTT: Transverse direction   - Only minimum steel required.
```

```
 55 TOP :     0.355         3.80 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.87 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 56 TOP : Longitudinal direction - Only minimum steel required.
 56 BOTT: Longitudinal direction - Only minimum steel required.
 56 TOP : Transverse direction   - Only minimum steel required.
 56 BOTT: Transverse direction   - Only minimum steel required.
 56 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.87 /  102       0.355          9.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 57 TOP : Longitudinal direction - Only minimum steel required.
 57 BOTT: Longitudinal direction - Only minimum steel required.
 57 TOP : Transverse direction   - Only minimum steel required.
 57 BOTT: Transverse direction   - Only minimum steel required.
 57 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        15.15 /  102       0.355         13.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 58 TOP : Longitudinal direction - Only minimum steel required.
 58 BOTT: Longitudinal direction - Only minimum steel required.
 58 TOP : Transverse direction   - Only minimum steel required.
 58 BOTT: Transverse direction   - Only minimum steel required.
 58 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.58 /  102       0.355         15.60 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 59 TOP : Longitudinal direction - Only minimum steel required.
 59 BOTT: Longitudinal direction - Only minimum steel required.
 59 TOP : Transverse direction   - Only minimum steel required.
 59 BOTT: Transverse direction   - Only minimum steel required.
 59 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.58 /  102       0.355         15.60 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 60 TOP : Longitudinal direction - Only minimum steel required.
 60 BOTT: Longitudinal direction - Only minimum steel required.
 60 TOP : Transverse direction   - Only minimum steel required.
 60 BOTT: Transverse direction   - Only minimum steel required.
 60 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        15.15 /  102       0.355         13.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 61 TOP : Longitudinal direction - Only minimum steel required.
 61 BOTT: Longitudinal direction - Only minimum steel required.
 61 TOP : Transverse direction   - Only minimum steel required.
 61 BOTT: Transverse direction   - Only minimum steel required.
```

```
 61 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.87 /  102       0.355          9.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 62 TOP : Longitudinal direction - Only minimum steel required.
 62 BOTT: Longitudinal direction - Only minimum steel required.
 62 TOP : Transverse direction   - Only minimum steel required.
 62 BOTT: Transverse direction   - Only minimum steel required.
 62 TOP :     0.355         3.80 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.87 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 63 TOP : Longitudinal direction - Only minimum steel required.
 63 BOTT: Longitudinal direction - Only minimum steel required.
 63 TOP : Transverse direction   - Only minimum steel required.
 63 BOTT: Transverse direction   - Only minimum steel required.
 63 TOP :     0.355        19.52 /  102       0.355          1.10 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 64 TOP : Longitudinal direction - Only minimum steel required.
 64 BOTT: Longitudinal direction - Only minimum steel required.
 64 TOP : Transverse direction   - Only minimum steel required.
 64 BOTT: Transverse direction   - Only minimum steel required.
 64 TOP :     0.355        26.34 /  102       0.355          2.52 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 65 TOP : Longitudinal direction - Only minimum steel required.
 65 BOTT: Longitudinal direction - Only minimum steel required.
 65 TOP : Transverse direction   - Only minimum steel required.
 65 BOTT: Transverse direction   - Only minimum steel required.
 65 TOP :     0.355         4.50 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 66 TOP : Longitudinal direction - Only minimum steel required.
 66 BOTT: Longitudinal direction - Only minimum steel required.
 66 TOP : Transverse direction   - Only minimum steel required.
 66 BOTT: Transverse direction   - Only minimum steel required.
 66 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        10.55 /  102       0.355         10.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 67 TOP : Longitudinal direction - Only minimum steel required.
 67 BOTT: Longitudinal direction - Only minimum steel required.
 67 TOP : Transverse direction   - Only minimum steel required.
 67 BOTT: Transverse direction   - Only minimum steel required.
```

```
 67 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        19.71 /  102       0.355         14.92 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 68 TOP : Longitudinal direction - Only minimum steel required.
 68 BOTT: Longitudinal direction - Only minimum steel required.
 68 TOP : Transverse direction   - Only minimum steel required.
 68 BOTT: Transverse direction   - Only minimum steel required.
 68 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        23.97 /  102       0.355         17.61 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 69 TOP : Longitudinal direction - Only minimum steel required.
 69 BOTT: Longitudinal direction - Only minimum steel required.
 69 TOP : Transverse direction   - Only minimum steel required.
 69 BOTT: Transverse direction   - Only minimum steel required.
 69 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        23.97 /  102       0.355         17.61 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 70 TOP : Longitudinal direction - Only minimum steel required.
 70 BOTT: Longitudinal direction - Only minimum steel required.
 70 TOP : Transverse direction   - Only minimum steel required.
 70 BOTT: Transverse direction   - Only minimum steel required.
 70 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        19.71 /  102       0.355         14.92 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 71 TOP : Longitudinal direction - Only minimum steel required.
 71 BOTT: Longitudinal direction - Only minimum steel required.
 71 TOP : Transverse direction   - Only minimum steel required.
 71 BOTT: Transverse direction   - Only minimum steel required.
 71 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        10.55 /  102       0.355         10.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 72 TOP : Longitudinal direction - Only minimum steel required.
 72 BOTT: Longitudinal direction - Only minimum steel required.
 72 TOP : Transverse direction   - Only minimum steel required.
 72 BOTT: Transverse direction   - Only minimum steel required.
 72 TOP :     0.355         4.50 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 73 TOP : Longitudinal direction - Only minimum steel required.
 73 BOTT: Longitudinal direction - Only minimum steel required.
 73 TOP : Transverse direction   - Only minimum steel required.
 73 BOTT: Transverse direction   - Only minimum steel required.
```

```
 73 TOP :     0.355        26.34 /  102       0.355          2.52 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 74 TOP : Longitudinal direction - Only minimum steel required.
 74 BOTT: Longitudinal direction - Only minimum steel required.
 74 TOP : Transverse direction   - Only minimum steel required.
 74 BOTT: Transverse direction   - Only minimum steel required.
 74 TOP :     0.355        31.94 /  102       0.355          2.92 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 75 TOP : Longitudinal direction - Only minimum steel required.
 75 BOTT: Longitudinal direction - Only minimum steel required.
 75 TOP : Transverse direction   - Only minimum steel required.
 75 BOTT: Transverse direction   - Only minimum steel required.
 75 TOP :     0.355         4.45 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          5.42 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 76 TOP : Longitudinal direction - Only minimum steel required.
 76 BOTT: Longitudinal direction - Only minimum steel required.
 76 TOP : Transverse direction   - Only minimum steel required.
 76 BOTT: Transverse direction   - Only minimum steel required.
 76 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        13.44 /  102       0.355         13.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 77 TOP : Longitudinal direction - Only minimum steel required.
 77 BOTT: Longitudinal direction - Only minimum steel required.
 77 TOP : Transverse direction   - Only minimum steel required.
 77 BOTT: Transverse direction   - Only minimum steel required.
 77 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        23.93 /  102       0.355         19.18 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 78 TOP : Longitudinal direction - Only minimum steel required.
 78 BOTT: Longitudinal direction - Only minimum steel required.
 78 TOP : Transverse direction   - Only minimum steel required.
 78 BOTT: Transverse direction   - Only minimum steel required.
 78 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        28.73 /  102       0.355         22.40 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 79 TOP : Longitudinal direction - Only minimum steel required.
 79 BOTT: Longitudinal direction - Only minimum steel required.
 79 TOP : Transverse direction   - Only minimum steel required.
 79 BOTT: Transverse direction   - Only minimum steel required.
```

```
 79 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        28.73 /  102       0.355         22.40 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 80 TOP : Longitudinal direction - Only minimum steel required.
 80 BOTT: Longitudinal direction - Only minimum steel required.
 80 TOP : Transverse direction   - Only minimum steel required.
 80 BOTT: Transverse direction   - Only minimum steel required.
 80 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        23.93 /  102       0.355         19.18 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 81 TOP : Longitudinal direction - Only minimum steel required.
 81 BOTT: Longitudinal direction - Only minimum steel required.
 81 TOP : Transverse direction   - Only minimum steel required.
 81 BOTT: Transverse direction   - Only minimum steel required.
 81 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        13.44 /  102       0.355         13.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 82 TOP : Longitudinal direction - Only minimum steel required.
 82 BOTT: Longitudinal direction - Only minimum steel required.
 82 TOP : Transverse direction   - Only minimum steel required.
 82 BOTT: Transverse direction   - Only minimum steel required.
 82 TOP :     0.355         4.45 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          5.43 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 83 TOP : Longitudinal direction - Only minimum steel required.
 83 BOTT: Longitudinal direction - Only minimum steel required.
 83 TOP : Transverse direction   - Only minimum steel required.
 83 BOTT: Transverse direction   - Only minimum steel required.
 83 TOP :     0.355        31.94 /  102       0.355          2.92 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 84 TOP : Longitudinal direction - Only minimum steel required.
 84 BOTT: Longitudinal direction - Only minimum steel required.
 84 TOP : Transverse direction   - Only minimum steel required.
 84 BOTT: Transverse direction   - Only minimum steel required.
 84 TOP :     0.355        35.94 /  102       0.355          2.44 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 85 TOP : Longitudinal direction - Only minimum steel required.
 85 BOTT: Longitudinal direction - Only minimum steel required.
 85 TOP : Transverse direction   - Only minimum steel required.
 85 BOTT: Transverse direction   - Only minimum steel required.
```

```
 85 TOP :     0.355         3.69 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          8.13 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 86 TOP : Longitudinal direction - Only minimum steel required.
 86 BOTT: Longitudinal direction - Only minimum steel required.
 86 TOP : Transverse direction   - Only minimum steel required.
 86 BOTT: Transverse direction   - Only minimum steel required.
 86 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        16.24 /  102       0.355         17.83 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 87 TOP : Longitudinal direction - Only minimum steel required.
 87 BOTT: Longitudinal direction - Only minimum steel required.
 87 TOP : Transverse direction   - Only minimum steel required.
 87 BOTT: Transverse direction   - Only minimum steel required.
 87 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        27.45 /  102       0.355         25.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 88 TOP : Longitudinal direction - Only minimum steel required.
 88 BOTT: Longitudinal direction - Only minimum steel required.
 88 TOP : Transverse direction   - Only minimum steel required.
 88 BOTT: Transverse direction   - Only minimum steel required.
 88 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.45 /  102       0.355         28.94 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 89 TOP : Longitudinal direction - Only minimum steel required.
 89 BOTT: Longitudinal direction - Only minimum steel required.
 89 TOP : Transverse direction   - Only minimum steel required.
 89 BOTT: Transverse direction   - Only minimum steel required.
 89 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.45 /  102       0.355         28.94 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 90 TOP : Longitudinal direction - Only minimum steel required.
 90 BOTT: Longitudinal direction - Only minimum steel required.
 90 TOP : Transverse direction   - Only minimum steel required.
 90 BOTT: Transverse direction   - Only minimum steel required.
 90 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        27.45 /  102       0.355         25.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 91 TOP : Longitudinal direction - Only minimum steel required.
 91 BOTT: Longitudinal direction - Only minimum steel required.
 91 TOP : Transverse direction   - Only minimum steel required.
 91 BOTT: Transverse direction   - Only minimum steel required.
```

```
 91 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        16.24 /  102       0.355         17.83 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 92 TOP : Longitudinal direction - Only minimum steel required.
 92 BOTT: Longitudinal direction - Only minimum steel required.
 92 TOP : Transverse direction   - Only minimum steel required.
 92 BOTT: Transverse direction   - Only minimum steel required.
 92 TOP :     0.355         3.69 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          8.13 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 93 TOP : Longitudinal direction - Only minimum steel required.
 93 BOTT: Longitudinal direction - Only minimum steel required.
 93 TOP : Transverse direction   - Only minimum steel required.
 93 BOTT: Transverse direction   - Only minimum steel required.
 93 TOP :     0.355        35.94 /  102       0.355          2.44 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 94 TOP : Longitudinal direction - Only minimum steel required.
 94 BOTT: Longitudinal direction - Only minimum steel required.
 94 TOP : Transverse direction   - Only minimum steel required.
 94 BOTT: Transverse direction   - Only minimum steel required.
 94 TOP :     0.355        37.87 /  102       0.355          1.17 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 95 TOP : Longitudinal direction - Only minimum steel required.
 95 BOTT: Longitudinal direction - Only minimum steel required.
 95 TOP : Transverse direction   - Only minimum steel required.
 95 BOTT: Transverse direction   - Only minimum steel required.
 95 TOP :     0.355         2.22 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         11.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 96 TOP : Longitudinal direction - Only minimum steel required.
 96 BOTT: Longitudinal direction - Only minimum steel required.
 96 TOP : Transverse direction   - Only minimum steel required.
 96 BOTT: Transverse direction   - Only minimum steel required.
 96 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.60 /  102       0.355         23.26 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 97 TOP : Longitudinal direction - Only minimum steel required.
 97 BOTT: Longitudinal direction - Only minimum steel required.
 97 TOP : Transverse direction   - Only minimum steel required.
 97 BOTT: Transverse direction   - Only minimum steel required.
```

```
 97 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        29.81 /  102       0.355         31.74 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 98 TOP : Longitudinal direction - Only minimum steel required.
 98 BOTT: Longitudinal direction - Only minimum steel required.
 98 TOP : Transverse direction   - Only minimum steel required.
 98 BOTT: Transverse direction   - Only minimum steel required.
 98 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        34.65 /  102       0.355         36.18 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 99 TOP : Longitudinal direction - Only minimum steel required.
 99 BOTT: Longitudinal direction - Only minimum steel required.
 99 TOP : Transverse direction   - Only minimum steel required.
 99 BOTT: Transverse direction   - Only minimum steel required.
 99 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        34.65 /  102       0.355         36.18 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
100 TOP : Longitudinal direction - Only minimum steel required.
100 BOTT: Longitudinal direction - Only minimum steel required.
100 TOP : Transverse direction   - Only minimum steel required.
100 BOTT: Transverse direction   - Only minimum steel required.
100 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        29.81 /  102       0.355         31.74 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
101 TOP : Longitudinal direction - Only minimum steel required.
101 BOTT: Longitudinal direction - Only minimum steel required.
101 TOP : Transverse direction   - Only minimum steel required.
101 BOTT: Transverse direction   - Only minimum steel required.
101 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.60 /  102       0.355         23.26 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
102 TOP : Longitudinal direction - Only minimum steel required.
102 BOTT: Longitudinal direction - Only minimum steel required.
102 TOP : Transverse direction   - Only minimum steel required.
102 BOTT: Transverse direction   - Only minimum steel required.
102 TOP :     0.355         2.22 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         11.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
103 TOP : Longitudinal direction - Only minimum steel required.
103 BOTT: Longitudinal direction - Only minimum steel required.
103 TOP : Transverse direction   - Only minimum steel required.
103 BOTT: Transverse direction   - Only minimum steel required.
```

```
103 TOP :     0.355        37.87 /  102       0.355          1.17 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
104 TOP : Longitudinal direction - Only minimum steel required.
104 BOTT: Longitudinal direction - Only minimum steel required.
104 TOP : Transverse direction   - Only minimum steel required.
104 BOTT: Transverse direction   - Only minimum steel required.
104 TOP :     0.355        37.17 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.86 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
105 TOP : Longitudinal direction - Only minimum steel required.
105 BOTT: Longitudinal direction - Only minimum steel required.
105 TOP : Transverse direction   - Only minimum steel required.
105 BOTT: Transverse direction   - Only minimum steel required.
105 TOP :     0.355         0.50 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         15.68 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
106 TOP : Longitudinal direction - Only minimum steel required.
106 BOTT: Longitudinal direction - Only minimum steel required.
106 TOP : Transverse direction   - Only minimum steel required.
106 BOTT: Transverse direction   - Only minimum steel required.
106 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        20.11 /  102       0.355         28.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
107 TOP : Longitudinal direction - Only minimum steel required.
107 BOTT: Longitudinal direction - Only minimum steel required.
107 TOP : Transverse direction   - Only minimum steel required.
107 BOTT: Transverse direction   - Only minimum steel required.
107 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        30.48 /  102       0.355         38.07 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
108 TOP : Longitudinal direction - Only minimum steel required.
108 BOTT: Longitudinal direction - Only minimum steel required.
108 TOP : Transverse direction   - Only minimum steel required.
108 BOTT: Transverse direction   - Only minimum steel required.
108 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        34.81 /  102       0.355         42.85 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
109 TOP : Longitudinal direction - Only minimum steel required.
109 BOTT: Longitudinal direction - Only minimum steel required.
109 TOP : Transverse direction   - Only minimum steel required.
109 BOTT: Transverse direction   - Only minimum steel required.
```

```
109 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        34.81 /  102       0.355         42.85 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
110 TOP : Longitudinal direction - Only minimum steel required.
110 BOTT: Longitudinal direction - Only minimum steel required.
110 TOP : Transverse direction   - Only minimum steel required.
110 BOTT: Transverse direction   - Only minimum steel required.
110 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        30.48 /  102       0.355         38.07 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
111 TOP : Longitudinal direction - Only minimum steel required.
111 BOTT: Longitudinal direction - Only minimum steel required.
111 TOP : Transverse direction   - Only minimum steel required.
111 BOTT: Transverse direction   - Only minimum steel required.
111 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        20.11 /  102       0.355         28.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
112 TOP : Longitudinal direction - Only minimum steel required.
112 BOTT: Longitudinal direction - Only minimum steel required.
112 TOP : Transverse direction   - Only minimum steel required.
112 BOTT: Transverse direction   - Only minimum steel required.
112 TOP :     0.355         0.50 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         15.68 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
113 TOP : Longitudinal direction - Only minimum steel required.
113 BOTT: Longitudinal direction - Only minimum steel required.
113 TOP : Transverse direction   - Only minimum steel required.
113 BOTT: Transverse direction   - Only minimum steel required.
113 TOP :     0.355        37.17 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.86 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
114 TOP : Longitudinal direction - Only minimum steel required.
114 BOTT: Longitudinal direction - Only minimum steel required.
114 TOP : Transverse direction   - Only minimum steel required.
114 BOTT: Transverse direction   - Only minimum steel required.
114 TOP :     0.355        33.34 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
115 TOP : Longitudinal direction - Only minimum steel required.
115 BOTT: Longitudinal direction - Only minimum steel required.
115 TOP : Transverse direction   - Only minimum steel required.
115 BOTT: Transverse direction   - Only minimum steel required.
```

```
115 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         2.17 /  102       0.355         19.69 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
116 TOP : Longitudinal direction - Only minimum steel required.
116 BOTT: Longitudinal direction - Only minimum steel required.
116 TOP : Transverse direction   - Only minimum steel required.
116 BOTT: Transverse direction   - Only minimum steel required.
116 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        20.25 /  102       0.355         33.34 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
117 TOP : Longitudinal direction - Only minimum steel required.
117 BOTT: Longitudinal direction - Only minimum steel required.
117 TOP : Transverse direction   - Only minimum steel required.
117 BOTT: Transverse direction   - Only minimum steel required.
117 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        28.97 /  102       0.355         42.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
118 TOP : Longitudinal direction - Only minimum steel required.
118 BOTT: Longitudinal direction - Only minimum steel required.
118 TOP : Transverse direction   - Only minimum steel required.
118 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.47 /  102       0.382         47.34 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
119 TOP : Longitudinal direction - Only minimum steel required.
119 BOTT: Longitudinal direction - Only minimum steel required.
119 TOP : Transverse direction   - Only minimum steel required.
119 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.47 /  102       0.382         47.34 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
120 TOP : Longitudinal direction - Only minimum steel required.
120 BOTT: Longitudinal direction - Only minimum steel required.
120 TOP : Transverse direction   - Only minimum steel required.
120 BOTT: Transverse direction   - Only minimum steel required.
120 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        28.97 /  102       0.355         42.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
121 TOP : Longitudinal direction - Only minimum steel required.
121 BOTT: Longitudinal direction - Only minimum steel required.
121 TOP : Transverse direction   - Only minimum steel required.
121 BOTT: Transverse direction   - Only minimum steel required.
121 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        20.25 /  102       0.355         33.34 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
122 TOP : Longitudinal direction - Only minimum steel required.
122 BOTT: Longitudinal direction - Only minimum steel required.
122 TOP : Transverse direction - Only minimum steel required.
122 BOTT: Transverse direction - Only minimum steel required.

122 TOP :	0.355	0.00	/ 102	0.355	0.00	/ 102
BOTT:	0.355	2.17	/ 102	0.355	19.69	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
123 TOP : Longitudinal direction - Only minimum steel required.
123 BOTT: Longitudinal direction - Only minimum steel required.
123 TOP : Transverse direction - Only minimum steel required.
123 BOTT: Transverse direction - Only minimum steel required.

123 TOP :	0.355	33.34	/ 102	0.355	0.00	/ 102
BOTT:	0.355	0.00	/ 102	0.355	3.67	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
124 TOP : Longitudinal direction - Only minimum steel required.
124 BOTT: Longitudinal direction - Only minimum steel required.
124 TOP : Transverse direction - Only minimum steel required.
124 BOTT: Transverse direction - Only minimum steel required.

124 TOP :	0.355	26.07	/ 102	0.355	0.00	/ 102
BOTT:	0.355	0.00	/ 102	0.355	7.19	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
125 TOP : Longitudinal direction - Only minimum steel required.
125 BOTT: Longitudinal direction - Only minimum steel required.
125 TOP : Transverse direction - Only minimum steel required.
125 BOTT: Transverse direction - Only minimum steel required.

125 TOP :	0.355	0.00	/ 102	0.355	0.00	/ 102
BOTT:	0.355	4.25	/ 102	0.355	22.90	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
126 TOP : Longitudinal direction - Only minimum steel required.
126 BOTT: Longitudinal direction - Only minimum steel required.
126 TOP : Transverse direction - Only minimum steel required.
126 BOTT: Transverse direction - Only minimum steel required.

126 TOP :	0.355	0.00	/ 102	0.355	0.00	/ 102
BOTT:	0.355	18.45	/ 102	0.355	35.52	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
127 TOP : Longitudinal direction - Only minimum steel required.
127 BOTT: Longitudinal direction - Only minimum steel required.
127 TOP : Transverse direction - Only minimum steel required.
127 BOTT: Transverse direction - Only minimum steel required.

127 TOP :	0.355	0.00	/ 102	0.355	0.00	/ 102
BOTT:	0.355	24.84	/ 102	0.355	43.62	/ 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM

```
128 TOP : Longitudinal direction - Only minimum steel required.
128 BOTT: Longitudinal direction - Only minimum steel required.
128 TOP : Transverse direction   - Only minimum steel required.
128 TOP :     0.355         0.00 /  102       0.355         0.00 /  102
    BOTT:     0.355        27.27 /  102       0.383        47.52 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
129 TOP : Longitudinal direction - Only minimum steel required.
129 BOTT: Longitudinal direction - Only minimum steel required.
129 TOP : Transverse direction   - Only minimum steel required.
129 TOP :     0.355         0.00 /  102       0.355         0.00 /  102
    BOTT:     0.355        27.27 /  102       0.383        47.52 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
130 TOP : Longitudinal direction - Only minimum steel required.
130 BOTT: Longitudinal direction - Only minimum steel required.
130 TOP : Transverse direction   - Only minimum steel required.
130 BOTT: Transverse direction   - Only minimum steel required.
130 TOP :     0.355         0.00 /  102       0.355         0.00 /  102
    BOTT:     0.355        24.84 /  102       0.355        43.62 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
131 TOP : Longitudinal direction - Only minimum steel required.
131 BOTT: Longitudinal direction - Only minimum steel required.
131 TOP : Transverse direction   - Only minimum steel required.
131 BOTT: Transverse direction   - Only minimum steel required.
131 TOP :     0.355         0.00 /  102       0.355         0.00 /  102
    BOTT:     0.355        18.45 /  102       0.355        35.52 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
132 TOP : Longitudinal direction - Only minimum steel required.
132 BOTT: Longitudinal direction - Only minimum steel required.
132 TOP : Transverse direction   - Only minimum steel required.
132 BOTT: Transverse direction   - Only minimum steel required.
132 TOP :     0.355         0.00 /  102       0.355         0.00 /  102
    BOTT:     0.355         4.25 /  102       0.355        22.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
133 TOP : Longitudinal direction - Only minimum steel required.
133 BOTT: Longitudinal direction - Only minimum steel required.
133 TOP : Transverse direction   - Only minimum steel required.
133 BOTT: Transverse direction   - Only minimum steel required.
133 TOP :     0.355        26.07 /  102       0.355         0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         7.19 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
134 TOP : Longitudinal direction - Only minimum steel required.
134 BOTT: Longitudinal direction - Only minimum steel required.
134 TOP : Transverse direction   - Only minimum steel required.
134 BOTT: Transverse direction   - Only minimum steel required.
```

```
134 TOP :     0.355        15.85 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         10.75 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
135 TOP : Longitudinal direction - Only minimum steel required.
135 BOTT: Longitudinal direction - Only minimum steel required.
135 TOP : Transverse direction   - Only minimum steel required.
135 BOTT: Transverse direction   - Only minimum steel required.
135 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         5.22 /  102       0.355         23.86 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
136 TOP : Longitudinal direction - Only minimum steel required.
136 BOTT: Longitudinal direction - Only minimum steel required.
136 TOP : Transverse direction   - Only minimum steel required.
136 BOTT: Transverse direction   - Only minimum steel required.
136 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        14.14 /  102       0.355         33.12 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
137 TOP : Longitudinal direction - Only minimum steel required.
137 BOTT: Longitudinal direction - Only minimum steel required.
137 TOP : Transverse direction   - Only minimum steel required.
137 BOTT: Transverse direction   - Only minimum steel required.
137 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        17.81 /  102       0.355         38.30 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
138 TOP : Longitudinal direction - Only minimum steel required.
138 BOTT: Longitudinal direction - Only minimum steel required.
138 TOP : Transverse direction   - Only minimum steel required.
138 BOTT: Transverse direction   - Only minimum steel required.
138 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        19.10 /  102       0.355         40.57 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
139 TOP : Longitudinal direction - Only minimum steel required.
139 BOTT: Longitudinal direction - Only minimum steel required.
139 TOP : Transverse direction   - Only minimum steel required.
139 BOTT: Transverse direction   - Only minimum steel required.
139 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        19.10 /  102       0.355         40.57 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
140 TOP : Longitudinal direction - Only minimum steel required.
140 BOTT: Longitudinal direction - Only minimum steel required.
140 TOP : Transverse direction   - Only minimum steel required.
140 BOTT: Transverse direction   - Only minimum steel required.
```

```
140 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        17.81 /  102       0.355         38.30 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
141 TOP : Longitudinal direction - Only minimum steel required.
141 BOTT: Longitudinal direction - Only minimum steel required.
141 TOP : Transverse direction   - Only minimum steel required.
141 BOTT: Transverse direction   - Only minimum steel required.
141 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        14.14 /  102       0.355         33.12 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
142 TOP : Longitudinal direction - Only minimum steel required.
142 BOTT: Longitudinal direction - Only minimum steel required.
142 TOP : Transverse direction   - Only minimum steel required.
142 BOTT: Transverse direction   - Only minimum steel required.
142 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         5.22 /  102       0.355         23.86 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
143 TOP : Longitudinal direction - Only minimum steel required.
143 BOTT: Longitudinal direction - Only minimum steel required.
143 TOP : Transverse direction   - Only minimum steel required.
143 BOTT: Transverse direction   - Only minimum steel required.
143 TOP :     0.355        15.85 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         10.75 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
144 TOP : Longitudinal direction - Only minimum steel required.
144 BOTT: Longitudinal direction - Only minimum steel required.
144 TOP : Transverse direction   - Only minimum steel required.
144 BOTT: Transverse direction   - Only minimum steel required.
144 TOP :     0.355         4.14 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         11.65 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
145 TOP : Longitudinal direction - Only minimum steel required.
145 BOTT: Longitudinal direction - Only minimum steel required.
145 TOP : Transverse direction   - Only minimum steel required.
145 BOTT: Transverse direction   - Only minimum steel required.
145 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         4.08 /  102       0.355         20.99 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
146 TOP : Longitudinal direction - Only minimum steel required.
146 BOTT: Longitudinal direction - Only minimum steel required.
146 TOP : Transverse direction   - Only minimum steel required.
146 BOTT: Transverse direction   - Only minimum steel required.
```

```
146 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         6.96 /  102       0.355         26.90 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
147 TOP : Longitudinal direction - Only minimum steel required.
147 BOTT: Longitudinal direction - Only minimum steel required.
147 TOP : Transverse direction   - Only minimum steel required.
147 BOTT: Transverse direction   - Only minimum steel required.
147 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.86 /  102       0.355         30.00 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
148 TOP : Longitudinal direction - Only minimum steel required.
148 BOTT: Longitudinal direction - Only minimum steel required.
148 TOP : Transverse direction   - Only minimum steel required.
148 BOTT: Transverse direction   - Only minimum steel required.
148 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         8.07 /  102       0.355         31.29 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
149 TOP : Longitudinal direction - Only minimum steel required.
149 BOTT: Longitudinal direction - Only minimum steel required.
149 TOP : Transverse direction   - Only minimum steel required.
149 BOTT: Transverse direction   - Only minimum steel required.
149 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         8.07 /  102       0.355         31.29 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
150 TOP : Longitudinal direction - Only minimum steel required.
150 BOTT: Longitudinal direction - Only minimum steel required.
150 TOP : Transverse direction   - Only minimum steel required.
150 BOTT: Transverse direction   - Only minimum steel required.
150 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.86 /  102       0.355         30.00 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
151 TOP : Longitudinal direction - Only minimum steel required.
151 BOTT: Longitudinal direction - Only minimum steel required.
151 TOP : Transverse direction   - Only minimum steel required.
151 BOTT: Transverse direction   - Only minimum steel required.
151 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         6.96 /  102       0.355         26.90 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
152 TOP : Longitudinal direction - Only minimum steel required.
152 BOTT: Longitudinal direction - Only minimum steel required.
152 TOP : Transverse direction   - Only minimum steel required.
152 BOTT: Transverse direction   - Only minimum steel required.
```

```
152 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         4.08 /  102       0.355         20.99 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
153 TOP : Longitudinal direction - Only minimum steel required.
153 BOTT: Longitudinal direction - Only minimum steel required.
153 TOP : Transverse direction   - Only minimum steel required.
153 BOTT: Transverse direction   - Only minimum steel required.
153 TOP :     0.355         4.14 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         11.65 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
164 TOP : Longitudinal direction - Only minimum steel required.
164 BOTT: Longitudinal direction - Only minimum steel required.
164 TOP : Transverse direction   - Only minimum steel required.
164 BOTT: Transverse direction   - Only minimum steel required.
164 TOP :     0.355        10.77 /  102       0.355          0.87 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
165 TOP : Longitudinal direction - Only minimum steel required.
165 BOTT: Longitudinal direction - Only minimum steel required.
165 TOP : Transverse direction   - Only minimum steel required.
165 BOTT: Transverse direction   - Only minimum steel required.
165 TOP :     0.355        17.64 /  102       0.355          1.46 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
166 TOP : Longitudinal direction - Only minimum steel required.
166 BOTT: Longitudinal direction - Only minimum steel required.
166 TOP : Transverse direction   - Only minimum steel required.
166 BOTT: Transverse direction   - Only minimum steel required.
166 TOP :     0.355        10.77 /  102       0.355          0.87 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
167 TOP : Longitudinal direction - Only minimum steel required.
167 BOTT: Longitudinal direction - Only minimum steel required.
167 TOP : Transverse direction   - Only minimum steel required.
167 BOTT: Transverse direction   - Only minimum steel required.
167 TOP :     0.355        17.64 /  102       0.355          1.46 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
168 TOP : Longitudinal direction - Only minimum steel required.
168 BOTT: Longitudinal direction - Only minimum steel required.
168 TOP : Transverse direction   - Only minimum steel required.
168 BOTT: Transverse direction   - Only minimum steel required.
```

168 TOP : 0.355 32.33 / 102 0.355 4.20 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
169 TOP : Longitudinal direction - Only minimum steel required.
169 BOTT: Longitudinal direction - Only minimum steel required.
169 TOP : Transverse direction - Only minimum steel required.
169 BOTT: Transverse direction - Only minimum steel required.
169 TOP : 0.355 45.14 / 102 0.355 6.76 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
170 BOTT: Longitudinal direction - Only minimum steel required.
170 TOP : Transverse direction - Only minimum steel required.
170 BOTT: Transverse direction - Only minimum steel required.
170 TOP : 0.439 56.47 / 102 0.355 8.51 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
171 BOTT: Longitudinal direction - Only minimum steel required.
171 TOP : Transverse direction - Only minimum steel required.
171 BOTT: Transverse direction - Only minimum steel required.
171 TOP : 0.512 65.81 / 102 0.355 9.55 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
172 BOTT: Longitudinal direction - Only minimum steel required.
172 TOP : Transverse direction - Only minimum steel required.
172 BOTT: Transverse direction - Only minimum steel required.
172 TOP : 0.563 72.30 / 102 0.355 9.85 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
173 BOTT: Longitudinal direction - Only minimum steel required.
173 TOP : Transverse direction - Only minimum steel required.
173 BOTT: Transverse direction - Only minimum steel required.
173 TOP : 0.582 74.72 / 102 0.355 9.21 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
174 BOTT: Longitudinal direction - Only minimum steel required.
174 TOP : Transverse direction - Only minimum steel required.
174 BOTT: Transverse direction - Only minimum steel required.
174 TOP : 0.557 71.59 / 102 0.355 7.35 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
175 BOTT: Longitudinal direction - Only minimum steel required.
175 TOP : Transverse direction - Only minimum steel required.

175 BOTT: Transverse direction - Only minimum steel required.
175 TOP : 0.477 61.33 / 102 0.355 3.91 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
176 TOP : Longitudinal direction - Only minimum steel required.
176 BOTT: Longitudinal direction - Only minimum steel required.
176 TOP : Transverse direction - Only minimum steel required.
176 BOTT: Transverse direction - Only minimum steel required.
176 TOP : 0.355 41.79 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 1.93 / 103

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
177 TOP : Longitudinal direction - Only minimum steel required.
177 BOTT: Longitudinal direction - Only minimum steel required.
177 TOP : Transverse direction - Only minimum steel required.
177 BOTT: Transverse direction - Only minimum steel required.
177 TOP : 0.355 14.25 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 4.83 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
178 TOP : Longitudinal direction - Only minimum steel required.
178 BOTT: Longitudinal direction - Only minimum steel required.
178 TOP : Transverse direction - Only minimum steel required.
178 BOTT: Transverse direction - Only minimum steel required.
178 TOP : 0.355 32.33 / 102 0.355 4.20 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
179 TOP : Longitudinal direction - Only minimum steel required.
179 BOTT: Longitudinal direction - Only minimum steel required.
179 TOP : Transverse direction - Only minimum steel required.
179 BOTT: Transverse direction - Only minimum steel required.
179 TOP : 0.355 45.14 / 102 0.355 6.76 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
180 BOTT: Longitudinal direction - Only minimum steel required.
180 TOP : Transverse direction - Only minimum steel required.
180 BOTT: Transverse direction - Only minimum steel required.
180 TOP : 0.439 56.47 / 102 0.355 8.51 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
181 BOTT: Longitudinal direction - Only minimum steel required.
181 TOP : Transverse direction - Only minimum steel required.
181 BOTT: Transverse direction - Only minimum steel required.
181 TOP : 0.512 65.81 / 102 0.355 9.55 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
182 BOTT: Longitudinal direction - Only minimum steel required.
182 TOP : Transverse direction - Only minimum steel required.
182 BOTT: Transverse direction - Only minimum steel required.
182 TOP : 0.563 72.30 / 102 0.355 9.85 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
183 BOTT: Longitudinal direction - Only minimum steel required.
183 TOP : Transverse direction - Only minimum steel required.
183 BOTT: Transverse direction - Only minimum steel required.
183 TOP : 0.582 74.72 / 102 0.355 9.21 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
184 BOTT: Longitudinal direction - Only minimum steel required.
184 TOP : Transverse direction - Only minimum steel required.
184 BOTT: Transverse direction - Only minimum steel required.
184 TOP : 0.557 71.59 / 102 0.355 7.35 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
185 BOTT: Longitudinal direction - Only minimum steel required.
185 TOP : Transverse direction - Only minimum steel required.
185 BOTT: Transverse direction - Only minimum steel required.
185 TOP : 0.477 61.33 / 102 0.355 3.91 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
186 TOP : Longitudinal direction - Only minimum steel required.
186 BOTT: Longitudinal direction - Only minimum steel required.
186 TOP : Transverse direction - Only minimum steel required.
186 BOTT: Transverse direction - Only minimum steel required.
186 TOP : 0.355 41.79 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 1.93 / 103

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
187 TOP : Longitudinal direction - Only minimum steel required.
187 BOTT: Longitudinal direction - Only minimum steel required.
187 TOP : Transverse direction - Only minimum steel required.
187 BOTT: Transverse direction - Only minimum steel required.
187 TOP : 0.355 14.25 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 4.83 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
188 TOP : Longitudinal direction - Only minimum steel required.
188 BOTT: Longitudinal direction - Only minimum steel required.
188 TOP : Transverse direction - Only minimum steel required.
188 BOTT: Transverse direction - Only minimum steel required.

188 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 0.49 / 102 0.133 1.96 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
189 TOP : Longitudinal direction - Only minimum steel required.
189 BOTT: Longitudinal direction - Only minimum steel required.
189 TOP : Transverse direction - Only minimum steel required.
189 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 1.10 / 102 0.236 7.08 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
190 TOP : Longitudinal direction - Only minimum steel required.
190 BOTT: Longitudinal direction - Only minimum steel required.
190 TOP : Transverse direction - Only minimum steel required.
190 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 1.87 / 102 0.403 11.89 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
191 TOP : Longitudinal direction - Only minimum steel required.
191 BOTT: Longitudinal direction - Only minimum steel required.
191 TOP : Transverse direction - Only minimum steel required.
191 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 2.37 / 102 0.516 15.09 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
192 TOP : Longitudinal direction - Only minimum steel required.
192 BOTT: Longitudinal direction - Only minimum steel required.
192 TOP : Transverse direction - Only minimum steel required.
192 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 2.64 / 102 0.577 16.77 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
193 TOP : Longitudinal direction - Only minimum steel required.
193 BOTT: Longitudinal direction - Only minimum steel required.
193 TOP : Transverse direction - Only minimum steel required.
193 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 2.64 / 102 0.577 16.77 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
194 TOP : Longitudinal direction - Only minimum steel required.
194 BOTT: Longitudinal direction - Only minimum steel required.
194 TOP : Transverse direction - Only minimum steel required.
194 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 2.37 / 102 0.516 15.09 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
195 TOP : Longitudinal direction - Only minimum steel required.
195 BOTT: Longitudinal direction - Only minimum steel required.
195 TOP : Transverse direction - Only minimum steel required.

```
195 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         1.86 /  102       0.403         11.88 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
196 TOP : Longitudinal direction - Only minimum steel required.
196 BOTT: Longitudinal direction - Only minimum steel required.
196 TOP : Transverse direction   - Only minimum steel required.
196 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         1.11 /  102       0.237          7.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
197 TOP : Longitudinal direction - Only minimum steel required.
197 BOTT: Longitudinal direction - Only minimum steel required.
197 TOP : Transverse direction   - Only minimum steel required.
197 BOTT: Transverse direction   - Only minimum steel required.
197 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         0.50 /  102       0.133          2.01 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
198 TOP : Longitudinal direction - Only minimum steel required.
198 BOTT: Longitudinal direction - Only minimum steel required.
198 TOP : Transverse direction   - Only minimum steel required.
198 BOTT: Transverse direction   - Only minimum steel required.
198 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         0.49 /  102       0.133          1.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
199 TOP : Longitudinal direction - Only minimum steel required.
199 BOTT: Longitudinal direction - Only minimum steel required.
199 TOP : Transverse direction   - Only minimum steel required.
199 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         1.10 /  102       0.236          7.08 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
200 TOP : Longitudinal direction - Only minimum steel required.
200 BOTT: Longitudinal direction - Only minimum steel required.
200 TOP : Transverse direction   - Only minimum steel required.
200 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         1.87 /  102       0.403         11.89 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
201 TOP : Longitudinal direction - Only minimum steel required.
201 BOTT: Longitudinal direction - Only minimum steel required.
201 TOP : Transverse direction   - Only minimum steel required.
201 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         2.37 /  102       0.516         15.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
202 TOP : Longitudinal direction - Only minimum steel required.
```

```
202 BOTT: Longitudinal direction - Only minimum steel required.
202 TOP : Transverse direction   - Only minimum steel required.
202 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         2.64 /  102       0.577        16.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
203 TOP : Longitudinal direction - Only minimum steel required.
203 BOTT: Longitudinal direction - Only minimum steel required.
203 TOP : Transverse direction   - Only minimum steel required.
203 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         2.64 /  102       0.577        16.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
204 TOP : Longitudinal direction - Only minimum steel required.
204 BOTT: Longitudinal direction - Only minimum steel required.
204 TOP : Transverse direction   - Only minimum steel required.
204 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         2.37 /  102       0.516        15.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
205 TOP : Longitudinal direction - Only minimum steel required.
205 BOTT: Longitudinal direction - Only minimum steel required.
205 TOP : Transverse direction   - Only minimum steel required.
205 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         1.86 /  102       0.403        11.88 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
206 TOP : Longitudinal direction - Only minimum steel required.
206 BOTT: Longitudinal direction - Only minimum steel required.
206 TOP : Transverse direction   - Only minimum steel required.
206 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         1.11 /  102       0.237         7.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
207 TOP : Longitudinal direction - Only minimum steel required.
207 BOTT: Longitudinal direction - Only minimum steel required.
207 TOP : Transverse direction   - Only minimum steel required.
207 BOTT: Transverse direction   - Only minimum steel required.
207 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         0.50 /  102       0.133         2.01 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
208 TOP : Longitudinal direction - Only minimum steel required.
208 BOTT: Longitudinal direction - Only minimum steel required.
208 TOP : Transverse direction   - Only minimum steel required.
208 BOTT: Transverse direction   - Only minimum steel required.
208 TOP :     0.133         0.00 /  102       0.133         0.00 /  102
    BOTT:     0.133         1.90 /  102       0.133         1.34 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
209 TOP : Longitudinal direction - Only minimum steel required.
209 BOTT: Longitudinal direction - Only minimum steel required.
209 TOP : Transverse direction - Only minimum steel required.
209 BOTT: Transverse direction - Only minimum steel required.
209 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 0.39 / 102 0.133 3.42 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
210 TOP : Longitudinal direction - Only minimum steel required.
210 BOTT: Longitudinal direction - Only minimum steel required.
210 TOP : Transverse direction - Only minimum steel required.
210 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.187 5.64 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
211 TOP : Longitudinal direction - Only minimum steel required.
211 BOTT: Longitudinal direction - Only minimum steel required.
211 TOP : Transverse direction - Only minimum steel required.
211 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.246 7.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
212 TOP : Longitudinal direction - Only minimum steel required.
212 BOTT: Longitudinal direction - Only minimum steel required.
212 TOP : Transverse direction - Only minimum steel required.
212 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.24 / 102 0.277 8.27 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
213 TOP : Longitudinal direction - Only minimum steel required.
213 BOTT: Longitudinal direction - Only minimum steel required.
213 TOP : Transverse direction - Only minimum steel required.
213 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.23 / 102 0.277 8.27 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
214 TOP : Longitudinal direction - Only minimum steel required.
214 BOTT: Longitudinal direction - Only minimum steel required.
214 TOP : Transverse direction - Only minimum steel required.
214 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.246 7.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
215 TOP : Longitudinal direction - Only minimum steel required.
215 BOTT: Longitudinal direction - Only minimum steel required.
215 TOP : Transverse direction - Only minimum steel required.

215 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 0.18 / 102 0.188 5.64 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
216 TOP : Longitudinal direction - Only minimum steel required.
216 BOTT: Longitudinal direction - Only minimum steel required.
216 TOP : Transverse direction - Only minimum steel required.
216 BOTT: Transverse direction - Only minimum steel required.
216 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 0.40 / 102 0.133 3.44 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
217 TOP : Longitudinal direction - Only minimum steel required.
217 BOTT: Longitudinal direction - Only minimum steel required.
217 TOP : Transverse direction - Only minimum steel required.
217 BOTT: Transverse direction - Only minimum steel required.
217 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 1.90 / 102 0.133 1.33 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
218 TOP : Longitudinal direction - Only minimum steel required.
218 BOTT: Longitudinal direction - Only minimum steel required.
218 TOP : Transverse direction - Only minimum steel required.
218 BOTT: Transverse direction - Only minimum steel required.
218 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 4.65 / 102 0.133 0.69 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
219 TOP : Longitudinal direction - Only minimum steel required.
219 BOTT: Longitudinal direction - Only minimum steel required.
219 TOP : Transverse direction - Only minimum steel required.
219 BOTT: Transverse direction - Only minimum steel required.
219 TOP : 0.133 0.29 / 102 0.133 0.21 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
220 TOP : Longitudinal direction - Only minimum steel required.
220 BOTT: Longitudinal direction - Only minimum steel required.
220 TOP : Transverse direction - Only minimum steel required.
220 BOTT: Transverse direction - Only minimum steel required.
220 TOP : 0.133 2.07 / 102 0.133 0.47 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
221 TOP : Longitudinal direction - Only minimum steel required.
221 BOTT: Longitudinal direction - Only minimum steel required.
221 TOP : Transverse direction - Only minimum steel required.
221 BOTT: Transverse direction - Only minimum steel required.

```
221 TOP :     0.133         2.89 /  102       0.133          0.50 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
222 TOP : Longitudinal direction - Only minimum steel required.
222 BOTT: Longitudinal direction - Only minimum steel required.
222 TOP : Transverse direction   - Only minimum steel required.
222 BOTT: Transverse direction   - Only minimum steel required.
222 TOP :     0.133         3.21 /  102       0.133          0.47 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
223 TOP : Longitudinal direction - Only minimum steel required.
223 BOTT: Longitudinal direction - Only minimum steel required.
223 TOP : Transverse direction   - Only minimum steel required.
223 BOTT: Transverse direction   - Only minimum steel required.
223 TOP :     0.133         3.21 /  102       0.133          0.47 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
224 TOP : Longitudinal direction - Only minimum steel required.
224 BOTT: Longitudinal direction - Only minimum steel required.
224 TOP : Transverse direction   - Only minimum steel required.
224 BOTT: Transverse direction   - Only minimum steel required.
224 TOP :     0.133         2.89 /  102       0.133          0.50 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
225 TOP : Longitudinal direction - Only minimum steel required.
225 BOTT: Longitudinal direction - Only minimum steel required.
225 TOP : Transverse direction   - Only minimum steel required.
225 BOTT: Transverse direction   - Only minimum steel required.
225 TOP :     0.133         2.07 /  102       0.133          0.47 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
226 TOP : Longitudinal direction - Only minimum steel required.
226 BOTT: Longitudinal direction - Only minimum steel required.
226 TOP : Transverse direction   - Only minimum steel required.
226 BOTT: Transverse direction   - Only minimum steel required.
226 TOP :     0.133         0.29 /  102       0.133          0.21 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
227 TOP : Longitudinal direction - Only minimum steel required.
227 BOTT: Longitudinal direction - Only minimum steel required.
227 TOP : Transverse direction   - Only minimum steel required.
227 BOTT: Transverse direction   - Only minimum steel required.
```

```
227 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.133         4.64 /  102       0.133          0.69 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
228 TOP : Longitudinal direction - Only minimum steel required.
228 TOP : Transverse direction   - Only minimum steel required.
228 BOTT: Transverse direction   - Only minimum steel required.
228 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.215         7.48 /  102       0.133          0.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
229 TOP : Longitudinal direction - Only minimum steel required.
229 BOTT: Longitudinal direction - Only minimum steel required.
229 TOP : Transverse direction   - Only minimum steel required.
229 BOTT: Transverse direction   - Only minimum steel required.
229 TOP :     0.133         0.53 /  102       0.133          1.99 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
230 TOP : Longitudinal direction - Only minimum steel required.
230 BOTT: Longitudinal direction - Only minimum steel required.
230 TOP : Transverse direction   - Only minimum steel required.
230 BOTT: Transverse direction   - Only minimum steel required.
230 TOP :     0.133         3.85 /  102       0.133          3.80 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
231 BOTT: Longitudinal direction - Only minimum steel required.
231 BOTT: Transverse direction   - Only minimum steel required.
231 TOP :     0.157         5.50 /  102       0.164          4.96 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
232 BOTT: Longitudinal direction - Only minimum steel required.
232 BOTT: Transverse direction   - Only minimum steel required.
232 TOP :     0.177         6.18 /  102       0.184          5.54 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
233 BOTT: Longitudinal direction - Only minimum steel required.
233 BOTT: Transverse direction   - Only minimum steel required.
233 TOP :     0.177         6.18 /  102       0.184          5.54 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
234 BOTT: Longitudinal direction - Only minimum steel required.
234 BOTT: Transverse direction   - Only minimum steel required.
```

```
234 TOP :     0.157         5.51 /  102       0.165          4.96 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
235 TOP : Longitudinal direction - Only minimum steel required.
235 BOTT: Longitudinal direction - Only minimum steel required.
235 TOP : Transverse direction   - Only minimum steel required.
235 BOTT: Transverse direction   - Only minimum steel required.
235 TOP :     0.133         3.86 /  102       0.133          3.80 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
236 TOP : Longitudinal direction - Only minimum steel required.
236 BOTT: Longitudinal direction - Only minimum steel required.
236 TOP : Transverse direction   - Only minimum steel required.
236 BOTT: Transverse direction   - Only minimum steel required.
236 TOP :     0.133         0.54 /  102       0.133          2.00 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
237 TOP : Longitudinal direction - Only minimum steel required.
237 TOP : Transverse direction   - Only minimum steel required.
237 BOTT: Transverse direction   - Only minimum steel required.
237 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.215         7.47 /  102       0.133          0.66 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
238 TOP : Longitudinal direction - Only minimum steel required.
238 TOP : Transverse direction   - Only minimum steel required.
238 BOTT: Transverse direction   - Only minimum steel required.
238 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.277         9.61 /  102       0.133          0.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
239 TOP : Longitudinal direction - Only minimum steel required.
239 BOTT: Longitudinal direction - Only minimum steel required.
239 TOP : Transverse direction   - Only minimum steel required.
239 BOTT: Transverse direction   - Only minimum steel required.
239 TOP :     0.133         0.56 /  102       0.133          2.82 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
240 BOTT: Longitudinal direction - Only minimum steel required.
240 BOTT: Transverse direction   - Only minimum steel required.
240 TOP :     0.144         5.03 /  102       0.181          5.46 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
241 BOTT: Longitudinal direction - Only minimum steel required.
```

```
241 BOTT: Transverse direction   - Only minimum steel required.
241 TOP :     0.211         7.34 /  102       0.243          7.28 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
242 BOTT: Longitudinal direction - Only minimum steel required.
242 BOTT: Transverse direction   - Only minimum steel required.
242 TOP :     0.239         8.31 /  102       0.275          8.22 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
243 BOTT: Longitudinal direction - Only minimum steel required.
243 BOTT: Transverse direction   - Only minimum steel required.
243 TOP :     0.239         8.31 /  102       0.275          8.22 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
244 BOTT: Longitudinal direction - Only minimum steel required.
244 BOTT: Transverse direction   - Only minimum steel required.
244 TOP :     0.211         7.34 /  102       0.243          7.28 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
245 BOTT: Longitudinal direction - Only minimum steel required.
245 BOTT: Transverse direction   - Only minimum steel required.
245 TOP :     0.144         5.03 /  102       0.181          5.46 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
246 TOP : Longitudinal direction - Only minimum steel required.
246 BOTT: Longitudinal direction - Only minimum steel required.
246 TOP : Transverse direction   - Only minimum steel required.
246 BOTT: Transverse direction   - Only minimum steel required.
246 TOP :     0.133         0.57 /  102       0.133          2.82 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
247 TOP : Longitudinal direction - Only minimum steel required.
247 TOP : Transverse direction   - Only minimum steel required.
247 BOTT: Transverse direction   - Only minimum steel required.
247 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.277         9.60 /  102       0.133          0.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
248 TOP : Longitudinal direction - Only minimum steel required.
248 TOP : Transverse direction   - Only minimum steel required.
248 BOTT: Transverse direction   - Only minimum steel required.
```

```
248 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.311        10.74 /  102       0.133          0.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
249 TOP : Longitudinal direction - Only minimum steel required.
249 BOTT: Longitudinal direction - Only minimum steel required.
249 TOP : Transverse direction   - Only minimum steel required.
249 BOTT: Transverse direction   - Only minimum steel required.
249 TOP :     0.133         0.53 /  102       0.133          3.13 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
250 BOTT: Longitudinal direction - Only minimum steel required.
250 BOTT: Transverse direction   - Only minimum steel required.
250 TOP :     0.160         5.61 /  102       0.204          6.14 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
251 BOTT: Longitudinal direction - Only minimum steel required.
251 BOTT: Transverse direction   - Only minimum steel required.
251 TOP :     0.238         8.28 /  102       0.277          8.26 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
252 BOTT: Longitudinal direction - Only minimum steel required.
252 BOTT: Transverse direction   - Only minimum steel required.
252 TOP :     0.271         9.41 /  102       0.315          9.36 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
253 BOTT: Longitudinal direction - Only minimum steel required.
253 BOTT: Transverse direction   - Only minimum steel required.
253 TOP :     0.272         9.41 /  102       0.315          9.36 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
254 BOTT: Longitudinal direction - Only minimum steel required.
254 BOTT: Transverse direction   - Only minimum steel required.
254 TOP :     0.238         8.28 /  102       0.277          8.26 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
255 BOTT: Longitudinal direction - Only minimum steel required.
255 BOTT: Transverse direction   - Only minimum steel required.
255 TOP :     0.161         5.62 /  102       0.204          6.14 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
```

```
256 TOP : Longitudinal direction - Only minimum steel required.
256 BOTT: Longitudinal direction - Only minimum steel required.
256 TOP : Transverse direction   - Only minimum steel required.
256 BOTT: Transverse direction   - Only minimum steel required.
256 TOP :     0.133         0.53 /  102       0.133          3.13 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
257 TOP : Longitudinal direction - Only minimum steel required.
257 TOP : Transverse direction   - Only minimum steel required.
257 BOTT: Transverse direction   - Only minimum steel required.
257 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.310        10.73 /  102       0.133          0.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
258 TOP : Longitudinal direction - Only minimum steel required.
258 TOP : Transverse direction   - Only minimum steel required.
258 BOTT: Transverse direction   - Only minimum steel required.
258 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.311        10.74 /  102       0.133          0.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
259 TOP : Longitudinal direction - Only minimum steel required.
259 BOTT: Longitudinal direction - Only minimum steel required.
259 TOP : Transverse direction   - Only minimum steel required.
259 BOTT: Transverse direction   - Only minimum steel required.
259 TOP :     0.133         0.53 /  102       0.133          3.13 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
260 BOTT: Longitudinal direction - Only minimum steel required.
260 BOTT: Transverse direction   - Only minimum steel required.
260 TOP :     0.160         5.61 /  102       0.204          6.14 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
261 BOTT: Longitudinal direction - Only minimum steel required.
261 BOTT: Transverse direction   - Only minimum steel required.
261 TOP :     0.238         8.28 /  102       0.277          8.26 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
262 BOTT: Longitudinal direction - Only minimum steel required.
262 BOTT: Transverse direction   - Only minimum steel required.
262 TOP :     0.271         9.41 /  102       0.315          9.36 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
263 BOTT: Longitudinal direction - Only minimum steel required.
```

```
263 BOTT: Transverse direction   - Only minimum steel required.
263 TOP :     0.272         9.41 /  102       0.315          9.36 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
264 BOTT: Longitudinal direction - Only minimum steel required.
264 BOTT: Transverse direction   - Only minimum steel required.
264 TOP :     0.238         8.28 /  102       0.277          8.26 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
265 BOTT: Longitudinal direction - Only minimum steel required.
265 BOTT: Transverse direction   - Only minimum steel required.
265 TOP :     0.161         5.62 /  102       0.204          6.14 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
266 TOP : Longitudinal direction - Only minimum steel required.
266 BOTT: Longitudinal direction - Only minimum steel required.
266 TOP : Transverse direction   - Only minimum steel required.
266 BOTT: Transverse direction   - Only minimum steel required.
266 TOP :     0.133         0.53 /  102       0.133          3.13 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
267 TOP : Longitudinal direction - Only minimum steel required.
267 TOP : Transverse direction   - Only minimum steel required.
267 BOTT: Transverse direction   - Only minimum steel required.
267 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.310        10.73 /  102       0.133          0.90 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
268 TOP : Longitudinal direction - Only minimum steel required.
268 TOP : Transverse direction   - Only minimum steel required.
268 BOTT: Transverse direction   - Only minimum steel required.
268 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.277         9.61 /  102       0.133          0.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
269 TOP : Longitudinal direction - Only minimum steel required.
269 BOTT: Longitudinal direction - Only minimum steel required.
269 TOP : Transverse direction   - Only minimum steel required.
269 BOTT: Transverse direction   - Only minimum steel required.
269 TOP :     0.133         0.56 /  102       0.133          2.82 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
270 BOTT: Longitudinal direction - Only minimum steel required.
270 BOTT: Transverse direction   - Only minimum steel required.
```

```
270 TOP :     0.144         5.03 /  102       0.181          5.46 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
271 BOTT: Longitudinal direction - Only minimum steel required.
271 BOTT: Transverse direction   - Only minimum steel required.
271 TOP :     0.211         7.34 /  102       0.243          7.28 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
272 BOTT: Longitudinal direction - Only minimum steel required.
272 BOTT: Transverse direction   - Only minimum steel required.
272 TOP :     0.239         8.31 /  102       0.275          8.22 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
273 BOTT: Longitudinal direction - Only minimum steel required.
273 BOTT: Transverse direction   - Only minimum steel required.
273 TOP :     0.239         8.31 /  102       0.275          8.22 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
274 BOTT: Longitudinal direction - Only minimum steel required.
274 BOTT: Transverse direction   - Only minimum steel required.
274 TOP :     0.211         7.34 /  102       0.243          7.28 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
275 BOTT: Longitudinal direction - Only minimum steel required.
275 BOTT: Transverse direction   - Only minimum steel required.
275 TOP :     0.144         5.03 /  102       0.181          5.46 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
276 TOP : Longitudinal direction - Only minimum steel required.
276 BOTT: Longitudinal direction - Only minimum steel required.
276 TOP : Transverse direction   - Only minimum steel required.
276 BOTT: Transverse direction   - Only minimum steel required.
276 TOP :     0.133         0.57 /  102       0.133          2.82 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
277 TOP : Longitudinal direction - Only minimum steel required.
277 TOP : Transverse direction   - Only minimum steel required.
277 BOTT: Transverse direction   - Only minimum steel required.
277 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.277         9.60 /  102       0.133          0.80 /  102
```

```
    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
278 TOP : Longitudinal direction - Only minimum steel required.
278 TOP : Transverse direction   - Only minimum steel required.
278 BOTT: Transverse direction   - Only minimum steel required.
278 TOP :     0.133         0.00 /  102       0.133          0.00 /  102
    BOTT:     0.215         7.48 /  102       0.133          0.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
279 TOP : Longitudinal direction - Only minimum steel required.
279 BOTT: Longitudinal direction - Only minimum steel required.
279 TOP : Transverse direction   - Only minimum steel required.
279 BOTT: Transverse direction   - Only minimum steel required.
279 TOP :     0.133         0.53 /  102       0.133          1.99 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
280 TOP : Longitudinal direction - Only minimum steel required.
280 BOTT: Longitudinal direction - Only minimum steel required.
280 TOP : Transverse direction   - Only minimum steel required.
280 BOTT: Transverse direction   - Only minimum steel required.
280 TOP :     0.133         3.85 /  102       0.133          3.80 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
281 BOTT: Longitudinal direction - Only minimum steel required.
281 BOTT: Transverse direction   - Only minimum steel required.
281 TOP :     0.157         5.50 /  102       0.164          4.96 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
282 BOTT: Longitudinal direction - Only minimum steel required.
282 BOTT: Transverse direction   - Only minimum steel required.
282 TOP :     0.177         6.18 /  102       0.184          5.54 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
283 BOTT: Longitudinal direction - Only minimum steel required.
283 BOTT: Transverse direction   - Only minimum steel required.
283 TOP :     0.177         6.18 /  102       0.184          5.54 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
284 BOTT: Longitudinal direction - Only minimum steel required.
284 BOTT: Transverse direction   - Only minimum steel required.
284 TOP :     0.157         5.51 /  102       0.165          4.96 /  102
    BOTT:     0.133         0.00 /  102       0.133          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   150.000 MM
```

285 TOP : Longitudinal direction - Only minimum steel required.
285 BOTT: Longitudinal direction - Only minimum steel required.
285 TOP : Transverse direction - Only minimum steel required.
285 BOTT: Transverse direction - Only minimum steel required.
285 TOP : 0.133 3.86 / 102 0.133 3.80 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
286 TOP : Longitudinal direction - Only minimum steel required.
286 BOTT: Longitudinal direction - Only minimum steel required.
286 TOP : Transverse direction - Only minimum steel required.
286 BOTT: Transverse direction - Only minimum steel required.
286 TOP : 0.133 0.54 / 102 0.133 2.00 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
287 TOP : Longitudinal direction - Only minimum steel required.
287 TOP : Transverse direction - Only minimum steel required.
287 BOTT: Transverse direction - Only minimum steel required.
287 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.215 7.47 / 102 0.133 0.66 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
288 TOP : Longitudinal direction - Only minimum steel required.
288 BOTT: Longitudinal direction - Only minimum steel required.
288 TOP : Transverse direction - Only minimum steel required.
288 BOTT: Transverse direction - Only minimum steel required.
288 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 4.65 / 102 0.133 0.69 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
289 TOP : Longitudinal direction - Only minimum steel required.
289 BOTT: Longitudinal direction - Only minimum steel required.
289 TOP : Transverse direction - Only minimum steel required.
289 BOTT: Transverse direction - Only minimum steel required.
289 TOP : 0.133 0.29 / 102 0.133 0.21 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
290 TOP : Longitudinal direction - Only minimum steel required.
290 BOTT: Longitudinal direction - Only minimum steel required.
290 TOP : Transverse direction - Only minimum steel required.
290 BOTT: Transverse direction - Only minimum steel required.
290 TOP : 0.133 2.07 / 102 0.133 0.47 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
291 TOP : Longitudinal direction - Only minimum steel required.
291 BOTT: Longitudinal direction - Only minimum steel required.
291 TOP : Transverse direction - Only minimum steel required.

291 BOTT: Transverse direction - Only minimum steel required.
291 TOP : 0.133 2.89 / 102 0.133 0.50 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
292 TOP : Longitudinal direction - Only minimum steel required.
292 BOTT: Longitudinal direction - Only minimum steel required.
292 TOP : Transverse direction - Only minimum steel required.
292 BOTT: Transverse direction - Only minimum steel required.
292 TOP : 0.133 3.21 / 102 0.133 0.47 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
293 TOP : Longitudinal direction - Only minimum steel required.
293 BOTT: Longitudinal direction - Only minimum steel required.
293 TOP : Transverse direction - Only minimum steel required.
293 BOTT: Transverse direction - Only minimum steel required.
293 TOP : 0.133 3.21 / 102 0.133 0.47 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
294 TOP : Longitudinal direction - Only minimum steel required.
294 BOTT: Longitudinal direction - Only minimum steel required.
294 TOP : Transverse direction - Only minimum steel required.
294 BOTT: Transverse direction - Only minimum steel required.
294 TOP : 0.133 2.89 / 102 0.133 0.50 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
295 TOP : Longitudinal direction - Only minimum steel required.
295 BOTT: Longitudinal direction - Only minimum steel required.
295 TOP : Transverse direction - Only minimum steel required.
295 BOTT: Transverse direction - Only minimum steel required.
295 TOP : 0.133 2.07 / 102 0.133 0.47 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
296 TOP : Longitudinal direction - Only minimum steel required.
296 BOTT: Longitudinal direction - Only minimum steel required.
296 TOP : Transverse direction - Only minimum steel required.
296 BOTT: Transverse direction - Only minimum steel required.
296 TOP : 0.133 0.29 / 102 0.133 0.21 / 102
BOTT: 0.133 0.00 / 102 0.133 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
297 TOP : Longitudinal direction - Only minimum steel required.
297 BOTT: Longitudinal direction - Only minimum steel required.
297 TOP : Transverse direction - Only minimum steel required.
297 BOTT: Transverse direction - Only minimum steel required.

297 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 4.64 / 102 0.133 0.69 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
298 TOP : Longitudinal direction - Only minimum steel required.
298 BOTT: Longitudinal direction - Only minimum steel required.
298 TOP : Transverse direction - Only minimum steel required.
298 BOTT: Transverse direction - Only minimum steel required.
298 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 1.90 / 102 0.133 1.34 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
299 TOP : Longitudinal direction - Only minimum steel required.
299 BOTT: Longitudinal direction - Only minimum steel required.
299 TOP : Transverse direction - Only minimum steel required.
299 BOTT: Transverse direction - Only minimum steel required.
299 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 0.39 / 102 0.133 3.42 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
300 TOP : Longitudinal direction - Only minimum steel required.
300 BOTT: Longitudinal direction - Only minimum steel required.
300 TOP : Transverse direction - Only minimum steel required.
300 TOP : 0.133 0.00 / 102 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.187 5.64 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
301 TOP : Longitudinal direction - Only minimum steel required.
301 BOTT: Longitudinal direction - Only minimum steel required.
301 TOP : Transverse direction - Only minimum steel required.
301 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.246 7.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
302 TOP : Longitudinal direction - Only minimum steel required.
302 BOTT: Longitudinal direction - Only minimum steel required.
302 TOP : Transverse direction - Only minimum steel required.
302 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.24 / 102 0.277 8.27 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
303 TOP : Longitudinal direction - Only minimum steel required.
303 BOTT: Longitudinal direction - Only minimum steel required.
303 TOP : Transverse direction - Only minimum steel required.
303 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.23 / 102 0.277 8.27 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
304 TOP : Longitudinal direction - Only minimum steel required.

304 BOTT: Longitudinal direction - Only minimum steel required.
304 TOP : Transverse direction - Only minimum steel required.
304 TOP : 0.133 0.02 / 101 0.133 0.00 / 102
BOTT: 0.133 0.19 / 102 0.246 7.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
305 TOP : Longitudinal direction - Only minimum steel required.
305 BOTT: Longitudinal direction - Only minimum steel required.
305 TOP : Transverse direction - Only minimum steel required.
305 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 0.18 / 102 0.188 5.64 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
306 TOP : Longitudinal direction - Only minimum steel required.
306 BOTT: Longitudinal direction - Only minimum steel required.
306 TOP : Transverse direction - Only minimum steel required.
306 BOTT: Transverse direction - Only minimum steel required.
306 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 0.40 / 102 0.133 3.44 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 150.000 MM
307 TOP : Longitudinal direction - Only minimum steel required.
307 BOTT: Longitudinal direction - Only minimum steel required.
307 TOP : Transverse direction - Only minimum steel required.
307 BOTT: Transverse direction - Only minimum steel required.
307 TOP : 0.133 0.00 / 101 0.133 0.00 / 102
BOTT: 0.133 1.90 / 102 0.133 1.33 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
308 TOP : Longitudinal direction - Only minimum steel required.
308 BOTT: Longitudinal direction - Only minimum steel required.
308 TOP : Transverse direction - Only minimum steel required.
308 BOTT: Transverse direction - Only minimum steel required.
308 TOP : 0.355 23.02 / 102 0.355 1.91 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
309 TOP : Longitudinal direction - Only minimum steel required.
309 BOTT: Longitudinal direction - Only minimum steel required.
309 TOP : Transverse direction - Only minimum steel required.
309 BOTT: Transverse direction - Only minimum steel required.
309 TOP : 0.355 3.85 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 3.85 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
310 TOP : Longitudinal direction - Only minimum steel required.
310 BOTT: Longitudinal direction - Only minimum steel required.
310 TOP : Transverse direction - Only minimum steel required.
310 BOTT: Transverse direction - Only minimum steel required.

```
310 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.95 /  102       0.355          8.99 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
311 TOP : Longitudinal direction - Only minimum steel required.
311 BOTT: Longitudinal direction - Only minimum steel required.
311 TOP : Transverse direction   - Only minimum steel required.
311 BOTT: Transverse direction   - Only minimum steel required.
311 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        15.29 /  102       0.355         13.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
312 TOP : Longitudinal direction - Only minimum steel required.
312 BOTT: Longitudinal direction - Only minimum steel required.
312 TOP : Transverse direction   - Only minimum steel required.
312 BOTT: Transverse direction   - Only minimum steel required.
312 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.73 /  102       0.355         15.62 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
313 TOP : Longitudinal direction - Only minimum steel required.
313 BOTT: Longitudinal direction - Only minimum steel required.
313 TOP : Transverse direction   - Only minimum steel required.
313 BOTT: Transverse direction   - Only minimum steel required.
313 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.74 /  102       0.355         15.63 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
314 TOP : Longitudinal direction - Only minimum steel required.
314 BOTT: Longitudinal direction - Only minimum steel required.
314 TOP : Transverse direction   - Only minimum steel required.
314 BOTT: Transverse direction   - Only minimum steel required.
314 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        15.29 /  102       0.355         13.24 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
315 TOP : Longitudinal direction - Only minimum steel required.
315 BOTT: Longitudinal direction - Only minimum steel required.
315 TOP : Transverse direction   - Only minimum steel required.
315 BOTT: Transverse direction   - Only minimum steel required.
315 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         7.98 /  102       0.355          9.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
316 TOP : Longitudinal direction - Only minimum steel required.
316 BOTT: Longitudinal direction - Only minimum steel required.
316 TOP : Transverse direction   - Only minimum steel required.
316 BOTT: Transverse direction   - Only minimum steel required.
```

```
316 TOP :     0.355         3.53 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
317 TOP : Longitudinal direction - Only minimum steel required.
317 BOTT: Longitudinal direction - Only minimum steel required.
317 TOP : Transverse direction   - Only minimum steel required.
317 BOTT: Transverse direction   - Only minimum steel required.
317 TOP :     0.355        23.58 /  102       0.355          1.81 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
318 TOP : Longitudinal direction - Only minimum steel required.
318 BOTT: Longitudinal direction - Only minimum steel required.
318 TOP : Transverse direction   - Only minimum steel required.
318 BOTT: Transverse direction   - Only minimum steel required.
318 TOP :     0.355        31.65 /  102       0.355          3.67 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
319 TOP : Longitudinal direction - Only minimum steel required.
319 BOTT: Longitudinal direction - Only minimum steel required.
319 TOP : Transverse direction   - Only minimum steel required.
319 BOTT: Transverse direction   - Only minimum steel required.
319 TOP :     0.355         4.48 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          3.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
320 TOP : Longitudinal direction - Only minimum steel required.
320 BOTT: Longitudinal direction - Only minimum steel required.
320 TOP : Transverse direction   - Only minimum steel required.
320 BOTT: Transverse direction   - Only minimum steel required.
320 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        10.66 /  102       0.355          9.99 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
321 TOP : Longitudinal direction - Only minimum steel required.
321 BOTT: Longitudinal direction - Only minimum steel required.
321 TOP : Transverse direction   - Only minimum steel required.
321 BOTT: Transverse direction   - Only minimum steel required.
321 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        19.88 /  102       0.355         14.87 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
322 TOP : Longitudinal direction - Only minimum steel required.
322 BOTT: Longitudinal direction - Only minimum steel required.
322 TOP : Transverse direction   - Only minimum steel required.
322 BOTT: Transverse direction   - Only minimum steel required.
```

322 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 24.16 / 102 0.355 17.57 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
323 TOP : Longitudinal direction - Only minimum steel required.
323 BOTT: Longitudinal direction - Only minimum steel required.
323 TOP : Transverse direction - Only minimum steel required.
323 BOTT: Transverse direction - Only minimum steel required.
323 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 24.17 / 102 0.355 17.57 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
324 TOP : Longitudinal direction - Only minimum steel required.
324 BOTT: Longitudinal direction - Only minimum steel required.
324 TOP : Transverse direction - Only minimum steel required.
324 BOTT: Transverse direction - Only minimum steel required.
324 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 19.90 / 102 0.355 14.88 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
325 TOP : Longitudinal direction - Only minimum steel required.
325 BOTT: Longitudinal direction - Only minimum steel required.
325 TOP : Transverse direction - Only minimum steel required.
325 BOTT: Transverse direction - Only minimum steel required.
325 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 10.69 / 102 0.355 9.99 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
326 TOP : Longitudinal direction - Only minimum steel required.
326 BOTT: Longitudinal direction - Only minimum steel required.
326 TOP : Transverse direction - Only minimum steel required.
326 BOTT: Transverse direction - Only minimum steel required.
326 TOP : 0.355 4.40 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 3.78 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
327 TOP : Longitudinal direction - Only minimum steel required.
327 BOTT: Longitudinal direction - Only minimum steel required.
327 TOP : Transverse direction - Only minimum steel required.
327 BOTT: Transverse direction - Only minimum steel required.
327 TOP : 0.355 31.85 / 102 0.355 3.65 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
328 TOP : Longitudinal direction - Only minimum steel required.
328 BOTT: Longitudinal direction - Only minimum steel required.
328 TOP : Transverse direction - Only minimum steel required.
328 BOTT: Transverse direction - Only minimum steel required.

328 TOP : 0.355 39.03 / 102 0.355 4.52 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
329 TOP : Longitudinal direction - Only minimum steel required.
329 BOTT: Longitudinal direction - Only minimum steel required.
329 TOP : Transverse direction - Only minimum steel required.
329 BOTT: Transverse direction - Only minimum steel required.
329 TOP : 0.355 4.36 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 5.25 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
330 TOP : Longitudinal direction - Only minimum steel required.
330 BOTT: Longitudinal direction - Only minimum steel required.
330 TOP : Transverse direction - Only minimum steel required.
330 BOTT: Transverse direction - Only minimum steel required.
330 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 13.60 / 102 0.355 13.10 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
331 TOP : Longitudinal direction - Only minimum steel required.
331 BOTT: Longitudinal direction - Only minimum steel required.
331 TOP : Transverse direction - Only minimum steel required.
331 BOTT: Transverse direction - Only minimum steel required.
331 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 24.15 / 102 0.355 19.08 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
332 TOP : Longitudinal direction - Only minimum steel required.
332 BOTT: Longitudinal direction - Only minimum steel required.
332 TOP : Transverse direction - Only minimum steel required.
332 BOTT: Transverse direction - Only minimum steel required.
332 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 28.96 / 102 0.355 22.32 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
333 TOP : Longitudinal direction - Only minimum steel required.
333 BOTT: Longitudinal direction - Only minimum steel required.
333 TOP : Transverse direction - Only minimum steel required.
333 BOTT: Transverse direction - Only minimum steel required.
333 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 28.96 / 102 0.355 22.31 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
334 TOP : Longitudinal direction - Only minimum steel required.
334 BOTT: Longitudinal direction - Only minimum steel required.
334 TOP : Transverse direction - Only minimum steel required.
334 BOTT: Transverse direction - Only minimum steel required.

```
334 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        24.17 /  102       0.355         19.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
335 TOP : Longitudinal direction - Only minimum steel required.
335 BOTT: Longitudinal direction - Only minimum steel required.
335 TOP : Transverse direction   - Only minimum steel required.
335 BOTT: Transverse direction   - Only minimum steel required.
335 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        13.65 /  102       0.355         13.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
336 TOP : Longitudinal direction - Only minimum steel required.
336 BOTT: Longitudinal direction - Only minimum steel required.
336 TOP : Transverse direction   - Only minimum steel required.
336 BOTT: Transverse direction   - Only minimum steel required.
336 TOP :     0.355         4.36 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          5.20 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
337 TOP : Longitudinal direction - Only minimum steel required.
337 BOTT: Longitudinal direction - Only minimum steel required.
337 TOP : Transverse direction   - Only minimum steel required.
337 BOTT: Transverse direction   - Only minimum steel required.
337 TOP :     0.355        39.27 /  102       0.355          4.58 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
338 TOP : Longitudinal direction - Only minimum steel required.
338 BOTT: Longitudinal direction - Only minimum steel required.
338 TOP : Transverse direction   - Only minimum steel required.
338 BOTT: Transverse direction   - Only minimum steel required.
338 TOP :     0.355        44.70 /  102       0.355          4.54 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
339 TOP : Longitudinal direction - Only minimum steel required.
339 BOTT: Longitudinal direction - Only minimum steel required.
339 TOP : Transverse direction   - Only minimum steel required.
339 BOTT: Transverse direction   - Only minimum steel required.
339 TOP :     0.355         3.50 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          7.87 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
340 TOP : Longitudinal direction - Only minimum steel required.
340 BOTT: Longitudinal direction - Only minimum steel required.
340 TOP : Transverse direction   - Only minimum steel required.
340 BOTT: Transverse direction   - Only minimum steel required.
```

```
340 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        16.47 /  102       0.355         17.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
341 TOP : Longitudinal direction - Only minimum steel required.
341 BOTT: Longitudinal direction - Only minimum steel required.
341 TOP : Transverse direction   - Only minimum steel required.
341 BOTT: Transverse direction   - Only minimum steel required.
341 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        27.71 /  102       0.355         24.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
342 TOP : Longitudinal direction - Only minimum steel required.
342 BOTT: Longitudinal direction - Only minimum steel required.
342 TOP : Transverse direction   - Only minimum steel required.
342 BOTT: Transverse direction   - Only minimum steel required.
342 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.71 /  102       0.355         28.84 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
343 TOP : Longitudinal direction - Only minimum steel required.
343 BOTT: Longitudinal direction - Only minimum steel required.
343 TOP : Transverse direction   - Only minimum steel required.
343 BOTT: Transverse direction   - Only minimum steel required.
343 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        32.72 /  102       0.355         28.83 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
344 TOP : Longitudinal direction - Only minimum steel required.
344 BOTT: Longitudinal direction - Only minimum steel required.
344 TOP : Transverse direction   - Only minimum steel required.
344 BOTT: Transverse direction   - Only minimum steel required.
344 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        27.74 /  102       0.355         24.93 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
345 TOP : Longitudinal direction - Only minimum steel required.
345 BOTT: Longitudinal direction - Only minimum steel required.
345 TOP : Transverse direction   - Only minimum steel required.
345 BOTT: Transverse direction   - Only minimum steel required.
345 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        16.50 /  102       0.355         17.62 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
346 TOP : Longitudinal direction - Only minimum steel required.
346 BOTT: Longitudinal direction - Only minimum steel required.
346 TOP : Transverse direction   - Only minimum steel required.
346 BOTT: Transverse direction   - Only minimum steel required.
```

```
346 TOP :     0.355         3.53 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          7.81 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
347 TOP : Longitudinal direction - Only minimum steel required.
347 BOTT: Longitudinal direction - Only minimum steel required.
347 TOP : Transverse direction   - Only minimum steel required.
347 BOTT: Transverse direction   - Only minimum steel required.
347 TOP :     0.355        44.91 /  102       0.355          4.60 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
348 BOTT: Longitudinal direction - Only minimum steel required.
348 TOP : Transverse direction   - Only minimum steel required.
348 BOTT: Transverse direction   - Only minimum steel required.
348 TOP :     0.373        48.08 /  102       0.355          3.78 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
349 TOP : Longitudinal direction - Only minimum steel required.
349 BOTT: Longitudinal direction - Only minimum steel required.
349 TOP : Transverse direction   - Only minimum steel required.
349 BOTT: Transverse direction   - Only minimum steel required.
349 TOP :     0.355         1.92 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355         11.31 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
350 TOP : Longitudinal direction - Only minimum steel required.
350 BOTT: Longitudinal direction - Only minimum steel required.
350 TOP : Transverse direction   - Only minimum steel required.
350 BOTT: Transverse direction   - Only minimum steel required.
350 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        18.90 /  102       0.355         23.07 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
351 TOP : Longitudinal direction - Only minimum steel required.
351 BOTT: Longitudinal direction - Only minimum steel required.
351 TOP : Transverse direction   - Only minimum steel required.
351 BOTT: Transverse direction   - Only minimum steel required.
351 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        30.09 /  102       0.355         31.61 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
352 TOP : Longitudinal direction - Only minimum steel required.
352 BOTT: Longitudinal direction - Only minimum steel required.
352 TOP : Transverse direction   - Only minimum steel required.
352 BOTT: Transverse direction   - Only minimum steel required.
352 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        34.93 /  102       0.355         36.08 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
353 TOP : Longitudinal direction - Only minimum steel required.
353 BOTT: Longitudinal direction - Only minimum steel required.
353 TOP : Transverse direction - Only minimum steel required.
353 BOTT: Transverse direction - Only minimum steel required.
353 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 34.94 / 102 0.355 36.07 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
354 TOP : Longitudinal direction - Only minimum steel required.
354 BOTT: Longitudinal direction - Only minimum steel required.
354 TOP : Transverse direction - Only minimum steel required.
354 BOTT: Transverse direction - Only minimum steel required.
354 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 30.13 / 102 0.355 31.59 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
355 TOP : Longitudinal direction - Only minimum steel required.
355 BOTT: Longitudinal direction - Only minimum steel required.
355 TOP : Transverse direction - Only minimum steel required.
355 BOTT: Transverse direction - Only minimum steel required.
355 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 18.94 / 102 0.355 23.03 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
356 TOP : Longitudinal direction - Only minimum steel required.
356 BOTT: Longitudinal direction - Only minimum steel required.
356 TOP : Transverse direction - Only minimum steel required.
356 BOTT: Transverse direction - Only minimum steel required.
356 TOP : 0.355 1.95 / 102 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 11.26 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
357 BOTT: Longitudinal direction - Only minimum steel required.
357 TOP : Transverse direction - Only minimum steel required.
357 BOTT: Transverse direction - Only minimum steel required.
357 TOP : 0.374 48.25 / 102 0.355 3.83 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
358 BOTT: Longitudinal direction - Only minimum steel required.
358 TOP : Transverse direction - Only minimum steel required.
358 BOTT: Transverse direction - Only minimum steel required.
358 TOP : 0.376 48.41 / 102 0.355 2.22 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
359 TOP : Longitudinal direction - Only minimum steel required.
359 BOTT: Longitudinal direction - Only minimum steel required.

```
359 TOP : Transverse direction   - Only minimum steel required.
359 BOTT: Transverse direction   - Only minimum steel required.
359 TOP :     0.355         0.34 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.27 /  102       0.355         15.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
360 TOP : Longitudinal direction - Only minimum steel required.
360 BOTT: Longitudinal direction - Only minimum steel required.
360 TOP : Transverse direction   - Only minimum steel required.
360 BOTT: Transverse direction   - Only minimum steel required.
360 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        20.48 /  102       0.355         28.57 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
361 TOP : Longitudinal direction - Only minimum steel required.
361 BOTT: Longitudinal direction - Only minimum steel required.
361 TOP : Transverse direction   - Only minimum steel required.
361 BOTT: Transverse direction   - Only minimum steel required.
361 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        30.79 /  102       0.355         37.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
362 TOP : Longitudinal direction - Only minimum steel required.
362 BOTT: Longitudinal direction - Only minimum steel required.
362 TOP : Transverse direction   - Only minimum steel required.
362 BOTT: Transverse direction   - Only minimum steel required.
362 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        35.09 /  102       0.355         42.78 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
363 TOP : Longitudinal direction - Only minimum steel required.
363 BOTT: Longitudinal direction - Only minimum steel required.
363 TOP : Transverse direction   - Only minimum steel required.
363 BOTT: Transverse direction   - Only minimum steel required.
363 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        35.11 /  102       0.355         42.78 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
364 TOP : Longitudinal direction - Only minimum steel required.
364 BOTT: Longitudinal direction - Only minimum steel required.
364 TOP : Transverse direction   - Only minimum steel required.
364 BOTT: Transverse direction   - Only minimum steel required.
364 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        30.84 /  102       0.355         37.95 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
365 TOP : Longitudinal direction - Only minimum steel required.
365 BOTT: Longitudinal direction - Only minimum steel required.
365 TOP : Transverse direction   - Only minimum steel required.
365 BOTT: Transverse direction   - Only minimum steel required.
```

```
365 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        20.53 /  102       0.355         28.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
366 TOP : Longitudinal direction - Only minimum steel required.
366 BOTT: Longitudinal direction - Only minimum steel required.
366 TOP : Transverse direction   - Only minimum steel required.
366 BOTT: Transverse direction   - Only minimum steel required.
366 TOP :     0.355         0.35 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.26 /  102       0.355         15.20 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
367 BOTT: Longitudinal direction - Only minimum steel required.
367 TOP : Transverse direction   - Only minimum steel required.
367 BOTT: Transverse direction   - Only minimum steel required.
367 TOP :     0.377        48.55 /  102       0.355          2.26 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
368 TOP : Longitudinal direction - Only minimum steel required.
368 BOTT: Longitudinal direction - Only minimum steel required.
368 TOP : Transverse direction   - Only minimum steel required.
368 BOTT: Transverse direction   - Only minimum steel required.
368 TOP :     0.355        44.92 /  102       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.27 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
369 TOP : Longitudinal direction - Only minimum steel required.
369 BOTT: Longitudinal direction - Only minimum steel required.
369 TOP : Transverse direction   - Only minimum steel required.
369 BOTT: Transverse direction   - Only minimum steel required.
369 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         2.78 /  102       0.355         19.17 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
370 TOP : Longitudinal direction - Only minimum steel required.
370 BOTT: Longitudinal direction - Only minimum steel required.
370 TOP : Transverse direction   - Only minimum steel required.
370 BOTT: Transverse direction   - Only minimum steel required.
370 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        20.67 /  102       0.355         33.18 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
371 TOP : Longitudinal direction - Only minimum steel required.
371 BOTT: Longitudinal direction - Only minimum steel required.
371 TOP : Transverse direction   - Only minimum steel required.
371 BOTT: Transverse direction   - Only minimum steel required.
371 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        29.27 /  102       0.355         42.61 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
372 TOP : Longitudinal direction - Only minimum steel required.
372 BOTT: Longitudinal direction - Only minimum steel required.
372 TOP : Transverse direction - Only minimum steel required.
372 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 32.72 / 102 0.382 47.34 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
373 TOP : Longitudinal direction - Only minimum steel required.
373 BOTT: Longitudinal direction - Only minimum steel required.
373 TOP : Transverse direction - Only minimum steel required.
373 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 32.74 / 102 0.382 47.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
374 TOP : Longitudinal direction - Only minimum steel required.
374 BOTT: Longitudinal direction - Only minimum steel required.
374 TOP : Transverse direction - Only minimum steel required.
374 BOTT: Transverse direction - Only minimum steel required.
374 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 29.33 / 102 0.355 42.63 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
375 TOP : Longitudinal direction - Only minimum steel required.
375 BOTT: Longitudinal direction - Only minimum steel required.
375 TOP : Transverse direction - Only minimum steel required.
375 BOTT: Transverse direction - Only minimum steel required.
375 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 20.73 / 102 0.355 33.20 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
376 TOP : Longitudinal direction - Only minimum steel required.
376 BOTT: Longitudinal direction - Only minimum steel required.
376 TOP : Transverse direction - Only minimum steel required.
376 BOTT: Transverse direction - Only minimum steel required.
376 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 2.80 / 102 0.355 19.18 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
377 TOP : Longitudinal direction - Only minimum steel required.
377 BOTT: Longitudinal direction - Only minimum steel required.
377 TOP : Transverse direction - Only minimum steel required.
377 BOTT: Transverse direction - Only minimum steel required.
377 TOP : 0.355 45.03 / 102 0.355 0.01 / 101
BOTT: 0.355 0.00 / 102 0.355 0.27 / 103

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
378 TOP : Longitudinal direction - Only minimum steel required.
378 BOTT: Longitudinal direction - Only minimum steel required.

```
378 TOP : Transverse direction   - Only minimum steel required.
378 BOTT: Transverse direction   - Only minimum steel required.
378 TOP :     0.355        36.94 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          3.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
379 TOP : Longitudinal direction - Only minimum steel required.
379 BOTT: Longitudinal direction - Only minimum steel required.
379 TOP : Transverse direction   - Only minimum steel required.
379 BOTT: Transverse direction   - Only minimum steel required.
379 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         5.03 /  102       0.355         22.39 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
380 TOP : Longitudinal direction - Only minimum steel required.
380 BOTT: Longitudinal direction - Only minimum steel required.
380 TOP : Transverse direction   - Only minimum steel required.
380 BOTT: Transverse direction   - Only minimum steel required.
380 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        18.86 /  102       0.355         35.45 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
381 TOP : Longitudinal direction - Only minimum steel required.
381 BOTT: Longitudinal direction - Only minimum steel required.
381 TOP : Transverse direction   - Only minimum steel required.
381 BOTT: Transverse direction   - Only minimum steel required.
381 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        25.08 /  102       0.355         43.65 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
382 TOP : Longitudinal direction - Only minimum steel required.
382 BOTT: Longitudinal direction - Only minimum steel required.
382 TOP : Transverse direction   - Only minimum steel required.
382 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        27.47 /  102       0.384         47.60 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
383 TOP : Longitudinal direction - Only minimum steel required.
383 BOTT: Longitudinal direction - Only minimum steel required.
383 TOP : Transverse direction   - Only minimum steel required.
383 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        27.50 /  102       0.384         47.63 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
384 TOP : Longitudinal direction - Only minimum steel required.
384 BOTT: Longitudinal direction - Only minimum steel required.
384 TOP : Transverse direction   - Only minimum steel required.
384 BOTT: Transverse direction   - Only minimum steel required.
```

```
384 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        25.16 /  102       0.355         43.72 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
385 TOP : Longitudinal direction - Only minimum steel required.
385 BOTT: Longitudinal direction - Only minimum steel required.
385 TOP : Transverse direction   - Only minimum steel required.
385 BOTT: Transverse direction   - Only minimum steel required.
385 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        18.95 /  102       0.355         35.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
386 TOP : Longitudinal direction - Only minimum steel required.
386 BOTT: Longitudinal direction - Only minimum steel required.
386 TOP : Transverse direction   - Only minimum steel required.
386 BOTT: Transverse direction   - Only minimum steel required.
386 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         5.08 /  102       0.355         22.46 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
387 TOP : Longitudinal direction - Only minimum steel required.
387 BOTT: Longitudinal direction - Only minimum steel required.
387 TOP : Transverse direction   - Only minimum steel required.
387 BOTT: Transverse direction   - Only minimum steel required.
387 TOP :     0.355        37.02 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          3.57 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
388 TOP : Longitudinal direction - Only minimum steel required.
388 BOTT: Longitudinal direction - Only minimum steel required.
388 TOP : Transverse direction   - Only minimum steel required.
388 BOTT: Transverse direction   - Only minimum steel required.
388 TOP :     0.355        24.33 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          7.30 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
389 TOP : Longitudinal direction - Only minimum steel required.
389 BOTT: Longitudinal direction - Only minimum steel required.
389 TOP : Transverse direction   - Only minimum steel required.
389 BOTT: Transverse direction   - Only minimum steel required.
389 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         6.03 /  102       0.355         23.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
390 TOP : Longitudinal direction - Only minimum steel required.
390 BOTT: Longitudinal direction - Only minimum steel required.
390 TOP : Transverse direction   - Only minimum steel required.
390 BOTT: Transverse direction   - Only minimum steel required.
```

```
390 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        14.47 /  102       0.355         33.23 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
391 TOP : Longitudinal direction - Only minimum steel required.
391 BOTT: Longitudinal direction - Only minimum steel required.
391 TOP : Transverse direction   - Only minimum steel required.
391 BOTT: Transverse direction   - Only minimum steel required.
391 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        17.96 /  102       0.355         38.40 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
392 TOP : Longitudinal direction - Only minimum steel required.
392 BOTT: Longitudinal direction - Only minimum steel required.
392 TOP : Transverse direction   - Only minimum steel required.
392 BOTT: Transverse direction   - Only minimum steel required.
392 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        19.24 /  102       0.355         40.72 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
393 TOP : Longitudinal direction - Only minimum steel required.
393 BOTT: Longitudinal direction - Only minimum steel required.
393 TOP : Transverse direction   - Only minimum steel required.
393 BOTT: Transverse direction   - Only minimum steel required.
393 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        19.26 /  102       0.355         40.78 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
394 TOP : Longitudinal direction - Only minimum steel required.
394 BOTT: Longitudinal direction - Only minimum steel required.
394 TOP : Transverse direction   - Only minimum steel required.
394 BOTT: Transverse direction   - Only minimum steel required.
394 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        18.04 /  102       0.355         38.57 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
395 TOP : Longitudinal direction - Only minimum steel required.
395 BOTT: Longitudinal direction - Only minimum steel required.
395 TOP : Transverse direction   - Only minimum steel required.
395 BOTT: Transverse direction   - Only minimum steel required.
395 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        14.58 /  102       0.355         33.46 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
396 TOP : Longitudinal direction - Only minimum steel required.
396 BOTT: Longitudinal direction - Only minimum steel required.
396 TOP : Transverse direction   - Only minimum steel required.
396 BOTT: Transverse direction   - Only minimum steel required.
```

```
396 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         6.11 /  102       0.355         23.75 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
397 TOP : Longitudinal direction - Only minimum steel required.
397 BOTT: Longitudinal direction - Only minimum steel required.
397 TOP : Transverse direction   - Only minimum steel required.
397 BOTT: Transverse direction   - Only minimum steel required.
397 TOP :     0.355        24.37 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          7.40 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
398 TOP : Longitudinal direction - Only minimum steel required.
398 BOTT: Longitudinal direction - Only minimum steel required.
398 TOP : Transverse direction   - Only minimum steel required.
398 BOTT: Transverse direction   - Only minimum steel required.
398 TOP :     0.355         7.66 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          9.20 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
399 TOP : Longitudinal direction - Only minimum steel required.
399 BOTT: Longitudinal direction - Only minimum steel required.
399 TOP : Transverse direction   - Only minimum steel required.
399 BOTT: Transverse direction   - Only minimum steel required.
399 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         4.50 /  102       0.355         20.79 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
400 TOP : Longitudinal direction - Only minimum steel required.
400 BOTT: Longitudinal direction - Only minimum steel required.
400 TOP : Transverse direction   - Only minimum steel required.
400 BOTT: Transverse direction   - Only minimum steel required.
400 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         7.13 /  102       0.355         27.14 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
401 TOP : Longitudinal direction - Only minimum steel required.
401 BOTT: Longitudinal direction - Only minimum steel required.
401 TOP : Transverse direction   - Only minimum steel required.
401 BOTT: Transverse direction   - Only minimum steel required.
401 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         7.91 /  102       0.355         30.02 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
402 TOP : Longitudinal direction - Only minimum steel required.
402 BOTT: Longitudinal direction - Only minimum steel required.
402 TOP : Transverse direction   - Only minimum steel required.
402 BOTT: Transverse direction   - Only minimum steel required.
```

```
402 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         8.13 /  102       0.355         31.36 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
403 TOP : Longitudinal direction - Only minimum steel required.
403 BOTT: Longitudinal direction - Only minimum steel required.
403 TOP : Transverse direction   - Only minimum steel required.
403 BOTT: Transverse direction   - Only minimum steel required.
403 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         8.16 /  102       0.355         31.42 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
404 TOP : Longitudinal direction - Only minimum steel required.
404 BOTT: Longitudinal direction - Only minimum steel required.
404 TOP : Transverse direction   - Only minimum steel required.
404 BOTT: Transverse direction   - Only minimum steel required.
404 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         7.99 /  102       0.355         30.17 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
405 TOP : Longitudinal direction - Only minimum steel required.
405 BOTT: Longitudinal direction - Only minimum steel required.
405 TOP : Transverse direction   - Only minimum steel required.
405 BOTT: Transverse direction   - Only minimum steel required.
405 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         7.24 /  102       0.355         27.35 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
406 TOP : Longitudinal direction - Only minimum steel required.
406 BOTT: Longitudinal direction - Only minimum steel required.
406 TOP : Transverse direction   - Only minimum steel required.
406 BOTT: Transverse direction   - Only minimum steel required.
406 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         4.60 /  102       0.355         20.99 /  103

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
407 TOP : Longitudinal direction - Only minimum steel required.
407 BOTT: Longitudinal direction - Only minimum steel required.
407 TOP : Transverse direction   - Only minimum steel required.
407 BOTT: Transverse direction   - Only minimum steel required.
407 TOP :     0.355         7.65 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          9.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
408 TOP : Longitudinal direction - Only minimum steel required.
408 BOTT: Longitudinal direction - Only minimum steel required.
408 TOP : Transverse direction   - Only minimum steel required.
408 BOTT: Transverse direction   - Only minimum steel required.
```

```
408 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355        23.02 /  102       0.355          1.91 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
409 TOP : Longitudinal direction - Only minimum steel required.
409 BOTT: Longitudinal direction - Only minimum steel required.
409 TOP : Transverse direction   - Only minimum steel required.
409 BOTT: Transverse direction   - Only minimum steel required.
409 TOP :     0.355         0.00 /  102       0.355          3.85 /  102
    BOTT:     0.355         3.85 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
410 TOP : Longitudinal direction - Only minimum steel required.
410 BOTT: Longitudinal direction - Only minimum steel required.
410 TOP : Transverse direction   - Only minimum steel required.
410 BOTT: Transverse direction   - Only minimum steel required.
410 TOP :     0.355         7.95 /  102       0.355          8.99 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
411 TOP : Longitudinal direction - Only minimum steel required.
411 BOTT: Longitudinal direction - Only minimum steel required.
411 TOP : Transverse direction   - Only minimum steel required.
411 BOTT: Transverse direction   - Only minimum steel required.
411 TOP :     0.355        15.29 /  102       0.355         13.23 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
412 TOP : Longitudinal direction - Only minimum steel required.
412 BOTT: Longitudinal direction - Only minimum steel required.
412 TOP : Transverse direction   - Only minimum steel required.
412 BOTT: Transverse direction   - Only minimum steel required.
412 TOP :     0.355        18.73 /  102       0.355         15.62 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
413 TOP : Longitudinal direction - Only minimum steel required.
413 BOTT: Longitudinal direction - Only minimum steel required.
413 TOP : Transverse direction   - Only minimum steel required.
413 BOTT: Transverse direction   - Only minimum steel required.
413 TOP :     0.355        18.74 /  102       0.355         15.63 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
414 TOP : Longitudinal direction - Only minimum steel required.
414 BOTT: Longitudinal direction - Only minimum steel required.
414 TOP : Transverse direction   - Only minimum steel required.
414 BOTT: Transverse direction   - Only minimum steel required.
```

```
414 TOP :     0.355        15.29 /  102       0.355         13.24 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
415 TOP : Longitudinal direction - Only minimum steel required.
415 BOTT: Longitudinal direction - Only minimum steel required.
415 TOP : Transverse direction   - Only minimum steel required.
415 BOTT: Transverse direction   - Only minimum steel required.
415 TOP :     0.355         7.98 /  102       0.355          9.06 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
416 TOP : Longitudinal direction - Only minimum steel required.
416 BOTT: Longitudinal direction - Only minimum steel required.
416 TOP : Transverse direction   - Only minimum steel required.
416 BOTT: Transverse direction   - Only minimum steel required.
416 TOP :     0.355         0.00 /  102       0.355          3.96 /  102
    BOTT:     0.355         3.53 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
417 TOP : Longitudinal direction - Only minimum steel required.
417 BOTT: Longitudinal direction - Only minimum steel required.
417 TOP : Transverse direction   - Only minimum steel required.
417 BOTT: Transverse direction   - Only minimum steel required.
417 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        23.58 /  102       0.355          1.81 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
418 TOP : Longitudinal direction - Only minimum steel required.
418 BOTT: Longitudinal direction - Only minimum steel required.
418 TOP : Transverse direction   - Only minimum steel required.
418 BOTT: Transverse direction   - Only minimum steel required.
418 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        31.65 /  102       0.355          3.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
419 TOP : Longitudinal direction - Only minimum steel required.
419 BOTT: Longitudinal direction - Only minimum steel required.
419 TOP : Transverse direction   - Only minimum steel required.
419 BOTT: Transverse direction   - Only minimum steel required.
419 TOP :     0.355         0.00 /  102       0.355          3.80 /  102
    BOTT:     0.355         4.48 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
420 TOP : Longitudinal direction - Only minimum steel required.
420 BOTT: Longitudinal direction - Only minimum steel required.
420 TOP : Transverse direction   - Only minimum steel required.
420 BOTT: Transverse direction   - Only minimum steel required.
```

```
420 TOP :     0.355        10.66 /  102       0.355          9.99 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
421 TOP : Longitudinal direction - Only minimum steel required.
421 BOTT: Longitudinal direction - Only minimum steel required.
421 TOP : Transverse direction   - Only minimum steel required.
421 BOTT: Transverse direction   - Only minimum steel required.
421 TOP :     0.355        19.88 /  102       0.355         14.87 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
422 TOP : Longitudinal direction - Only minimum steel required.
422 BOTT: Longitudinal direction - Only minimum steel required.
422 TOP : Transverse direction   - Only minimum steel required.
422 BOTT: Transverse direction   - Only minimum steel required.
422 TOP :     0.355        24.16 /  102       0.355         17.57 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
423 TOP : Longitudinal direction - Only minimum steel required.
423 BOTT: Longitudinal direction - Only minimum steel required.
423 TOP : Transverse direction   - Only minimum steel required.
423 BOTT: Transverse direction   - Only minimum steel required.
423 TOP :     0.355        24.17 /  102       0.355         17.57 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
424 TOP : Longitudinal direction - Only minimum steel required.
424 BOTT: Longitudinal direction - Only minimum steel required.
424 TOP : Transverse direction   - Only minimum steel required.
424 BOTT: Transverse direction   - Only minimum steel required.
424 TOP :     0.355        19.90 /  102       0.355         14.88 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
425 TOP : Longitudinal direction - Only minimum steel required.
425 BOTT: Longitudinal direction - Only minimum steel required.
425 TOP : Transverse direction   - Only minimum steel required.
425 BOTT: Transverse direction   - Only minimum steel required.
425 TOP :     0.355        10.69 /  102       0.355          9.99 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
426 TOP : Longitudinal direction - Only minimum steel required.
426 BOTT: Longitudinal direction - Only minimum steel required.
426 TOP : Transverse direction   - Only minimum steel required.
426 BOTT: Transverse direction   - Only minimum steel required.
```

```
426 TOP :     0.355         0.00 /  102       0.355          3.78 /  102
    BOTT:     0.355         4.40 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
427 TOP : Longitudinal direction - Only minimum steel required.
427 BOTT: Longitudinal direction - Only minimum steel required.
427 TOP : Transverse direction   - Only minimum steel required.
427 BOTT: Transverse direction   - Only minimum steel required.
427 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        31.85 /  102       0.355          3.65 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
428 TOP : Longitudinal direction - Only minimum steel required.
428 BOTT: Longitudinal direction - Only minimum steel required.
428 TOP : Transverse direction   - Only minimum steel required.
428 BOTT: Transverse direction   - Only minimum steel required.
428 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        39.03 /  102       0.355          4.52 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
429 TOP : Longitudinal direction - Only minimum steel required.
429 BOTT: Longitudinal direction - Only minimum steel required.
429 TOP : Transverse direction   - Only minimum steel required.
429 BOTT: Transverse direction   - Only minimum steel required.
429 TOP :     0.355         0.00 /  102       0.355          5.25 /  102
    BOTT:     0.355         4.36 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
430 TOP : Longitudinal direction - Only minimum steel required.
430 BOTT: Longitudinal direction - Only minimum steel required.
430 TOP : Transverse direction   - Only minimum steel required.
430 BOTT: Transverse direction   - Only minimum steel required.
430 TOP :     0.355        13.60 /  102       0.355         13.10 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
431 TOP : Longitudinal direction - Only minimum steel required.
431 BOTT: Longitudinal direction - Only minimum steel required.
431 TOP : Transverse direction   - Only minimum steel required.
431 BOTT: Transverse direction   - Only minimum steel required.
431 TOP :     0.355        24.15 /  102       0.355         19.08 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
432 TOP : Longitudinal direction - Only minimum steel required.
432 BOTT: Longitudinal direction - Only minimum steel required.
432 TOP : Transverse direction   - Only minimum steel required.
432 BOTT: Transverse direction   - Only minimum steel required.
```

```
432 TOP :     0.355        28.96 /  102       0.355         22.32 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
433 TOP : Longitudinal direction - Only minimum steel required.
433 BOTT: Longitudinal direction - Only minimum steel required.
433 TOP : Transverse direction   - Only minimum steel required.
433 BOTT: Transverse direction   - Only minimum steel required.
433 TOP :     0.355        28.96 /  102       0.355         22.31 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
434 TOP : Longitudinal direction - Only minimum steel required.
434 BOTT: Longitudinal direction - Only minimum steel required.
434 TOP : Transverse direction   - Only minimum steel required.
434 BOTT: Transverse direction   - Only minimum steel required.
434 TOP :     0.355        24.17 /  102       0.355         19.06 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
435 TOP : Longitudinal direction - Only minimum steel required.
435 BOTT: Longitudinal direction - Only minimum steel required.
435 TOP : Transverse direction   - Only minimum steel required.
435 BOTT: Transverse direction   - Only minimum steel required.
435 TOP :     0.355        13.65 /  102       0.355         13.06 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
436 TOP : Longitudinal direction - Only minimum steel required.
436 BOTT: Longitudinal direction - Only minimum steel required.
436 TOP : Transverse direction   - Only minimum steel required.
436 BOTT: Transverse direction   - Only minimum steel required.
436 TOP :     0.355         0.00 /  102       0.355          5.20 /  102
    BOTT:     0.355         4.36 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
437 TOP : Longitudinal direction - Only minimum steel required.
437 BOTT: Longitudinal direction - Only minimum steel required.
437 TOP : Transverse direction   - Only minimum steel required.
437 BOTT: Transverse direction   - Only minimum steel required.
437 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        39.27 /  102       0.355          4.58 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
438 TOP : Longitudinal direction - Only minimum steel required.
438 BOTT: Longitudinal direction - Only minimum steel required.
438 TOP : Transverse direction   - Only minimum steel required.
438 BOTT: Transverse direction   - Only minimum steel required.
```

```
438 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        44.70 /  102       0.355          4.54 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
439 TOP : Longitudinal direction - Only minimum steel required.
439 BOTT: Longitudinal direction - Only minimum steel required.
439 TOP : Transverse direction   - Only minimum steel required.
439 BOTT: Transverse direction   - Only minimum steel required.
439 TOP :     0.355         0.00 /  102       0.355          7.87 /  102
    BOTT:     0.355         3.50 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
440 TOP : Longitudinal direction - Only minimum steel required.
440 BOTT: Longitudinal direction - Only minimum steel required.
440 TOP : Transverse direction   - Only minimum steel required.
440 BOTT: Transverse direction   - Only minimum steel required.
440 TOP :     0.355        16.47 /  102       0.355         17.67 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
441 TOP : Longitudinal direction - Only minimum steel required.
441 BOTT: Longitudinal direction - Only minimum steel required.
441 TOP : Transverse direction   - Only minimum steel required.
441 BOTT: Transverse direction   - Only minimum steel required.
441 TOP :     0.355        27.71 /  102       0.355         24.96 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
442 TOP : Longitudinal direction - Only minimum steel required.
442 BOTT: Longitudinal direction - Only minimum steel required.
442 TOP : Transverse direction   - Only minimum steel required.
442 BOTT: Transverse direction   - Only minimum steel required.
442 TOP :     0.355        32.71 /  102       0.355         28.84 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
443 TOP : Longitudinal direction - Only minimum steel required.
443 BOTT: Longitudinal direction - Only minimum steel required.
443 TOP : Transverse direction   - Only minimum steel required.
443 BOTT: Transverse direction   - Only minimum steel required.
443 TOP :     0.355        32.72 /  102       0.355         28.83 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
444 TOP : Longitudinal direction - Only minimum steel required.
444 BOTT: Longitudinal direction - Only minimum steel required.
444 TOP : Transverse direction   - Only minimum steel required.
444 BOTT: Transverse direction   - Only minimum steel required.
```

```
444 TOP :     0.355        27.74 /  102       0.355         24.93 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
445 TOP : Longitudinal direction - Only minimum steel required.
445 BOTT: Longitudinal direction - Only minimum steel required.
445 TOP : Transverse direction   - Only minimum steel required.
445 BOTT: Transverse direction   - Only minimum steel required.
445 TOP :     0.355        16.50 /  102       0.355         17.62 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
446 TOP : Longitudinal direction - Only minimum steel required.
446 BOTT: Longitudinal direction - Only minimum steel required.
446 TOP : Transverse direction   - Only minimum steel required.
446 BOTT: Transverse direction   - Only minimum steel required.
446 TOP :     0.355         0.00 /  102       0.355          7.81 /  102
    BOTT:     0.355         3.53 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
447 TOP : Longitudinal direction - Only minimum steel required.
447 BOTT: Longitudinal direction - Only minimum steel required.
447 TOP : Transverse direction   - Only minimum steel required.
447 BOTT: Transverse direction   - Only minimum steel required.
447 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        44.91 /  102       0.355          4.60 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
448 TOP : Longitudinal direction - Only minimum steel required.
448 TOP : Transverse direction   - Only minimum steel required.
448 BOTT: Transverse direction   - Only minimum steel required.
448 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.373        48.08 /  102       0.355          3.78 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
449 TOP : Longitudinal direction - Only minimum steel required.
449 BOTT: Longitudinal direction - Only minimum steel required.
449 TOP : Transverse direction   - Only minimum steel required.
449 BOTT: Transverse direction   - Only minimum steel required.
449 TOP :     0.355         0.00 /  102       0.355         11.31 /  102
    BOTT:     0.355         1.92 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
450 TOP : Longitudinal direction - Only minimum steel required.
450 BOTT: Longitudinal direction - Only minimum steel required.
450 TOP : Transverse direction   - Only minimum steel required.
450 BOTT: Transverse direction   - Only minimum steel required.
450 TOP :     0.355        18.90 /  102       0.355         23.07 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
451 TOP : Longitudinal direction - Only minimum steel required.
451 BOTT: Longitudinal direction - Only minimum steel required.
451 TOP : Transverse direction - Only minimum steel required.
451 BOTT: Transverse direction - Only minimum steel required.
451 TOP : 0.355 30.09 / 102 0.355 31.61 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
452 TOP : Longitudinal direction - Only minimum steel required.
452 BOTT: Longitudinal direction - Only minimum steel required.
452 TOP : Transverse direction - Only minimum steel required.
452 BOTT: Transverse direction - Only minimum steel required.
452 TOP : 0.355 34.93 / 102 0.355 36.08 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
453 TOP : Longitudinal direction - Only minimum steel required.
453 BOTT: Longitudinal direction - Only minimum steel required.
453 TOP : Transverse direction - Only minimum steel required.
453 BOTT: Transverse direction - Only minimum steel required.
453 TOP : 0.355 34.94 / 102 0.355 36.07 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
454 TOP : Longitudinal direction - Only minimum steel required.
454 BOTT: Longitudinal direction - Only minimum steel required.
454 TOP : Transverse direction - Only minimum steel required.
454 BOTT: Transverse direction - Only minimum steel required.
454 TOP : 0.355 30.13 / 102 0.355 31.59 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
455 TOP : Longitudinal direction - Only minimum steel required.
455 BOTT: Longitudinal direction - Only minimum steel required.
455 TOP : Transverse direction - Only minimum steel required.
455 BOTT: Transverse direction - Only minimum steel required.
455 TOP : 0.355 18.94 / 102 0.355 23.03 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
456 TOP : Longitudinal direction - Only minimum steel required.
456 BOTT: Longitudinal direction - Only minimum steel required.
456 TOP : Transverse direction - Only minimum steel required.
456 BOTT: Transverse direction - Only minimum steel required.
456 TOP : 0.355 0.00 / 102 0.355 11.26 / 102
BOTT: 0.355 1.95 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM

457 TOP : Longitudinal direction - Only minimum steel required.
457 TOP : Transverse direction - Only minimum steel required.
457 BOTT: Transverse direction - Only minimum steel required.
457 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.374 48.25 / 102 0.355 3.83 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
458 TOP : Longitudinal direction - Only minimum steel required.
458 TOP : Transverse direction - Only minimum steel required.
458 BOTT: Transverse direction - Only minimum steel required.
458 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.376 48.41 / 102 0.355 2.22 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
459 TOP : Longitudinal direction - Only minimum steel required.
459 BOTT: Longitudinal direction - Only minimum steel required.
459 TOP : Transverse direction - Only minimum steel required.
459 BOTT: Transverse direction - Only minimum steel required.
459 TOP : 0.355 0.27 / 102 0.355 15.23 / 102
BOTT: 0.355 0.34 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
460 TOP : Longitudinal direction - Only minimum steel required.
460 BOTT: Longitudinal direction - Only minimum steel required.
460 TOP : Transverse direction - Only minimum steel required.
460 BOTT: Transverse direction - Only minimum steel required.
460 TOP : 0.355 20.48 / 102 0.355 28.57 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
461 TOP : Longitudinal direction - Only minimum steel required.
461 BOTT: Longitudinal direction - Only minimum steel required.
461 TOP : Transverse direction - Only minimum steel required.
461 BOTT: Transverse direction - Only minimum steel required.
461 TOP : 0.355 30.79 / 102 0.355 37.96 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
462 TOP : Longitudinal direction - Only minimum steel required.
462 BOTT: Longitudinal direction - Only minimum steel required.
462 TOP : Transverse direction - Only minimum steel required.
462 BOTT: Transverse direction - Only minimum steel required.
462 TOP : 0.355 35.09 / 102 0.355 42.78 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
463 TOP : Longitudinal direction - Only minimum steel required.
463 BOTT: Longitudinal direction - Only minimum steel required.
463 TOP : Transverse direction - Only minimum steel required.
463 BOTT: Transverse direction - Only minimum steel required.

463 TOP : 0.355 35.11 / 102 0.355 42.78 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
464 TOP : Longitudinal direction - Only minimum steel required.
464 BOTT: Longitudinal direction - Only minimum steel required.
464 TOP : Transverse direction - Only minimum steel required.
464 BOTT: Transverse direction - Only minimum steel required.
464 TOP : 0.355 30.84 / 102 0.355 37.95 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
465 TOP : Longitudinal direction - Only minimum steel required.
465 BOTT: Longitudinal direction - Only minimum steel required.
465 TOP : Transverse direction - Only minimum steel required.
465 BOTT: Transverse direction - Only minimum steel required.
465 TOP : 0.355 20.53 / 102 0.355 28.55 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
466 TOP : Longitudinal direction - Only minimum steel required.
466 BOTT: Longitudinal direction - Only minimum steel required.
466 TOP : Transverse direction - Only minimum steel required.
466 BOTT: Transverse direction - Only minimum steel required.
466 TOP : 0.355 0.26 / 102 0.355 15.20 / 102
BOTT: 0.355 0.35 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
467 TOP : Longitudinal direction - Only minimum steel required.
467 TOP : Transverse direction - Only minimum steel required.
467 BOTT: Transverse direction - Only minimum steel required.
467 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.377 48.55 / 102 0.355 2.26 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
468 TOP : Longitudinal direction - Only minimum steel required.
468 BOTT: Longitudinal direction - Only minimum steel required.
468 TOP : Transverse direction - Only minimum steel required.
468 BOTT: Transverse direction - Only minimum steel required.
468 TOP : 0.355 0.00 / 102 0.355 0.27 / 103
BOTT: 0.355 44.92 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
469 TOP : Longitudinal direction - Only minimum steel required.
469 BOTT: Longitudinal direction - Only minimum steel required.
469 TOP : Transverse direction - Only minimum steel required.
469 BOTT: Transverse direction - Only minimum steel required.
469 TOP : 0.355 2.78 / 102 0.355 19.17 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
470 TOP : Longitudinal direction - Only minimum steel required.
470 BOTT: Longitudinal direction - Only minimum steel required.
470 TOP : Transverse direction - Only minimum steel required.
470 BOTT: Transverse direction - Only minimum steel required.
470 TOP : 0.355 20.67 / 102 0.355 33.18 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
471 TOP : Longitudinal direction - Only minimum steel required.
471 BOTT: Longitudinal direction - Only minimum steel required.
471 TOP : Transverse direction - Only minimum steel required.
471 BOTT: Transverse direction - Only minimum steel required.
471 TOP : 0.355 29.27 / 102 0.355 42.61 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
472 TOP : Longitudinal direction - Only minimum steel required.
472 BOTT: Longitudinal direction - Only minimum steel required.
472 BOTT: Transverse direction - Only minimum steel required.
472 TOP : 0.355 32.72 / 102 0.382 47.34 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
473 TOP : Longitudinal direction - Only minimum steel required.
473 BOTT: Longitudinal direction - Only minimum steel required.
473 BOTT: Transverse direction - Only minimum steel required.
473 TOP : 0.355 32.74 / 102 0.382 47.35 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
474 TOP : Longitudinal direction - Only minimum steel required.
474 BOTT: Longitudinal direction - Only minimum steel required.
474 TOP : Transverse direction - Only minimum steel required.
474 BOTT: Transverse direction - Only minimum steel required.
474 TOP : 0.355 29.33 / 102 0.355 42.63 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
475 TOP : Longitudinal direction - Only minimum steel required.
475 BOTT: Longitudinal direction - Only minimum steel required.
475 TOP : Transverse direction - Only minimum steel required.
475 BOTT: Transverse direction - Only minimum steel required.
475 TOP : 0.355 20.73 / 102 0.355 33.20 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
476 TOP : Longitudinal direction - Only minimum steel required.
476 BOTT: Longitudinal direction - Only minimum steel required.

476 TOP : Transverse direction - Only minimum steel required.
476 BOTT: Transverse direction - Only minimum steel required.
476 TOP : 0.355 2.80 / 102 0.355 19.18 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
477 TOP : Longitudinal direction - Only minimum steel required.
477 BOTT: Longitudinal direction - Only minimum steel required.
477 TOP : Transverse direction - Only minimum steel required.
477 BOTT: Transverse direction - Only minimum steel required.
477 TOP : 0.355 0.00 / 102 0.355 0.27 / 103
BOTT: 0.355 45.03 / 102 0.355 0.01 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
478 TOP : Longitudinal direction - Only minimum steel required.
478 BOTT: Longitudinal direction - Only minimum steel required.
478 TOP : Transverse direction - Only minimum steel required.
478 BOTT: Transverse direction - Only minimum steel required.
478 TOP : 0.355 0.00 / 102 0.355 3.55 / 102
BOTT: 0.355 36.94 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
479 TOP : Longitudinal direction - Only minimum steel required.
479 BOTT: Longitudinal direction - Only minimum steel required.
479 TOP : Transverse direction - Only minimum steel required.
479 BOTT: Transverse direction - Only minimum steel required.
479 TOP : 0.355 5.03 / 102 0.355 22.39 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
480 TOP : Longitudinal direction - Only minimum steel required.
480 BOTT: Longitudinal direction - Only minimum steel required.
480 TOP : Transverse direction - Only minimum steel required.
480 BOTT: Transverse direction - Only minimum steel required.
480 TOP : 0.355 18.86 / 102 0.355 35.45 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
481 TOP : Longitudinal direction - Only minimum steel required.
481 BOTT: Longitudinal direction - Only minimum steel required.
481 TOP : Transverse direction - Only minimum steel required.
481 BOTT: Transverse direction - Only minimum steel required.
481 TOP : 0.355 25.08 / 102 0.355 43.65 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
482 TOP : Longitudinal direction - Only minimum steel required.
482 BOTT: Longitudinal direction - Only minimum steel required.
482 BOTT: Transverse direction - Only minimum steel required.

482 TOP : 0.355 27.47 / 102 0.384 47.60 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
483 TOP : Longitudinal direction - Only minimum steel required.
483 BOTT: Longitudinal direction - Only minimum steel required.
483 BOTT: Transverse direction - Only minimum steel required.
483 TOP : 0.355 27.50 / 102 0.384 47.63 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
484 TOP : Longitudinal direction - Only minimum steel required.
484 BOTT: Longitudinal direction - Only minimum steel required.
484 TOP : Transverse direction - Only minimum steel required.
484 BOTT: Transverse direction - Only minimum steel required.
484 TOP : 0.355 25.16 / 102 0.355 43.72 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
485 TOP : Longitudinal direction - Only minimum steel required.
485 BOTT: Longitudinal direction - Only minimum steel required.
485 TOP : Transverse direction - Only minimum steel required.
485 BOTT: Transverse direction - Only minimum steel required.
485 TOP : 0.355 18.95 / 102 0.355 35.55 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
486 TOP : Longitudinal direction - Only minimum steel required.
486 BOTT: Longitudinal direction - Only minimum steel required.
486 TOP : Transverse direction - Only minimum steel required.
486 BOTT: Transverse direction - Only minimum steel required.
486 TOP : 0.355 5.08 / 102 0.355 22.46 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
487 TOP : Longitudinal direction - Only minimum steel required.
487 BOTT: Longitudinal direction - Only minimum steel required.
487 TOP : Transverse direction - Only minimum steel required.
487 BOTT: Transverse direction - Only minimum steel required.
487 TOP : 0.355 0.00 / 102 0.355 3.57 / 102
BOTT: 0.355 37.02 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
488 TOP : Longitudinal direction - Only minimum steel required.
488 BOTT: Longitudinal direction - Only minimum steel required.
488 TOP : Transverse direction - Only minimum steel required.
488 BOTT: Transverse direction - Only minimum steel required.
488 TOP : 0.355 0.00 / 102 0.355 7.30 / 102
BOTT: 0.355 24.33 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
489 TOP : Longitudinal direction - Only minimum steel required.
489 BOTT: Longitudinal direction - Only minimum steel required.
489 TOP : Transverse direction - Only minimum steel required.
489 BOTT: Transverse direction - Only minimum steel required.
489 TOP : 0.355 6.03 / 102 0.355 23.55 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
490 TOP : Longitudinal direction - Only minimum steel required.
490 BOTT: Longitudinal direction - Only minimum steel required.
490 TOP : Transverse direction - Only minimum steel required.
490 BOTT: Transverse direction - Only minimum steel required.
490 TOP : 0.355 14.47 / 102 0.355 33.23 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
491 TOP : Longitudinal direction - Only minimum steel required.
491 BOTT: Longitudinal direction - Only minimum steel required.
491 TOP : Transverse direction - Only minimum steel required.
491 BOTT: Transverse direction - Only minimum steel required.
491 TOP : 0.355 17.96 / 102 0.355 38.40 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
492 TOP : Longitudinal direction - Only minimum steel required.
492 BOTT: Longitudinal direction - Only minimum steel required.
492 TOP : Transverse direction - Only minimum steel required.
492 BOTT: Transverse direction - Only minimum steel required.
492 TOP : 0.355 19.24 / 102 0.355 40.72 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
493 TOP : Longitudinal direction - Only minimum steel required.
493 BOTT: Longitudinal direction - Only minimum steel required.
493 TOP : Transverse direction - Only minimum steel required.
493 BOTT: Transverse direction - Only minimum steel required.
493 TOP : 0.355 19.26 / 102 0.355 40.78 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
494 TOP : Longitudinal direction - Only minimum steel required.
494 BOTT: Longitudinal direction - Only minimum steel required.
494 TOP : Transverse direction - Only minimum steel required.
494 BOTT: Transverse direction - Only minimum steel required.
494 TOP : 0.355 18.04 / 102 0.355 38.57 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM

```
495 TOP : Longitudinal direction - Only minimum steel required.
495 BOTT: Longitudinal direction - Only minimum steel required.
495 TOP : Transverse direction   - Only minimum steel required.
495 BOTT: Transverse direction   - Only minimum steel required.
495 TOP :     0.355        14.58 /  102       0.355         33.46 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
496 TOP : Longitudinal direction - Only minimum steel required.
496 BOTT: Longitudinal direction - Only minimum steel required.
496 TOP : Transverse direction   - Only minimum steel required.
496 BOTT: Transverse direction   - Only minimum steel required.
496 TOP :     0.355         6.11 /  102       0.355         23.75 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
497 TOP : Longitudinal direction - Only minimum steel required.
497 BOTT: Longitudinal direction - Only minimum steel required.
497 TOP : Transverse direction   - Only minimum steel required.
497 BOTT: Transverse direction   - Only minimum steel required.
497 TOP :     0.355         0.00 /  102       0.355          7.40 /  102
    BOTT:     0.355        24.37 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
498 TOP : Longitudinal direction - Only minimum steel required.
498 BOTT: Longitudinal direction - Only minimum steel required.
498 TOP : Transverse direction   - Only minimum steel required.
498 BOTT: Transverse direction   - Only minimum steel required.
498 TOP :     0.355         0.00 /  102       0.355          9.20 /  102
    BOTT:     0.355         7.66 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
499 TOP : Longitudinal direction - Only minimum steel required.
499 BOTT: Longitudinal direction - Only minimum steel required.
499 TOP : Transverse direction   - Only minimum steel required.
499 BOTT: Transverse direction   - Only minimum steel required.
499 TOP :     0.355         4.50 /  102       0.355         20.79 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
500 TOP : Longitudinal direction - Only minimum steel required.
500 BOTT: Longitudinal direction - Only minimum steel required.
500 TOP : Transverse direction   - Only minimum steel required.
500 BOTT: Transverse direction   - Only minimum steel required.
500 TOP :     0.355         7.13 /  102       0.355         27.14 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
501 TOP : Longitudinal direction - Only minimum steel required.
501 BOTT: Longitudinal direction - Only minimum steel required.
```

```
501 TOP : Transverse direction   - Only minimum steel required.
501 BOTT: Transverse direction   - Only minimum steel required.
501 TOP :     0.355         7.91 /  102       0.355         30.02 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
502 TOP : Longitudinal direction - Only minimum steel required.
502 BOTT: Longitudinal direction - Only minimum steel required.
502 TOP : Transverse direction   - Only minimum steel required.
502 BOTT: Transverse direction   - Only minimum steel required.
502 TOP :     0.355         8.13 /  102       0.355         31.36 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
503 TOP : Longitudinal direction - Only minimum steel required.
503 BOTT: Longitudinal direction - Only minimum steel required.
503 TOP : Transverse direction   - Only minimum steel required.
503 BOTT: Transverse direction   - Only minimum steel required.
503 TOP :     0.355         8.16 /  102       0.355         31.42 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
504 TOP : Longitudinal direction - Only minimum steel required.
504 BOTT: Longitudinal direction - Only minimum steel required.
504 TOP : Transverse direction   - Only minimum steel required.
504 BOTT: Transverse direction   - Only minimum steel required.
504 TOP :     0.355         7.99 /  102       0.355         30.17 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
505 TOP : Longitudinal direction - Only minimum steel required.
505 BOTT: Longitudinal direction - Only minimum steel required.
505 TOP : Transverse direction   - Only minimum steel required.
505 BOTT: Transverse direction   - Only minimum steel required.
505 TOP :     0.355         7.24 /  102       0.355         27.35 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
506 TOP : Longitudinal direction - Only minimum steel required.
506 BOTT: Longitudinal direction - Only minimum steel required.
506 TOP : Transverse direction   - Only minimum steel required.
506 BOTT: Transverse direction   - Only minimum steel required.
506 TOP :     0.355         4.60 /  102       0.355         20.99 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
507 TOP : Longitudinal direction - Only minimum steel required.
507 BOTT: Longitudinal direction - Only minimum steel required.
507 TOP : Transverse direction   - Only minimum steel required.
507 BOTT: Transverse direction   - Only minimum steel required.
```

```
507 TOP :     0.355         0.00 /  102       0.355          9.41 /  102
    BOTT:     0.355         7.65 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
528 TOP : Longitudinal direction - Only minimum steel required.
528 BOTT: Longitudinal direction - Only minimum steel required.
528 TOP : Transverse direction   - Only minimum steel required.
528 BOTT: Transverse direction   - Only minimum steel required.
528 TOP :     0.355         7.62 /  102       0.355          0.11 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.47 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
529 TOP : Longitudinal direction - Only minimum steel required.
529 BOTT: Longitudinal direction - Only minimum steel required.
529 TOP : Transverse direction   - Only minimum steel required.
529 BOTT: Transverse direction   - Only minimum steel required.
529 TOP :     0.355         1.36 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          7.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
530 TOP : Longitudinal direction - Only minimum steel required.
530 BOTT: Longitudinal direction - Only minimum steel required.
530 TOP : Transverse direction   - Only minimum steel required.
530 BOTT: Transverse direction   - Only minimum steel required.
530 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         4.41 /  102       0.355         13.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
531 TOP : Longitudinal direction - Only minimum steel required.
531 BOTT: Longitudinal direction - Only minimum steel required.
531 TOP : Transverse direction   - Only minimum steel required.
531 BOTT: Transverse direction   - Only minimum steel required.
531 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         8.03 /  102       0.355         17.50 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
532 TOP : Longitudinal direction - Only minimum steel required.
532 BOTT: Longitudinal direction - Only minimum steel required.
532 TOP : Transverse direction   - Only minimum steel required.
532 BOTT: Transverse direction   - Only minimum steel required.
532 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         9.70 /  102       0.355         19.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
533 TOP : Longitudinal direction - Only minimum steel required.
533 BOTT: Longitudinal direction - Only minimum steel required.
533 TOP : Transverse direction   - Only minimum steel required.
533 BOTT: Transverse direction   - Only minimum steel required.
```

```
533 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         9.70 /  102       0.355         19.79 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
534 TOP : Longitudinal direction - Only minimum steel required.
534 BOTT: Longitudinal direction - Only minimum steel required.
534 TOP : Transverse direction   - Only minimum steel required.
534 BOTT: Transverse direction   - Only minimum steel required.
534 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         8.02 /  102       0.355         17.51 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
535 TOP : Longitudinal direction - Only minimum steel required.
535 BOTT: Longitudinal direction - Only minimum steel required.
535 TOP : Transverse direction   - Only minimum steel required.
535 BOTT: Transverse direction   - Only minimum steel required.
535 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         4.46 /  102       0.355         13.07 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
536 TOP : Longitudinal direction - Only minimum steel required.
536 BOTT: Longitudinal direction - Only minimum steel required.
536 TOP : Transverse direction   - Only minimum steel required.
536 BOTT: Transverse direction   - Only minimum steel required.
536 TOP :     0.355         1.46 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          6.88 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
537 TOP : Longitudinal direction - Only minimum steel required.
537 BOTT: Longitudinal direction - Only minimum steel required.
537 TOP : Transverse direction   - Only minimum steel required.
537 BOTT: Transverse direction   - Only minimum steel required.
537 TOP :     0.355         5.47 /  102       0.355          0.26 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.26 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
538 TOP : Longitudinal direction - Only minimum steel required.
538 BOTT: Longitudinal direction - Only minimum steel required.
538 TOP : Transverse direction   - Only minimum steel required.
538 BOTT: Transverse direction   - Only minimum steel required.
538 TOP :     0.355        14.19 /  102       0.355          0.31 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.09 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
539 TOP : Longitudinal direction - Only minimum steel required.
539 BOTT: Longitudinal direction - Only minimum steel required.
539 TOP : Transverse direction   - Only minimum steel required.
539 BOTT: Transverse direction   - Only minimum steel required.
```

539 TOP : 0.355 2.42 / 102 0.355 0.00 / 101
BOTT: 0.355 0.00 / 102 0.355 5.08 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
540 TOP : Longitudinal direction - Only minimum steel required.
540 BOTT: Longitudinal direction - Only minimum steel required.
540 TOP : Transverse direction - Only minimum steel required.
540 BOTT: Transverse direction - Only minimum steel required.
540 TOP : 0.355 0.00 / 102 0.355 0.00 / 101
BOTT: 0.355 5.62 / 102 0.355 10.27 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
541 TOP : Longitudinal direction - Only minimum steel required.
541 BOTT: Longitudinal direction - Only minimum steel required.
541 TOP : Transverse direction - Only minimum steel required.
541 BOTT: Transverse direction - Only minimum steel required.
541 TOP : 0.355 0.00 / 102 0.355 0.00 / 101
BOTT: 0.355 10.76 / 102 0.355 14.57 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
542 TOP : Longitudinal direction - Only minimum steel required.
542 BOTT: Longitudinal direction - Only minimum steel required.
542 TOP : Transverse direction - Only minimum steel required.
542 BOTT: Transverse direction - Only minimum steel required.
542 TOP : 0.355 0.00 / 102 0.355 0.00 / 101
BOTT: 0.355 13.18 / 102 0.355 16.93 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
543 TOP : Longitudinal direction - Only minimum steel required.
543 BOTT: Longitudinal direction - Only minimum steel required.
543 TOP : Transverse direction - Only minimum steel required.
543 BOTT: Transverse direction - Only minimum steel required.
543 TOP : 0.355 0.00 / 102 0.355 0.00 / 101
BOTT: 0.355 13.18 / 102 0.355 16.94 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
544 TOP : Longitudinal direction - Only minimum steel required.
544 BOTT: Longitudinal direction - Only minimum steel required.
544 TOP : Transverse direction - Only minimum steel required.
544 BOTT: Transverse direction - Only minimum steel required.
544 TOP : 0.355 0.00 / 102 0.355 0.00 / 101
BOTT: 0.355 10.76 / 102 0.355 14.61 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
545 TOP : Longitudinal direction - Only minimum steel required.
545 BOTT: Longitudinal direction - Only minimum steel required.
545 TOP : Transverse direction - Only minimum steel required.
545 BOTT: Transverse direction - Only minimum steel required.

```
545 TOP :     0.355         0.00 /  102       0.355          0.00 /  101
    BOTT:     0.355         5.62 /  102       0.355         10.31 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
546 TOP : Longitudinal direction - Only minimum steel required.
546 BOTT: Longitudinal direction - Only minimum steel required.
546 TOP : Transverse direction   - Only minimum steel required.
546 BOTT: Transverse direction   - Only minimum steel required.
546 TOP :     0.355         2.48 /  102       0.355          0.00 /  101
    BOTT:     0.355         0.00 /  102       0.355          5.04 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
547 TOP : Longitudinal direction - Only minimum steel required.
547 BOTT: Longitudinal direction - Only minimum steel required.
547 TOP : Transverse direction   - Only minimum steel required.
547 BOTT: Transverse direction   - Only minimum steel required.
547 TOP :     0.355        11.85 /  102       0.355          0.06 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
548 TOP : Longitudinal direction - Only minimum steel required.
548 BOTT: Longitudinal direction - Only minimum steel required.
548 TOP : Transverse direction   - Only minimum steel required.
548 BOTT: Transverse direction   - Only minimum steel required.
548 TOP :     0.355         0.00 /  102       0.355          0.47 /  102
    BOTT:     0.355         7.62 /  102       0.355          0.11 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
549 TOP : Longitudinal direction - Only minimum steel required.
549 BOTT: Longitudinal direction - Only minimum steel required.
549 TOP : Transverse direction   - Only minimum steel required.
549 BOTT: Transverse direction   - Only minimum steel required.
549 TOP :     0.355         0.00 /  102       0.355          7.00 /  102
    BOTT:     0.355         1.36 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
550 TOP : Longitudinal direction - Only minimum steel required.
550 BOTT: Longitudinal direction - Only minimum steel required.
550 TOP : Transverse direction   - Only minimum steel required.
550 BOTT: Transverse direction   - Only minimum steel required.
550 TOP :     0.355         4.41 /  102       0.355         13.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
551 TOP : Longitudinal direction - Only minimum steel required.
551 BOTT: Longitudinal direction - Only minimum steel required.
551 TOP : Transverse direction   - Only minimum steel required.
551 BOTT: Transverse direction   - Only minimum steel required.
```

551 TOP : 0.355 8.03 / 102 0.355 17.50 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
552 TOP : Longitudinal direction - Only minimum steel required.
552 BOTT: Longitudinal direction - Only minimum steel required.
552 TOP : Transverse direction - Only minimum steel required.
552 BOTT: Transverse direction - Only minimum steel required.
552 TOP : 0.355 9.70 / 102 0.355 19.80 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
553 TOP : Longitudinal direction - Only minimum steel required.
553 BOTT: Longitudinal direction - Only minimum steel required.
553 TOP : Transverse direction - Only minimum steel required.
553 BOTT: Transverse direction - Only minimum steel required.
553 TOP : 0.355 9.70 / 102 0.355 19.79 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
554 TOP : Longitudinal direction - Only minimum steel required.
554 BOTT: Longitudinal direction - Only minimum steel required.
554 TOP : Transverse direction - Only minimum steel required.
554 BOTT: Transverse direction - Only minimum steel required.
554 TOP : 0.355 8.02 / 102 0.355 17.51 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
555 TOP : Longitudinal direction - Only minimum steel required.
555 BOTT: Longitudinal direction - Only minimum steel required.
555 TOP : Transverse direction - Only minimum steel required.
555 BOTT: Transverse direction - Only minimum steel required.
555 TOP : 0.355 4.46 / 102 0.355 13.07 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
556 TOP : Longitudinal direction - Only minimum steel required.
556 BOTT: Longitudinal direction - Only minimum steel required.
556 TOP : Transverse direction - Only minimum steel required.
556 BOTT: Transverse direction - Only minimum steel required.
556 TOP : 0.355 0.00 / 102 0.355 6.88 / 102
BOTT: 0.355 1.46 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
557 TOP : Longitudinal direction - Only minimum steel required.
557 BOTT: Longitudinal direction - Only minimum steel required.
557 TOP : Transverse direction - Only minimum steel required.
557 BOTT: Transverse direction - Only minimum steel required.

```
557 TOP :     0.355         0.00 /  102       0.355          0.26 /  102
    BOTT:     0.355         5.47 /  102       0.355          0.26 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
558 TOP : Longitudinal direction - Only minimum steel required.
558 BOTT: Longitudinal direction - Only minimum steel required.
558 TOP : Transverse direction   - Only minimum steel required.
558 BOTT: Transverse direction   - Only minimum steel required.
558 TOP :     0.355         0.00 /  102       0.355          0.09 /  102
    BOTT:     0.355        14.19 /  102       0.355          0.31 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
559 TOP : Longitudinal direction - Only minimum steel required.
559 BOTT: Longitudinal direction - Only minimum steel required.
559 TOP : Transverse direction   - Only minimum steel required.
559 BOTT: Transverse direction   - Only minimum steel required.
559 TOP :     0.355         0.00 /  102       0.355          5.08 /  102
    BOTT:     0.355         2.42 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
560 TOP : Longitudinal direction - Only minimum steel required.
560 BOTT: Longitudinal direction - Only minimum steel required.
560 TOP : Transverse direction   - Only minimum steel required.
560 BOTT: Transverse direction   - Only minimum steel required.
560 TOP :     0.355         5.62 /  102       0.355         10.27 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
561 TOP : Longitudinal direction - Only minimum steel required.
561 BOTT: Longitudinal direction - Only minimum steel required.
561 TOP : Transverse direction   - Only minimum steel required.
561 BOTT: Transverse direction   - Only minimum steel required.
561 TOP :     0.355        10.76 /  102       0.355         14.57 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
562 TOP : Longitudinal direction - Only minimum steel required.
562 BOTT: Longitudinal direction - Only minimum steel required.
562 TOP : Transverse direction   - Only minimum steel required.
562 BOTT: Transverse direction   - Only minimum steel required.
562 TOP :     0.355        13.18 /  102       0.355         16.93 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
563 TOP : Longitudinal direction - Only minimum steel required.
563 BOTT: Longitudinal direction - Only minimum steel required.
563 TOP : Transverse direction   - Only minimum steel required.
563 BOTT: Transverse direction   - Only minimum steel required.
```

563 TOP : 0.355 13.18 / 102 0.355 16.94 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
564 TOP : Longitudinal direction - Only minimum steel required.
564 BOTT: Longitudinal direction - Only minimum steel required.
564 TOP : Transverse direction - Only minimum steel required.
564 BOTT: Transverse direction - Only minimum steel required.
564 TOP : 0.355 10.76 / 102 0.355 14.61 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
565 TOP : Longitudinal direction - Only minimum steel required.
565 BOTT: Longitudinal direction - Only minimum steel required.
565 TOP : Transverse direction - Only minimum steel required.
565 BOTT: Transverse direction - Only minimum steel required.
565 TOP : 0.355 5.62 / 102 0.355 10.31 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
566 TOP : Longitudinal direction - Only minimum steel required.
566 BOTT: Longitudinal direction - Only minimum steel required.
566 TOP : Transverse direction - Only minimum steel required.
566 BOTT: Transverse direction - Only minimum steel required.
566 TOP : 0.355 0.00 / 102 0.355 5.04 / 102
BOTT: 0.355 2.48 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
567 TOP : Longitudinal direction - Only minimum steel required.
567 BOTT: Longitudinal direction - Only minimum steel required.
567 TOP : Transverse direction - Only minimum steel required.
567 BOTT: Transverse direction - Only minimum steel required.
567 TOP : 0.355 0.00 / 102 0.355 0.41 / 102
BOTT: 0.355 11.85 / 102 0.355 0.06 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
568 TOP : Longitudinal direction - Only minimum steel required.
568 BOTT: Longitudinal direction - Only minimum steel required.
568 TOP : Transverse direction - Only minimum steel required.
568 BOTT: Transverse direction - Only minimum steel required.
568 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 5.37 / 102 0.355 1.03 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
569 TOP : Longitudinal direction - Only minimum steel required.
569 BOTT: Longitudinal direction - Only minimum steel required.
569 TOP : Transverse direction - Only minimum steel required.
569 BOTT: Transverse direction - Only minimum steel required.

```
569 TOP :     0.355         0.00 /  102       0.355          7.11 /  102
    BOTT:     0.355         0.75 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
570 TOP : Longitudinal direction - Only minimum steel required.
570 BOTT: Longitudinal direction - Only minimum steel required.
570 TOP : Transverse direction   - Only minimum steel required.
570 BOTT: Transverse direction   - Only minimum steel required.
570 TOP :     0.355         4.39 /  102       0.355         12.97 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
571 TOP : Longitudinal direction - Only minimum steel required.
571 BOTT: Longitudinal direction - Only minimum steel required.
571 TOP : Transverse direction   - Only minimum steel required.
571 BOTT: Transverse direction   - Only minimum steel required.
571 TOP :     0.355         7.88 /  102       0.355         17.43 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
572 TOP : Longitudinal direction - Only minimum steel required.
572 BOTT: Longitudinal direction - Only minimum steel required.
572 TOP : Transverse direction   - Only minimum steel required.
572 BOTT: Transverse direction   - Only minimum steel required.
572 TOP :     0.355         9.53 /  102       0.355         19.69 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
573 TOP : Longitudinal direction - Only minimum steel required.
573 BOTT: Longitudinal direction - Only minimum steel required.
573 TOP : Transverse direction   - Only minimum steel required.
573 BOTT: Transverse direction   - Only minimum steel required.
573 TOP :     0.355         9.53 /  102       0.355         19.69 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
574 TOP : Longitudinal direction - Only minimum steel required.
574 BOTT: Longitudinal direction - Only minimum steel required.
574 TOP : Transverse direction   - Only minimum steel required.
574 BOTT: Transverse direction   - Only minimum steel required.
574 TOP :     0.355         7.88 /  102       0.355         17.43 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
575 TOP : Longitudinal direction - Only minimum steel required.
575 BOTT: Longitudinal direction - Only minimum steel required.
575 TOP : Transverse direction   - Only minimum steel required.
575 BOTT: Transverse direction   - Only minimum steel required.
```

```
575 TOP :     0.355         4.39 /  102       0.355         12.97 /  102
    BOTT:     0.355         0.00 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
576 TOP : Longitudinal direction - Only minimum steel required.
576 BOTT: Longitudinal direction - Only minimum steel required.
576 TOP : Transverse direction   - Only minimum steel required.
576 BOTT: Transverse direction   - Only minimum steel required.
576 TOP :     0.355         0.00 /  102       0.355          7.11 /  102
    BOTT:     0.355         0.75 /  101       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
577 TOP : Longitudinal direction - Only minimum steel required.
577 BOTT: Longitudinal direction - Only minimum steel required.
577 TOP : Transverse direction   - Only minimum steel required.
577 BOTT: Transverse direction   - Only minimum steel required.
577 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355         5.37 /  102       0.355          1.03 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
578 TOP : Longitudinal direction - Only minimum steel required.
578 BOTT: Longitudinal direction - Only minimum steel required.
578 TOP : Transverse direction   - Only minimum steel required.
578 BOTT: Transverse direction   - Only minimum steel required.
578 TOP :     0.355         0.00 /  102       0.355          2.67 /  102
    BOTT:     0.355         8.85 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
579 TOP : Longitudinal direction - Only minimum steel required.
579 BOTT: Longitudinal direction - Only minimum steel required.
579 TOP : Transverse direction   - Only minimum steel required.
579 BOTT: Transverse direction   - Only minimum steel required.
579 TOP :     0.355         0.00 /  102       0.355          4.95 /  102
    BOTT:     0.355         2.19 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
580 TOP : Longitudinal direction - Only minimum steel required.
580 BOTT: Longitudinal direction - Only minimum steel required.
580 TOP : Transverse direction   - Only minimum steel required.
580 BOTT: Transverse direction   - Only minimum steel required.
580 TOP :     0.355         5.69 /  102       0.355         10.50 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
581 TOP : Longitudinal direction - Only minimum steel required.
581 BOTT: Longitudinal direction - Only minimum steel required.
581 TOP : Transverse direction   - Only minimum steel required.
581 BOTT: Transverse direction   - Only minimum steel required.
```

581 TOP : 0.355 10.67 / 102 0.355 14.63 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
582 TOP : Longitudinal direction - Only minimum steel required.
582 BOTT: Longitudinal direction - Only minimum steel required.
582 TOP : Transverse direction - Only minimum steel required.
582 BOTT: Transverse direction - Only minimum steel required.
582 TOP : 0.355 13.07 / 102 0.355 16.94 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
583 TOP : Longitudinal direction - Only minimum steel required.
583 BOTT: Longitudinal direction - Only minimum steel required.
583 TOP : Transverse direction - Only minimum steel required.
583 BOTT: Transverse direction - Only minimum steel required.
583 TOP : 0.355 13.07 / 102 0.355 16.94 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
584 TOP : Longitudinal direction - Only minimum steel required.
584 BOTT: Longitudinal direction - Only minimum steel required.
584 TOP : Transverse direction - Only minimum steel required.
584 BOTT: Transverse direction - Only minimum steel required.
584 TOP : 0.355 10.67 / 102 0.355 14.63 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
585 TOP : Longitudinal direction - Only minimum steel required.
585 BOTT: Longitudinal direction - Only minimum steel required.
585 TOP : Transverse direction - Only minimum steel required.
585 BOTT: Transverse direction - Only minimum steel required.
585 TOP : 0.355 5.69 / 102 0.355 10.50 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
586 TOP : Longitudinal direction - Only minimum steel required.
586 BOTT: Longitudinal direction - Only minimum steel required.
586 TOP : Transverse direction - Only minimum steel required.
586 BOTT: Transverse direction - Only minimum steel required.
586 TOP : 0.355 0.00 / 102 0.355 4.95 / 102
BOTT: 0.355 2.19 / 102 0.355 0.00 / 101

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
587 TOP : Longitudinal direction - Only minimum steel required.
587 BOTT: Longitudinal direction - Only minimum steel required.
587 TOP : Transverse direction - Only minimum steel required.
587 BOTT: Transverse direction - Only minimum steel required.

```
587 TOP :     0.355         0.00 /  102       0.355          2.67 /  102
    BOTT:     0.355         8.85 /  102       0.355          0.00 /  101

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
588 TOP : Longitudinal direction - Only minimum steel required.
588 BOTT: Longitudinal direction - Only minimum steel required.
588 TOP : Transverse direction   - Only minimum steel required.
588 BOTT: Transverse direction   - Only minimum steel required.
588 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        20.04 /  102       0.355          0.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
589 TOP : Longitudinal direction - Only minimum steel required.
589 BOTT: Longitudinal direction - Only minimum steel required.
589 TOP : Transverse direction   - Only minimum steel required.
589 BOTT: Transverse direction   - Only minimum steel required.
589 TOP :     0.355         0.00 /  102       0.355          4.36 /  102
    BOTT:     0.355         3.32 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
590 TOP : Longitudinal direction - Only minimum steel required.
590 BOTT: Longitudinal direction - Only minimum steel required.
590 TOP : Transverse direction   - Only minimum steel required.
590 BOTT: Transverse direction   - Only minimum steel required.
590 TOP :     0.355         7.98 /  102       0.355          9.23 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
591 TOP : Longitudinal direction - Only minimum steel required.
591 BOTT: Longitudinal direction - Only minimum steel required.
591 TOP : Transverse direction   - Only minimum steel required.
591 BOTT: Transverse direction   - Only minimum steel required.
591 TOP :     0.355        15.18 /  102       0.355         13.41 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
592 TOP : Longitudinal direction - Only minimum steel required.
592 BOTT: Longitudinal direction - Only minimum steel required.
592 TOP : Transverse direction   - Only minimum steel required.
592 BOTT: Transverse direction   - Only minimum steel required.
592 TOP :     0.355        18.59 /  102       0.355         15.75 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
593 TOP : Longitudinal direction - Only minimum steel required.
593 BOTT: Longitudinal direction - Only minimum steel required.
593 TOP : Transverse direction   - Only minimum steel required.
593 BOTT: Transverse direction   - Only minimum steel required.
```

```
593 TOP :     0.355        18.59 /  102       0.355         15.75 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
594 TOP : Longitudinal direction - Only minimum steel required.
594 BOTT: Longitudinal direction - Only minimum steel required.
594 TOP : Transverse direction   - Only minimum steel required.
594 BOTT: Transverse direction   - Only minimum steel required.
594 TOP :     0.355        15.18 /  102       0.355         13.41 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
595 TOP : Longitudinal direction - Only minimum steel required.
595 BOTT: Longitudinal direction - Only minimum steel required.
595 TOP : Transverse direction   - Only minimum steel required.
595 BOTT: Transverse direction   - Only minimum steel required.
595 TOP :     0.355         7.98 /  102       0.355          9.23 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
596 TOP : Longitudinal direction - Only minimum steel required.
596 BOTT: Longitudinal direction - Only minimum steel required.
596 TOP : Transverse direction   - Only minimum steel required.
596 BOTT: Transverse direction   - Only minimum steel required.
596 TOP :     0.355         0.00 /  102       0.355          4.36 /  102
    BOTT:     0.355         3.32 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
597 TOP : Longitudinal direction - Only minimum steel required.
597 BOTT: Longitudinal direction - Only minimum steel required.
597 TOP : Transverse direction   - Only minimum steel required.
597 BOTT: Transverse direction   - Only minimum steel required.
597 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        20.04 /  102       0.355          0.96 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
598 TOP : Longitudinal direction - Only minimum steel required.
598 BOTT: Longitudinal direction - Only minimum steel required.
598 TOP : Transverse direction   - Only minimum steel required.
598 BOTT: Transverse direction   - Only minimum steel required.
598 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        26.16 /  102       0.355          2.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
599 TOP : Longitudinal direction - Only minimum steel required.
599 BOTT: Longitudinal direction - Only minimum steel required.
599 TOP : Transverse direction   - Only minimum steel required.
599 BOTT: Transverse direction   - Only minimum steel required.
```

599 TOP : 0.355 0.00 / 102 0.355 4.13 / 102
BOTT: 0.355 4.29 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
600 TOP : Longitudinal direction - Only minimum steel required.
600 BOTT: Longitudinal direction - Only minimum steel required.
600 TOP : Transverse direction - Only minimum steel required.
600 BOTT: Transverse direction - Only minimum steel required.
600 TOP : 0.355 10.66 / 102 0.355 10.27 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
601 TOP : Longitudinal direction - Only minimum steel required.
601 BOTT: Longitudinal direction - Only minimum steel required.
601 TOP : Transverse direction - Only minimum steel required.
601 BOTT: Transverse direction - Only minimum steel required.
601 TOP : 0.355 19.77 / 102 0.355 15.11 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
602 TOP : Longitudinal direction - Only minimum steel required.
602 BOTT: Longitudinal direction - Only minimum steel required.
602 TOP : Transverse direction - Only minimum steel required.
602 BOTT: Transverse direction - Only minimum steel required.
602 TOP : 0.355 24.00 / 102 0.355 17.77 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
603 TOP : Longitudinal direction - Only minimum steel required.
603 BOTT: Longitudinal direction - Only minimum steel required.
603 TOP : Transverse direction - Only minimum steel required.
603 BOTT: Transverse direction - Only minimum steel required.
603 TOP : 0.355 24.00 / 102 0.355 17.77 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
604 TOP : Longitudinal direction - Only minimum steel required.
604 BOTT: Longitudinal direction - Only minimum steel required.
604 TOP : Transverse direction - Only minimum steel required.
604 BOTT: Transverse direction - Only minimum steel required.
604 TOP : 0.355 19.77 / 102 0.355 15.11 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
605 TOP : Longitudinal direction - Only minimum steel required.
605 BOTT: Longitudinal direction - Only minimum steel required.
605 TOP : Transverse direction - Only minimum steel required.
605 BOTT: Transverse direction - Only minimum steel required.

```
605 TOP :     0.355        10.66 /  102       0.355         10.27 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
606 TOP : Longitudinal direction - Only minimum steel required.
606 BOTT: Longitudinal direction - Only minimum steel required.
606 TOP : Transverse direction   - Only minimum steel required.
606 BOTT: Transverse direction   - Only minimum steel required.
606 TOP :     0.355         0.00 /  102       0.355          4.13 /  102
    BOTT:     0.355         4.29 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
607 TOP : Longitudinal direction - Only minimum steel required.
607 BOTT: Longitudinal direction - Only minimum steel required.
607 TOP : Transverse direction   - Only minimum steel required.
607 BOTT: Transverse direction   - Only minimum steel required.
607 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        26.16 /  102       0.355          2.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
608 TOP : Longitudinal direction - Only minimum steel required.
608 BOTT: Longitudinal direction - Only minimum steel required.
608 TOP : Transverse direction   - Only minimum steel required.
608 BOTT: Transverse direction   - Only minimum steel required.
608 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        31.87 /  102       0.355          2.75 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
609 TOP : Longitudinal direction - Only minimum steel required.
609 BOTT: Longitudinal direction - Only minimum steel required.
609 TOP : Transverse direction   - Only minimum steel required.
609 BOTT: Transverse direction   - Only minimum steel required.
609 TOP :     0.355         0.00 /  102       0.355          5.59 /  102
    BOTT:     0.355         4.33 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
610 TOP : Longitudinal direction - Only minimum steel required.
610 BOTT: Longitudinal direction - Only minimum steel required.
610 TOP : Transverse direction   - Only minimum steel required.
610 BOTT: Transverse direction   - Only minimum steel required.
610 TOP :     0.355        13.56 /  102       0.355         13.37 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
611 TOP : Longitudinal direction - Only minimum steel required.
611 BOTT: Longitudinal direction - Only minimum steel required.
611 TOP : Transverse direction   - Only minimum steel required.
611 BOTT: Transverse direction   - Only minimum steel required.
```

```
611 TOP :     0.355        24.01 /  102       0.355         19.33 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
612 TOP : Longitudinal direction - Only minimum steel required.
612 BOTT: Longitudinal direction - Only minimum steel required.
612 TOP : Transverse direction   - Only minimum steel required.
612 BOTT: Transverse direction   - Only minimum steel required.
612 TOP :     0.355        28.79 /  102       0.355         22.55 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
613 TOP : Longitudinal direction - Only minimum steel required.
613 BOTT: Longitudinal direction - Only minimum steel required.
613 TOP : Transverse direction   - Only minimum steel required.
613 BOTT: Transverse direction   - Only minimum steel required.
613 TOP :     0.355        28.79 /  102       0.355         22.55 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
614 TOP : Longitudinal direction - Only minimum steel required.
614 BOTT: Longitudinal direction - Only minimum steel required.
614 TOP : Transverse direction   - Only minimum steel required.
614 BOTT: Transverse direction   - Only minimum steel required.
614 TOP :     0.355        24.01 /  102       0.355         19.33 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
615 TOP : Longitudinal direction - Only minimum steel required.
615 BOTT: Longitudinal direction - Only minimum steel required.
615 TOP : Transverse direction   - Only minimum steel required.
615 BOTT: Transverse direction   - Only minimum steel required.
615 TOP :     0.355        13.56 /  102       0.355         13.37 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
616 TOP : Longitudinal direction - Only minimum steel required.
616 BOTT: Longitudinal direction - Only minimum steel required.
616 TOP : Transverse direction   - Only minimum steel required.
616 BOTT: Transverse direction   - Only minimum steel required.
616 TOP :     0.355         0.00 /  102       0.355          5.59 /  102
    BOTT:     0.355         4.33 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
617 TOP : Longitudinal direction - Only minimum steel required.
617 BOTT: Longitudinal direction - Only minimum steel required.
617 TOP : Transverse direction   - Only minimum steel required.
617 BOTT: Transverse direction   - Only minimum steel required.
```

```
617 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        31.87 /  102       0.355          2.75 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
618 TOP : Longitudinal direction - Only minimum steel required.
618 BOTT: Longitudinal direction - Only minimum steel required.
618 TOP : Transverse direction   - Only minimum steel required.
618 BOTT: Transverse direction   - Only minimum steel required.
618 TOP :     0.355         0.00 /  102       0.355          0.00 /  102
    BOTT:     0.355        35.92 /  102       0.355          2.35 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
619 TOP : Longitudinal direction - Only minimum steel required.
619 BOTT: Longitudinal direction - Only minimum steel required.
619 TOP : Transverse direction   - Only minimum steel required.
619 BOTT: Transverse direction   - Only minimum steel required.
619 TOP :     0.355         0.00 /  102       0.355          8.23 /  102
    BOTT:     0.355         3.61 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
620 TOP : Longitudinal direction - Only minimum steel required.
620 BOTT: Longitudinal direction - Only minimum steel required.
620 TOP : Transverse direction   - Only minimum steel required.
620 BOTT: Transverse direction   - Only minimum steel required.
620 TOP :     0.355        16.34 /  102       0.355         17.94 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
621 TOP : Longitudinal direction - Only minimum steel required.
621 BOTT: Longitudinal direction - Only minimum steel required.
621 TOP : Transverse direction   - Only minimum steel required.
621 BOTT: Transverse direction   - Only minimum steel required.
621 TOP :     0.355        27.56 /  102       0.355         25.21 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
622 TOP : Longitudinal direction - Only minimum steel required.
622 BOTT: Longitudinal direction - Only minimum steel required.
622 TOP : Transverse direction   - Only minimum steel required.
622 BOTT: Transverse direction   - Only minimum steel required.
622 TOP :     0.355        32.55 /  102       0.355         29.08 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
623 TOP : Longitudinal direction - Only minimum steel required.
623 BOTT: Longitudinal direction - Only minimum steel required.
623 TOP : Transverse direction   - Only minimum steel required.
623 BOTT: Transverse direction   - Only minimum steel required.
```

623 TOP : 0.355 32.55 / 102 0.355 29.08 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
624 TOP : Longitudinal direction - Only minimum steel required.
624 BOTT: Longitudinal direction - Only minimum steel required.
624 TOP : Transverse direction - Only minimum steel required.
624 BOTT: Transverse direction - Only minimum steel required.
624 TOP : 0.355 27.56 / 102 0.355 25.21 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
625 TOP : Longitudinal direction - Only minimum steel required.
625 BOTT: Longitudinal direction - Only minimum steel required.
625 TOP : Transverse direction - Only minimum steel required.
625 BOTT: Transverse direction - Only minimum steel required.
625 TOP : 0.355 16.34 / 102 0.355 17.94 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
626 TOP : Longitudinal direction - Only minimum steel required.
626 BOTT: Longitudinal direction - Only minimum steel required.
626 TOP : Transverse direction - Only minimum steel required.
626 BOTT: Transverse direction - Only minimum steel required.
626 TOP : 0.355 0.00 / 102 0.355 8.23 / 102
BOTT: 0.355 3.61 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
627 TOP : Longitudinal direction - Only minimum steel required.
627 BOTT: Longitudinal direction - Only minimum steel required.
627 TOP : Transverse direction - Only minimum steel required.
627 BOTT: Transverse direction - Only minimum steel required.
627 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 35.92 / 102 0.355 2.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
628 TOP : Longitudinal direction - Only minimum steel required.
628 BOTT: Longitudinal direction - Only minimum steel required.
628 TOP : Transverse direction - Only minimum steel required.
628 BOTT: Transverse direction - Only minimum steel required.
628 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 37.93 / 102 0.355 1.17 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
629 TOP : Longitudinal direction - Only minimum steel required.
629 BOTT: Longitudinal direction - Only minimum steel required.
629 TOP : Transverse direction - Only minimum steel required.
629 BOTT: Transverse direction - Only minimum steel required.

```
629 TOP :     0.355         0.00 /  102       0.355         11.70 /  102
    BOTT:     0.355         2.18 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
630 TOP : Longitudinal direction - Only minimum steel required.
630 BOTT: Longitudinal direction - Only minimum steel required.
630 TOP : Transverse direction   - Only minimum steel required.
630 BOTT: Transverse direction   - Only minimum steel required.
630 TOP :     0.355        18.71 /  102       0.355         23.33 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
631 TOP : Longitudinal direction - Only minimum steel required.
631 BOTT: Longitudinal direction - Only minimum steel required.
631 TOP : Transverse direction   - Only minimum steel required.
631 BOTT: Transverse direction   - Only minimum steel required.
631 TOP :     0.355        29.93 /  102       0.355         31.85 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
632 TOP : Longitudinal direction - Only minimum steel required.
632 BOTT: Longitudinal direction - Only minimum steel required.
632 TOP : Transverse direction   - Only minimum steel required.
632 BOTT: Transverse direction   - Only minimum steel required.
632 TOP :     0.355        34.77 /  102       0.355         36.30 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
633 TOP : Longitudinal direction - Only minimum steel required.
633 BOTT: Longitudinal direction - Only minimum steel required.
633 TOP : Transverse direction   - Only minimum steel required.
633 BOTT: Transverse direction   - Only minimum steel required.
633 TOP :     0.355        34.77 /  102       0.355         36.30 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
634 TOP : Longitudinal direction - Only minimum steel required.
634 BOTT: Longitudinal direction - Only minimum steel required.
634 TOP : Transverse direction   - Only minimum steel required.
634 BOTT: Transverse direction   - Only minimum steel required.
634 TOP :     0.355        29.93 /  102       0.355         31.85 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
635 TOP : Longitudinal direction - Only minimum steel required.
635 BOTT: Longitudinal direction - Only minimum steel required.
635 TOP : Transverse direction   - Only minimum steel required.
635 BOTT: Transverse direction   - Only minimum steel required.
```

635 TOP : 0.355 18.71 / 102 0.355 23.33 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
636 TOP : Longitudinal direction - Only minimum steel required.
636 BOTT: Longitudinal direction - Only minimum steel required.
636 TOP : Transverse direction - Only minimum steel required.
636 BOTT: Transverse direction - Only minimum steel required.
636 TOP : 0.355 0.00 / 102 0.355 11.70 / 102
BOTT: 0.355 2.18 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
637 TOP : Longitudinal direction - Only minimum steel required.
637 BOTT: Longitudinal direction - Only minimum steel required.
637 TOP : Transverse direction - Only minimum steel required.
637 BOTT: Transverse direction - Only minimum steel required.
637 TOP : 0.355 0.00 / 102 0.355 0.00 / 102
BOTT: 0.355 37.93 / 102 0.355 1.17 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
638 TOP : Longitudinal direction - Only minimum steel required.
638 BOTT: Longitudinal direction - Only minimum steel required.
638 TOP : Transverse direction - Only minimum steel required.
638 BOTT: Transverse direction - Only minimum steel required.
638 TOP : 0.355 0.00 / 102 0.355 0.80 / 102
BOTT: 0.355 37.32 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
639 TOP : Longitudinal direction - Only minimum steel required.
639 BOTT: Longitudinal direction - Only minimum steel required.
639 TOP : Transverse direction - Only minimum steel required.
639 BOTT: Transverse direction - Only minimum steel required.
639 TOP : 0.355 0.00 / 102 0.355 15.67 / 102
BOTT: 0.355 0.49 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
640 TOP : Longitudinal direction - Only minimum steel required.
640 BOTT: Longitudinal direction - Only minimum steel required.
640 TOP : Transverse direction - Only minimum steel required.
640 BOTT: Transverse direction - Only minimum steel required.
640 TOP : 0.355 20.22 / 102 0.355 28.82 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
641 TOP : Longitudinal direction - Only minimum steel required.
641 BOTT: Longitudinal direction - Only minimum steel required.
641 TOP : Transverse direction - Only minimum steel required.
641 BOTT: Transverse direction - Only minimum steel required.

641 TOP : 0.355 30.62 / 102 0.355 38.17 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
642 TOP : Longitudinal direction - Only minimum steel required.
642 BOTT: Longitudinal direction - Only minimum steel required.
642 TOP : Transverse direction - Only minimum steel required.
642 BOTT: Transverse direction - Only minimum steel required.
642 TOP : 0.355 34.96 / 102 0.355 42.97 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
643 TOP : Longitudinal direction - Only minimum steel required.
643 BOTT: Longitudinal direction - Only minimum steel required.
643 TOP : Transverse direction - Only minimum steel required.
643 BOTT: Transverse direction - Only minimum steel required.
643 TOP : 0.355 34.96 / 102 0.355 42.97 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
644 TOP : Longitudinal direction - Only minimum steel required.
644 BOTT: Longitudinal direction - Only minimum steel required.
644 TOP : Transverse direction - Only minimum steel required.
644 BOTT: Transverse direction - Only minimum steel required.
644 TOP : 0.355 30.62 / 102 0.355 38.17 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
645 TOP : Longitudinal direction - Only minimum steel required.
645 BOTT: Longitudinal direction - Only minimum steel required.
645 TOP : Transverse direction - Only minimum steel required.
645 BOTT: Transverse direction - Only minimum steel required.
645 TOP : 0.355 20.22 / 102 0.355 28.82 / 102
BOTT: 0.355 0.00 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
646 TOP : Longitudinal direction - Only minimum steel required.
646 BOTT: Longitudinal direction - Only minimum steel required.
646 TOP : Transverse direction - Only minimum steel required.
646 BOTT: Transverse direction - Only minimum steel required.
646 TOP : 0.355 0.00 / 102 0.355 15.67 / 102
BOTT: 0.355 0.49 / 103 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
647 TOP : Longitudinal direction - Only minimum steel required.
647 BOTT: Longitudinal direction - Only minimum steel required.
647 TOP : Transverse direction - Only minimum steel required.
647 BOTT: Transverse direction - Only minimum steel required.

```
647 TOP :     0.355         0.00 /  102       0.355          0.80 /  102
    BOTT:     0.355        37.32 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
648 TOP : Longitudinal direction - Only minimum steel required.
648 BOTT: Longitudinal direction - Only minimum steel required.
648 TOP : Transverse direction   - Only minimum steel required.
648 BOTT: Transverse direction   - Only minimum steel required.
648 TOP :     0.355         0.00 /  102       0.355          3.55 /  102
    BOTT:     0.355        33.56 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
649 TOP : Longitudinal direction - Only minimum steel required.
649 BOTT: Longitudinal direction - Only minimum steel required.
649 TOP : Transverse direction   - Only minimum steel required.
649 BOTT: Transverse direction   - Only minimum steel required.
649 TOP :     0.355         2.19 /  102       0.355         19.65 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
650 TOP : Longitudinal direction - Only minimum steel required.
650 BOTT: Longitudinal direction - Only minimum steel required.
650 TOP : Transverse direction   - Only minimum steel required.
650 BOTT: Transverse direction   - Only minimum steel required.
650 TOP :     0.355        20.36 /  102       0.355         33.39 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
651 TOP : Longitudinal direction - Only minimum steel required.
651 BOTT: Longitudinal direction - Only minimum steel required.
651 TOP : Transverse direction   - Only minimum steel required.
651 BOTT: Transverse direction   - Only minimum steel required.
651 TOP :     0.355        29.12 /  102       0.355         42.79 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
652 TOP : Longitudinal direction - Only minimum steel required.
652 BOTT: Longitudinal direction - Only minimum steel required.
652 BOTT: Transverse direction   - Only minimum steel required.
652 TOP :     0.355        32.63 /  102       0.383         47.50 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
653 TOP : Longitudinal direction - Only minimum steel required.
653 BOTT: Longitudinal direction - Only minimum steel required.
653 BOTT: Transverse direction   - Only minimum steel required.
653 TOP :     0.355        32.63 /  102       0.383         47.50 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102
```

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
654 TOP : Longitudinal direction - Only minimum steel required.
654 BOTT: Longitudinal direction - Only minimum steel required.
654 TOP : Transverse direction - Only minimum steel required.
654 BOTT: Transverse direction - Only minimum steel required.
654 TOP : 0.355 29.12 / 102 0.355 42.79 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
655 TOP : Longitudinal direction - Only minimum steel required.
655 BOTT: Longitudinal direction - Only minimum steel required.
655 TOP : Transverse direction - Only minimum steel required.
655 BOTT: Transverse direction - Only minimum steel required.
655 TOP : 0.355 20.36 / 102 0.355 33.39 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
656 TOP : Longitudinal direction - Only minimum steel required.
656 BOTT: Longitudinal direction - Only minimum steel required.
656 TOP : Transverse direction - Only minimum steel required.
656 BOTT: Transverse direction - Only minimum steel required.
656 TOP : 0.355 2.19 / 102 0.355 19.65 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
657 TOP : Longitudinal direction - Only minimum steel required.
657 BOTT: Longitudinal direction - Only minimum steel required.
657 TOP : Transverse direction - Only minimum steel required.
657 BOTT: Transverse direction - Only minimum steel required.
657 TOP : 0.355 0.00 / 102 0.355 3.55 / 102
BOTT: 0.355 33.56 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
658 TOP : Longitudinal direction - Only minimum steel required.
658 BOTT: Longitudinal direction - Only minimum steel required.
658 TOP : Transverse direction - Only minimum steel required.
658 BOTT: Transverse direction - Only minimum steel required.
658 TOP : 0.355 0.00 / 102 0.355 7.03 / 102
BOTT: 0.355 26.32 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
659 TOP : Longitudinal direction - Only minimum steel required.
659 BOTT: Longitudinal direction - Only minimum steel required.
659 TOP : Transverse direction - Only minimum steel required.
659 BOTT: Transverse direction - Only minimum steel required.
659 TOP : 0.355 4.29 / 102 0.355 22.87 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM

```
660 TOP : Longitudinal direction - Only minimum steel required.
660 BOTT: Longitudinal direction - Only minimum steel required.
660 TOP : Transverse direction   - Only minimum steel required.
660 BOTT: Transverse direction   - Only minimum steel required.
660 TOP :     0.355        18.57 /  102       0.355         35.62 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
661 TOP : Longitudinal direction - Only minimum steel required.
661 BOTT: Longitudinal direction - Only minimum steel required.
661 TOP : Transverse direction   - Only minimum steel required.
661 BOTT: Transverse direction   - Only minimum steel required.
661 TOP :     0.355        24.98 /  102       0.355         43.81 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
662 TOP : Longitudinal direction - Only minimum steel required.
662 BOTT: Longitudinal direction - Only minimum steel required.
662 BOTT: Transverse direction   - Only minimum steel required.
662 TOP :     0.355        27.43 /  102       0.385         47.75 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
663 TOP : Longitudinal direction - Only minimum steel required.
663 BOTT: Longitudinal direction - Only minimum steel required.
663 BOTT: Transverse direction   - Only minimum steel required.
663 TOP :     0.355        27.43 /  102       0.385         47.75 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
664 TOP : Longitudinal direction - Only minimum steel required.
664 BOTT: Longitudinal direction - Only minimum steel required.
664 TOP : Transverse direction   - Only minimum steel required.
664 BOTT: Transverse direction   - Only minimum steel required.
664 TOP :     0.355        24.98 /  102       0.355         43.81 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
665 TOP : Longitudinal direction - Only minimum steel required.
665 BOTT: Longitudinal direction - Only minimum steel required.
665 TOP : Transverse direction   - Only minimum steel required.
665 BOTT: Transverse direction   - Only minimum steel required.
665 TOP :     0.355        18.57 /  102       0.355         35.62 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
666 TOP : Longitudinal direction - Only minimum steel required.
666 BOTT: Longitudinal direction - Only minimum steel required.
666 TOP : Transverse direction   - Only minimum steel required.
666 BOTT: Transverse direction   - Only minimum steel required.
```

```
666 TOP :     0.355         4.29 /  102       0.355         22.87 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
667 TOP : Longitudinal direction - Only minimum steel required.
667 BOTT: Longitudinal direction - Only minimum steel required.
667 TOP : Transverse direction   - Only minimum steel required.
667 BOTT: Transverse direction   - Only minimum steel required.
667 TOP :     0.355         0.00 /  102       0.355          7.03 /  102
    BOTT:     0.355        26.32 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
668 TOP : Longitudinal direction - Only minimum steel required.
668 BOTT: Longitudinal direction - Only minimum steel required.
668 TOP : Transverse direction   - Only minimum steel required.
668 BOTT: Transverse direction   - Only minimum steel required.
668 TOP :     0.355         0.00 /  102       0.355         10.61 /  102
    BOTT:     0.355        16.04 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
669 TOP : Longitudinal direction - Only minimum steel required.
669 BOTT: Longitudinal direction - Only minimum steel required.
669 TOP : Transverse direction   - Only minimum steel required.
669 BOTT: Transverse direction   - Only minimum steel required.
669 TOP :     0.355         5.28 /  102       0.355         23.93 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
670 TOP : Longitudinal direction - Only minimum steel required.
670 BOTT: Longitudinal direction - Only minimum steel required.
670 TOP : Transverse direction   - Only minimum steel required.
670 BOTT: Transverse direction   - Only minimum steel required.
670 TOP :     0.355        14.26 /  102       0.355         33.34 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
671 TOP : Longitudinal direction - Only minimum steel required.
671 BOTT: Longitudinal direction - Only minimum steel required.
671 TOP : Transverse direction   - Only minimum steel required.
671 BOTT: Transverse direction   - Only minimum steel required.
671 TOP :     0.355        17.94 /  102       0.355         38.60 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
672 TOP : Longitudinal direction - Only minimum steel required.
672 BOTT: Longitudinal direction - Only minimum steel required.
672 TOP : Transverse direction   - Only minimum steel required.
672 BOTT: Transverse direction   - Only minimum steel required.
```

```
672 TOP :     0.355        19.24 /  102       0.355         40.91 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
673 TOP : Longitudinal direction - Only minimum steel required.
673 BOTT: Longitudinal direction - Only minimum steel required.
673 TOP : Transverse direction   - Only minimum steel required.
673 BOTT: Transverse direction   - Only minimum steel required.
673 TOP :     0.355        19.24 /  102       0.355         40.91 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
674 TOP : Longitudinal direction - Only minimum steel required.
674 BOTT: Longitudinal direction - Only minimum steel required.
674 TOP : Transverse direction   - Only minimum steel required.
674 BOTT: Transverse direction   - Only minimum steel required.
674 TOP :     0.355        17.94 /  102       0.355         38.60 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
675 TOP : Longitudinal direction - Only minimum steel required.
675 BOTT: Longitudinal direction - Only minimum steel required.
675 TOP : Transverse direction   - Only minimum steel required.
675 BOTT: Transverse direction   - Only minimum steel required.
675 TOP :     0.355        14.26 /  102       0.355         33.34 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
676 TOP : Longitudinal direction - Only minimum steel required.
676 BOTT: Longitudinal direction - Only minimum steel required.
676 TOP : Transverse direction   - Only minimum steel required.
676 BOTT: Transverse direction   - Only minimum steel required.
676 TOP :     0.355         5.28 /  102       0.355         23.93 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
677 TOP : Longitudinal direction - Only minimum steel required.
677 BOTT: Longitudinal direction - Only minimum steel required.
677 TOP : Transverse direction   - Only minimum steel required.
677 BOTT: Transverse direction   - Only minimum steel required.
677 TOP :     0.355         0.00 /  102       0.355         10.61 /  102
    BOTT:     0.355        16.04 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
678 TOP : Longitudinal direction - Only minimum steel required.
678 BOTT: Longitudinal direction - Only minimum steel required.
678 TOP : Transverse direction   - Only minimum steel required.
678 BOTT: Transverse direction   - Only minimum steel required.
```

```
678 TOP :     0.355         0.00 /  102       0.355         11.80 /  102
    BOTT:     0.355         4.17 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
679 TOP : Longitudinal direction - Only minimum steel required.
679 BOTT: Longitudinal direction - Only minimum steel required.
679 TOP : Transverse direction   - Only minimum steel required.
679 BOTT: Transverse direction   - Only minimum steel required.
679 TOP :     0.355         4.15 /  102       0.355         21.14 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
680 TOP : Longitudinal direction - Only minimum steel required.
680 BOTT: Longitudinal direction - Only minimum steel required.
680 TOP : Transverse direction   - Only minimum steel required.
680 BOTT: Transverse direction   - Only minimum steel required.
680 TOP :     0.355         7.06 /  102       0.355         27.09 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
681 TOP : Longitudinal direction - Only minimum steel required.
681 BOTT: Longitudinal direction - Only minimum steel required.
681 TOP : Transverse direction   - Only minimum steel required.
681 BOTT: Transverse direction   - Only minimum steel required.
681 TOP :     0.355         7.97 /  102       0.355         30.22 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
682 TOP : Longitudinal direction - Only minimum steel required.
682 BOTT: Longitudinal direction - Only minimum steel required.
682 TOP : Transverse direction   - Only minimum steel required.
682 BOTT: Transverse direction   - Only minimum steel required.
682 TOP :     0.355         8.18 /  102       0.355         31.52 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
683 TOP : Longitudinal direction - Only minimum steel required.
683 BOTT: Longitudinal direction - Only minimum steel required.
683 TOP : Transverse direction   - Only minimum steel required.
683 BOTT: Transverse direction   - Only minimum steel required.
683 TOP :     0.355         8.18 /  102       0.355         31.52 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
684 TOP : Longitudinal direction - Only minimum steel required.
684 BOTT: Longitudinal direction - Only minimum steel required.
684 TOP : Transverse direction   - Only minimum steel required.
684 BOTT: Transverse direction   - Only minimum steel required.
```

```
684 TOP :     0.355         7.97 /  102       0.355         30.22 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
685 TOP : Longitudinal direction - Only minimum steel required.
685 BOTT: Longitudinal direction - Only minimum steel required.
685 TOP : Transverse direction   - Only minimum steel required.
685 BOTT: Transverse direction   - Only minimum steel required.
685 TOP :     0.355         7.06 /  102       0.355         27.09 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
686 TOP : Longitudinal direction - Only minimum steel required.
686 BOTT: Longitudinal direction - Only minimum steel required.
686 TOP : Transverse direction   - Only minimum steel required.
686 BOTT: Transverse direction   - Only minimum steel required.
686 TOP :     0.355         4.15 /  102       0.355         21.14 /  103
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
687 TOP : Longitudinal direction - Only minimum steel required.
687 BOTT: Longitudinal direction - Only minimum steel required.
687 TOP : Transverse direction   - Only minimum steel required.
687 BOTT: Transverse direction   - Only minimum steel required.
687 TOP :     0.355         0.00 /  102       0.355         11.80 /  102
    BOTT:     0.355         4.17 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
702 TOP : Longitudinal direction - Only minimum steel required.
702 BOTT: Longitudinal direction - Only minimum steel required.
702 TOP : Transverse direction   - Only minimum steel required.
702 BOTT: Transverse direction   - Only minimum steel required.
702 TOP :     0.355        18.75 /  103       0.355          0.52 /  103
    BOTT:     0.355         0.00 /  102       0.355          1.76 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
703 TOP : Longitudinal direction - Only minimum steel required.
703 BOTT: Longitudinal direction - Only minimum steel required.
703 TOP : Transverse direction   - Only minimum steel required.
703 BOTT: Transverse direction   - Only minimum steel required.
703 TOP :     0.355        18.75 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          3.93 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
704 TOP : Longitudinal direction - Only minimum steel required.
704 BOTT: Longitudinal direction - Only minimum steel required.
704 TOP : Transverse direction   - Only minimum steel required.
704 BOTT: Transverse direction   - Only minimum steel required.
```

```
704 TOP :     0.355        20.44 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          4.25 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
705 TOP : Longitudinal direction - Only minimum steel required.
705 BOTT: Longitudinal direction - Only minimum steel required.
705 TOP : Transverse direction   - Only minimum steel required.
705 BOTT: Transverse direction   - Only minimum steel required.
705 TOP :     0.355        20.71 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          4.36 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
706 TOP : Longitudinal direction - Only minimum steel required.
706 BOTT: Longitudinal direction - Only minimum steel required.
706 TOP : Transverse direction   - Only minimum steel required.
706 BOTT: Transverse direction   - Only minimum steel required.
706 TOP :     0.355        20.66 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          4.35 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
707 TOP : Longitudinal direction - Only minimum steel required.
707 BOTT: Longitudinal direction - Only minimum steel required.
707 TOP : Transverse direction   - Only minimum steel required.
707 BOTT: Transverse direction   - Only minimum steel required.
707 TOP :     0.355        20.30 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          4.22 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
708 TOP : Longitudinal direction - Only minimum steel required.
708 BOTT: Longitudinal direction - Only minimum steel required.
708 TOP : Transverse direction   - Only minimum steel required.
708 BOTT: Transverse direction   - Only minimum steel required.
708 TOP :     0.355        18.55 /  103       0.355          0.00 /  103
    BOTT:     0.355         0.00 /  102       0.355          3.89 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
709 TOP : Longitudinal direction - Only minimum steel required.
709 BOTT: Longitudinal direction - Only minimum steel required.
709 TOP : Transverse direction   - Only minimum steel required.
709 BOTT: Transverse direction   - Only minimum steel required.
709 TOP :     0.355        18.53 /  103       0.355          0.53 /  103
    BOTT:     0.355         0.00 /  102       0.355          1.73 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
712 TOP : Longitudinal direction - Only minimum steel required.
712 BOTT: Longitudinal direction - Only minimum steel required.
712 TOP : Transverse direction   - Only minimum steel required.
712 BOTT: Transverse direction   - Only minimum steel required.
```

712 TOP : 0.355 18.75 / 103 0.355 0.52 / 103
BOTT: 0.355 0.00 / 102 0.355 1.76 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
713 TOP : Longitudinal direction - Only minimum steel required.
713 BOTT: Longitudinal direction - Only minimum steel required.
713 TOP : Transverse direction - Only minimum steel required.
713 BOTT: Transverse direction - Only minimum steel required.
713 TOP : 0.355 18.75 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 3.93 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
714 TOP : Longitudinal direction - Only minimum steel required.
714 BOTT: Longitudinal direction - Only minimum steel required.
714 TOP : Transverse direction - Only minimum steel required.
714 BOTT: Transverse direction - Only minimum steel required.
714 TOP : 0.355 20.44 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 4.25 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
715 TOP : Longitudinal direction - Only minimum steel required.
715 BOTT: Longitudinal direction - Only minimum steel required.
715 TOP : Transverse direction - Only minimum steel required.
715 BOTT: Transverse direction - Only minimum steel required.
715 TOP : 0.355 20.71 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 4.36 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
716 TOP : Longitudinal direction - Only minimum steel required.
716 BOTT: Longitudinal direction - Only minimum steel required.
716 TOP : Transverse direction - Only minimum steel required.
716 BOTT: Transverse direction - Only minimum steel required.
716 TOP : 0.355 20.66 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 4.35 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
717 TOP : Longitudinal direction - Only minimum steel required.
717 BOTT: Longitudinal direction - Only minimum steel required.
717 TOP : Transverse direction - Only minimum steel required.
717 BOTT: Transverse direction - Only minimum steel required.
717 TOP : 0.355 20.30 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 4.22 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
718 TOP : Longitudinal direction - Only minimum steel required.
718 BOTT: Longitudinal direction - Only minimum steel required.
718 TOP : Transverse direction - Only minimum steel required.
718 BOTT: Transverse direction - Only minimum steel required.

718 TOP : 0.355 18.55 / 103 0.355 0.00 / 103
BOTT: 0.355 0.00 / 102 0.355 3.89 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
719 TOP : Longitudinal direction - Only minimum steel required.
719 BOTT: Longitudinal direction - Only minimum steel required.
719 TOP : Transverse direction - Only minimum steel required.
719 BOTT: Transverse direction - Only minimum steel required.
719 TOP : 0.355 18.53 / 103 0.355 0.53 / 103
BOTT: 0.355 0.00 / 102 0.355 1.73 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
724 TOP : Longitudinal direction - Only minimum steel required.
724 BOTT: Longitudinal direction - Only minimum steel required.
724 TOP : Transverse direction - Only minimum steel required.
724 BOTT: Transverse direction - Only minimum steel required.
724 TOP : 0.355 6.76 / 102 0.355 5.82 / 102
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
725 TOP : Longitudinal direction - Only minimum steel required.
725 BOTT: Longitudinal direction - Only minimum steel required.
725 TOP : Transverse direction - Only minimum steel required.
725 BOTT: Transverse direction - Only minimum steel required.
725 TOP : 0.355 5.24 / 103 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 5.76 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
726 TOP : Longitudinal direction - Only minimum steel required.
726 BOTT: Longitudinal direction - Only minimum steel required.
726 TOP : Transverse direction - Only minimum steel required.
726 BOTT: Transverse direction - Only minimum steel required.
726 TOP : 0.355 5.17 / 103 0.355 0.00 / 102
BOTT: 0.355 0.00 / 102 0.355 5.73 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
727 TOP : Longitudinal direction - Only minimum steel required.
727 BOTT: Longitudinal direction - Only minimum steel required.
727 TOP : Transverse direction - Only minimum steel required.
727 BOTT: Transverse direction - Only minimum steel required.
727 TOP : 0.355 6.62 / 102 0.355 5.62 / 101
BOTT: 0.355 0.00 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
728 TOP : Longitudinal direction - Only minimum steel required.
728 BOTT: Longitudinal direction - Only minimum steel required.
728 TOP : Transverse direction - Only minimum steel required.
728 BOTT: Transverse direction - Only minimum steel required.

```
728 TOP :     0.355         6.76 /  102       0.355          5.82 /  102
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
729 TOP : Longitudinal direction - Only minimum steel required.
729 BOTT: Longitudinal direction - Only minimum steel required.
729 TOP : Transverse direction   - Only minimum steel required.
729 BOTT: Transverse direction   - Only minimum steel required.
729 TOP :     0.355         5.24 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          5.76 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
730 TOP : Longitudinal direction - Only minimum steel required.
730 BOTT: Longitudinal direction - Only minimum steel required.
730 TOP : Transverse direction   - Only minimum steel required.
730 BOTT: Transverse direction   - Only minimum steel required.
730 TOP :     0.355         5.17 /  103       0.355          0.00 /  102
    BOTT:     0.355         0.00 /  102       0.355          5.73 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
731 TOP : Longitudinal direction - Only minimum steel required.
731 BOTT: Longitudinal direction - Only minimum steel required.
731 TOP : Transverse direction   - Only minimum steel required.
731 BOTT: Transverse direction   - Only minimum steel required.
731 TOP :     0.355         6.62 /  102       0.355          5.62 /  101
    BOTT:     0.355         0.00 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
732 TOP : Longitudinal direction - Only minimum steel required.
732 BOTT: Longitudinal direction - Only minimum steel required.
732 TOP : Transverse direction   - Only minimum steel required.
732 BOTT: Transverse direction   - Only minimum steel required.
732 TOP :     0.355         0.50 /  103       0.355          7.41 /  103
    BOTT:     0.355         1.19 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
733 TOP : Longitudinal direction - Only minimum steel required.
733 BOTT: Longitudinal direction - Only minimum steel required.
733 TOP : Transverse direction   - Only minimum steel required.
733 BOTT: Transverse direction   - Only minimum steel required.
733 TOP :     0.355         0.00 /  103       0.355         11.55 /  103
    BOTT:     0.355         4.91 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
734 TOP : Longitudinal direction - Only minimum steel required.
734 BOTT: Longitudinal direction - Only minimum steel required.
734 TOP : Transverse direction   - Only minimum steel required.
734 BOTT: Transverse direction   - Only minimum steel required.
```

734 TOP : 0.355 0.00 / 103 0.355 13.73 / 103
BOTT: 0.355 5.97 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
735 TOP : Longitudinal direction - Only minimum steel required.
735 BOTT: Longitudinal direction - Only minimum steel required.
735 TOP : Transverse direction - Only minimum steel required.
735 BOTT: Transverse direction - Only minimum steel required.
735 TOP : 0.355 0.00 / 103 0.355 14.66 / 103
BOTT: 0.355 6.23 / 102 0.355 0.19 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
736 TOP : Longitudinal direction - Only minimum steel required.
736 BOTT: Longitudinal direction - Only minimum steel required.
736 TOP : Transverse direction - Only minimum steel required.
736 BOTT: Transverse direction - Only minimum steel required.
736 TOP : 0.355 0.00 / 103 0.355 14.98 / 103
BOTT: 0.355 6.29 / 102 0.355 1.99 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
737 TOP : Longitudinal direction - Only minimum steel required.
737 BOTT: Longitudinal direction - Only minimum steel required.
737 TOP : Transverse direction - Only minimum steel required.
737 BOTT: Transverse direction - Only minimum steel required.
737 TOP : 0.355 0.00 / 103 0.355 14.98 / 103
BOTT: 0.355 6.29 / 102 0.355 1.99 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
738 TOP : Longitudinal direction - Only minimum steel required.
738 BOTT: Longitudinal direction - Only minimum steel required.
738 TOP : Transverse direction - Only minimum steel required.
738 BOTT: Transverse direction - Only minimum steel required.
738 TOP : 0.355 0.00 / 103 0.355 14.66 / 103
BOTT: 0.355 6.23 / 102 0.355 0.19 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
739 TOP : Longitudinal direction - Only minimum steel required.
739 BOTT: Longitudinal direction - Only minimum steel required.
739 TOP : Transverse direction - Only minimum steel required.
739 BOTT: Transverse direction - Only minimum steel required.
739 TOP : 0.355 0.00 / 103 0.355 13.73 / 103
BOTT: 0.355 5.97 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
740 TOP : Longitudinal direction - Only minimum steel required.
740 BOTT: Longitudinal direction - Only minimum steel required.
740 TOP : Transverse direction - Only minimum steel required.
740 BOTT: Transverse direction - Only minimum steel required.

```
740 TOP :     0.355         0.00 /  103       0.355         11.55 /  103
    BOTT:     0.355         4.91 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
741 TOP : Longitudinal direction - Only minimum steel required.
741 BOTT: Longitudinal direction - Only minimum steel required.
741 TOP : Transverse direction   - Only minimum steel required.
741 BOTT: Transverse direction   - Only minimum steel required.
741 TOP :     0.355         0.50 /  103       0.355          7.41 /  103
    BOTT:     0.355         1.19 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
742 TOP : Longitudinal direction - Only minimum steel required.
742 BOTT: Longitudinal direction - Only minimum steel required.
742 TOP : Transverse direction   - Only minimum steel required.
742 BOTT: Transverse direction   - Only minimum steel required.
742 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355         3.66 /  102       0.355          6.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
743 TOP : Longitudinal direction - Only minimum steel required.
743 BOTT: Longitudinal direction - Only minimum steel required.
743 TOP : Transverse direction   - Only minimum steel required.
743 BOTT: Transverse direction   - Only minimum steel required.
743 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        11.57 /  102       0.355         10.42 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
744 TOP : Longitudinal direction - Only minimum steel required.
744 BOTT: Longitudinal direction - Only minimum steel required.
744 TOP : Transverse direction   - Only minimum steel required.
744 BOTT: Transverse direction   - Only minimum steel required.
744 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.59 /  102       0.355         15.03 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
745 TOP : Longitudinal direction - Only minimum steel required.
745 BOTT: Longitudinal direction - Only minimum steel required.
745 TOP : Transverse direction   - Only minimum steel required.
745 BOTT: Transverse direction   - Only minimum steel required.
745 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.94 /  102       0.355         18.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
746 TOP : Longitudinal direction - Only minimum steel required.
746 BOTT: Longitudinal direction - Only minimum steel required.
746 TOP : Transverse direction   - Only minimum steel required.
746 BOTT: Transverse direction   - Only minimum steel required.
```

```
746 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.88 /  102       0.355         20.17 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
747 TOP : Longitudinal direction - Only minimum steel required.
747 BOTT: Longitudinal direction - Only minimum steel required.
747 TOP : Transverse direction   - Only minimum steel required.
747 BOTT: Transverse direction   - Only minimum steel required.
747 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.88 /  102       0.355         20.17 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
748 TOP : Longitudinal direction - Only minimum steel required.
748 BOTT: Longitudinal direction - Only minimum steel required.
748 TOP : Transverse direction   - Only minimum steel required.
748 BOTT: Transverse direction   - Only minimum steel required.
748 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.94 /  102       0.355         18.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
749 TOP : Longitudinal direction - Only minimum steel required.
749 BOTT: Longitudinal direction - Only minimum steel required.
749 TOP : Transverse direction   - Only minimum steel required.
749 BOTT: Transverse direction   - Only minimum steel required.
749 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.59 /  102       0.355         15.03 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
750 TOP : Longitudinal direction - Only minimum steel required.
750 BOTT: Longitudinal direction - Only minimum steel required.
750 TOP : Transverse direction   - Only minimum steel required.
750 BOTT: Transverse direction   - Only minimum steel required.
750 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        11.57 /  102       0.355         10.42 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
751 TOP : Longitudinal direction - Only minimum steel required.
751 BOTT: Longitudinal direction - Only minimum steel required.
751 TOP : Transverse direction   - Only minimum steel required.
751 BOTT: Transverse direction   - Only minimum steel required.
751 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355         3.66 /  102       0.355          6.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
752 TOP : Longitudinal direction - Only minimum steel required.
752 BOTT: Longitudinal direction - Only minimum steel required.
752 TOP : Transverse direction   - Only minimum steel required.
752 BOTT: Transverse direction   - Only minimum steel required.
```

752 TOP : 0.355 0.20 / 103 0.355 0.00 / 103
BOTT: 0.355 5.76 / 102 0.355 9.55 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
753 TOP : Longitudinal direction - Only minimum steel required.
753 BOTT: Longitudinal direction - Only minimum steel required.
753 TOP : Transverse direction - Only minimum steel required.
753 BOTT: Transverse direction - Only minimum steel required.
753 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 18.54 / 102 0.355 18.50 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
754 TOP : Longitudinal direction - Only minimum steel required.
754 BOTT: Longitudinal direction - Only minimum steel required.
754 TOP : Transverse direction - Only minimum steel required.
754 BOTT: Transverse direction - Only minimum steel required.
754 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 22.31 / 102 0.355 25.02 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
755 TOP : Longitudinal direction - Only minimum steel required.
755 BOTT: Longitudinal direction - Only minimum steel required.
755 TOP : Transverse direction - Only minimum steel required.
755 BOTT: Transverse direction - Only minimum steel required.
755 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 22.90 / 102 0.355 29.06 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
756 TOP : Longitudinal direction - Only minimum steel required.
756 BOTT: Longitudinal direction - Only minimum steel required.
756 TOP : Transverse direction - Only minimum steel required.
756 BOTT: Transverse direction - Only minimum steel required.
756 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 22.74 / 102 0.355 31.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
757 TOP : Longitudinal direction - Only minimum steel required.
757 BOTT: Longitudinal direction - Only minimum steel required.
757 TOP : Transverse direction - Only minimum steel required.
757 BOTT: Transverse direction - Only minimum steel required.
757 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 22.74 / 102 0.355 31.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
758 TOP : Longitudinal direction - Only minimum steel required.
758 BOTT: Longitudinal direction - Only minimum steel required.
758 TOP : Transverse direction - Only minimum steel required.
758 BOTT: Transverse direction - Only minimum steel required.

```
758 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.90 /  102       0.355         29.06 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
759 TOP : Longitudinal direction - Only minimum steel required.
759 BOTT: Longitudinal direction - Only minimum steel required.
759 TOP : Transverse direction   - Only minimum steel required.
759 BOTT: Transverse direction   - Only minimum steel required.
759 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.31 /  102       0.355         25.02 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
760 TOP : Longitudinal direction - Only minimum steel required.
760 BOTT: Longitudinal direction - Only minimum steel required.
760 TOP : Transverse direction   - Only minimum steel required.
760 BOTT: Transverse direction   - Only minimum steel required.
760 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        18.54 /  102       0.355         18.50 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
761 TOP : Longitudinal direction - Only minimum steel required.
761 BOTT: Longitudinal direction - Only minimum steel required.
761 TOP : Transverse direction   - Only minimum steel required.
761 BOTT: Transverse direction   - Only minimum steel required.
761 TOP :     0.355         0.20 /  103       0.355          0.00 /  103
    BOTT:     0.355         5.76 /  102       0.355          9.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
762 TOP : Longitudinal direction - Only minimum steel required.
762 BOTT: Longitudinal direction - Only minimum steel required.
762 TOP : Transverse direction   - Only minimum steel required.
762 BOTT: Transverse direction   - Only minimum steel required.
762 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        10.08 /  102       0.355         11.45 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
763 TOP : Longitudinal direction - Only minimum steel required.
763 BOTT: Longitudinal direction - Only minimum steel required.
763 TOP : Transverse direction   - Only minimum steel required.
763 BOTT: Transverse direction   - Only minimum steel required.
763 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        24.76 /  102       0.355         22.14 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
764 TOP : Longitudinal direction - Only minimum steel required.
764 BOTT: Longitudinal direction - Only minimum steel required.
764 TOP : Transverse direction   - Only minimum steel required.
764 BOTT: Transverse direction   - Only minimum steel required.
```

```
764 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        29.64 /  102       0.355         29.71 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
765 TOP : Longitudinal direction - Only minimum steel required.
765 BOTT: Longitudinal direction - Only minimum steel required.
765 TOP : Transverse direction   - Only minimum steel required.
765 BOTT: Transverse direction   - Only minimum steel required.
765 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.42 /  102       0.355         34.28 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
766 TOP : Longitudinal direction - Only minimum steel required.
766 BOTT: Longitudinal direction - Only minimum steel required.
766 TOP : Transverse direction   - Only minimum steel required.
766 BOTT: Transverse direction   - Only minimum steel required.
766 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.16 /  102       0.355         36.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
767 TOP : Longitudinal direction - Only minimum steel required.
767 BOTT: Longitudinal direction - Only minimum steel required.
767 TOP : Transverse direction   - Only minimum steel required.
767 BOTT: Transverse direction   - Only minimum steel required.
767 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.16 /  102       0.355         36.41 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
768 TOP : Longitudinal direction - Only minimum steel required.
768 BOTT: Longitudinal direction - Only minimum steel required.
768 TOP : Transverse direction   - Only minimum steel required.
768 BOTT: Transverse direction   - Only minimum steel required.
768 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.42 /  102       0.355         34.28 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
769 TOP : Longitudinal direction - Only minimum steel required.
769 BOTT: Longitudinal direction - Only minimum steel required.
769 TOP : Transverse direction   - Only minimum steel required.
769 BOTT: Transverse direction   - Only minimum steel required.
769 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        29.64 /  102       0.355         29.71 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
770 TOP : Longitudinal direction - Only minimum steel required.
770 BOTT: Longitudinal direction - Only minimum steel required.
770 TOP : Transverse direction   - Only minimum steel required.
770 BOTT: Transverse direction   - Only minimum steel required.
```

```
770 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        24.76 /  102       0.355         22.14 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
771 TOP : Longitudinal direction - Only minimum steel required.
771 BOTT: Longitudinal direction - Only minimum steel required.
771 TOP : Transverse direction   - Only minimum steel required.
771 BOTT: Transverse direction   - Only minimum steel required.
771 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        10.08 /  102       0.355         11.45 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
782 TOP : Longitudinal direction - Only minimum steel required.
782 BOTT: Longitudinal direction - Only minimum steel required.
782 TOP : Transverse direction   - Only minimum steel required.
782 BOTT: Transverse direction   - Only minimum steel required.
782 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.56 /  102       0.355         11.88 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
783 TOP : Longitudinal direction - Only minimum steel required.
783 BOTT: Longitudinal direction - Only minimum steel required.
783 TOP : Transverse direction   - Only minimum steel required.
783 BOTT: Transverse direction   - Only minimum steel required.
783 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        28.67 /  102       0.355         22.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
784 TOP : Longitudinal direction - Only minimum steel required.
784 BOTT: Longitudinal direction - Only minimum steel required.
784 TOP : Transverse direction   - Only minimum steel required.
784 BOTT: Transverse direction   - Only minimum steel required.
784 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.05 /  102       0.355         30.37 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
785 TOP : Longitudinal direction - Only minimum steel required.
785 BOTT: Longitudinal direction - Only minimum steel required.
785 TOP : Transverse direction   - Only minimum steel required.
785 BOTT: Transverse direction   - Only minimum steel required.
785 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.95 /  102       0.355         35.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
786 TOP : Longitudinal direction - Only minimum steel required.
786 BOTT: Longitudinal direction - Only minimum steel required.
786 TOP : Transverse direction   - Only minimum steel required.
786 BOTT: Transverse direction   - Only minimum steel required.
```

```
786 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.64 /  102       0.355         37.17 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
787 TOP : Longitudinal direction - Only minimum steel required.
787 BOTT: Longitudinal direction - Only minimum steel required.
787 TOP : Transverse direction   - Only minimum steel required.
787 BOTT: Transverse direction   - Only minimum steel required.
787 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.64 /  102       0.355         37.17 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
788 TOP : Longitudinal direction - Only minimum steel required.
788 BOTT: Longitudinal direction - Only minimum steel required.
788 TOP : Transverse direction   - Only minimum steel required.
788 BOTT: Transverse direction   - Only minimum steel required.
788 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.95 /  102       0.355         35.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
789 TOP : Longitudinal direction - Only minimum steel required.
789 BOTT: Longitudinal direction - Only minimum steel required.
789 TOP : Transverse direction   - Only minimum steel required.
789 BOTT: Transverse direction   - Only minimum steel required.
789 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.05 /  102       0.355         30.37 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
790 TOP : Longitudinal direction - Only minimum steel required.
790 BOTT: Longitudinal direction - Only minimum steel required.
790 TOP : Transverse direction   - Only minimum steel required.
790 BOTT: Transverse direction   - Only minimum steel required.
790 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        28.67 /  102       0.355         22.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
791 TOP : Longitudinal direction - Only minimum steel required.
791 BOTT: Longitudinal direction - Only minimum steel required.
791 TOP : Transverse direction   - Only minimum steel required.
791 BOTT: Transverse direction   - Only minimum steel required.
791 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.56 /  102       0.355         11.88 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
792 TOP : Longitudinal direction - Only minimum steel required.
792 BOTT: Longitudinal direction - Only minimum steel required.
792 TOP : Transverse direction   - Only minimum steel required.
792 BOTT: Transverse direction   - Only minimum steel required.
```

792 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 15.40 / 102 0.355 11.85 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
793 TOP : Longitudinal direction - Only minimum steel required.
793 BOTT: Longitudinal direction - Only minimum steel required.
793 TOP : Transverse direction - Only minimum steel required.
793 BOTT: Transverse direction - Only minimum steel required.
793 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 30.52 / 102 0.355 22.55 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
794 TOP : Longitudinal direction - Only minimum steel required.
794 BOTT: Longitudinal direction - Only minimum steel required.
794 TOP : Transverse direction - Only minimum steel required.
794 BOTT: Transverse direction - Only minimum steel required.
794 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.05 / 102 0.355 29.99 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
795 TOP : Longitudinal direction - Only minimum steel required.
795 BOTT: Longitudinal direction - Only minimum steel required.
795 TOP : Transverse direction - Only minimum steel required.
795 BOTT: Transverse direction - Only minimum steel required.
795 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 37.02 / 102 0.355 34.51 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
796 TOP : Longitudinal direction - Only minimum steel required.
796 BOTT: Longitudinal direction - Only minimum steel required.
796 TOP : Transverse direction - Only minimum steel required.
796 BOTT: Transverse direction - Only minimum steel required.
796 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.70 / 102 0.355 36.65 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
797 TOP : Longitudinal direction - Only minimum steel required.
797 BOTT: Longitudinal direction - Only minimum steel required.
797 TOP : Transverse direction - Only minimum steel required.
797 BOTT: Transverse direction - Only minimum steel required.
797 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.70 / 102 0.355 36.65 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
798 TOP : Longitudinal direction - Only minimum steel required.
798 BOTT: Longitudinal direction - Only minimum steel required.
798 TOP : Transverse direction - Only minimum steel required.
798 BOTT: Transverse direction - Only minimum steel required.

```
798 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        37.02 /  102       0.355         34.51 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
799 TOP : Longitudinal direction - Only minimum steel required.
799 BOTT: Longitudinal direction - Only minimum steel required.
799 TOP : Transverse direction   - Only minimum steel required.
799 BOTT: Transverse direction   - Only minimum steel required.
799 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        36.05 /  102       0.355         29.99 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
800 TOP : Longitudinal direction - Only minimum steel required.
800 BOTT: Longitudinal direction - Only minimum steel required.
800 TOP : Transverse direction   - Only minimum steel required.
800 BOTT: Transverse direction   - Only minimum steel required.
800 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.52 /  102       0.355         22.55 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
801 TOP : Longitudinal direction - Only minimum steel required.
801 BOTT: Longitudinal direction - Only minimum steel required.
801 TOP : Transverse direction   - Only minimum steel required.
801 BOTT: Transverse direction   - Only minimum steel required.
801 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        15.40 /  102       0.355         11.85 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
802 TOP : Longitudinal direction - Only minimum steel required.
802 BOTT: Longitudinal direction - Only minimum steel required.
802 TOP : Transverse direction   - Only minimum steel required.
802 BOTT: Transverse direction   - Only minimum steel required.
802 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        15.41 /  102       0.355         11.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
803 TOP : Longitudinal direction - Only minimum steel required.
803 BOTT: Longitudinal direction - Only minimum steel required.
803 TOP : Transverse direction   - Only minimum steel required.
803 BOTT: Transverse direction   - Only minimum steel required.
803 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.46 /  102       0.355         22.44 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
804 TOP : Longitudinal direction - Only minimum steel required.
804 BOTT: Longitudinal direction - Only minimum steel required.
804 TOP : Transverse direction   - Only minimum steel required.
804 BOTT: Transverse direction   - Only minimum steel required.
```

804 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 35.98 / 102 0.355 29.83 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
805 TOP : Longitudinal direction - Only minimum steel required.
805 BOTT: Longitudinal direction - Only minimum steel required.
805 TOP : Transverse direction - Only minimum steel required.
805 BOTT: Transverse direction - Only minimum steel required.
805 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.94 / 102 0.355 34.33 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
806 TOP : Longitudinal direction - Only minimum steel required.
806 BOTT: Longitudinal direction - Only minimum steel required.
806 TOP : Transverse direction - Only minimum steel required.
806 BOTT: Transverse direction - Only minimum steel required.
806 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.62 / 102 0.355 36.45 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
807 TOP : Longitudinal direction - Only minimum steel required.
807 BOTT: Longitudinal direction - Only minimum steel required.
807 TOP : Transverse direction - Only minimum steel required.
807 BOTT: Transverse direction - Only minimum steel required.
807 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.62 / 102 0.355 36.45 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
808 TOP : Longitudinal direction - Only minimum steel required.
808 BOTT: Longitudinal direction - Only minimum steel required.
808 TOP : Transverse direction - Only minimum steel required.
808 BOTT: Transverse direction - Only minimum steel required.
808 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 36.94 / 102 0.355 34.33 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
809 TOP : Longitudinal direction - Only minimum steel required.
809 BOTT: Longitudinal direction - Only minimum steel required.
809 TOP : Transverse direction - Only minimum steel required.
809 BOTT: Transverse direction - Only minimum steel required.
809 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 35.98 / 102 0.355 29.83 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
810 TOP : Longitudinal direction - Only minimum steel required.
810 BOTT: Longitudinal direction - Only minimum steel required.
810 TOP : Transverse direction - Only minimum steel required.
810 BOTT: Transverse direction - Only minimum steel required.

```
810 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        30.46 /  102       0.355         22.44 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
811 TOP : Longitudinal direction - Only minimum steel required.
811 BOTT: Longitudinal direction - Only minimum steel required.
811 TOP : Transverse direction   - Only minimum steel required.
811 BOTT: Transverse direction   - Only minimum steel required.
811 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        15.41 /  102       0.355         11.80 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
812 TOP : Longitudinal direction - Only minimum steel required.
812 BOTT: Longitudinal direction - Only minimum steel required.
812 TOP : Transverse direction   - Only minimum steel required.
812 BOTT: Transverse direction   - Only minimum steel required.
812 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.60 /  102       0.355         11.74 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
813 TOP : Longitudinal direction - Only minimum steel required.
813 BOTT: Longitudinal direction - Only minimum steel required.
813 TOP : Transverse direction   - Only minimum steel required.
813 BOTT: Transverse direction   - Only minimum steel required.
813 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        28.51 /  102       0.355         22.46 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
814 TOP : Longitudinal direction - Only minimum steel required.
814 BOTT: Longitudinal direction - Only minimum steel required.
814 TOP : Transverse direction   - Only minimum steel required.
814 BOTT: Transverse direction   - Only minimum steel required.
814 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        33.84 /  102       0.355         29.93 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
815 TOP : Longitudinal direction - Only minimum steel required.
815 BOTT: Longitudinal direction - Only minimum steel required.
815 TOP : Transverse direction   - Only minimum steel required.
815 BOTT: Transverse direction   - Only minimum steel required.
815 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        34.73 /  102       0.355         34.48 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
816 TOP : Longitudinal direction - Only minimum steel required.
816 BOTT: Longitudinal direction - Only minimum steel required.
816 TOP : Transverse direction   - Only minimum steel required.
816 BOTT: Transverse direction   - Only minimum steel required.
```

816 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 34.42 / 102 0.355 36.62 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
817 TOP : Longitudinal direction - Only minimum steel required.
817 BOTT: Longitudinal direction - Only minimum steel required.
817 TOP : Transverse direction - Only minimum steel required.
817 BOTT: Transverse direction - Only minimum steel required.
817 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 34.42 / 102 0.355 36.62 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
818 TOP : Longitudinal direction - Only minimum steel required.
818 BOTT: Longitudinal direction - Only minimum steel required.
818 TOP : Transverse direction - Only minimum steel required.
818 BOTT: Transverse direction - Only minimum steel required.
818 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 34.73 / 102 0.355 34.48 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
819 TOP : Longitudinal direction - Only minimum steel required.
819 BOTT: Longitudinal direction - Only minimum steel required.
819 TOP : Transverse direction - Only minimum steel required.
819 BOTT: Transverse direction - Only minimum steel required.
819 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 33.84 / 102 0.355 29.93 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
820 TOP : Longitudinal direction - Only minimum steel required.
820 BOTT: Longitudinal direction - Only minimum steel required.
820 TOP : Transverse direction - Only minimum steel required.
820 BOTT: Transverse direction - Only minimum steel required.
820 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 28.51 / 102 0.355 22.46 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
821 TOP : Longitudinal direction - Only minimum steel required.
821 BOTT: Longitudinal direction - Only minimum steel required.
821 TOP : Transverse direction - Only minimum steel required.
821 BOTT: Transverse direction - Only minimum steel required.
821 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 13.60 / 102 0.355 11.74 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
822 TOP : Longitudinal direction - Only minimum steel required.
822 BOTT: Longitudinal direction - Only minimum steel required.
822 TOP : Transverse direction - Only minimum steel required.
822 BOTT: Transverse direction - Only minimum steel required.

822 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 10.12 / 102 0.355 11.24 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
823 TOP : Longitudinal direction - Only minimum steel required.
823 BOTT: Longitudinal direction - Only minimum steel required.
823 TOP : Transverse direction - Only minimum steel required.
823 BOTT: Transverse direction - Only minimum steel required.
823 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 24.54 / 102 0.355 21.69 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
824 TOP : Longitudinal direction - Only minimum steel required.
824 BOTT: Longitudinal direction - Only minimum steel required.
824 TOP : Transverse direction - Only minimum steel required.
824 BOTT: Transverse direction - Only minimum steel required.
824 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 29.34 / 102 0.355 29.07 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
825 TOP : Longitudinal direction - Only minimum steel required.
825 BOTT: Longitudinal direction - Only minimum steel required.
825 TOP : Transverse direction - Only minimum steel required.
825 BOTT: Transverse direction - Only minimum steel required.
825 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 30.11 / 102 0.355 33.53 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
826 TOP : Longitudinal direction - Only minimum steel required.
826 BOTT: Longitudinal direction - Only minimum steel required.
826 TOP : Transverse direction - Only minimum steel required.
826 BOTT: Transverse direction - Only minimum steel required.
826 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 29.86 / 102 0.355 35.61 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
827 TOP : Longitudinal direction - Only minimum steel required.
827 BOTT: Longitudinal direction - Only minimum steel required.
827 TOP : Transverse direction - Only minimum steel required.
827 BOTT: Transverse direction - Only minimum steel required.
827 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 29.86 / 102 0.355 35.61 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
828 TOP : Longitudinal direction - Only minimum steel required.
828 BOTT: Longitudinal direction - Only minimum steel required.
828 TOP : Transverse direction - Only minimum steel required.
828 BOTT: Transverse direction - Only minimum steel required.

828 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 30.11 / 102 0.355 33.53 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
829 TOP : Longitudinal direction - Only minimum steel required.
829 BOTT: Longitudinal direction - Only minimum steel required.
829 TOP : Transverse direction - Only minimum steel required.
829 BOTT: Transverse direction - Only minimum steel required.
829 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 29.34 / 102 0.355 29.07 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
830 TOP : Longitudinal direction - Only minimum steel required.
830 BOTT: Longitudinal direction - Only minimum steel required.
830 TOP : Transverse direction - Only minimum steel required.
830 BOTT: Transverse direction - Only minimum steel required.
830 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 24.54 / 102 0.355 21.69 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
831 TOP : Longitudinal direction - Only minimum steel required.
831 BOTT: Longitudinal direction - Only minimum steel required.
831 TOP : Transverse direction - Only minimum steel required.
831 BOTT: Transverse direction - Only minimum steel required.
831 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 10.12 / 102 0.355 11.24 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
842 TOP : Longitudinal direction - Only minimum steel required.
842 BOTT: Longitudinal direction - Only minimum steel required.
842 TOP : Transverse direction - Only minimum steel required.
842 BOTT: Transverse direction - Only minimum steel required.
842 TOP : 0.355 0.18 / 103 0.355 0.00 / 103
BOTT: 0.355 5.79 / 102 0.355 9.34 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
843 TOP : Longitudinal direction - Only minimum steel required.
843 BOTT: Longitudinal direction - Only minimum steel required.
843 TOP : Transverse direction - Only minimum steel required.
843 BOTT: Transverse direction - Only minimum steel required.
843 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 18.31 / 102 0.355 18.03 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
844 TOP : Longitudinal direction - Only minimum steel required.
844 BOTT: Longitudinal direction - Only minimum steel required.
844 TOP : Transverse direction - Only minimum steel required.
844 BOTT: Transverse direction - Only minimum steel required.

```
844 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.01 /  102       0.355         24.38 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
845 TOP : Longitudinal direction - Only minimum steel required.
845 BOTT: Longitudinal direction - Only minimum steel required.
845 TOP : Transverse direction   - Only minimum steel required.
845 BOTT: Transverse direction   - Only minimum steel required.
845 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.60 /  102       0.355         28.31 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
846 TOP : Longitudinal direction - Only minimum steel required.
846 BOTT: Longitudinal direction - Only minimum steel required.
846 TOP : Transverse direction   - Only minimum steel required.
846 BOTT: Transverse direction   - Only minimum steel required.
846 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.46 /  102       0.355         30.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
847 TOP : Longitudinal direction - Only minimum steel required.
847 BOTT: Longitudinal direction - Only minimum steel required.
847 TOP : Transverse direction   - Only minimum steel required.
847 BOTT: Transverse direction   - Only minimum steel required.
847 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.46 /  102       0.355         30.21 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
848 TOP : Longitudinal direction - Only minimum steel required.
848 BOTT: Longitudinal direction - Only minimum steel required.
848 TOP : Transverse direction   - Only minimum steel required.
848 BOTT: Transverse direction   - Only minimum steel required.
848 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.60 /  102       0.355         28.31 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
849 TOP : Longitudinal direction - Only minimum steel required.
849 BOTT: Longitudinal direction - Only minimum steel required.
849 TOP : Transverse direction   - Only minimum steel required.
849 BOTT: Transverse direction   - Only minimum steel required.
849 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        22.01 /  102       0.355         24.38 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
850 TOP : Longitudinal direction - Only minimum steel required.
850 BOTT: Longitudinal direction - Only minimum steel required.
850 TOP : Transverse direction   - Only minimum steel required.
850 BOTT: Transverse direction   - Only minimum steel required.
```

```
850 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        18.31 /  102       0.355         18.03 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
851 TOP : Longitudinal direction - Only minimum steel required.
851 BOTT: Longitudinal direction - Only minimum steel required.
851 TOP : Transverse direction   - Only minimum steel required.
851 BOTT: Transverse direction   - Only minimum steel required.
851 TOP :     0.355         0.18 /  103       0.355          0.00 /  103
    BOTT:     0.355         5.79 /  102       0.355          9.34 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
852 TOP : Longitudinal direction - Only minimum steel required.
852 BOTT: Longitudinal direction - Only minimum steel required.
852 TOP : Transverse direction   - Only minimum steel required.
852 BOTT: Transverse direction   - Only minimum steel required.
852 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355         3.67 /  102       0.355          5.93 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
853 TOP : Longitudinal direction - Only minimum steel required.
853 BOTT: Longitudinal direction - Only minimum steel required.
853 TOP : Transverse direction   - Only minimum steel required.
853 BOTT: Transverse direction   - Only minimum steel required.
853 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        11.41 /  102       0.355         10.13 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
854 TOP : Longitudinal direction - Only minimum steel required.
854 BOTT: Longitudinal direction - Only minimum steel required.
854 TOP : Transverse direction   - Only minimum steel required.
854 BOTT: Transverse direction   - Only minimum steel required.
854 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.39 /  102       0.355         14.63 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
855 TOP : Longitudinal direction - Only minimum steel required.
855 BOTT: Longitudinal direction - Only minimum steel required.
855 TOP : Transverse direction   - Only minimum steel required.
855 BOTT: Transverse direction   - Only minimum steel required.
855 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.74 /  102       0.355         17.95 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
856 TOP : Longitudinal direction - Only minimum steel required.
856 BOTT: Longitudinal direction - Only minimum steel required.
856 TOP : Transverse direction   - Only minimum steel required.
856 BOTT: Transverse direction   - Only minimum steel required.
```

```
856 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.69 /  102       0.355         19.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
857 TOP : Longitudinal direction - Only minimum steel required.
857 BOTT: Longitudinal direction - Only minimum steel required.
857 TOP : Transverse direction   - Only minimum steel required.
857 BOTT: Transverse direction   - Only minimum steel required.
857 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.69 /  102       0.355         19.67 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
858 TOP : Longitudinal direction - Only minimum steel required.
858 BOTT: Longitudinal direction - Only minimum steel required.
858 TOP : Transverse direction   - Only minimum steel required.
858 BOTT: Transverse direction   - Only minimum steel required.
858 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.74 /  102       0.355         17.95 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
859 TOP : Longitudinal direction - Only minimum steel required.
859 BOTT: Longitudinal direction - Only minimum steel required.
859 TOP : Transverse direction   - Only minimum steel required.
859 BOTT: Transverse direction   - Only minimum steel required.
859 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        13.39 /  102       0.355         14.63 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
860 TOP : Longitudinal direction - Only minimum steel required.
860 BOTT: Longitudinal direction - Only minimum steel required.
860 TOP : Transverse direction   - Only minimum steel required.
860 BOTT: Transverse direction   - Only minimum steel required.
860 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355        11.41 /  102       0.355         10.13 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
861 TOP : Longitudinal direction - Only minimum steel required.
861 BOTT: Longitudinal direction - Only minimum steel required.
861 TOP : Transverse direction   - Only minimum steel required.
861 BOTT: Transverse direction   - Only minimum steel required.
861 TOP :     0.355         0.00 /  103       0.355          0.00 /  103
    BOTT:     0.355         3.67 /  102       0.355          5.93 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
862 TOP : Longitudinal direction - Only minimum steel required.
862 BOTT: Longitudinal direction - Only minimum steel required.
862 TOP : Transverse direction   - Only minimum steel required.
862 BOTT: Transverse direction   - Only minimum steel required.
```

862 TOP : 0.355 0.47 / 103 0.355 7.32 / 103
BOTT: 0.355 1.25 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
863 TOP : Longitudinal direction - Only minimum steel required.
863 BOTT: Longitudinal direction - Only minimum steel required.
863 TOP : Transverse direction - Only minimum steel required.
863 BOTT: Transverse direction - Only minimum steel required.
863 TOP : 0.355 0.00 / 103 0.355 11.47 / 103
BOTT: 0.355 4.87 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
864 TOP : Longitudinal direction - Only minimum steel required.
864 BOTT: Longitudinal direction - Only minimum steel required.
864 TOP : Transverse direction - Only minimum steel required.
864 BOTT: Transverse direction - Only minimum steel required.
864 TOP : 0.355 0.00 / 103 0.355 13.66 / 103
BOTT: 0.355 5.90 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
865 TOP : Longitudinal direction - Only minimum steel required.
865 BOTT: Longitudinal direction - Only minimum steel required.
865 TOP : Transverse direction - Only minimum steel required.
865 BOTT: Transverse direction - Only minimum steel required.
865 TOP : 0.355 0.00 / 103 0.355 14.60 / 103
BOTT: 0.355 6.18 / 102 0.355 0.32 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
866 TOP : Longitudinal direction - Only minimum steel required.
866 BOTT: Longitudinal direction - Only minimum steel required.
866 TOP : Transverse direction - Only minimum steel required.
866 BOTT: Transverse direction - Only minimum steel required.
866 TOP : 0.355 0.00 / 103 0.355 14.92 / 103
BOTT: 0.355 6.24 / 102 0.355 2.11 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
867 TOP : Longitudinal direction - Only minimum steel required.
867 BOTT: Longitudinal direction - Only minimum steel required.
867 TOP : Transverse direction - Only minimum steel required.
867 BOTT: Transverse direction - Only minimum steel required.
867 TOP : 0.355 0.00 / 103 0.355 14.92 / 103
BOTT: 0.355 6.24 / 102 0.355 2.11 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
868 TOP : Longitudinal direction - Only minimum steel required.
868 BOTT: Longitudinal direction - Only minimum steel required.
868 TOP : Transverse direction - Only minimum steel required.
868 BOTT: Transverse direction - Only minimum steel required.

868 TOP : 0.355 0.00 / 103 0.355 14.60 / 103
BOTT: 0.355 6.18 / 102 0.355 0.32 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
869 TOP : Longitudinal direction - Only minimum steel required.
869 BOTT: Longitudinal direction - Only minimum steel required.
869 TOP : Transverse direction - Only minimum steel required.
869 BOTT: Transverse direction - Only minimum steel required.
869 TOP : 0.355 0.00 / 103 0.355 13.66 / 103
BOTT: 0.355 5.90 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
870 TOP : Longitudinal direction - Only minimum steel required.
870 BOTT: Longitudinal direction - Only minimum steel required.
870 TOP : Transverse direction - Only minimum steel required.
870 BOTT: Transverse direction - Only minimum steel required.
870 TOP : 0.355 0.00 / 103 0.355 11.47 / 103
BOTT: 0.355 4.87 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
871 TOP : Longitudinal direction - Only minimum steel required.
871 BOTT: Longitudinal direction - Only minimum steel required.
871 TOP : Transverse direction - Only minimum steel required.
871 BOTT: Transverse direction - Only minimum steel required.
871 TOP : 0.355 0.47 / 103 0.355 7.32 / 103
BOTT: 0.355 1.25 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
872 TOP : Longitudinal direction - Only minimum steel required.
872 BOTT: Longitudinal direction - Only minimum steel required.
872 TOP : Transverse direction - Only minimum steel required.
872 BOTT: Transverse direction - Only minimum steel required.
872 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 30.60 / 102 0.355 3.77 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
873 TOP : Longitudinal direction - Only minimum steel required.
873 BOTT: Longitudinal direction - Only minimum steel required.
873 TOP : Transverse direction - Only minimum steel required.
873 BOTT: Transverse direction - Only minimum steel required.
873 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.355 45.70 / 102 0.355 6.58 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
874 TOP : Longitudinal direction - Only minimum steel required.
874 TOP : Transverse direction - Only minimum steel required.
874 BOTT: Transverse direction - Only minimum steel required.
874 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.440 56.58 / 102 0.355 8.37 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
875 TOP : Longitudinal direction - Only minimum steel required.
875 TOP : Transverse direction - Only minimum steel required.
875 BOTT: Transverse direction - Only minimum steel required.
875 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.513 66.00 / 102 0.355 9.51 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
876 TOP : Longitudinal direction - Only minimum steel required.
876 TOP : Transverse direction - Only minimum steel required.
876 BOTT: Transverse direction - Only minimum steel required.
876 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.565 72.49 / 102 0.355 9.87 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
877 TOP : Longitudinal direction - Only minimum steel required.
877 TOP : Transverse direction - Only minimum steel required.
877 BOTT: Transverse direction - Only minimum steel required.
877 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.584 74.95 / 102 0.355 9.29 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
878 TOP : Longitudinal direction - Only minimum steel required.
878 TOP : Transverse direction - Only minimum steel required.
878 BOTT: Transverse direction - Only minimum steel required.
878 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.560 71.88 / 102 0.355 7.49 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
879 TOP : Longitudinal direction - Only minimum steel required.
879 TOP : Transverse direction - Only minimum steel required.
879 BOTT: Transverse direction - Only minimum steel required.
879 TOP : 0.355 0.00 / 103 0.355 0.00 / 103
BOTT: 0.479 61.67 / 102 0.355 4.11 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
880 TOP : Longitudinal direction - Only minimum steel required.
880 BOTT: Longitudinal direction - Only minimum steel required.
880 TOP : Transverse direction - Only minimum steel required.
880 BOTT: Transverse direction - Only minimum steel required.
880 TOP : 0.355 0.00 / 103 0.355 1.81 / 103
BOTT: 0.355 42.14 / 102 0.355 0.00 / 102

FY: 419.997 MPA FC: 35.000 MPA COVER (TOP): 50.000 MM
COVER (BOTTOM): 50.000 MM TH: 400.000 MM
881 TOP : Longitudinal direction - Only minimum steel required.
881 BOTT: Longitudinal direction - Only minimum steel required.
881 TOP : Transverse direction - Only minimum steel required.
881 BOTT: Transverse direction - Only minimum steel required.

```
881 TOP :     0.355         0.00 /  103       0.355          4.82 /  102
    BOTT:     0.355        14.39 /  102       0.355          0.00 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
882 TOP : Longitudinal direction - Only minimum steel required.
882 BOTT: Longitudinal direction - Only minimum steel required.
882 TOP : Transverse direction   - Only minimum steel required.
882 BOTT: Transverse direction   - Only minimum steel required.
882 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        30.60 /  102       0.355          3.77 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
883 TOP : Longitudinal direction - Only minimum steel required.
883 BOTT: Longitudinal direction - Only minimum steel required.
883 TOP : Transverse direction   - Only minimum steel required.
883 BOTT: Transverse direction   - Only minimum steel required.
883 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.355        45.70 /  102       0.355          6.58 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
884 TOP : Longitudinal direction - Only minimum steel required.
884 TOP : Transverse direction   - Only minimum steel required.
884 BOTT: Transverse direction   - Only minimum steel required.
884 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.440        56.58 /  102       0.355          8.37 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
885 TOP : Longitudinal direction - Only minimum steel required.
885 TOP : Transverse direction   - Only minimum steel required.
885 BOTT: Transverse direction   - Only minimum steel required.
885 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.513        66.00 /  102       0.355          9.51 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
886 TOP : Longitudinal direction - Only minimum steel required.
886 TOP : Transverse direction   - Only minimum steel required.
886 BOTT: Transverse direction   - Only minimum steel required.
886 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.565        72.49 /  102       0.355          9.87 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
887 TOP : Longitudinal direction - Only minimum steel required.
887 TOP : Transverse direction   - Only minimum steel required.
887 BOTT: Transverse direction   - Only minimum steel required.
887 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
    BOTT:     0.584        74.95 /  102       0.355          9.29 /  102

    FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
    COVER (BOTTOM):    50.000 MM TH:   400.000 MM
888 TOP : Longitudinal direction - Only minimum steel required.
```

```
 888 TOP : Transverse direction   - Only minimum steel required.
 888 BOTT: Transverse direction   - Only minimum steel required.
 888 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
     BOTT:     0.560        71.88 /  102       0.355          7.49 /  102

     FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
     COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 889 TOP : Longitudinal direction - Only minimum steel required.
 889 TOP : Transverse direction   - Only minimum steel required.
 889 BOTT: Transverse direction   - Only minimum steel required.
 889 TOP :     0.355         0.00 /  103       0.355          0.00 /  102
     BOTT:     0.479        61.67 /  102       0.355          4.11 /  102

     FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
     COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 890 TOP : Longitudinal direction - Only minimum steel required.
 890 BOTT: Longitudinal direction - Only minimum steel required.
 890 TOP : Transverse direction   - Only minimum steel required.
 890 BOTT: Transverse direction   - Only minimum steel required.
 890 TOP :     0.355         0.00 /  103       0.355          1.81 /  103
     BOTT:     0.355        42.14 /  102       0.355          0.00 /  102

     FY:   419.997 MPA FC:    35.000 MPA COVER (TOP):    50.000 MM
     COVER (BOTTOM):    50.000 MM TH:   400.000 MM
 891 TOP : Longitudinal direction - Only minimum steel required.
 891 BOTT: Longitudinal direction - Only minimum steel required.
 891 TOP : Transverse direction   - Only minimum steel required.
 891 BOTT: Transverse direction   - Only minimum steel required.
 891 TOP :     0.355         0.00 /  103       0.355          4.82 /  102
     BOTT:     0.355        14.39 /  102       0.355          0.00 /  102


 **************************END OF ELEMENT DESIGN**************************

1364. END CONCRETE DESIGN
1365. FINISH


           *********** END OF THE STAAD.Pro RUN ***********

             **** DATE= OCT  8,2020   TIME= 11:13:34 ****
```

```
************************************************************
*   For technical assistance on STAAD.Pro, please visit    *
*   http://selectservices.bentley.com/en-US/               *
*                                                          *
*   Details about additional assistance from               *
*   Bentley and Partners can be found at program menu      *
*   Help->Technical Support                                *
*                                                          *
*      Copyright (c) 1997-2016 Bentley Systems, Inc.       *
*                http://www.bentley.com                    *
************************************************************
```