MA'ADEN معادن
Saudi Arabian Mining Company شركة التعدين العربية السعودية

Outotec
LARSEN & TOUBRO

Project: **Mansourah Massarah Gold Project**

Customer: **MA'ADEN GOLD AND BASE METALS (MA'ADEN)**

Title: **CALCULATION**

3360 CONCENTRATE STORAGE & REPULP

DESIGN CALCULATION

AS BUILT

MD-216-3360-EG-CV-CAL-1231

Rev	Date	Revision Text	Prepared By	Reviewed By	Approved By	Employer
D01	17-11-2023	AS BUILT	SHD	SGC	PRI	
C01	30-04-2020	ISSUED FOR CONSTRUCTION	SHD	SGC	PRI	
A02	03-04-2020	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	SHD	SGC	PRI	
A01	20-01-2020	FIRST ISSUE	SHD	SGC	PRI	

PROPRIETARY & CONFIDENTIAL This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.

Ma'aden Document Number:

MD-216-3360-EG-CV-CAL-1231 D01

Outotec Document Number:

900707 GAU01 US02 CED01 33606 OU100666573 3

L&T Document Number:

O19045 450 C K 24100 001 3

PROPRIETARY & CONFIDENTIAL : The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

PROPRIETARY & CONFIDENTIAL : This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REFERENCE DOCUMENTS

DOCUMENT NUMBER	DOCUMENT DESCRIPTION
MD-216-1000-EG-ST-CRT-1001	Civil Structural Design Criteria
MD-216-3000-EG-CV-RPT-1008	Geotechnical Report
SBC 301 :2007	Saudi Structural - Loading & Forces Code
SBC 304 :2018	Saudi Concrete Structures Code
ACI 318 :2014	Building Code Requirement of Structural Concrete

TABLE OF CONTENTS

		PAGE NO
DEFINITIONS and ABBREVIATIONS		3
1	INTENT	4
2	SCOPE	4
3	Design of Retaining Wall Mkd. RW-1 for Concentrate Storage Building	5
4	Design of Retaining Wall Mkd. RW-2 & RW-3 for Concentrate Storage Building	10
5	Design of Tripper Conveyor Supporting Frame	15
5.1	Geometry of Structure with Section Profiles	15
5.2	Load Calculation	16
5.3	Beam & Column Reinforcement Details	17
5.4	Design of One Way Slab on Tripper Conveyor Supporting Floor	18
5.5	Design of Column Foundations of Tripper Frame mkd. TF1	19
6	Design of Concentrate Storage Building Foundation	23
6.1	Design of Foundation mkd. F1	23
6.2	Design of Foundation mkd. F2	27
6.3	Design of Foundation mkd. F3	31
6.4	Design of Foundation mkd. F4	35
6.5	Design of Foundation mkd. F5	39
6.6	Design of Foundation mkd. F6	43
6.7	Design of Foundation mkd. F7	47
REFERENCES		51
ATTACHMENT 1	STAAD Input & Output File of Retaining Wall RW-1	52
ATTACHMENT 2	STAAD Input & Output File of Retaining Wall RW-2	62
ATTACHMENT 3	STAAD Input & Output File of Retaining Wall RW-3	71
ATTACHMENT 4	STAAD Input File of Tripper Conveyor Supporting Frame	79
ATTACHMENT 5	STAAD Output File of Tripper Conveyor Supporting Frame	87
ATTACHMENT 6	STAAD Input & Output File of Foundation Mkd. TF1	312
ATTACHMENT 7	STAAD Input & Output File of Foundation Mkd. F1	382
ATTACHMENT 8	STAAD Input & Output File of Foundation Mkd. F2	475
ATTACHMENT 9	STAAD Input & Output File of Foundation Mkd. F3	539
ATTACHMENT 10	STAAD Input & Output File of Foundation Mkd. F4	604
ATTACHMENT 11	STAAD Input & Output File of Foundation Mkd. F5	649
ATTACHMENT 12	STAAD Input & Output File of Foundation Mkd. F7	714
ATTACHMENT 13	STAAD Output File of Concentrate Storage Building	748
ATTACHMENT 14	Load Data Drawing of Tripper Conveyor	918
ATTACHMENT 15	STAAD Input & Output File of Foundation Mkd. F6	920

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DEFINITIONS AND ABBREVIATIONS

Employer	MA'ADEN GOLD AND BASE METALS or their representatives
EPC Contractor	Consortium of Outotec (OT) and Larsen & Toubro (L&T)
Project management Company (PMC)	BECHTEL appointed by EMPLOYER
Supplier	An entity (supplier, consultant, contractor) under the direct project management of EPC Contractor
Sub- supplier	A sub entity (supplier, consultant, contractor) under the direct project management of EPC Contractor
Shall	Is to be understood as mandatory in relation to the requirements of this Document
Should	Is to be understood as a strong recommendation to comply with the requirements of this Document
LRFD	Load and Resistance Factor Design
F.O.S	Factor of Safety

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

1. INTENT

The document is prepared for Design Calculation of Retaining wall, Tripper Conveyor Supporting Frame & Column Foundation for Concentrate Storage Building.
Reinforced Concrete Frame is designed to suppport the tripper Conveyor inside steel Storage Building .Tripper Conveyor is used to convey & subsequent storage of concentrate cake from Filter Press of Filtration Building. Retaining Walls are provided to support the Concentrtate cake storage upto a height of 6m from FFL inside the building.

2. SCOPE

This document is prepared for design of Concrete Floor supporting Tripper Conveyor at TOC EL (+)5.8m, Retaining Wall enclosing Storage & Building Column foundations.
Due to irregularity of structure, Tripper supporting arrangement, space constraint and flexibility in the storage facility, Retaining wall & structure supporting columns are designed individually. Since the Tripper conveyor is very heavily loaded it was decided to support on a separate framed structure and not from the walls. Moreover, the walls & Columns will behave in different way so they are designed individually.
Tripper Conveyor supporting Reinforced Concrete Frame, Retaining Walls & all the Foundations are modelled in & analysed in Staad-Pro.
All the loads applied to the structure for analysis & design followed Civil -Structural Design Criteria and SBC 301:2007
Design of Reinforced Concrete members along with Foundations & Retaining Wall followed Strength Design as per SBC 304:2018 & ACI 318:2008 (as supported by STAAD-Pro).

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3. Design of Retaining Wall mkd. RW-1 for Concentrate Storage Building

Retaining Wall of 1m Width & 6m high is modelled in Staad-Pro with relevant loads. RW-1 supports material storage upto a height of 6m from FFL. Foundation Base of RW-1 is at 1.5m below FGL. Material desnsity is 1.6T/m3. Supports are provided as plate mat with Modulus of subgrade reaction as 5400 T/m^2/m as per Geotechnical Report of BH-07

Load Calculation :

a) Dead Load (DL):

i) Self-Weight of Retaining Wall including Base Raft

ii) Wall Pressure due to material storage from FFL upto 6m height (applied as triangular distribution on wall in Staad)

Since the material stored is like soil,

Angle of internal friction, ϕ considered = 30^0 ;	k = (1-sinϕ)/(1+sinϕ) =	0.33	
Active pressure coefficient, k considered =		0.5	
Self weight of Material Storage =	1.6* 6 =	9.6	T/m^2
Storage height considered from latest Tekla Model			
Pressure on Heel Slab at wall base = (excl. raft weight)	3 * 1.6 + 0.5*2 + 1*1.8 =	7.6	T/m^2
Pressure on Heel Slab at cantilever edge =	0.5 *2+1*1.8 =	2.8	T/m^2
Pressure on Toe Slab=		2.8	T/m^2

b) Horizontal Load due to material storage (H):

Lateral Wall Pressure at FFL =	0.5 * 9.6 =	4.8	T/m^2
Height of FFL above FGL =		0.5	m
Lateral Wall Pressure at FGL =	4.8+0.5*0.5*2 =	5.3	T/m^2
Lateral Wall Pressure at wall base =	(9.6+0.5*2+1*1.8)*0.33 =	4.09	T/m^2

c) Seismic Load (EL):

Self Weight of Wall (from FFL) =	(0.4* 5 + 0.6*1) *2.5 =	6.5	T/m
Average Height of material =		4.5	m
Width of Material Base =		3	m
Material & slab Weight above FFL=	4.5*1.6 *3 +4*0.6*2.5 =	27.6	T/m
Weight of soil above slab =	1 * 1.8 * 4 =	7.2	T/m
Total Seismic Weight, W =	6.5 + 27.6+7.2 =	41.3	T/m

Seismic Parameters :

Seismic Design Category =			B	
Site Class =			B	
Seismic Coeffecient, Ss =			0.1	g
S_1 =			0.02	g
Occupancy importance factor, I =			1	
Response modification factor, R =			3	
Height of the Wall, h =			6	m
For Moment resisting steel frames,				
Time Period, T =			0.221	sec
Factors, Fa =			1	
Fv =			1	
Maximum spectral acceleration, S_{MS} =	Fa * Ss =		0.1	g
Maximum spectral acceleration, S_{M1} =	Fa * S_1 =		0.02	g
Design spectral acceleration, S_{DS} =		2/3 * S_{MS} =	0.067	g
Design spectral acceleration, S_{D1} =		2/3 * S_{M1} =	0.013	g
Seismic Response co-eff, Cs =		S_{DS} * I /R =	0.023	g
	Max. value of C_S = S_{D1}*I /(T * R) =		0.021	g
	Min. value of C_S = 0.044 * S_{DS} * I =		0.003	g
Seismic base Shear, V =	Cs * W =	0.021*41.3 =	0.87	T/m

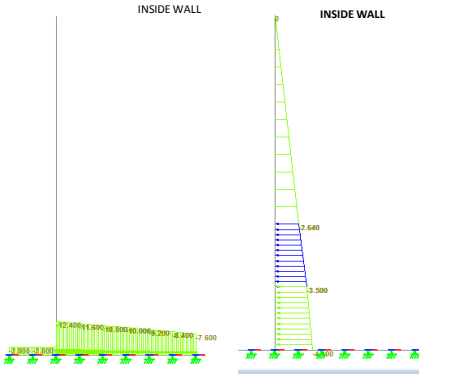

DEAD LOAD (loads are in T/m)

HORIZONTAL STORAGE LOAD (loads are in T/m)

(From Civil-Structural Design Criteria)

(From Table 9.5, SBC 301:2007)
(From Table 10.2, SBC 301:2007)

(eqn. 10.9.3.2-1, SBC 301:2007)
(From Table 9.4.3a, SBC 301:2007)
(From Table 9.4.3b, SBC 301:2007)
(eqn. 9.4.3-1, SBC 301:2007)
(eqn. 9.4.3-2, SBC 301:2007)
(eqn. 9.4.4-1, SBC 301:2007)
(eqn. 9.4.4-2, SBC 301:2007)
(eqn. 10.9.2.1-1, SBC 301:2007)
(eqn. 10.9.2.1-2, SBC 301:2007)
(eqn. 10.9.2.1-3, SBC 301:2007)
(eqn. 10.9.2-1, SBC 301:2007)
(Applied at c. g. of Material storage)

Retaining wall has been designed for the following Load Combinations: (Table 5.3.1, SBC 304:2018) and ACI 318 : 2014

LOAD COMB 20 1.2*DL + 1.6*H
LOAD COMB 21 1.2DL+1.0EL
LOAD COMB 22 0.9DL+1.0EL + 1.6*H

Retaining wall has been designed for the following Bending Moment & Shear Force for LC- 0.9DL+1.0EL + 1.6*H (Most Critical):

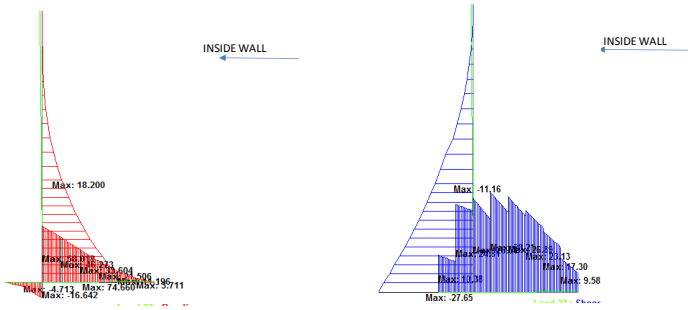

(loads are in T-m)

BENDING MOMENT DIAGRAM

SHEAR FORCE DIAGRAM

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Stability Check for Retaining Wall mkd. RW-1

Lateral Wall Pressure at FFL =	0.33 * 9.6 =	3.2	T/m2
Width of Heel Slab from Center of Wall =		3	m
Total Horizontal Load with seismic =	0.5* 3.2 * 6 + 0.87=	10.47	T/m
Overturning Moment =	10.47 * (0.33* 6 + 2)	41.7	T-m
Retaining Wall Sections :			
Average Thickness of Wall =		500	mm
Thickness of Raft =		600	mm
Self weight of Retaining Wall =		15.25	T/m
Restoring Forces :	(Passive Earth Pressure not considered for simplicity)		
i) Weight of Stored Material =	1/2*3*3*1.6+3*3*1.6 =	21.6	T/m
ii) Weight of Soil below FFL =	(2-600/1000)*3*2 =	8.4	T/m
iii) Self Weight of Wall =	15.25*1=	15.25	T/m
Total Weight =		45.25	T/m
Coeffecient of Friction between Concrete & Soil, μ =		0.4	
Restoring Horizontal Force =	0.4*45.25 =	18.1	T/m
Restoring Moment due to Soil =	8.4 * (3/2 +1)=	21	T-m/m
Moment due to Material =	1/2*3*3*1.6*2 +3*3*1.6*2.5 =	50.33	T-m/m
Total Restoring Moment =		86.578	T-m/m
FOS against Overturning =	86.578/41.6706=	2.08	**> 1.5 - OK**
FOS against Sliding =	18.1/10.47 =	1.73	**> 1.5 - OK**

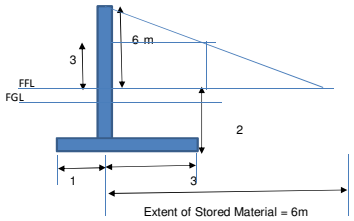

The Wall is Safe against Overturning & Sliding

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL TOP (RW-1):

Wall Thickness =	400	mm
Width =	1000	mm
Clear Cover =	50	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 2 T-m (ASSUMED)
Myd = 2 T-m

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 332 mm
Mu/bd^2 = 2X10^7/(1000X332^2) = 0.181 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X332/100 = 1.66 cm^2
Provided **12** mm @ **300** C/C (Provide Ast = 3.77 cm2) at Horizontal
Total Provide Ast = 3.77 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0011

ALONG Y - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 344 mm
Mu/bd^2 = 2X10^7/(1000X344^2) = 0.169 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004 Reqd. Ast = 0.0004X1000X344/100 = 1.38 cm^2
Provided **12** mm @ **300** C/C (Provide Ast = 3.77 cm2) at Vertical
Total Provide Ast = 3.77 cm2 at Vertical **O.K.**
Total Provide Pt = 0.0011
Minimum Reinforcement ratio for both faces = 0.0025 (Cl. No. 11.6, SBC 304 : 2018)

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 2 T-M (ASSUMED)
Myd = 18 T-M (Refer Staad Output at face of bottom wall) (LC -22 - 0.9DL+1.0EL + 1.6*H)

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 324 mm
Mu/bd^2 = 2X10^7/(1000X324^2) = 0.191 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X324/100 = 1.62 cm^2
Provided **12** mm @ **300** C/C (Provide Ast = 3.77 cm2) at Horizontal
Total Provide Ast = 3.77 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0012

ALONG Y - DIRECTION :

Mu = 18 T-m
Φ*Kn = Mu/bd^2 deff. = 340 mm
Mu/bd^2 = 18X10^7/(X340^2) = 1.557 N/mm^2 < 6.9 N/mm^2
Pt = 0.0042 Reqd. Ast = 0.0042XX340/100 = 14.28 cm^2
Provided **20** mm @ **150** C/C (Provide Ast = 20.94 cm2) at Vertical
Total Provide Ast = 20.94 cm2) at Vertical **O.K.**
Total Provide Pt = 0.0062

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 12 T (Refer Staad Output at face of bottom wall)(LC - 22)

Provided Pt = 0.0062
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0062X12X10^4X340/18/10^7)X1000X340/10^4
= 32.996 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0062)X1000X340/10^4
= 35.767 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X340/10^4
= 58.333 T
HENCE, Vc = 32.996 T
Φt*Vc = 0.75X32.996 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 24.747 T **> 12T , Hence O.K.**

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL BOTTOM :

Wall Thickness =	600	mm
Width =	1000	mm
Clear Cover =	50	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 5 T-m (ASSUMED)
Myd = 5 T-m

ALONG X - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 532 mm
Mu/bd^2 = 5X10^7/(1000X532^2) = 0.177 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X532/100 = 2.66 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Horizontal
Total Provide Ast = 7.54 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0014

ALONG Y - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 544 mm
Mu/bd^2 = 5X10^7/(1000X544^2) = 0.169 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004 Reqd. Ast = 0.0004X1000X544/100 = 2.18 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Vertical
Total Provide Ast = 7.54 cm2 at Vertical **O.K.**
Total Provide Pt = 0.0014

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 5 T-M (ASSUMED)
Myd = 60 T-M (Refer Staad Output at face of slab) (LC No. 22 - 0.9DL+1.0EL + 1.6*H)

ALONG X - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 519 mm
Mu/bd^2 = 5X10^7/(1000X519^2) = 0.186 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X519/100 = 2.6 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Horizontal
Total Provide Ast = 7.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0015

ALONG Y - DIRECTION :

Mu = 60 T-m
Φ*Kn = Mu/bd^2 deff. = 537.5 mm
Mu/bd^2 = 60X10^7/(X537.5^2) = 2.077 N/mm^2 < 6.9 N/mm^2
Pt = 0.0057 Reqd. Ast = 0.0057XX537.5/100 = 30.64 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Vertical

Total Provide Ast = 32.72 cm2) at Vertical **O.K.**
Total Provide Pt = 0.0061

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 22 T (Refer Staad Output at a distance d from face of slab)(LC - 22)

Provided Pt = 0.0061
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0061X22X10^4X537.5/60/10^7)X1000X537.5/10^4
= 51.977 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0061)X1000X537.5/10^4
= 56.452 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X537.5/10^4
= 92.217 T
HENCE, Vc = 51.977 T
Φt*Vc = 0.75X51.977 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 38.983 T **> 22T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL RAFT :

Slab Thickness =	600	mm
Width =	1000	mm
Clear Cover =	50	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 10 T-m (Refer Staad Output at face of wall)(LC NO. 22)
Myd = 5 T-m (ASSUMED)

ALONG X - DIRECTION :

Mu = 10 T-m
Φ*Kn = Mu/bd^2 deff. = 532 mm
Mu/bd^2 = 10X10^7/(1000X532^2) = 0.353 N/mm^2 < 6.9 N/mm^2
Pt = 0.0009 Reqd. Ast = 0.0009X1000X532/100 = 4.79 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Horizontal
Total Provide Ast = 7.54 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0014

ALONG Y - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 544 mm
Mu/bd^2 = 5X10^7/(1000X544^2) = 0.169 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004 Reqd. Ast = 0.0004X1000X544/100 = 2.18 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Horizontal
Total Provide Ast = 7.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0014
Minimum Reinforcement ratio for both faces = 0.0018 (Cl. No. Table 8.6.1.1, SBC 304 : 2018)

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 55 T-M (Refer Staad Output at face of wall)(LC NO. 22)
Myd = 5 T-M (ASSUMED)

ALONG X - DIRECTION :

Mu = 55 T-m
Φ*Kn = Mu/bd^2 deff. = 525.5 mm
Mu/bd^2 = 55X10^7/(1000X525.5^2) = 1.992 N/mm^2 < 6.9 N/mm^2
Pt = 0.0055 Reqd. Ast = 0.0055X1000X525.5/100 = 28.9 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal
Total Provide Ast = 32.72 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0062

ALONG Y - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 544 mm
Mu/bd^2 = 5X10^7/(X544^2) = 0.169 N/mm^2 < 6.9 N/mm^2
Pt = 0.0004 Reqd. Ast = 0.0004XX544/100 = 2.18 cm^2
Provided **12** mm @ **150** C/C (Provide Ast = 7.54 cm2) at Horizontal

Total Provide Ast = 7.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0014

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 25 T (Refer Staad Output at a distance d from face of wall)(LC - 22 - 0.9DL+1.0EL + 1.6*H)

Provided Pt = 0.0062
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0062X25X10^4X525.5/55/10^7)X1000X525.5/10^4
= 51.065 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0062)X1000X544/10^4
= 57.227 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X544/10^4
= 93.332 T
HENCE, Vc = 51.065 T
Φt*Vc = 0.75X51.065 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 38.299 T **> 25T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

4. Design of Retaining Wall mkd. RW-2 & RW-3 for Concentrate Storage Building

Retaining Wall of 1m Width & 5m high is modelled in Staad-Pro with relevant loads. RW-2 supports material storage upto a height of 3m from FFL. Foundation Base of RW-1 is at 1.5m below FGL. Material desnsity is 1.6T/m3. Supports are provided as plate mat with Modulus of subgrade reaction as 5400 T/m^2/m as per Geotechnical Report of BH-07

Load Calculation :

a) Dead Load (DL):

i) Self-Weight of Retaining Wall including Base Raft

ii) Wall Pressure due to material storage from FFL upto 3m height (applied as triangular distribution on wall in Staad)

Active pressure coefficient, k considered =		0.33
Self weight of Material Storage =	1.6* 3=	4.8 T/m^2
Pressure on Heel Slab at wall base = (excl. raft weight)	4.8 + 0.5*2 + 1*1.8 =	7.6 T/m^2
Pressure on Heel Slab at cantilever edge =	0.5 *2+1*1.8 =	2.8 T/m^2
Pressure on Toe Slab=		2.8 T/m^2

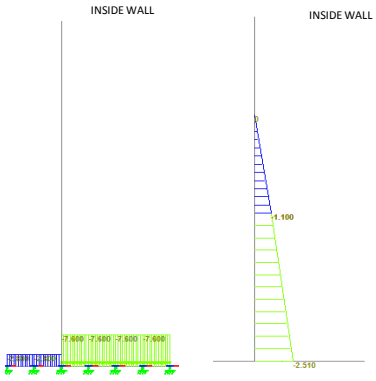

b) Horizontal Load due to material storage (H):

Lateral Wall Pressure at FFL =	0.33 * 4.8 =	1.6 T/m^2
Height of FFL above FGL =		0.5 m
Lateral Wall Pressure at FGL =	1.6+0.5*0.33*2 =	1.93 T/m^2
Lateral Wall Pressure at wall base =	(4.8+0.5*2+1*1.8)*0.33 =	2.51 T/m^2

c) Seismic Load (EL):

Self Weight of Wall (from FFL) =	(0.25* 4 + 0.4*1) *2.5 =	3.5 T/m
Average Height of material =		1.5 m
Width of Material Base =		2 m
Material & Slab Weight above FFL=	1.5*1.6 *2 + 0.4*3*2.5 =	7.8 T/m
Weight of soil above slab =	1 * 1.8 * 3 =	5.4 T/m
Total Seismic Weight, W =	3.5 +7.8 + 5.4 =	16.7 T/m

Seismic Parameters :

				DEAD LOAD / HORIZONTAL STORAGE LOAD (loads are in T/m)
Seismic Design Category =			B	
Site Class =			B	
Seismic Coeffecient, Ss =			0.1 g	(From Civil-Structural Design Criteria)
S_1 =			0.02 g	
Occupancy importance factor, I =			1	(From Table 9.5, SBC 301:2007)
Response modification factor, R =			3	(From Table 10.2, SBC 301:2007)
Height of the Wall, h =			5 m	
For Moment resisting steel frames,				
Time Period, T =			0.19 sec	(eqn. 10.9.3.2-1, SBC 301:2007)
Factors, Fa =			1	(From Table 9.4.3a, SBC 301:2007)
Fv =			1	(From Table 9.4.3b, SBC 301:2007)
Maximum spectral acceleration, S_{MS} =	Fa * Ss =		0.1 g	(eqn. 9.4.3-1, SBC 301:2007)
Maximum spectral acceleration, S_{M1} =	Fa * S_1 =		0.02 g	(eqn. 9.4.3-2, SBC 301:2007)
Design spectral acceleration, S_{DS} =		2/3 * S_{MS} =	0.067 g	(eqn. 9.4.4-1, SBC 301:2007)
Design spectral acceleration, S_{D1} =		2/3 * S_{M1} =	0.013 g	(eqn. 9.4.4-2, SBC 301:2007)
Seismic Response co-eff, Cs =		S_{DS} * I /R =	0.023 g	(eqn. 10.9.2.1-1, SBC 301:2007)
Max. value of C_S = S_{D1}*I /(T * R) =			0.024 g	(eqn. 10.9.2.1-2, SBC 301:2007)
Min. value of C_S = 0.044 * S_{DS} * I =			0.003 g	(eqn. 10.9.2.1-3, SBC 301:2007)
Seismic base Shear, V =	Cs * W =	0.023*16.7 =	0.38 T/m	(eqn. 10.9.2-1, SBC 301:2007)

Retaining wall has been designed for the following Load Combinations: (Table 5.3.1, SBC 304:2018) and ACI 318 : 2014

LOAD COMB 20 1.2*DL + 1.6*H

LOAD COMB 21 1.2DL+1.0EL

LOAD COMB 22 0.9DL+1.0EL + 1.6*H

Retaining wall has been designed for the following Bending Moment & Sher Force for LC- 0.9DL+1.0EL + 1.6*H (Most Critical) :

BENDING MOMENT DIAGRAM



SHEAR FORCE DIAGRAM



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Stability Check for Retaining Wall mkd. RW-2 & RW-3

	Lateral Wall Pressure at FFL =	0.33 * 4.8 =	1.6	T/m2
	Width of Heel Slab from Center of Wall =		2	m
	Total Horizontal Load including seismic =	0.5* 1.6 * 3+0.38=	2.78	T/m
	Overturning Moment =	2.78 * (0.33* 3 + 2)	8.3	T-m
	Retaining Wall Sections :			
	Average Thickness of Wall =		300	mm
	Thickness of Raft =		400	mm
	Self weight of Retaining Wall =		6.45	T/m
	Restoring Forces :	(Passive Earth Pressure not considered for simplicity)		
i)	Weight of Stored Material =	1/2*2*3*1.6 =	4.8	T/m
ii)	Weight of Soil below FFL =	(2-400/1000)*2*2 =	6.4	T/m
iii)	Self Weight of Wall =	6.45*1=	6.45	T/m
	Total Restoring Forces =		17.65	T/m
	Coeffecient of Friction between Concrete & Soil, μ =		0.4	
	Restoring Horizontal Force =	0.4*17.65 =	7.06	T/m
	Restoring Moment due to Soil =	6.4 * (2/2 +1)=	12.8	T-m/m
	Moment due to Material =	1/2*2*3*1.6*(2 *0.33 +1)=	7.97	T-m/m
	Total Restoring Moment =		27.22	T-m/m
	FOS against Overturning =	27.218/8.3122=	3.27	**> 1.5 - OK**
	FOS against Sliding =	7.06/2.78 =	2.54	**> 1.5 - OK**



The Wall is Safe against Overturning & Sliding

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL TOP (RW-2 & RW-3):

Wall Thickness =	250	mm
Width =	1000	mm
Clear Cover =	50	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 2 T-m (ASSUMED)
Myd = 2 T-m

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 179 mm
Mu/bd^2 = 2X10^7/(1000X179^2) = 0.624 N/mm^2 < 6.9 N/mm^2
Pt = 0.0017 Reqd. Ast = 0.0017X1000X179/100 = 3.04 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal
Total Provide Ast = 3.93 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0022

ALONG Y - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 192 mm
Mu/bd^2 = 2X10^7/(1000X192^2) = 0.543 N/mm^2 < 6.9 N/mm^2
Pt = 0.0015 Reqd. Ast = 0.0015X1000X192/100 = 2.88 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Vertical
Total Provide Ast = 10.05 cm2 at Vertical **O.K.**
Total Provide Pt = 0.0052

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 2 T-M (ASSUMED)
Myd = 5 T-M (Refer Staad Output at face of bottom wall)(RW-2) (LC - 22)

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd^2 deff. = 179 mm
Mu/bd^2 = 2X10^7/(1000X179^2) = 0.624 N/mm^2 < 6.9 N/mm^2
Pt = 0.0017 Reqd. Ast = 0.0017X1000X179/100 = 3.04 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal
Total Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0022

ALONG Y - DIRECTION :

Mu = 5 T-m
Φ*Kn = Mu/bd^2 deff. = 192 mm
Mu/bd^2 = 5X10^7/(X192^2) = 1.356 N/mm^2 < 6.9 N/mm^2
Pt = 0.0037 Reqd. Ast = 0.0037XX192/100 = 7.1 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Vertical

Total Provide Ast = 10.05 cm2) at Vertical **O.K.**
Total Provide Pt = 0.0052

Minimum Reinforcement ratio for both faces = 0.0025

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 2 T (Refer Staad Output at face of bottom wall- RW-2)(LC - 22)

Provided Pt = 0.0052
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0052X2X10^4X192/5/10^7)X1000X192/10^4
= 18.305 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0052)X1000X192/10^4
= 19.871 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X192/10^4
= 32.941 T
HENCE, Vc = 18.305 T
Φt*Vc = 0.75X18.305 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 13.729 T **> 2T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL BOTTOM :

Wall Thickness = 400 mm
Width = 1000 mm
Clear Cover = 50 mm
Compressive Strength of Concrete , fc' = 35 N/mm^2
Yield Strength of Main Reinforcement , fy = 420 N/mm^2
Yield Strength of Shear Reinforcement , fyt = 420 N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ = 0.9
Strength Reduction Factor of Shear Reinforcement , Φt = 0.75

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 2 T-m (ASSUMED)
Myd = 2 T-m

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd² deff. = 325 mm
Mu/bd² = 2X10^7/(1000X325^2) = 0.189 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X325/100 = 1.63 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal
Total Provide Ast = 3.93 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0012

ALONG Y - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd² deff. = 340 mm
Mu/bd² = 2X10^7/(1000X340^2) = 0.173 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X340/100 = 1.7 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Vertical
Total Provide Ast = 15.71 cm2 at Vertical **O.K.**
Total Provide Pt = 0.0046

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 2 T-M (ASSUMED)
Myd = 15 T-M (Refer Staad Output at face of slab)(RW-2)(LC - 22)

ALONG X - DIRECTION :

Mu = 2 T-m
Φ*Kn = Mu/bd² deff. = 325 mm
Mu/bd² = 2X10^7/(1000X325^2) = 0.189 N/mm^2 < 6.9 N/mm^2
Pt = 0.0005 Reqd. Ast = 0.0005X1000X325/100 = 1.63 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal
Total Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0012

ALONG Y - DIRECTION :

Mu = 15 T-m
Φ*Kn = Mu/bd² deff. = 340 mm
Mu/bd² = 15X10^7/(X340^2) = 1.298 N/mm^2 < 6.9 N/mm^2
Pt = 0.0035 Reqd. Ast = 0.0035XX340/100 = 11.9 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Vertical

Total Provide Ast = 15.71 cm2) at Vertical **O.K.**
Total Provide Pt = 0.0046
Minimum Reinforcement ratio for both faces = 0.0025

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 10 T (Refer Staad Output at a distance d from face of slab)(RW-2)(LC - 22)

Provided Pt = 0.0046
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0046X10X10^4X340/15/10^7)X1000X340/10^4
= 32.786 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0046)X1000X340/10^4
= 34.842 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X340/10^4
= 58.333 T
HENCE, Vc = 32.786 T
Φt*Vc = 0.75X32.786 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 24.59 T **> 10T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF WALL RAFT :

Slab Thickness =	400	mm
Width =	1000	mm
Clear Cover =	50	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 10 T-m (Refer Staad Output at face of wall of RW-3)(LC - 22)
Myd = 1 T-m (ASSUMED)

ALONG X - DIRECTION :

Mu = 10 T-m
Φ*Kn = Mu/bd^2 deff. = 332 mm
Mu/bd^2 = 10X10^7/(1000X332^2) = 0.907 N/mm^2 < 6.9 N/mm^2
Pt = 0.0024 Reqd. Ast = 0.0024X1000X332/100 = 7.97 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal
Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.003

Minimum Reinforcement ratio for both faces = 0.0018 (Cl. No. Table 8.6.1.1, SBC 304 : 2018)

ALONG Y - DIRECTION :

Mu = 1 T-m
Φ*Kn = Mu/bd^2 deff. = 345 mm
Mu/bd^2 = 1X10^7/(1000X345^2) = 0.084 N/mm^2 < 6.9 N/mm^2
Pt = 0.0002 Reqd. Ast = 0.0002X1000X345/100 = 0.69 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal
Total Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0011

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 10 T-M (Refer Staad Output at face of wall of RW-2)
Myd = 1 T-M (ASSUMED)

ALONG X - DIRECTION :

Mu = 10 T-m
Φ*Kn = Mu/bd^2 deff. = 332 mm
Mu/bd^2 = 10X10^7/(1000X332^2) = 0.907 N/mm^2 < 6.9 N/mm^2
Pt = 0.0024 Reqd. Ast = 0.0024X1000X332/100 = 7.97 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal
Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.003

ALONG Y - DIRECTION :

Mu = 1 T-m
Φ*Kn = Mu/bd^2 deff. = 345 mm
Mu/bd^2 = 1X10^7/(X345^2) = 0.084 N/mm^2 < 6.9 N/mm^2
Pt = 0.0002 Reqd. Ast = 0.0002XX345/100 = 0.69 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal

Total Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0011

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

Vu = 12 T (Refer Staad Output at a distance d from face of wall (RW-2))(LC - 22)

Provided Pt = 0.0011
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0011X12X10^4X345/1/10^7)X1000X345/10^4
= 35.328 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0011)X1000X345/10^4
= 33.302 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X345/10^4
= 59.19 T
HENCE, Vc = 33.302 T
Φt*Vc = 0.75X33.302 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 24.977 T **> 12T , Hence O.K.**

5. Design of Tripper Conveyor Supporting Frame

5.1 Geometry of Structure with Section Profiles

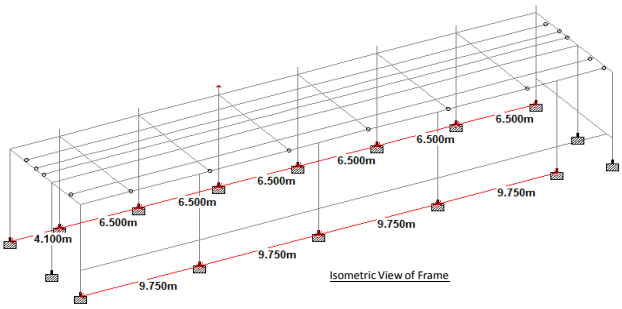

Isometric View of Frame



Elevation Along Grid F



Elevation Along Grid F'

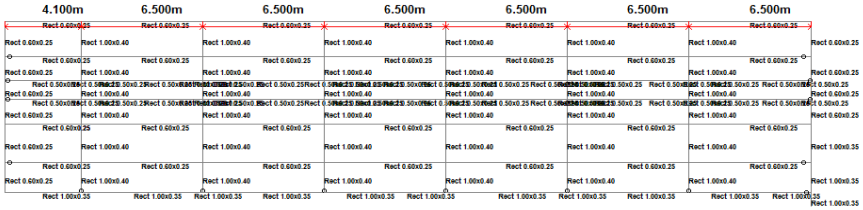

Plan at TOC EL. (+) 5.8m

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

5.2 Load Calculation

a) Dead Load (DL)

i) Self weight of the Concrete Frame
ii) Support Reactions (for Structure Dead Load + Equipment Dead Load) from Concentrate Storage Superstructure (Refer Attachment no. 13)
iii) Weight of 230mm thick Brickwall on Tie Beam = 0.23 * 5.2 * 2 = 2.4 T/m
iv) Load on Concrete Floor at TOC EL (+) 5.8m

Weight of 150mm thick Slab (1m wide) applied as udl on external beams = 0.15* 1 *2.5 = 0.375 T/m

Weight of 150mm thick Slab (1.75m wide) applied as udl on internal beams = 0.15* 1.75 *2.5 = 0.65 T/m

Dead load of Short Post - 0.65 T (Refer Attachment No. 14 for load)

2 nos. Monorail load applied = 2T

b) Live Load (LL)

i) Floor Load of 0.5 T/m2 applied as udl on beams = 1 *0.5 = 0.5 T/m (Refer Civil, Structural Design Criteria)
ii) Live load of Short Post - 0.3 T (Vertical), 0.15T(Horizontal - along the conveyor), 0.09T (Horizontal - across the conveyor) (Refer Attachment No. 14 for load)
iii) Support Reactions (for Floor Live Load + Roof Live Load) from Concentrate Storage Superstructure (Refer Attachment no. 13)

c) Tripper Load for Four Wheel Positions (Normal Running condition without Chute Clogged) (Refer Attachment No. 14 for loads) (WHEEL_TRIPPER 1 TO 4)

i) Wheel Vertical Load = 6 T or 5.5 T
ii) Wheel Horizontal Load = 0.6 T (Along Rail & Across Rail)

d) Tripper Load for Four Wheel Positions (with Chute Clogged) (Refer Attachment No. 14 for loads) (TR1_CHOCKED TO TR4_CHOCKED)

i) Wheel Vertical Load = 8 T, 7 T or 5.2 T
No horizontal load considered in this Load Case

e) Wind Load in X Direction With Internal Suction (WLX(-0.55))

i) Support Reactions from Concentrate Storage Superstructure (Refer Attachment no. 13)

f) Wind Load in X Direction With Internal Pressure (WLX(+0.55)

i) Support Reactions from Concentrate Storage Superstructure (Refer Attachment no. 13)

g) Wind Load in Z Direction With Internal Suction (WLZ (-0.55)

i) Support Reactions from Concentrate Storage Superstructure (Refer Attachment no. 13)

h) Wind Load in Z Direction With Internal Pressure (WLZ(+0.55)

i) Support Reactions from Concentrate Storage Superstructure (Refer Attachment no. 13)

The RC Frame has been designed for the following Load Combinations: (Table 5.3.1, SBC 304:2018)

LOAD COMB 200 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 1)
LOAD COMB 201 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 2)
LOAD COMB 202 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 3)
LOAD COMB 203 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 4)
LOAD COMB 204 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(+0.55)
LOAD COMB 205 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(+0.55)
LOAD COMB 206 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(+0.55)
LOAD COMB 207 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(+0.55)
LOAD COMB 208 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(-0.55)
LOAD COMB 209 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(-0.55)
LOAD COMB 210 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(-0.55)
LOAD COMB 211 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(-0.55)
LOAD COMB 212 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(+0.55)
LOAD COMB 213 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(+0.55)
LOAD COMB 214 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(+0.55)
LOAD COMB 215 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(+0.55)
LOAD COMB 216 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(-0.55)
LOAD COMB 217 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(-0.55)
LOAD COMB 218 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(-0.55)
LOAD COMB 219 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(-0.55)
LOAD COMB 220 1.2*DL+1.6*TR1_CHOCKED
LOAD COMB 221 1.2*DL+1.6*TR2_CHOCKED
LOAD COMB 222 1.2*DL+1.6*TR3_CHOCKED
LOAD COMB 223 1.2*DL+1.6*TR4_CHOCKED

The RC Frame has been designed in STAAD Pro with relevant Design Parameters as per ACI 318 : 2008. Please Refer Attachment No. 5 Staad Output File for Design of Beam & Columns

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

5.3 Beam & Column Reinforcement Details (Refer Tripper Frame General Arrangement Dwg no. MD-216-3360-EG-CV-DED-1232 for Beam & Column marking)

REINFORCEMENT DETAIL OF BEAMS & COLUMN

MARKED	STAAD MEMBER NUMBER	REINF. DESIGN BY STAAD (ACI 318-2008)	REINFORCEMENT PROVIDED IN DRAWING
C1(650X850)	1,2 ,3 , 4 , 5 , 6 , 7 , 67	16 -D28 and D10 LINKS @ 256 C/C	22 -D25 and D10 LINKS @ 250 C/C
TC1, TC1A(450X450)	8, 9, 10, 11, 12, 13, 14, 15, 56, 57, 63, 64, 70, 71	20 -D12 and D10 LINKS @ 192 C/C	8 -D20 and D10 LINKS @ 175 C/C
C3	7, 184, 185	36-D16 and D10 LINKS @ 256 C/C	20 -D25 and D10 LINKS @ 250 C/C
FB1(400X1000)	117, 127, 128, 130, 132, 133	6-D16(T), 4-D32 (B) & 2L-D12 STRP. @ 216 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB1(400X1000)	119, 135, 137, 139, 141, 143	7-D16(T), 3-D50 (B) & 2L-D12 STRP. @ 216 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB1(400X1000)	121, 144, 146, 149, 150, 151	7-D16(T), 3-D50 (B) & 2L-D12 STRP. @ 294 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB1(400X1000)	122, 152, 153, 156, 157, 158	6-D16(T), 3-D40 (B) & 2L-D12 STRP. @ 294 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB1(400X1000)	124, 162, 161, 165, 166, 168	7-D16(T), 3-D50 (B) & 2L-D12 STRP. @ 265 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB1(400X1000)	126, 169, 170, 173, 174, 175	3-D25(T), 3-D50 (B) & 2L-D12 STRP. @ 236 C/C	6- D20(T), 8-D32(B) AND 4L-D12 STRP. @ 200C/C 2X2-D16 AT SIDES
FB4(250X500)	25, 26, 27, 68, 142, 145, 167	3-D16(T), 4-D12 (B) & 2L-D12 STRP. @ 156 C/C	3- D16(T), 3-D16(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D16 AT SIDES
FB3 (250X600)	34, 35, 36, 58, 134	3-D20(T), 3-D16 (B) & 2L-D12 STRP. @ 156 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D20 AT SIDES
FB3 (250X600)	39, 40, 41, 67, 140	3-D20(T), 3-D16 (B) & 2L-D12 STRP. @ 265 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D20 AT SIDES
FB3A (250X600)	159,194,189,65, 160,199,190,67	2-D32(T), 2-D32 (B) & 2L-D12 STRP. @ 265 C/C	2-D25+1-32(T), 2-D25+1-32(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D20 AT SIDES
FB2 (250X500)	46,73,131,75,47,136,79,81,148,83,155,87,89,48,91,164 ,93,95,172,66	2-D16(T), 2-D16 (B) & 2L-D12 STRP. @ 132 C/C	3- D16(T), 3-D16(B) AND 2L-D12 STRP. @ 125 C/C 1X2-D16 AT SIDES
FB2 (250X500)	52,72,129,74,51,138,78,80,147,82,154,86,88,52,90,163 ,92,94,171,69	2-D16(T), 2-D16 (B) & 2L-D12 STRP. @ 132 C/C	3- D16(T), 3-D16(B) AND 2L-D12 STRP. @ 125 C/C 1X2-D16 AT SIDES
FB5 (350X1000)	114, 115, 116, 123, 125, 177, 178, 179, 180	4-D25(T), 4-D25 (B) & 2L-D12 STRP. @ 282 C/C	5- D25(T), 5-D25(B) AND 4L-D12 STRP. @ 200C/C 2X2-D20 AT SIDES
FB4(250X500)	16, 17, 18, 19, 20, 21	3-D16(T), 2-D16 (B) & 2L-D12 STRP. @ 132 C/C	3- D16(T), 3-D16(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D16 AT SIDES
FB4A (250X500)	22, 207, 208	3-D20(T), 2-D16 (B) & 2L-D12 STRP. @ 132 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D16 AT SIDES
FB6A (250X1000)	42, 44, 176	3-12D(T), 2-16D(B)	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 200C/C 2X2-D20 AT SIDES
FB6 (250X600)	28, 37, 49, 53	3-20D(T), 3-16D(B) & 2L-D12 STRP. @ 265 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D16 AT SIDES
FB6 (250X600)	43, 38	3-16D(T), 3-12D(B) & 2L-D12 STRP. @ 156 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 150 C/C 1X2-D16 AT SIDES
FB6 (250X600)	23, 24, 33, 45	2-20D(T), 3-16D(B) & 2L-D12 STRP. @ 156 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @150 C/C 1X2-D16 AT SIDES
TB1 (250X400)	30, 31, 32, 55, 62	2-12D(T), 2-12D(B)	3- D12(T), 3-D12(B) AND 2L-D12 STRP. @ 200C/C
TB2 (250X500)	29, 54, 188	3-20D(T), 2-16D(B) & 2L-D12 STRP. @ 215 C/C	3- D20(T), 3-D20(B) AND 2L-D12 STRP. @ 200C/C
FB7 (350X500)	191, 203, 204	5-12D(B) & 2L-D12 STRP. @ 156 C/C	4- D12(T), 4-D16(B) AND 2L-D12 STRP. @ 150C/C 1X2-D16 AT SIDES
FB7 (350X500)	196, 198, 202	6-12D(B) & 2L-D12 STRP. @ 156 C/C	4- D12(T), 4-D16(B) AND 2L-D12 STRP. @ 150C/C 1X2-D16 AT SIDES
FB8 (250X400)	205, 206	2-12D(B) & 2L-D12 STRP. @ 106 C/C	3- D12(T) ,3-D12(B) AND 2L-D12 STRP. @ 100C/C 1X2-D16 AT SIDES

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

5.4 Design of One-Way Slab on Tripper Conveyor Supporting Floor

DESIGN DATA:

Slab Thickness =	125	mm	
Span =	2000	mm	
Width of slab =	1000	mm	
Unit Weight of Concrete =	25	KN/m^3	
Live load on Slab =	5	KN/m^2	
Clear Cover =	20	mm	(Table 20.6.1.3.1, SBC 304 : 2018)
Compressive Strength of Concrete , fc' =	35	N/mm^2	
Yield Strength of Main Reinforcement , fy =	420	N/mm^2	
Strength Reduction Factor of Main Reinforcement , Φ =	0.9		
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75		

DESIGN MOMENT CALCULATION :

Self Weight of Slab = 125/1000*25 =	0.3125	T/m^2
Live Load =	0.5	T/m^2
Total Load =	0.8125	T/m^2

Maximum Span Moment = 0.8125*2 ^2 /8 = 0.406 T-m
Design Moment, Mu = 1.4 *0.40625 = 0.569 T-m

ALONG SPAN (MAIN REINFORCEMENT) :

Mu = 0.569 T-m
Φ*Kn = Mu/bd^2 deff. = 90 mm
Mu/bd^2 = 0.56875X10^7/(1000X90^2) = 0.702 N/mm^2 < 6.9 N/mm^2
Pt = 0.0019 Reqd. Ast = 0.0019X1000X90/100 = 1.71 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0044

ACROSS SPAN (TRANSVERSE REINFORCEMENT) :

Minimum Reinforcement % = 0.0018 (Both faces each side - Table 7.6.1.1, SBC 304:2018) deff. = 90 mm
Reqd. Transverse Reinforcement = 0.0009 * 1000*125= 112.5 mm^2/m width 1.125 cm^2/m width
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0044

SHEAR CHECK

ALONG SPAN :

Maximum Shear Force, V = 0.8125 * 2 /2 = 0.8125 T
Vu = 1.4 * V = 1.1375 T

Provided Pt = 0.0044
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0044X1.1375X10^4X90/0.56875/10^7)X1000X90/10^4
= 8.64 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0044)X1000X90/10^4
= 9.192 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X90/10^4
= 15.441 T
HENCE, Vc = 8.64 T
Φt*Vc = 0.75X8.64 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 6.48 T **> 1.1375T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

5.5 Design of Column Foundations of Tripper Frame grid mkd. TF1

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 109 of Tripper Frame Staad Model
Please Refer Attachment No. 5 Tripper Frame Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.45m	0.45m
Size of fdn. raft :	2.00m	2.00m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	-1.70 m	
Unit weight of conc :	25 kN/m^3	
Unit weight of soil :	18 kN/m^3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (2*2*0.5*25)+(0.45*0.45*0.3*25) = 51.52KN
Weight of soil = ((2*2)-(0.45*0.45))*2.5*18 = 170.89KN
Total = 222.41KN

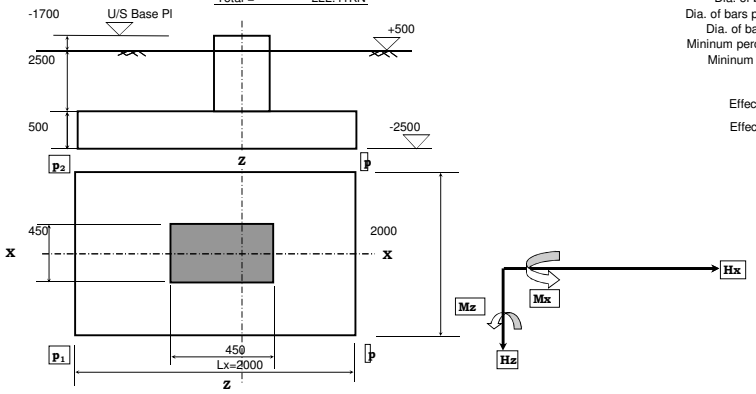

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	16mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	16mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 417mm = 0.417m
Effective depth of slab along Z direction = 401mm = 0.401m
Clear projection along Z direction = 0.775m
Clear projection along X direction = 0.775m

H$_X$=Force along X-X direction
Hz=Force along Z-Z direction
M$_X$=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to 4m high material storage = 4 * 1.6 = 6.4 T/m^2 (Storage height considered from Latest Tekla Model)
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.5) *1.8 = 4.5 T/m^2
iii) Load from Tripper Frame to Pedestal from Tripper frame Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD

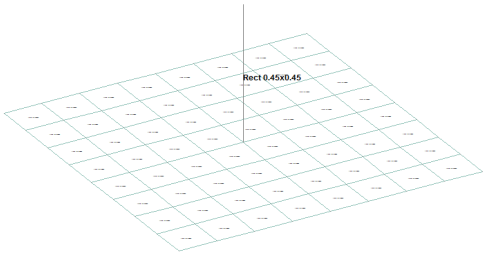

SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE

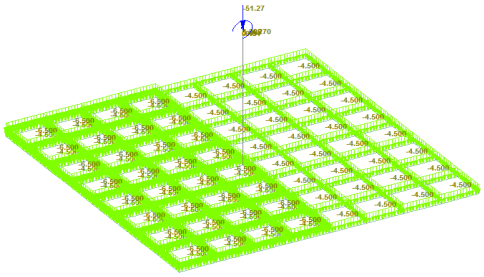

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
LOAD COMB 100 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	502.8	-6.3	41.9	4.8	9.9	827.1	-6.3	36.8	4.8	13.8
LOAD COMB 101 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	509.4	-6.5	43.2	4.5	9.3	833.7	-6.5	48.4	4.5	12.9
LOAD COMB 102 (DL+0.75*LL+0.75*WHEEL_TRIPPER 3)	590.6	-8.3	52.6	5.5	10.2	914.9	-8.3	59.2	5.5	14.6
LOAD COMB 103 (DL+0.75*LL+0.75*WHEEL_TRIPPER 5)	566.8	-7.8	50.1	5.7	9.9	891.1	-7.8	56.3	5.7	14.5
LOAD COMB 104 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(+0.55))	500.4	-5.6	38.8	5.4	11.8	824.6	-5.6	43.3	5.4	16.1
LOAD COMB 105 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(+0.55))	507.0	-5.8	40.2	5.1	11.2	831.3	-5.8	44.8	5.1	15.2
LOAD COMB 106 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(+0.55))	566.6	-7.2	47.2	5.6	10.7	890.9	-7.2	53.0	5.6	15.2
LOAD COMB 107 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(+0.55))	542.8	-6.8	44.7	5.8	10.5	867.1	-6.8	50.1	5.8	15.1
LOAD COMB 108 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(-0.55))	505.5	-6.4	43.3	4.9	9.7	829.7	-6.4	48.4	4.9	13.6
LOAD COMB 109 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(-0.55))	512.1	-6.6	44.7	4.5	9.1	836.4	-6.6	49.9	4.5	12.7
LOAD COMB 110 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(-0.55))	571.7	-8.0	51.7	5.0	8.7	896.0	-8.0	58.1	5.0	12.7
LOAD COMB 111 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(-0.55))	547.9	-7.5	49.2	5.2	8.5	872.2	-7.5	55.2	5.2	12.6
LOAD COMB 112 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(+0.55))	497.3	-5.8	37.9	5.5	12.3	821.6	-5.8	42.5	5.5	16.7
LOAD COMB 113 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(+0.55))	503.9	-6.0	39.3	5.1	11.7	828.2	-6.0	44.0	5.1	15.8
LOAD COMB 114 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(+0.55))	563.6	-7.4	46.3	5.6	11.2	887.9	-7.4	52.2	5.6	15.7
LOAD COMB 115 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(+0.55))	539.8	-6.9	43.8	5.8	11.0	864.0	-6.9	49.3	5.8	15.7
LOAD COMB 116 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(-0.55))	499.1	-5.9	39.2	5.1	10.8	823.4	-5.9	43.9	5.1	14.8
LOAD COMB 117 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(-0.55))	505.8	-6.1	40.5	4.7	10.2	830.0	-6.1	45.4	4.7	13.9
LOAD COMB 118 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(-0.55))	565.4	-7.5	47.6	5.2	9.7	889.7	-7.5	53.6	5.2	13.9
LOAD COMB 119 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(-0.55))	541.6	-7.1	45.0	5.4	9.5	865.8	-7.1	50.7	5.4	13.8
LOAD COMB 120 0.6*DL+WLX(+0.55)	261.1	-2.3	16.9	2.2	4.3	585.4	-2.3	18.7	2.2	6.0
LOAD COMB 121 0.6*DL+WLX(-0.55)	267.9	-3.3	22.9	1.4	1.5	592.2	-3.3	25.5	1.4	2.6
LOAD COMB 122 0.6*DL+WLZ(+0.55)	257.1	-2.5	15.6	2.2	4.9	581.3	-2.5	17.6	2.2	6.7
LOAD COMB 123 0.6*DL+WLZ(-0.55)	259.5	-2.7	17.3	1.7	2.9	583.8	-2.7	19.5	1.7	4.2
LOAD COMB 124 DL+TR1_CHOCKED	437.3	-5.2	34.8	2.8	4.1	761.6	-5.2	39.0	2.8	6.3
LOAD COMB 125 DL+TR2_CHOCKED	444.6	-5.4	36.6	2.4	3.2	768.83	-5.39	40.96	2.39	5.10
LOAD COMB 126 DL+TR3_CHOCKED	541.1	-7.7	48.0	2.9	2.4	865.42	-7.67	54.15	2.88	4.69
LOAD COMB 127 DL+TR4_CHOCKED	507.5	-7.0	44.2	3.6	2.7	831.75	-6.97	49.79	3.60	5.61

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (μ = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
LOAD COMB 100 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	827.08	-6.31	36.83	4.84	13.77	22.46	60.08	52.43	68.35
LOAD COMB 101 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	833.69	-6.49	48.44	4.49	12.88	17.21	64.73	51.38	74.27
LOAD COMB 102 (DL+0.75*LL+0.75*WHEEL_TRIPPER 3)	914.92	-8.27	59.25	5.51	14.57	15.44	62.79	44.25	66.42
LOAD COMB 103 (DL+0.75*LL+0.75*WHEEL_TRIPPER 5)	891.10	-7.80	56.32	5.70	14.49	15.82	61.50	45.70	62.53
LOAD COMB 104 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(+0.55))	824.64	-5.63	43.32	5.42	16.12	19.04	51.15	58.59	60.86
LOAD COMB 105 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(+0.55))	831.25	-5.81	44.83	5.07	15.24	18.54	54.56	51.51	59.02
LOAD COMB 106 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(+0.55))	890.88	-7.23	53.00	5.59	15.21	16.81	58.56	44.36	57.37
LOAD COMB 107 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(+0.55))	867.06	-6.75	50.07	5.78	15.13	17.32	57.30	46.24	54.00
LOAD COMB 108 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(-0.55))	829.74	-6.38	48.43	4.86	13.62	17.13	60.92	46.82	61.46
LOAD COMB 109 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(-0.55))	836.36	-6.56	49.94	4.50	12.73	16.75	65.73	45.90	66.91
LOAD COMB 110 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(-0.55))	895.98	-7.98	58.11	5.03	12.71	15.42	70.49	40.42	64.13
LOAD COMB 111 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(-0.55))	872.16	-7.51	55.19	5.22	12.63	15.80	69.06	41.81	60.15
LOAD COMB 112 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(+0.55))	821.61	-5.78	42.52	5.47	16.65	19.32	49.33	51.17	54.07
LOAD COMB 113 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(+0.55))	828.22	-5.97	44.04	5.12	15.77	18.81	52.53	49.94	58.23
LOAD COMB 114 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(+0.55))	887.85	-7.39	52.21	5.64	15.74	17.00	56.39	43.25	56.67
LOAD COMB 115 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(+0.55))	864.03	-6.91	49.28	5.83	15.66	17.53	55.17	45.01	53.35
LOAD COMB 116 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(-0.55))	823.42	-5.94	43.92	5.05	14.81	18.75	55.62	49.90	58.70
LOAD COMB 117 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(-0.55))	830.03	-6.12	45.44	4.70	13.92	18.27	59.64	48.83	63.58
LOAD COMB 118 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(-0.55))	889.66	-7.54	53.61	5.22	13.89	16.60	64.03	42.48	61.36
LOAD COMB 119 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(-0.55))	865.84	-7.06	50.68	5.41	13.81	17.08	62.68	44.15	57.62
LOAD COMB 120 0.6*DL+WLX(+0.55)	585.38	-2.30	18.70	2.15	5.97	31.30	98.00	91.62	98.02
LOAD COMB 121 0.6*DL+WLX(-0.55)	592.18	-3.31	25.52	1.41	2.64	23.21	224.14	64.41	151.19
LOAD COMB 122 0.6*DL+WLZ(+0.55)	581.34	-2.51	17.64	2.23	6.69	32.95	86.87	83.38	93.85
LOAD COMB 123 0.6*DL+WLZ(-0.55)	583.75	-2.71	19.50	1.66	4.22	29.93	138.39	77.55	126.60
LOAD COMB 124 DL+TR1_CHOCKED	761.59	-5.17	38.97	2.77	6.30	19.54	120.98	53.03	98.98
LOAD COMB 125 DL+TR2_CHOCKED	768.83	-5.39	40.96	2.39	5.10	18.77	150.69	51.35	115.81
LOAD COMB 126 DL+TR3_CHOCKED	865.42	-7.67	54.15	2.88	4.69	15.98	184.45	40.62	108.18
LOAD COMB 127 DL+TR4_CHOCKED	831.75	-6.97	49.79	3.60	5.61	16.71	148.21	42.96	83.18

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 102)	33.00 T/m^2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 122)	8 T/m^2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.50 T/m2
		> 33 T/m2 - OK

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation has been designed with the strength Load Combinations already mentioned (LC 200 - LC 223)

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Thickness =	500	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	6.692	T-M	Corresponding Mxy	0.617	T-M	*(Plate No. - 12 , L/C No. - 110)*
Min. Mx	0.027	T-M	Corresponding Mxy	-0.147	T-M	*(Plate No. - 24 , L/C No. - 100)*
Max. My	6.471	T-M	Corresponding Mxy	0.565	T-M	*(Plate No. - 7 , L/C No. - 102)*
Min. My	-0.015	T-M	Corresponding Mxy	0.081	T-M	*(Plate No. - 85 , L/C No. - 121)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	6.692 + 0.617 =	7.309 T-M
My1 =	My + abs(Mxy) =	6.471 + 0.565 =	7.036 T-M
Mx2 =	Mx+abs(Mxy^2/My) =	6.692 + 0.059 =	6.751 T-M
My2 =	My+abs(Mxy^2/Mx) =	6.471 + 0.048 =	6.519 T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 7.309 T-m
Myd = 7.036 T-m

ALONG X - DIRECTION :

z

Mu = 7.309 T-m
Φ*Kn = Mu/bd^2 deff. = 401 mm
Mu/bd^2 = 7.309X10^7/(1000X401^2) = 0.455 N/mm^2 < 6.9 N/mm^2
Pt = 0.0012 Reqd. Ast = 0.0012X1000X401/100 = 4.81 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0025

ALONG Y - DIRECTION :

Mu = 7.036 T-m
Φ*Kn = Mu/bd^2 deff. = 417 mm
Mu/bd^2 = 7.036X10^7/(1000X417^2) = 0.405 N/mm^2 < 6.9 N/mm^2
Pt = 0.0011 Reqd. Ast = 0.0011X1000X417/100 = 4.59 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0024

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	0.027 - 0.147 =	-0.12 T-M
My1 =	My - abs(Mxy) =	-0.015 - 0.081 =	-0.096 T-M
Mx2 =	Mx-abs(Mxy^2/My) =	0.027 - 1.441 =	-1.414 T-M
My2 =	My-abs(Mxy^2/Mx) =	-0.015 - 0.243 =	0.228 T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = 0.01 T-M
Myd = -0.096 T-M

ALONG X - DIRECTION :

Mu = 0.01 T-m
Φ*Kn = Mu/bd^2 deff. = 407 mm
Mu/bd^2 = 0.01X10^7/(1000X407^2) = 0.001 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000 Reqd. Ast = 0X1000X407/100 = 0 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0014

ALONG Y - DIRECTION :

Mu = 0.096 T-m
Φ*Kn = Mu/bd^2 deff. = 419 mm
Mu/bd^2 = 0.096X10^7/(1000X419^2) = 0.005 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000 Reqd. Ast = 0X1000X419/100 = 0 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0013

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.06 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 5 , L/C No. - 102)*
Vu = 2.442 T

Provided Pt = 0.0025
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0025X2.442X10^4X407/0.01/10^7)X1000X407/10^4
= 210.444 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0025)X1000X407/10^4
= 40.255 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X407/10^4
= 69.827 T
HENCE, Vc = 40.255 T
Φt*Vc = 0.75X40.255 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 30.191 T **> 2.442T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = -0.069 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 33 , L/C No. - 110)*
Vu = 2.891 T

Pt provided = 0.0013
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0013X2.891X10^4X419/0.096/10^7)X1000X419/10^4
= 51.346 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0013)X1000X419/10^4
= 40.587 KN
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X419/10^4
= 71.886 T
HENCE, Vc = 40.587 T
Φt*Vc = 0.75X40.587 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 30.44 T **> 2.891T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO TRIPPER BEAM & COLUMN REINFORCEMENT DETAIL FOR DESIGN OF COLUMN MKD. TC1(450x450)

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File of Tripper Structure for Support Reactions, Moments and Joint Displacements

Maximum deflection at joint no. 6670 for LC-110 - 13mm < (Allowable - 8000/300 = 28mm)

6.0 Design of Concentrate Storage Building Foundation

6.1 Design of Foundation mkd. F1

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 7 of Tripper Frame Staad Model
Please Refer Attachment No. 5 Staad Output File of Tripper Frame for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.65m
Size of fdn. raft :	3.00m	2.00m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	-1.70 m	
Unit weight of conc :	25 kN/m^3	
Unit weight of soil :	18 kN/m^3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3*2*0.5*25)+(0.85*0.65*0.3*25) = 79.14KN
Weight of soil = ((3*2)-(0.85*0.65))*2.5*18 = 245.14KN
Total = 324.28KN

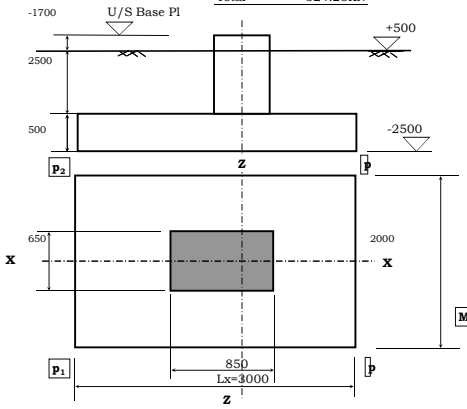

Design Input:

Characteristic strength of concrete, f'$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 415mm = 0.42m
Effective depth of slab along Z direction = 395mm = 0.4m
Clear projection along Z direction = 0.675m
Clear projection along X direction = 1.075m

H$_x$=Force along X-X direction
Hz=Force along Z-Z direction
M$_x$=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to 4m high material storage = 4 * 1.6 = 6.4 T/m^2 (Storage height considered from Latest Tekla Model)
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.5) *2.4 = 6.0 T/m^2
iii) Load from Tripper Frame to Pedestal from Tripper frame Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD

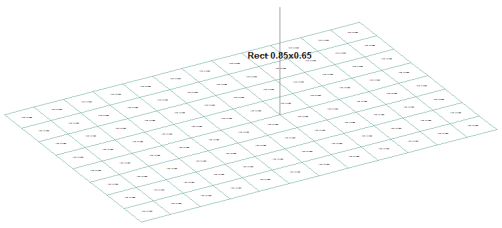

SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE

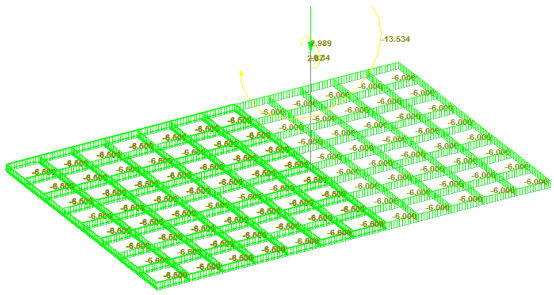

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
LOAD COMB 100 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	683.4	-3.3	29.3	28.1	-132.7	1007.6	-3.3	26.6	28.1	-110.2
LOAD COMB 101 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	683.2	-2.5	25.3	28.3	-131.4	1007.4	-2.5	27.3	28.3	-108.8
LOAD COMB 102 (DL+0.75*LL+0.75*WHEEL_TRIPPER 3)	786.2	-6.2	36.2	42.0	-114.6	1110.5	-6.2	41.1	42.0	-81.0
LOAD COMB 103 (DL+0.75*LL+0.75*WHEEL_TRIPPER 5)	799.9	-4.7	33.2	46.5	-102.8	1124.2	-4.7	36.9	46.5	-65.6
LOAD COMB 104 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(+0.55))	691.9	11.0	-43.9	35.0	-95.2	1016.2	11.0	-52.7	35.0	-67.2
LOAD COMB 105 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(+0.55))	691.7	11.9	-48.0	35.2	-93.9	1015.9	11.9	-57.4	35.2	-65.8
LOAD COMB 106 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(+0.55))	751.7	8.7	-39.4	45.4	-83.2	1076.0	8.7	-46.4	45.4	-46.9
LOAD COMB 107 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(+0.55))	765.4	10.2	-42.4	49.9	-71.4	1089.7	10.2	-50.6	49.9	-31.5
LOAD COMB 108 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(-0.55))	615.9	-13.6	78.6	25.1	-149.8	940.2	-13.6	89.5	25.1	-129.7
LOAD COMB 109 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(-0.55))	615.7	-12.7	74.6	25.3	-148.5	940.0	-12.7	84.7	25.3	-128.2
LOAD COMB 110 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(-0.55))	675.7	-15.9	83.1	35.5	-137.8	1000.0	-15.9	95.8	35.5	-109.4
LOAD COMB 111 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(-0.55))	689.4	-14.4	80.1	40.0	-126.0	1013.7	-14.4	91.6	40.0	-94.0
LOAD COMB 112 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(+0.55))	812.8	9.3	-36.4	30.2	-120.6	1137.1	9.3	-43.9	30.2	-96.5
LOAD COMB 113 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(+0.55))	812.6	10.2	-40.4	30.3	-119.3	1136.9	10.2	-48.6	30.3	-95.0
LOAD COMB 114 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(+0.55))	872.6	7.0	-31.9	40.6	-108.6	1196.9	7.0	-37.5	40.6	-76.2
LOAD COMB 115 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(+0.55))	886.3	8.6	-34.9	45.1	-96.8	1210.6	8.6	-41.7	45.1	-60.7
LOAD COMB 116 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(-0.55))	773.1	4.1	-10.5	28.9	-128.1	1097.3	4.1	-13.8	28.9	-105.0
LOAD COMB 117 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(-0.55))	772.8	5.0	-14.5	29.0	-126.7	1097.1	5.0	-18.5	29.0	-103.5
LOAD COMB 118 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(-0.55))	832.9	1.8	-6.0	39.2	-116.1	1157.2	1.8	-7.5	39.2	-84.7
LOAD COMB 119 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(-0.55))	846.6	3.3	-9.0	43.8	-104.3	1170.9	3.3	-11.6	43.8	-69.3
LOAD COMB 120 0.6*DL+WLX(+0.55)	343.9	18.4	-85.5	19.9	-40.0	668.1	18.4	-100.2	19.9	-24.1
LOAD COMB 121 0.6*DL+WLX(-0.55)	242.6	-14.5	77.8	6.7	-112.8	566.9	-14.5	89.4	6.7	-107.4
LOAD COMB 122 0.6*DL+WLZ(+0.55)	505.1	16.1	-75.5	13.5	-73.9	829.4	16.1	-88.4	13.5	-63.1
LOAD COMB 123 0.6*DL+WLZ(-0.55)	452.1	9.1	-41.0	11.7	-83.8	776.4	9.1	-48.3	11.7	-74.4
LOAD COMB 124 DL+TR1_CHOCKED	554.3	-1.4	20.5	18.0	-149.6	878.6	-1.4	21.6	18.0	-135.2
LOAD COMB 125 DL+TR2_CHOCKED	553.6	-1.2	19.5	17.0	-154.1	877.86	-1.15	20.46	16.99	-140.50
LOAD COMB 126 DL+TR3_CHOCKED	630.4	-5.9	32.8	19.1	-200.1	954.68	-5.90	37.57	19.14	-184.75
LOAD COMB 127 DL+TR4_CHOCKED	663.0	-3.8	27.8	26.2	-188.1	987.23	-3.81	30.89	26.23	-167.10

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING ($\mu = 0.4$)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
LOAD COMB 100 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	1007.64	-3.34	26.64	28.11	-110.23	56.73	9.14	120.68	14.34
LOAD COMB 101 (DL+0.75*LL+0.75*WHEEL_TRIPPER 1)	1007.43	-2.48	27.27	28.27	-108.75	55.42	9.26	162.49	14.25
LOAD COMB 102 (DL+0.75*LL+0.75*WHEEL_TRIPPER 3)	1110.51	-6.17	41.11	41.98	-81.03	40.52	13.71	71.99	10.58
LOAD COMB 103 (DL+0.75*LL+0.75*WHEEL_TRIPPER 5)	1124.22	-4.66	36.93	46.50	-65.61	45.66	17.14	96.50	9.67
LOAD COMB 104 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(+0.55))	1016.15	11.01	-52.73	34.99	-67.24	28.91	15.11	36.92	11.62
LOAD COMB 105 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(+0.55))	1015.94	11.87	-57.45	35.15	-65.76	26.53	15.45	30.81	10.41
LOAD COMB 106 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(+0.55))	1075.96	8.72	-46.40	45.38	-46.92	34.78	22.93	44.42	8.54
LOAD COMB 107 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(+0.55))	1089.66	10.23	-50.58	49.90	-31.50	32.32	34.60	38.35	7.86
LOAD COMB 108 DL+0.75*(LL+WHEEL_TRIPPER 1+WLX(-0.55))	940.19	-13.61	89.47	25.11	-129.73	15.76	7.25	24.87	13.48
LOAD COMB 109 DL+0.75*(LL+WHEEL_TRIPPER 2+WLX(-0.55))	939.97	-12.74	84.74	25.27	-128.24	16.64	7.33	26.56	13.39
LOAD COMB 110 DL+0.75*(LL+WHEEL_TRIPPER 3+WLX(-0.55))	999.99	-15.90	95.80	35.51	-109.40	15.66	9.14	22.64	10.14
LOAD COMB 111 DL+0.75*(LL+WHEEL_TRIPPER 4+WLX(-0.55))	1013.70	-14.39	91.62	40.03	-93.98	16.60	10.79	25.36	9.12
LOAD COMB 112 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(+0.55))	1137.11	9.34	-43.87	30.18	-96.49	38.88	11.78	43.83	13.56
LOAD COMB 113 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(+0.55))	1136.90	10.20	-48.58	30.34	-95.01	35.10	11.97	40.13	13.49
LOAD COMB 114 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(+0.55))	1196.92	7.04	-37.53	40.57	-76.17	47.84	15.71	61.21	10.62
LOAD COMB 115 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(+0.55))	1210.62	8.56	-41.71	45.09	-60.75	43.54	19.93	50.91	9.67
LOAD COMB 116 DL+0.75*(LL+WHEEL_TRIPPER 1+WLZ(-0.55))	1097.34	4.10	-13.80	28.85	-105.00	119.30	10.45	96.35	13.69
LOAD COMB 117 DL+0.75*(LL+WHEEL_TRIPPER 2+WLZ(-0.55))	1097.12	4.96	-18.52	29.01	-103.52	88.88	10.60	79.63	13.61
LOAD COMB 118 DL+0.75*(LL+WHEEL_TRIPPER 3+WLZ(-0.55))	1157.15	1.80	-7.46	39.24	-84.68	232.70	13.66	231.43	10.62
LOAD COMB 119 DL+0.75*(LL+WHEEL_TRIPPER 4+WLZ(-0.55))	1170.85	3.32	-11.64	43.76	-69.26	150.84	16.90	126.96	9.63
LOAD COMB 120 0.6*DL+WLX(+0.55)	668.14	18.36	-100.20	19.89	-24.08	10.00	27.75	13.10	12.09
LOAD COMB 121 0.6*DL+WLX(-0.55)	566.85	-14.47	89.40	6.73	-107.39	9.51	5.28	14.10	30.32
LOAD COMB 122 0.6*DL+WLZ(+0.55)	829.42	16.12	-88.37	13.48	-63.08	14.08	13.15	18.52	22.15
LOAD COMB 123 0.6*DL+WLZ(-0.55)	776.39	9.14	-48.29	11.70	-74.44	24.12	10.43	30.58	23.89
LOAD COMB 124 DL+TR1_CHOCKED	878.59	-1.37	21.65	17.98	-135.24	60.89	6.50	230.87	17.59
LOAD COMB 125 DL+TR2_CHOCKED	877.86	-1.15	20.46	16.99	-140.50	64.37	6.25	274.81	18.60
LOAD COMB 126 DL+TR3_CHOCKED	954.68	-5.90	37.57	19.14	-184.75	38.12	5.17	58.25	17.96
LOAD COMB 127 DL+TR4_CHOCKED	987.23	-3.81	30.89	26.23	-167.10	47.94	5.91	93.28	13.55

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 115)	34.00 T/m^2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 121)	5 T/m^2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH - 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.50 T/m^2
		> 34 T/m2 - OK

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation has been designed with the strength Load Combinations already mentioned (LC 200 - LC 223)

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Thickness =	500	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	13.123	T-M	Corresponding Mxy	1.373	T-M	*(Plate No. - 93 , L/C No. - 215)*
Min. Mx	-2.981	T-M	Corresponding Mxy	2.023	T-M	*(Plate No. - 98 , L/C No. - 222)*
Max. My	19.693	T-M	Corresponding Mxy	2.254	T-M	*(Plate No. - 7 , L/C No. - 215)*
Min. My	0.008	T-M	Corresponding Mxy	-0.021	T-M	*(Plate No. - 129 , L/C No. - 205)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	13.123 + 1.373 =	14.496 T-M
My1 =	My + abs(Mxy) =	19.693 + 2.254 =	21.947 T-M
Mx2 =	Mx+abs(Mxy^2/My) =	13.123 + 0.096 =	13.219 T-M
My2 =	My+abs(Mxy^2/Mx) =	19.693 + 0.387 =	20.08 T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 14.496 T-m
Myd = 21.947 T-m

ALONG X - DIRECTION :

Mu = 14.496 T-m
Φ*Kn = Mu/bd^2 deff. = 395 mm
Mu/bd^2 = 14.496X10^7/(1000X395^2) = 0.929 N/mm^2 < 6.9 N/mm^2
Pt = 0.0025 Reqd. Ast = 0.0025X1000X395/100 = 9.88 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.004

ALONG Y - DIRECTION :

Mu = 21.947 T-m
Φ*Kn = Mu/bd^2 deff. = 415 mm
Mu/bd^2 = 21.947X10^7/(1000X415^2) = 1.274 N/mm^2 < 6.9 N/mm^2
Pt = 0.0035 Reqd. Ast = 0.0035X1000X415/100 = 14.53 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0038

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-2.981 - 2.023 =	-5.004 T-M
My1 =	My - abs(Mxy) =	0.008 - 0.021 =	-0.013 T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-2.981 - 511.566 =	-514.547 T-M
My2 =	My-abs(Mxy^2/Mx) =	0.008 - 0 =	0.008 T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -5.004 T-M
Myd = -0.013 T-M

ALONG X - DIRECTION :

Mu = 5.004 T-m
Φ*Kn = Mu/bd^2 deff. = 407 mm
Mu/bd^2 = 5.004X10^7/(1000X407^2) = 0.302 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008 Reqd. Ast = 0.0008X1000X407/100 = 3.26 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0014

ALONG Y - DIRECTION :

Mu = 0.013 T-m
Φ*Kn = Mu/bd^2 deff. = 419 mm
Mu/bd^2 = 0.013X10^7/(1000X419^2) = 0.001 N/mm^2 < 6.9 N/mm^2
Pt = 0.0000 Reqd. Ast = 0X1000X419/100 = 0 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0013

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.13 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 5 , L/C No. - 222)*

Vu = 5.291 T

Provided Pt = 0.004

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.004X5.291X10^4X407/5.004/10^7)X1000X407/10^4

= 39.717 T

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.004)X1000X407/10^4

= 41.293 T

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X407/10^4

= 69.827 T

HENCE, Vc = 39.717 T

Φt*Vc = 0.75X39.717 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 29.788 T **> 5.291T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.319 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 56 , L/C No. - 215)*

Vu = 13.366 T

Pt provided = 0.0013

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc'^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0013X13.366X10^4X419/0.013/10^7)X1000X419/10^4

= 438.575 T

[b] = (0.16*λ*fc'^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0013)X1000X419/10^4

= 40.587 KN

[c] = 0.29*λ*fc'^0.5*b*d.eff

= 0.29X1X5.92X1000X419/10^4

= 71.886 T

HENCE, Vc = 40.587 T

Φt*Vc = 0.75X40.587 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.44 T **> 13.366T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO TRIPPER BEAM & COLUMN REINFORCEMENT DETAIL FOR DESIGN OF COLUMN MKD. C1(850x650)

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File of Tripper Structure for Support Reactions, Moments and Joint Displacements

Maximum deflection at joint no. 192 for LC-127 - 14mm < (Allowable - 8000/300 = 28mm)

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

6.2 Design of Foundation mkd. F2

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 660 of Concentrate Storage Staad Model
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	3.50m	2.75m
Thickness of raft :	0.60 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	6.30 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3.5*2.75*0.6*25)+(0.85*0.85*8.2*25) = 292.49KN
Weight of soil = ((3.5*2.75)-(0.85*0.85))*2.4*18 = 384.59KN
Total = 677.08KN

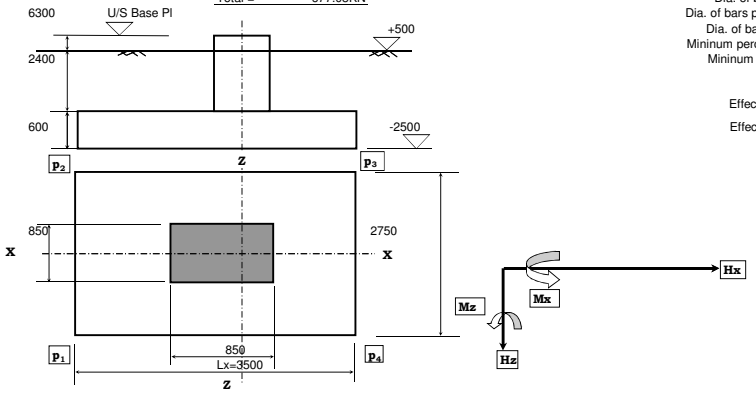

Design Input:

Characteristic strength of concrete, f 'c=	35 MPa
Yield stress of steel reinforcement, fy=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	25mm
Dia. of bars provd. along X direction at top =	20mm
Dia. of bars provided along Z direction at bottom=	25mm
Dia. of bars provided along Z direction at top=	20mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 513mm = 0.513m
Effective depth of slab along Z direction = 488mm = 0.488m
Clear projection along Z direction = 0.95m
Clear projection along X direction = 1.325m

H_x=Force along X-X direction
Hz=Force along Z-Z direction
M_x=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model: (Storage height considered from Latest Tekla Model)

i) Surcharge on foundation raft due to 6m high material storage = 6 * 1.6 = 9.6 T/m^2 (Material Density = 1.6 T/m3)
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.6) *2.4 = 5.76 T/m^2
iii) Horizontal load on Column due to storage (H) = 0.5*9.6* 6 * 0.33 *0.65 = 6.2 T (Column Width = 650mm)

iv) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE

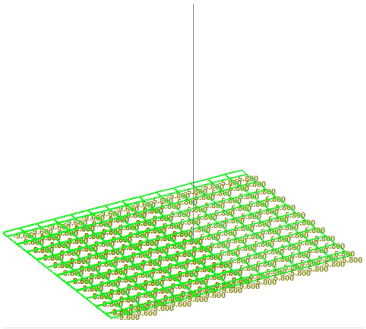

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR + H	149.8	-51.9	0.0	3.7	0.0	799.3	-51.9	-456.9	3.7	32.1
2 DL+0.75*(LL+LR+W(+X)) + H	155.9	-74.4	0.0	49.8	0.0	805.5	-74.4	-654.3	49.8	438.0
3 DL+0.75*(LL+LR+W(-X))+ H	199.4	-85.3	0.0	33.1	0.0	849.0	-85.3	-750.6	33.1	290.8
4 DL+0.75*(LL+LR+W(+Z))+ H	274.8	-51.6	0.0	52.2	0.0	924.4	-51.6	-453.6	52.2	459.1
5 DL+0.75*(LL+LR+W(-Z))+ H	286.9	-52.2	0.0	63.4	0.0	936.4	-52.2	-458.9	63.4	557.5
6 0.6*D + 1.0W(+X)+ H	75.6	-89.1	0.0	64.2	0.0	725.2	-89.1	-783.7	64.2	565.0
7 0.6*D + 1.0W(-X)+ H	133.6	-103.7	0.0	41.9	0.0	783.2	-103.7	-912.2	41.9	368.7
8 0.6*D + 1.0W(+Z)+ H	234.1	-58.7	0.0	67.4	0.0	883.7	-58.7	-516.2	67.4	593.1
9 0.6*D + 1.0W(-Z)+ H	250.2	-59.5	0.0	82.3	0.0	899.8	-59.5	-523.2	82.3	724.2
10 DL+LL+ H	105.2	-56.2	1.0	4.5	1.0	754.8	-56.2	-493.6	4.5	40.6
11 DL+LR + H	163.3	-50.5	2.0	1.3	2.0	812.9	-50.5	-442.4	1.3	13.4

Horizontal Load of 6.3T has been added to the support reaction Hx to consider Lateral pressure due to Storage material

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR + H	799.35	-51.93	-456.94	3.65	32.12	3.06	34.22	6.16	87.60
2 DL+0.75*(LL+LR+W(+X)) + H	805.50	-74.35	-654.28	49.78	438.02	2.15	2.53	4.33	6.47
3 DL+0.75*(LL+LR+W(-X))+ H	849.00	-85.30	-750.64	33.05	290.84	1.98	4.01	3.98	10.28
4 DL+0.75*(LL+LR+W(+Z))+ H	924.37	-51.55	-453.64	52.18	459.14	3.57	2.77	7.17	7.09
5 DL+0.75*(LL+LR+W(-Z))+ H	936.45	-52.15	-458.92	63.35	557.48	3.57	2.31	7.18	5.91
6 0.6*D + 1.0W(+X)+ H	725.21	-89.06	-783.73	64.20	564.96	1.62	1.77	2.93	4.07
7 0.6*D + 1.0W(-X)+ H	783.21	-103.66	-912.21	41.90	368.72	1.50	2.92	2.72	6.73
8 0.6*D + 1.0W(+Z)+ H	883.71	-58.66	-516.21	67.40	593.12	3.00	2.05	5.42	4.72
9 0.6*D + 1.0W(-Z)+ H	899.81	-59.46	-523.25	82.30	724.24	3.01	1.71	5.45	3.94
10 DL+LL+ H	754.77	-56.20	-493.56	4.50	40.60	2.68	25.56	4.83	60.38
11 DL+LR + H	812.87	-50.50	-442.40	1.30	13.44	3.22	83.16	5.79	225.10

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 9)	32.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	0 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 1.8 =	49.5 T/m2
		> 32 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018 and ACI 318 : 2014

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR + 1.6H
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X) + 1.6H
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X) + 1.6H
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z) + 1.6H
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z) + 1.6H
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01	Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023	Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT	Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD	Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC	Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI	Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	600	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	46.475	T-M	Corresponding Mxy	6.981	T-M	*(Plate No. - 67 , L/C No. - 113)*
Min. Mx	-35.94	T-M	Corresponding Mxy	-12.323	T-M	*(Plate No. - 22 , L/C No. - 109)*
Max. My	38.498	T-M	Corresponding Mxy	9.073	T-M	*(Plate No. - 64 , L/C No. - 107)*
Min. My	-22.507	T-M	Corresponding Mxy	-16.646	T-M	*(Plate No. - 26 , L/C No. - 107)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	46.475 + 6.981 =	53.456	T-M
My1 =	My + abs(Mxy) =	38.498 + 9.073 =	47.571	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	46.475 + 1.266 =	47.741	T-M
My2 =	My+abs(Mxy^2/Mx) =	38.498 + 1.771 =	40.269	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 53.456 T-m
Myd = 47.571 T-m

ALONG X - DIRECTION :

Mu = 53.456 T-m
Φ*Kn = Mu/bd^2 deff. = 487.5 mm
Mu/bd^2 = 53.456X10^7/(1000X487.5^2) = 2.249 N/mm^2 < 6.9 N/mm^2
Pt = 0.0062 Reqd. Ast = 0.0062X1000X487.5/100 = 30.23 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0067

ALONG Y - DIRECTION :

Mu = 47.571 T-m
Φ*Kn = Mu/bd^2 deff. = 512.5 mm
Mu/bd^2 = 47.571X10^7/(1000X512.5^2) = 1.811 N/mm^2 < 6.9 N/mm^2
Pt = 0.0050 Reqd. Ast = 0.005X1000X512.5/100 = 25.63 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0064

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-35.94 - 12.323 =	-48.263	T-M
My1 =	My - abs(Mxy) =	-22.507 - 16.646 =	-39.153	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-35.94 - 6.747 =	-42.687	T-M
My2 =	My-abs(Mxy^2/Mx) =	-22.507 - 7.71 =	-14.797	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -48.263 T-M
Myd = -39.153 T-M

ALONG X - DIRECTION :

Mu = 48.263 T-m
Φ*Kn = Mu/bd^2 deff. = 487.5 mm
Mu/bd^2 = 48.263X10^7/(1000X487.5^2) = 2.031 N/mm^2 < 6.9 N/mm^2
Pt = 0.0056 Reqd. Ast = 0.0056X1000X487.5/100 = 27.3 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0067

ALONG Y - DIRECTION :

Mu = 39.153 T-m
Φ*Kn = Mu/bd^2 deff. = 512.5 mm
Mu/bd^2 = 39.153X10^7/(1000X512.5^2) = 1.491 N/mm^2 < 6.9 N/mm^2
Pt = 0.0041 Reqd. Ast = 0.0041X1000X512.5/100 = 21.01 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0064

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.578 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 65 , L/C No. - 113)*

Vu = 28.178 T

Provided Pt = 0.0067

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0067X28.178X10^4X487.5/48.263/10^7)X1000X487.5/10^4

= 47.726 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0067)X1000X487.5/10^4

= 51.698 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X487.5/10^4

= 83.639 T

HENCE, Vc = 47.726 T

Φt*Vc = 0.75X47.726 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 35.795 T **> 28.178T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.475 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 56 , L/C No. - 107)*

Vu = 24.344 T

Pt provided = 0.0064

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0064X24.344X10^4X512.5/39.153/10^7)X1000X512.5/10^4

= 50.289 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0064)X1000X512.5/10^4

= 54.088 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X512.5/10^4

= 87.928 T

HENCE, Vc = 50.289 T

Φt*Vc = 0.75X50.289 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 37.717 T **> 24.344T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 8 FOR DESIGN OF COLUMN MKD. C2

Size of Column = 850 X 850 mm^2

Reqired area of Reinforcement = 14970 mm^2

Reinforcement Provided = 24 no. 32 dia bars

Area of Reinforcement Provided = 19302 mm^2

Deflection at top of pedestal shall not be considered as per output file here, because it is actually below the structural shed . Deflection of concrete pedestals shall be guided by structural column deflection.

Deflection at top of structural column from Staad Output (Attachment no. 13) = 23 mm (for Node no. 3, LC 207) < Allowable (h/400)

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

6.3 Design of Foundation mkd. F3

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 607 of Concentrate Storage Staad Model
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.65m
Size of fdn. raft :	3.50m	3.50m
Thickness of raft :	0.65 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	1.00 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3.5*3.5*0.65*25)+(0.85*0.65*2.85*25) = 238.43KN
Weight of soil = ((3.5*3.5)-(0.85*0.65))*2.35*18 = 494.80KN
Total = 733.23KN

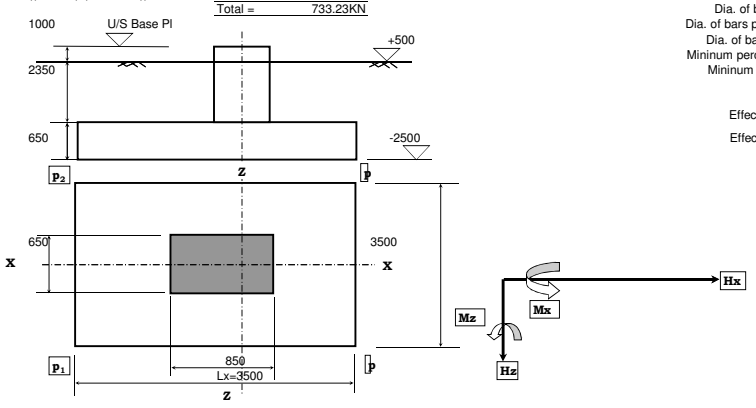

Design Input:

Characteristic strength of concrete, f 'c=	35 MPa
Yield stress of steel reinforcement, fy=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 565mm = 0.565m
Effective depth of slab along Z direction = 545mm = 0.545m
Clear projection along Z direction = 1.425m
Clear projection along X direction = 1.325m

H_X=Force along X-X direction
Hz=Force along Z-Z direction
M_X=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.65) *1.8 = 4.23 T/m^2
ii) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR	177.2	5.1	0.0	-2.0	0.0	910.4	5.1	17.9	-2.0	-7.1
2 DL+0.75*(LL+LR+W(+X))	-114.9	-10.3	0.0	46.7	0.0	618.4	-10.3	-36.1	46.7	163.5
3 DL+0.75*(LL+LR+W(-X))	86.5	-41.4	0.0	12.8	0.0	819.7	-41.4	-144.8	12.8	44.6
4 DL+0.75*(LL+LR+W(+Z))	106.2	5.2	0.0	13.7	0.0	839.4	5.2	18.2	13.7	48.0
5 DL+0.75*(LL+LR+W(-Z))	115.9	5.2	0.0	10.4	0.0	849.1	5.2	18.2	10.4	36.2
6 0.6*D + 1.0W(+X)	-315.3	-19.2	0.0	63.4	0.0	417.9	-19.2	-67.1	63.4	222.0
7 0.6*D + 1.0W(-X)	-46.8	-60.6	0.0	18.1	0.0	686.4	-60.6	-212.0	18.1	63.5
8 0.6*D + 1.0W(+Z)	-20.6	1.5	0.0	19.4	0.0	712.6	1.5	5.4	19.4	68.0
9 0.6*D + 1.0W(-Z)	-7.6	1.5	0.0	14.9	0.0	725.6	1.5	5.4	14.9	52.3
10 DL+LL	141.8	3.4	1.0	-3.2	1.0	875.0	3.4	12.9	-3.2	-10.2
11 DL+LR	188.5	5.7	2.0	-1.7	2.0	921.7	5.7	22.0	-1.7	-4.0

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR	910.41	5.13	17.94	-2.03	-7.09	88.82	224.79	71.06	179.83
2 DL+0.75*(LL+LR+W(+X))	618.36	-10.33	-36.14	46.73	163.54	29.94	6.62	23.96	5.29
3 DL+0.75*(LL+LR+W(-X))	819.73	-41.38	-144.81	12.75	44.63	9.91	32.15	7.92	25.72
4 DL+0.75*(LL+LR+W(+Z))	839.38	5.20	18.20	13.73	48.04	80.71	30.58	64.57	24.46
5 DL+0.75*(LL+LR+W(-Z))	849.13	5.20	18.20	10.35	36.23	81.65	41.02	65.32	32.82
6 0.6*D + 1.0W(+X)	417.93	-19.16	-67.06	63.44	222.04	10.91	3.29	7.85	2.37
7 0.6*D + 1.0W(-X)	686.43	-60.56	-211.96	18.14	63.49	5.67	18.92	4.08	13.62
8 0.6*D + 1.0W(+Z)	712.63	1.54	5.39	19.44	68.04	231.37	18.33	166.59	13.20
9 0.6*D + 1.0W(-Z)	725.63	1.54	5.39	14.94	52.29	235.59	24.28	169.63	17.49
10 DL+LL	875.03	3.40	12.90	-3.20	-10.20	118.71	150.13	92.65	98.44
11 DL+LR	921.73	5.70	21.95	-1.70	-3.95	73.49	408.36	58.21	195.19

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	9.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	0 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.5 T/m2
		> 9 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X)
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X)
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z)
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z)
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	650	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	11.019	T-M	Corresponding Mxy	5.023	T-M	*(Plate No. - 67 , L/C No. - 110)*
Min. Mx	-16.324	T-M	Corresponding Mxy	-2.376	T-M	*(Plate No. - 22 , L/C No. - 106)*
Max. My	12.358	T-M	Corresponding Mxy	2.856	T-M	*(Plate No. - 64 , L/C No. - 107)*
Min. My	-9.756	T-M	Corresponding Mxy	-2.33	T-M	*(Plate No. - 26 , L/C No. - 110)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	11.019 + 5.023 =	16.042	T-M
My1 =	My + abs(Mxy) =	12.358 + 2.856 =	15.214	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	11.019 + 2.042 =	13.061	T-M
My2 =	My+abs(Mxy^2/Mx) =	12.358 + 0.74 =	13.098	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 16.042 T-m
Myd = 15.214 T-m

ALONG X - DIRECTION :

Mu = 16.042 T-m
Φ*Kn = Mu/bd^2 deff. = 551 mm
Mu/bd^2 = 16.042X10^7/(1000X551^2) = 0.528 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014 Reqd. Ast = 0.0014X1000X551/100 = 7.71 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 15.214 T-m
Φ*Kn = Mu/bd^2 deff. = 567 mm
Mu/bd^2 = 15.214X10^7/(1000X567^2) = 0.473 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013 Reqd. Ast = 0.0013X1000X567/100 = 7.37 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0018

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-16.324 - 2.376 =	-18.7	T-M
My1 =	My - abs(Mxy) =	-9.756 - 2.33 =	-12.086	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-16.324 - 0.579 =	-16.903	T-M
My2 =	My-abs(Mxy^2/Mx) =	-9.756 - 0.333 =	-9.423	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -18.7 T-M
Myd = -12.086 T-M

ALONG X - DIRECTION :

Mu = 18.7 T-m
Φ*Kn = Mu/bd^2 deff. = 551 mm
Mu/bd^2 = 18.7X10^7/(1000X551^2) = 0.616 N/mm^2 < 6.9 N/mm^2
Pt = 0.0016 Reqd. Ast = 0.0016X1000X551/100 = 8.82 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0018

ALONG Y - DIRECTION :

Mu = 12.086 T-m
Φ*Kn = Mu/bd^2 deff. = 567 mm
Mu/bd^2 = 12.086X10^7/(1000X567^2) = 0.376 N/mm^2 < 6.9 N/mm^2
Pt = 0.0010 Reqd. Ast = 0.001X1000X567/100 = 5.67 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0018

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.131 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 227 , L/C No. - 110)*

Vu = 7.218 T

Provided Pt = 0.0018

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0018X7.218X10^4X551/18.7/10^7)X1000X551/10^4

= 52.515 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0018)X1000X551/10^4

= 53.842 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X551/10^4

= 94.533 T

HENCE, Vc = 52.515 T

Φt*Vc = 0.75X52.515 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 39.386 T **> 7.218T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.098 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 249 , L/C No. - 110)*

Vu = 5.557 T

Pt provided = 0.0018

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0018X5.557X10^4X567/12.086/10^7)X1000X567/10^4

= 54.123 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0018)X1000X567/10^4

= 55.406 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X567/10^4

= 97.278 T

HENCE, Vc = 54.123 T

Φt*Vc = 0.75X54.123 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 40.592 T **> 5.557T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 9 FOR DESIGN OF COLUMN MKD. C3

Size of Column = 850 mm X 650mm

Reqired area of Reinforcement = 5525 mm^2

Reinforcment Provided = 20 no. 20 dia bars

Area of Reinforcment Provided = 6283 mm^2

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File for Support Reactions, Moments and Joint Displacements

Maximum deflection for LC - 6 - 8mm < (Allowable -3500/300 = 11.7mm)

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

6.4 Design of Foundation mkd. F4

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 730 of Concentrate Storage Staad Model
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.65m	0.85m
Size of fdn. raft :	2.00m	3.00m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	1.00 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (2*3*0.5*25)+(0.65*0.85*3*25) = 116.44KN
Weight of soil = ((2*3)-(0.65*0.85))*2.5*18 = 245.14KN
Total = 361.58KN

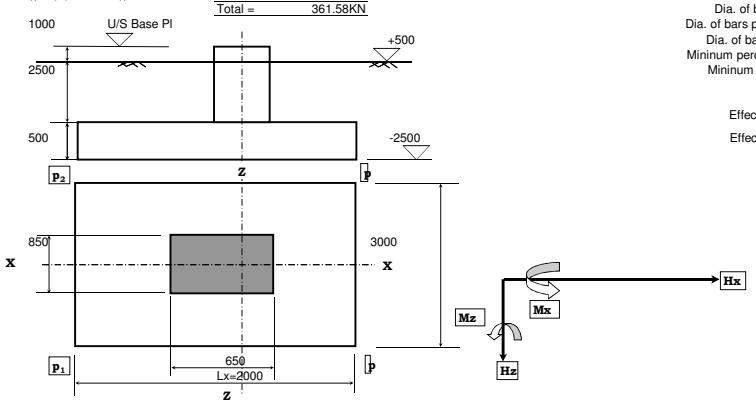

Design Input:

Characteristic strength of concrete, f 'c=	35 MPa
Yield stress of steel reinforcement, fy=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 415mm = 0.415m
Effective depth of slab along Z direction = 395mm = 0.395m
Clear projection along Z direction = 1.075m
Clear projection along X direction = 0.675m

H_X=Force along X-X direction
Hz=Force along Z-Z direction
M_X=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.5) *1.8 = 4.5 T/m^2
ii) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model
i) Surcharge on foundation raft due to material storage = 10 T/m^2 (assumed)

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR	101.4	-0.2	0.0	-56.9	0.0	463.0	-0.2	-0.7	-56.9	-199.2
2 DL+0.75*(LL+LR+W(+X))	101.4	-1.3	0.0	-13.2	0.0	463.0	-1.3	-4.6	-13.2	-46.2
3 DL+0.75*(LL+LR+W(-X))	101.4	-1.3	0.0	-51.8	0.0	463.0	-1.3	-4.4	-51.8	-181.1
4 DL+0.75*(LL+LR+W(+Z))	101.4	-0.2	0.0	-59.0	0.0	463.0	-0.2	-0.7	-59.0	-206.3
5 DL+0.75*(LL+LR+W(-Z))	101.4	-0.2	0.0	-59.0	0.0	463.0	-0.2	-0.7	-59.0	-206.3
6 0.6*D + 1.0W(+X)	26.9	-1.6	0.0	58.2	0.0	388.5	-1.6	-5.5	58.2	203.8
7 0.6*D + 1.0W(-X)	26.9	-1.5	0.0	6.8	0.0	388.5	-1.5	-5.1	6.8	23.9
8 0.6*D + 1.0W(+Z)	26.9	-0.1	0.0	-2.8	0.0	388.5	-0.1	-0.2	-2.8	-9.7
9 0.6*D + 1.0W(-Z)	26.9	-0.1	0.0	-2.8	0.0	388.5	-0.1	-0.2	-2.8	-9.7
10 DL+LL	113.4	-0.2	1.0	-57.1	1.0	475.0	-0.2	0.3	-57.1	-198.9
11 DL+LR	65.4	-0.2	2.0	-56.2	2.0	427.0	-0.2	1.3	-56.2	-194.7

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR	405.48	-0.20	-0.70	-56.93	-199.24	579.26	2.54	810.96	2.85
2 DL+0.75*(LL+LR+W(+X))	405.48	-1.33	-4.64	-13.20	-46.20	87.44	10.97	122.41	12.29
3 DL+0.75*(LL+LR+W(-X))	405.48	-1.25	-4.38	-51.75	-181.13	92.68	2.80	129.75	3.13
4 DL+0.75*(LL+LR+W(+Z))	405.48	-0.20	-0.70	-58.95	-206.33	579.26	2.46	810.96	2.75
5 DL+0.75*(LL+LR+W(-Z))	405.48	-0.20	-0.70	-58.95	-206.33	579.26	2.46	810.96	2.75
6 0.6*D + 1.0W(+X)	330.96	-1.56	-5.46	58.24	203.84	60.62	2.03	76.38	2.05
7 0.6*D + 1.0W(-X)	330.96	-1.46	-5.11	6.84	23.94	64.77	17.28	81.61	17.42
8 0.6*D + 1.0W(+Z)	330.96	-0.06	-0.21	-2.76	-9.66	1576.00	42.83	1985.76	43.17
9 0.6*D + 1.0W(-Z)	330.96	-0.06	-0.21	-2.76	-9.66	1576.00	42.83	1985.76	43.17
10 DL+LL	417.48	-0.20	0.30	-57.10	-198.85	1391.60	2.62	751.46	2.63
11 DL+LR	369.48	-0.20	1.30	-56.20	-194.70	284.22	2.37	665.06	2.37

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	20.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 1)	0 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.5 T/m2
		> 20 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X)
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X)
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z)
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z)
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	500	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	3.953	T-M	Corresponding Mxy	0.915	T-M	*(Plate No. - 25 , L/C No. - 101)*
Min. Mx	-1.821	T-M	Corresponding Mxy	2.162	T-M	*(Plate No. - 11 , L/C No. - 110)*
Max. My	11.252	T-M	Corresponding Mxy	-1.245	T-M	*(Plate No. - 93 , L/C No. - 110)*
Min. My	-7.796	T-M	Corresponding Mxy	1.445	T-M	*(Plate No. - 12 , L/C No. - 110)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	3.953 + 0.915 =	4.868 T-M
My1 =	My + abs(Mxy) =	11.252 + 1.245 =	12.497 T-M
Mx2 =	Mx+abs(Mxy^2/My) =	3.953 + 0.074 =	4.027 T-M
My2 =	My+abs(Mxy^2/Mx) =	11.252 + 0.392 =	11.644 T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 4.868 T-m
Myd = 12.497 T-m

ALONG X - DIRECTION :

Mu = 4.868 T-m
Φ*Kn = Mu/bd^2 deff. = 401 mm
Mu/bd^2 = 4.868X10^7/(1000X401^2) = 0.303 N/mm^2 < 6.9 N/mm^2
Pt = 0.0008 Reqd. Ast = 0.0008X1000X401/100 = 3.21 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0025

ALONG Y - DIRECTION :

Mu = 12.497 T-m
Φ*Kn = Mu/bd^2 deff. = 417 mm
Mu/bd^2 = 12.497X10^7/(1000X417^2) = 0.719 N/mm^2 < 6.9 N/mm^2
Pt = 0.0019 Reqd. Ast = 0.0019X1000X417/100 = 7.92 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0024

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-1.821 - 2.162 =	-3.983 T-M
My1 =	My - abs(Mxy) =	-7.796 - 1.445 =	-9.241 T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-1.821 - 0.6 =	-2.421 T-M
My2 =	My-abs(Mxy^2/Mx) =	-7.796 - 1.147 =	-6.649 T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -3.983 T-M
Myd = -9.241 T-M

ALONG X - DIRECTION :

Mu = 3.983 T-m
Φ*Kn = Mu/bd^2 deff. = 401 mm
Mu/bd^2 = 3.983X10^7/(1000X401^2) = 0.248 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007 Reqd. Ast = 0.0007X1000X401/100 = 2.81 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0025

ALONG Y - DIRECTION :

Mu = 9.241 T-m
Φ*Kn = Mu/bd^2 deff. = 417 mm
Mu/bd^2 = 9.241X10^7/(1000X417^2) = 0.531 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014 Reqd. Ast = 0.0014X1000X417/100 = 5.84 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0024

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.064 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 34 , L/C No. - 101)*

Vu = 2.566 T

Provided Pt = 0.0025

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0025X2.566X10^4X401/3.983/10^7)X1000X401/10^4

= 38.398 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0025)X1000X401/10^4

= 39.662 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X401/10^4

= 68.798 T

HENCE, Vc = 38.398 T

Φt*Vc = 0.75X38.398 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 28.799 T **> 2.566T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.192 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 85 , L/C No. - 110)*

Vu = 8.006 T

Pt provided = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X8.006X10^4X417/9.241/10^7)X1000X417/10^4

= 40.087 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X417/10^4

= 41.173 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X417/10^4

= 71.543 T

HENCE, Vc = 40.087 T

Φt*Vc = 0.75X40.087 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.065 T **> 8.006T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 10 FOR DESIGN OF COLUMN MKD. C4

Size of Column = 850 mm X 650mm

Reqired area of Reinforcement = 5525 mm^2

Reinforcement Provided = 20 no. 20 dia bars

Area of Reinforcment Provided = 6283 mm^2

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File for Support Reactions, Moments and Joint Displacements

Maximum deflection for LC - 6 - 10mm < (Allowable -3500/300 = 11.7mm)

6.5 Design of Foundation mkd. F5

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical support reactions for node no. 739 of Concentrate Storage Staad Model
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.65m	0.85m
Size of fdn. raft :	3.00m	3.50m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	1.00 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3*3.5*0.5*25)+(0.65*0.85*3*25) = 172.69KN
Weight of soil = ((3*3.5)-(0.65*0.85))*2.5*18 = 447.64KN
Total = 620.33KN

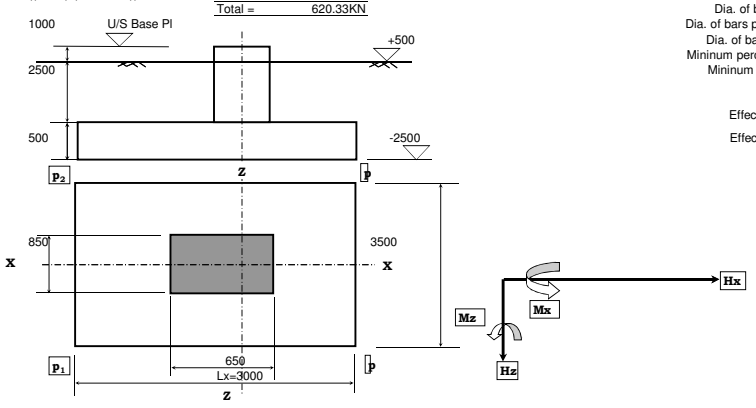

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f_y=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	16mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	16mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 415mm = 0.415m
Effective depth of slab along Z direction = 395mm = 0.395m
Clear projection along Z direction = 1.325m
Clear projection along X direction = 1.175m

H_X=Force along X-X direction
Hz=Force along Z-Z direction
M_X=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.5) *1.8 = 4.5 T/m^2
ii) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model
iii) Surcharge on foundation raft due to material storage = 10 T/m^2 (assumed)

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007
Stability of foundation has been checked for the most critical support reactions for node no. 737 of Concentrate Storage Staad Model

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR	36.8	-0.4	0.0	0.0	0.0	657.1	-0.4	-1.4	0.0	0.0
2 DL+0.75*(LL+LR+W(+X))	-115.1	-65.2	0.0	46.3	0.0	505.2	-65.2	-228.2	46.3	162.0
3 DL+0.75*(LL+LR+W(-X))	-133.2	-69.6	0.0	5.6	0.0	487.2	-69.6	-243.4	5.6	19.7
4 DL+0.75*(LL+LR+W(+Z))	39.5	0.7	0.0	0.0	0.0	659.8	0.7	2.5	0.0	0.0
5 DL+0.75*(LL+LR+W(-Z))	37.6	0.1	0.0	0.0	0.0	657.9	0.1	0.2	0.0	0.0
6 0.6*D + 1.0W(+X)	-181.5	-85.8	0.0	61.7	0.0	438.8	-85.8	-300.3	61.7	216.0
7 0.6*D + 1.0W(-X)	-205.6	-91.6	0.0	7.5	0.0	414.7	-91.6	-320.6	7.5	26.3
8 0.6*D + 1.0W(+Z)	24.6	2.1	0.0	0.0	0.0	644.9	2.1	7.4	0.0	0.0
9 0.6*D + 1.0W(-Z)	22.1	1.2	0.0	0.0	0.0	642.4	1.2	4.2	0.0	0.0
10 DL+LL	33.3	-1.1	0.0	0.0	0.0	653.6	-1.1	-3.9	0.0	0.0
11 DL+LR	38.6	0.1	0.0	0.0	0.0	658.9	0.1	0.3	0.0	0.0

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR	657.11	-0.40	-1.40	0.00	0.00	704.04	-	657.11	-
2 DL+0.75*(LL+LR+W(+X))	505.23	-65.20	-228.20	46.28	161.96	3.32	5.46	3.10	4.37
3 DL+0.75*(LL+LR+W(-X))	487.16	-69.55	-243.43	5.63	19.69	3.00	43.30	2.80	34.64
4 DL+0.75*(LL+LR+W(+Z))	659.81	0.73	2.54	0.00	0.00	390.03	-	364.03	-
5 DL+0.75*(LL+LR+W(-Z))	657.93	0.05	0.18	0.00	0.00	5639.40	-	5263.44	-
6 0.6*D + 1.0W(+X)	438.83	-85.80	-300.30	61.70	215.95	2.19	3.56	1.84	2.56
7 0.6*D + 1.0W(-X)	414.73	-91.60	-320.60	7.50	26.25	1.94	27.65	1.63	19.91
8 0.6*D + 1.0W(+Z)	644.93	2.10	7.35	0.00	0.00	131.62	-	110.56	-
9 0.6*D + 1.0W(-Z)	642.43	1.20	4.20	0.00	0.00	229.44	-	192.73	-
10 DL+LL	653.63	-1.10	-3.85	0.00	0.00	254.66	-	213.92	-
11 DL+LR	658.93	0.10	0.35	0.00	0.00	2823.99	-	2372.15	-

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 2)	26.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 2)	0 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.5 T/m2
		> 26 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X)
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X)
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z)
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z)
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	500	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	20.795	T-M	Corresponding Mxy	-2.227	T-M	*(Plate No. - 98 , L/C No. - 111)*
Min. Mx	-13.851	T-M	Corresponding Mxy	3.434	T-M	*(Plate No. - 7 , L/C No. - 111)*
Max. My	17.414	T-M	Corresponding Mxy	-3.798	T-M	*(Plate No. - 93 , L/C No. - 106)*
Min. My	-8.983	T-M	Corresponding Mxy	4.675	T-M	*(Plate No. - 12 , L/C No. - 106)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	20.795 + 2.227 =	23.022 T-M
My1 =	My + abs(Mxy) =	17.414 + 3.798 =	21.212 T-M
Mx2 =	Mx+abs(Mxy^2/My) =	20.795 + 0.285 =	21.08 T-M
My2 =	My+abs(Mxy^2/Mx) =	17.414 + 0.694 =	18.108 T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 23.022 T-m
Myd = 21.212 T-m

ALONG X - DIRECTION :

Mu = 23.022 T-m
Φ*Kn = Mu/bd^2 deff. = 387.5 mm
Mu/bd^2 = 23.022X10^7/(1000X387.5^2) = 1.533 N/mm^2 < 6.9 N/mm^2
Pt = 0.0042 Reqd. Ast = 0.0042X1000X387.5/100 = 16.28 cm^2
Provided **25** mm @ **200** C/C (Provide Ast = 24.54 cm2) at Horizontal

Total Provide Ast = 24.54 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0063

ALONG Y - DIRECTION :

Mu = 21.212 T-m
Φ*Kn = Mu/bd^2 deff. = 412.5 mm
Mu/bd^2 = 21.212X10^7/(1000X412.5^2) = 1.247 N/mm^2 < 6.9 N/mm^2
Pt = 0.0034 Reqd. Ast = 0.0034X1000X412.5/100 = 14.03 cm^2
Provided **25** mm @ **200** C/C (Provide Ast = 24.54 cm2) at Horizontal

Total Provide Ast = 24.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0059

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-13.851 - 3.434 =	-17.285 T-M
My1 =	My - abs(Mxy) =	-8.983 - 4.675 =	-13.658 T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-13.851 - 1.313 =	-15.164 T-M
My2 =	My-abs(Mxy^2/Mx) =	-8.983 - 1.578 =	-7.405 T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -17.285 T-M
Myd = -13.658 T-M

ALONG X - DIRECTION :

Mu = 17.285 T-m
Φ*Kn = Mu/bd^2 deff. = 395 mm
Mu/bd^2 = 17.285X10^7/(1000X395^2) = 1.108 N/mm^2 < 6.9 N/mm^2
Pt = 0.0030 Reqd. Ast = 0.003X1000X395/100 = 11.85 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.004

ALONG Y - DIRECTION :

Mu = 13.658 T-m
Φ*Kn = Mu/bd^2 deff. = 415 mm
Mu/bd^2 = 13.658X10^7/(1000X415^2) = 0.793 N/mm^2 < 6.9 N/mm^2
Pt = 0.0021 Reqd. Ast = 0.0021X1000X415/100 = 8.72 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0038

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.349 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 100 , L/C No. - 111)*

Vu = 13.786 T

Provided Pt = 0.0063

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0063X13.786X10^4X395/17.285/10^7)X1000X395/10^4

= 38.722 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0063)X1000X395/10^4

= 41.62 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X395/10^4

= 67.769 T

HENCE, Vc = 38.722 T

Φt*Vc = 0.75X38.722 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 29.042 T **> 13.786T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.327 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 86 , L/C No. - 106)*

Vu = 13.571 T

Pt provided = 0.0038

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0038X13.571X10^4X415/13.658/10^7)X1000X415/10^4

= 40.388 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0038)X1000X415/10^4

= 41.964 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X415/10^4

= 71.2 T

HENCE, Vc = 40.388 T

Φt*Vc = 0.75X40.388 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.291 T **> 13.571T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 11 FOR DESIGN OF COLUMN MKD. C5

Size of Column = 850 mm X 650mm

Reqired area of Reinforcement = 7569 mm^2

Reinforcement Provided = 20 no. 25 dia bars

Area of Reinforcment Provided = 9817 mm^2

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File for Support Reactions, Moments and Joint Displacements

Maximum deflection for LC - 6 - 10mm < (Allowable -3500/300 = 11.7mm)

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

6.6 Design of Foundation mkd. F6

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 8 of Concentrate Storage Staad Model.
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.65m
Size of fdn. raft :	3.50m	2.75m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	1.00 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3.5*2.75*0.5*25)+(0.85*0.65*3*25) = 161.75KN
Weight of soil = ((3.5*2.75)-(0.85*0.65))*2.5*18 = 408.26KN
Total = 570.01KN

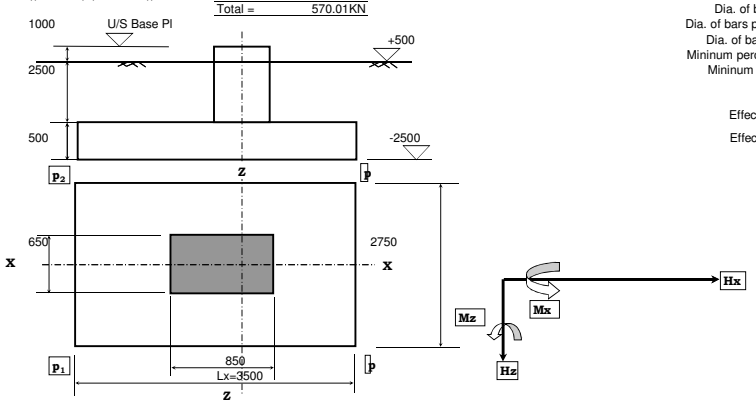

Design Input:

Characteristic strength of concrete, f'_c=	35 MPa
Yield stress of steel reinforcement, f_y=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 415mm = 0.415m
Effective depth of slab along Z direction = 395mm = 0.395m
Clear projection along Z direction = 1.05m
Clear projection along X direction = 1.325m

H_X=Force along X-X direction
Hz=Force along Z-Z direction
M_X=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.5) *1.8 = 4.5 T/m^2
ii) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR	207.7	-10.7	0.0	-0.7	0.0	777.7	-10.7	-37.5	-0.7	-2.5
2 DL+0.75*(LL+LR+W(+X))	103.2	-32.6	0.0	0.1	0.0	673.2	-32.6	-113.9	0.1	0.2
3 DL+0.75*(LL+LR+W(-X))	184.6	-7.3	0.0	-0.7	0.0	754.6	-7.3	-25.5	-0.7	-2.5
4 DL+0.75*(LL+LR+W(+Z))	194.3	-11.0	0.0	-0.4	0.0	764.3	-11.0	-38.3	-0.4	-1.4
5 DL+0.75*(LL+LR+W(-Z))	193.7	-11.0	0.0	-0.6	0.0	763.7	-11.0	-38.6	-0.6	-1.9
6 0.6*D + 1.0W(+X)	-45.5	-30.8	0.0	1.1	0.0	524.5	-30.8	-107.9	1.1	3.7
7 0.6*D + 1.0W(-X)	63.0	2.9	0.0	0.1	0.0	633.0	2.9	10.0	0.1	0.2
8 0.6*D + 1.0W(+Z)	76.0	-2.0	0.0	0.5	0.0	646.0	-2.0	-7.1	0.5	1.6
9 0.6*D + 1.0W(-Z)	75.1	-2.1	0.0	0.3	0.0	645.1	-2.1	-7.5	0.3	0.9
10 DL+LL	212.4	-11.0	1.0	-0.7	1.0	782.4	-11.0	-37.5	-0.7	-1.5
11 DL+LR	187.5	-9.9	2.0	-0.7	2.0	757.5	-9.9	-32.7	-0.7	-0.5

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR	777.69	-10.73	-37.54	-0.70	-2.45	36.26	436.46	29.00	444.39
2 DL+0.75*(LL+LR+W(+X))	673.21	-32.55	-113.93	0.05	0.18	10.34	5289.51	8.27	5385.68
3 DL+0.75*(LL+LR+W(-X))	754.59	-7.28	-25.46	-0.70	-2.45	51.86	423.49	41.49	431.19
4 DL+0.75*(LL+LR+W(+Z))	764.34	-10.95	-38.33	-0.40	-1.40	34.90	750.69	27.92	764.34
5 DL+0.75*(LL+LR+W(-Z))	763.66	-11.03	-38.59	-0.55	-1.93	34.63	545.47	27.71	555.39
6 0.6*D + 1.0W(+X)	524.49	-30.84	-107.94	1.06	3.71	8.50	194.39	6.12	178.13
7 0.6*D + 1.0W(-X)	632.99	2.86	10.01	0.06	0.21	110.66	4144.58	79.68	3797.94
8 0.6*D + 1.0W(+Z)	645.99	-2.04	-7.14	0.46	1.61	158.33	551.70	114.00	505.56
9 0.6*D + 1.0W(-Z)	645.09	-2.14	-7.49	0.26	0.91	150.72	974.72	108.52	893.20
10 DL+LL	782.41	-11.00	-37.50	-0.70	-1.45	36.51	741.94	25.61	402.38
11 DL+LR	757.51	-9.90	-32.65	-0.70	-0.45	40.60	2314.61	27.55	389.58

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	10.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 6)	0 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.5 T/m2
		> 10 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X)
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X)
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z)
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z)
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	500	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	4.109	T-M	Corresponding Mxy	0.444	T-M	*(Plate No. - 67 , L/C No. - 102)*
Min. Mx	-2.759	T-M	Corresponding Mxy	-0.732	T-M	*(Plate No. - 22 , L/C No. - 102)*
Max. My	7.458	T-M	Corresponding Mxy	0.865	T-M	*(Plate No. - 64 , L/C No. - 106)*
Min. My	-3.473	T-M	Corresponding Mxy	-1.127	T-M	*(Plate No. - 26 , L/C No. - 110)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	4.109 + 0.444 =	4.553	T-M
My1 =	My + abs(Mxy) =	7.458 + 0.865 =	8.323	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	4.109 + 0.026 =	4.135	T-M
My2 =	My+abs(Mxy^2/Mx) =	7.458 + 0.182 =	7.64	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 4.553 T-m
Myd = 8.323 T-m

ALONG X - DIRECTION :

Mu = 4.553 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.553X10^7/(1000X401^2) = 0.283 N/mm^2 < deff. = 401 mm → 6.9 N/mm^2
Pt = 0.0008 Reqd. Ast = 0.0008X1000X401/100 = 3.21 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.0025

ALONG Y - DIRECTION :

Mu = 8.323 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 8.323X10^7/(1000X417^2) = 0.479 N/mm^2 < deff. = 417 mm → 6.9 N/mm^2
Pt = 0.0013 Reqd. Ast = 0.0013X1000X417/100 = 5.42 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0024

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-2.759 - 0.732 =	-3.491	T-M
My1 =	My - abs(Mxy) =	-3.473 - 1.127 =	-4.6	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-2.759 - 0.154 =	-2.913	T-M
My2 =	My-abs(Mxy^2/Mx) =	-3.473 - 0.46 =	-3.013	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -3.491 T-M
Myd = -4.6 T-M

ALONG X - DIRECTION :

Mu = 3.491 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 3.491X10^7/(1000X401^2) = 0.217 N/mm^2 < deff. = 401 mm → 6.9 N/mm^2
Pt = 0.0006 Reqd. Ast = 0.0006X1000X401/100 = 2.41 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0025

ALONG Y - DIRECTION :

Mu = 4.6 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 4.6X10^7/(1000X417^2) = 0.265 N/mm^2 < deff. = 417 mm → 6.9 N/mm^2
Pt = 0.0007 Reqd. Ast = 0.0007X1000X417/100 = 2.92 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0024

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.068 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 65 , L/C No. - 102)*

Vu = 2.727 T

Provided Pt = 0.0025

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0025X2.727X10^4X401/3.491/10^7)X1000X401/10^4

= 38.491 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0025)X1000X401/10^4

= 39.662 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X401/10^4

= 68.798 T

HENCE, Vc = 38.491 T

Φt*Vc = 0.75X38.491 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 28.868 T **> 2.727T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.118 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 56 , L/C No. - 106)*

Vu = 4.921 T

Pt provided = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X4.921X10^4X417/4.6/10^7)X1000X417/10^4

= 40.231 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X417/10^4

= 41.173 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X417/10^4

= 71.543 T

HENCE, Vc = 40.231 T

Φt*Vc = 0.75X40.231 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 30.173 T **> 4.921T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 9 FOR DESIGN OF COLUMN MKD. C3

Size of Column = 850 mm X 650mm

Reqired area of Reinforcement = 5525 mm^2

Reinforcment Provided = 20 no. 20 dia bars

Area of Reinforcment Provided = 6283 mm^2

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File for Support Reactions, Moments and Joint Displacements

Maximum deflection for LC - 6 - 8mm < (Allowable -3500/300 = 11.7mm)

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

6.7 Design of Foundation mkd. F7

Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical support reactions for node no. 1841 of Concentrate Storage Staad Model
Please Refer Attachment No. 13 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.50m	0.50m
Size of fdn. raft :	2.00m	2.00m
Thickness of raft :	0.35 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	1.00 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (2*2*0.35*25)+(0.5*0.5*3.15*25) = 54.69KN
Weight of soil = ((2*2)-(0.5*0.5))*2.65*18 = 178.88KN
Total = 233.56KN

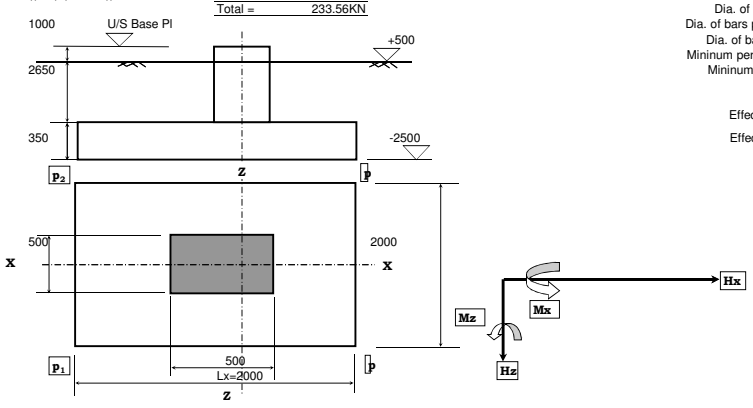

Design Input:

Characteristic strength of concrete, f 'c=	35 MPa
Yield stress of steel reinforcement, fy=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	16mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	16mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 267mm = 0.267m
Effective depth of slab along Z direction = 251mm = 0.251m
Clear projection along Z direction = 0.75m
Clear projection along X direction = 0.75m

H_X=Force along X-X direction
Hz=Force along Z-Z direction
M_X=Moment about X-X direction
Mz=Moment about Z-Z direction

Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.35) *1.8 = 4.77 T/m^2
ii) Load from Storage superstructure to Pedestal from Concentrate Storage Staad Model
iii) Surcharge on foundation raft due to material storage = 10 T/m^2 (assumed)

SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD





Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
1 DL+0.75*LL+0.75*LR	5.9	-0.5	0.0	-0.5	0.0	239.5	-0.5	-1.8	-0.5	-1.8
2 DL+0.75*(LL+LR+W(+X))	13.7	-0.5	0.0	0.5	0.0	247.3	-0.5	-1.8	0.5	1.6
3 DL+0.75*(LL+LR+W(-X))	3.2	2.1	0.0	-0.5	0.0	236.8	2.1	7.4	-0.5	-1.8
4 DL+0.75*(LL+LR+W(+Z))	10.3	-0.5	0.0	-0.5	0.0	243.8	-0.5	-1.8	-0.5	-1.6
5 DL+0.75*(LL+LR+W(-Z))	8.6	-0.5	0.0	-0.7	0.0	242.2	-0.5	-1.8	-0.7	-2.4
6 0.6*D + 1.0W(+X)	15.9	-0.3	0.0	1.4	0.0	249.4	-0.3	-1.1	1.4	5.0
7 0.6*D + 1.0W(-X)	1.9	3.2	0.0	0.1	0.0	235.4	3.2	11.2	0.1	0.4
8 0.6*D + 1.0W(+Z)	11.3	-0.3	0.0	0.2	0.0	244.8	-0.3	-1.1	0.2	0.8
9 0.6*D + 1.0W(-Z)	9.1	-0.3	0.0	-0.1	0.0	242.6	-0.3	-1.1	-0.1	-0.3
10 DL+LL	6.1	-0.5	0.0	-0.6	0.0	239.7	-0.5	-1.8	-0.6	-2.1
11 DL+LR	3.1	-0.5	0.0	-0.5	0.0	236.7	-0.5	-1.8	-0.5	-1.8

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (m = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
1 DL+0.75*LL+0.75*LR	239.46	-0.50	-1.75	-0.53	-1.84	136.83	130.32	191.57	182.45
2 DL+0.75*(LL+LR+W(+X))	247.26	-0.50	-1.75	0.45	1.58	141.29	156.99	197.81	219.79
3 DL+0.75*(LL+LR+W(-X))	236.76	2.13	7.44	-0.53	-1.84	31.83	128.85	44.57	180.39
4 DL+0.75*(LL+LR+W(+Z))	243.81	-0.50	-1.75	-0.45	-1.58	139.32	154.80	195.05	216.72
5 DL+0.75*(LL+LR+W(-Z))	242.16	-0.50	-1.75	-0.68	-2.36	138.38	102.50	193.73	143.50
6 0.6*D + 1.0W(+X)	249.42	-0.30	-1.05	1.42	4.97	237.54	50.19	299.30	63.23
7 0.6*D + 1.0W(-X)	235.42	3.20	11.20	0.12	0.42	21.02	560.52	26.48	706.26
8 0.6*D + 1.0W(+Z)	244.82	-0.30	-1.05	0.22	0.77	233.16	317.95	293.78	400.61
9 0.6*D + 1.0W(-Z)	242.62	-0.30	-1.05	-0.08	-0.28	231.07	866.50	291.14	1091.79
10 DL+LL	239.66	-0.50	-1.75	-0.60	-2.10	136.95	114.12	172.56	143.80
11 DL+LR	236.66	-0.50	-1.75	-0.50	-1.75	135.23	135.23	170.40	170.40

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 3)	7.00 T/m2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 7)	3 T/m2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report for BH- 07)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.5 T/m2
		> 7 T/m2 - OK

Foundation has been designed with the strength Load Combinations as follows (LC 100 - LC 113) as per Table 5.3.1, SBC 304:2018

LOAD COMB 100 1.4*(DL+LL)
LOAD COMB 101 1.4DL+1.7LL + 0.5LR
LOAD COMB 102 1.2DL+1.6LR+0.5W(+X)
LOAD COMB 103 1.2DL+1.6LR+0.5W(-X)
LOAD COMB 104 1.2DL+1.6LR+0.5W(+Z)
LOAD COMB 105 1.2DL+1.6LR+0.5W(-Z)
LOAD COMB 106 1.2DL+1.0L+0.5LR+1.6W(+X) + 1.6H
LOAD COMB 107 1.2DL+1.0L+0.5LR+1.6W(-X) + 1.6H
LOAD COMB 108 1.2DL+1.0L+0.5LR+1.6W(+Z) + 1.6H
LOAD COMB 109 1.2DL+1.0L+0.5LR+1.6W(-Z) + 1.6H
LOAD COMB 110 0.9D + 1.6W(+X) + 0.9H
LOAD COMB 111 0.9D + 1.6W(-X) + 0.9H
LOAD COMB 112 0.9D + 1.6W(-Z)+ 0.9H
LOAD COMB 113 0.9D + 1.6W(-Z)+ 0.9H

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REINFORCEMENT CALCULATION OF FOUNDATION:

Foundation Slab Thickness =	350	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

(Staad Group : WALL_BOTTOM)

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	0.5	T-M	Corresponding Mxy	0.075	T-M	*(Plate No. - 93 , L/C No. - 100)*
Min. Mx	-0.027	T-M	Corresponding Mxy	-0.143	T-M	*(Plate No. - 63 , L/C No. - 107)*
Max. My	0.56	T-M	Corresponding Mxy	-0.054	T-M	*(Plate No. - 67 , L/C No. - 110)*
Min. My	-0.307	T-M	Corresponding Mxy	-0.076	T-M	*(Plate No. - 64 , L/C No. - 107)*

FOR OPPOSITE FACE REINFORCEMRNT :

Mx1 =	Mx + abs(Mxy) =	0.5 + 0.075 =	0.575	T-M
My1 =	My + abs(Mxy) =	0.56 + 0.054 =	0.614	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	0.5 + 0.01 =	0.51	T-M
My2 =	My+abs(Mxy^2/Mx) =	0.56 + 0.006 =	0.566	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT :

Mxd = 0.575 T-m
Myd = 0.614 T-m

ALONG X - DIRECTION :

Mu = 0.575 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.575X10^7/(1000X251^2) = 0.091 N/mm^2 < deff. = 251 mm → 6.9 N/mm^2
Pt = 0.0002 Reqd. Ast = 0.0002X1000X251/100 = 0.5 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.004

ALONG Y - DIRECTION :

Mu = 0.614 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.614X10^7/(1000X267^2) = 0.086 N/mm^2 < deff. = 267 mm → 6.9 N/mm^2
Pt = 0.0002 Reqd. Ast = 0.0002X1000X267/100 = 0.53 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0038

FOR RETAINED FACE REINFORCEMRNT :

Mx1 =	Mx - abs(Mxy) =	-0.027 - 0.143 =	-0.17	T-M
My1 =	My - abs(Mxy) =	-0.307 - 0.076 =	-0.383	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-0.027 - 0.067 =	-0.094	T-M
My2 =	My-abs(Mxy^2/Mx) =	-0.307 - 0.214 =	-0.093	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT :

Mxd = -0.17 T-M
Myd = -0.383 T-M

ALONG X - DIRECTION :

Mu = 0.17 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.17X10^7/(1000X257^2) = 0.026 N/mm^2 < deff. = 257 mm → 6.9 N/mm^2
Pt = 0.0001 Reqd. Ast = 0.0001X1000X257/100 = 0.26 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0022

ALONG Y - DIRECTION :

Mu = 0.383 T-m
Φ*Kn = Mu/bd^2
Mu/bd^2 = 0.383X10^7/(1000X269^2) = 0.053 N/mm^2 < deff. = 269 mm → 6.9 N/mm^2
Pt = 0.0001 Reqd. Ast = 0.0001X1000X269/100 = 0.27 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.0021

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.028 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 66 , L/C No. - 110)*

Vu = 0.72 T

Provided Pt = 0.004

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.004X0.72X10^4X257/(0.17/10^7)X1000X257/10^4

= 26.229 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.004)X1000X257/10^4

= 26.075 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X257/10^4

= 44.093 T

HENCE, Vc = 26.075 T

Φt*Vc = 0.75X26.075 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 19.556 T **> 0.72T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = -0.031 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 29 , L/C No. - 107)*

Vu = 0.834 T

Pt provided = 0.0021

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0021X0.834X10^4X269/0.383/10^7)X1000X269/10^4

= 26.025 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0021)X1000X269/10^4

= 26.423 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X269/10^4

= 46.151 T

HENCE, Vc = 26.025 T

Φt*Vc = 0.75X26.025 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 19.519 T **> 0.834T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO ATTACHMENT NO. 12 FOR DESIGN OF COLUMN MKD. C7

Size of Column = 500 X 500

Reqired area of Reinforcement = 2500 mm^2

Reinforcement Provided = 8 no. 20 dia bars

Area of Reinforcment Provided = 2513 mm^2

Allowable deflection limit of columns = Height/300 (From Maaden Design Criteria No. MD-101-SMEM-EG-ST-CRT-0001)

Refer to Output File for Support Reactions, Moments and Joint Displacements

Maximum deflection for LC - 6 - 2mm < (Allowable -3500/300 = 11.7mm)

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

REFERENCES

[1] Structural Loading and Forces ; SBC Code 301: 2007

[2] Saudi Concrete Structures Code ; SBC 304 : 2018

[3] Civil,Structural and Architectural Design Criteria ; MD-216-1000-EG-ST-CRT-1001

[4] ACI 318 : 2014 Building Code Requirement of Structural Concrete

[5] Geotechnical Report No. MD-216-3000-EG-CV-RPT-1008

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI

ATTACHMENT 1 STAAD INPUT & OUTPUT FILE OF RETAINING WALL RW-1

```
STAAD PLANE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
UNIT METER MTON
SET ECHO OFF
JOINT COORDINATES
1 0 0 0; 2 0 8 0; 4 -1 0 0; 5 -0.5 0 0; 6 0.5 0 0; 7 1 0 0; 8 1.5 0 0; 9 2 0 0;
10 2.5 0 0; 11 3 0 0; 17 0 3 0;
MEMBER INCIDENCES
1 2 17; 2 1 6; 3 4 5; 4 5 1; 5 6 7; 6 7 8; 7 8 9; 8 9 10; 9 10 11; 16 17 1;
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
1 PRIS YD 0.4 ZD 1
MEMBER PROPERTY AMERICAN
16 PRIS YD 0.6 ZD 1
2 5 TO 9 PRIS YD 0.6 ZD 1
MEMBER PROPERTY AMERICAN
3 4 PRIS YD 0.6 ZD 1
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
1 5 TO 11 FIXED BUT MZ KFX 2475 KFY 2700
4 FIXED BUT MZ KFX 1237.5 KFY 1350
LOAD 1 LOADTYPE None  TITLE LOAD CASE 1
SELFWEIGHT Y -1
MEMBER LOAD
3 4 UNI GY -2.8
9 TRAP GY -8.4 -7.6
8 TRAP GY -9.2 -8.4
7 TRAP GY -10 -9.2
6 TRAP GY -10.8 -10
5 TRAP GY -11.6 -10.8
2 TRAP GY -12.4 -11.6
*****************************************
LOAD 2 LOADTYPE None  TITLE HORIZONTAL LOAD(H)
MEMBER LOAD
1 TRAP GX 0 -2.64
16 TRAP GX -2.64 -3.5 0 1.5
16 TRAP GX -3.5 -4.1 1.5 3
*****************************************
LOAD 3 LOADTYPE Seismic  TITLE SEISMIC LOAD
MEMBER LOAD
1 CON GX -0.6 4
****LOAD COMBS FOR ALLOWABLE STRESS DESIGN************************************************
LOAD COMB 10 DL + H
1 1.0 2 1.0
LOAD COMB 11 DL + 0.7E + H
1 1.0 2 1.0 3 0.7
LOAD COMB 12 0.6*DL + 0.7E + H
1 0.6 2 1.0 3 0.7
*****************************************
*LOAD COMBS FOR STRENGTH DESIGN
*AS PER ACI 318 : 2014 & SBC 304:2018
LOAD COMB 20 1.2*DL + 1.6H
1 1.2 2 1.6
LOAD COMB 21 1.2*DL + 1.0E
1 1.2 3 1.0
LOAD COMB 22 0.9*DL + 1.0E + 1.6H
1 0.9 3 1.0 2 1.6
PERFORM ANALYSIS PRINT STATICS CHECK
LOAD LIST 1 TO 3 10 TO 12
PRINT SUPPORT REACTION ALL
PRINT JOINT DISPLACEMENTS LIST 2
FINISH
```

```
*****************************************************
*                                                   *
*           STAAD.Pro V8i SELECTseries5             *
*           Version  20.07.10.64                    *
*           Proprietary Program of                  *
*           Bentley Systems, Inc.                   *
*           Date=    JAN 28, 2020                   *
*           Time=    15:42:14                       *
*                                                   *
*      USER ID: LNT ECC DIV                         *
*****************************************************
```

```
     1. STAAD PLANE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_RW-1.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. SET ECHO OFF
```

```
          P R O B L E M   S T A T I S T I C S
          -----------------------------------

    NUMBER OF JOINTS         11  NUMBER OF MEMBERS      10
    NUMBER OF PLATES          0  NUMBER OF SOLIDS        0
    NUMBER OF SURFACES        0  NUMBER OF SUPPORTS      9

         SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

    ORIGINAL/FINAL BAND-WIDTH=    10/     2/      9 DOF
  TOTAL      PRIMARY LOAD CASES =     3, TOTAL DEGREES OF FREEDOM =      33
  TOTAL LOAD COMBINATION  CASES =     6  SO FAR.
    SIZE OF STIFFNESS MATRIX =        1 DOUBLE  KILO-WORDS
    REQRD/AVAIL. DISK SPACE  =     12.0/ 166910.2 MB
```

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE NONE TITLE LOAD CASE 1

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.959536498E+00
Y = 0.690114965E+00
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -47.70
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -45.77

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 47.70
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 45.77

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X =	-9.14836E-02	2
Y =	-2.41490E-01	4
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	3.21595E-04	11

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE NONE TITLE HORIZONTAL LOAD(H)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.267154681E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = -16.91
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 45.16

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 16.91
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -45.16

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	-3.48782E+00	2
Y =	-3.33688E-01	4
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	5.10762E-03	2

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE SEISMIC TITLE SEISMIC LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.400000010E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = -0.60
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 2.40

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.60
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -2.40

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X =	-1.78055E-01	2
Y =	-1.77327E-02	4
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	2.45895E-04	2

********** END OF DATA FROM INTERNAL STORAGE **********

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = PLANE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	6.32	0.00	0.00	0.00	0.00
	2	2.01	3.73	0.00	0.00	0.00	0.00
	3	0.07	0.20	0.00	0.00	0.00	0.00
	10	2.01	10.05	0.00	0.00	0.00	0.00
	11	2.06	10.19	0.00	0.00	0.00	0.00
	12	2.06	7.66	0.00	0.00	0.00	0.00
5	1	0.00	6.43	0.00	0.00	0.00	0.00
	2	2.01	6.39	0.00	0.00	0.00	0.00
	3	0.07	0.34	0.00	0.00	0.00	0.00
	10	2.01	12.81	0.00	0.00	0.00	0.00
	11	2.06	13.05	0.00	0.00	0.00	0.00
	12	2.06	10.48	0.00	0.00	0.00	0.00
6	1	0.00	6.12	0.00	0.00	0.00	0.00
	2	2.00	1.34	0.00	0.00	0.00	0.00
	3	0.07	0.07	0.00	0.00	0.00	0.00
	10	2.00	7.46	0.00	0.00	0.00	0.00
	11	2.05	7.51	0.00	0.00	0.00	0.00
	12	2.05	5.06	0.00	0.00	0.00	0.00
7	1	0.00	5.86	0.00	0.00	0.00	0.00
	2	1.99	-0.55	0.00	0.00	0.00	0.00
	3	0.07	-0.03	0.00	0.00	0.00	0.00
	10	1.99	5.31	0.00	0.00	0.00	0.00
	11	2.04	5.29	0.00	0.00	0.00	0.00
	12	2.04	2.95	0.00	0.00	0.00	0.00
8	1	0.00	5.53	0.00	0.00	0.00	0.00
	2	1.98	-2.06	0.00	0.00	0.00	0.00
	3	0.07	-0.11	0.00	0.00	0.00	0.00
	10	1.98	3.47	0.00	0.00	0.00	0.00
	11	2.03	3.39	0.00	0.00	0.00	0.00
	12	2.03	1.18	0.00	0.00	0.00	0.00
9	1	0.00	5.15	0.00	0.00	0.00	0.00
	2	1.98	-3.32	0.00	0.00	0.00	0.00
	3	0.07	-0.18	0.00	0.00	0.00	0.00
	10	1.98	1.82	0.00	0.00	0.00	0.00
	11	2.03	1.70	0.00	0.00	0.00	0.00
	12	2.03	-0.36	0.00	0.00	0.00	0.00
10	1	0.00	4.73	0.00	0.00	0.00	0.00
	2	1.97	-4.46	0.00	0.00	0.00	0.00
	3	0.07	-0.24	0.00	0.00	0.00	0.00
	10	1.97	0.27	0.00	0.00	0.00	0.00
	11	2.02	0.10	0.00	0.00	0.00	0.00
	12	2.02	-1.79	0.00	0.00	0.00	0.00
11	1	0.00	4.30	0.00	0.00	0.00	0.00
	2	1.97	-5.56	0.00	0.00	0.00	0.00
	3	0.07	-0.30	0.00	0.00	0.00	0.00
	10	1.97	-1.26	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = PLANE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	2.02	-1.47	0.00	0.00	0.00	0.00
	12	2.02	-3.19	0.00	0.00	0.00	0.00
4	1	0.00	3.26	0.00	0.00	0.00	0.00
	2	1.00	4.50	0.00	0.00	0.00	0.00
	3	0.04	0.24	0.00	0.00	0.00	0.00
	10	1.00	7.76	0.00	0.00	0.00	0.00
	11	1.03	7.93	0.00	0.00	0.00	0.00
	12	1.03	6.63	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = PLANE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	-0.0915	-0.2370	0.0000	0.0000	0.0000	0.0001
	2	-3.4878	-0.1382	0.0000	0.0000	0.0000	0.0051
	3	-0.1781	-0.0073	0.0000	0.0000	0.0000	0.0002
	10	-3.5793	-0.3752	0.0000	0.0000	0.0000	0.0052
	11	-3.7039	-0.3803	0.0000	0.0000	0.0000	0.0054
	12	-3.6673	-0.2855	0.0000	0.0000	0.0000	0.0053

********** END OF LATEST ANALYSIS RESULT **********

********** END OF THE STAAD.Pro RUN **********

**** DATE= JAN 28,2020 TIME= 15:42:20 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 2 STAAD INPUT & OUTPUT FILE OF RETAINING WALL RW-2

```
STAAD PLANE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
UNIT METER MTON
JOINT COORDINATES
1 0 0 0; 2 0 7 0; 4 -1 0 0; 5 -0.5 0 0; 6 0.5 0 0; 7 1 0 0; 8 1.5 0 0; 9 2 0 0;
17 0 3 0;
MEMBER INCIDENCES
1 2 17; 2 1 6; 3 4 5; 4 5 1; 5 6 7; 6 7 8; 7 8 9; 16 17 1;
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
1 PRIS YD 0.25 ZD 1
MEMBER PROPERTY AMERICAN
16 PRIS YD 0.4 ZD 1
2 TO 7 PRIS YD 0.4 ZD 1
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
1 4 TO 9 FIXED BUT MZ KFX 2475 KFY 2700
LOAD 1 LOADTYPE None  TITLE LOAD CASE 1
SELFWEIGHT Y -1
MEMBER LOAD
2 5 TO 7 UNI GY -7.6
3 4 UNI GY -2.8
*****************************************88
LOAD 2 LOADTYPE None  TITLE HORIZONTAL LOAD
MEMBER LOAD
1 TRAP GX 0 -1.1 2
16 TRAP GX -1.1 -2.51 0 3
***********************************************
LOAD 3 LOADTYPE Seismic  TITLE SEISMIC LOAD
MEMBER LOAD
1 CON GX -0.3 3
****LOAD COMBS FOR ALLOWABLE STRESS DESIGN************************************************
LOAD COMB 10 DL + H
1 1.0 2 1.0
LOAD COMB 11 DL + 0.7E + H
1 1.0 2 1.0 3 0.7
LOAD COMB 12 0.6*DL + 0.7E + H
1 0.6 2 1.0 3 0.7
*******************************************
*LOAD COMBS FOR STRENGTH DESIGN
*AS PER ACI 318 : 2018
LOAD COMB 20 1.2*DL + 1.6H
1 1.2 2 1.6
LOAD COMB 21 1.2*DL + 1.0E
1 1.2 3 1.0
LOAD COMB 22 0.9*DL + 1.0E + 1.6H
1 0.9 3 1.0 2 1.6
PERFORM ANALYSIS PRINT STATICS CHECK
LOAD LIST 1 TO 3 10 TO 12
PRINT JOINT DISPLACEMENTS LIST 2
FINISH
```

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    JAN 28, 2020                *
*           Time=    15:46:57                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD PLANE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_RW-2.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 7 0; 4 -1 0 0; 5 -0.5 0 0; 6 0.5 0 0; 7 1 0 0; 8 1.5 0 0; 9 2 0 0
     9. 17 0 3 0
    10. MEMBER INCIDENCES
    11. 1 2 17; 2 1 6; 3 4 5; 4 5 1; 5 6 7; 6 7 8; 7 8 9; 16 17 1
    12. DEFINE MATERIAL START
    13. ISOTROPIC CONCRETE
    14. E 2.21467E+006
    15. POISSON 0.17
    16. DENSITY 2.40262
    17. ALPHA 1E-005
    18. DAMP 0.05
    19. TYPE CONCRETE
    20. STRENGTH FCU 2812.28
    21. END DEFINE MATERIAL
    22. MEMBER PROPERTY AMERICAN
    23. 1 PRIS YD 0.25 ZD 1
    24. MEMBER PROPERTY AMERICAN
    25. 16 PRIS YD 0.4 ZD 1
    26. 2 TO 7 PRIS YD 0.4 ZD 1
    27. CONSTANTS
    28. MATERIAL CONCRETE ALL
    29. SUPPORTS
    30. 1 4 TO 9 FIXED BUT MZ KFX 2475 KFY 2700
    31. LOAD 1 LOADTYPE NONE  TITLE LOAD CASE 1
    32. SELFWEIGHT Y -1
    33. MEMBER LOAD
    34. 2 5 TO 7 UNI GY -7.6
    35. 3 4 UNI GY -2.8
    36. ******************************************88
    37. LOAD 2 LOADTYPE NONE  TITLE HORIZONTAL LOAD
    38. MEMBER LOAD
```

```
39. 1 TRAP GX 0 -1.1 2
40. 16 TRAP GX -1.1 -2.51 0 3
41. ************************************************
42. LOAD 3 LOADTYPE SEISMIC  TITLE SEISMIC LOAD
43. MEMBER LOAD
44. 1 CON GX -0.3 3
45. ****LOAD COMBS FOR ALLOWABLE STRESS DESIGN************************************
46. LOAD COMB 10 DL + H
47. 1 1.0 2 1.0
48. LOAD COMB 11 DL + 0.7E + H
49. 1 1.0 2 1.0 3 0.7
50. LOAD COMB 12 0.6*DL + 0.7E + H
51. 1 0.6 2 1.0 3 0.7
52. ****************************************
53. *LOAD COMBS FOR STRENGTH DESIGN
54. *AS PER ACI 318 : 2018
55. LOAD COMB 20 1.2*DL + 1.6H
56. 1 1.2 2 1.6
57. LOAD COMB 21 1.2*DL + 1.0E
58. 1 1.2 3 1.0
59. LOAD COMB 22 0.9*DL + 1.0E + 1.6H
60. 1 0.9 3 1.0 2 1.6
61. PERFORM ANALYSIS PRINT STATICS CHECK
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**9**	**NUMBER OF MEMBERS**	**8**
NUMBER OF PLATES	**0**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**7**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 8/ 2/ 9 DOF
TOTAL PRIMARY LOAD CASES = 3, TOTAL DEGREES OF FREEDOM = 27
TOTAL LOAD COMBINATION CASES = 6 SO FAR.
SIZE OF STIFFNESS MATRIX = 1 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.0/ 166910.2 MB

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE NONE TITLE LOAD CASE 1

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.582430549E+00
Y = 0.624321680E+00
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -26.17
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -15.24

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 26.17
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 15.24

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X =	1.51316E-01	2
Y =	-1.50319E-01	7
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	-3.25273E-04	4

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE NONE TITLE HORIZONTAL LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.170350474E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = -6.52
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 11.10

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 6.52
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -11.10

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	-1.40013E+00	2
Y =	-9.94428E-02	4
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	2.15917E-03	2

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE SEISMIC TITLE SEISMIC LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.399999996E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = -0.30
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 1.20

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.30
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -1.20

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X =	-1.97780E-01	2
Y =	-1.07522E-02	4
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	3.36945E-04	2

********** END OF DATA FROM INTERNAL STORAGE **********

62. LOAD LIST 1 TO 3 10 TO 12
63. PRINT JOINT DISPLACEMENTS LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = PLANE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	0.1513	-0.1424	0.0000	0.0000	0.0000	-0.0002
	2	-1.4001	-0.0223	0.0000	0.0000	0.0000	0.0022
	3	-0.1978	-0.0024	0.0000	0.0000	0.0000	0.0003
	10	-1.2488	-0.1646	0.0000	0.0000	0.0000	0.0019
	11	-1.3873	-0.1663	0.0000	0.0000	0.0000	0.0022
	12	-1.4478	-0.1094	0.0000	0.0000	0.0000	0.0023

********** END OF LATEST ANALYSIS RESULT **********

64. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= JAN 28,2020 TIME= 15:47: 3 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3	
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023	
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT	
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD	
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC	
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI	

ATTACHMENT 3 STAAD INPUT & OUTPUT FILE OF RETAINING WALL RW-3

```
STAAD PLANE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
UNIT METER MTON
set echo off
JOINT COORDINATES
1 0 0 0; 2 0 7 0; 4 -1 0 0; 5 -0.5 0 0; 6 0.5 0 0; 7 1 0 0; 8 1.5 0 0; 9 2 0 0;
17 0 3 0; 18 -2 0 0; 19 -1.5 0 0;
MEMBER INCIDENCES
1 2 17; 2 1 6; 3 4 5; 4 5 1; 5 6 7; 6 7 8; 7 8 9; 16 17 1; 17 18 19; 18 19 4;
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
1 PRIS YD 0.25 ZD 1
MEMBER PROPERTY AMERICAN
16 PRIS YD 0.4 ZD 1
2 TO 7 17 18 PRIS YD 0.4 ZD 1
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
1 4 TO 9 19 FIXED BUT MZ KFX 2475 KFY 2700
18 FIXED BUT MZ KFX 1237.5 KFY 1350
LOAD 1 LOADTYPE None  TITLE LOAD CASE 1
SELFWEIGHT Y -1
MEMBER LOAD
2 5 TO 7 UNI GY -7.6
3 4 17 18 UNI GY -2.8
*****************************************
LOAD 2 LOADTYPE None  TITLE HORIZONTAL LOAD
MEMBER LOAD
1 TRAP GX 0 -1.1 2
16 TRAP GX -1.1 -2.51
*****************************************
LOAD 3 LOADTYPE Seismic  TITLE SEISMIC LOAD
MEMBER LOAD
1 CON GX -0.2 3
****LOAD COMBS FOR ALLOWABLE STRESS DESIGN************************************************
LOAD COMB 10 DL + H
1 1.0 2 1.0
LOAD COMB 11 DL + 0.7E + H
1 1.0  2 1.0 3 0.7
LOAD COMB 12 0.6*DL + 0.7E + H
1 0.6 2 1.0  3 0.7
*****************************************
*LOAD COMBS FOR STRENGTH DESIGN
*AS PER ACI 318 : 2018
LOAD COMB 20 1.2*DL + 1.6H
1 1.2 2 1.6
LOAD COMB 21 1.2*DL + 1.0E
1 1.2 3 1.0
LOAD COMB 22 0.9*DL + 1.0E + 1.6H
1 0.9 3 1.0  2 1.6
PERFORM ANALYSIS PRINT STATICS CHECK
LOAD LIST 10 TO 12
PRINT JOINT DISPLACEMENT LIST 2
FINISH
```

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5           *
*           Version  20.07.10.64                  *
*           Proprietary Program of                *
*           Bentley Systems, Inc.                 *
*           Date=    JAN 28, 2020                 *
*           Time=    16:19:36                     *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD PLANE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_RW-3.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. SET ECHO OFF
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**11**	**NUMBER OF MEMBERS**	**10**
NUMBER OF PLATES	**0**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**9**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 8/ 2/ 9 DOF
TOTAL PRIMARY LOAD CASES = 3, TOTAL DEGREES OF FREEDOM = 33
TOTAL LOAD COMBINATION CASES = 6 SO FAR.
SIZE OF STIFFNESS MATRIX = 1 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.0/ 166909.7 MB

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE NONE TITLE LOAD CASE 1

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.320748856E+00
Y = 0.545868377E+00
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -29.93
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -9.60

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 29.93
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 9.60

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X =	1.53469E-01	2
Y =	-1.51859E-01	7
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	-3.67015E-04	18

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE NONE TITLE HORIZONTAL LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.170350474E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = -6.52
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 11.10

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 6.52
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -11.10

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	-1.17641E+00	2
Y =	-6.40677E-02	18
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	1.84905E-03	2

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE SEISMIC TITLE SEISMIC LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.000000000E+00
Y = 0.399999993E+01
Z = 0.000000000E+00

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = -0.20
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= 0.80

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.20
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 0.00 MZ= -0.80

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X =	-1.16002E-01	2
Y =	-4.61819E-03	18
Z =	0.00000E+00	0
RX=	0.00000E+00	0
RY=	0.00000E+00	0
RZ=	2.02276E-04	2

********** END OF DATA FROM INTERNAL STORAGE **********

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = PLANE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	10	-1.0229	-0.1460	0.0000	0.0000	0.0000	0.0016
	11	-1.1041	-0.1461	0.0000	0.0000	0.0000	0.0018
	12	-1.1655	-0.0884	0.0000	0.0000	0.0000	0.0019

********** END OF LATEST ANALYSIS RESULT **********

********** END OF THE STAAD.Pro RUN **********

**** DATE= JAN 28,2020 TIME= 16:19:42 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 4 STAAD INPUT FILE OF TRIPPER CONVEYOR SUPPORTING FRAME

```
STAAD SPACE
START JOB INFORMATION
ENGINEER DATE 04-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
SET ECHO OFF
UNIT METER MTON
JOINT COORDINATES
2 0 0 4.1; 3 0 0 10.6; 4 0 0 17.1; 5 0 0 23.6; 6 0 0 30.1; 7 0 0 36.6;
8 0 0 43.1; 10 -10.06 0 0; 12 -10.06 0 9.75; 13 -10.06 0 19.5;
17 -10.85 0 43.1; 25 0 2 43.1; 27 -10.06 2 0; 34 -10.06 2 43.1; 35 0 8 0;
36 0 8 4.1; 37 0 8 10.6; 38 0 8 17.1; 39 0 8 23.6; 40 0 8 30.1; 41 0 8 36.6;
42 0 8 43.1; 43 -4.575 8 0; 44 -10.06 8 0; 52 -2.03 8 0; 59 -2.03 8 43.1;
60 -6.03 8 0; 67 -6.03 8 43.1; 69 -8.28 8 0; 73 -8.28 8 43.1; 76 -3.485 8 0;
91 -10.85 8 43.1; 92 -10.85 2 43.1; 94 -10.06 2 9.75; 102 -10.06 2 19.5;
109 -10.06 0 29.25; 110 -10.06 2 29.25; 119 -10.06 0 39; 120 -10.06 2 39;
125 -3.485 8 39.04; 128 -4.575 8 39.04; 129 -6.03 0 43.1; 130 -6.03 2 43.1;
131 -4.575 8 3.04; 132 -3.485 8 3.04; 133 -4.575 8 6.04; 134 -3.485 8 6.04;
135 -4.575 8 9.04; 136 -3.485 8 9.04; 137 -4.575 8 12.04; 138 -3.485 8 12.04;
139 -4.575 8 15.04; 140 -3.485 8 15.04; 141 -4.575 8 18.04; 142 -3.485 8 18.04;
143 -4.575 8 21.04; 144 -3.485 8 21.04; 145 -4.575 8 24.04; 146 -3.485 8 24.04;
147 -4.575 8 27.04; 148 -3.485 8 27.04; 149 -4.575 8 30.04; 150 -3.485 8 30.04;
151 -4.575 8 33.04; 152 -3.485 8 33.04; 153 -4.575 8 36.04; 154 -3.485 8 36.04;
187 0 8.65 4.1; 188 0 8.65 10.6; 189 0 8.65 17.1; 190 0 8.65 23.6;
191 0 8.65 30.1; 192 0 8.65 36.6; 193 0 8.65 43.1; 6631 -10.06 8 4.1;
6632 -10.06 8 10.6; 6633 -10.06 8 17.1; 6634 -10.06 8 23.6; 6635 -10.06 8 30.1;
6636 -10.06 8 36.6; 6637 -8.28 8 4.1; 6638 -6.03 8 4.1; 6639 -4.575 8 4.1;
6640 -3.485 8 4.1; 6641 -2.03 8 4.1; 6642 -2.03 8 10.6; 6643 -3.485 8 10.6;
6644 -4.575 8 10.6; 6645 -6.03 8 10.6; 6646 -8.28 8 10.6; 6647 -8.28 8 17.1;
6648 -6.03 8 17.1; 6649 -4.575 8 17.1; 6650 -3.485 8 17.1; 6651 -2.03 8 17.1;
6652 -6.03 8 23.6; 6653 -8.28 8 23.6; 6654 -4.575 8 23.6; 6655 -3.485 8 23.6;
6656 -2.03 8 23.6; 6657 -2.03 8 30.1; 6658 -6.03 8 30.1; 6659 -4.575 8 30.1;
6660 -3.485 8 30.1; 6661 -8.28 8 30.1; 6662 -8.28 8 36.6; 6663 -6.03 8 36.6;
6664 -4.575 8 36.6; 6665 -3.485 8 36.6; 6666 -2.03 8 36.6; 6667 -10.06 8 43.1;
6668 -10.06 8 9.75; 6669 -10.06 8 19.5; 6670 -10.06 8 29.25; 6671 -10.06 8 39;
6672 0 0 0; 6675 -6.03 0 0; 6676 -2.03 8 41.95; 6677 -6.03 8 41.95;
6678 -2.03 8 40.15; 6679 -3.485 8 40.15; 6680 -4.575 8 40.15;
6681 -6.03 8 40.15; 6682 -3.305 8 40.15; 6683 -4.755 8 40.15;
6684 -3.305 8 41.95; 6685 -4.755 8 41.95; 6686 0 8 41.95; 6687 0 8 40.15;
MEMBER INCIDENCES
1 2 36; 2 3 37; 3 4 38; 4 5 39; 5 6 40; 6 7 41; 7 8 25; 8 10 27; 9 27 44;
10 12 94; 11 94 6668; 12 13 102; 13 102 6669; 14 17 92; 15 92 91; 16 35 36;
17 36 37; 18 37 38; 19 38 39; 20 39 40; 21 40 41; 22 41 6687; 23 35 52;
24 43 60; 25 69 6637; 26 6646 6637; 27 6661 6653; 28 42 59; 29 25 130;
30 27 94; 31 94 102; 32 110 120; 33 52 76; 34 52 6641; 35 6642 6641;
36 6657 6656; 37 59 67; 38 60 69; 39 60 6638; 40 6645 6638; 41 6658 6652;
42 67 73; 43 69 44; 44 73 6667; 45 76 43; 46 76 132; 47 6643 136; 48 150 148;
50 43 131; 51 6644 135; 52 149 147; 54 92 34; 55 110 102; 56 109 110;
57 110 6670; 58 6656 6651; 60 6652 6648; 62 120 34; 63 119 120; 64 120 6671;
65 59 6676; 66 125 6679; 67 67 6677; 68 73 6662; 69 128 6680; 70 129 130;
71 130 67; 72 131 6639; 73 132 6640; 74 133 135; 75 134 136; 78 137 139;
79 138 140; 80 139 6649; 81 140 6650; 82 141 143; 83 142 144; 86 145 6654;
87 146 6655; 88 147 145; 89 148 146; 90 149 6659; 91 150 6660; 92 151 153;
93 152 154; 94 153 6664; 95 154 6665; 102 187 36; 103 188 37; 104 189 38;
105 190 39; 106 191 40; 107 192 41; 114 44 6631; 115 6632 6668; 116 6635 6670;
117 36 6641; 118 6632 6633; 119 37 6642; 120 6633 6669; 121 38 6651;
122 39 6656; 123 6635 6636; 124 40 6657; 125 6636 6671; 126 41 6666;
127 6637 6631; 128 6638 6637; 129 6639 133; 130 6639 6638; 131 6640 134;
132 6640 6639; 133 6641 6640; 134 6642 6651; 135 6642 6643; 136 6643 138;
137 6643 6644; 138 6644 137; 139 6644 6645; 140 6645 6648; 141 6645 6646;
142 6646 6647; 143 6646 6632; 144 6647 6633; 145 6647 6653; 146 6648 6647;
147 6649 141; 148 6650 142; 149 6649 6648; 150 6650 6649; 151 6651 6650;
152 6653 6634; 153 6652 6653; 154 6654 143; 155 6655 144; 156 6654 6652;
157 6655 6654; 158 6656 6655; 159 6657 6666; 160 6658 6663; 161 6658 6661;
162 6657 6660; 163 6659 151; 164 6660 152; 165 6659 6658; 166 6660 6659;
167 6661 6662; 168 6661 6635; 169 6662 6636; 170 6663 6662; 171 6664 128;
172 6665 125; 173 6664 6663; 174 6665 6664; 175 6666 6665; 176 6667 91;
177 6668 6631; 178 6669 6634; 179 6670 6634; 180 6671 6667; 181 6672 35;
184 25 42; 185 42 193; 186 6675 60; 188 34 130; 189 6676 6678; 190 6677 6681;
191 6676 6684; 194 6678 6666; 196 6678 6682; 198 6679 6680; 199 6681 6663;
200 6680 6683; 201 6682 6679; 202 6683 6681; 203 6684 6685; 204 6685 6677;
205 6682 6684; 206 6683 6685; 207 6686 42; 208 6687 6686;
MEMBER PROPERTY AMERICAN
1 TO 6 14 15 70 71 102 TO 107 PRIS YD 0.85 ZD 0.65
16 TO 28 33 TO 41 43 45 58 60 65 67 68 134 140 142 145 159 160 167 189 190 -
194 199 207 208 PRIS YD 0.6 ZD 0.25
46 TO 48 50 TO 52 66 69 72 TO 75 78 TO 83 86 TO 95 129 131 136 138 147 148 -
154 155 163 164 171 172 PRIS YD 0.5 ZD 0.25
8 TO 13 56 57 63 64 181 186 PRIS YD 0.45 ZD 0.45
114 TO 116 118 120 123 125 177 TO 180 PRIS YD 1 ZD 0.35
```

```
30 TO 32 55 62 205 206 PRIS YD 0.4 ZD 0.25
MEMBER PROPERTY AMERICAN
117 119 121 122 124 126 TO 128 130 132 133 135 137 139 141 143 144 146 149 -
150 TO 153 156 TO 158 161 162 165 166 168 TO 170 173 TO 174 -
175 PRIS YD 1 ZD 0.4
MEMBER PROPERTY AMERICAN
7 184 185 PRIS YD 0.85 ZD 0.85
MEMBER PROPERTY AMERICAN
29 54 188 PRIS YD 0.5 ZD 0.25
MEMBER PROPERTY AMERICAN
191 196 198 200 TO 204 PRIS YD 0.5 ZD 0.35
MEMBER PROPERTY AMERICAN
42 44 176 PRIS YD 1 ZD 0.25
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 3567.7
END DEFINE MATERIAL
CONSTANTS
BETA 90 MEMB 7 14 15 184 185
MATERIAL CONCRETE ALL
SUPPORTS
2 TO 8 10 12 13 17 109 119 129 6672 6675 FIXED
MEMBER RELEASE
25 34 46 50 65 67 68 191 196 205 206 START MY MZ
66 69 127 143 144 152 168 169 180 202 204 TO 206 END MY MZ
LOAD 1 LOADTYPE None  TITLE DL
SELFWEIGHT Y -1
JOINT LOAD
43 76 125 128 131 TO 154 FY -0.65
**********************************
191 FX 0.552 FY -9.878 FZ -0.006
192 FX 0.607 FY -13.854 FZ -1.647
190 FX 0.533 FY -9.808 FZ -0.007
188 FX 0.515 FY -9.801 FZ -0.004
189 FX 0.519 FY -9.805 FZ -0.006
187 FX 0.552 FY -10.461 FZ -0.002
193 FX 0.019 FY -10.323 FZ 0.269
35 FX 0 FY -15 FZ 0
60 FX 0 FY -2.1 FZ 0
44 FX 0 FY -0.3 FZ 0
42 FX 0 FY -2.8 FZ 0
67 FX 0 FY -10.5 FZ 0.6
91 FX 0 FY 1.32 FZ 0
***EQUIPMENT DEAD LOAD****************
191 FX 0.278 FY -4.425 FZ 0.005
192 FX 0.013 FY 7.089 FZ 2.426
190 FX 0.29 FY -4.419 FZ 0.008
188 FX 0.294 FY -4.416 FZ 0.023
189 FX 0.29 FY -4.416 FZ 0.014
187 FX 0.337 FY -5.432 FZ 0.035
193 FX 0.001 FY -6.937 FZ 3.046
35 FX 0 FY -4 FZ 0
60 FX 0 FY -7 FZ 0
44 FX 0 FY -0.46 FZ 0
42 FX 0 FY -0.6 FZ 0
67 FX 0 FY -1.5 FZ 0
91 FX 0 FY 0.4 FZ 0
MEMBER LOAD
29 54 188 UNI GY -2.6
16 TO 22 25 TO 27 68 142 145 167 207 208 UNI GY -0.375
34 TO 36 39 TO 41 46 TO 48 50 TO 52 58 60 65 TO 67 69 72 TO 75 78 TO 83 86 -
87 TO 89 92 TO 95 129 131 134 136 138 140 147 148 154 155 159 160 163 164 -
171 172 189 190 194 199 205 206 UNI GY -0.65
JOINT LOAD
6684 6685 FX 2.23 FY -4.46 FZ 0.2
6682 6683 FX -2.23 FY -4.46 FZ 0.2
6686 6687 FY -2
LOAD 2 LOADTYPE None  TITLE LL
MEMBER LOAD
16 TO 22 25 TO 27 34 TO 36 39 TO 41 58 60 65 67 68 134 140 142 145 159 160 -
167 189 190 194 199 207 208 UNI GY -0.5
JOINT LOAD
191 FX 0.003 FY -0.001 FZ 0
192 FX 0.004 FY -0.811 FZ -0.32
```

190 FX 0.001 FY -0.001 FZ 0
188 FX -0.001 FY 0 FZ 0
189 FX 0 FY 0 FZ 0
187 FX -0.002 FY 0 FZ 0
193 FX 0 FY 0.7 FZ -0.303
35 FX 0 FY -2.73 FZ 0
60 FX 0 FY -2.5 FZ 0
44 FX 0 FY -0.23 FZ 0
42 FX 0 FY -2.7 FZ 0.12
67 FX 0 FY -6.17 FZ 0.4
91 FX 0 FY 0.45 FZ 0
ROOF LIVE LOAD*************
191 FX 0.618 FY -6.341 FZ 0
192 FX 0.539 FY -7.295 FZ -0.533
190 FX 0.627 FY -6.339 FZ -0.003
188 FX 0.615 FY -6.333 FZ -0.002
189 FX 0.621 FY -6.336 FZ -0.003
187 FX 0.613 FY -6.391 FZ -0.002
193 FX -0.01 FY -1.302 FZ 0.033
35 FX 0 FY -6.1 FZ 0
60 FX 0 FY -0.1 FZ 0
44 FX 0 FY -0.03 FZ 0
42 FX 0 FY 0 FZ 0.03
67 FX 0 FY 0.016 FZ 0
91 FX 0 FY 0 FZ 0
EQUIPMENT LIVE LOAD******
191 FX 0.013 FY -0.007 FZ 0
192 FX 0.013 FY 0.341 FZ 0.19
190 FX 0.012 FY -0.006 FZ 0
188 FX 0.009 FY -0.004 FZ 0
189 FX 0.01 FY -0.005 FZ 0
187 FX 0.008 FY -0.003 FZ 0.001
193 FX 0.005 FY -0.466 FZ 0.252
35 FX 0 FY -0.22 FZ 0
60 FX 0 FY -0.4 FZ 0
44 FX 0 FY 0.01 FZ 0
42 FX 0 FY -0.14 FZ 0
67 FX 0 FY -0.58 FZ 0
91 FX 0 FY 0.1 FZ 0
LIVE LOAD SHORT POST**********
43 76 125 128 131 TO 154 FX 0.15 FY -0.3 FZ 0.09
LOAD 3 LOADTYPE None TITLE TRIPPER CELL1_NORMAL
MEMBER LOAD
40 CON GY -6 5.625
40 CON GY -6 0.225
140 CON GY -5.5 2.775
35 CON GY -6 5.625
35 CON GY -6 0.225
134 CON GY -5.5 2.775
40 CON GX 0.6 5.625
35 CON GX 0.6 0.225
140 CON GX 0.6 2.775
40 CON GX 0.6 5.625
35 CON GX 0.6 0.225
134 CON GX 0.6 2.775
35 CON GZ 0.6 5.625
35 CON GZ 0.6 0.225
134 CON GZ 0.6 2.775
40 CON GZ -0.6 5.625
40 CON GZ -0.6 0.225
140 CON GZ -0.6 2.775
LOAD 4 LOADTYPE None TITLE TRIPPER CELL2_NORMAL
MEMBER LOAD
140 CON GY -6 0.675
140 CON GY -6 6.075
58 CON GY -5.5 2.575
134 CON GY -6 0.675
134 CON GY -6 6.075
60 CON GY -5.5 2.575
140 CON GX 0.6 0.675
140 CON GX 0.6 6.075
58 CON GX 0.6 2.575
134 CON GX 0.6 0.675
134 CON GX 0.6 6.075
60 CON GX 0.6 2.575
140 CON GZ 0.6 0.675
140 CON GZ 0.6 6.075
60 CON GZ 0.6 2.575
134 CON GZ -0.6 0.675
134 CON GZ -0.6 6.075

58 CON GZ -0.6 2.575
LOAD 5 LOADTYPE None TITLE TRIPPER CELL3_NORMAL
MEMBER LOAD
41 CON GY -6 3
160 CON GY -6 1.9
160 CON GY -5.5 4.9
36 CON GY -6 3
159 CON GY -6 1.9
159 CON GY -5.5 4.9
36 CON GX 0.6 3
160 CON GX 0.6 1.9
160 CON GX 0.6 4.9
41 CON GX 0.6 3
159 CON GX 0.6 1.9
159 CON GX 0.6 4.9
41 CON GZ 0.6 3
160 CON GZ 0.6 1.9
160 CON GZ 0.6 4.9
36 CON GZ -0.6 3
159 CON GZ -0.6 1.9
159 CON GZ -0.6 4.9
LOAD 6 LOADTYPE None TITLE TRIPPER CELL4_NORMAL
MEMBER LOAD
160 CON GY -6 0.7
160 CON GY -6 6.1
159 CON GY -6 0.7
159 CON GY -6 6.1
190 CON GY -5.5 1.45
160 CON GX 0.6 0.7
160 CON GX 0.6 6.1
159 CON GX 0.6 0.7
159 CON GX 0.6 6.1
190 CON GX 0.6 1.45
160 CON GZ 0.6 0.7
160 CON GZ 0.6 6.1
190 CON GZ 0.6 1.45
159 CON GZ -0.6 0.7
159 CON GZ -0.6 6.1
LOAD 7 WIND LOAD_X(+0.55)
JOINT LOAD
191 FX 0.771 FY 20.67 FZ 0.001
192 FX 0.886 FY -0.532 FZ -6.622
190 FX 0.916 FY 20.541 FZ 0.008
188 FX 1.279 FY 20.316 FZ -0.036
189 FX 1.12 FY 20.416 FZ -0.006
187 FX 1.36 FY 20.733 FZ -0.071
193 FX 1.054 FY 25.247 FZ -11.083
35 FX 0 FY 15.83 FZ 0
60 FX 0 FY 1 FZ 0
44 FX -0.13 FY -0.1 FZ -0.15
42 FX 0 FY 0 FZ 1.1
67 FX 0 FY 0.4 FZ 0
91 FX 0.3 FY 0 FZ 0.02
LOAD 8 WIND LOAD_X(-0.55)
JOINT LOAD
191 FX -0.582 FY 5.302 FZ 0.064
192 FX -0.631 FY 8.908 FZ 1.256
190 FX -0.325 FY 5.163 FZ 0.077
188 FX 0.149 FY 4.906 FZ 0.038
189 FX -0.052 FY 5.022 FZ 0.066
187 FX 0.214 FY 5.536 FZ 0.007
193 FX -0.241 FY -4.703 FZ 2.526
35 FX 3.3 FY 4.5 FZ -0.13
60 FX 0.06 FY 0.83 FZ 0.64
44 FX -0.02 FY -0.16 FZ -0.02
42 FX 0 FY 0 FZ 0.8
67 FX 0 FY 0.12 FZ 9.4
91 FX 0 FY 0 FZ 0
LOAD 9 WIND LOAD_Z(+0.55)
JOINT LOAD
191 FX 0.081 FY -0.018 FZ -0.021
192 FX 0.079 FY -17.33 FZ -6.428
190 FX 0.06 FY -0.016 FZ -0.024
188 FX 0.023 FY -0.011 FZ -0.024
189 FX 0.039 FY -0.014 FZ -0.024
187 FX 0.009 FY -0.004 FZ -0.024
193 FX 0.737 FY 21.06 FZ -8.776
35 FX 0 FY 1.7 FZ 0
60 FX 0 FY 0.02 FZ 0
44 FX 0 FY 0 FZ 0

```
42 FX 0 FY 0 FZ 0
67 FX 0 FY -0.3 FZ 0
91 FX 0.5 FY 0 FZ 0.03
LOAD 10 WIND LOAD_Z(-0.55)
JOINT LOAD
191 FX -0.008 FY -0.007 FZ 0.012
192 FX -0.009 FY -12.076 FZ -4.982
190 FX 0.006 FY -0.007 FZ 0.009
188 FX 0.011 FY -0.004 FZ 0.001
189 FX 0.012 FY -0.006 FZ 0.005
187 FX 0.007 FY -0.002 FZ -0.003
193 FX 0.095 FY 12.396 FZ -4.672
35 FX 0 FY 2 FZ 0
60 FX 0.01 FY 0 FZ 0
44 FX 0 FY 0 FZ 0
42 FX 0 FY 0 FZ 0
67 FX 0 FY -0.5 FZ 0
91 FX 0 FY 0 FZ 0
LOAD 11 LOADTYPE None  TITLE TRIPPER CELL1_CHUTE CLOGG
**NO HORIZONTAL LOAD CONSIDERED
MEMBER LOAD
40 CON GY -8 5.625
40 CON GY -7 0.225
140 CON GY -5.2 2.775
35 CON GY -8 5.625
35 CON GY -7 0.225
134 CON GY -5.2 2.775
LOAD 12 LOADTYPE None  TITLE TRIPPER CELL2_CHUTE CLOGG
**NO HORIZONTAL LOAD CONSIDERED
MEMBER LOAD
140 CON GY -8 0.675
140 CON GY -7 6.075
60 CON GY -5.2 2.575
134 CON GY -8 0.675
134 CON GY -7 6.075
58 CON GY -5.2 2.575
LOAD 13 LOADTYPE None  TITLE TRIPPER CELL3_CHUTE CLOGG
**NO HORIZONTAL LOAD CONSIDERED
MEMBER LOAD
41 CON GY -8 3
160 CON GY -7 1.9
160 CON GY -5.2 4.9
36 CON GY -8 3
159 CON GY -7 1.9
159 CON GY -5.2 4.9
LOAD 14 LOADTYPE None  TITLE TRIPPER CELL4_CHUTE CLOGG
**NO HORIZONTAL LOAD CONSIDERED
MEMBER LOAD
160 CON GY -8 0.7
160 CON GY -7 6.1
190 CON GY -5.2 1.45
159 CON GY -8 0.7
159 CON GY -7 6.1
************************************************************************
**ALLOWABLE STRESS DESIGN (SECTION 2.4 SBC 301)
LOAD COMB 100 (DL+LL+WHEEL_TRIPPER 1)
1 1.0 2 0.75 3 0.75
LOAD COMB 101 (DL+LL+WHEEL_TRIPPER 2)
1 1.0 2 0.75 4 0.75
LOAD COMB 102 (DL+LL+WHEEL_TRIPPER 3)
1 1.0 2 1.0 5 0.75
LOAD COMB 103 (DL+LL+WHEEL_TRIPPER 4)
1 1.0 2 1.0 6 0.75
LOAD COMB 104 DL+LL+WHEEL_TRIPPER 1+WLX(+0.55)
1 1.0 2 0.75 3 0.75 7 0.75
LOAD COMB 105 DL+LL+WHEEL_TRIPPER 2+WLX(+0.55)
1 1.0 2 0.75 4 0.75 7 0.75
LOAD COMB 106 DL+LL+WHEEL_TRIPPER 3+WLX(+0.55)
1 1.0 2 0.75 5 0.75 7 0.75
LOAD COMB 107 DL+LL+WHEEL_TRIPPER 4+WLX(+0.55)
1 1.0 2 0.75 6 0.75 7 0.75
LOAD COMB 108 DL+LL+WHEEL_TRIPPER 1+WLX(-0.55)
1 1.0 2 0.75 3 0.75 8 0.75
LOAD COMB 109 DL+LL+WHEEL_TRIPPER 2+WLX(-0.55)
1 1.0 2 0.75 4 0.75 8 0.75
LOAD COMB 110 DL+LL+WHEEL_TRIPPER 3+WLX(-0.55)
1 1.0 2 0.75 5 0.75 8 0.75
LOAD COMB 111 DL+LL+WHEEL_TRIPPER 4+WLX(-0.55)
1 1.0 2 0.75 6 0.75 8 0.75
LOAD COMB 112 DL+LL+WHEEL_TRIPPER 1+WLZ(+0.55)
```

```
1 1.0 2 0.75 3 0.75 9 0.75
LOAD COMB 113 DL+LL+WHEEL_TRIPPER 2+WLZ(+0.55)
1 1.0 2 0.75 4 0.75 9 0.75
LOAD COMB 114 DL+LL+WHEEL_TRIPPER 3+WLZ(+0.55)
1 1.0 2 0.75 5 0.75 9 0.75
LOAD COMB 115 DL+LL+WHEEL_TRIPPER 4+WLZ(+0.55)
1 1.0 2 0.75 6 0.75 9 0.75
LOAD COMB 116 DL+LL+WHEEL_TRIPPER 1+WLZ(-0.55)
1 1.0 2 0.75 3 0.75 10 0.75
LOAD COMB 117 DL+LL+WHEEL_TRIPPER 2+WLZ(-0.55)
1 1.0 2 0.75 4 0.75 10 0.75
LOAD COMB 118 DL+LL+WHEEL_TRIPPER 3+WLZ(-0.55)
1 1.0 2 0.75 5 0.75 10 0.75
LOAD COMB 119 DL+LL+WHEEL_TRIPPER 4+WLZ(-0.55)
1 1.0 2 0.75 6 0.75 10 0.75
LOAD COMB 120 0.6*DL+WLX(+0.55)
1 0.6 7 1.0
LOAD COMB 121 0.6DL+WLX(-0.55)
1 0.6 8 1.0
LOAD COMB 122 0.6DL+WLZ(+0.55)
1 0.6 9 1.0
LOAD COMB 123 0.6DL+WLZ(-0.55)
1 0.6 10 1.0
LOAD COMB 124 DL+TR1_CHOCKED
1 1.0 11 1.0
LOAD COMB 125 DL+TR2_CHOCKED
1 1.0 12 1.0
LOAD COMB 126 DL+TR3_CHOCKED
1 1.0 13 1.0
LOAD COMB 127 DL+TR3_CHOCKED
1 1.0 14 1.0
************************************************************
**LIMIT STATE DESIGN (TABLE 5.3.1 SBC 304)
LOAD COMB 200 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 1)
1 1.2 2 1.6 3 1.6
LOAD COMB 201 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 2)
1 1.2 2 1.6 4 1.6
LOAD COMB 202 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 3)
1 1.2 2 1.6 5 1.6
LOAD COMB 203 (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 4)
1 1.2 2 1.6 6 1.6
LOAD COMB 204 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(+0.55)
1 1.2 2 1.0 3 1.0 7 1.6
LOAD COMB 205 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(+0.55)
1 1.2 2 1.0 4 1.0 7 1.6
LOAD COMB 206 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(+0.55)
1 1.2 2 1.0 5 1.0 7 1.6
LOAD COMB 207 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(+0.55)
1 1.2 2 1.0 6 1.0 7 1.6
LOAD COMB 208 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(-0.55)
1 1.2 2 1.0 3 1.0 8 1.6
LOAD COMB 209 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(-0.55)
1 1.2 2 1.0 4 1.0 8 1.6
LOAD COMB 210 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(-0.55)
1 1.2 2 1.0 5 1.0 8 1.6
LOAD COMB 211 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(-0.55)
1 1.2 2 1.0 6 1.0 8 1.6
LOAD COMB 212 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(+0.55)
1 1.2 2 1.0 3 1.0 9 1.6
LOAD COMB 213 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(+0.55)
1 1.2 2 1.0 4 1.0 9 1.6
LOAD COMB 214 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(+0.55)
1 1.2 2 1.0 5 1.0 9 1.6
LOAD COMB 215 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(+0.55)
1 1.2 2 1.0 6 1.0 9 1.6
LOAD COMB 216 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(-0.55)
1 1.2 2 1.0 3 1.0 10 1.6
LOAD COMB 217 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(-0.55)
1 1.2 2 1.0 4 1.0 10 1.6
LOAD COMB 218 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(-0.55)
1 1.2 2 1.0 5 1.0 10 1.6
LOAD COMB 219 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(-0.55)
1 1.2 2 1.0 6 1.0 10 1.6
LOAD COMB 220 1.2*DL+1.6*TR1_CHOCKED
1 1.2 11 1.6
LOAD COMB 221 1.2*DL+1.6*TR2_CHOCKED
1 1.2 12 1.6
LOAD COMB 222 1.2*DL+1.6*TR3_CHOCKED
1 1.2 13 1.6
LOAD COMB 223 1.2*DL+1.6*TR3_CHOCKED
```

```
1 1.2 14 1.6
PERFORM ANALYSIS
LOAD LIST 100 TO 127
PRINT SUPPORT REACTION LIST 2 TO 8 10 12 13 109 119 6672 6675
PRINT JOINT DISPLACEMENTS LIST 35 44 60 67 91 187 TO 193 6668 TO 6671
LOAD LIST 200 TO 223
START CONCRETE DESIGN
CODE ACI
CLB 0.05 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 78 TO 83 86 -
87 TO 95 102 TO 107 114 TO 181 184 185 188 TO 191 194 196 198 TO 208
CLS 0.05 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 78 TO 83 86 -
87 TO 95 102 TO 107 114 TO 181 184 185 188 TO 191 194 196 198 TO 208
CLT 0.05 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 78 TO 83 86 -
87 TO 95 102 TO 107 114 TO 181 184 185 188 TO 191 194 196 198 TO 208
FC 3567.7 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 78 TO 83 -
86 TO 95 102 TO 107 114 TO 181 184 185 188 TO 191 194 196 198 TO 208
FYMAIN 42813 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 -
78 TO 83 86 TO 95 102 TO 107 114 TO 181 184 185 189 TO 191 194 196 -
198 TO 208
FYSEC 42813 MEMB 1 TO 29 33 TO 48 50 TO 52 54 56 TO 58 60 63 TO 75 78 TO 83 -
86 TO 95 102 TO 107 114 TO 181 184 185 188 TO 191 194 196 198 TO 208
EFACE 0.425 MEMB 117 119 121 122 124 126
EFACE 0.225 MEMB 29 TO 32 54 55 62 114 TO 116 118 120 123 125 177 TO 180 188
TRACK 1 ALL
DESIGN COLUMN 1 TO 15 56 57 63 64 70 71 181 184 186
DESIGN BEAM 16 TO 48 50 TO 52 54 55 58 60 62 65 TO 69 72 TO 75 78 TO 83 86 -
87 TO 95 114 TO 180 188 TO 191 194 196 198 TO 208
CONCRETE TAKE
END CONCRETE DESIGN
FINISH
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 5 STAAD OUTPUT FILE OF TRIPPER CONVEYOR SUPPORTING FRAME

```
            **************************************************
            *                                                *
            *           STAAD.Pro V8i SELECTseries5          *
            *           Version  20.07.10.64                 *
            *           Proprietary Program of               *
            *           Bentley Systems, Inc.                *
            *           Date=    APR  1, 2020                *
            *           Time=    12: 3:23                    *
            *                                                *
            *      USER ID: LNT ECC DIV                      *
            **************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_TRIPPER STR_10.03.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 04-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. SET ECHO OFF
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**129**	**NUMBER OF MEMBERS**	**181**
NUMBER OF PLATES	**0**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**16**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 108/ 17/ 108 DOF
TOTAL PRIMARY LOAD CASES = 14, TOTAL DEGREES OF FREEDOM = 678
TOTAL LOAD COMBINATION CASES = 52 SO FAR.
SIZE OF STIFFNESS MATRIX = 74 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.3/ 165015.2 MB

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
2	100	-3.54	68.66	-0.31	-2.94	0.15	-4.13
	101	-2.45	63.27	-0.38	-2.92	0.09	-6.24
	102	-2.90	66.79	-0.43	-3.21	0.01	-4.65
	103	-2.90	66.80	-0.48	-3.44	-0.02	-4.65
	104	-4.13	53.02	1.15	3.93	-0.04	-0.97
	105	-3.03	47.63	1.09	3.96	-0.10	-3.08
	106	-3.17	47.55	1.05	3.84	-0.13	-2.21
	107	-3.17	47.56	1.00	3.61	-0.16	-2.21
	108	-4.69	65.24	-1.36	-7.87	-0.17	1.55
	109	-3.59	59.84	-1.42	-7.84	-0.22	-0.55
	110	-3.73	59.77	-1.46	-7.96	-0.25	0.32
	111	-3.73	59.78	-1.50	-8.19	-0.28	0.32
	112	-3.42	68.34	1.01	3.28	0.01	-4.69
	113	-2.32	62.94	0.94	3.30	-0.05	-6.79
	114	-2.46	62.87	0.91	3.18	-0.08	-5.92
	115	-2.46	62.88	0.86	2.96	-0.11	-5.93
	116	-3.47	68.45	0.52	0.95	0.06	-4.47
	117	-2.37	63.05	0.45	0.98	0.01	-6.57
	118	-2.51	62.98	0.42	0.86	-0.02	-5.70
	119	-2.51	62.99	0.37	0.63	-0.05	-5.70
	120	-1.78	10.59	1.73	7.58	-0.10	-0.23
	121	-2.52	26.88	-1.62	-8.15	-0.27	3.14
	122	-0.83	31.02	1.54	6.71	-0.04	-5.18
	123	-0.90	31.17	0.88	3.61	0.04	-4.88
	124	-2.05	61.61	-0.06	-1.87	0.29	-11.85
	125	-1.10	52.54	-0.34	-2.57	0.36	-10.66
	126	-1.66	52.42	-0.41	-2.83	0.31	-7.41
	127	-1.67	52.43	-0.43	-2.89	0.31	-7.33
3	100	-4.68	78.88	-0.98	-4.68	-0.09	-6.45
	101	-3.83	74.63	-0.78	-3.96	-0.09	-8.22
	102	-3.17	72.88	-1.02	-4.73	-0.19	-8.83
	103	-3.19	72.91	-1.07	-4.95	-0.23	-8.77
	104	-5.48	63.92	0.46	2.18	-0.25	-2.17
	105	-4.62	59.67	0.66	2.89	-0.25	-3.94
	106	-3.62	53.92	0.48	2.39	-0.30	-5.20
	107	-3.63	53.95	0.44	2.16	-0.33	-5.14
	108	-4.93	75.21	-2.00	-9.54	-0.55	-5.13
	109	-4.07	70.96	-1.81	-8.83	-0.55	-6.90
	110	-3.06	65.21	-1.98	-9.33	-0.59	-8.16
	111	-3.08	65.24	-2.03	-9.56	-0.63	-8.10
	112	-4.67	78.90	0.33	1.56	-0.24	-6.51
	113	-3.81	74.65	0.53	2.27	-0.24	-8.28
	114	-2.81	68.90	0.35	1.77	-0.29	-9.54
	115	-2.82	68.93	0.31	1.54	-0.32	-9.48
	116	-4.67	78.89	-0.16	-0.78	-0.18	-6.51
	117	-3.81	74.64	0.04	-0.07	-0.18	-8.28

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	-2.81	68.89	-0.14	-0.57	-0.22	-9.54
	119	-2.82	68.92	-0.19	-0.80	-0.26	-9.48
	120	-2.14	14.19	1.44	6.86	-0.17	-1.08
	121	-1.40	29.24	-1.85	-8.77	-0.56	-5.03
	122	-1.06	34.16	1.26	6.03	-0.16	-6.87
	123	-1.06	34.15	0.61	2.92	-0.07	-6.86
	124	-3.00	71.22	-0.83	-3.85	-0.03	-14.82
	125	-2.41	66.69	-0.53	-3.07	0.18	-14.95
	126	-1.70	56.83	-0.86	-3.99	0.16	-11.73
	127	-1.76	56.89	-0.87	-4.04	0.15	-11.46
4	100	-2.50	70.07	-1.19	-5.20	-0.23	-12.61
	101	-3.67	75.90	-0.88	-4.19	-0.23	-10.32
	102	-2.30	70.84	-0.97	-4.59	-0.28	-12.53
	103	-2.39	71.06	-1.01	-4.79	-0.33	-12.15
	104	-3.27	55.03	0.30	1.83	-0.45	-8.56
	105	-4.43	60.86	0.61	2.84	-0.44	-6.27
	106	-2.74	51.88	0.56	2.69	-0.43	-9.03
	107	-2.83	52.10	0.53	2.49	-0.48	-8.65
	108	-2.50	66.31	-2.22	-10.10	-0.72	-12.68
	109	-3.66	72.14	-1.91	-9.09	-0.71	-10.38
	110	-1.97	63.15	-1.95	-9.24	-0.70	-13.14
	111	-2.06	63.38	-1.99	-9.44	-0.75	-12.77
	112	-2.51	70.10	0.16	1.19	-0.45	-12.56
	113	-3.68	75.93	0.47	2.20	-0.45	-10.27
	114	-1.99	66.95	0.43	2.05	-0.43	-13.03
	115	-2.07	67.17	0.39	1.85	-0.48	-12.65
	116	-2.50	70.08	-0.34	-1.20	-0.36	-12.65
	117	-3.67	75.92	-0.03	-0.19	-0.36	-10.35
	118	-1.97	66.93	-0.08	-0.35	-0.35	-13.11
	119	-2.06	67.15	-0.11	-0.55	-0.39	-12.74
	120	-1.70	13.23	1.51	7.16	-0.29	-3.07
	121	-0.67	28.26	-1.84	-8.74	-0.65	-8.55
	122	-0.70	33.33	1.33	6.31	-0.29	-8.40
	123	-0.68	33.30	0.66	3.12	-0.17	-8.51
	124	-0.91	58.88	-1.06	-4.46	-0.20	-18.07
	125	-2.09	68.00	-0.82	-3.80	-0.04	-18.02
	126	-0.68	54.86	-0.84	-3.93	0.12	-16.27
	127	-0.96	55.25	-0.84	-3.96	0.09	-14.92
5	100	-1.81	66.60	-0.96	-4.59	-0.21	-13.85
	101	-2.58	70.76	-1.11	-4.79	-0.31	-12.71
	102	-2.66	73.58	-0.77	-4.05	-0.26	-12.80
	103	-2.17	70.89	-0.98	-4.72	-0.33	-13.43
	104	-2.47	51.42	0.58	2.69	-0.53	-10.36
	105	-3.24	55.57	0.43	2.48	-0.63	-9.22
	106	-2.99	54.48	0.81	3.47	-0.51	-9.85
	107	-2.51	51.79	0.60	2.80	-0.58	-10.48

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	-1.61	62.66	-2.00	-9.52	-0.69	-14.98
	109	-2.38	66.81	-2.14	-9.72	-0.78	-13.85
	110	-2.13	65.73	-1.76	-8.74	-0.66	-14.47
	111	-1.64	63.03	-1.97	-9.41	-0.73	-15.10
	112	-1.84	66.62	0.44	2.03	-0.53	-13.70
	113	-2.61	70.78	0.29	1.83	-0.63	-12.57
	114	-2.36	69.69	0.67	2.81	-0.51	-13.20
	115	-1.87	67.00	0.46	2.14	-0.58	-13.82
	116	-1.80	66.60	-0.09	-0.45	-0.41	-13.89
	117	-2.57	70.76	-0.23	-0.65	-0.51	-12.76
	118	-2.32	69.67	0.15	0.33	-0.38	-13.39
	119	-1.84	66.98	-0.06	-0.34	-0.45	-14.01
	120	-1.48	12.89	1.58	7.48	-0.43	-4.22
	121	-0.33	27.88	-1.85	-8.80	-0.64	-10.38
	122	-0.63	33.17	1.39	6.61	-0.43	-8.68
	123	-0.59	33.14	0.70	3.30	-0.26	-8.93
	124	-0.61	54.69	-0.77	-3.68	-0.15	-16.59
	125	-0.96	59.82	-1.06	-4.42	-0.13	-18.46
	126	-0.91	59.97	-0.48	-2.99	0.16	-18.94
	127	-0.47	55.24	-0.79	-3.86	0.14	-17.89
6	100	-1.42	66.75	-1.03	-4.80	-0.17	-15.98
	101	-1.32	66.46	-0.94	-4.36	-0.28	-16.44
	102	-3.49	80.48	-0.89	-4.37	-0.27	-12.90
	103	-2.79	76.61	-0.88	-4.44	-0.29	-14.02
	104	-2.06	51.69	0.62	2.96	-0.68	-12.62
	105	-1.96	51.40	0.72	3.40	-0.78	-13.08
	106	-3.81	61.47	0.81	3.61	-0.70	-10.06
	107	-3.11	57.59	0.82	3.54	-0.72	-11.18
	108	-1.07	62.61	-2.09	-9.81	-0.62	-17.86
	109	-0.97	62.32	-2.00	-9.37	-0.73	-18.32
	110	-2.82	72.39	-1.90	-9.16	-0.64	-15.31
	111	-2.12	68.51	-1.89	-9.23	-0.66	-16.42
	112	-1.52	67.03	0.48	2.27	-0.66	-15.49
	113	-1.41	66.74	0.57	2.71	-0.76	-15.95
	114	-3.27	76.81	0.66	2.92	-0.68	-12.94
	115	-2.57	72.93	0.68	2.86	-0.70	-14.06
	116	-1.44	66.94	-0.08	-0.35	-0.48	-15.88
	117	-1.34	66.65	0.02	0.08	-0.58	-16.34
	118	-3.19	76.72	0.11	0.30	-0.49	-13.33
	119	-2.49	72.84	0.12	0.23	-0.52	-14.45
	120	-1.14	12.87	1.69	7.99	-0.66	-5.97
	121	0.17	27.43	-1.92	-9.04	-0.58	-12.95
	122	-0.42	33.32	1.50	7.07	-0.63	-9.80
	123	-0.32	33.20	0.76	3.57	-0.39	-10.32
	124	-0.41	54.86	-0.86	-3.95	-0.08	-17.74
	125	-0.07	54.43	-0.83	-3.82	-0.06	-19.42

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	-1.69	69.94	-0.78	-3.81	0.09	-21.34
	127	-1.11	64.89	-0.59	-3.36	0.17	-21.05
7	100	-2.87	69.68	-0.34	-2.99	-0.62	-13.53
	101	-2.88	69.66	-0.25	-2.58	-0.71	-13.40
	102	-4.28	80.17	-0.63	-3.69	-0.81	-11.69
	103	-4.74	81.57	-0.47	-3.39	-0.81	-10.48
	104	-3.57	70.55	1.12	4.48	-1.40	-9.71
	105	-3.58	70.53	1.21	4.89	-1.49	-9.57
	106	-4.63	76.65	0.89	4.02	-1.50	-8.49
	107	-5.09	78.05	1.04	4.32	-1.50	-7.28
	108	-2.56	62.80	-1.39	-8.01	-1.04	-15.28
	109	-2.58	62.78	-1.30	-7.60	-1.13	-15.14
	110	-3.62	68.90	-1.62	-8.47	-1.15	-14.05
	111	-4.08	70.30	-1.47	-8.17	-1.14	-12.85
	112	-3.08	82.89	0.95	3.71	-1.37	-12.30
	113	-3.09	82.86	1.04	4.12	-1.47	-12.16
	114	-4.14	88.98	0.72	3.25	-1.48	-11.08
	115	-4.60	90.38	0.87	3.56	-1.48	-9.87
	116	-2.94	78.83	0.42	1.07	-1.09	-13.06
	117	-2.96	78.81	0.51	1.48	-1.18	-12.92
	118	-4.00	84.93	0.18	0.61	-1.19	-11.84
	119	-4.46	86.33	0.34	0.92	-1.19	-10.63
	120	-2.03	35.06	1.87	8.72	-1.26	-4.08
	121	-0.69	24.74	-1.48	-7.94	-0.79	-11.50
	122	-1.37	51.51	1.64	7.70	-1.23	-7.53
	123	-1.19	46.10	0.93	4.18	-0.85	-8.54
	124	-1.83	56.52	-0.14	-2.10	-0.47	-15.26
	125	-1.73	56.45	-0.12	-1.99	-0.43	-15.71
	126	-1.95	64.28	-0.60	-3.35	-0.50	-20.40
	127	-2.67	67.60	-0.39	-2.84	-0.44	-19.18
8	100	-2.31	63.37	-2.18	-10.45	-1.52	0.35
	101	-2.32	63.33	-2.07	-9.79	-1.55	0.41
	102	-2.26	64.64	-2.18	-10.33	-1.70	0.18
	103	-2.32	64.87	-2.27	-10.79	-1.73	0.48
	104	-2.85	43.56	-0.85	1.40	-1.92	2.60
	105	-2.86	43.53	-0.75	2.07	-1.95	2.67
	106	-2.81	43.21	-0.73	2.07	-2.04	2.43
	107	-2.87	43.43	-0.82	1.62	-2.07	2.72
	108	-2.22	67.47	-3.30	-18.53	-1.71	-0.01
	109	-2.24	67.43	-3.19	-17.87	-1.74	0.06
	110	-2.19	67.11	-3.18	-17.86	-1.83	-0.18
	111	-2.25	67.34	-3.26	-18.32	-1.86	0.11
	112	-2.77	46.80	-0.88	0.58	-1.96	2.25
	113	-2.78	46.76	-0.77	1.24	-1.99	2.32
	114	-2.73	46.44	-0.75	1.25	-2.08	2.08
	115	-2.79	46.67	-0.84	0.79	-2.11	2.37

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	-2.38	53.48	-1.30	-3.42	-1.77	0.64
	117	-2.40	53.44	-1.20	-2.76	-1.80	0.71
	118	-2.34	53.12	-1.18	-2.75	-1.89	0.47
	119	-2.40	53.35	-1.27	-3.21	-1.91	0.76
	120	-2.12	8.68	0.73	10.73	-1.34	3.21
	121	-1.29	40.55	-2.54	-15.85	-1.06	-0.27
	122	-2.01	12.99	0.69	9.63	-1.40	2.75
	123	-1.50	21.90	0.13	4.30	-1.13	0.60
	124	-2.35	58.48	-1.74	-8.51	-1.38	0.38
	125	-2.34	58.46	-1.72	-8.35	-1.37	0.33
	126	-2.17	57.99	-1.72	-8.53	-1.71	-0.40
	127	-2.12	58.20	-1.78	-8.81	-1.74	-0.57
10	100	0.52	18.02	0.07	-0.01	0.24	-2.28
	101	0.49	16.96	0.12	-0.13	0.22	-2.17
	102	0.48	17.56	0.07	-0.18	0.22	-2.10
	103	0.48	17.53	0.05	-0.23	0.23	-2.10
	104	0.51	18.12	0.21	0.49	0.14	-2.23
	105	0.48	17.06	0.26	0.37	0.12	-2.11
	106	0.47	17.18	0.24	0.39	0.12	-2.04
	107	0.47	17.15	0.23	0.34	0.12	-2.04
	108	0.15	17.33	-0.17	-0.95	0.43	-0.72
	109	0.12	16.27	-0.12	-1.07	0.42	-0.61
	110	0.11	16.39	-0.14	-1.06	0.41	-0.53
	111	0.11	16.36	-0.15	-1.11	0.41	-0.53
	112	0.57	18.18	0.19	0.43	0.18	-2.49
	113	0.54	17.12	0.24	0.31	0.16	-2.38
	114	0.53	17.24	0.22	0.32	0.16	-2.31
	115	0.53	17.21	0.21	0.27	0.16	-2.31
	116	0.55	18.12	0.15	0.27	0.20	-2.41
	117	0.52	17.06	0.20	0.15	0.18	-2.29
	118	0.51	17.18	0.18	0.16	0.18	-2.22
	119	0.51	17.15	0.17	0.11	0.18	-2.22
	120	0.27	9.51	0.32	0.74	-0.02	-1.16
	121	-0.21	8.45	-0.19	-1.19	0.37	0.85
	122	0.34	9.59	0.29	0.65	0.04	-1.52
	123	0.32	9.51	0.23	0.44	0.07	-1.40
	124	0.68	17.63	0.09	0.02	0.26	-3.04
	125	0.50	15.56	0.27	0.14	0.21	-2.27
	126	0.45	15.66	0.25	0.20	0.20	-2.03
	127	0.45	15.62	0.26	0.21	0.20	-2.02
12	100	0.53	56.41	0.15	-0.12	0.13	-3.25
	101	0.50	53.56	-0.01	-0.34	0.16	-3.12
	102	0.47	51.98	0.10	-0.30	0.13	-2.93
	103	0.47	52.15	0.06	-0.36	0.13	-2.94
	104	0.46	55.91	0.33	0.41	0.13	-2.86
	105	0.43	53.05	0.17	0.19	0.16	-2.72

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.39	49.46	0.28	0.28	0.12	-2.49
	107	0.39	49.63	0.25	0.22	0.12	-2.50
	108	0.51	56.32	-0.20	-1.11	0.17	-3.12
	109	0.48	53.47	-0.36	-1.33	0.20	-2.98
	110	0.44	49.88	-0.25	-1.24	0.16	-2.75
	111	0.45	50.05	-0.28	-1.30	0.16	-2.75
	112	0.53	56.34	0.31	0.34	0.13	-3.26
	113	0.50	53.49	0.14	0.12	0.16	-3.12
	114	0.46	49.90	0.26	0.21	0.12	-2.89
	115	0.46	50.07	0.23	0.15	0.12	-2.89
	116	0.53	56.37	0.25	0.17	0.13	-3.26
	117	0.50	53.51	0.09	-0.04	0.16	-3.12
	118	0.46	49.93	0.20	0.05	0.13	-2.89
	119	0.46	50.09	0.17	-0.01	0.13	-2.89
	120	0.17	25.74	0.31	0.67	0.06	-1.12
	121	0.24	26.30	-0.39	-1.36	0.12	-1.47
	122	0.26	26.33	0.28	0.58	0.07	-1.65
	123	0.26	26.36	0.21	0.36	0.07	-1.65
	124	0.67	54.38	0.16	-0.09	0.10	-4.04
	125	0.58	50.41	-0.03	-0.14	0.25	-3.61
	126	0.42	43.79	0.18	0.05	0.12	-2.72
	127	0.43	44.07	0.16	0.04	0.12	-2.73
13	100	0.41	46.48	0.13	-0.23	-0.05	-3.00
	101	0.45	50.30	0.08	-0.37	-0.04	-3.20
	102	0.40	47.43	0.01	-0.42	0.02	-2.99
	103	0.40	46.72	0.02	-0.45	0.00	-2.94
	104	0.37	46.14	0.30	0.29	-0.03	-2.69
	105	0.40	49.95	0.25	0.14	-0.02	-2.89
	106	0.35	45.31	0.19	0.15	0.04	-2.63
	107	0.35	44.59	0.20	0.12	0.02	-2.58
	108	0.42	46.50	-0.20	-1.19	-0.03	-3.06
	109	0.46	50.32	-0.25	-1.33	-0.02	-3.25
	110	0.41	45.67	-0.31	-1.33	0.04	-3.00
	111	0.40	44.96	-0.29	-1.36	0.02	-2.95
	112	0.41	46.49	0.28	0.22	-0.05	-3.00
	113	0.45	50.31	0.23	0.08	-0.04	-3.19
	114	0.39	45.66	0.17	0.08	0.02	-2.94
	115	0.39	44.94	0.18	0.05	0.00	-2.89
	116	0.41	46.49	0.22	0.06	-0.05	-3.01
	117	0.45	50.31	0.17	-0.08	-0.04	-3.20
	118	0.40	45.66	0.11	-0.08	0.02	-2.95
	119	0.39	44.94	0.13	-0.11	0.00	-2.90
	120	0.17	23.46	0.27	0.60	0.01	-1.23
	121	0.24	23.95	-0.39	-1.36	0.02	-1.71
	122	0.22	23.93	0.24	0.51	-0.01	-1.64
	123	0.22	23.94	0.17	0.30	0.00	-1.65

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.40	41.61	0.13	-0.19	-0.12	-3.04
	125	0.54	47.70	0.19	-0.10	-0.12	-3.73
	126	0.38	40.95	0.08	-0.06	0.10	-2.96
	127	0.35	39.47	0.14	-0.02	0.03	-2.76
109	100	0.49	49.56	-0.34	-0.53	0.16	-3.25
	101	0.50	50.09	-0.37	-0.65	0.13	-3.29
	102	0.58	57.70	-0.46	-0.72	0.19	-3.69
	103	0.55	55.41	-0.50	-0.78	0.20	-3.54
	104	0.46	49.22	-0.19	-0.04	0.15	-2.98
	105	0.46	49.75	-0.21	-0.16	0.12	-3.03
	106	0.53	55.36	-0.27	-0.16	0.18	-3.37
	107	0.50	53.07	-0.32	-0.22	0.19	-3.23
	108	0.52	49.73	-0.63	-1.44	0.17	-3.43
	109	0.53	50.26	-0.65	-1.56	0.15	-3.47
	110	0.60	55.88	-0.71	-1.56	0.20	-3.81
	111	0.57	53.59	-0.75	-1.62	0.21	-3.67
	112	0.49	49.52	-0.21	-0.11	0.15	-3.22
	113	0.49	50.05	-0.24	-0.23	0.12	-3.26
	114	0.56	55.67	-0.30	-0.23	0.18	-3.61
	115	0.54	53.38	-0.34	-0.29	0.19	-3.46
	116	0.49	49.56	-0.26	-0.26	0.15	-3.25
	117	0.50	50.09	-0.28	-0.38	0.13	-3.29
	118	0.57	55.71	-0.34	-0.38	0.18	-3.64
	119	0.54	53.42	-0.39	-0.44	0.19	-3.49
	120	0.24	25.85	0.05	0.44	0.08	-1.50
	121	0.33	26.54	-0.53	-1.42	0.11	-2.09
	122	0.28	26.26	0.02	0.35	0.08	-1.82
	123	0.28	26.31	-0.04	0.15	0.08	-1.85
	124	0.45	43.53	-0.30	-0.46	0.15	-3.06
	125	0.47	44.22	-0.26	-0.38	0.08	-3.20
	126	0.70	53.75	-0.31	-0.31	0.24	-4.38
	127	0.63	50.42	-0.38	-0.34	0.30	-3.99
119	100	0.58	37.38	-0.13	-0.48	-0.76	-2.99
	101	0.57	37.16	-0.19	-0.61	-0.76	-2.96
	102	0.62	41.73	-0.10	-0.60	-0.84	-3.23
	103	0.63	42.84	-0.10	-0.63	-0.84	-3.25
	104	0.52	37.25	0.04	0.00	-0.72	-2.66
	105	0.51	37.03	-0.02	-0.13	-0.72	-2.63
	106	0.56	40.28	0.07	-0.06	-0.78	-2.86
	107	0.56	41.39	0.07	-0.10	-0.78	-2.88
	108	0.59	37.34	-0.44	-1.36	-0.81	-3.11
	109	0.58	37.12	-0.50	-1.50	-0.81	-3.08
	110	0.63	40.37	-0.41	-1.43	-0.87	-3.30
	111	0.63	41.48	-0.41	-1.46	-0.87	-3.32
	112	0.56	37.38	0.02	-0.06	-0.76	-2.84
	113	0.55	37.16	-0.04	-0.20	-0.76	-2.81

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.59	40.41	0.05	-0.13	-0.82	-3.04
	115	0.60	41.52	0.05	-0.16	-0.82	-3.06
	116	0.57	37.39	-0.04	-0.21	-0.75	-2.94
	117	0.57	37.17	-0.10	-0.35	-0.75	-2.91
	118	0.61	40.42	-0.01	-0.28	-0.81	-3.14
	119	0.62	41.54	-0.01	-0.31	-0.82	-3.16
	120	0.26	19.84	0.13	0.43	-0.38	-1.27
	121	0.35	19.96	-0.50	-1.39	-0.49	-1.87
	122	0.30	20.02	0.11	0.34	-0.43	-1.51
	123	0.32	20.03	0.03	0.14	-0.42	-1.65
	124	0.55	33.42	-0.18	-0.45	-0.73	-2.83
	125	0.55	33.22	-0.17	-0.38	-0.73	-2.84
	126	0.68	37.92	-0.02	-0.23	-0.93	-3.55
	127	0.73	40.17	0.02	-0.20	-0.94	-3.75
6672	100	0.04	32.84	-0.20	-0.90	0.15	-0.99
	101	0.02	33.11	-0.18	-0.81	0.14	-0.90
	102	-0.02	35.70	-0.19	-0.86	0.13	-0.75
	103	-0.02	35.67	-0.20	-0.91	0.13	-0.75
	104	0.01	21.97	0.17	0.60	0.10	-0.88
	105	-0.01	22.24	0.19	0.69	0.08	-0.78
	106	-0.03	22.30	0.19	0.68	0.07	-0.69
	107	-0.03	22.27	0.18	0.63	0.07	-0.69
	108	-0.30	29.19	-0.45	-1.94	0.22	0.51
	109	-0.32	29.46	-0.42	-1.85	0.21	0.61
	110	-0.34	29.52	-0.43	-1.86	0.20	0.70
	111	-0.34	29.49	-0.44	-1.91	0.20	0.70
	112	0.08	32.32	0.12	0.43	0.12	-1.18
	113	0.06	32.59	0.14	0.52	0.11	-1.09
	114	0.04	32.66	0.14	0.51	0.10	-0.99
	115	0.04	32.63	0.13	0.46	0.10	-1.00
	116	0.06	31.83	0.00	-0.07	0.14	-1.10
	117	0.04	32.10	0.02	0.03	0.12	-1.01
	118	0.02	32.16	0.02	0.01	0.11	-0.92
	119	0.02	32.13	0.01	-0.03	0.11	-0.92
	120	-0.01	0.85	0.39	1.57	0.01	-0.42
	121	-0.42	10.47	-0.43	-1.81	0.17	1.44
	122	0.08	14.65	0.33	1.34	0.04	-0.82
	123	0.06	13.99	0.17	0.68	0.06	-0.71
	124	0.26	24.93	-0.16	-0.74	0.19	-1.90
	125	0.11	25.40	-0.16	-0.73	0.16	-1.22
	126	0.05	25.54	-0.17	-0.76	0.14	-0.93
	127	0.04	25.54	-0.17	-0.77	0.14	-0.92
6675	100	0.89	30.15	1.04	2.41	0.15	-3.26
	101	0.87	29.57	0.87	1.91	0.13	-3.14
	102	0.85	31.24	0.90	1.97	0.13	-3.06
	103	0.85	31.22	0.89	1.91	0.13	-3.06

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.86	29.48	1.23	3.29	0.06	-3.15
	105	0.83	28.90	1.05	2.79	0.03	-3.03
	106	0.81	29.10	1.06	2.81	0.03	-2.94
	107	0.81	29.09	1.05	2.75	0.03	-2.94
	108	0.46	29.24	0.71	1.01	0.24	-1.51
	109	0.44	28.66	0.54	0.51	0.21	-1.39
	110	0.41	28.87	0.55	0.53	0.21	-1.30
	111	0.41	28.85	0.53	0.47	0.21	-1.30
	112	0.95	30.33	1.23	3.25	0.08	-3.50
	113	0.92	29.75	1.06	2.75	0.05	-3.38
	114	0.90	29.96	1.06	2.77	0.05	-3.29
	115	0.90	29.94	1.05	2.71	0.05	-3.29
	116	0.93	30.27	1.16	2.94	0.11	-3.40
	117	0.90	29.69	0.99	2.44	0.08	-3.28
	118	0.88	29.89	0.99	2.46	0.08	-3.19
	119	0.88	29.88	0.98	2.40	0.08	-3.19
	120	0.45	14.35	0.73	2.28	-0.06	-1.64
	121	-0.08	14.03	0.04	-0.75	0.18	0.54
	122	0.57	15.48	0.73	2.24	-0.03	-2.11
	123	0.54	15.40	0.63	1.82	0.01	-1.97
	124	1.10	26.20	1.06	2.53	0.15	-4.12
	125	0.89	25.03	0.80	1.87	0.14	-3.27
	126	0.81	25.41	0.80	1.89	0.13	-2.95
	127	0.81	25.40	0.80	1.88	0.14	-2.94

********** END OF LATEST ANALYSIS RESULT **********

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
35	100	-0.3749	-0.0551	0.1574	0.0001	-0.0002	0.0009
	101	-0.3571	-0.0556	0.1426	0.0001	-0.0002	0.0009
	102	-0.3409	-0.0602	0.1534	0.0001	-0.0002	0.0009
	103	-0.3410	-0.0602	0.1608	0.0001	-0.0002	0.0009
	104	-0.3625	-0.0357	-0.0652	0.0001	-0.0001	0.0009
	105	-0.3448	-0.0362	-0.0800	0.0001	-0.0001	0.0009
	106	-0.3306	-0.0363	-0.0777	0.0001	-0.0001	0.0009
	107	-0.3306	-0.0363	-0.0703	0.0001	-0.0001	0.0009
	108	-0.1166	-0.0486	0.3185	0.0002	-0.0003	0.0007
	109	-0.0988	-0.0491	0.3037	0.0002	-0.0003	0.0007
	110	-0.0846	-0.0492	0.3060	0.0002	-0.0003	0.0007
	111	-0.0847	-0.0491	0.3135	0.0002	-0.0003	0.0007
	112	-0.4093	-0.0542	-0.0446	0.0001	-0.0002	0.0009
	113	-0.3916	-0.0547	-0.0594	0.0001	-0.0002	0.0009
	114	-0.3774	-0.0548	-0.0571	0.0001	-0.0001	0.0009
	115	-0.3774	-0.0547	-0.0497	0.0001	-0.0001	0.0009
	116	-0.3954	-0.0533	0.0312	0.0001	-0.0002	0.0009
	117	-0.3776	-0.0538	0.0164	0.0001	-0.0002	0.0009
	118	-0.3634	-0.0539	0.0187	0.0001	-0.0002	0.0009
	119	-0.3635	-0.0538	0.0261	0.0001	-0.0002	0.0009
	120	-0.1897	0.0006	-0.2230	0.0000	0.0000	0.0005
	121	0.1382	-0.0166	0.2886	0.0001	-0.0003	0.0003
	122	-0.2521	-0.0241	-0.1955	0.0000	-0.0001	0.0005
	123	-0.2335	-0.0229	-0.0944	0.0000	-0.0001	0.0005
	124	-0.5112	-0.0410	0.1264	0.0001	-0.0003	0.0009
	125	-0.3869	-0.0418	0.1248	0.0001	-0.0002	0.0008
	126	-0.3394	-0.0421	0.1292	0.0001	-0.0002	0.0008
	127	-0.3373	-0.0421	0.1311	0.0001	-0.0002	0.0008
44	100	-0.3738	-0.0271	0.0854	0.0011	-0.0004	0.0002
	101	-0.3559	-0.0252	0.1067	0.0010	-0.0004	0.0002
	102	-0.3397	-0.0263	0.1147	0.0010	-0.0004	0.0002
	103	-0.3397	-0.0263	0.1220	0.0010	-0.0004	0.0002
	104	-0.3616	-0.0273	-0.0042	0.0010	-0.0002	0.0002
	105	-0.3438	-0.0254	0.0172	0.0009	-0.0002	0.0002
	106	-0.3296	-0.0256	0.0131	0.0009	-0.0002	0.0001
	107	-0.3296	-0.0255	0.0205	0.0009	-0.0002	0.0001
	108	-0.1191	-0.0260	0.2504	0.0011	-0.0007	0.0001
	109	-0.1013	-0.0241	0.2717	0.0010	-0.0007	0.0001
	110	-0.0871	-0.0243	0.2677	0.0010	-0.0007	0.0000
	111	-0.0871	-0.0243	0.2750	0.0010	-0.0007	0.0000
	112	-0.4083	-0.0274	0.0082	0.0010	-0.0003	0.0002
	113	-0.3905	-0.0255	0.0296	0.0009	-0.0003	0.0002
	114	-0.3763	-0.0257	0.0255	0.0009	-0.0003	0.0002
	115	-0.3763	-0.0257	0.0329	0.0009	-0.0003	0.0002
	116	-0.3943	-0.0273	0.0358	0.0011	-0.0003	0.0002
	117	-0.3765	-0.0254	0.0571	0.0009	-0.0003	0.0002

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	118	-0.3623	-0.0256	0.0531	0.0010	-0.0003	0.0002
	119	-0.3624	-0.0256	0.0604	0.0010	-0.0003	0.0002
	120	-0.1894	-0.0139	-0.0863	0.0005	0.0000	0.0001
	121	0.1339	-0.0122	0.2530	0.0005	-0.0006	0.0000
	122	-0.2517	-0.0140	-0.0698	0.0005	-0.0001	0.0001
	123	-0.2330	-0.0139	-0.0331	0.0005	-0.0001	0.0001
	124	-0.5102	-0.0264	0.0768	0.0010	-0.0004	0.0003
	125	-0.3858	-0.0227	0.0568	0.0008	-0.0003	0.0002
	126	-0.3385	-0.0229	0.0421	0.0008	-0.0003	0.0002
	127	-0.3364	-0.0228	0.0399	0.0008	-0.0003	0.0002
60	100	-0.3739	-0.0503	0.1468	0.0018	-0.0002	-0.0003
	101	-0.3561	-0.0493	0.1654	0.0016	-0.0002	-0.0003
	102	-0.3399	-0.0522	0.1786	0.0017	-0.0002	-0.0004
	103	-0.3399	-0.0522	0.1885	0.0017	-0.0002	-0.0004
	104	-0.3617	-0.0491	-0.0126	0.0017	-0.0001	-0.0003
	105	-0.3439	-0.0481	0.0060	0.0015	0.0000	-0.0003
	106	-0.3298	-0.0484	0.0030	0.0015	0.0000	-0.0003
	107	-0.3298	-0.0484	0.0128	0.0015	0.0000	-0.0003
	108	-0.1185	-0.0487	0.3715	0.0019	-0.0003	-0.0004
	109	-0.1007	-0.0477	0.3901	0.0017	-0.0003	-0.0004
	110	-0.0865	-0.0480	0.3871	0.0017	-0.0003	-0.0004
	111	-0.0865	-0.0480	0.3969	0.0017	-0.0003	-0.0004
	112	-0.4085	-0.0506	0.0047	0.0018	-0.0001	-0.0003
	113	-0.3907	-0.0496	0.0233	0.0016	-0.0001	-0.0003
	114	-0.3765	-0.0500	0.0203	0.0016	-0.0001	-0.0003
	115	-0.3765	-0.0499	0.0301	0.0016	-0.0001	-0.0003
	116	-0.3945	-0.0505	0.0571	0.0018	-0.0002	-0.0003
	117	-0.3767	-0.0495	0.0757	0.0016	-0.0001	-0.0003
	118	-0.3625	-0.0499	0.0727	0.0016	-0.0001	-0.0003
	119	-0.3625	-0.0498	0.0826	0.0016	-0.0001	-0.0003
	120	-0.1895	-0.0235	-0.1501	0.0007	0.0001	-0.0002
	121	0.1349	-0.0229	0.3620	0.0010	-0.0003	-0.0002
	122	-0.2518	-0.0255	-0.1270	0.0007	0.0000	-0.0002
	123	-0.2331	-0.0254	-0.0571	0.0008	0.0000	-0.0002
	124	-0.5104	-0.0433	0.1225	0.0018	-0.0002	-0.0003
	125	-0.3861	-0.0412	0.1051	0.0014	-0.0002	-0.0003
	126	-0.3386	-0.0418	0.0981	0.0014	-0.0002	-0.0003
	127	-0.3366	-0.0418	0.0980	0.0014	-0.0002	-0.0003
67	100	-0.0300	-0.0298	0.1488	0.0003	-0.0001	-0.0001
	101	-0.0288	-0.0298	0.1651	0.0003	0.0000	-0.0001
	102	-0.0336	-0.0311	0.1815	0.0003	-0.0001	-0.0001
	103	-0.0289	-0.0327	0.1928	0.0004	-0.0001	-0.0001
	104	0.0113	-0.0298	-0.0079	0.0000	0.0000	-0.0001
	105	0.0125	-0.0298	0.0084	0.0000	0.0000	-0.0001
	106	0.0087	-0.0295	0.0083	0.0000	0.0000	-0.0001
	107	0.0133	-0.0312	0.0196	0.0000	0.0000	-0.0001

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	108	-0.0368	-0.0297	0.4029	0.0007	-0.0001	-0.0001
	109	-0.0356	-0.0297	0.4193	0.0008	-0.0001	-0.0001
	110	-0.0394	-0.0295	0.4191	0.0008	-0.0001	-0.0001
	111	-0.0348	-0.0311	0.4305	0.0008	-0.0001	-0.0001
	112	0.0046	-0.0301	0.0093	0.0000	0.0000	-0.0001
	113	0.0058	-0.0301	0.0256	0.0000	0.0000	-0.0001
	114	0.0020	-0.0299	0.0255	0.0000	0.0000	-0.0001
	115	0.0066	-0.0315	0.0368	0.0001	0.0000	-0.0001
	116	-0.0249	-0.0300	0.0608	0.0001	0.0000	-0.0001
	117	-0.0237	-0.0300	0.0771	0.0001	0.0000	-0.0001
	118	-0.0275	-0.0298	0.0770	0.0001	0.0000	-0.0001
	119	-0.0228	-0.0314	0.0883	0.0002	0.0000	-0.0001
	120	0.0390	-0.0152	-0.1467	-0.0003	0.0001	-0.0001
	121	-0.0251	-0.0151	0.4010	0.0007	-0.0001	0.0000
	122	0.0302	-0.0156	-0.1238	-0.0002	0.0001	-0.0001
	123	-0.0091	-0.0155	-0.0552	-0.0001	0.0000	0.0000
	124	-0.0260	-0.0253	0.1212	0.0002	0.0000	-0.0001
	125	-0.0269	-0.0253	0.1056	0.0002	0.0000	-0.0001
	126	-0.0392	-0.0248	0.0979	0.0002	-0.0001	-0.0001
	127	-0.0432	-0.0268	0.0973	0.0002	-0.0001	-0.0001
91	100	-0.0296	-0.0033	0.0730	0.0001	-0.0001	0.0000
	101	-0.0284	-0.0034	0.0933	0.0002	-0.0001	0.0000
	102	-0.0332	-0.0029	0.0997	0.0002	-0.0001	0.0000
	103	-0.0286	-0.0028	0.1061	0.0002	-0.0001	0.0000
	104	0.0115	-0.0029	-0.0056	0.0000	0.0000	0.0000
	105	0.0127	-0.0029	0.0147	0.0000	0.0000	0.0000
	106	0.0089	-0.0025	0.0104	0.0000	0.0000	0.0000
	107	0.0135	-0.0025	0.0168	0.0000	0.0000	0.0000
	108	-0.0364	-0.0035	0.2216	0.0004	-0.0002	0.0000
	109	-0.0352	-0.0036	0.2419	0.0005	-0.0002	0.0000
	110	-0.0390	-0.0032	0.2376	0.0004	-0.0002	0.0000
	111	-0.0344	-0.0031	0.2440	0.0005	-0.0002	0.0000
	112	0.0050	-0.0030	0.0058	0.0000	0.0000	0.0000
	113	0.0062	-0.0030	0.0262	0.0000	0.0000	0.0000
	114	0.0024	-0.0026	0.0218	0.0000	0.0000	0.0000
	115	0.0070	-0.0025	0.0282	0.0001	0.0000	0.0000
	116	-0.0245	-0.0033	0.0295	0.0001	0.0000	0.0000
	117	-0.0233	-0.0033	0.0498	0.0001	0.0000	0.0000
	118	-0.0272	-0.0029	0.0455	0.0001	0.0000	0.0000
	119	-0.0226	-0.0028	0.0519	0.0001	-0.0001	0.0000
	120	0.0391	-0.0016	-0.0771	-0.0001	0.0001	0.0000
	121	-0.0248	-0.0025	0.2258	0.0004	-0.0002	0.0000
	122	0.0304	-0.0017	-0.0618	-0.0001	0.0001	0.0000
	123	-0.0090	-0.0021	-0.0303	-0.0001	0.0000	0.0000
	124	-0.0257	-0.0037	0.0670	0.0001	-0.0001	0.0000
	125	-0.0265	-0.0037	0.0483	0.0001	-0.0001	0.0000

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	126	-0.0389	-0.0032	0.0333	0.0001	-0.0001	0.0000
	127	-0.0429	-0.0031	0.0307	0.0001	-0.0001	0.0000
187	100	-0.7123	-0.0425	0.1775	0.0003	0.0000	0.0020
	101	-0.6626	-0.0390	0.1592	0.0003	0.0000	0.0017
	102	-0.6463	-0.0414	0.1709	0.0003	0.0000	0.0018
	103	-0.6464	-0.0414	0.1787	0.0003	0.0000	0.0018
	104	-0.6358	-0.0315	-0.0576	0.0001	0.0000	0.0019
	105	-0.5860	-0.0280	-0.0759	0.0001	0.0000	0.0016
	106	-0.5614	-0.0279	-0.0738	0.0001	0.0000	0.0016
	107	-0.5614	-0.0279	-0.0659	0.0001	0.0000	0.0016
	108	-0.5882	-0.0401	0.3476	0.0005	0.0000	0.0019
	109	-0.5384	-0.0366	0.3293	0.0004	0.0000	0.0016
	110	-0.5138	-0.0365	0.3315	0.0004	0.0001	0.0016
	111	-0.5138	-0.0365	0.3393	0.0004	0.0001	0.0016
	112	-0.7231	-0.0423	-0.0360	0.0001	0.0000	0.0020
	113	-0.6734	-0.0388	-0.0543	0.0001	0.0000	0.0017
	114	-0.6487	-0.0388	-0.0522	0.0001	0.0000	0.0017
	115	-0.6488	-0.0388	-0.0443	0.0001	0.0000	0.0017
	116	-0.7187	-0.0424	0.0442	0.0002	0.0000	0.0020
	117	-0.6689	-0.0389	0.0259	0.0002	0.0000	0.0017
	118	-0.6443	-0.0388	0.0280	0.0002	0.0000	0.0017
	119	-0.6443	-0.0388	0.0359	0.0002	0.0000	0.0017
	120	-0.2636	-0.0043	-0.2315	-0.0001	0.0000	0.0008
	121	-0.2001	-0.0157	0.3088	0.0003	0.0001	0.0008
	122	-0.3801	-0.0187	-0.2027	-0.0001	0.0000	0.0009
	123	-0.3741	-0.0188	-0.0958	0.0000	0.0000	0.0009
	124	-0.8903	-0.0377	0.1455	0.0003	-0.0001	0.0022
	125	-0.6946	-0.0317	0.1392	0.0002	-0.0001	0.0016
	126	-0.6097	-0.0317	0.1432	0.0002	-0.0001	0.0015
	127	-0.6077	-0.0317	0.1452	0.0002	-0.0001	0.0015
188	100	-0.9917	-0.0491	0.1640	0.0001	0.0000	0.0027
	101	-0.9591	-0.0464	0.1506	0.0002	0.0000	0.0026
	102	-0.8966	-0.0453	0.1592	0.0001	0.0000	0.0023
	103	-0.8962	-0.0453	0.1671	0.0001	0.0000	0.0023
	104	-0.8890	-0.0385	-0.0747	-0.0001	0.0001	0.0026
	105	-0.8564	-0.0358	-0.0880	0.0000	0.0001	0.0024
	106	-0.7766	-0.0320	-0.0882	-0.0001	0.0001	0.0021
	107	-0.7762	-0.0320	-0.0802	-0.0001	0.0001	0.0021
	108	-0.9596	-0.0465	0.3344	0.0003	0.0001	0.0027
	109	-0.9270	-0.0438	0.3210	0.0003	0.0001	0.0025
	110	-0.8472	-0.0400	0.3209	0.0003	0.0001	0.0022
	111	-0.8468	-0.0400	0.3288	0.0003	0.0001	0.0022
	112	-0.9930	-0.0491	-0.0529	0.0000	0.0000	0.0027
	113	-0.9603	-0.0464	-0.0663	0.0000	0.0000	0.0026
	114	-0.8806	-0.0426	-0.0664	-0.0001	0.0001	0.0023
	115	-0.8802	-0.0426	-0.0585	-0.0001	0.0001	0.0023

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	116	-0.9930	-0.0491	0.0285	0.0000	0.0000	0.0027
	117	-0.9603	-0.0464	0.0151	0.0000	0.0000	0.0026
	118	-0.8806	-0.0426	0.0150	0.0000	0.0000	0.0023
	119	-0.8802	-0.0426	0.0229	0.0000	0.0001	0.0023
	120	-0.3583	-0.0066	-0.2413	-0.0002	0.0000	0.0010
	121	-0.4524	-0.0172	0.3041	0.0003	0.0001	0.0012
	122	-0.4969	-0.0207	-0.2122	-0.0002	0.0000	0.0012
	123	-0.4969	-0.0207	-0.1037	-0.0001	0.0000	0.0012
	124	-1.1744	-0.0439	0.1302	0.0001	0.0000	0.0029
	125	-1.0979	-0.0409	0.1340	0.0002	0.0000	0.0027
	126	-0.8335	-0.0345	0.1349	0.0001	0.0000	0.0020
	127	-0.8288	-0.0345	0.1369	0.0001	0.0000	0.0020
189	100	-0.9928	-0.0434	0.1586	0.0001	0.0000	0.0025
	101	-1.0434	-0.0472	0.1475	0.0001	0.0000	0.0027
	102	-0.9603	-0.0440	0.1586	0.0001	0.0001	0.0024
	103	-0.9537	-0.0441	0.1666	0.0001	0.0001	0.0024
	104	-0.8964	-0.0327	-0.0856	-0.0001	0.0001	0.0023
	105	-0.9469	-0.0365	-0.0967	-0.0001	0.0001	0.0026
	106	-0.8450	-0.0307	-0.0942	-0.0001	0.0001	0.0022
	107	-0.8385	-0.0308	-0.0861	-0.0001	0.0001	0.0022
	108	-0.9948	-0.0407	0.3295	0.0002	0.0001	0.0025
	109	-1.0453	-0.0445	0.3184	0.0003	0.0001	0.0027
	110	-0.9434	-0.0386	0.3208	0.0003	0.0001	0.0023
	111	-0.9369	-0.0388	0.3289	0.0003	0.0002	0.0023
	112	-0.9917	-0.0434	-0.0637	-0.0001	0.0001	0.0025
	113	-1.0422	-0.0472	-0.0748	-0.0001	0.0001	0.0027
	114	-0.9403	-0.0413	-0.0723	-0.0001	0.0001	0.0023
	115	-0.9338	-0.0415	-0.0643	-0.0001	0.0001	0.0023
	116	-0.9936	-0.0434	0.0197	0.0000	0.0001	0.0025
	117	-1.0442	-0.0472	0.0086	0.0000	0.0001	0.0027
	118	-0.9423	-0.0413	0.0111	0.0000	0.0001	0.0023
	119	-0.9357	-0.0415	0.0191	0.0000	0.0001	0.0023
	120	-0.3963	-0.0060	-0.2485	-0.0002	0.0001	0.0011
	121	-0.5275	-0.0166	0.3049	0.0003	0.0001	0.0012
	122	-0.5233	-0.0202	-0.2193	-0.0002	0.0001	0.0012
	123	-0.5260	-0.0202	-0.1081	-0.0001	0.0000	0.0012
	124	-1.0421	-0.0358	0.1246	0.0000	0.0000	0.0024
	125	-1.2068	-0.0418	0.1270	0.0001	0.0000	0.0029
	126	-0.9188	-0.0332	0.1352	0.0001	0.0000	0.0021
	127	-0.8904	-0.0334	0.1375	0.0001	0.0000	0.0020
190	100	-0.9567	-0.0411	0.1620	0.0001	0.0000	0.0023
	101	-1.0091	-0.0438	0.1435	0.0001	0.0001	0.0025
	102	-1.0243	-0.0458	0.1614	0.0002	0.0001	0.0025
	103	-0.9872	-0.0440	0.1667	0.0001	0.0001	0.0024
	104	-0.8736	-0.0304	-0.0911	-0.0001	0.0001	0.0022
	105	-0.9260	-0.0331	-0.1097	-0.0001	0.0001	0.0024

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	106	-0.9222	-0.0324	-0.1000	0.0000	0.0001	0.0024
	107	-0.8851	-0.0306	-0.0948	-0.0001	0.0001	0.0022
	108	-0.9847	-0.0383	0.3342	0.0003	0.0001	0.0023
	109	-1.0371	-0.0410	0.3156	0.0002	0.0002	0.0025
	110	-1.0333	-0.0403	0.3253	0.0003	0.0001	0.0025
	111	-0.9961	-0.0386	0.3305	0.0003	0.0001	0.0024
	112	-0.9530	-0.0411	-0.0687	-0.0001	0.0001	0.0023
	113	-1.0054	-0.0438	-0.0873	-0.0001	0.0001	0.0025
	114	-1.0016	-0.0431	-0.0776	0.0000	0.0001	0.0025
	115	-0.9644	-0.0414	-0.0723	-0.0001	0.0001	0.0023
	116	-0.9576	-0.0411	0.0178	0.0000	0.0001	0.0023
	117	-1.0100	-0.0438	-0.0008	-0.0001	0.0001	0.0025
	118	-1.0062	-0.0431	0.0089	0.0001	0.0001	0.0025
	119	-0.9690	-0.0414	0.0141	0.0000	0.0001	0.0023
	120	-0.4228	-0.0057	-0.2598	-0.0002	0.0001	0.0011
	121	-0.5709	-0.0163	0.3072	0.0003	0.0001	0.0013
	122	-0.5286	-0.0201	-0.2299	-0.0002	0.0001	0.0012
	123	-0.5347	-0.0200	-0.1146	-0.0001	0.0001	0.0012
	124	-0.9243	-0.0331	0.1305	0.0001	0.0000	0.0021
	125	-1.0686	-0.0364	0.1224	0.0000	0.0000	0.0024
	126	-1.0855	-0.0365	0.1420	0.0002	0.0000	0.0024
	127	-0.9695	-0.0334	0.1396	0.0001	0.0000	0.0021
191	100	-1.0084	-0.0412	0.1617	0.0001	0.0000	0.0023
	101	-1.0170	-0.0410	0.1475	0.0001	0.0001	0.0024
	102	-1.1482	-0.0503	0.1595	0.0001	0.0001	0.0029
	103	-1.1048	-0.0477	0.1688	0.0002	0.0001	0.0027
	104	-0.9299	-0.0305	-0.1034	-0.0001	0.0001	0.0023
	105	-0.9385	-0.0303	-0.1176	-0.0001	0.0002	0.0023
	106	-1.0500	-0.0369	-0.1135	-0.0001	0.0001	0.0027
	107	-1.0066	-0.0344	-0.1042	0.0000	0.0001	0.0026
	108	-1.0543	-0.0383	0.3357	0.0003	0.0001	0.0024
	109	-1.0629	-0.0381	0.3216	0.0003	0.0001	0.0024
	110	-1.1743	-0.0447	0.3256	0.0003	0.0001	0.0029
	111	-1.1310	-0.0421	0.3349	0.0003	0.0001	0.0027
	112	-0.9978	-0.0414	-0.0800	-0.0001	0.0001	0.0023
	113	-1.0064	-0.0412	-0.0941	-0.0001	0.0002	0.0023
	114	-1.1178	-0.0478	-0.0901	0.0000	0.0001	0.0028
	115	-1.0745	-0.0452	-0.0808	0.0000	0.0001	0.0026
	116	-1.0069	-0.0413	0.0106	0.0000	0.0001	0.0023
	117	-1.0155	-0.0411	-0.0036	0.0000	0.0001	0.0024
	118	-1.1270	-0.0477	0.0005	0.0000	0.0001	0.0028
	119	-1.0836	-0.0452	0.0098	0.0000	0.0001	0.0026
	120	-0.4636	-0.0057	-0.2751	-0.0002	0.0001	0.0011
	121	-0.6294	-0.0160	0.3104	0.0003	0.0001	0.0013
	122	-0.5541	-0.0202	-0.2439	-0.0002	0.0001	0.0012
	123	-0.5662	-0.0201	-0.1231	-0.0001	0.0001	0.0013

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	124	-0.9534	-0.0332	0.1314	0.0001	0.0000	0.0021
	125	-0.9897	-0.0329	0.1282	0.0001	0.0000	0.0021
	126	-1.3186	-0.0430	0.1377	0.0001	0.0000	0.0031
	127	-1.2207	-0.0397	0.1449	0.0002	0.0000	0.0028
192	100	-1.0910	-0.0428	0.1749	0.0003	0.0001	0.0027
	101	-1.0863	-0.0428	0.1609	0.0003	0.0001	0.0027
	102	-1.1989	-0.0497	0.1646	0.0002	0.0002	0.0031
	103	-1.2036	-0.0507	0.1762	0.0003	0.0002	0.0032
	104	-0.9974	-0.0434	-0.1139	0.0000	0.0003	0.0026
	105	-0.9928	-0.0434	-0.1278	0.0000	0.0003	0.0026
	106	-1.0864	-0.0474	-0.1314	-0.0001	0.0003	0.0029
	107	-1.0912	-0.0483	-0.1198	-0.0001	0.0003	0.0030
	108	-1.1356	-0.0379	0.3530	0.0005	0.0002	0.0028
	109	-1.1309	-0.0379	0.3391	0.0005	0.0002	0.0028
	110	-1.2246	-0.0419	0.3355	0.0004	0.0002	0.0031
	111	-1.2293	-0.0428	0.3471	0.0004	0.0002	0.0032
	112	-1.0586	-0.0521	-0.0893	0.0000	0.0003	0.0027
	113	-1.0540	-0.0521	-0.1032	0.0000	0.0003	0.0027
	114	-1.1476	-0.0561	-0.1068	-0.0001	0.0003	0.0030
	115	-1.1524	-0.0570	-0.0952	0.0000	0.0003	0.0031
	116	-1.0777	-0.0492	0.0083	0.0001	0.0002	0.0027
	117	-1.0730	-0.0492	-0.0056	0.0001	0.0002	0.0027
	118	-1.1667	-0.0532	-0.0092	0.0000	0.0002	0.0030
	119	-1.1714	-0.0541	0.0024	0.0001	0.0002	0.0031
	120	-0.4941	-0.0211	-0.2974	-0.0003	0.0003	0.0013
	121	-0.6783	-0.0138	0.3251	0.0004	0.0002	0.0015
	122	-0.5757	-0.0327	-0.2646	-0.0002	0.0003	0.0014
	123	-0.6011	-0.0289	-0.1345	-0.0001	0.0002	0.0014
	124	-1.0310	-0.0339	0.1470	0.0003	0.0001	0.0025
	125	-1.0398	-0.0338	0.1435	0.0003	0.0001	0.0025
	126	-1.3077	-0.0389	0.1424	0.0002	0.0001	0.0031
	127	-1.3488	-0.0411	0.1505	0.0002	0.0001	0.0032
193	100	-0.0499	-0.0257	0.1673	0.0002	0.0002	0.0002
	101	-0.0485	-0.0257	0.1529	0.0001	0.0002	0.0002
	102	-0.0541	-0.0264	0.1618	0.0001	0.0002	0.0002
	103	-0.0492	-0.0265	0.1701	0.0001	0.0002	0.0002
	104	-0.0024	-0.0150	-0.1487	-0.0004	0.0002	0.0002
	105	-0.0010	-0.0150	-0.1630	-0.0004	0.0002	0.0002
	106	-0.0051	-0.0148	-0.1613	-0.0004	0.0002	0.0002
	107	-0.0002	-0.0149	-0.1530	-0.0004	0.0002	0.0002
	108	-0.0578	-0.0279	0.3575	0.0005	0.0002	0.0002
	109	-0.0565	-0.0279	0.3432	0.0004	0.0002	0.0002
	110	-0.0606	-0.0277	0.3449	0.0004	0.0002	0.0002
	111	-0.0557	-0.0278	0.3532	0.0004	0.0002	0.0002
	112	-0.0105	-0.0168	-0.1193	-0.0003	0.0002	0.0002
	113	-0.0091	-0.0167	-0.1336	-0.0004	0.0002	0.0002

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	114	-0.0132	-0.0166	-0.1319	-0.0004	0.0002	0.0002
	115	-0.0083	-0.0167	-0.1236	-0.0004	0.0002	0.0002
	116	-0.0440	-0.0204	-0.0101	-0.0002	0.0002	0.0002
	117	-0.0427	-0.0204	-0.0245	-0.0002	0.0002	0.0002
	118	-0.0468	-0.0202	-0.0227	-0.0002	0.0002	0.0002
	119	-0.0419	-0.0203	-0.0145	-0.0002	0.0002	0.0002
	120	0.0365	0.0003	-0.3381	-0.0007	0.0002	0.0000
	121	-0.0374	-0.0169	0.3368	0.0005	0.0001	0.0001
	122	0.0257	-0.0020	-0.2989	-0.0006	0.0002	0.0000
	123	-0.0190	-0.0068	-0.1533	-0.0003	0.0001	0.0001
	124	-0.0440	-0.0232	0.1398	0.0001	0.0002	0.0002
	125	-0.0450	-0.0232	0.1361	0.0001	0.0002	0.0002
	126	-0.0586	-0.0230	0.1427	0.0001	0.0002	0.0002
	127	-0.0634	-0.0231	0.1467	0.0001	0.0002	0.0002
6668	100	-0.7926	-0.0940	0.0847	0.0000	-0.0002	0.0012
	101	-0.7671	-0.0889	0.1061	0.0001	-0.0003	0.0012
	102	-0.7240	-0.0861	0.1139	0.0000	-0.0002	0.0012
	103	-0.7235	-0.0864	0.1212	0.0000	-0.0002	0.0011
	104	-0.6986	-0.0932	-0.0048	0.0000	-0.0002	0.0011
	105	-0.6731	-0.0881	0.0166	0.0001	-0.0003	0.0011
	106	-0.6187	-0.0817	0.0125	0.0000	-0.0002	0.0010
	107	-0.6182	-0.0819	0.0198	0.0000	-0.0002	0.0010
	108	-0.7584	-0.0939	0.2499	0.0000	-0.0003	0.0012
	109	-0.7329	-0.0888	0.2713	0.0001	-0.0004	0.0012
	110	-0.6785	-0.0824	0.2672	0.0000	-0.0003	0.0011
	111	-0.6781	-0.0827	0.2745	0.0000	-0.0003	0.0011
	112	-0.7942	-0.0939	0.0076	0.0000	-0.0002	0.0012
	113	-0.7687	-0.0888	0.0290	0.0001	-0.0003	0.0012
	114	-0.7143	-0.0824	0.0249	0.0000	-0.0002	0.0011
	115	-0.7138	-0.0827	0.0322	0.0000	-0.0002	0.0011
	116	-0.7939	-0.0940	0.0351	0.0000	-0.0002	0.0012
	117	-0.7684	-0.0889	0.0565	0.0001	-0.0003	0.0012
	118	-0.7140	-0.0825	0.0524	0.0000	-0.0002	0.0011
	119	-0.7136	-0.0828	0.0597	0.0000	-0.0002	0.0011
	120	-0.2808	-0.0420	-0.0866	0.0000	-0.0001	0.0005
	121	-0.3606	-0.0430	0.2530	0.0000	-0.0002	0.0006
	122	-0.4082	-0.0430	-0.0700	0.0000	-0.0001	0.0007
	123	-0.4079	-0.0431	-0.0334	0.0000	-0.0001	0.0007
	124	-0.9698	-0.0904	0.0763	0.0000	-0.0002	0.0015
	125	-0.8867	-0.0833	0.0564	0.0001	-0.0004	0.0014
	126	-0.6837	-0.0715	0.0415	0.0000	-0.0002	0.0011
	127	-0.6797	-0.0720	0.0392	0.0000	-0.0002	0.0011
6669	100	-0.8102	-0.0763	0.0841	-0.0001	0.0001	0.0014
	101	-0.8513	-0.0831	0.1055	-0.0001	0.0000	0.0015
	102	-0.8114	-0.0780	0.1133	0.0000	-0.0001	0.0015
	103	-0.7981	-0.0767	0.1206	-0.0001	0.0000	0.0014

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	104	-0.7266	-0.0757	-0.0052	-0.0001	0.0000	0.0013
	105	-0.7677	-0.0825	0.0162	-0.0001	0.0000	0.0013
	106	-0.7145	-0.0742	0.0121	0.0000	-0.0001	0.0013
	107	-0.7012	-0.0729	0.0194	-0.0001	0.0000	0.0013
	108	-0.8212	-0.0763	0.2493	-0.0001	0.0000	0.0015
	109	-0.8623	-0.0832	0.2707	-0.0001	0.0000	0.0015
	110	-0.8091	-0.0749	0.2666	0.0000	-0.0001	0.0014
	111	-0.7958	-0.0736	0.2739	-0.0001	-0.0001	0.0014
	112	-0.8083	-0.0763	0.0072	-0.0001	0.0001	0.0014
	113	-0.8494	-0.0831	0.0286	-0.0001	0.0000	0.0015
	114	-0.7962	-0.0748	0.0245	0.0000	-0.0001	0.0014
	115	-0.7829	-0.0735	0.0318	-0.0001	0.0000	0.0014
	116	-0.8109	-0.0763	0.0347	-0.0001	0.0001	0.0014
	117	-0.8520	-0.0831	0.0560	-0.0001	0.0000	0.0015
	118	-0.7988	-0.0748	0.0519	0.0000	-0.0001	0.0014
	119	-0.7855	-0.0736	0.0592	-0.0001	0.0000	0.0014
	120	-0.3313	-0.0379	-0.0866	0.0000	0.0000	0.0006
	121	-0.4574	-0.0388	0.2528	0.0000	-0.0001	0.0008
	122	-0.4403	-0.0387	-0.0701	0.0000	0.0000	0.0008
	123	-0.4437	-0.0387	-0.0335	0.0000	0.0000	0.0008
	124	-0.8304	-0.0676	0.0760	-0.0001	0.0002	0.0015
	125	-0.9777	-0.0785	0.0562	-0.0002	0.0002	0.0017
	126	-0.8155	-0.0664	0.0412	0.0000	-0.0002	0.0015
	127	-0.7643	-0.0638	0.0388	-0.0001	-0.0001	0.0014
6670	100	-0.8329	-0.0818	0.0836	0.0002	-0.0002	0.0014
	101	-0.8448	-0.0828	0.1051	0.0002	-0.0002	0.0014
	102	-0.9315	-0.0963	0.1127	0.0003	-0.0003	0.0015
	103	-0.8985	-0.0922	0.1199	0.0003	-0.0003	0.0015
	104	-0.7617	-0.0812	-0.0055	0.0002	-0.0002	0.0013
	105	-0.7735	-0.0821	0.0159	0.0002	-0.0002	0.0013
	106	-0.8463	-0.0922	0.0118	0.0003	-0.0003	0.0014
	107	-0.8132	-0.0881	0.0190	0.0003	-0.0003	0.0013
	108	-0.8735	-0.0821	0.2484	0.0003	-0.0002	0.0015
	109	-0.8853	-0.0831	0.2699	0.0002	-0.0002	0.0015
	110	-0.9580	-0.0931	0.2657	0.0003	-0.0003	0.0016
	111	-0.9250	-0.0890	0.2729	0.0004	-0.0003	0.0015
	112	-0.8248	-0.0817	0.0069	0.0002	-0.0002	0.0014
	113	-0.8366	-0.0827	0.0283	0.0002	-0.0002	0.0014
	114	-0.9094	-0.0927	0.0242	0.0003	-0.0002	0.0015
	115	-0.8763	-0.0886	0.0314	0.0003	-0.0003	0.0015
	116	-0.8324	-0.0818	0.0343	0.0002	-0.0002	0.0014
	117	-0.8442	-0.0827	0.0557	0.0002	-0.0002	0.0014
	118	-0.9170	-0.0928	0.0515	0.0003	-0.0003	0.0015
	119	-0.8839	-0.0887	0.0587	0.0003	-0.0003	0.0015
	120	-0.3783	-0.0422	-0.0865	0.0001	-0.0001	0.0006
	121	-0.5273	-0.0434	0.2520	0.0001	-0.0002	0.0009

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	122	-0.4623	-0.0429	-0.0700	0.0001	-0.0001	0.0008
	123	-0.4725	-0.0430	-0.0335	0.0001	-0.0001	0.0008
	124	-0.7961	-0.0710	0.0756	0.0002	-0.0002	0.0014
	125	-0.8390	-0.0723	0.0560	0.0002	-0.0001	0.0015
	126	-1.0872	-0.0893	0.0410	0.0003	-0.0004	0.0018
	127	-0.9985	-0.0833	0.0385	0.0004	-0.0005	0.0016
6671	100	-0.6640	-0.0609	0.0827	-0.0006	0.0013	0.0008
	101	-0.6602	-0.0606	0.1040	-0.0006	0.0013	0.0008
	102	-0.7186	-0.0687	0.1115	-0.0007	0.0014	0.0009
	103	-0.7210	-0.0707	0.1186	-0.0008	0.0014	0.0009
	104	-0.5906	-0.0606	-0.0061	-0.0006	0.0012	0.0007
	105	-0.5868	-0.0602	0.0153	-0.0006	0.0012	0.0007
	106	-0.6357	-0.0660	0.0110	-0.0007	0.0013	0.0008
	107	-0.6381	-0.0680	0.0182	-0.0007	0.0013	0.0008
	108	-0.6941	-0.0610	0.2466	-0.0006	0.0013	0.0009
	109	-0.6903	-0.0607	0.2680	-0.0006	0.0013	0.0009
	110	-0.7392	-0.0665	0.2637	-0.0007	0.0014	0.0009
	111	-0.7416	-0.0685	0.2709	-0.0007	0.0014	0.0009
	112	-0.6321	-0.0609	0.0063	-0.0006	0.0013	0.0008
	113	-0.6283	-0.0605	0.0276	-0.0006	0.0013	0.0008
	114	-0.6772	-0.0663	0.0234	-0.0007	0.0014	0.0009
	115	-0.6796	-0.0683	0.0305	-0.0007	0.0014	0.0009
	116	-0.6529	-0.0609	0.0335	-0.0006	0.0013	0.0008
	117	-0.6491	-0.0605	0.0548	-0.0006	0.0013	0.0008
	118	-0.6980	-0.0663	0.0506	-0.0007	0.0014	0.0009
	119	-0.7005	-0.0683	0.0577	-0.0007	0.0014	0.0009
	120	-0.2821	-0.0318	-0.0865	-0.0003	0.0006	0.0004
	121	-0.4202	-0.0324	0.2505	-0.0003	0.0008	0.0005
	122	-0.3375	-0.0321	-0.0700	-0.0003	0.0007	0.0004
	123	-0.3653	-0.0322	-0.0337	-0.0003	0.0007	0.0005
	124	-0.6326	-0.0538	0.0747	-0.0005	0.0012	0.0008
	125	-0.6382	-0.0535	0.0553	-0.0005	0.0012	0.0008
	126	-0.7934	-0.0619	0.0403	-0.0007	0.0015	0.0010
	127	-0.8267	-0.0659	0.0378	-0.0007	0.0016	0.0010

********** END OF LATEST ANALYSIS RESULT **********

==

COLUMN NO. 1 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1279.57	754.26	0.07368

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1279.57	19.05	0.00186

==

COLUMN NO. 2 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1545.49	1052.82	0.08515

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1545.49	63.47	0.00513

==========

COLUMN NO. 3 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1281.87	723.50	0.07055

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1281.87	102.89	0.01003

==========

COLUMN NO. 4 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1173.61	591.22	0.06297

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1173.61	63.56	0.00677

==========

COLUMN NO. 5 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1182.94	580.76	0.06137

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1182.94	70.81	0.00748

==========

COLUMN NO. 6 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1254.80	753.07	0.07502

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1254.80	5.66	0.00056

==========

COLUMN NO. 7 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 850.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 7225.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
36 - 16 MM	1.002	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
24310.27	19448.21	9427.55	2981.03	316.2
M0	P-tens.	Des.Pn	Des.Mn	e/h
1152.67	-3039.02	1153.35	125.98	0.05462

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
24310.27	19448.21	9427.55	2981.03	316.2
M0	P-tens.	Des.Pn	Des.Mn	e/h
1152.67	-3039.02	1153.35	76.31	0.03308

==========

COLUMN NO. 8 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	342.40	24.18	0.03532

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	342.40	0.25	0.00036

==

COLUMN NO. 9 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	268.55	37.93	0.02354

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	268.55	90.38	0.05609

==

COLUMN NO. 10 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	1178.03	44.36	0.01883

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	1178.03	9.18	0.00389

==========

COLUMN NO. 11 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	1083.31	19.62	0.00302

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	1083.31	17.69	0.00272

==========

COLUMN NO. 12 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	916.95	42.35	0.02309

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	916.95	11.40	0.00621

==========

COLUMN NO. 13 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	821.56	5.00	0.00101

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	821.56	32.09	0.00651

==========

COLUMN NO. 14 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	235.32	37.30	0.07926

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	235.32	49.36	0.10489

==========

COLUMN NO. 15 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.900

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	-33.01	1.79	-0.00903

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	-33.01	31.35	-0.15824

==========

COLUMN NO. 56 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	959.98	42.65	0.02221

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	959.98	2.93	0.00153

==

COLUMN NO. 57 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	864.76	10.27	0.00198

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	864.76	7.18	0.00138

==

COLUMN NO. 63 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	715.81	34.32	0.02397

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	715.81	6.12	0.00428

==========

COLUMN NO. 64 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	632.71	30.36	0.00800

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	632.71	78.55	0.02069

==========

COLUMN NO. 70 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	1183.63	8.30	0.00351

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	1183.63	49.85	0.02106

==========

COLUMN NO. 71 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7214.64	2289.70	317.4
M0	P-tens.	Des.Pn	Des.Mn	e/h
898.06	-2363.68	754.53	105.31	0.02326

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
18627.11	14901.69	7022.62	1720.55	245.0
M0	P-tens.	Des.Pn	Des.Mn	e/h
673.27	-2363.68	754.53	3.63	0.00080

===

COLUMN NO. 181 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	626.45	14.04	0.00280

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
6904.58	5523.66	2452.06	433.15	176.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
180.77	-949.68	626.45	14.40	0.00287

===

COLUMN NO. 184 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 850.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 7225.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
36 - 16 MM	1.002	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
24310.27	19448.21	9427.55	2981.03	316.2
M0	P-tens.	Des.Pn	Des.Mn	e/h
1152.67	-3039.02	807.33	148.87	0.03073

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
24310.27	19448.21	9427.55	2981.03	316.2
M0	P-tens.	Des.Pn	Des.Mn	e/h
1152.67	-3039.02	807.33	202.02	0.04170

==========

COLUMN NO. 186 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 413.7 FC - 27.6 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

COLUMN INTERACTION: MOMENT ABOUT Z -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
5629.74	4503.79	2161.91	377.44	174.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
179.15	-935.73	542.21	75.32	0.01736

COLUMN INTERACTION: MOMENT ABOUT Y -AXIS (KN-MET)

P0	Pn max	P-bal.	M-bal.	e-bal. (MM)
5629.74	4503.79	2161.91	377.44	174.6
M0	P-tens.	Des.Pn	Des.Mn	e/h
179.15	-935.73	542.21	126.81	0.02923

**********END OF COLUMN DESIGN RESULTS**********

BEAM NO. 16 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3635.	YES	NO
	CRITICAL POS MOMENT= 35.96 KN-MET AT 0.MM, LOAD 208					
	REQD STEEL= 241.MM2, RHO=0.0018, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 53246.0 cm^4					
2	531.	2 - 12MM	0.	1083.	YES	NO
	CRITICAL NEG MOMENT= 16.81 KN-MET AT 0.MM, LOAD 205					
	REQD STEEL= 112.MM2, RHO=0.0008, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 37140.7 cm^4					
3	529.	3 - 16MM	1346.	4100.	NO	YES
	CRITICAL NEG MOMENT= 95.05 KN-MET AT 4100.MM, LOAD 208					
	REQD STEEL= 488.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					

B E A M N O. 16 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 3.38 KNS Vc= 124.68 KNS Vs= 0.00 KNS
Tu= 9.08 KN-MET Tc= 4.9 KN-MET Ts= 12.1 KN-MET LOAD 220
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.15 SQ.CM.

AT END SUPPORT - Vu= 29.79 KNS Vc= 125.96 KNS Vs= 0.00 KNS
Tu= 9.08 KN-MET Tc= 4.9 KN-MET Ts= 12.1 KN-MET LOAD 220
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.15 SQ.CM.

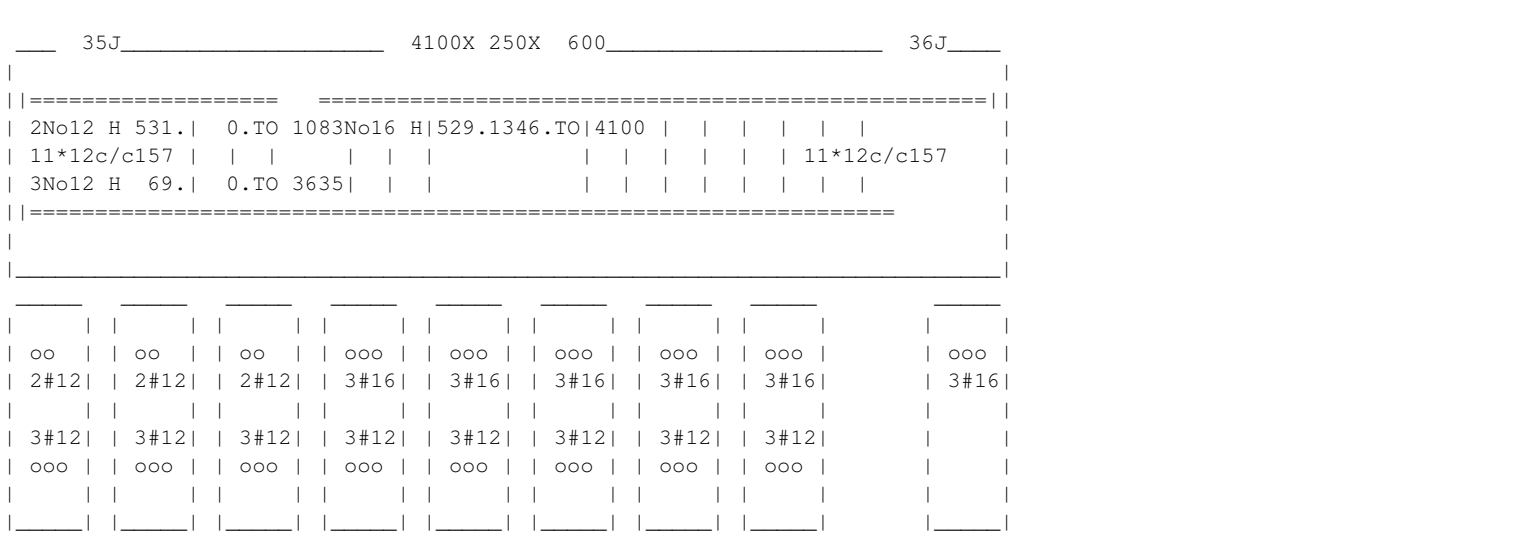

BEAM NO. 17 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	5634.	YES	NO
	CRITICAL POS MOMENT= 35.82 KN-MET AT 2167.MM, LOAD 208					
	REQD STEEL= 240.MM2, RHO=0.0018, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 53246.0 cm^4					
2	531.	4 - 12MM	0.	1483.	YES	NO
	CRITICAL NEG MOMENT= 61.85 KN-MET AT 0.MM, LOAD 206					
	REQD STEEL= 417.MM2, RHO=0.0031, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 38. MMS					
	REQD. DEVELOPMENT LENGTH = 492. MMS					

Cracked Moment of Inertia Iz at above location = 68354.5 cm^4

3	529.	3 - 16MM	4071.	6500.	NO YES

CRITICAL NEG MOMENT= 95.11 KN-MET AT 6500.MM, LOAD 208
REQD STEEL= 488.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 17 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 36.26 KNS Vc= 232.78 KNS Vs= 0.00 KNS
Tu= 3.77 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 53.67 KNS Vc= 126.59 KNS Vs= 0.00 KNS
Tu= 3.77 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

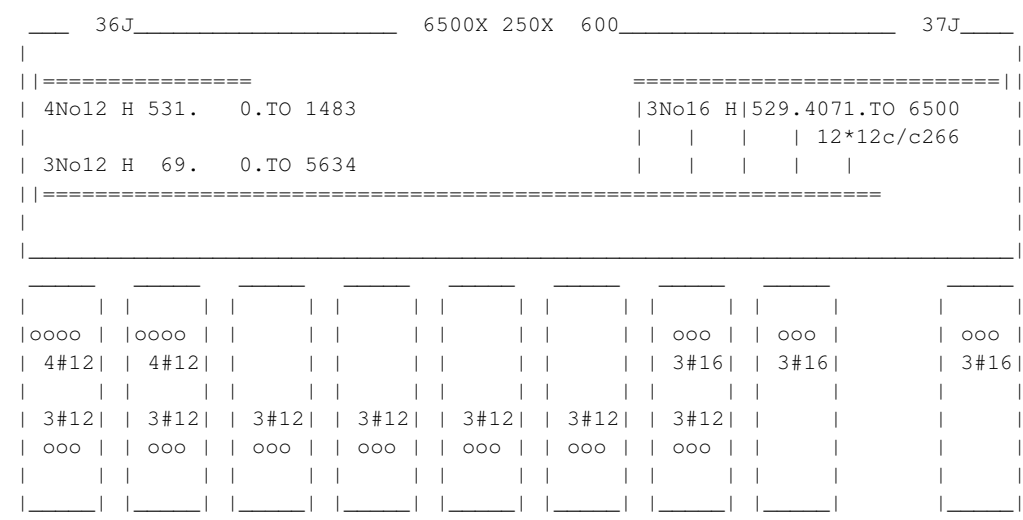

BEAM NO. 18 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	5698.	YES	NO
	CRITICAL POS MOMENT= 30.99 KN-MET AT 3250.MM, LOAD 200					
	REQD STEEL= 207.MM2, RHO=0.0016, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 37140.7 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 72.67 KN-MET AT 0.MM, LOAD 206					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	529.	3 - 16MM	4071.	6500.	NO	YES
	CRITICAL NEG MOMENT= 89.46 KN-MET AT 6500.MM, LOAD 209					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					

B E A M N O. 18 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 40.64 KNS Vc= 129.37 KNS Vs= 0.00 KNS
Tu= 2.02 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

AT END SUPPORT - Vu= 49.29 KNS Vc= 126.56 KNS Vs= 0.00 KNS
Tu= 2.02 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

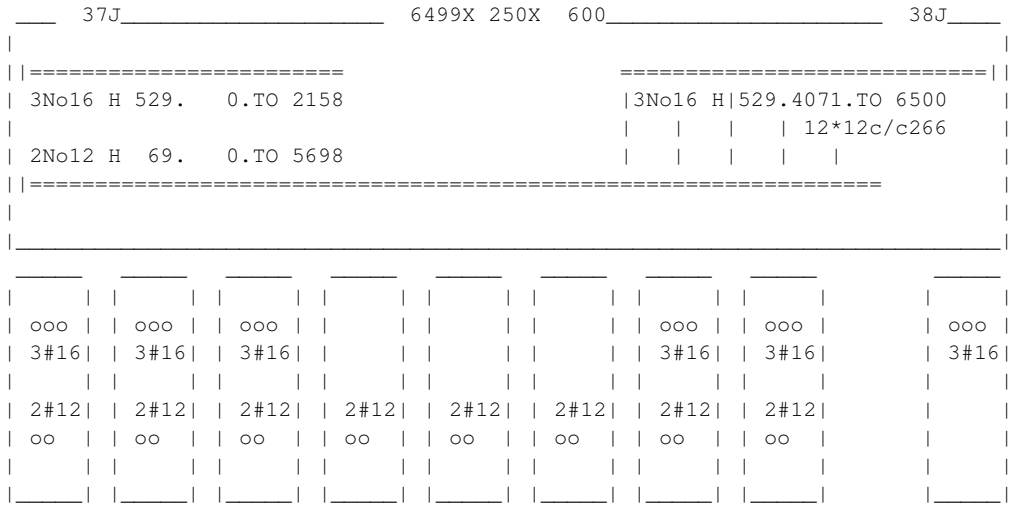

BEAM NO. 19 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	5698.	YES	NO

CRITICAL POS MOMENT= 30.94 KN-MET AT 3250.MM, LOAD 201
REQD STEEL= 207.MM2, RHO=0.0016, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

2	529.	3 - 16MM	0.	2158.	YES	NO

CRITICAL NEG MOMENT= 75.28 KN-MET AT 0.MM, LOAD 204
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

3	529.	3 - 16MM	4071.	6500.	NO YES

CRITICAL NEG MOMENT= 91.81 KN-MET AT 6500.MM, LOAD 210
REQD STEEL= 471.MM2, RHO=0.0036, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 19 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 41.04 KNS Vc= 127.68 KNS Vs= 0.00 KNS
Tu= 1.21 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 48.89 KNS Vc= 126.26 KNS Vs= 0.00 KNS
Tu= 1.21 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

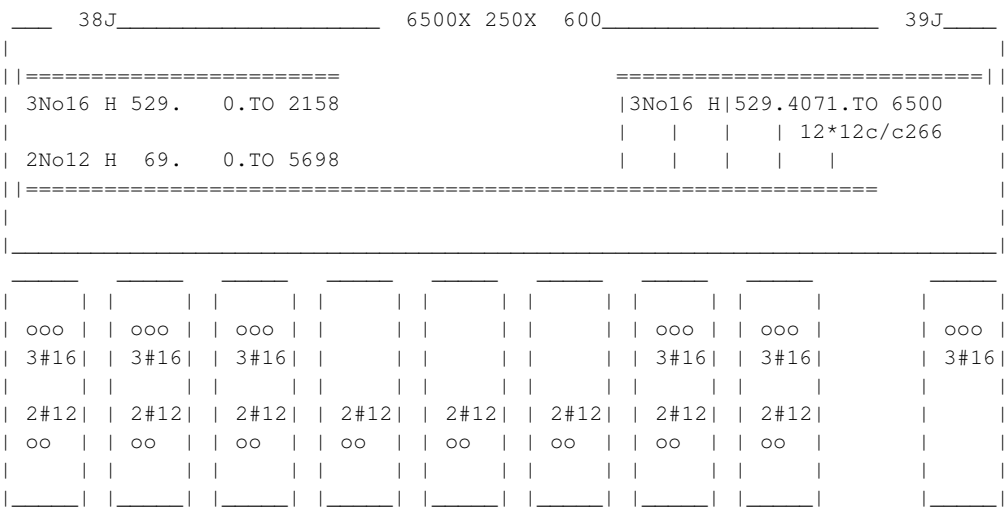

BEAM NO. 20 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	5700.	YES	NO
	CRITICAL POS MOMENT= 31.13 KN-MET AT 2167.MM, LOAD 210					
	REQD STEEL= 208.MM2, RHO=0.0016, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 37140.7 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 78.43 KN-MET AT 0.MM, LOAD 205					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	529.	3 - 16MM	4071.	6500.	NO	YES
	CRITICAL NEG MOMENT= 91.58 KN-MET AT 6500.MM, LOAD 211					
	REQD STEEL= 470.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					

B E A M N O. 20 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 39.94 KNS Vc= 128.35 KNS Vs= 0.00 KNS
Tu= 0.25 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

AT END SUPPORT - Vu= 49.99 KNS Vc= 126.22 KNS Vs= 0.00 KNS
Tu= 0.25 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

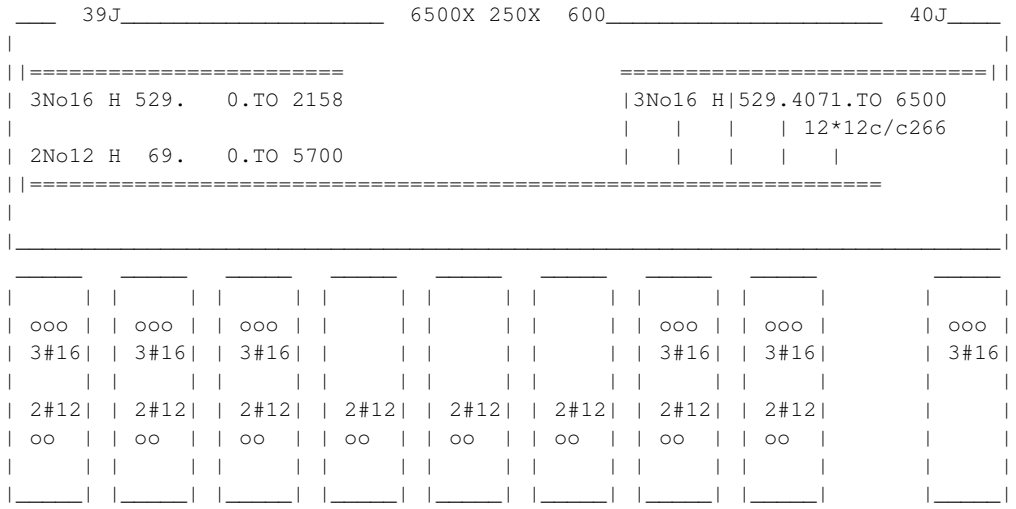

BEAM NO. 21 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	6241.	YES	NO

CRITICAL POS MOMENT= 31.06 KN-MET AT 2167.MM, LOAD 211
REQD STEEL= 207.MM2, RHO=0.0016, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

2	529.	3 - 16MM	0.	2158.	YES	NO

CRITICAL NEG MOMENT= 78.19 KN-MET AT 0.MM, LOAD 206
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

3	529.	3 - 16MM	3529.	6500.	NO YES

CRITICAL NEG MOMENT= 102.46 KN-MET AT 6500.MM, LOAD 208
REQD STEEL= 527.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 21 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 37.60 KNS Vc= 129.97 KNS Vs= 0.00 KNS
Tu= 1.46 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 52.34 KNS Vc= 129.97 KNS Vs= 0.00 KNS
Tu= 1.46 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

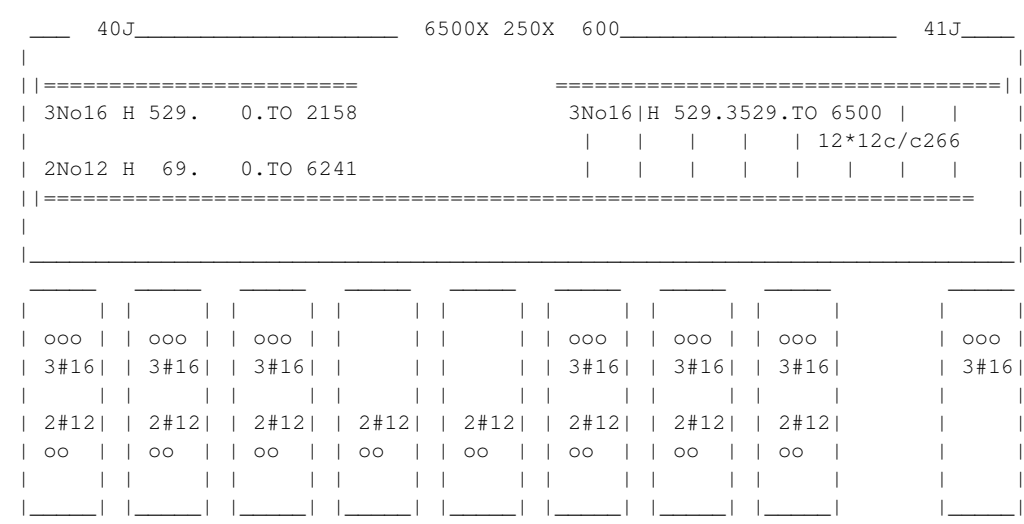

BEAM NO. 22 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3550. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	4 - 12MM	0.	3550.	YES	YES

CRITICAL POS MOMENT=	60.76 KN-MET AT 3550.MM, LOAD 205
REQD STEEL=	409.MM2, RHO=0.0031, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 37./ 38. MMS
REQD. DEVELOPMENT LENGTH =	492. MMS

Cracked Moment of Inertia Iz at above location = 68354.5 cm^4

2	529.	3 - 16MM	0.	2308.	YES	NO

CRITICAL NEG MOMENT=	114.94 KN-MET AT 0.MM, LOAD 206
REQD STEEL=	593.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH =	605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 22 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 48.92 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1250. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

AT END SUPPORT - Vu= 7.65 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1250. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

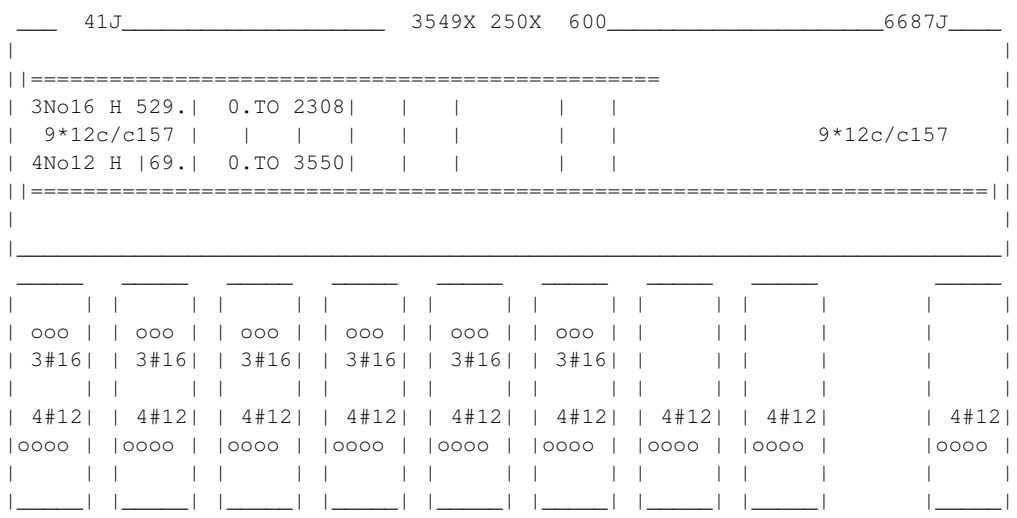

BEAM NO. 23 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	0.	2030.	YES	YES

CRITICAL POS MOMENT= 57.30 KN-MET AT 2030.MM, LOAD 202
REQD STEEL= 387.MM2, RHO=0.0029, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 61275.5 cm^4

2	531.	2 - 12MM	0.	1077.	YES	NO

CRITICAL NEG MOMENT= 29.17 KN-MET AT 0.MM, LOAD 210
REQD STEEL= 195.MM2, RHO=0.0015, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

B E A M N O. 23 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 29.31 KNS Vc= 130.99 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 490. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

AT END SUPPORT - Vu= 25.15 KNS Vc= 125.83 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 490. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

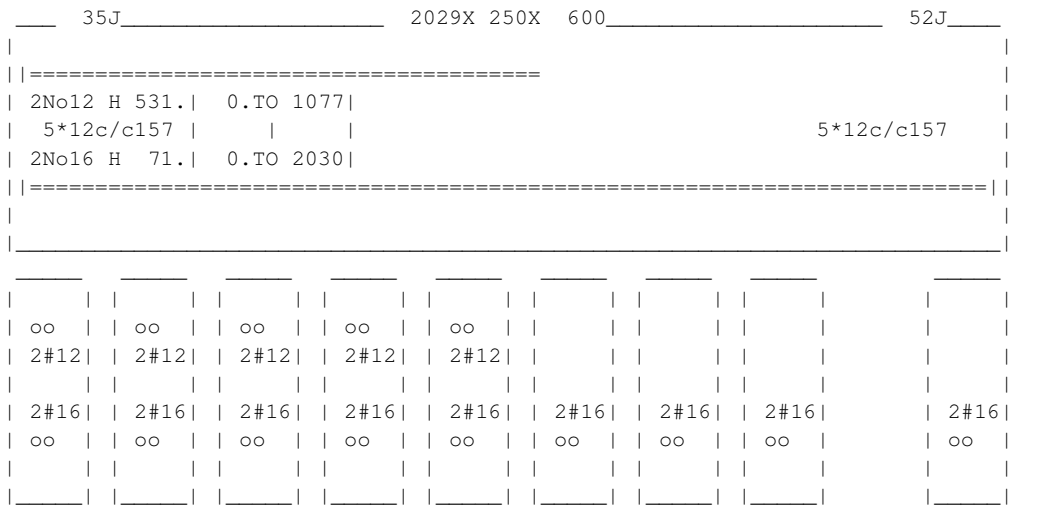

==========

BEAM NO. 24 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	665.	YES	NO

CRITICAL POS MOMENT= 33.08 KN-MET AT 0.MM, LOAD 208
REQD STEEL= 221.MM2, RHO=0.0017, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

2	529.	3 - 16MM	0.	1455.	YES YES

CRITICAL NEG MOMENT= 95.96 KN-MET AT 1455.MM, LOAD 200
REQD STEEL= 493.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 24 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 85.08 KNS Vc= 136.95 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 203. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

AT END SUPPORT - Vu= 86.80 KNS Vc= 127.76 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 203. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

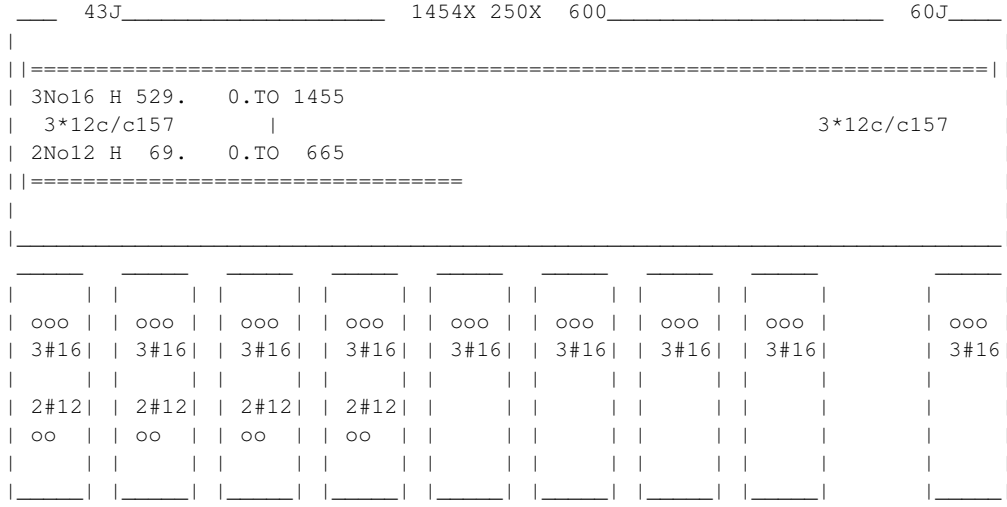

BEAM NO. 25 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	0.	4100.	YES	YES

CRITICAL POS MOMENT= 54.25 KN-MET AT 2733.MM, LOAD 200
REQD STEEL= 366.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 61275.5 cm^4

B E A M N O. 25 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 33.74 KNS Vc= 129.69 KNS Vs= 0.00 KNS
Tu= 11.29 KN-MET Tc= 4.9 KN-MET Ts= 15.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.92 SQ.CM.

AT END SUPPORT - Vu= 16.60 KNS Vc= 124.89 KNS Vs= 0.00 KNS
Tu= 11.29 KN-MET Tc= 4.9 KN-MET Ts= 15.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.92 SQ.CM.

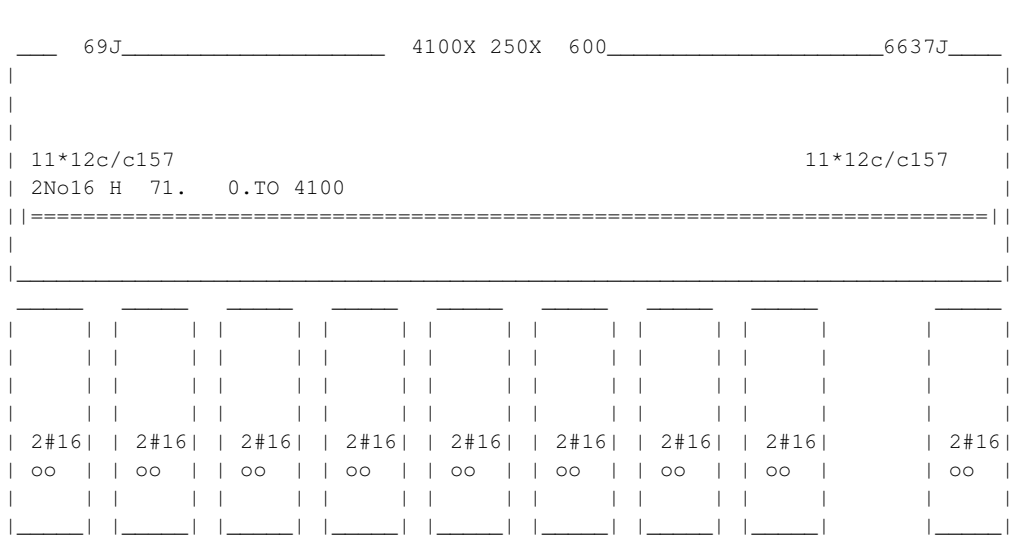

BEAM NO. 26 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	967.	6500.	NO	YES
	CRITICAL POS MOMENT= 56.26 KN-MET AT 4333.MM, LOAD 200					
	REQD STEEL= 380.MM2, RHO=0.0029, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS					
	REQD. DEVELOPMENT LENGTH = 410. MMS					
	Cracked Moment of Inertia Iz at above location = 61275.5 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 89.64 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	531.	2 - 12MM	5829.	6500.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=      5.85 KN-MET  AT  6500.MM, LOAD  201|
|   REQD STEEL=    39.MM2, RHO=0.0003, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

B E A M N O. 26 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 60.73 KNS Vc= 127.48 KNS Vs= 0.00 KNS
Tu= 6.75 KN-MET Tc= 4.9 KN-MET Ts= 9.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 2725. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.34 SQ.CM.

AT END SUPPORT - Vu= 29.21 KNS Vc= 127.02 KNS Vs= 0.00 KNS
Tu= 6.75 KN-MET Tc= 4.9 KN-MET Ts= 9.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 2725. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.34 SQ.CM.

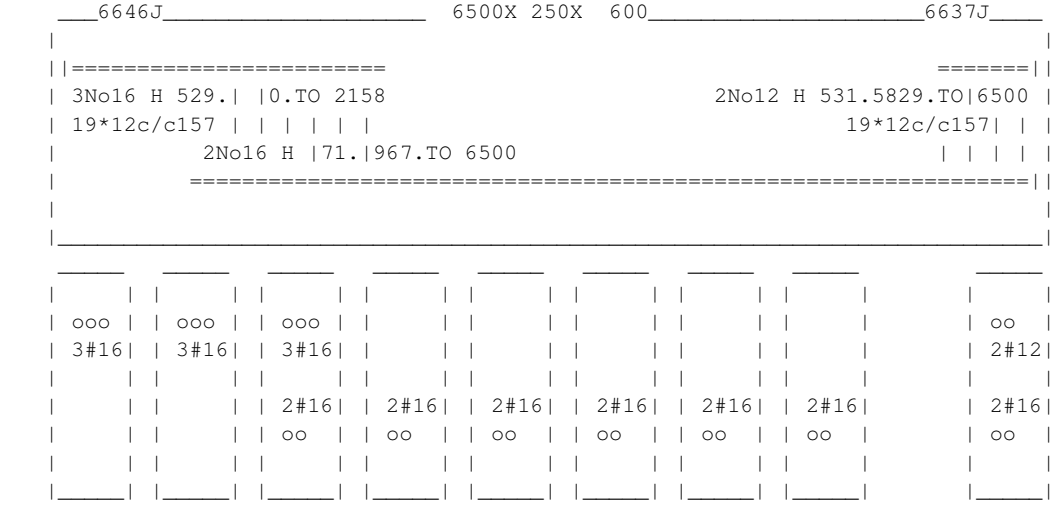

BEAM NO. 27 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	1656.	5656.	NO	NO
	CRITICAL POS MOMENT= 26.38 KN-MET AT 3792.MM, LOAD 202					
	REQD STEEL= 176.MM2, RHO=0.0013, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 37140.7 cm^4					
2	529.	3 - 16MM	0.	2700.	YES	NO
	CRITICAL NEG MOMENT= 93.65 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 481.MM2, RHO=0.0036, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	531.	3 - 12MM	4746.	6500.	NO	YES
	CRITICAL NEG MOMENT= 45.73 KN-MET AT 6500.MM, LOAD 203					
	REQD STEEL= 307.MM2, RHO=0.0023, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 53246.0 cm^4					

B E A M N O. 27 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 52.22 KNS Vc= 130.40 KNS Vs= 0.00 KNS
Tu= 1.09 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 37.71 KNS Vc= 130.40 KNS Vs= 0.00 KNS
Tu= 1.09 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

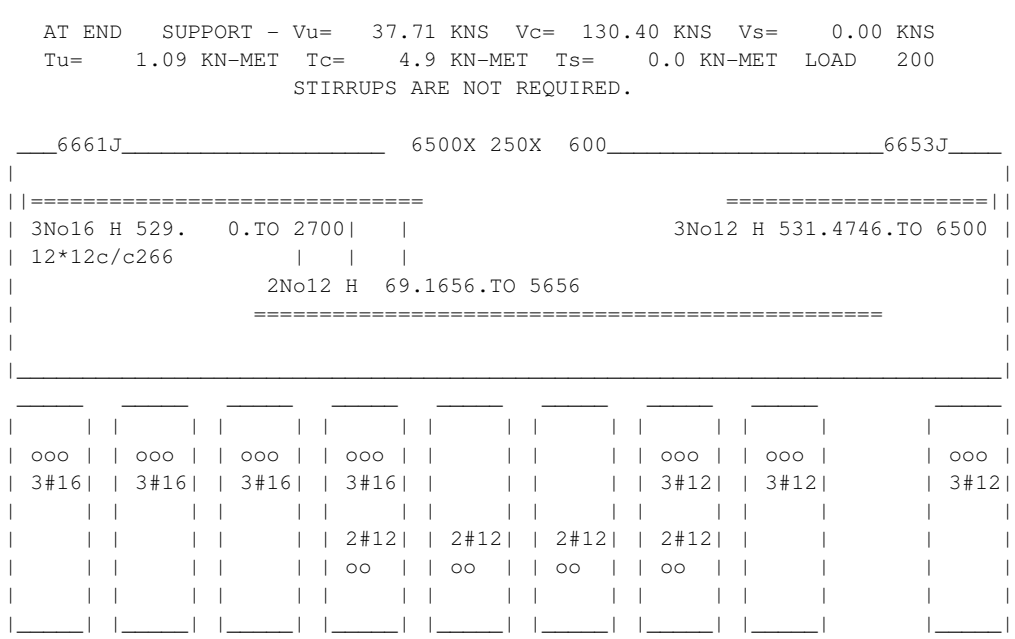

BEAM NO. 28 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	775.	2030.	NO	YES

CRITICAL POS MOMENT= 93.09 KN-MET AT 2030.MM, LOAD 200
REQD STEEL= 478.MM2, RHO=0.0036, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

2	527.	3 - 20MM	0.	2030.	YES	YES

CRITICAL NEG MOMENT= 129.21 KN-MET AT 0.MM, LOAD 205
REQD STEEL= 673.MM2, RHO=0.0051, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS
REQD. DEVELOPMENT LENGTH = 981. MMS

Cracked Moment of Inertia Iz at above location = 123768.7 cm^4

B E A M N O. 28 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 107.48 KNS Vc= 132.15 KNS Vs= 11.15 KNS
Tu= 0.75 KN-MET Tc= 5.2 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 490. MM

AT END SUPPORT - Vu= 103.32 KNS Vc= 138.32 KNS Vs= 0.00 KNS
Tu= 0.75 KN-MET Tc= 5.2 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 490. MM

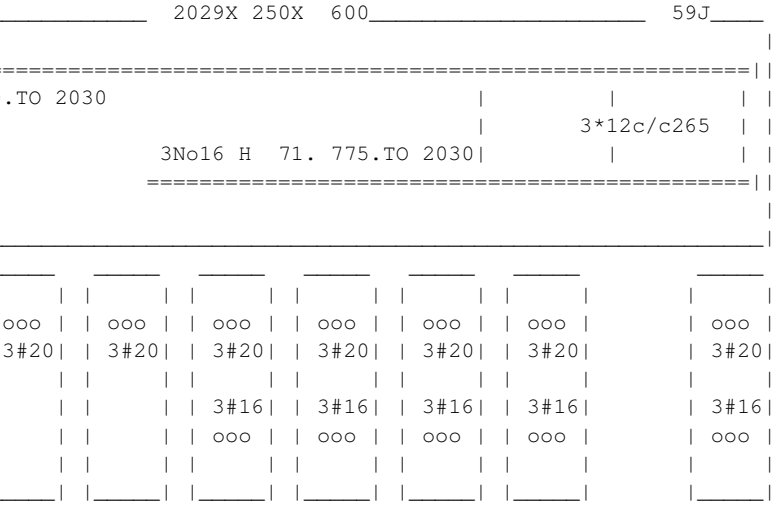

BEAM NO. 29 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6030. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	872.	4907.	NO	NO

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     52.10 KN-MET  AT  3015.MM, LOAD  205|
|   REQD STEEL=   377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  109. MMS         |
|   REQD. DEVELOPMENT LENGTH =   410. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    39141.0 cm^4

  2        427.     3 - 20MM         0.         2104.        YES  NO
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    106.60 KN-MET  AT     0.MM, LOAD  207|
|   REQD STEEL=   692.MM2, RHO=0.0065, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   52. MMS         |
|   REQD. DEVELOPMENT LENGTH =   981. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    77766.8 cm^4

  3        427.     3 - 20MM      3674.         6030.        NO   YES
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    106.11 KN-MET  AT  6030.MM, LOAD  223|
|   REQD STEEL=   688.MM2, RHO=0.0064, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   52. MMS         |
|   REQD. DEVELOPMENT LENGTH =   981. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    77766.8 cm^4
```

B E A M N O. 29 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=   87.86 KNS  Vc=  104.70 KNS  Vs=   12.44 KNS
Tu=    0.15 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 215. MM  C/C FOR 2590. MM

AT END   SUPPORT - Vu=   81.29 KNS  Vc=  104.70 KNS  Vs=    3.69 KNS
Tu=    0.15 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 215. MM  C/C FOR 2365. MM
```

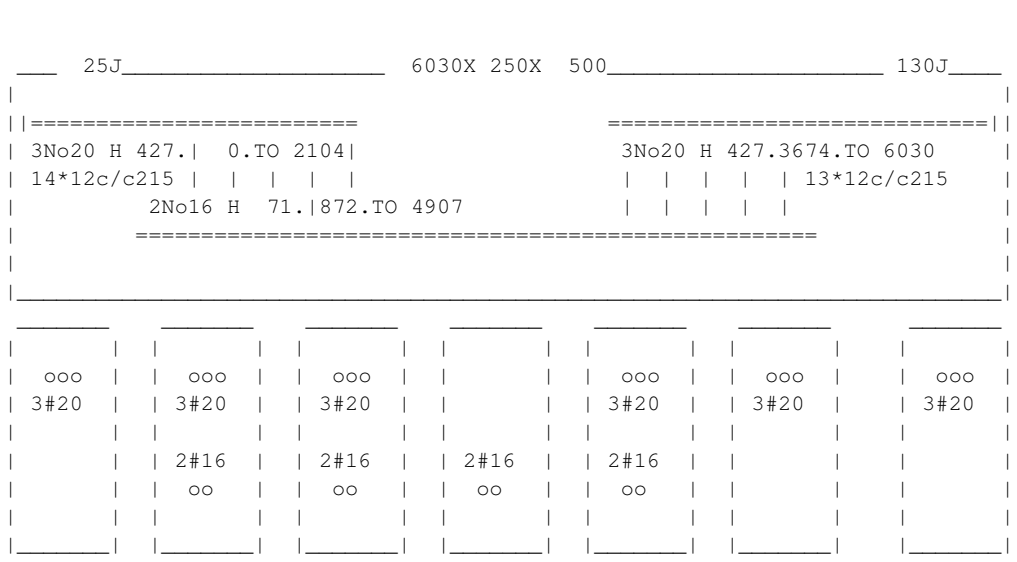

BEAM NO. 30 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 9750. MM FY - 414. FC - 28. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	57.	2 - 12MM	1034.	7497.	NO	NO
	CRITICAL POS MOMENT= 11.63 KN-MET AT 4062.MM, LOAD 209					
	REQD STEEL= 122.MM2, RHO=0.0014, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 16366.2 cm^4					
2	343.	3 - 12MM	0.	2069.	YES	NO
	CRITICAL NEG MOMENT= 25.58 KN-MET AT 0.MM, LOAD 204					
	REQD STEEL= 272.MM2, RHO=0.0032, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 68. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 23141.3 cm^4					
3	343.	3 - 12MM	6462.	9750.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     30.69 KN-MET  AT  9750.MM, LOAD  211|
|   REQD STEEL=   286.MM2, RHO=0.0033, RHOMX=0.0214 RHOMN=0.0033 |
|   MAX/MIN/ACTUAL BAR SPACING=   254./   37./   68. MMS         |
|   REQD. DEVELOPMENT LENGTH =   341. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 23141.3 cm^4

B E A M N O. 30 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 12.69 KNS Vc= 71.94 KNS Vs= 0.00 KNS
Tu= 0.44 KN-MET Tc= 2.4 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 12.33 KNS Vc= 71.94 KNS Vs= 0.00 KNS
Tu= 0.44 KN-MET Tc= 2.4 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

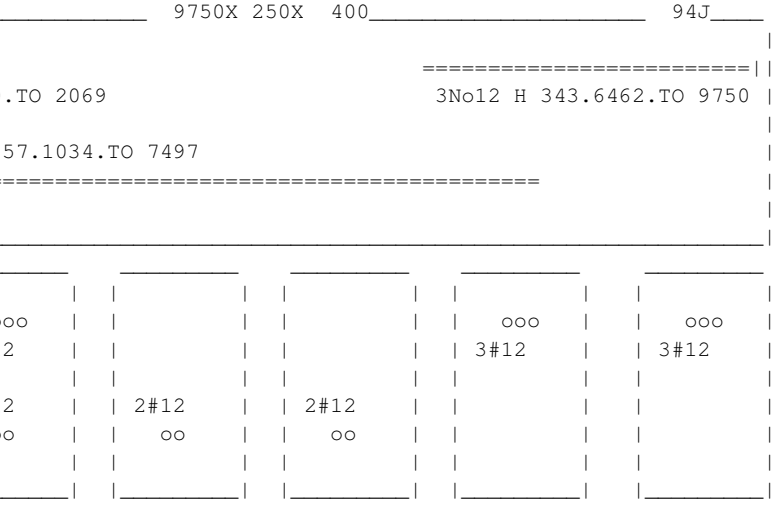

BEAM NO. 31 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 9750. MM FY - 414. FC - 28. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	57.	2 - 12MM	1033.	7498.	NO	NO

```
|--------------------------------------------------------------|
|   CRITICAL POS MOMENT=     11.70 KN-MET  AT  4062.MM, LOAD  211|
|   REQD STEEL=   123.MM2, RHO=0.0014, RHOMX=0.0214 RHOMN=0.0033 |
|   MAX/MIN/ACTUAL BAR SPACING=   254./   37./  136. MMS         |
|   REQD. DEVELOPMENT LENGTH =   341. MMS                       |
|--------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    16366.2 cm^4

  2        343.     3 - 12MM         0.         2069.        YES  NO
|--------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     24.03 KN-MET  AT     0.MM, LOAD  204|
|   REQD STEEL=   255.MM2, RHO=0.0030, RHOMX=0.0214 RHOMN=0.0033 |
|   MAX/MIN/ACTUAL BAR SPACING=   254./   37./   68. MMS         |
|   REQD. DEVELOPMENT LENGTH =   341. MMS                       |
|--------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    23141.3 cm^4

  3        343.     3 - 12MM      6462.         9750.        NO   YES
|--------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     31.28 KN-MET  AT  9750.MM, LOAD  211|
|   REQD STEEL=   286.MM2, RHO=0.0033, RHOMX=0.0214 RHOMN=0.0033 |
|   MAX/MIN/ACTUAL BAR SPACING=   254./   37./   68. MMS         |
|   REQD. DEVELOPMENT LENGTH =   341. MMS                       |
|--------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    23141.3 cm^4
```

B E A M N O. 31 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=   12.34 KNS  Vc=   73.12 KNS  Vs=    0.00 KNS
Tu=    0.11 KN-MET  Tc=    2.5 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
AT END   SUPPORT - Vu=   12.69 KNS  Vc=   73.12 KNS  Vs=    0.00 KNS
Tu=    0.11 KN-MET  Tc=    2.5 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
```

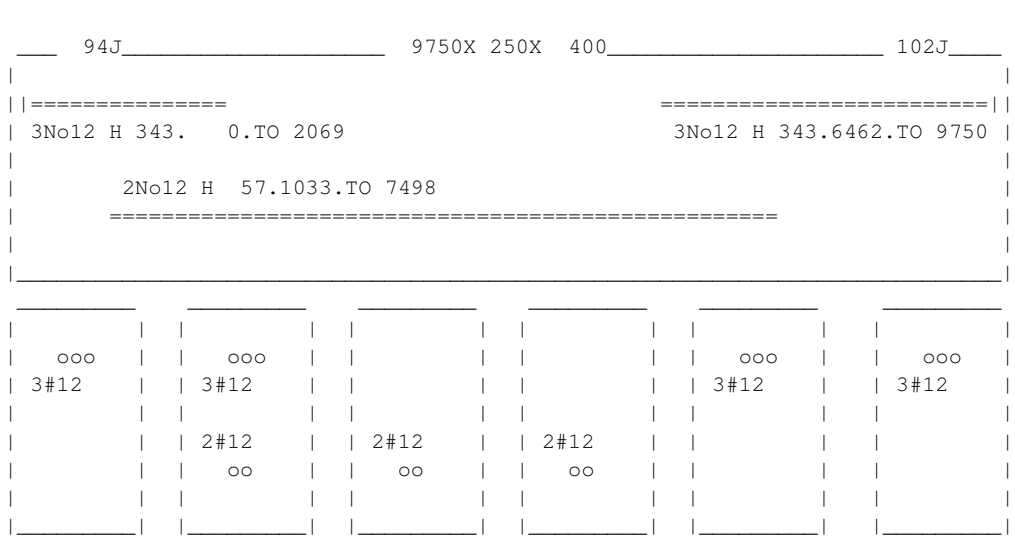

BEAM NO. 32 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 9750. MM FY - 414. FC - 28. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	57.	2 - 12MM	1035.	7497.	NO	NO
	CRITICAL POS MOMENT= 11.60 KN-MET AT 4062.MM, LOAD 209					
	REQD STEEL= 122.MM2, RHO=0.0014, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 16366.2 cm^4					
2	343.	3 - 12MM	0.	2069.	YES	NO
	CRITICAL NEG MOMENT= 24.17 KN-MET AT 0.MM, LOAD 204					
	REQD STEEL= 257.MM2, RHO=0.0030, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 68. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 23141.3 cm^4					
3	343.	3 - 12MM	6462.	9750.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     30.83 KN-MET  AT  9750.MM, LOAD  211|
|   REQD STEEL=   286.MM2, RHO=0.0033, RHOMX=0.0214 RHOMN=0.0033 |
|   MAX/MIN/ACTUAL BAR SPACING=   254./   37./   68. MMS         |
|   REQD. DEVELOPMENT LENGTH =   341. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 23141.3 cm^4

B E A M N O. 32 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 12.40 KNS Vc= 73.58 KNS Vs= 0.00 KNS
Tu= 0.14 KN-MET Tc= 2.5 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 12.63 KNS Vc= 73.58 KNS Vs= 0.00 KNS
Tu= 0.14 KN-MET Tc= 2.5 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

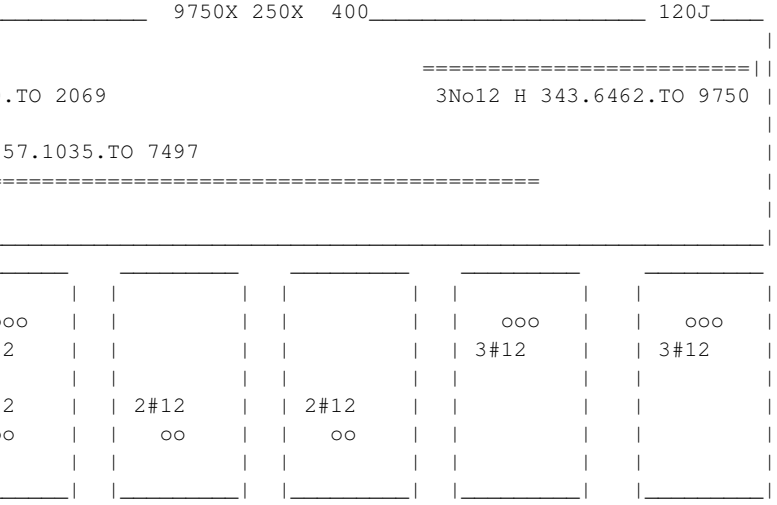

BEAM NO. 33 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	1455.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     67.91 KN-MET  AT     0.MM, LOAD  200|
|   REQD STEEL=   460.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./   54. MMS         |
|   REQD. DEVELOPMENT LENGTH =   605. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 33 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 5.01 KNS Vc= 123.98 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 203. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

AT END SUPPORT - Vu= 6.73 KNS Vc= 124.11 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 203. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

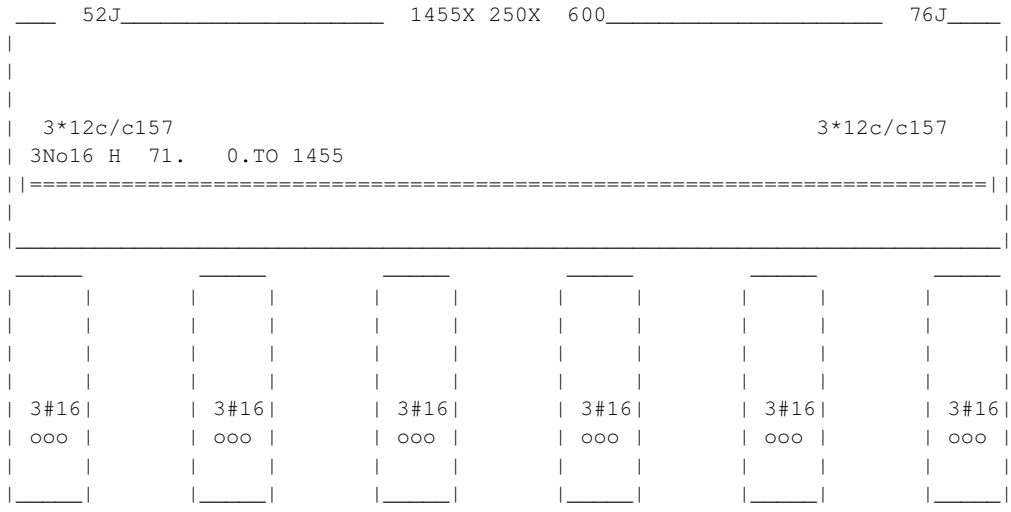

BEAM NO. 34 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	2920.	YES	NO

CRITICAL POS MOMENT= 20.64 KN-MET AT 1367.MM, LOAD 202
REQD STEEL= 137.MM2, RHO=0.0010, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

2	531.	4 - 12MM	2162.	4100.	NO	YES

CRITICAL NEG MOMENT= 60.45 KN-MET AT 4100.MM, LOAD 200
REQD STEEL= 407.MM2, RHO=0.0031, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 38. MMS
REQD. DEVELOPMENT LENGTH = 492. MMS

Cracked Moment of Inertia Iz at above location = 68354.5 cm^4

B E A M N O. 34 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 15.36 KNS Vc= 128.62 KNS Vs= 0.00 KNS
Tu= 13.00 KN-MET Tc= 4.8 KN-MET Ts= 17.3 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.51 SQ.CM.

AT END SUPPORT - Vu= 44.85 KNS Vc= 128.62 KNS Vs= 0.00 KNS
Tu= 13.00 KN-MET Tc= 4.8 KN-MET Ts= 17.3 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1525. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.51 SQ.CM.

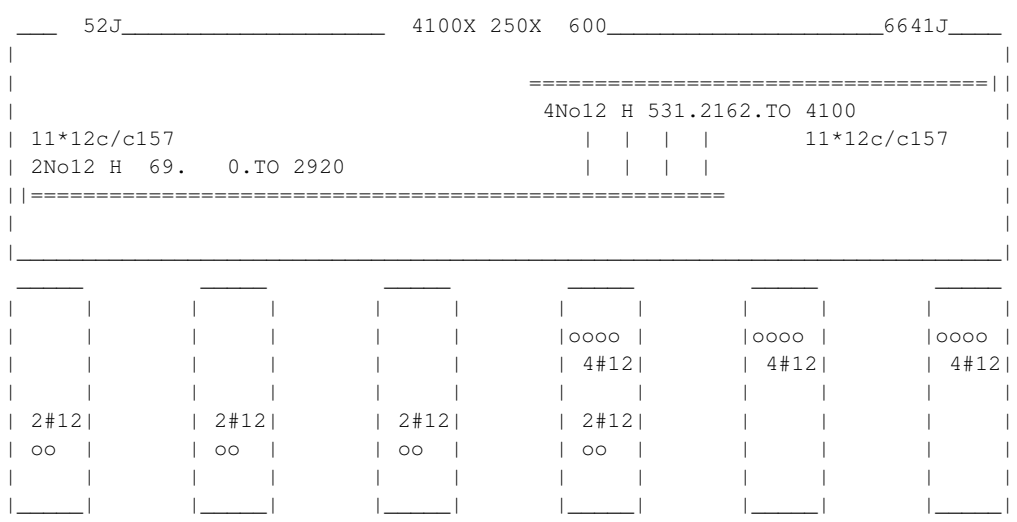

BEAM NO. 35 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	4 - 12MM	1065.	6247.	NO	NO
	CRITICAL POS MOMENT= 63.04 KN-MET AT 3792.MM, LOAD 200					
	REQD STEEL= 425.MM2, RHO=0.0032, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 38. MMS					
	REQD. DEVELOPMENT LENGTH = 492. MMS					
	Cracked Moment of Inertia Iz at above location = 68354.5 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 112.56 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 581.MM2, RHO=0.0044, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	529.	3 - 16MM	5154.	6500.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     82.76 KN-MET  AT  6500.MM, LOAD  200|
|   REQD STEEL=   464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./   54. MMS         |
|   REQD. DEVELOPMENT LENGTH =   605. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 35 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 70.75 KNS Vc= 129.34 KNS Vs= 0.00 KNS
Tu= 3.84 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 142.72 KNS Vc= 129.23 KNS Vs= 61.06 KNS
Tu= 3.18 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 220
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM C/C FOR 2725. MM

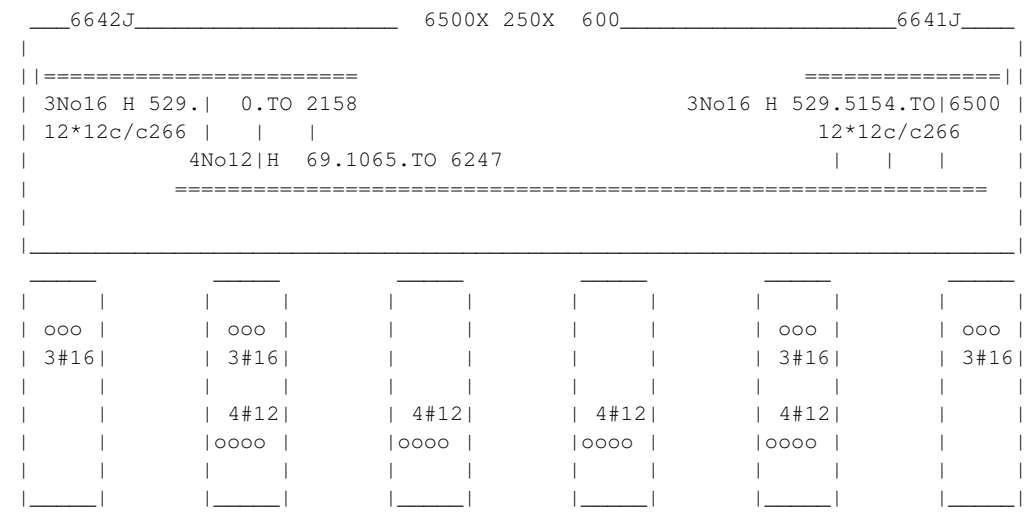

BEAM NO. 36 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	944.	5285.	NO	NO
	CRITICAL POS MOMENT= 116.21 KN-MET AT 3250.MM, LOAD 222					
	REQD STEEL= 603.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 85878.4 cm^4					
2	527.	3 - 20MM	0.	2724.	YES	NO
	CRITICAL NEG MOMENT= 163.28 KN-MET AT 0.MM, LOAD 202					
	REQD STEEL= 859.MM2, RHO=0.0065, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	2 - 20MM	3937.	6500.	NO	YES
	CRITICAL NEG MOMENT= 120.61 KN-MET AT 6500.MM, LOAD 202					
	REQD STEEL= 626.MM2, RHO=0.0048, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 105. MMS					
	REQD. DEVELOPMENT LENGTH = 513. MMS					
	Cracked Moment of Inertia Iz at above location = 88835.7 cm^4					

B E A M N O. 36 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 54.71 KNS Vc= 129.93 KNS Vs= 0.00 KNS
Tu= 0.13 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 52.86 KNS Vc= 129.93 KNS Vs= 0.00 KNS
Tu= 0.13 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

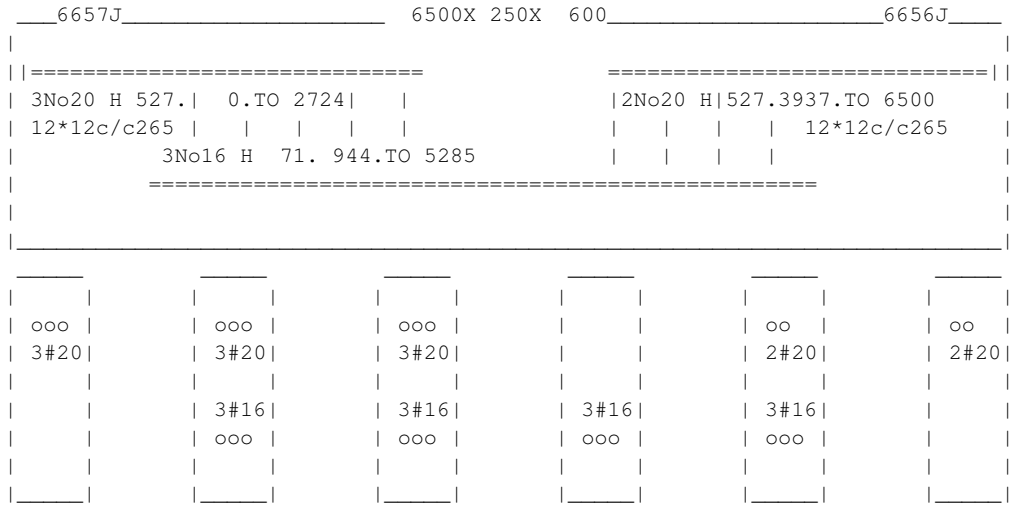

BEAM NO. 37 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	2694.	YES	NO

CRITICAL POS MOMENT= 103.03 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 530.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

2	529.	3 - 16MM	1967.	4000.	NO	YES

CRITICAL NEG MOMENT= 83.65 KN-MET AT 4000.MM, LOAD 200
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 37 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 40.41 KNS Vc= 126.24 KNS Vs= 0.00 KNS
Tu= 0.75 KN-MET Tc= 5.1 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 52.93 KNS Vc= 128.94 KNS Vs= 0.00 KNS
Tu= 0.75 KN-MET Tc= 5.1 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 1475. MM

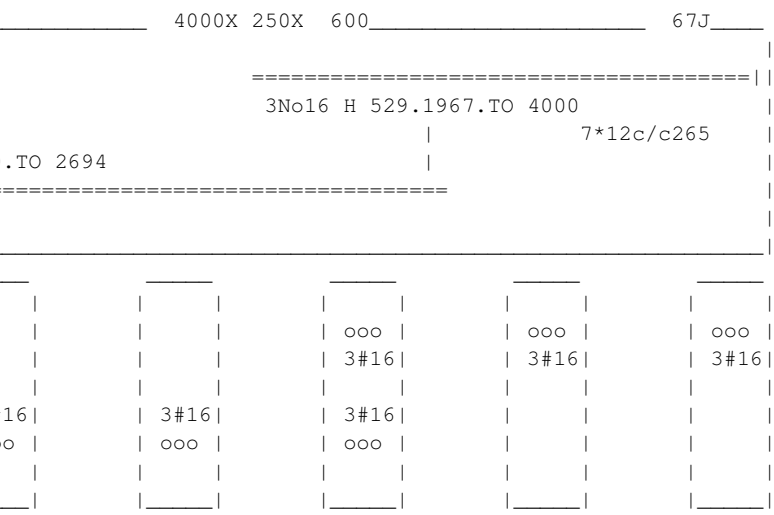

BEAM NO. 38 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	1434.	2250.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     17.65 KN-MET  AT  2250.MM, LOAD  208|
|   REQD STEEL=   117.MM2, RHO=0.0009, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

```
  2        531.     4 - 12MM         0.         2250.        YES  YES
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     60.16 KN-MET  AT     0.MM, LOAD  210|
|   REQD STEEL=   405.MM2, RHO=0.0030, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   38. MMS         |
|   REQD. DEVELOPMENT LENGTH =   492. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 68354.5 cm^4

B E A M N O. 38 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 29.67 KNS Vc= 125.15 KNS Vs= 0.00 KNS
Tu= 6.00 KN-MET Tc= 4.9 KN-MET Ts= 8.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 600. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.08 SQ.CM.

AT END SUPPORT - Vu= 24.58 KNS Vc= 142.38 KNS Vs= 0.00 KNS
Tu= 6.00 KN-MET Tc= 4.9 KN-MET Ts= 8.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 600. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.08 SQ.CM.

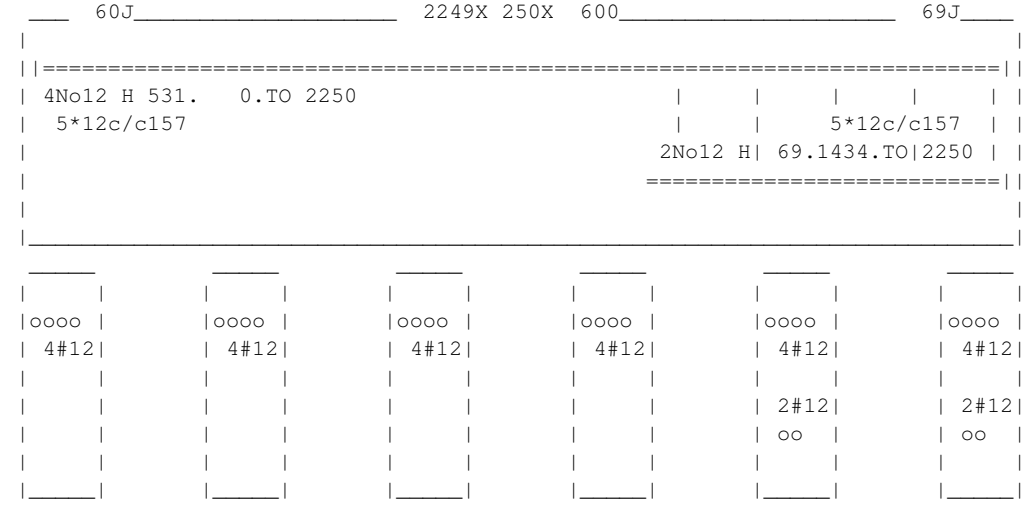

BEAM NO. 39 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	444.	4100.	NO	YES
	CRITICAL POS MOMENT= 59.65 KN-MET AT 4100.MM, LOAD 220					
	REQD STEEL= 402.MM2, RHO=0.0030, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS					
	REQD. DEVELOPMENT LENGTH = 410. MMS					
	Cracked Moment of Inertia Iz at above location = 61770.9 cm^4					
2	529.	3 - 16MM	0.	2242.	YES	NO
	CRITICAL NEG MOMENT= 97.33 KN-MET AT 0.MM, LOAD 212					
	REQD STEEL= 500.MM2, RHO=0.0038, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					

B E A M N O. 39 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 67.00 KNS Vc= 127.95 KNS Vs= 0.00 KNS
Tu= 0.05 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 1525. MM

AT END SUPPORT - Vu= 6.79 KNS Vc= 124.14 KNS Vs= 0.00 KNS
Tu= 0.05 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

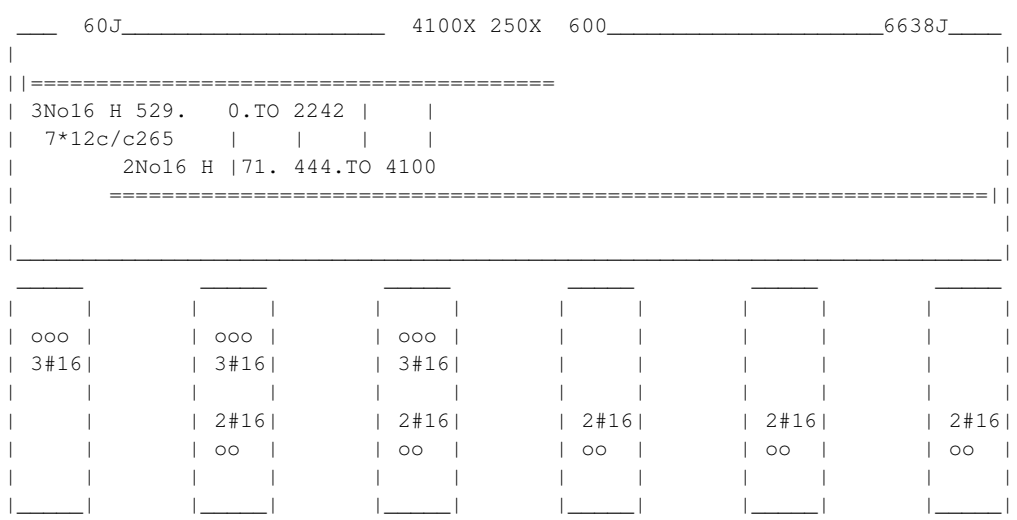

BEAM NO. 40 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	1038.	6500.	NO	YES
	CRITICAL POS MOMENT= 86.07 KN-MET AT 4333.MM, LOAD 200					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	527.	2 - 20MM	0.	1750.	YES	NO
	CRITICAL NEG MOMENT= 116.33 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 603.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 105. MMS					
	REQD. DEVELOPMENT LENGTH = 513. MMS					
	Cracked Moment of Inertia Iz at above location = 88835.7 cm^4					
3	531.	3 - 12MM	5829.	6500.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     44.67 KN-MET  AT  6500.MM, LOAD  200|
|   REQD STEEL=   300.MM2, RHO=0.0023, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 53246.0 cm^4

B E A M N O. 40 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 77.19 KNS Vc= 129.15 KNS Vs= 0.00 KNS
Tu= 2.73 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 127.49 KNS Vc= 148.14 KNS Vs= 21.85 KNS
Tu= 2.73 KN-MET Tc= 5.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

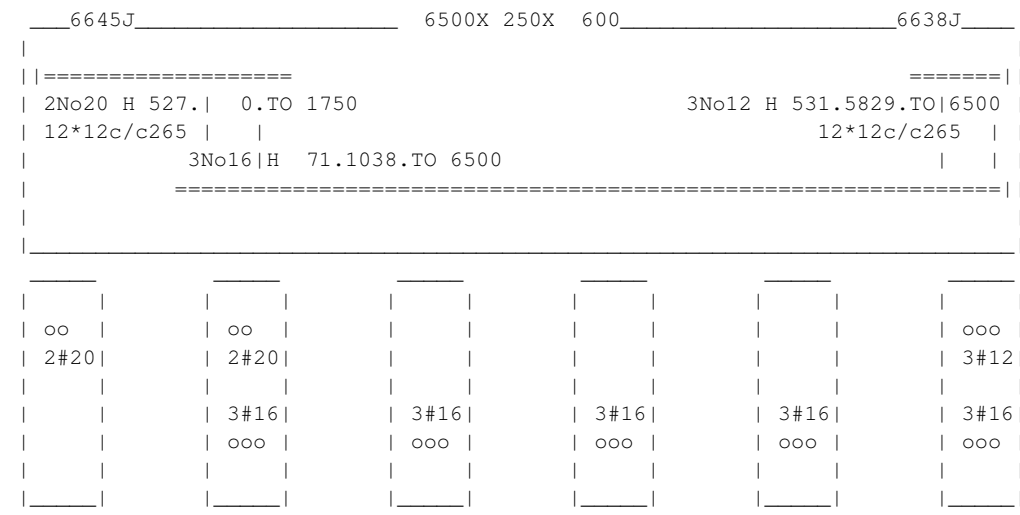

BEAM NO. 41 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	947.	5282.	NO	NO
	CRITICAL POS MOMENT= 115.37 KN-MET AT 3250.MM, LOAD 222					
	REQD STEEL= 598.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 85878.4 cm^4					
2	527.	3 - 20MM	0.	2724.	YES	NO
	CRITICAL NEG MOMENT= 166.03 KN-MET AT 0.MM, LOAD 202					
	REQD STEEL= 874.MM2, RHO=0.0066, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	3 - 20MM	2963.	6500.	NO	YES
	CRITICAL NEG MOMENT= 122.48 KN-MET AT 6500.MM, LOAD 202					
	REQD STEEL= 636.MM2, RHO=0.0048, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					

B E A M N O. 41 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 56.29 KNS Vc= 128.61 KNS Vs= 0.00 KNS
Tu= 0.56 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 51.29 KNS Vc= 128.61 KNS Vs= 0.00 KNS
Tu= 0.56 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

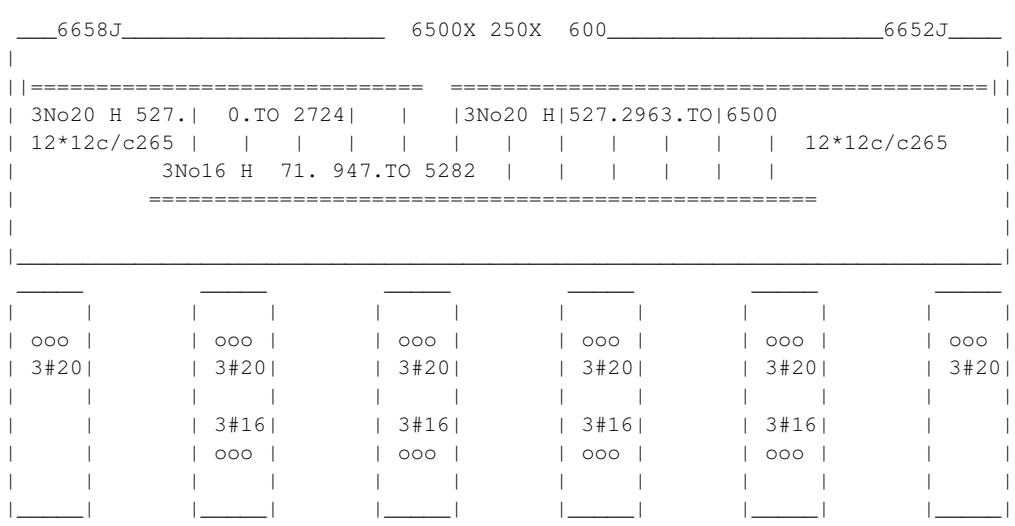

BEAM NO. 42 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 250. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 28.55 KN-MET AT 2250.MM, LOAD 201
REQD STEEL= 108.MM2, RHO=0.0005, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 119923.2 cm^4

2	931.	2 - 12MM	0.	1713.	YES	NO

CRITICAL NEG MOMENT= 45.72 KN-MET AT 0.MM, LOAD 205
REQD STEEL= 173.MM2, RHO=0.0007, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 119923.2 cm^4

B E A M N O. 42 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 21.88 KNS Vc= 226.59 KNS Vs= 0.00 KNS
Tu= 1.61 KN-MET Tc= 9.2 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 19.04 KNS Vc= 220.11 KNS Vs= 0.00 KNS
Tu= 1.61 KN-MET Tc= 9.2 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

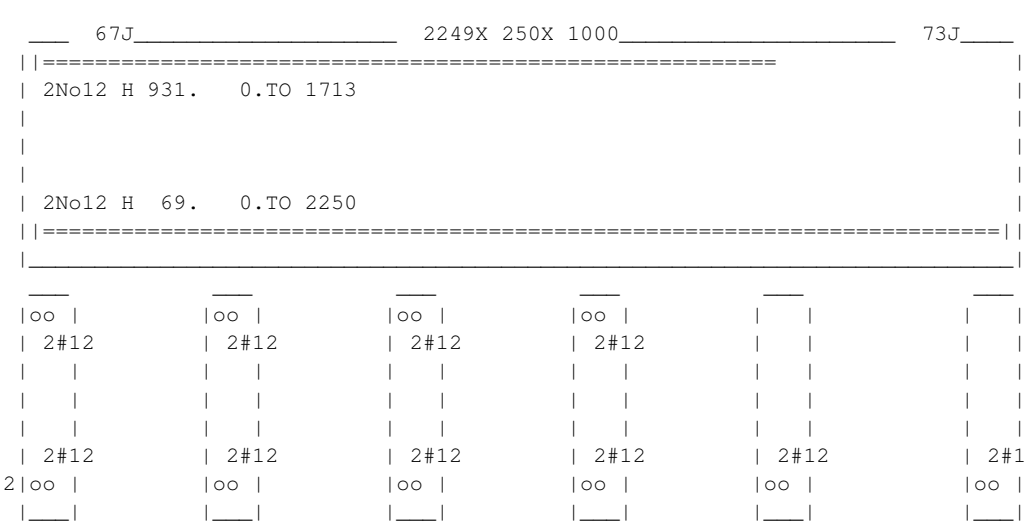

BEAM NO. 43 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	1271.	YES	NO

CRITICAL POS MOMENT= 9.30 KN-MET AT 0.MM, LOAD 211
REQD STEEL= 62.MM2, RHO=0.0005, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

2	531.	3 - 12MM	0.	1780.	YES	YES

CRITICAL NEG MOMENT= 48.69 KN-MET AT 1780.MM, LOAD 220
REQD STEEL= 327.MM2, RHO=0.0025, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 53246.0 cm^4

B E A M N O. 43 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 22.27 KNS Vc= 125.72 KNS Vs= 0.00 KNS
Tu= 6.00 KN-MET Tc= 4.9 KN-MET Ts= 8.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 365. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.08 SQ.CM.

AT END SUPPORT - Vu= 25.37 KNS Vc= 124.68 KNS Vs= 0.00 KNS
Tu= 6.00 KN-MET Tc= 4.9 KN-MET Ts= 8.0 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 365. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.08 SQ.CM.

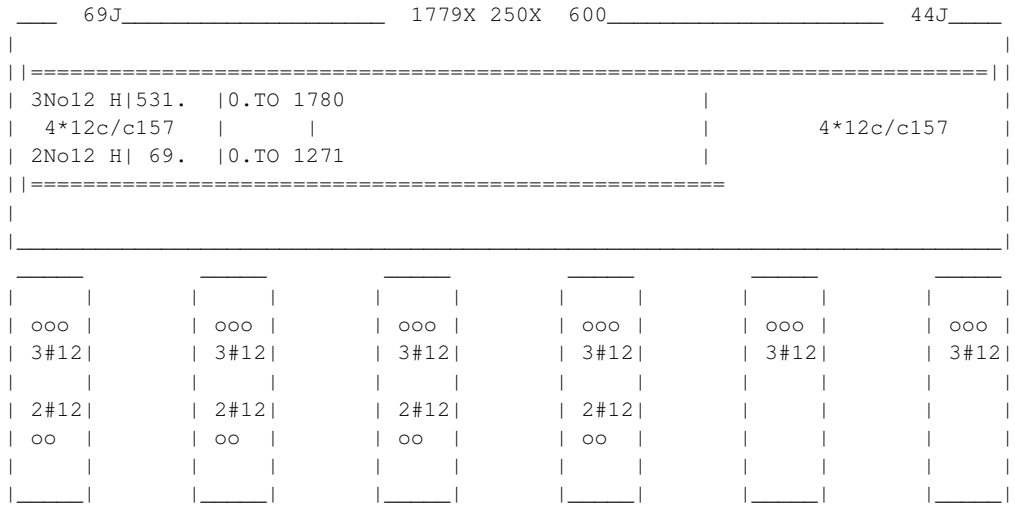

BEAM NO. 44 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 250. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	540.	YES	NO

CRITICAL POS MOMENT= 18.44 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 70.MM2, RHO=0.0003, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 119923.2 cm^4

2	931.	3 - 12MM	0.	1780.	YES	YES

CRITICAL NEG MOMENT= 68.21 KN-MET AT 1780.MM, LOAD 223
REQD STEEL= 259.MM2, RHO=0.0011, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 173789.7 cm^4

B E A M N O. 44 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 44 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 44 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

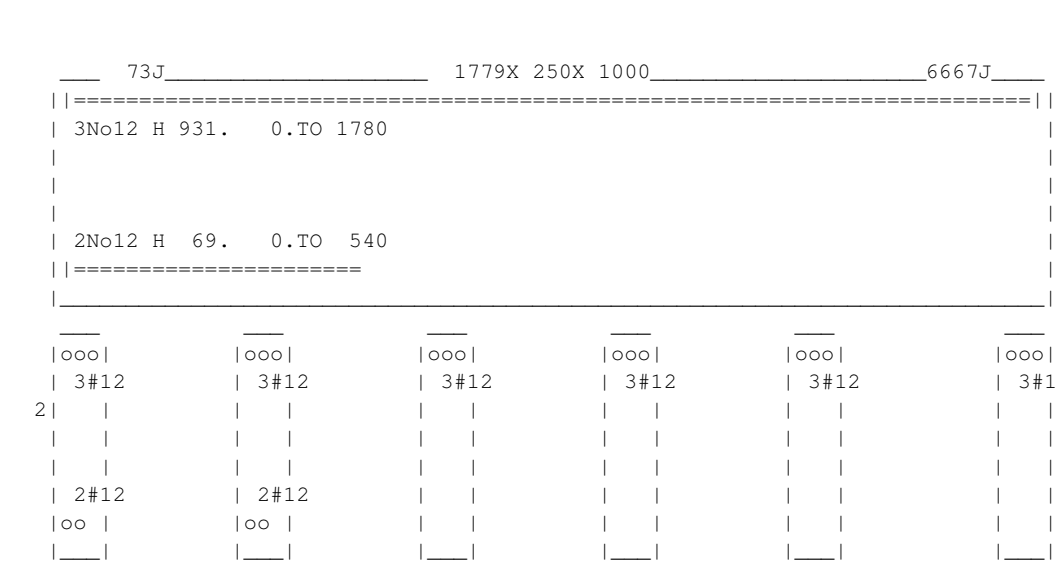

BEAM NO. 45 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 69.39 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

B E A M N O. 45 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 44.18 KNS Vc= 127.81 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 20. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

AT END SUPPORT - Vu= 44.35 KNS Vc= 128.00 KNS Vs= 0.00 KNS
Tu= 8.81 KN-MET Tc= 4.9 KN-MET Ts= 11.7 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 20. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.06 SQ.CM.

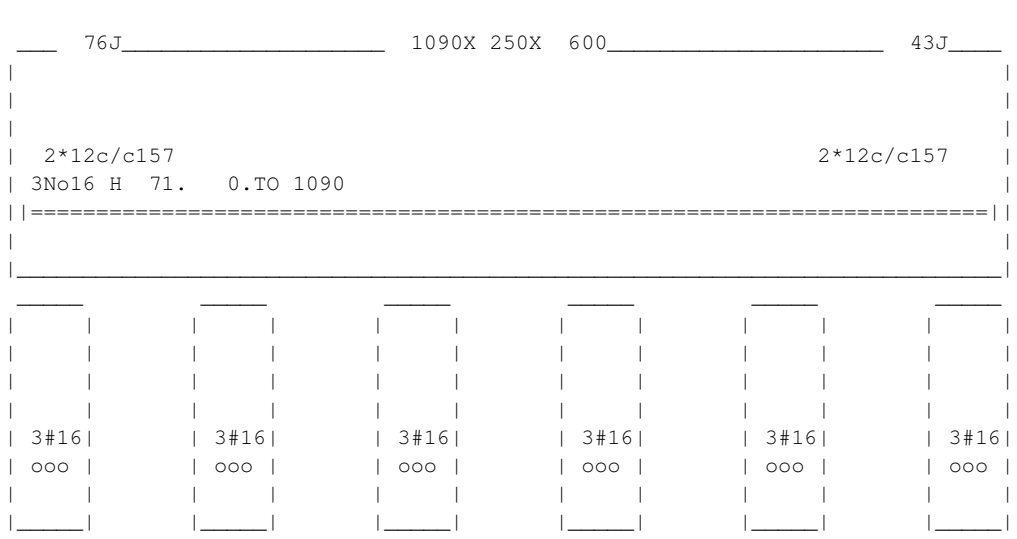

BEAM NO. 46 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3040. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	3040.	YES	YES

CRITICAL POS MOMENT= 19.02 KN-MET AT 1773.MM, LOAD 200
REQD STEEL= 156.MM2, RHO=0.0015, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 46 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 15.89 KNS Vc= 103.29 KNS Vs= 0.00 KNS
Tu= 10.02 KN-MET Tc= 3.8 KN-MET Ts= 13.4 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 1095. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.68 SQ.CM.

AT END SUPPORT - Vu= 8.61 KNS Vc= 101.44 KNS Vs= 0.00 KNS
Tu= 10.02 KN-MET Tc= 3.8 KN-MET Ts= 13.4 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 1095. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.68 SQ.CM.

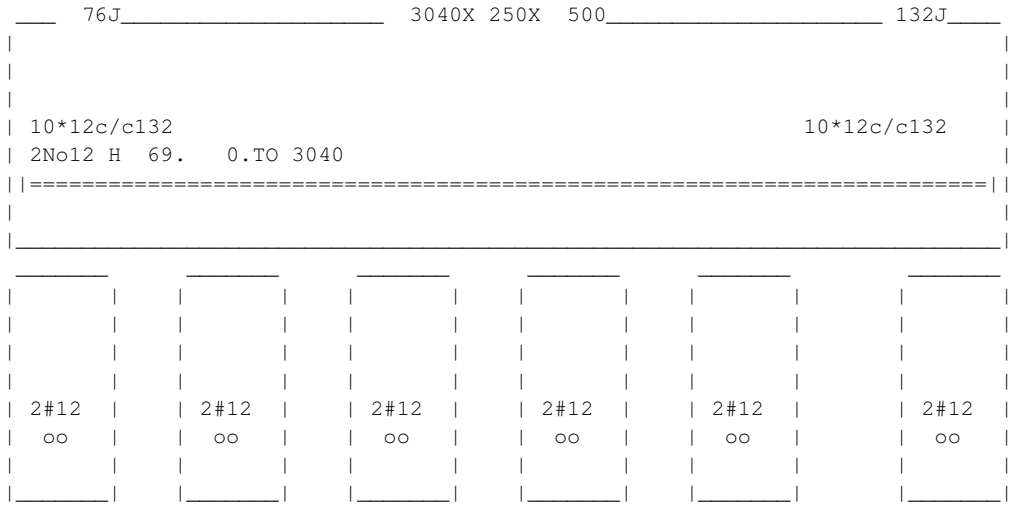

BEAM NO. 47 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	924.	1560.	NO	YES

CRITICAL POS MOMENT= 16.24 KN-MET AT 1560.MM, LOAD 200
REQD STEEL= 133.MM2, RHO=0.0012, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

```
  2        429.     2 - 16MM         0.         1560.        YES  YES
 |-------------------------------------------------------------------|
 |   CRITICAL NEG MOMENT=     56.33 KN-MET  AT     0.MM, LOAD  201|
 |   REQD STEEL=   377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
 |   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  109. MMS         |
 |   REQD. DEVELOPMENT LENGTH =   410. MMS                        |
 |-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    39141.0 cm^4
```

B E A M N O. 47 D E S I G N R E S U L T S - SHEAR

```
 AT START SUPPORT - Vu=   49.11 KNS  Vc=  102.30 KNS  Vs=    0.00 KNS
 Tu=    1.67 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
 NO STIRRUPS ARE REQUIRED FOR TORSION.
 REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
 PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM  C/C FOR  355. MM

 AT END   SUPPORT - Vu=   41.16 KNS  Vc=  185.94 KNS  Vs=    0.00 KNS
 Tu=    1.67 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
```

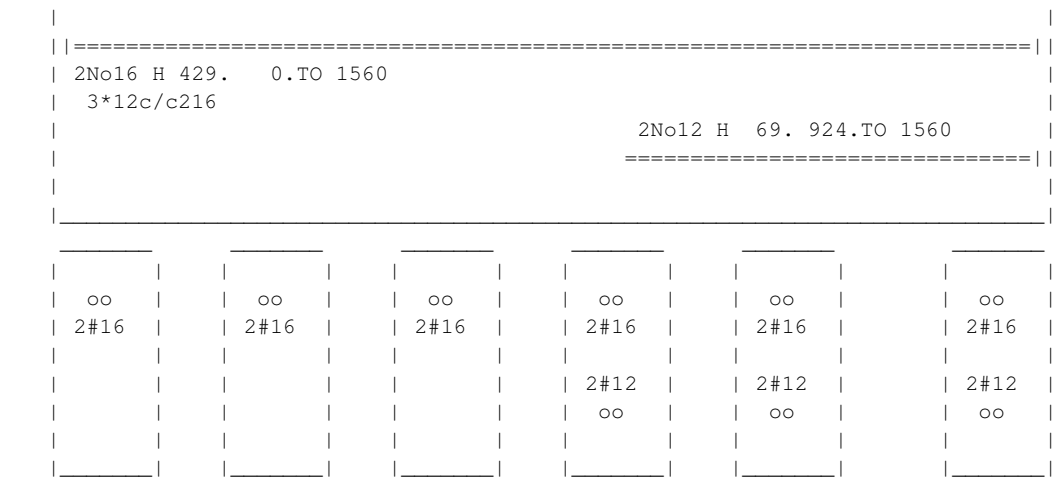

BEAM NO. 48 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	894.	3000.	NO	YES

CRITICAL POS MOMENT= 30.81 KN-MET AT 3000.MM, LOAD 202
REQD STEEL= 255.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2	429.	2 - 16MM	0.	2033.	YES	NO

CRITICAL NEG MOMENT= 52.94 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 48 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 38.27 KNS Vc= 106.04 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 14.22 KNS Vc= 106.04 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

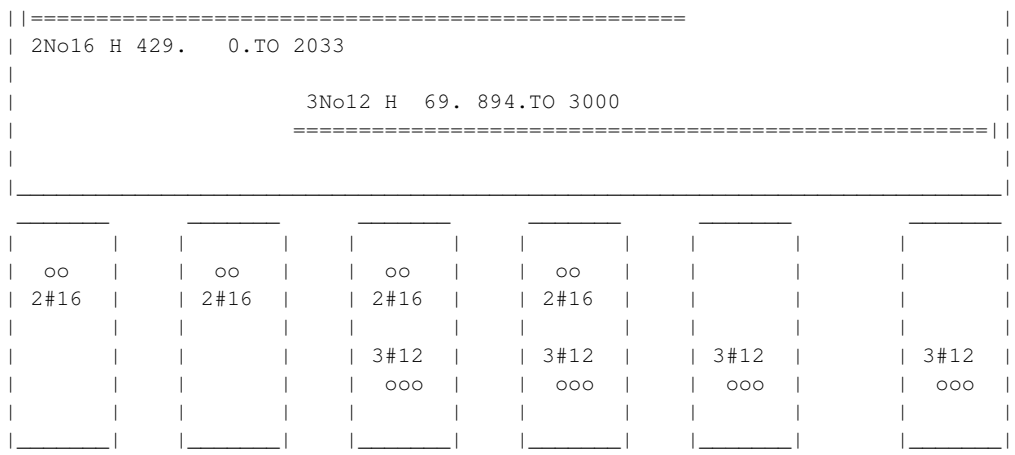

BEAM NO. 50 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3040. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	3040.	YES	YES

CRITICAL POS MOMENT= 25.51 KN-MET AT 2027.MM, LOAD 200
REQD STEEL= 210.MM2, RHO=0.0020, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 50 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 19.17 KNS Vc= 104.70 KNS Vs= 0.00 KNS
Tu= 7.95 KN-MET Tc= 3.9 KN-MET Ts= 10.6 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 1095. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.92 SQ.CM.

AT END SUPPORT - Vu= 5.33 KNS Vc= 101.15 KNS Vs= 0.00 KNS
Tu= 7.95 KN-MET Tc= 3.9 KN-MET Ts= 10.6 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 1095. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.92 SQ.CM.

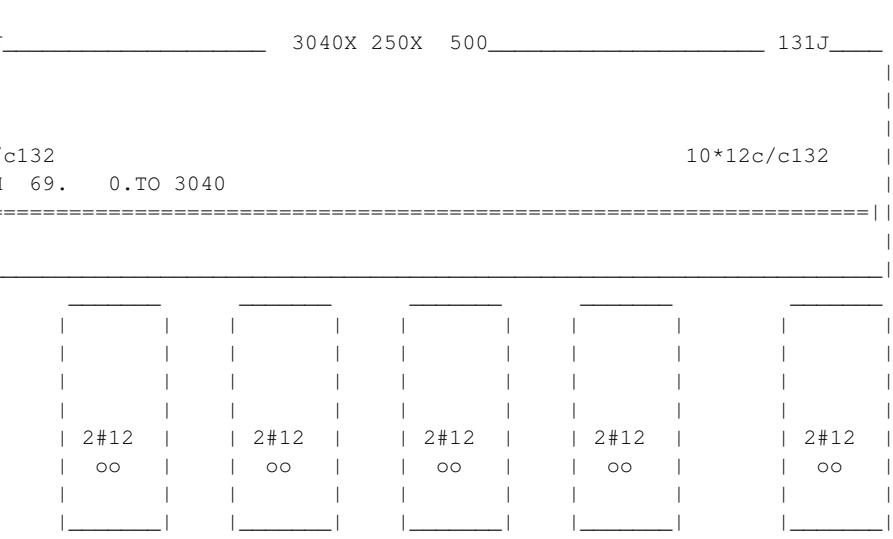

BEAM NO. 51 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	909.	1560.	NO	YES

CRITICAL POS MOMENT= 17.48 KN-MET AT 1560.MM, LOAD 200
REQD STEEL= 144.MM2, RHO=0.0013, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	429.	2 - 16MM	0.	1560.	YES	YES

CRITICAL NEG MOMENT= 57.54 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 51 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 50.08 KNS Vc= 102.49 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 355. MM

AT END SUPPORT - Vu= 42.13 KNS Vc= 186.45 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

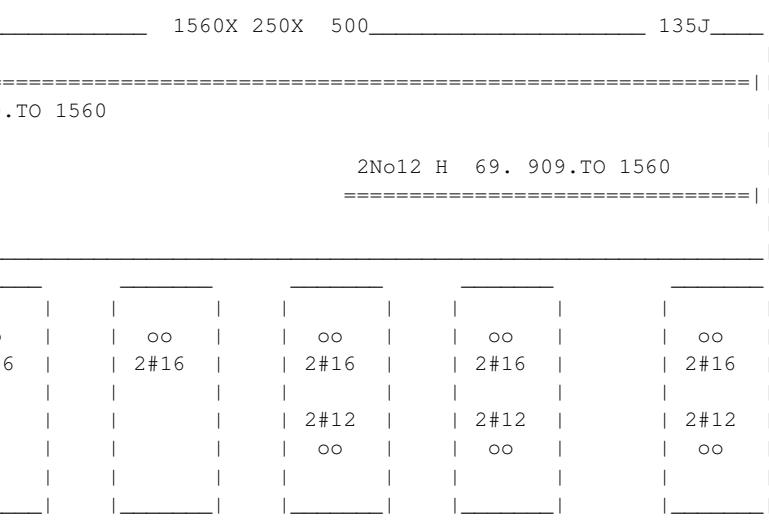

BEAM NO. 52 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	897.	3000.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     30.44 KN-MET  AT  3000.MM, LOAD  202|
|   REQD STEEL=   252.MM2, RHO=0.0023, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

```
  2        429.     2 - 16MM         0.         2033.        YES  NO
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     55.50 KN-MET  AT     0.MM, LOAD  201|
|   REQD STEEL=   377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  109. MMS         |
|   REQD. DEVELOPMENT LENGTH =   410. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 52 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=   38.54 KNS  Vc=  105.59 KNS  Vs=    0.00 KNS
Tu=    0.18 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                    STIRRUPS ARE NOT REQUIRED.
AT END   SUPPORT - Vu=   14.48 KNS  Vc=  105.59 KNS  Vs=    0.00 KNS
Tu=    0.18 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                    STIRRUPS ARE NOT REQUIRED.
```

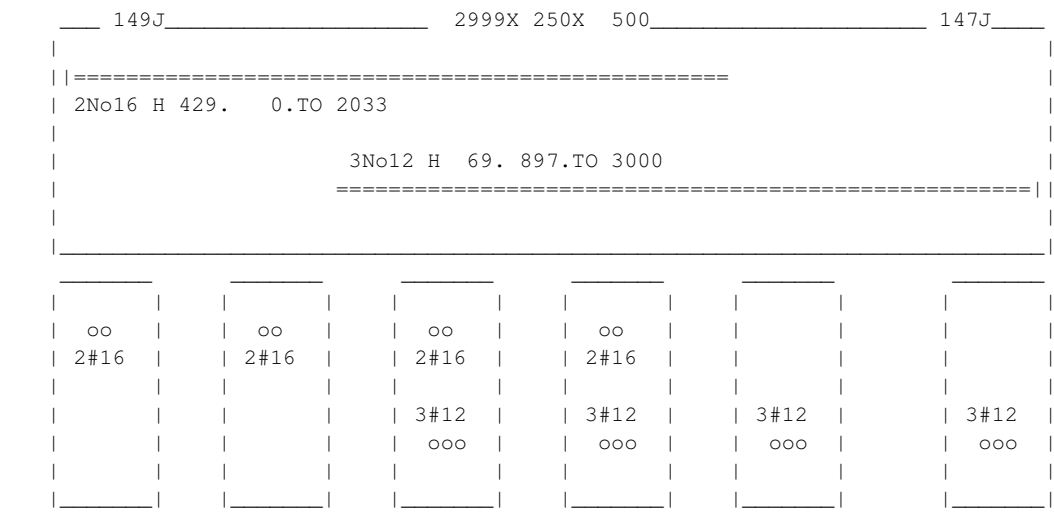

BEAM NO. 54 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 790. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	431.	4 - 12MM	0.	790.	YES	YES

CRITICAL NEG MOMENT= 70.49 KN-MET AT 0.MM, LOAD 210
REQD STEEL= 448.MM2, RHO=0.0042, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 38. MMS
REQD. DEVELOPMENT LENGTH = 492. MMS

Cracked Moment of Inertia Iz at above location = 43238.3 cm^4

B E A M N O. 54 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 54 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 54 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

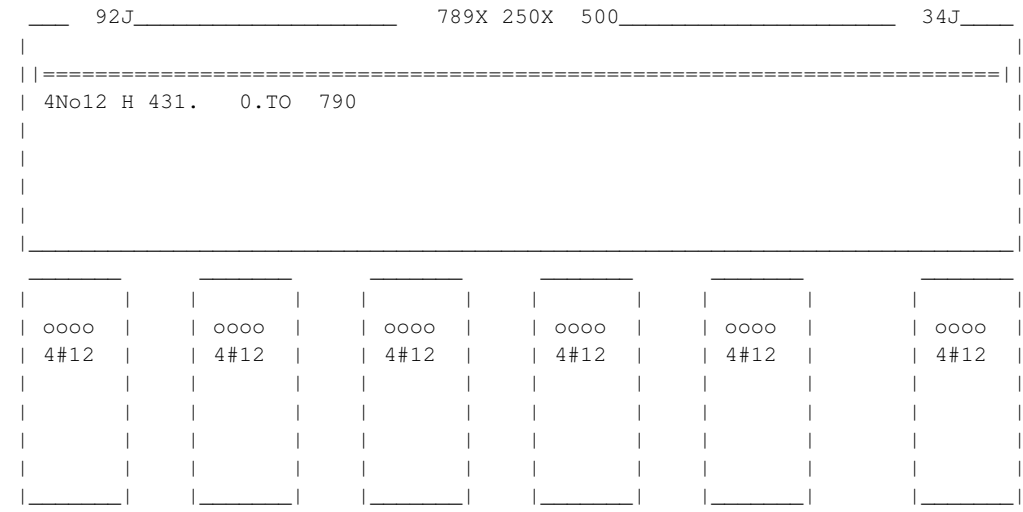

BEAM NO. 55 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 9750. MM FY - 414. FC - 28. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	57.	2 - 12MM	1843.	8313.	NO	NO
	CRITICAL POS MOMENT= 11.85 KN-MET AT 5687.MM, LOAD 209					
	REQD STEEL= 125.MM2, RHO=0.0015, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 16366.2 cm^4					
2	343.	3 - 12MM	0.	2881.	YES	NO
	CRITICAL NEG MOMENT= 30.74 KN-MET AT 0.MM, LOAD 209					
	REQD STEEL= 286.MM2, RHO=0.0033, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 68. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 23141.3 cm^4					
3	343.	3 - 12MM	7275.	9750.	NO	YES
	CRITICAL NEG MOMENT= 24.10 KN-MET AT 9750.MM, LOAD 204					
	REQD STEEL= 256.MM2, RHO=0.0030, RHOMX=0.0214 RHOMN=0.0033					
	MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 68. MMS					
	REQD. DEVELOPMENT LENGTH = 341. MMS					
	Cracked Moment of Inertia Iz at above location = 23141.3 cm^4					

B E A M N O. 55 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 13.24 KNS Vc= 74.75 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 2.5 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 11.79 KNS Vc= 74.75 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 2.5 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

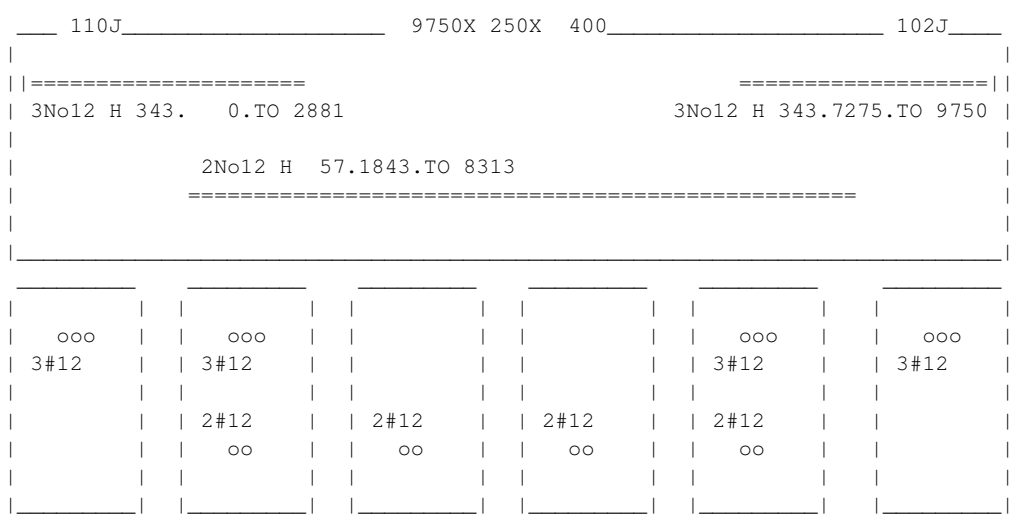

BEAM NO. 58 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	995.	5234.	NO	NO
	CRITICAL POS MOMENT= 102.68 KN-MET AT 2708.MM, LOAD 201					
	REQD STEEL= 528.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	527.	3 - 20MM	0.	3266.	YES	NO
	CRITICAL NEG MOMENT= 135.66 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 708.MM2, RHO=0.0054, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	2 - 20MM	3937.	6500.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    117.95 KN-MET  AT  6500.MM, LOAD  201|
|   REQD STEEL=   612.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./  105. MMS         |
|   REQD. DEVELOPMENT LENGTH =   513. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 88835.7 cm^4

B E A M N O. 58 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 51.47 KNS Vc= 129.86 KNS Vs= 0.00 KNS
Tu= 1.36 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 56.11 KNS Vc= 128.79 KNS Vs= 0.00 KNS
Tu= 1.36 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

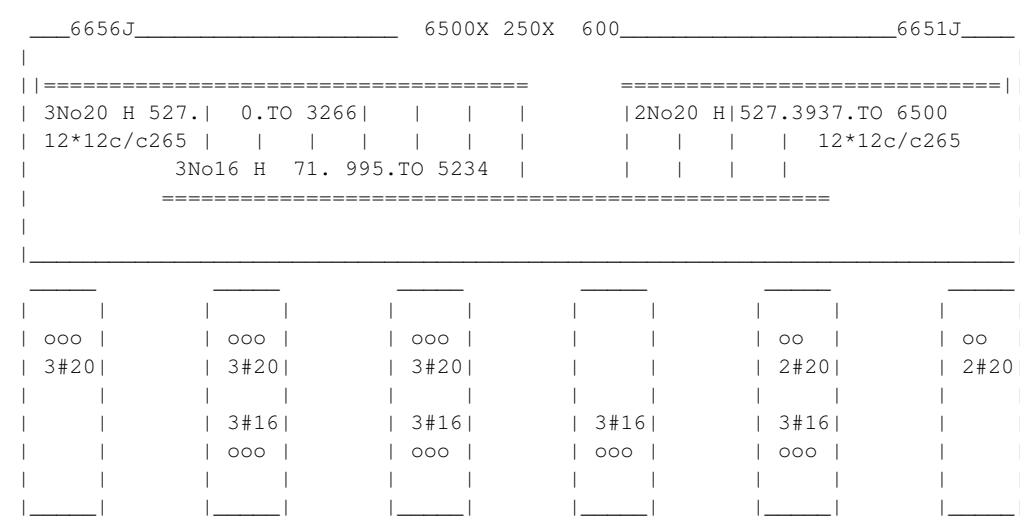

BEAM NO. 60 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	987.	5242.	NO	NO
	CRITICAL POS MOMENT= 104.86 KN-MET AT 2708.MM, LOAD 201					
	REQD STEEL= 540.MM2, RHO=0.0041, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	527.	3 - 20MM	0.	3266.	YES	NO
	CRITICAL NEG MOMENT= 132.58 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 691.MM2, RHO=0.0052, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	2 - 20MM	3396.	6500.	NO	YES
	CRITICAL NEG MOMENT= 117.04 KN-MET AT 6500.MM, LOAD 201					
	REQD STEEL= 607.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 105. MMS					
	REQD. DEVELOPMENT LENGTH = 513. MMS					
	Cracked Moment of Inertia Iz at above location = 88835.7 cm^4					

B E A M N O. 60 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 49.96 KNS Vc= 128.20 KNS Vs= 0.00 KNS
Tu= 0.49 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 57.61 KNS Vc= 128.20 KNS Vs= 0.00 KNS
Tu= 0.49 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

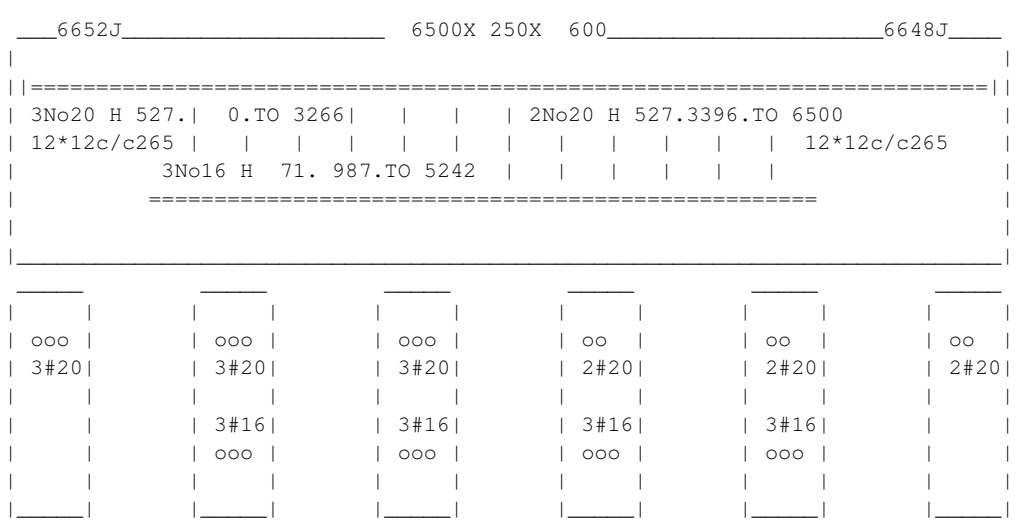

BEAM NO. 62 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 414. FC - 28. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	57.	2 - 12MM	0.	4100.	YES	YES

CRITICAL POS MOMENT= 8.53 KN-MET AT 683.MM, LOAD 211
REQD STEEL= 89.MM2, RHO=0.0010, RHOMX=0.0214 RHOMN=0.0033
MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS
REQD. DEVELOPMENT LENGTH = 341. MMS

Cracked Moment of Inertia Iz at above location = 16366.2 cm^4

2	343.	2 - 12MM	0.	1811.	YES	NO

CRITICAL NEG MOMENT= 8.50 KN-MET AT 0.MM, LOAD 204
REQD STEEL= 89.MM2, RHO=0.0010, RHOMX=0.0214 RHOMN=0.0033
MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS
REQD. DEVELOPMENT LENGTH = 341. MMS

Cracked Moment of Inertia Iz at above location = 16366.2 cm^4

3	343.	2 - 12MM	2460.	4100.	NO	YES

CRITICAL NEG MOMENT= 9.55 KN-MET AT 4100.MM, LOAD 211
REQD STEEL= 100.MM2, RHO=0.0012, RHOMX=0.0214 RHOMN=0.0033
MAX/MIN/ACTUAL BAR SPACING= 254./ 37./ 136. MMS
REQD. DEVELOPMENT LENGTH = 341. MMS

Cracked Moment of Inertia Iz at above location = 16366.2 cm^4

B E A M N O. 62 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 5.30 KNS Vc= 73.10 KNS Vs= 0.00 KNS
Tu= 4.53 KN-MET Tc= 2.5 KN-MET Ts= 6.0 KN-MET LOAD 223
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 118. MM C/C FOR 1714. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 1.61 SQ.CM.

AT END SUPPORT - Vu= 3.75 KNS Vc= 131.94 KNS Vs= 0.00 KNS
Tu= 4.53 KN-MET Tc= 2.5 KN-MET Ts= 6.0 KN-MET LOAD 223
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 118. MM C/C FOR 1489. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 1.61 SQ.CM.

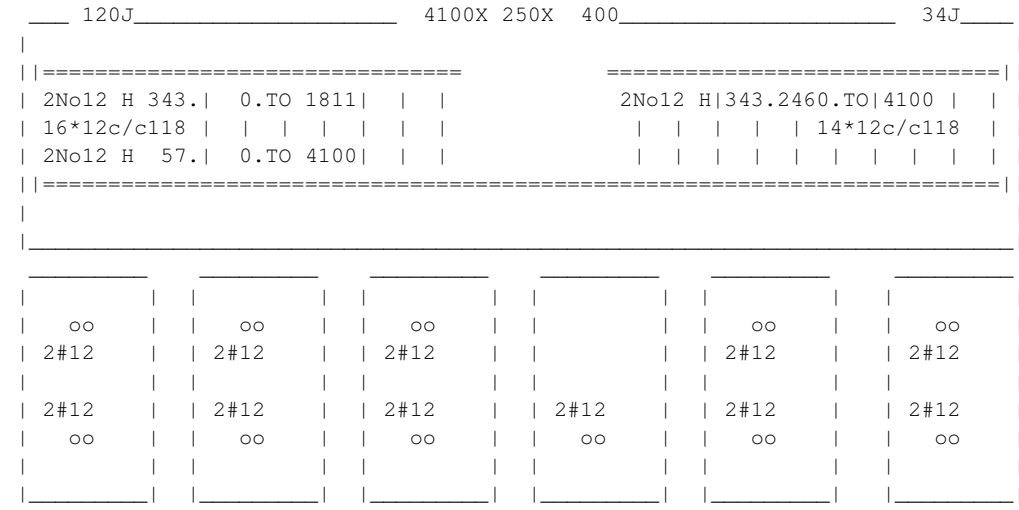

BEAM NO. 65 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1150. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	3 - 20MM	0.	1150.	YES	YES

CRITICAL POS MOMENT= 147.13 KN-MET AT 1150.MM, LOAD 200
REQD STEEL= 770.MM2, RHO=0.0058, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS
REQD. DEVELOPMENT LENGTH = 981. MMS

Cracked Moment of Inertia Iz at above location = 123768.7 cm^4

B E A M N O. 65 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 126.34 KNS Vc= 129.12 KNS Vs= 39.34 KNS
Tu= 13.12 KN-MET Tc= 4.9 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 50. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

AT END SUPPORT - Vu= 124.35 KNS Vc= 129.12 KNS Vs= 36.68 KNS
Tu= 13.12 KN-MET Tc= 4.9 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 50. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

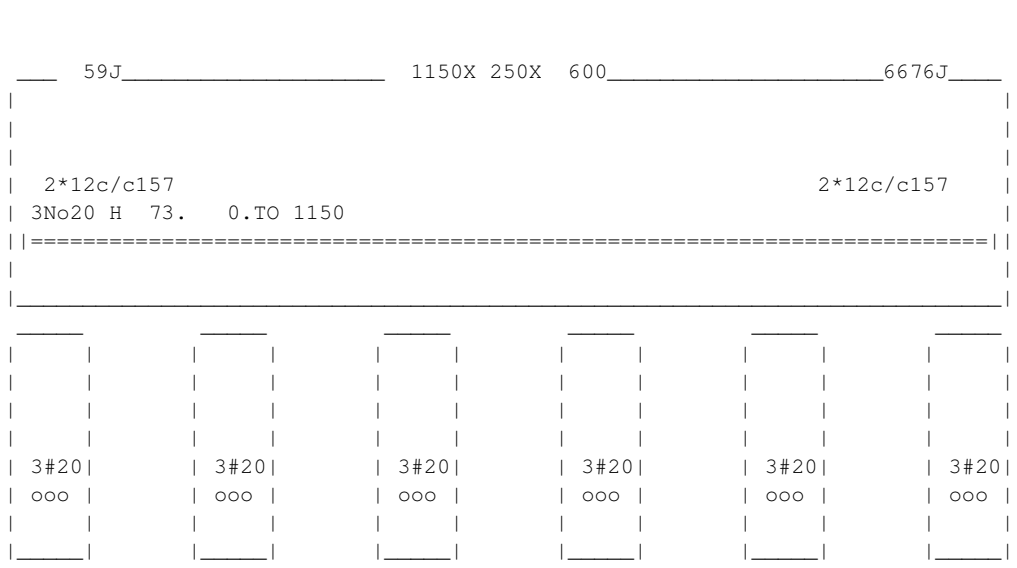

BEAM NO. 66 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1110. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	1110.	YES	YES

CRITICAL POS MOMENT= 12.10 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 99.MM2, RHO=0.0009, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 66 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 7.17 KNS Vc= 104.48 KNS Vs= 0.00 KNS
Tu= 5.53 KN-MET Tc= 3.8 KN-MET Ts= 7.4 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 130. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.03 SQ.CM.

STAAD SPACE -- PAGE NO. 96

AT END SUPPORT - Vu= 10.09 KNS Vc= 104.48 KNS Vs= 0.00 KNS
Tu= 5.53 KN-MET Tc= 3.8 KN-MET Ts= 7.4 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 130. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.03 SQ.CM.

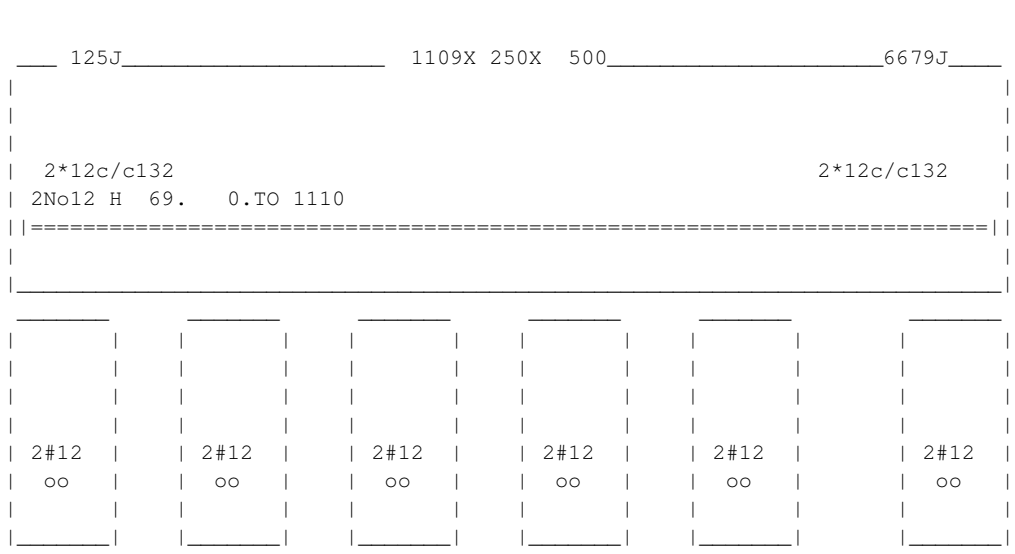

BEAM NO. 67 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1150. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	2 - 32MM	0.	1150.	YES	YES

CRITICAL POS MOMENT= 223.36 KN-MET AT 1150.MM, LOAD 203
REQD STEEL= 1214.MM2, RHO=0.0093, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 93. MMS
REQD. DEVELOPMENT LENGTH = 1418. MMS

Cracked Moment of Inertia Iz at above location = 182422.8 cm^4

B E A M N O. 67 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 195.22 KNS Vc= 127.38 KNS Vs= 132.92 KNS
Tu= 3.15 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 203
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 261. MM C/C FOR 50. MM

AT END SUPPORT - Vu= 193.23 KNS Vc= 127.38 KNS Vs= 130.27 KNS
Tu= 3.15 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 203
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 261. MM C/C FOR 50. MM

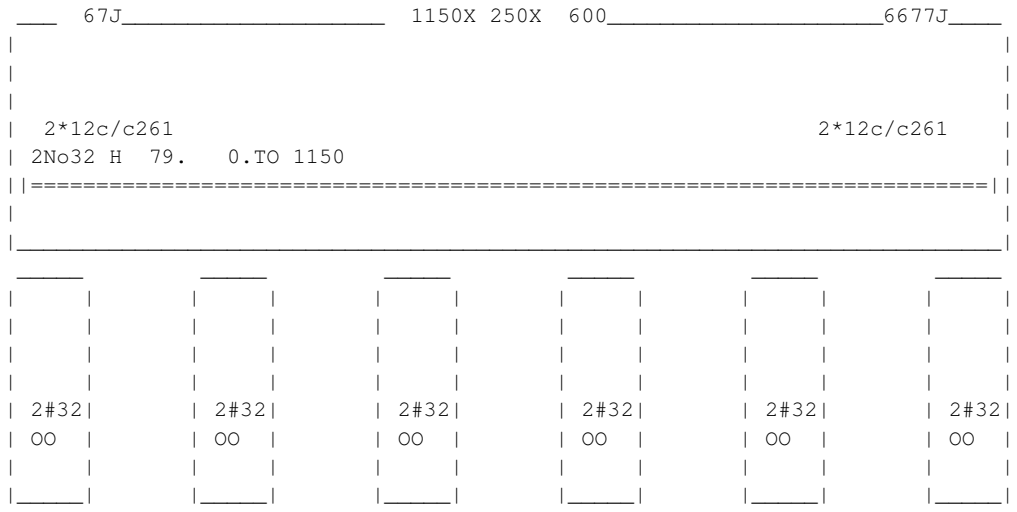

BEAM NO. 68 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	6500.	YES	YES

CRITICAL POS MOMENT= 79.73 KN-MET AT 3250.MM, LOAD 203
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

```
  2        531.     3 - 12MM      5287.         6500.        NO   YES
 |-------------------------------------------------------------------|
 |   CRITICAL NEG MOMENT=     33.90 KN-MET  AT  6500.MM, LOAD  202|
 |   REQD STEEL=   227.MM2, RHO=0.0017, RHOMX=0.0249 RHOMN=0.0035 |
 |   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
 |   REQD. DEVELOPMENT LENGTH =   328. MMS                        |
 |-------------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 53246.0 cm^4

B E A M N O. 68 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 42.69 KNS Vc= 130.07 KNS Vs= 0.00 KNS
Tu= 13.17 KN-MET Tc= 4.9 KN-MET Ts= 17.6 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 2725. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.57 SQ.CM.

AT END SUPPORT - Vu= 47.25 KNS Vc= 130.07 KNS Vs= 0.00 KNS
Tu= 13.17 KN-MET Tc= 4.9 KN-MET Ts= 17.6 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 2725. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.57 SQ.CM.

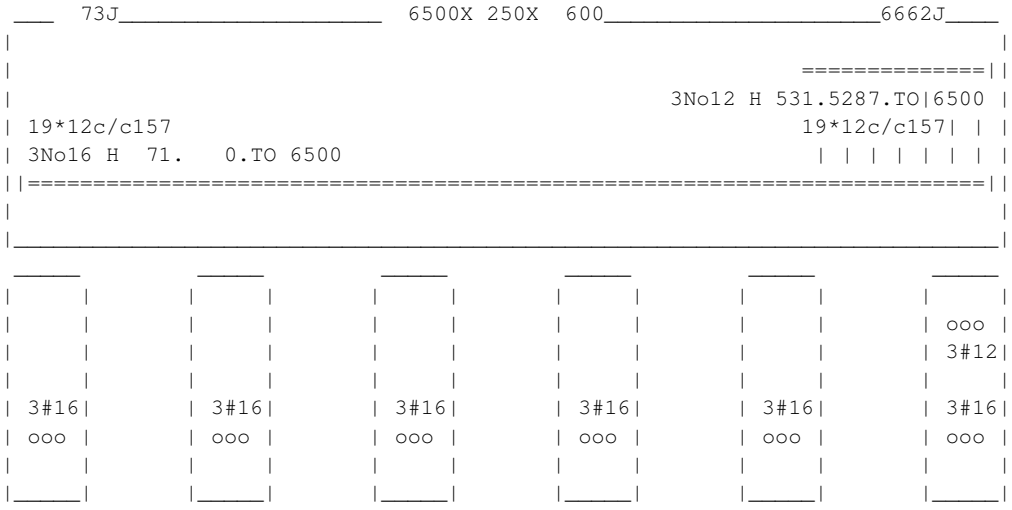

BEAM NO. 69 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1110. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	1110.	YES	YES

CRITICAL POS MOMENT= 14.53 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 119.MM2, RHO=0.0011, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 69 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 10.02 KNS Vc= 101.84 KNS Vs= 0.00 KNS
Tu= 5.49 KN-MET Tc= 3.9 KN-MET Ts= 7.3 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 130. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.01 SQ.CM.

AT END SUPPORT - Vu= 12.93 KNS Vc= 102.89 KNS Vs= 0.00 KNS
Tu= 5.49 KN-MET Tc= 3.9 KN-MET Ts= 7.3 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 130. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.01 SQ.CM.

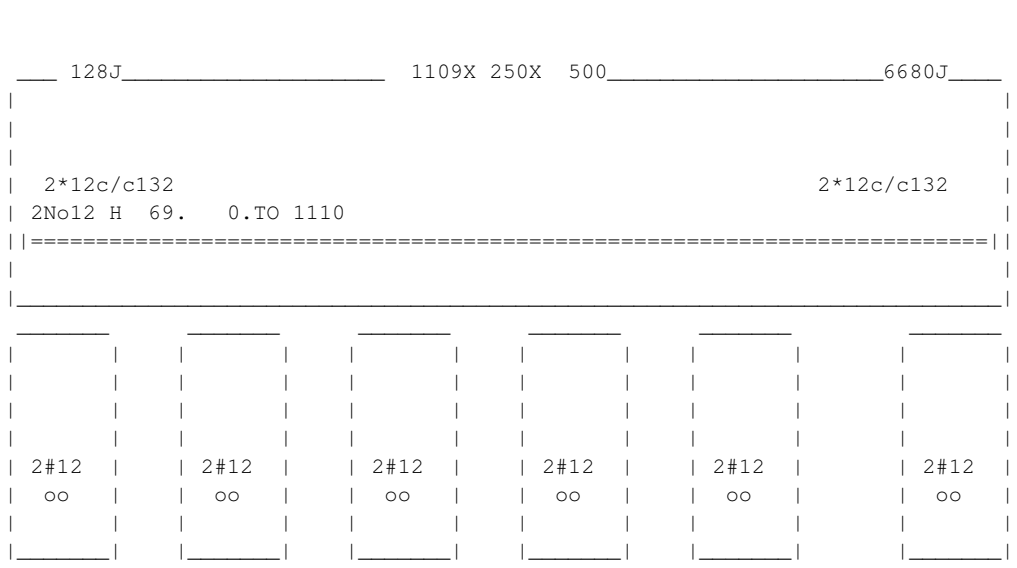

BEAM NO. 72 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1060. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	1031.	YES	NO

CRITICAL POS MOMENT= 21.04 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 173.MM2, RHO=0.0016, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	431.	2 - 12MM	86.	1060.	NO	YES

CRITICAL NEG MOMENT= 16.89 KN-MET AT 1060.MM, LOAD 221
REQD STEEL= 139.MM2, RHO=0.0013, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 72 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 27.18 KNS Vc= 104.76 KNS Vs= 0.00 KNS
Tu= 7.95 KN-MET Tc= 3.9 KN-MET Ts= 10.6 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 105. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.92 SQ.CM.

AT END SUPPORT - Vu= 29.54 KNS Vc= 114.23 KNS Vs= 0.00 KNS
Tu= 7.95 KN-MET Tc= 3.9 KN-MET Ts= 10.6 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 105. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.92 SQ.CM.

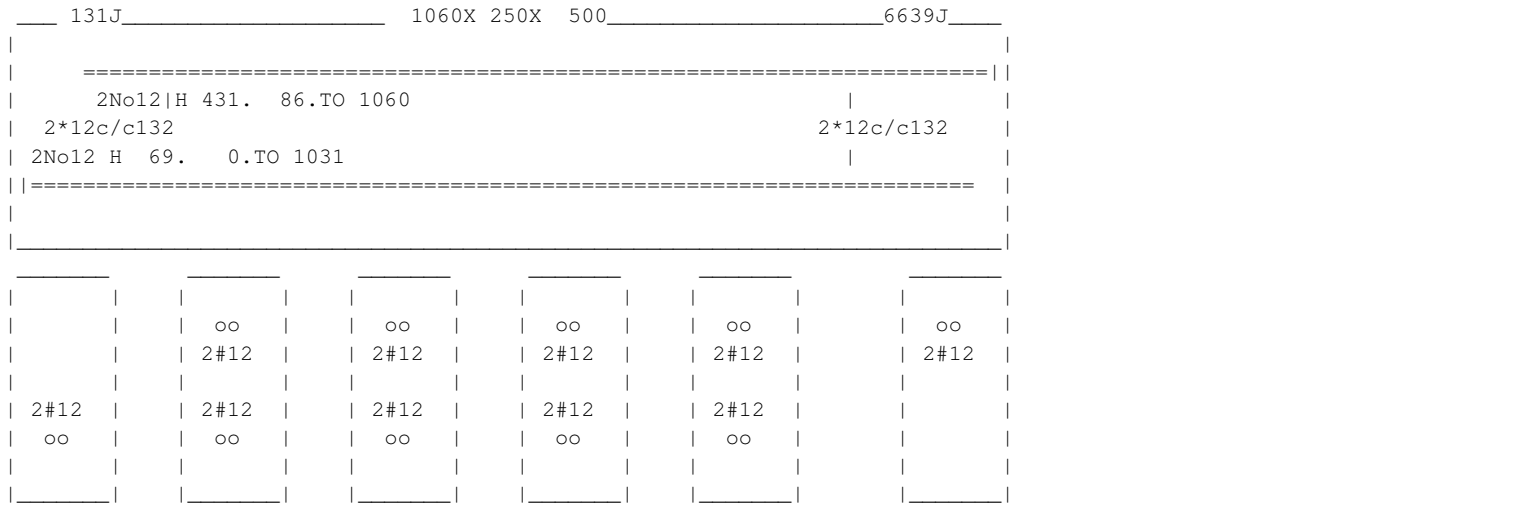

BEAM NO. 73 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1060. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	565.	YES	NO

CRITICAL POS MOMENT= 11.08 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 91.MM2, RHO=0.0008, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	431.	2 - 12MM	0.	1060.	YES	YES

CRITICAL NEG MOMENT= 26.16 KN-MET AT 1060.MM, LOAD 209
REQD STEEL= 216.MM2, RHO=0.0020, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 73 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 30.46 KNS Vc= 175.61 KNS Vs= 0.00 KNS
Tu= 10.02 KN-MET Tc= 3.9 KN-MET Ts= 13.4 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 105. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.68 SQ.CM.

AT END SUPPORT - Vu= 32.82 KNS Vc= 103.98 KNS Vs= 0.00 KNS
Tu= 10.02 KN-MET Tc= 3.9 KN-MET Ts= 13.4 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 105. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.68 SQ.CM.

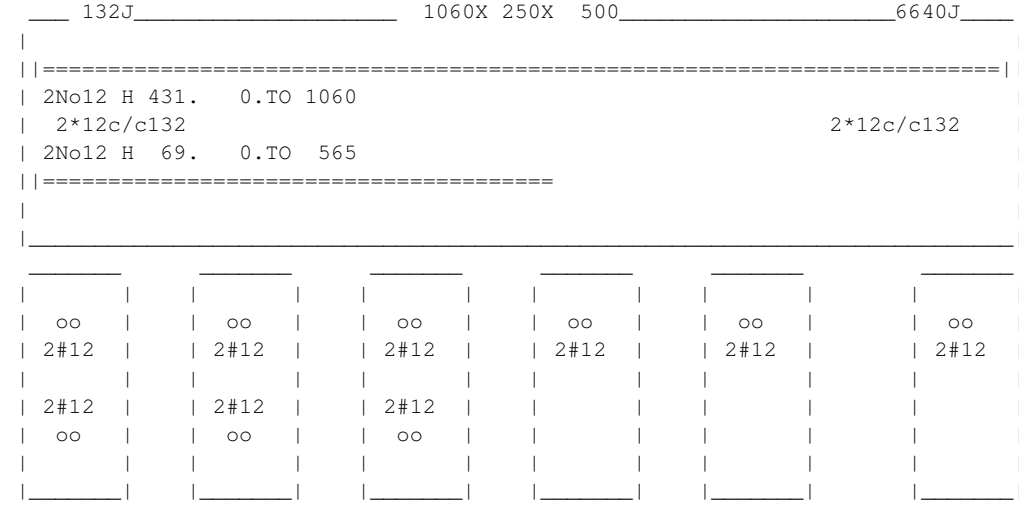

BEAM NO. 74 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	0.	3000.	YES	YES

CRITICAL POS MOMENT= 45.49 KN-MET AT 750.MM, LOAD 200
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 74 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 3.77 KNS Vc= 100.55 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 20.28 KNS Vc= 102.45 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

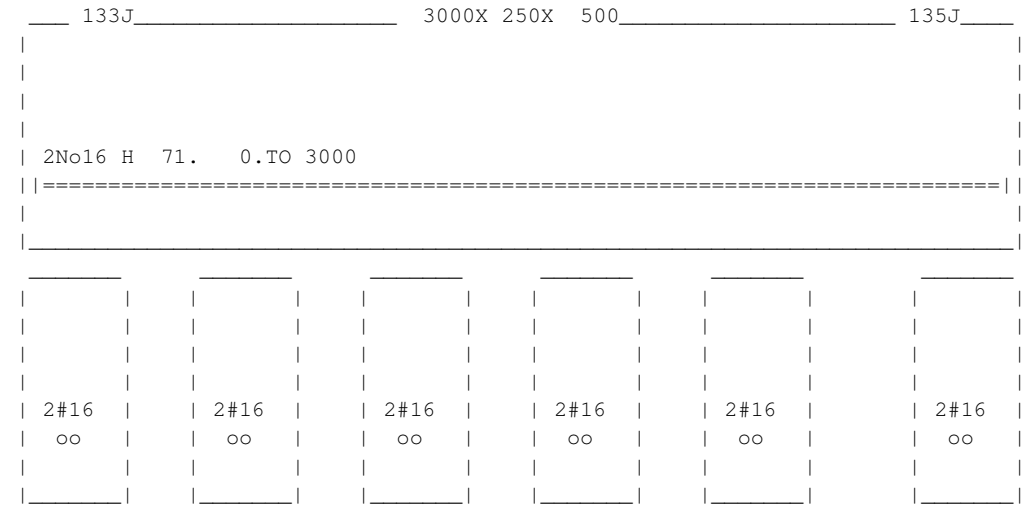

BEAM NO. 75 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	0.	3000.	YES	YES

CRITICAL POS MOMENT= 42.05 KN-MET AT 750.MM, LOAD 200
REQD STEEL= 351.MM2, RHO=0.0033, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 75 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 4.75 KNS Vc= 105.58 KNS Vs= 0.00 KNS
Tu= 1.67 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 19.31 KNS Vc= 105.58 KNS Vs= 0.00 KNS
Tu= 1.67 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

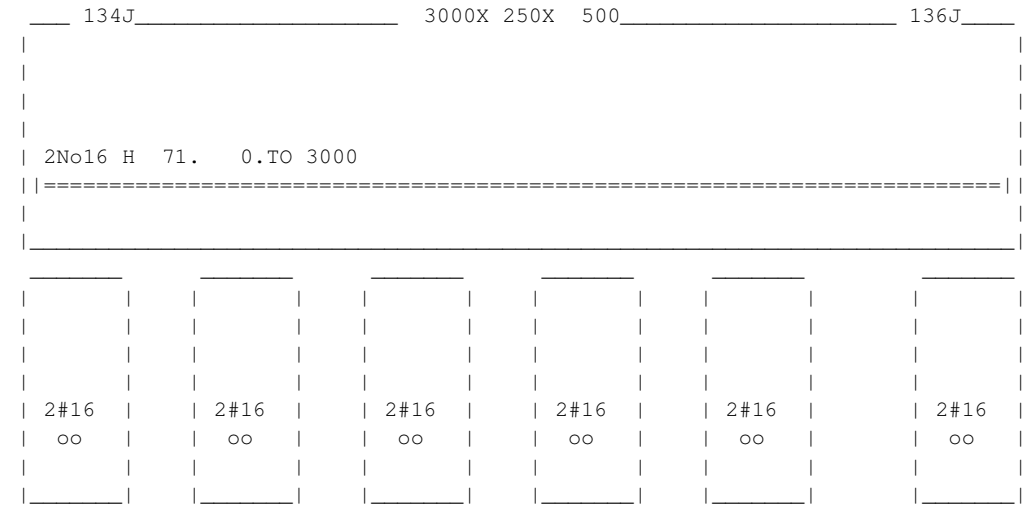

BEAM NO. 78 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3000.	YES	YES

CRITICAL POS MOMENT= 31.03 KN-MET AT 1750.MM, LOAD 200
REQD STEEL= 256.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 78 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 14.34 KNS Vc= 105.11 KNS Vs= 0.00 KNS
Tu= 0.38 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 9.72 KNS Vc= 105.11 KNS Vs= 0.00 KNS
Tu= 0.38 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

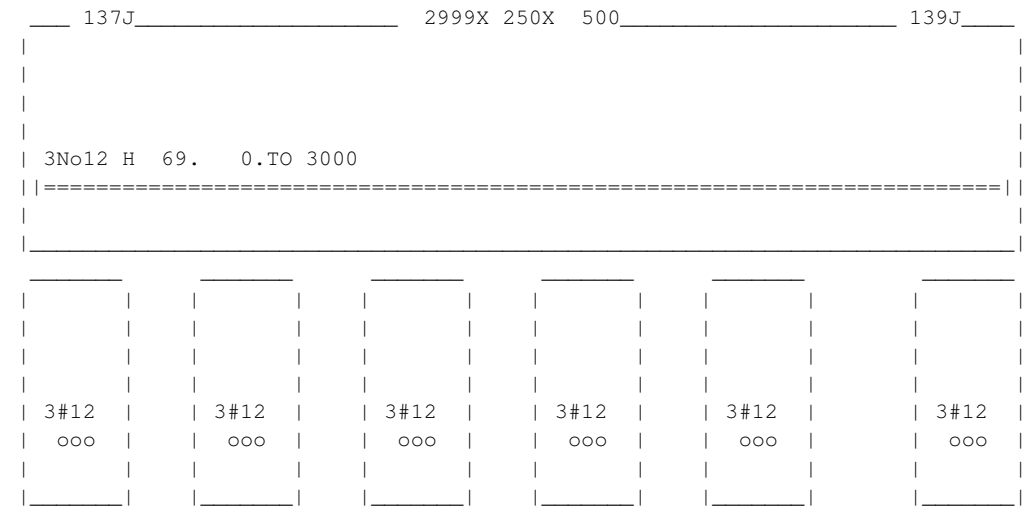

BEAM NO. 79 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3000.	YES	YES

CRITICAL POS MOMENT= 30.80 KN-MET AT 1750.MM, LOAD 200
REQD STEEL= 255.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 79 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 14.43 KNS Vc= 102.09 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 9.62 KNS Vc= 101.48 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

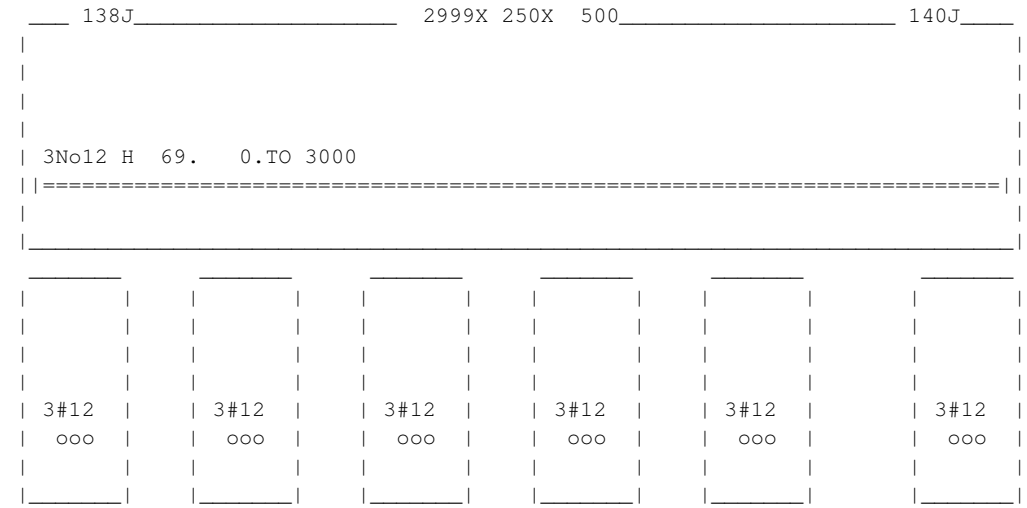

==========

BEAM NO. 80 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2060. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	1119.	YES	NO

CRITICAL POS MOMENT= 23.27 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 192.MM2, RHO=0.0018, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	429.	2 - 16MM	67.	2060.	NO	YES

CRITICAL NEG MOMENT= 57.30 KN-MET AT 2060.MM, LOAD 200
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 80 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 31.57 KNS Vc= 105.46 KNS Vs= 0.00 KNS
Tu= 0.38 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 45.11 KNS Vc= 105.46 KNS Vs= 0.00 KNS
Tu= 0.38 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 605. MM

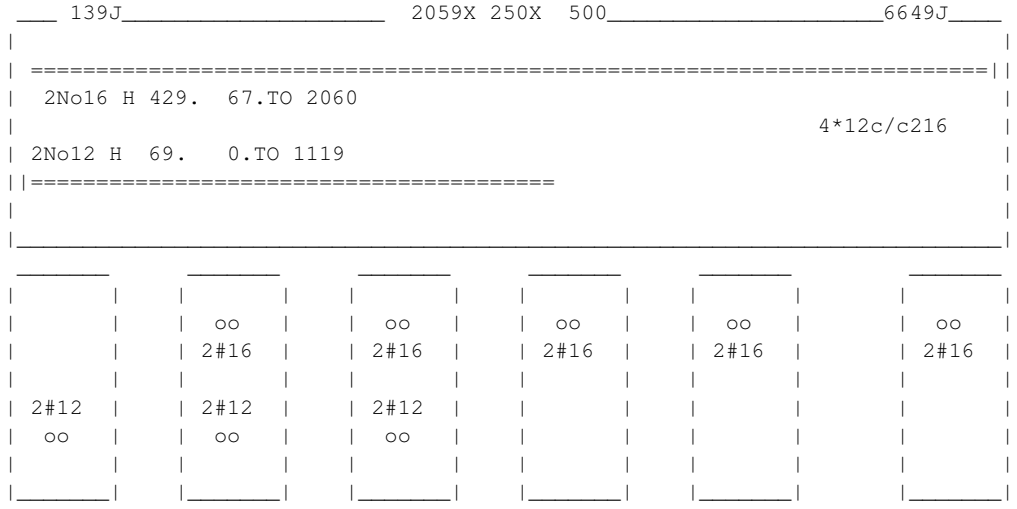

BEAM NO. 81 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2060. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	0.	936.	YES	NO

CRITICAL POS MOMENT= 22.28 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 183.MM2, RHO=0.0017, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
2	429.	2 - 16MM	67.	2060.	NO	YES

CRITICAL NEG MOMENT= 57.21 KN-MET AT 2060.MM, LOAD 200
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 81 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 31.47 KNS Vc= 105.88 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 45.02 KNS Vc= 102.47 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 605. MM

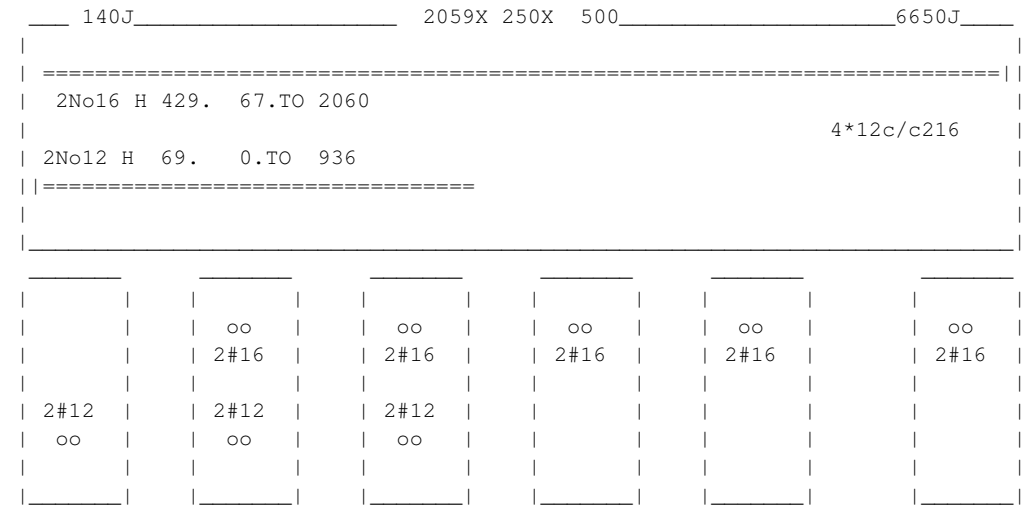

BEAM NO. 82 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3000.	YES	YES

CRITICAL POS MOMENT= 32.47 KN-MET AT 2500.MM, LOAD 201
REQD STEEL= 268.MM2, RHO=0.0025, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2	431.	2 - 12MM	0.	900.	YES	NO

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     18.56 KN-MET  AT     0.MM, LOAD  220|
|   REQD STEEL=   153.MM2, RHO=0.0014, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 82 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 25.54 KNS Vc= 105.45 KNS Vs= 0.00 KNS
Tu= 0.28 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 1.49 KNS Vc= 105.45 KNS Vs= 0.00 KNS
Tu= 0.28 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

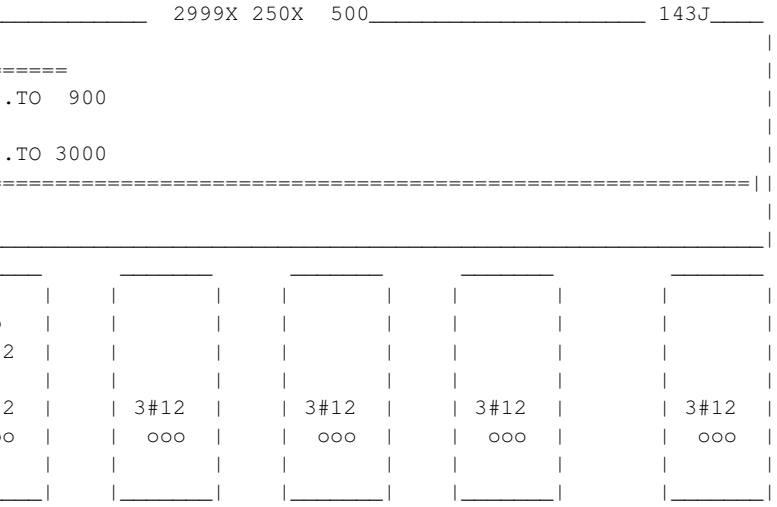

BEAM NO. 83 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3000.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     32.10 KN-MET  AT  2500.MM, LOAD  201|
|   REQD STEEL=   265.MM2, RHO=0.0025, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2 431. 2 - 12MM 0. 900. YES NO

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     17.91 KN-MET  AT     0.MM, LOAD  220|
|   REQD STEEL=   147.MM2, RHO=0.0014, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

B E A M N O. 83 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 25.37 KNS Vc= 105.83 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 1.32 KNS Vc= 105.83 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

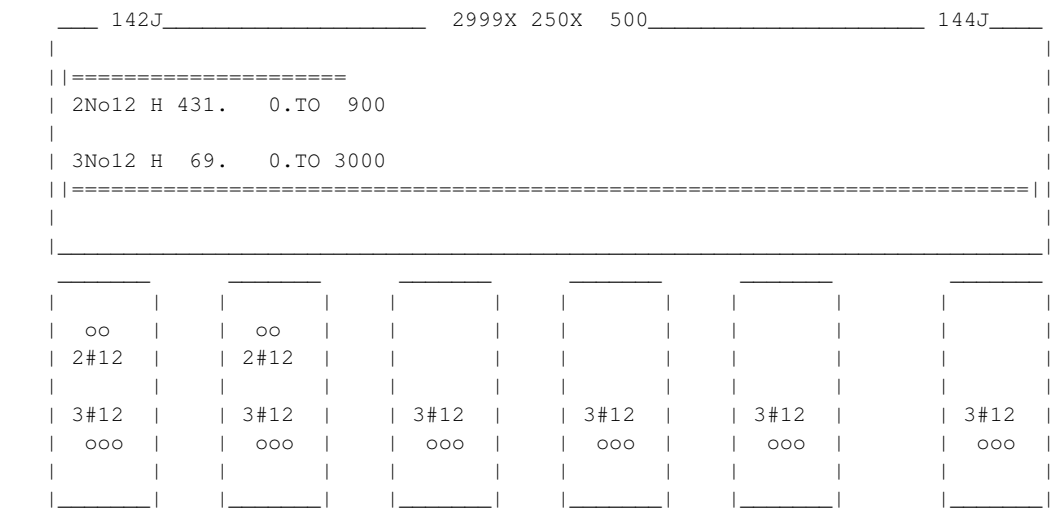

BEAM NO. 86 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	440.	YES	YES

CRITICAL NEG MOMENT= 58.62 KN-MET AT 440.MM, LOAD 203
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 86 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 86 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 86 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

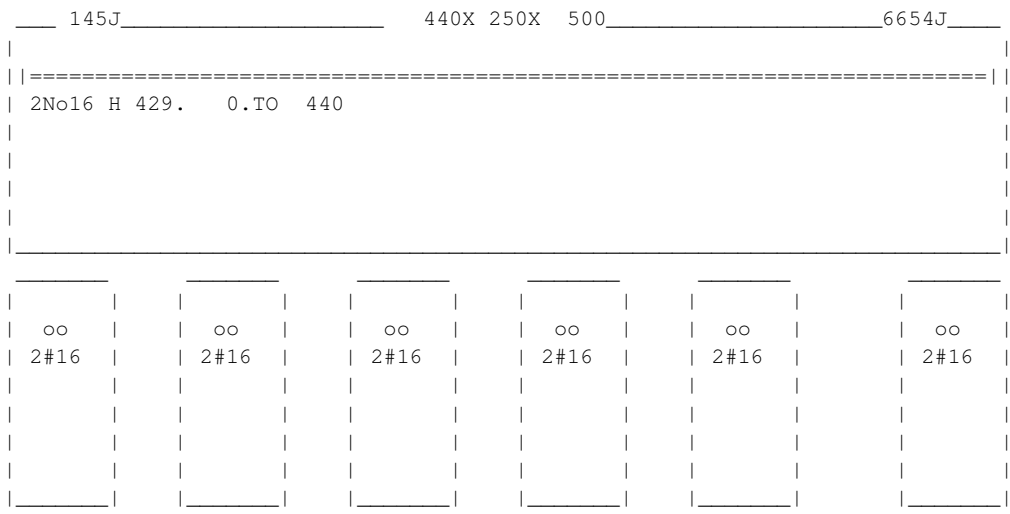

BEAM NO. 87 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	440.	YES	YES

CRITICAL NEG MOMENT= 58.90 KN-MET AT 440.MM, LOAD 201
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 87 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 87 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 87 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

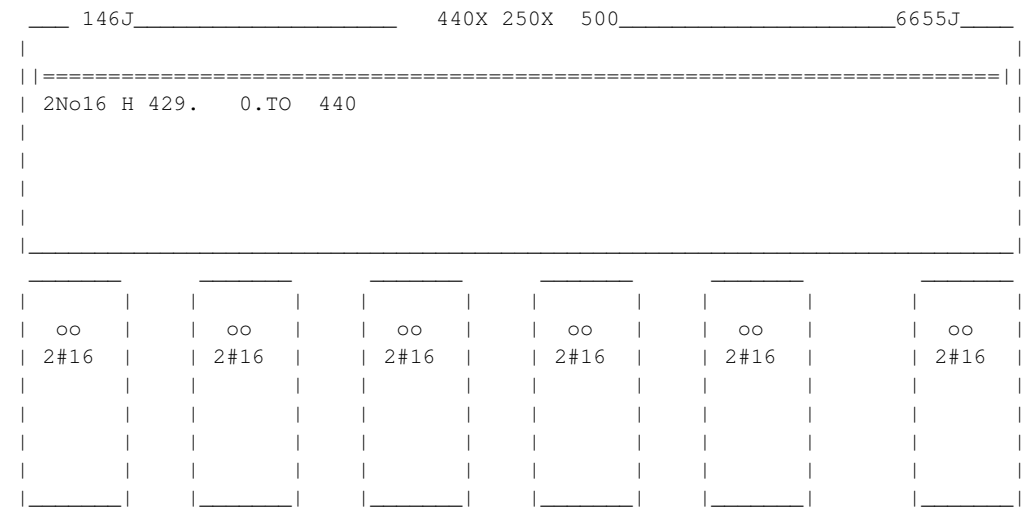

BEAM NO. 88 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	2228.	YES	NO

CRITICAL POS MOMENT= 30.44 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 252.MM2, RHO=0.0023, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2	431.	3 - 12MM	1225.	3000.	NO	YES

CRITICAL NEG MOMENT= 36.42 KN-MET AT 3000.MM, LOAD 223
REQD STEEL= 302.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 88 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 7.37 KNS Vc= 105.25 KNS Vs= 0.00 KNS
Tu= 0.18 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 31.42 KNS Vc= 105.25 KNS Vs= 0.00 KNS
Tu= 0.18 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

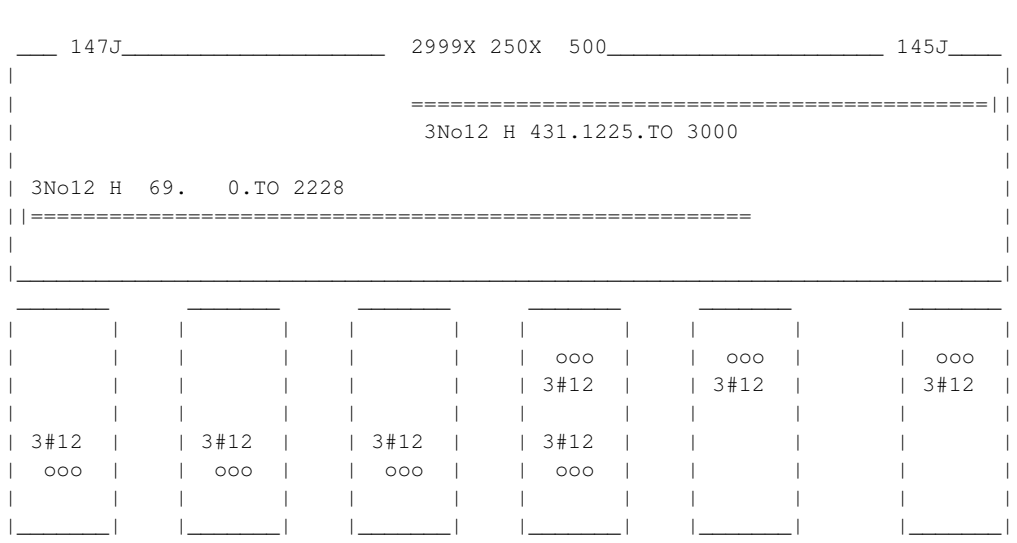

BEAM NO. 89 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	2231.	YES	NO

CRITICAL POS MOMENT= 30.81 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 255.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
2	431.	3 - 12MM	1475.	3000.	NO	YES

CRITICAL NEG MOMENT= 36.13 KN-MET AT 3000.MM, LOAD 201
REQD STEEL= 299.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 89 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 7.63 KNS Vc= 105.69 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 31.69 KNS Vc= 105.69 KNS Vs= 0.00 KNS
Tu= 0.03 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

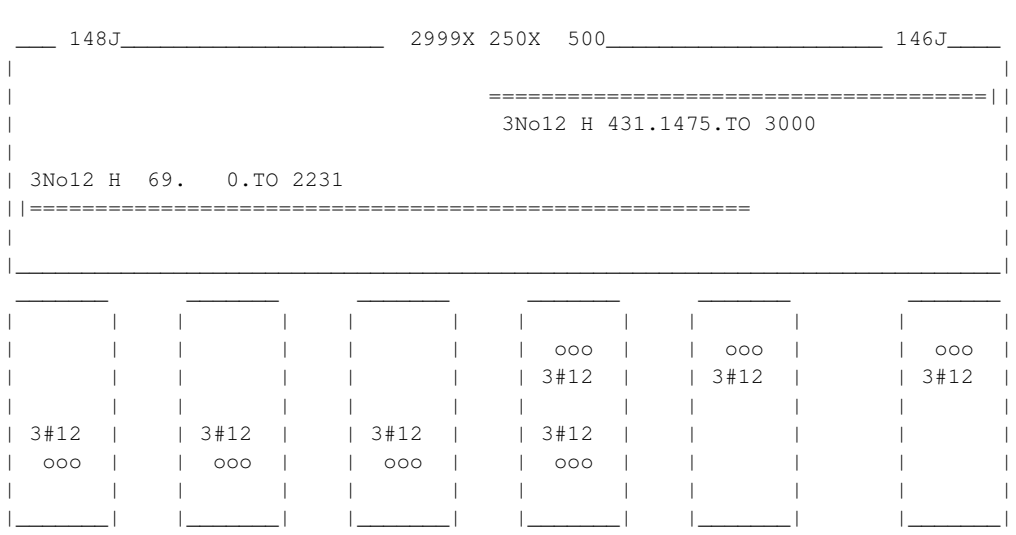

BEAM NO. 90 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 60. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	60.	YES	YES

CRITICAL NEG MOMENT= 58.83 KN-MET AT 60.MM, LOAD 201
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 90 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 90 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 90 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

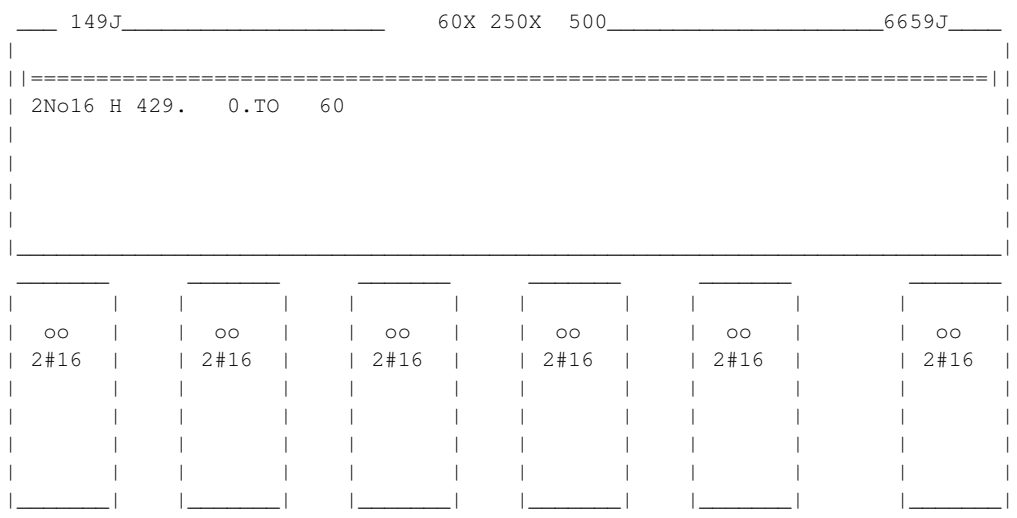

BEAM NO. 91 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 60. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	60.	YES	YES

CRITICAL NEG MOMENT= 56.24 KN-MET AT 60.MM, LOAD 201
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 91 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 91 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 91 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

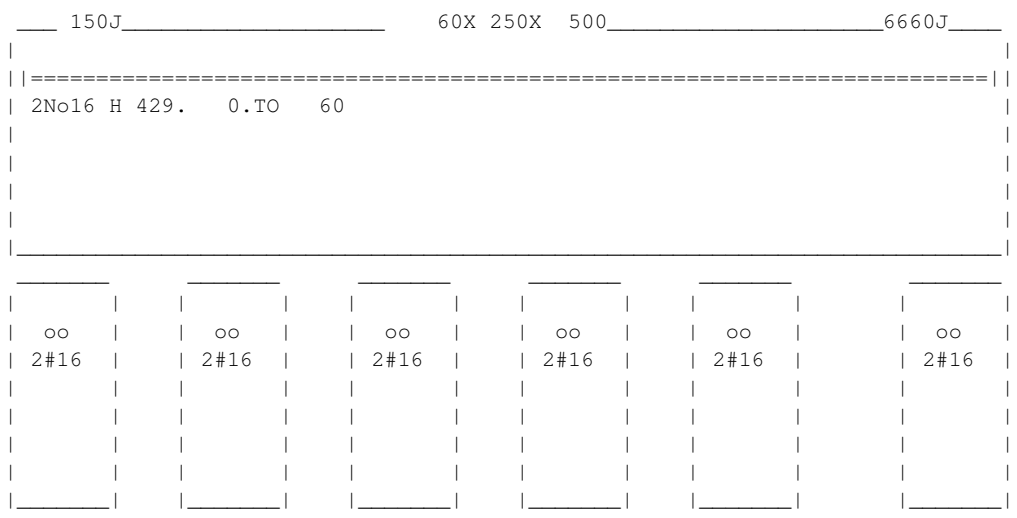

BEAM NO. 92 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	2774.	YES	NO
	CRITICAL POS MOMENT= 36.47 KN-MET AT 0.MM, LOAD 202					
	REQD STEEL= 302.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 34155.8 cm^4					
2	431.	2 - 12MM	1725.	3000.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     26.59 KN-MET  AT  3000.MM, LOAD  208|
|   REQD STEEL=   219.MM2, RHO=0.0020, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    23938.8 cm^4
```

B E A M N O. 92 D E S I G N R E S U L T S - SHEAR

```
 AT START SUPPORT - Vu=    5.56 KNS  Vc=  105.25 KNS  Vs=    0.00 KNS
 Tu=    0.65 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
 AT END   SUPPORT - Vu=   29.61 KNS  Vc=  105.25 KNS  Vs=    0.00 KNS
 Tu=    0.65 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
```

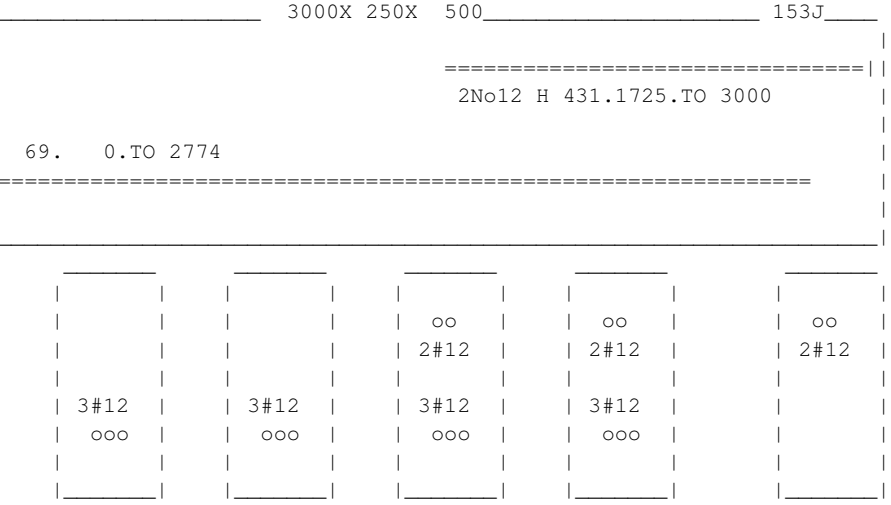

BEAM NO. 93 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3000. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	2511.	YES	NO

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     34.74 KN-MET  AT     0.MM, LOAD  202|
|   REQD STEEL=   288.MM2, RHO=0.0027, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

```
  2        431.     3 - 12MM      1475.         3000.        NO   YES
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     32.25 KN-MET  AT  3000.MM, LOAD  208|
|   REQD STEEL=   267.MM2, RHO=0.0025, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 93 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=    6.95 KNS  Vc=  101.42 KNS  Vs=    0.00 KNS
Tu=    0.93 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
AT END   SUPPORT - Vu=   31.00 KNS  Vc=  104.73 KNS  Vs=    0.00 KNS
Tu=    0.93 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
```

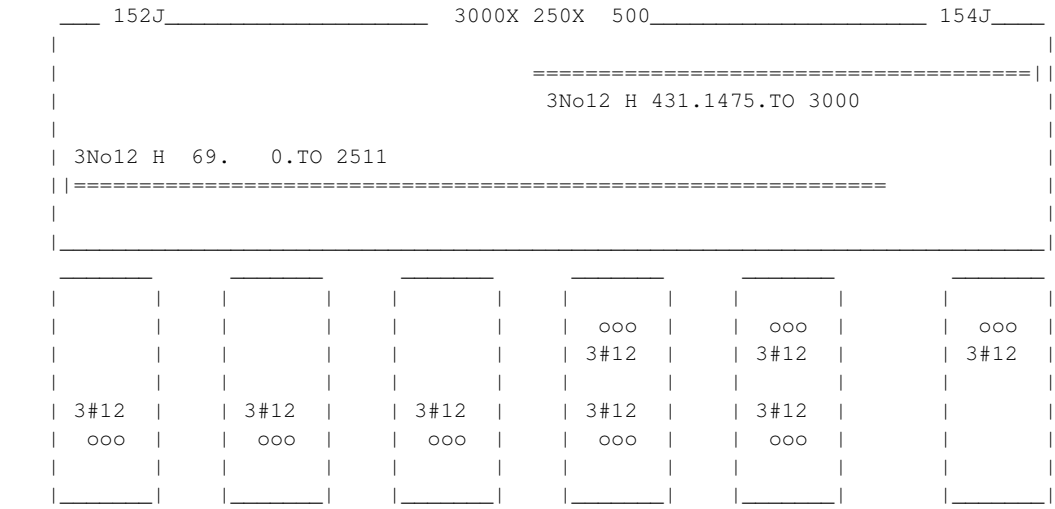

BEAM NO. 94 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	560.	YES	YES

CRITICAL NEG MOMENT= 53.94 KN-MET AT 560.MM, LOAD 200
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 94 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 94 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 94 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

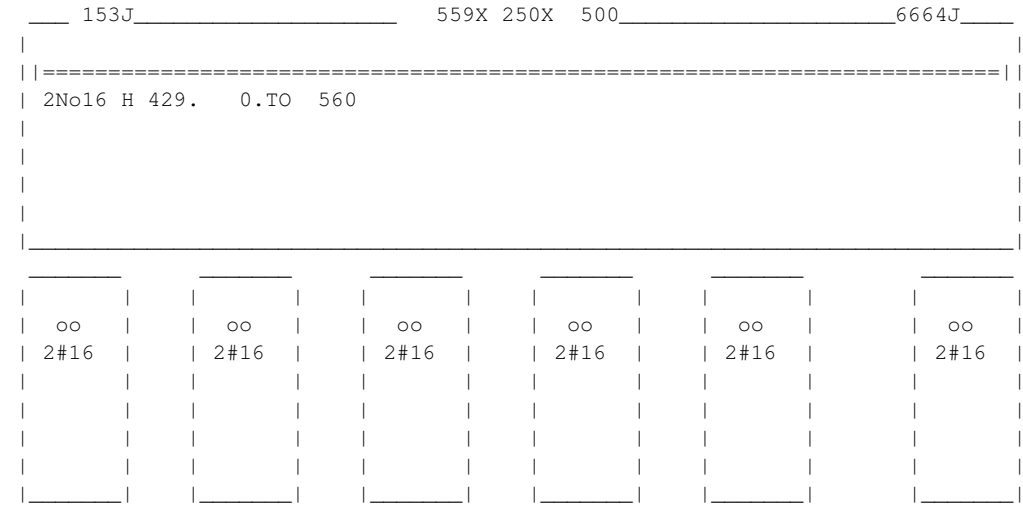

BEAM NO. 95 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	560.	YES	YES

CRITICAL NEG MOMENT= 59.90 KN-MET AT 560.MM, LOAD 200
REQD STEEL= 379.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 95 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 95 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 95 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

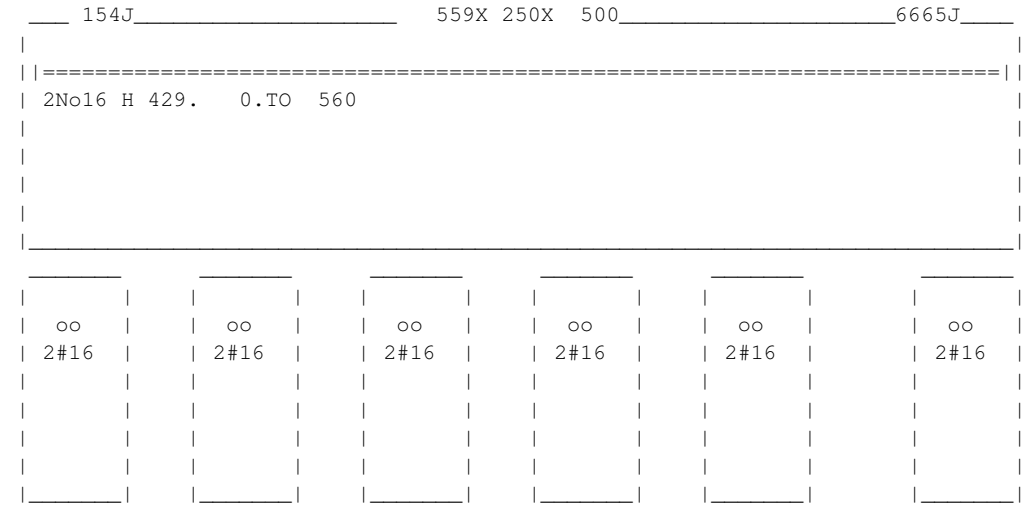

BEAM NO. 114 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	4 - 20MM	0.	4100.	YES	YES
	CRITICAL POS MOMENT= 413.89 KN-MET AT 4100.MM, LOAD 200					
	REQD STEEL= 1213.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 68. MMS					
	REQD. DEVELOPMENT LENGTH = 752. MMS					
	Cracked Moment of Inertia Iz at above location = 567750.9 cm^4					
2	931.	3 - 12MM	0.	742.	YES	NO
	CRITICAL NEG MOMENT= 60.30 KN-MET AT 0.MM, LOAD 204					
	REQD STEEL= 229.MM2, RHO=0.0007, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 106. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 178917.0 cm^4					

B E A M N O. 114 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 124.95 KNS Vc= 341.14 KNS Vs= 0.00 KNS
Tu= 15.04 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 104.91 KNS Vc= 309.96 KNS Vs= 0.00 KNS
Tu= 15.04 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

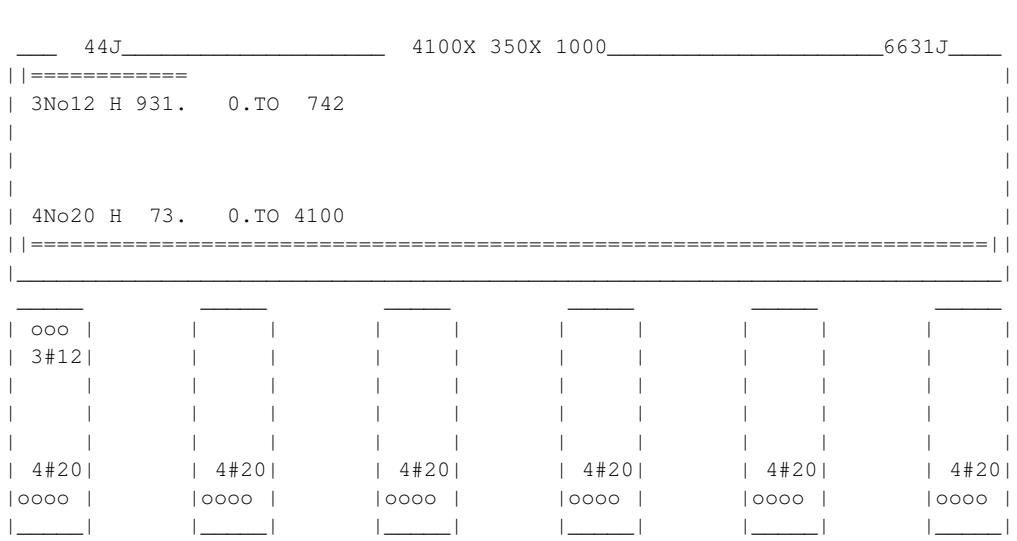

BEAM NO. 115 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 850. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	925.	3 - 25MM	0.	850.	YES	YES

CRITICAL NEG MOMENT= 492.15 KN-MET AT 850.MM, LOAD 200
REQD STEEL= 1454.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS
REQD. DEVELOPMENT LENGTH = 803. MMS

Cracked Moment of Inertia Iz at above location = 645381.8 cm^4

B E A M N O. 115 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 115 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 115 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

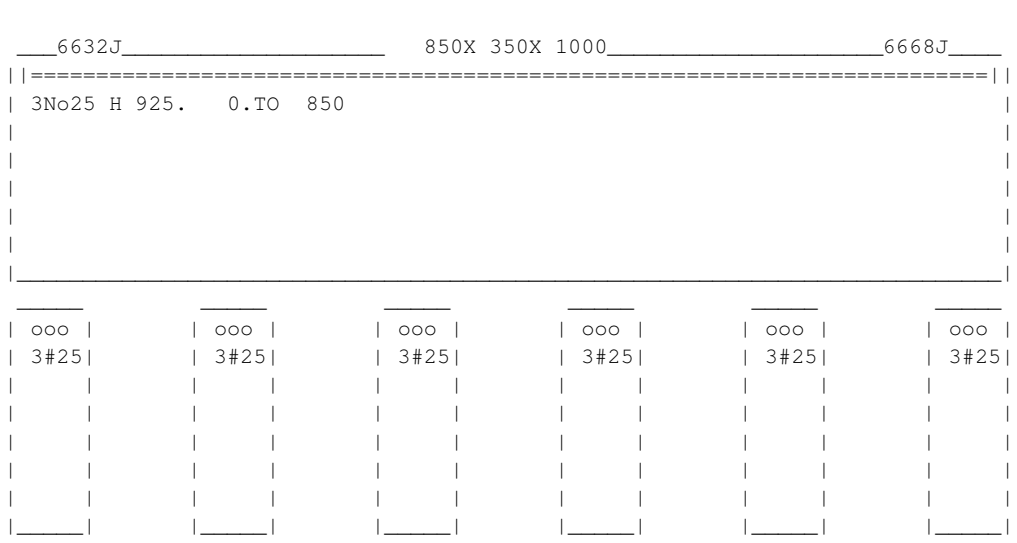

BEAM NO. 116 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 850. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	925.	3 - 25MM	0.	850.	YES	YES

CRITICAL NEG MOMENT= 497.49 KN-MET AT 850.MM, LOAD 202
REQD STEEL= 1467.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS
REQD. DEVELOPMENT LENGTH = 803. MMS

Cracked Moment of Inertia Iz at above location = 649159.1 cm^4

B E A M N O. 116 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 116 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 116 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

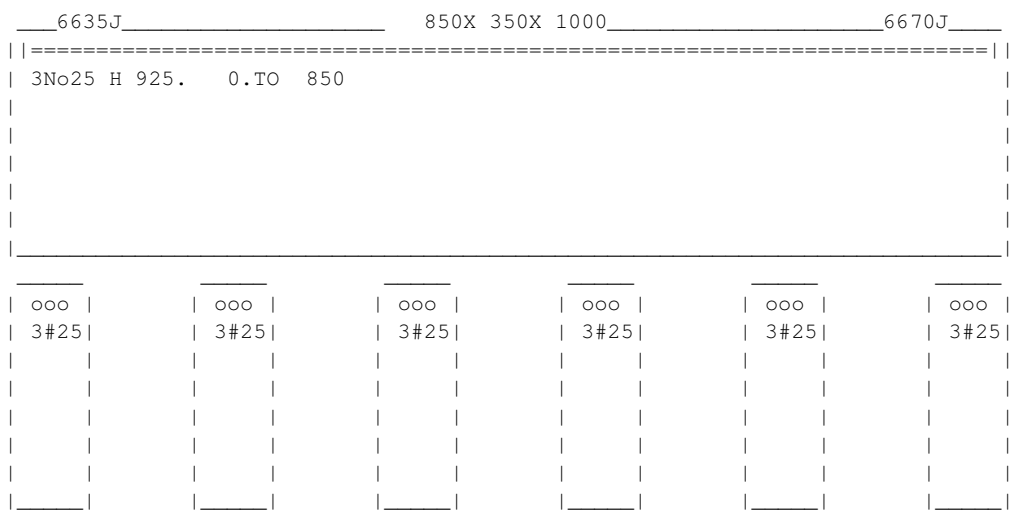

BEAM NO. 117 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	7 - 16MM	429.	2030.	NO	YES

CRITICAL POS MOMENT= 379.18 KN-MET AT 2030.MM, LOAD 220
REQD STEEL= 1305.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 43. MMS
REQD. DEVELOPMENT LENGTH = 762. MMS

Cracked Moment of Inertia Iz at above location = 640939.8 cm^4

2	927.	5 - 20MM	0.	2030.	YES	YES

CRITICAL NEG MOMENT= 508.36 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 1493.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 64. MMS
REQD. DEVELOPMENT LENGTH = 806. MMS

Cracked Moment of Inertia Iz at above location = 700018.6 cm^4

B E A M N O. 117 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 117 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 421.25 KNS Vc= 434.55 KNS Vs= 127.12 KNS
Tu= 65.57 KN-MET Tc= 21.5 KN-MET Ts= 87.4 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 176. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 11.27 SQ.CM.

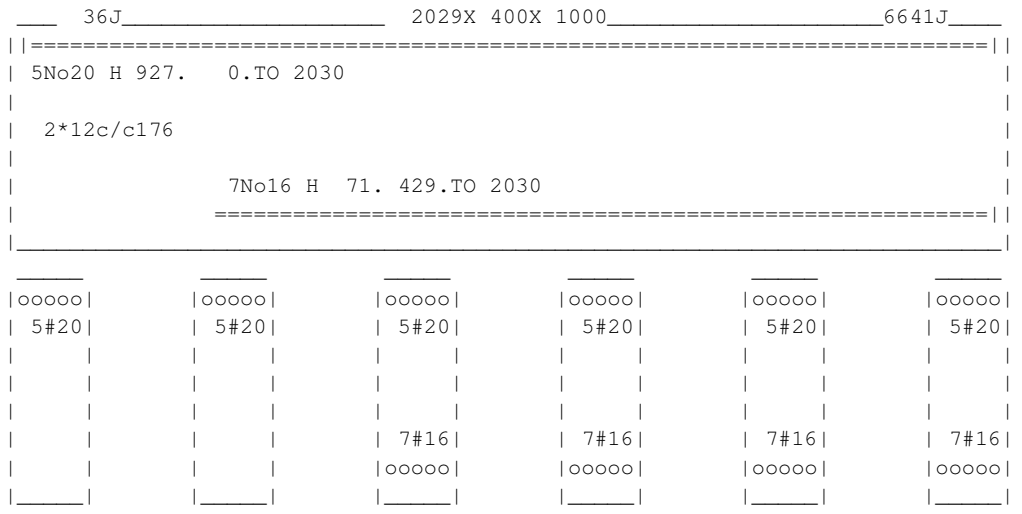

BEAM NO. 118 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	5 - 16MM	406.	6500.	NO	YES

CRITICAL POS MOMENT= 258.79 KN-MET AT 6500.MM, LOAD 201
REQD STEEL= 996.MM2, RHO=0.0031, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 52. MMS
REQD. DEVELOPMENT LENGTH = 630. MMS

Cracked Moment of Inertia Iz at above location = 471139.0 cm^4

2	929.	2 - 16MM	0.	1617.	YES	NO

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    103.16 KN-MET  AT     0.MM, LOAD  200|
|   REQD STEEL=   393.MM2, RHO=0.0012, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  209. MMS         |
|   REQD. DEVELOPMENT LENGTH =   410. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =   208225.9 cm^4
```

B E A M N O. 118 D E S I G N R E S U L T S - SHEAR

```
 AT START SUPPORT - Vu=   75.14 KNS  Vc=  347.08 KNS  Vs=    0.00 KNS
 Tu=    2.29 KN-MET  Tc=   16.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                   STIRRUPS ARE NOT REQUIRED.
 AT END   SUPPORT - Vu=   31.34 KNS  Vc=  306.21 KNS  Vs=    0.00 KNS
 Tu=    2.29 KN-MET  Tc=   16.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                   STIRRUPS ARE NOT REQUIRED.
```

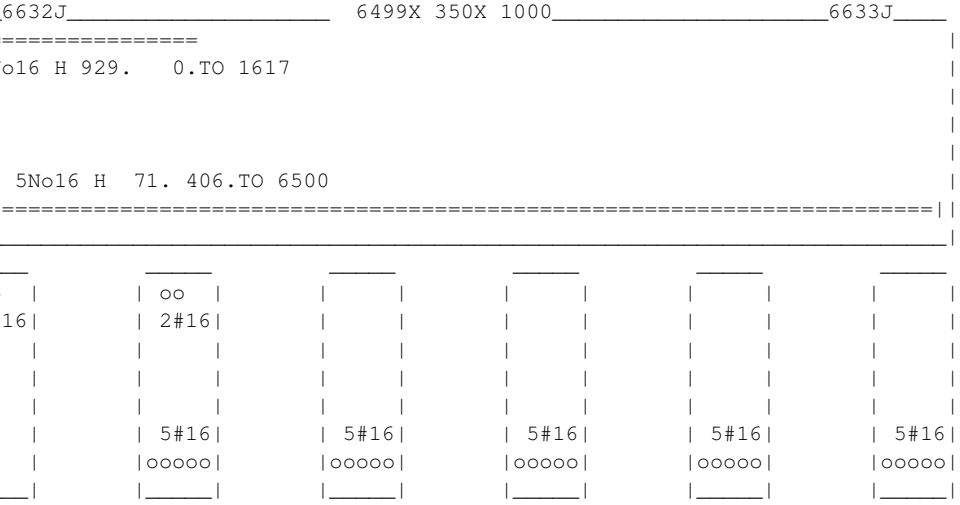

BEAM NO. 119 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	224.	2030.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=    534.74 KN-MET  AT  2030.MM, LOAD  220|
|   REQD STEEL=  1573.MM2, RHO=0.0042, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   51. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1007. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

```
  2        921.     3 - 32MM         0.         2030.        YES  YES
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    702.67 KN-MET  AT     0.MM, LOAD  200|
|   REQD STEEL=  2103.MM2, RHO=0.0057, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   64./  121. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1083. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 119 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 119 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 441.83 KNS Vc= 439.10 KNS Vs= 150.00 KNS
Tu= 32.28 KN-MET Tc= 21.4 KN-MET Ts= 43.0 KN-MET LOAD 205
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 264. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 5.55 SQ.CM.

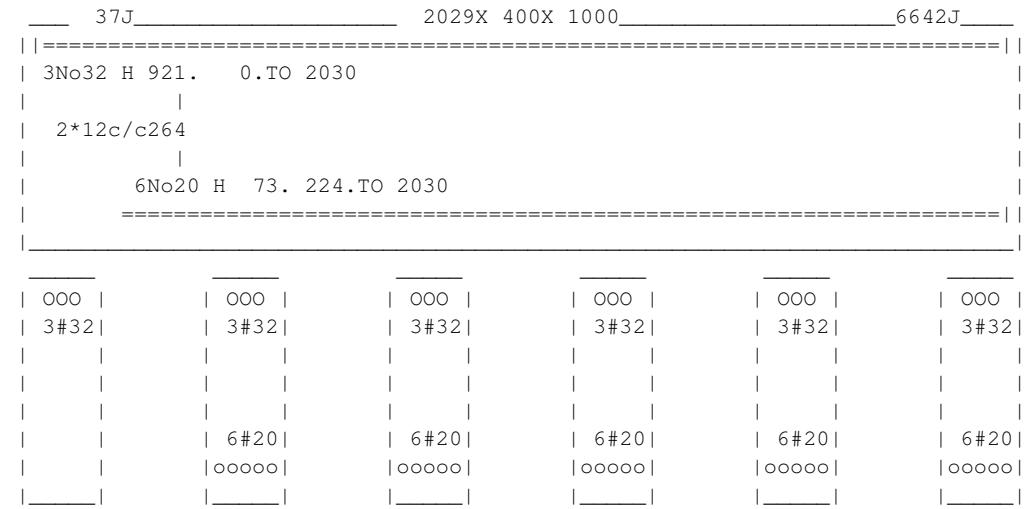

BEAM NO. 120 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2400. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	6 - 16MM	0.	1312.	YES	NO
	CRITICAL POS MOMENT= 299.68 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 1141.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 42. MMS					
	REQD. DEVELOPMENT LENGTH = 787. MMS					
	Cracked Moment of Inertia Iz at above location = 551051.2 cm^4					
2	925.	4 - 25MM	0.	2400.	YES	YES
	CRITICAL NEG MOMENT= 558.19 KN-MET AT 2400.MM, LOAD 201					
	REQD STEEL= 1657.MM2, RHO=0.0051, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 67. MMS					
	REQD. DEVELOPMENT LENGTH = 1205. MMS					
	Cracked Moment of Inertia Iz at above location = 818677.6 cm^4					

B E A M N O. 120 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 304.79 KNS Vc= 525.47 KNS Vs= 0.00 KNS
Tu= 2.29 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 275. MM

AT END SUPPORT - Vu= 357.95 KNS Vc= 351.65 KNS Vs= 125.61 KNS
Tu= 3.93 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 201
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 50. MM

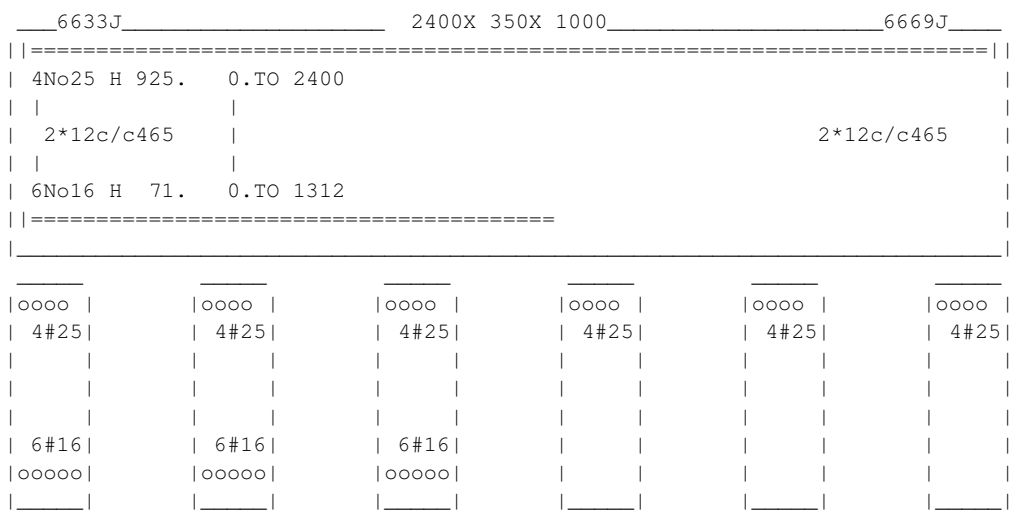

BEAM NO. 121 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	5 - 20MM	372.	2030.	NO	YES

CRITICAL POS MOMENT= 504.20 KN-MET AT 2030.MM, LOAD 221
REQD STEEL= 1481.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 64. MMS
REQD. DEVELOPMENT LENGTH = 806. MMS

Cracked Moment of Inertia Iz at above location = 700018.6 cm^4

2	927.	6 - 20MM	0.	2030.	YES	YES

CRITICAL NEG MOMENT= 633.16 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 1874.MM2, RHO=0.0051, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

B E A M N O. 121 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 121 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 438.11 KNS Vc= 509.26 KNS Vs= 74.89 KNS
Tu= 43.84 KN-MET Tc= 21.3 KN-MET Ts= 58.5 KN-MET LOAD 200
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 272. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.53 SQ.CM.

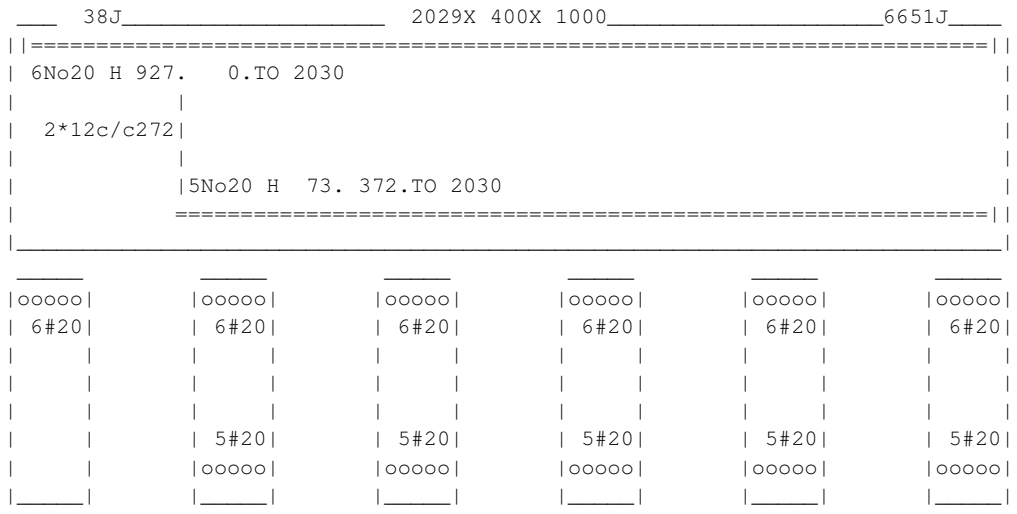

BEAM NO. 122 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	7 - 16MM	429.	2030.	NO	YES

CRITICAL POS MOMENT= 419.03 KN-MET AT 2030.MM, LOAD 201
REQD STEEL= 1305.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 43. MMS
REQD. DEVELOPMENT LENGTH = 762. MMS

Cracked Moment of Inertia Iz at above location = 640939.8 cm^4

2	927.	5 - 20MM	0.	1785.	YES	NO

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    501.98 KN-MET  AT     0.MM, LOAD  201|
|   REQD STEEL=  1474.MM2, RHO=0.0040, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   64. MMS         |
|   REQD. DEVELOPMENT LENGTH =   806. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 700018.6 cm^4

B E A M N O. 122 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 122 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 454.72 KNS Vc= 489.15 KNS Vs= 117.14 KNS
Tu= 45.32 KN-MET Tc= 21.4 KN-MET Ts= 60.4 KN-MET LOAD 201
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 235. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.79 SQ.CM.

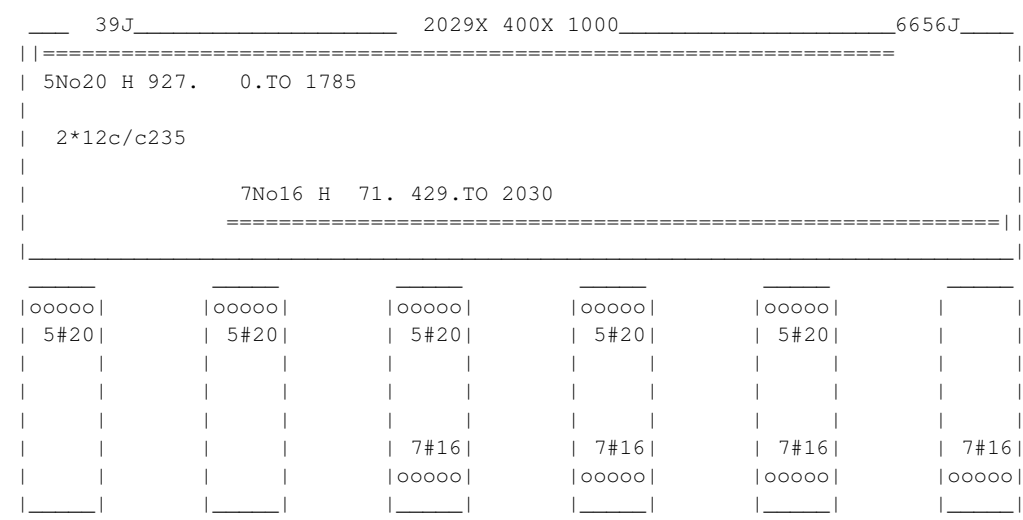

BEAM NO. 123 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	6 - 16MM	297.	6500.	NO	YES

CRITICAL POS MOMENT= 393.22 KN-MET AT 6500.MM, LOAD 203
REQD STEEL= 1148.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 42. MMS
REQD. DEVELOPMENT LENGTH = 787. MMS

Cracked Moment of Inertia Iz at above location = 551051.2 cm^4

2	931.	4 - 12MM	0.	1483.	YES	NO

CRITICAL NEG MOMENT= 108.13 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 411.MM2, RHO=0.0013, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 71. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 232768.7 cm^4

B E A M N O. 123 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 86.31 KNS Vc= 496.52 KNS Vs= 0.00 KNS
Tu= 7.64 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 42.51 KNS Vc= 306.66 KNS Vs= 0.00 KNS
Tu= 7.64 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

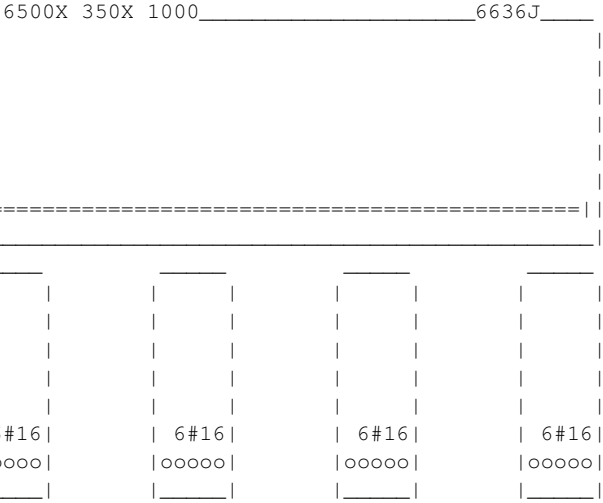

BEAM NO. 124 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	19.	2030.	NO	YES

CRITICAL POS MOMENT= 561.13 KN-MET AT 2030.MM, LOAD 222
REQD STEEL= 1653.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

2	927.	6 - 20MM	0.	2030.	YES	YES

CRITICAL NEG MOMENT= 631.82 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 1870.MM2, RHO=0.0050, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

B E A M N O. 124 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 124 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 471.07 KNS Vc= 492.10 KNS Vs= 135.99 KNS
Tu= 30.03 KN-MET Tc= 21.4 KN-MET Ts= 40.0 KN-MET LOAD 206
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 287. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 5.16 SQ.CM.

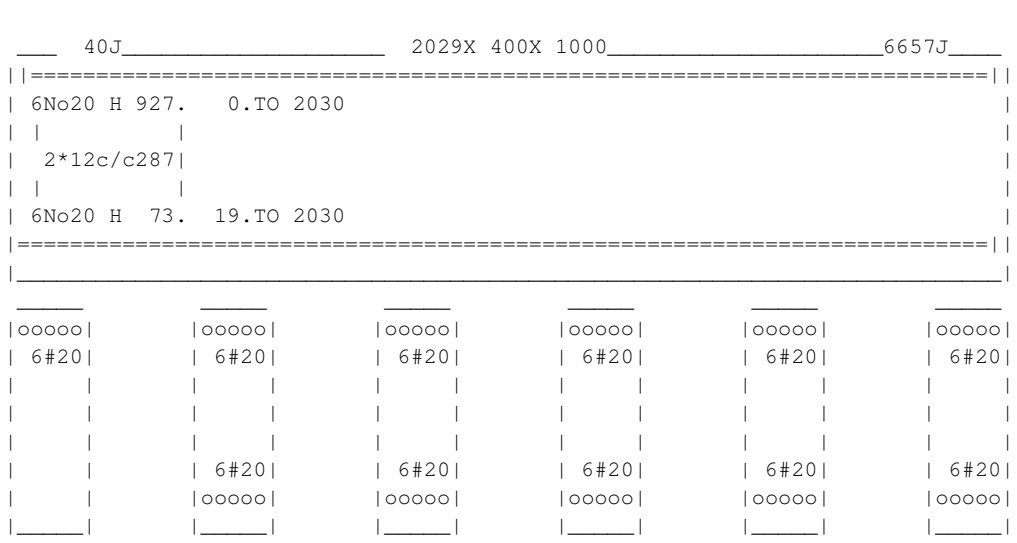

BEAM NO. 125 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2400. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	75.	3 - 25MM	0.	2029.	YES	NO

CRITICAL POS MOMENT= 448.06 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 1320.MM2, RHO=0.0041, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS
REQD. DEVELOPMENT LENGTH = 803. MMS

Cracked Moment of Inertia Iz at above location = 645381.8 cm^4

2	925.	3 - 25MM	0.	2400.	YES	YES

CRITICAL NEG MOMENT= 447.33 KN-MET AT 2400.MM, LOAD 203
REQD STEEL= 1318.MM2, RHO=0.0041, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS
REQD. DEVELOPMENT LENGTH = 803. MMS

Cracked Moment of Inertia Iz at above location = 645381.8 cm^4

B E A M N O. 125 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 300.30 KNS Vc= 377.01 KNS Vs= 23.39 KNS
Tu= 7.64 KN-MET Tc= 16.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 463. MM C/C FOR 275. MM

AT END SUPPORT - Vu= 303.52 KNS Vc= 560.53 KNS Vs= 0.00 KNS
Tu= 7.64 KN-MET Tc= 16.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 463. MM C/C FOR 50. MM

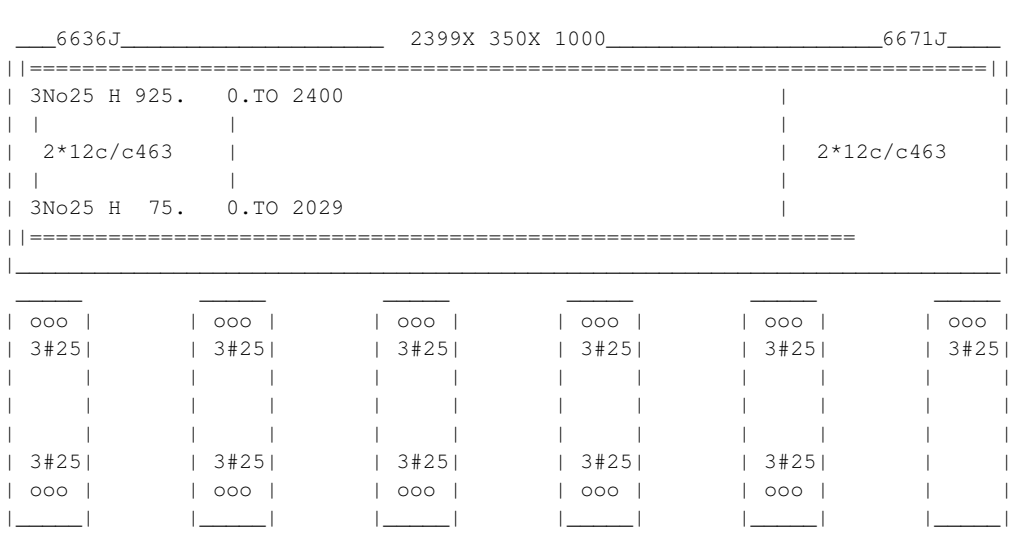

BEAM NO. 126 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2030. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	182.	2030.	NO	YES

CRITICAL POS MOMENT= 566.04 KN-MET AT 2030.MM, LOAD 223
REQD STEEL= 1668.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

2	921.	3 - 32MM	0.	2030.	YES YES

CRITICAL NEG MOMENT= 719.15 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 2155.MM2, RHO=0.0058, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 126 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 126 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

AT START SUPPORT - Vu= 536.41 KNS Vc= 466.97 KNS Vs= 248.24 KNS
Tu= 59.11 KN-MET Tc= 21.5 KN-MET Ts= 78.8 KN-MET LOAD 207
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 16 MM 2-LEGGED STIRRUPS AT 268. MM C/C FOR 90. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 10.16 SQ.CM.

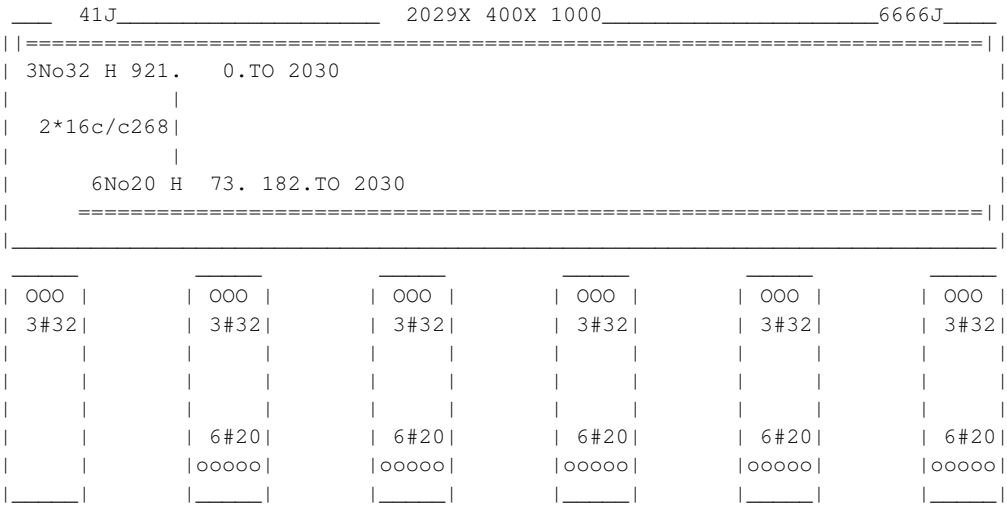

BEAM NO. 127 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	7 - 16MM	0.	1780.	YES	YES

CRITICAL POS MOMENT= 416.49 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 1305.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 43. MMS
REQD. DEVELOPMENT LENGTH = 762. MMS

Cracked Moment of Inertia Iz at above location = 640939.8 cm^4

B E A M N O. 127 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 127 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 127 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

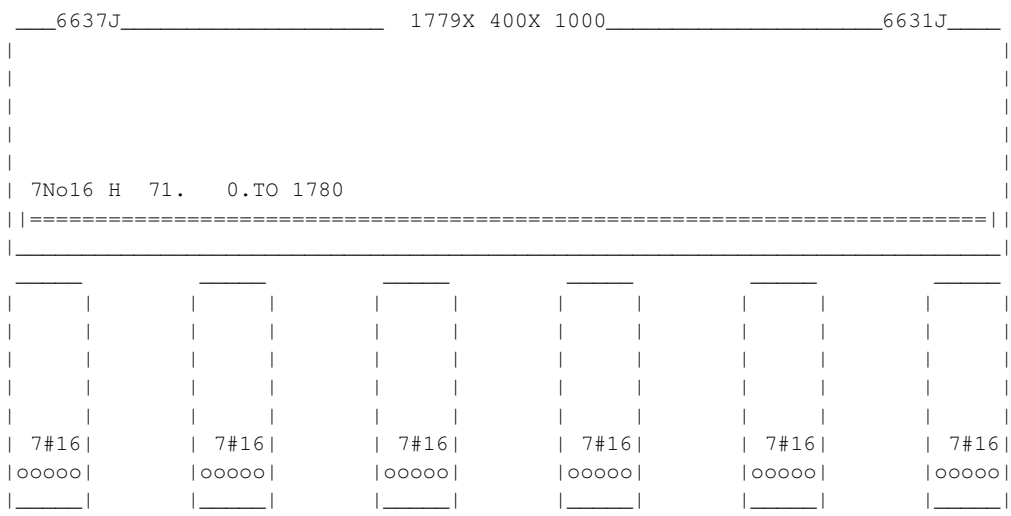

BEAM NO. 128 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 745.13 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 2236.MM2, RHO=0.0061, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 128 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 150.45 KNS Vc= 353.86 KNS Vs= 0.00 KNS
Tu= 69.45 KN-MET Tc= 21.1 KN-MET Ts= 92.6 KN-MET LOAD 220
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 223. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 11.93 SQ.CM.

AT END SUPPORT - Vu= 154.98 KNS Vc= 355.40 KNS Vs= 0.00 KNS
Tu= 69.45 KN-MET Tc= 21.1 KN-MET Ts= 92.6 KN-MET LOAD 220
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 223. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 11.93 SQ.CM.

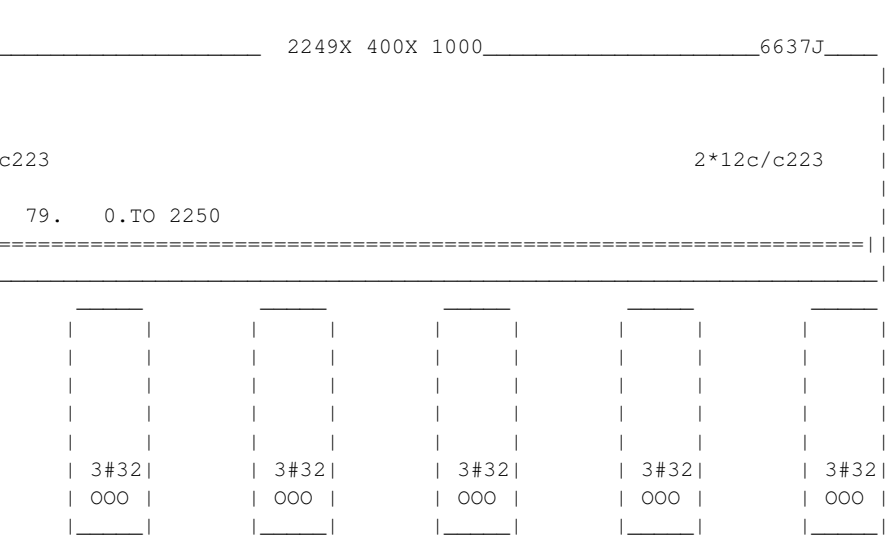

BEAM NO. 129 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	45.	1940.	NO	YES

CRITICAL POS MOMENT= 42.25 KN-MET AT 1940.MM, LOAD 200
REQD STEEL= 353.MM2, RHO=0.0033, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

2	431.	3 - 12MM	0.	1370.	YES	NO

CRITICAL NEG MOMENT= 36.58 KN-MET AT 0.MM, LOAD 221
REQD STEEL= 303.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 129 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 37.82 KNS Vc= 147.56 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 25.63 KNS Vc= 102.40 KNS Vs= 0.00 KNS
Tu= 0.24 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

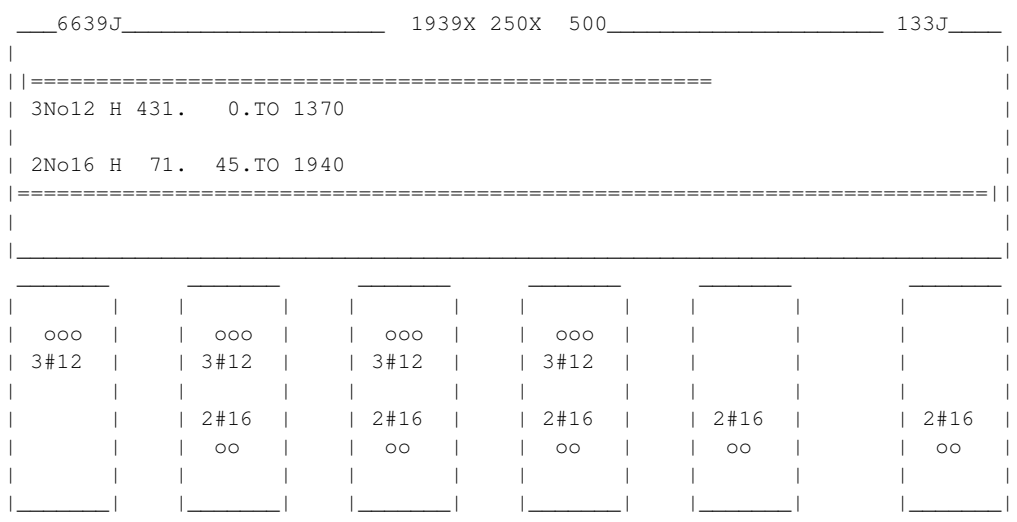

==========

BEAM NO. 130 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 747.81 KN-MET AT 1455.MM, LOAD 200
REQD STEEL= 2245.MM2, RHO=0.0061, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 130 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 130 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 130 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

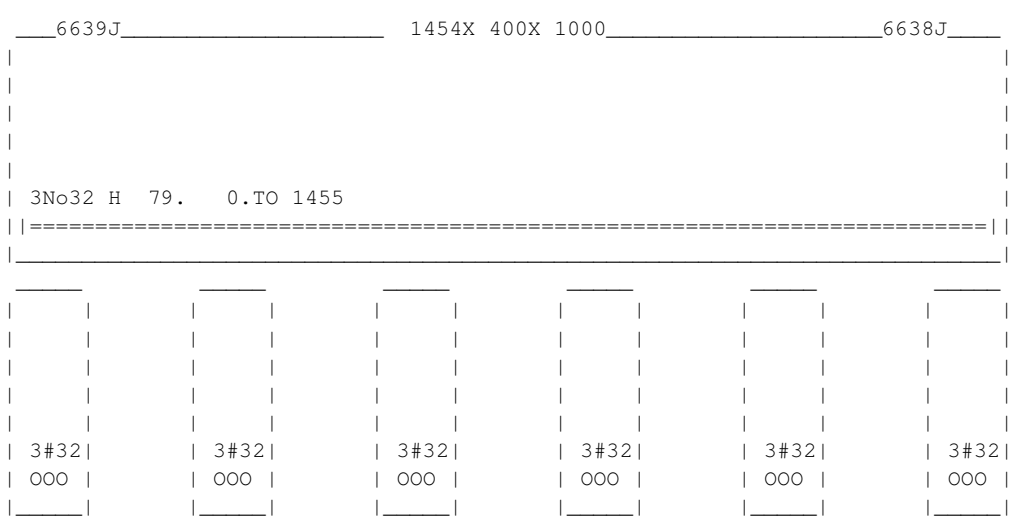

BEAM NO. 131 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	280.	1940.	NO	YES
	CRITICAL POS MOMENT= 38.07 KN-MET AT 1940.MM, LOAD 200					
	REQD STEEL= 316.MM2, RHO=0.0029, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 34155.8 cm^4					
2	431.	3 - 12MM	0.	1370.	YES	NO

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     39.41 KN-MET  AT     0.MM, LOAD  221|
|   REQD STEEL=   327.MM2, RHO=0.0030, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

B E A M N O. 131 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 40.43 KNS Vc= 105.90 KNS Vs= 0.00 KNS
Tu= 2.02 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 201
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 545. MM

AT END SUPPORT - Vu= 26.60 KNS Vc= 105.72 KNS Vs= 0.00 KNS
Tu= 1.67 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

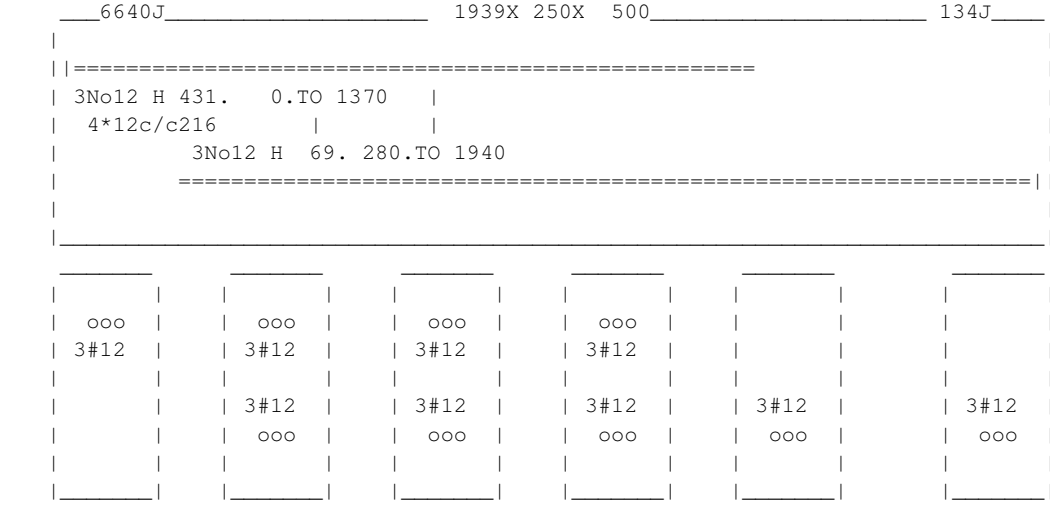

BEAM NO. 132 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 734.75 KN-MET AT 1090.MM, LOAD 200
REQD STEEL= 2204.MM2, RHO=0.0060, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 132 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 132 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 132 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

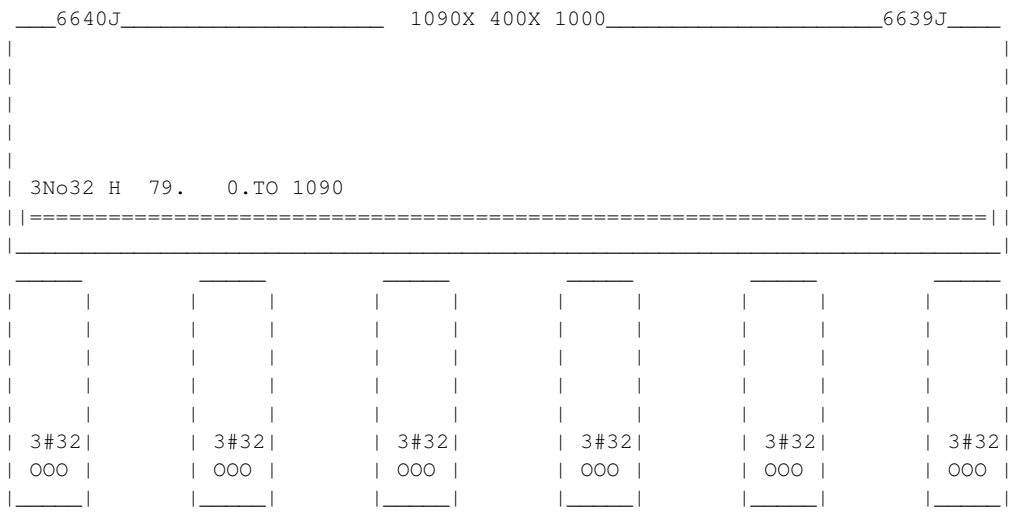

BEAM NO. 133 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 628.06 KN-MET AT 1455.MM, LOAD 200
REQD STEEL= 1858.MM2, RHO=0.0050, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

B E A M N O. 133 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 133 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 133 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

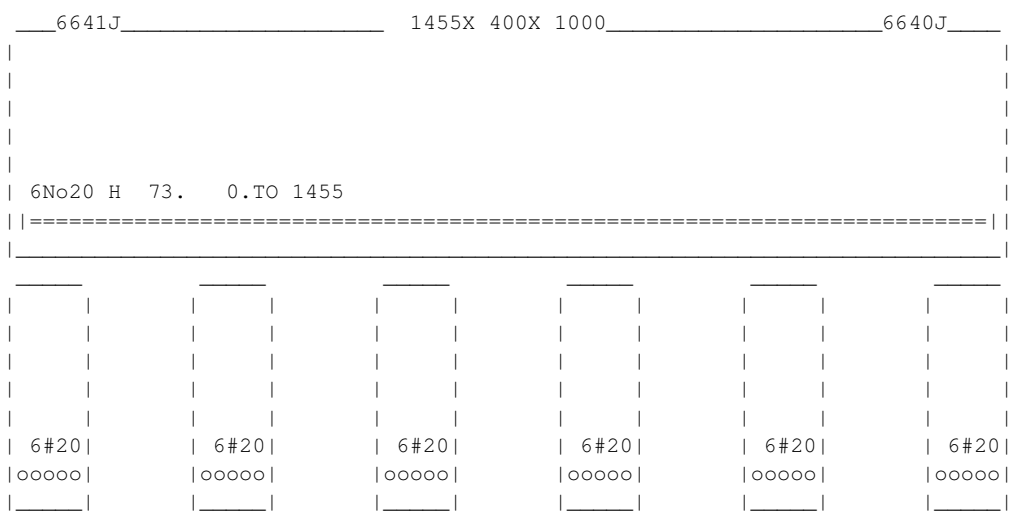

BEAM NO. 134 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	435.	5253.	NO	NO
	CRITICAL POS MOMENT= 107.83 KN-MET AT 2708.MM, LOAD 200					
	REQD STEEL= 556.MM2, RHO=0.0042, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	527.	3 - 20MM	0.	2183.	YES	NO
	CRITICAL NEG MOMENT= 127.93 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 666.MM2, RHO=0.0051, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	3 - 20MM	4046.	6500.	NO	YES
	CRITICAL NEG MOMENT= 126.77 KN-MET AT 6500.MM, LOAD 200					
	REQD STEEL= 660.MM2, RHO=0.0050, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					

B E A M N O. 134 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 150.63 KNS Vc= 129.55 KNS Vs= 71.30 KNS
Tu= 0.90 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 221
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 90.45 KNS Vc= 129.80 KNS Vs= 0.00 KNS
Tu= 2.49 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

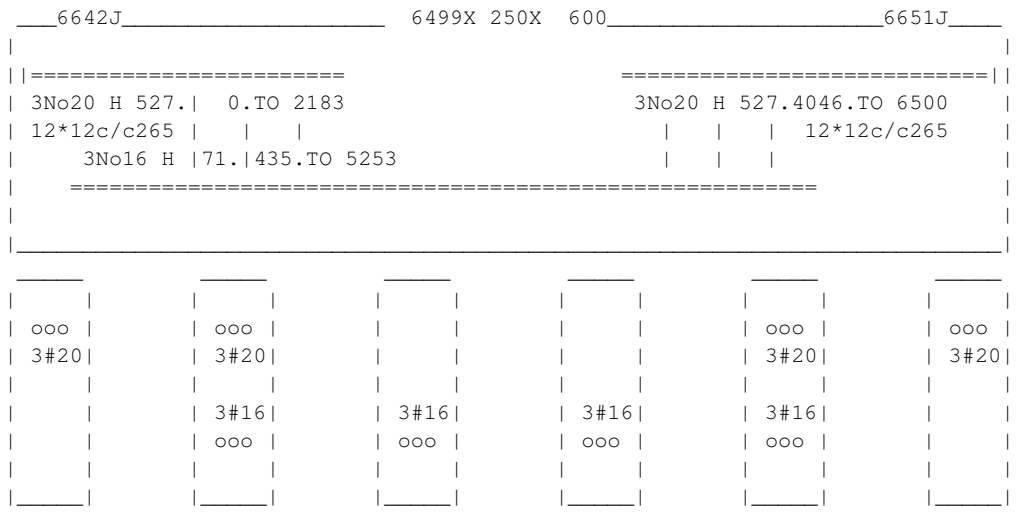

BEAM NO. 135 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 953.05 KN-MET AT 1455.MM, LOAD 200
REQD STEEL= 2899.MM2, RHO=0.0079, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 81. MMS
REQD. DEVELOPMENT LENGTH = 1624. MMS

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 135 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 135 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 135 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

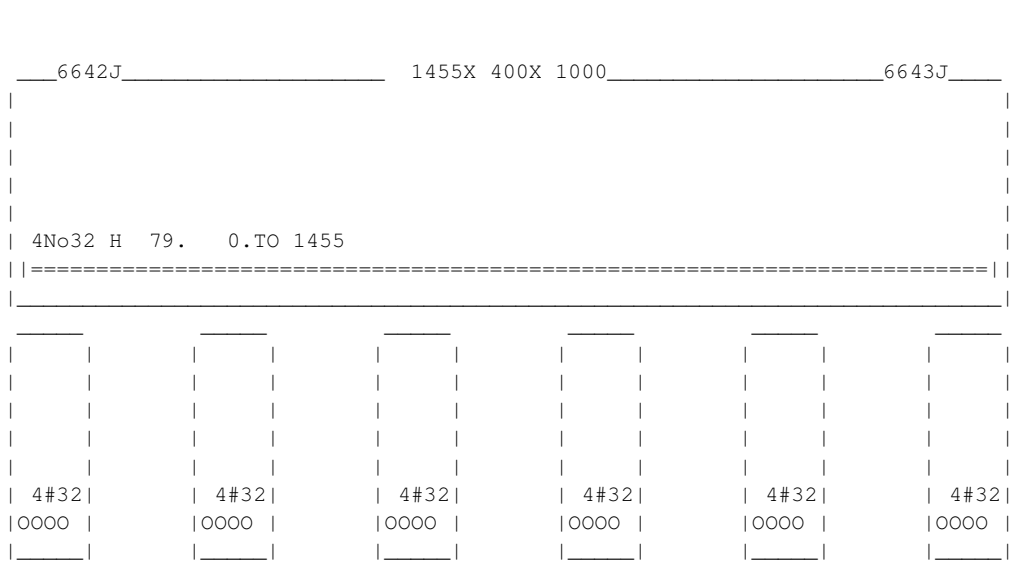

BEAM NO. 136 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	860.	1440.	NO	YES

CRITICAL POS MOMENT= 14.36 KN-MET AT 1440.MM, LOAD 200
REQD STEEL= 118.MM2, RHO=0.0011, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	429.	2 - 16MM	0.	1440.	YES	YES

CRITICAL NEG MOMENT= 55.33 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 136 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 42.89 KNS Vc= 102.40 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 295. MM

AT END SUPPORT - Vu= 36.29 KNS Vc= 185.86 KNS Vs= 0.00 KNS
Tu= 1.17 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

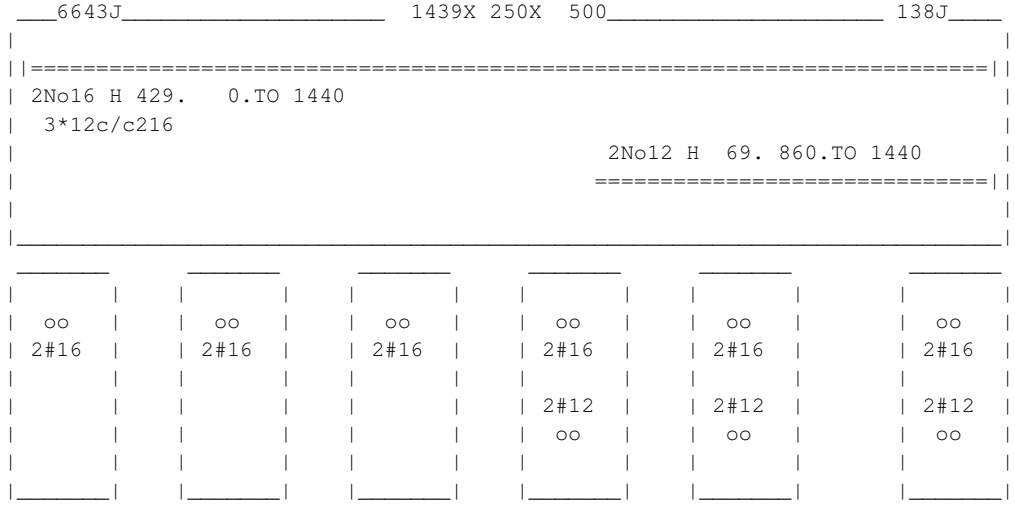

BEAM NO. 137 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 1149.58 KN-MET AT 1090.MM, LOAD 200
REQD STEEL= 3560.MM2, RHO=0.0097, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 117. MMS
REQD. DEVELOPMENT LENGTH = 1749. MMS

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 137 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 137 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 137 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

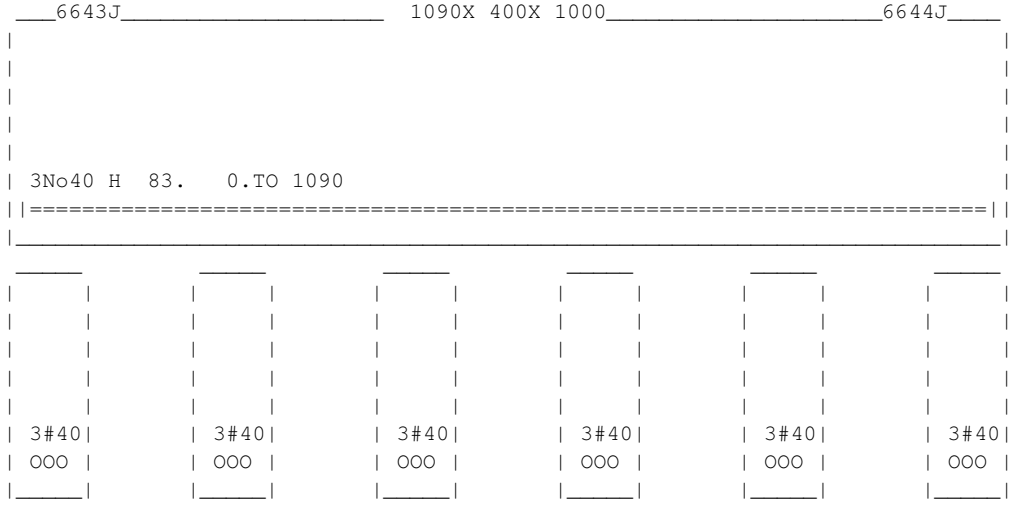

==========

BEAM NO. 138 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	855.	1440.	NO	YES

CRITICAL POS MOMENT= 14.75 KN-MET AT 1440.MM, LOAD 200
REQD STEEL= 121.MM2, RHO=0.0011, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

```
  2        429.     2 - 16MM         0.         1440.        YES  YES
 |-------------------------------------------------------------------|
 |   CRITICAL NEG MOMENT=     56.48 KN-MET  AT     0.MM, LOAD  203|
 |   REQD STEEL=   377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
 |   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  109. MMS         |
 |   REQD. DEVELOPMENT LENGTH =   410. MMS                        |
 |-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    39141.0 cm^4
```

B E A M N O. 138 D E S I G N R E S U L T S - SHEAR

```
  AT START SUPPORT - Vu=   42.80 KNS  Vc=  104.76 KNS  Vs=    0.00 KNS
  Tu=    0.38 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
  NO STIRRUPS ARE REQUIRED FOR TORSION.
  REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
  PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM  C/C FOR  295. MM

  AT END   SUPPORT - Vu=   36.19 KNS  Vc=  104.76 KNS  Vs=    0.00 KNS
  Tu=    0.38 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                   STIRRUPS ARE NOT REQUIRED.
```

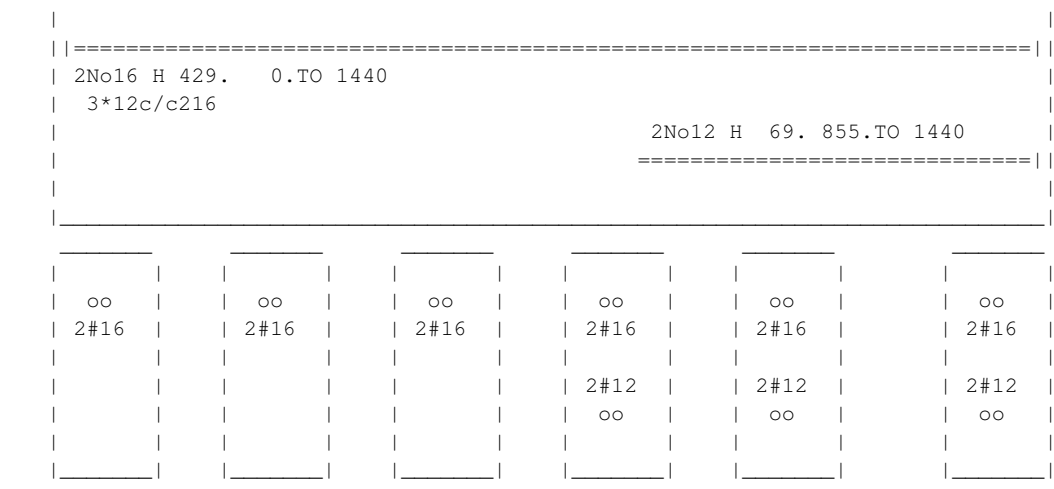

BEAM NO. 139 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 1245.21 KN-MET AT 1455.MM, LOAD 200
REQD STEEL= 3907.MM2, RHO=0.0107, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 139 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 139 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 139 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

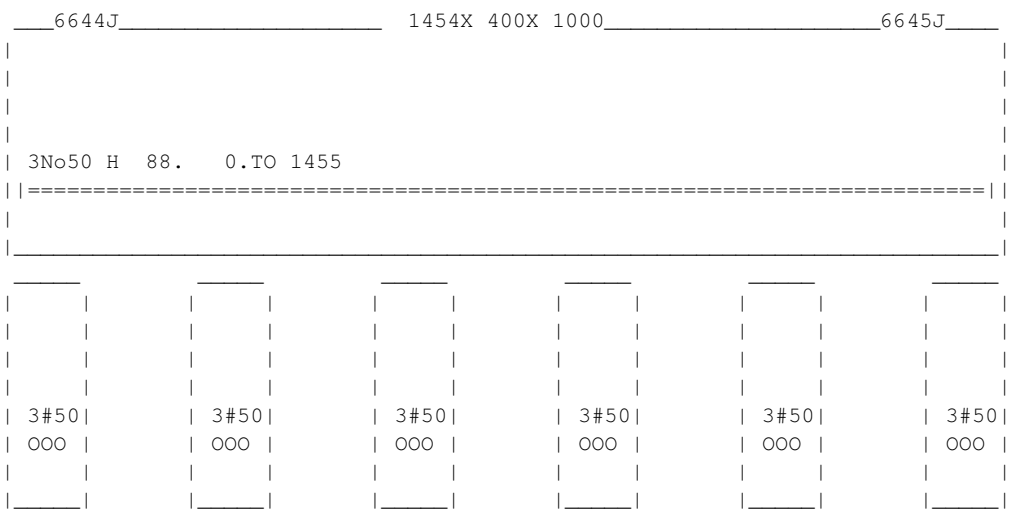

BEAM NO. 140 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	429.	5800.	NO	NO
	CRITICAL POS MOMENT= 109.41 KN-MET AT 2708.MM, LOAD 200					
	REQD STEEL= 564.MM2, RHO=0.0043, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	527.	3 - 20MM	0.	2183.	YES	NO
	CRITICAL NEG MOMENT= 126.56 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 658.MM2, RHO=0.0050, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					
3	527.	3 - 20MM	4046.	6500.	NO	YES
	CRITICAL NEG MOMENT= 124.89 KN-MET AT 6500.MM, LOAD 200					
	REQD STEEL= 649.MM2, RHO=0.0049, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					

B E A M N O. 140 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 153.16 KNS Vc= 129.76 KNS Vs= 74.45 KNS
Tu= 0.23 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 221
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 90.37 KNS Vc= 127.75 KNS Vs= 0.00 KNS
Tu= 1.30 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

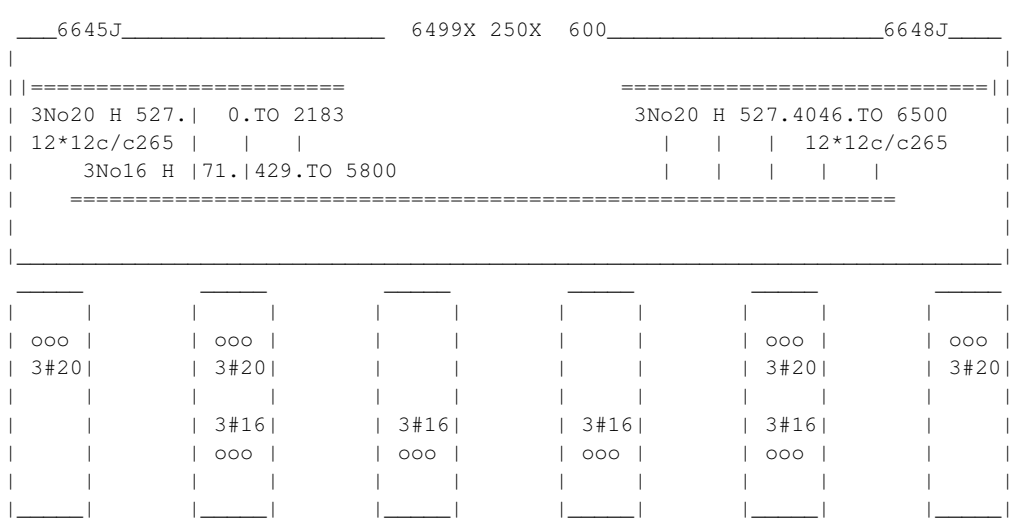

BEAM NO. 141 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 1249.24 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 3921.MM2, RHO=0.0107, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 141 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 245.12 KNS Vc= 355.58 KNS Vs= 0.00 KNS
Tu= 2.81 KN-MET Tc= 21.2 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 457. MM C/C FOR 200. MM

AT END SUPPORT - Vu= 249.65 KNS Vc= 357.47 KNS Vs= 0.00 KNS
Tu= 2.81 KN-MET Tc= 21.2 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 457. MM C/C FOR 200. MM

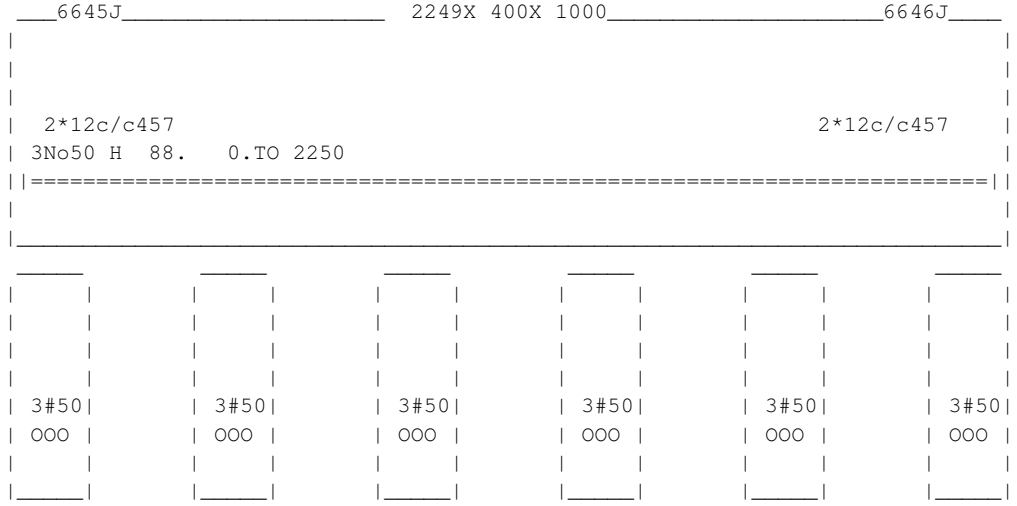

BEAM NO. 142 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	1125.	6188.	NO	NO

CRITICAL POS MOMENT= 37.81 KN-MET AT 3250.MM, LOAD 201
REQD STEEL= 253.MM2, RHO=0.0019, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 53246.0 cm^4

```
  2        529.     3 - 16MM         0.         1617.        YES  NO
|-------------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     68.33 KN-MET  AT     0.MM, LOAD  203|
|   REQD STEEL=   463.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./   54. MMS         |
|   REQD. DEVELOPMENT LENGTH =   605. MMS                        |
|-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    86583.8 cm^4

  3        531.     3 - 12MM      4746.         6500.        NO   YES
|-------------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     46.62 KN-MET  AT  6500.MM, LOAD  202|
|   REQD STEEL=   313.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./   56. MMS         |
|   REQD. DEVELOPMENT LENGTH =   328. MMS                        |
|-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    53246.0 cm^4
```

B E A M N O. 142 D E S I G N R E S U L T S - SHEAR

```
  AT START SUPPORT - Vu=   49.22 KNS  Vc=  127.37 KNS  Vs=    0.00 KNS
  Tu=    0.07 KN-MET  Tc=    4.9 KN-MET  Ts=    0.0 KN-MET  LOAD   201
  NO STIRRUPS ARE REQUIRED FOR TORSION.
  REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
  PROVIDE 12 MM 2-LEGGED STIRRUPS AT 266. MM  C/C FOR 2725. MM

  AT END   SUPPORT - Vu=   43.18 KNS  Vc=  129.22 KNS  Vs=    0.00 KNS
  Tu=    3.65 KN-MET  Tc=    4.9 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                   STIRRUPS ARE NOT REQUIRED.
```

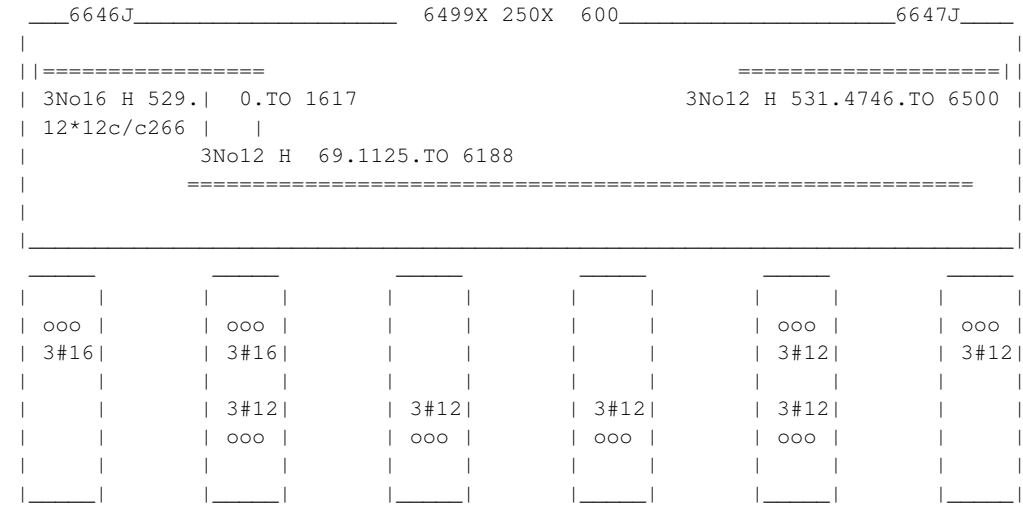

BEAM NO. 143 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1780.	YES	YES

CRITICAL POS MOMENT= 703.03 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 2104.MM2, RHO=0.0057, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 143 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 143 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 143 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

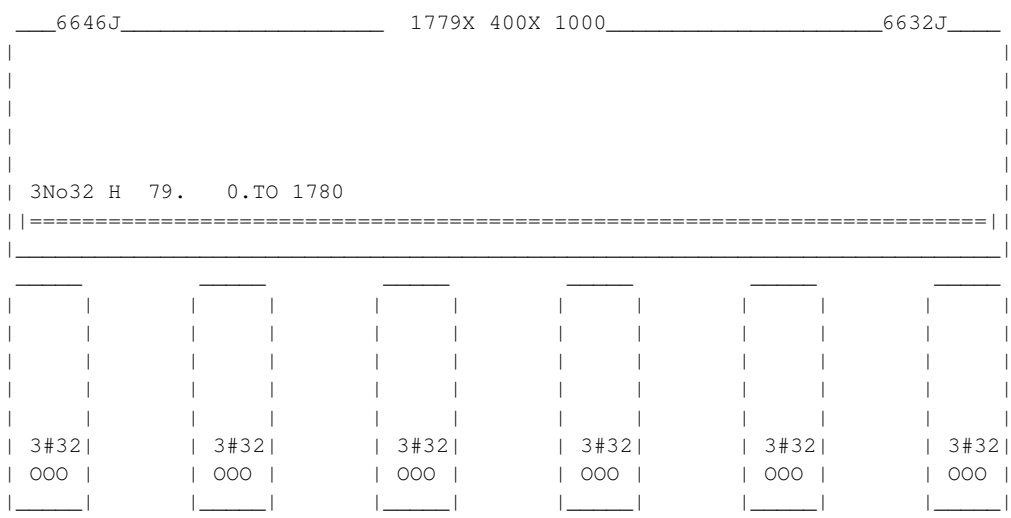

BEAM NO. 144 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	0.	1780.	YES	YES

CRITICAL POS MOMENT= 634.92 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 1885.MM2, RHO=0.0051, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS
REQD. DEVELOPMENT LENGTH = 1007. MMS

Cracked Moment of Inertia Iz at above location = 810616.9 cm^4

B E A M N O. 144 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 144 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 144 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

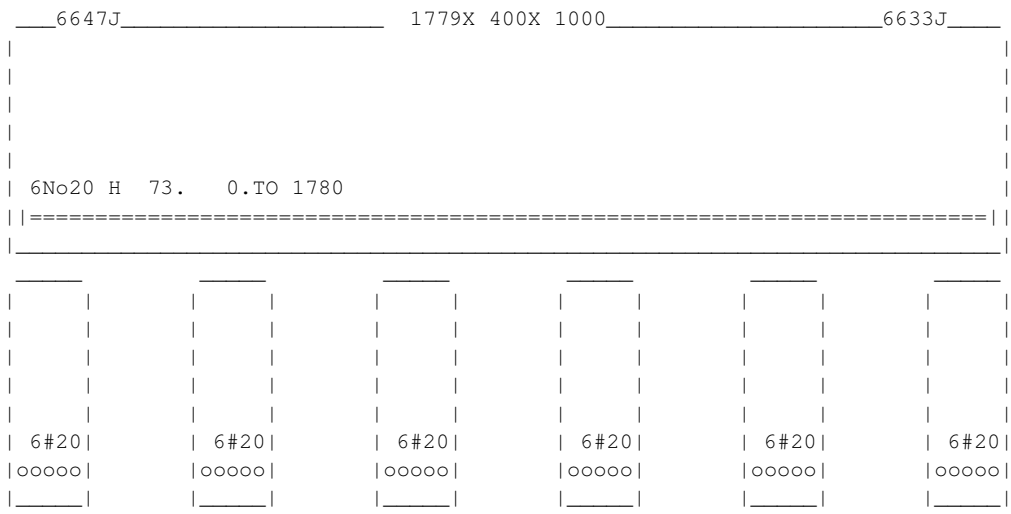

BEAM NO. 145 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	1075.	5154.	NO	NO
	CRITICAL POS MOMENT= 30.74 KN-MET AT 3250.MM, LOAD 201					
	REQD STEEL= 205.MM2, RHO=0.0015, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 37140.7 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 75.44 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	529.	2 - 16MM	4612.	6500.	NO	YES
	CRITICAL NEG MOMENT= 54.60 KN-MET AT 6500.MM, LOAD 200					
	REQD STEEL= 369.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS					
	REQD. DEVELOPMENT LENGTH = 410. MMS					
	Cracked Moment of Inertia Iz at above location = 61275.5 cm^4					

B E A M N O. 145 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 48.17 KNS Vc= 130.27 KNS Vs= 0.00 KNS
Tu= 1.59 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.
AT END SUPPORT - Vu= 41.76 KNS Vc= 130.27 KNS Vs= 0.00 KNS
Tu= 1.59 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

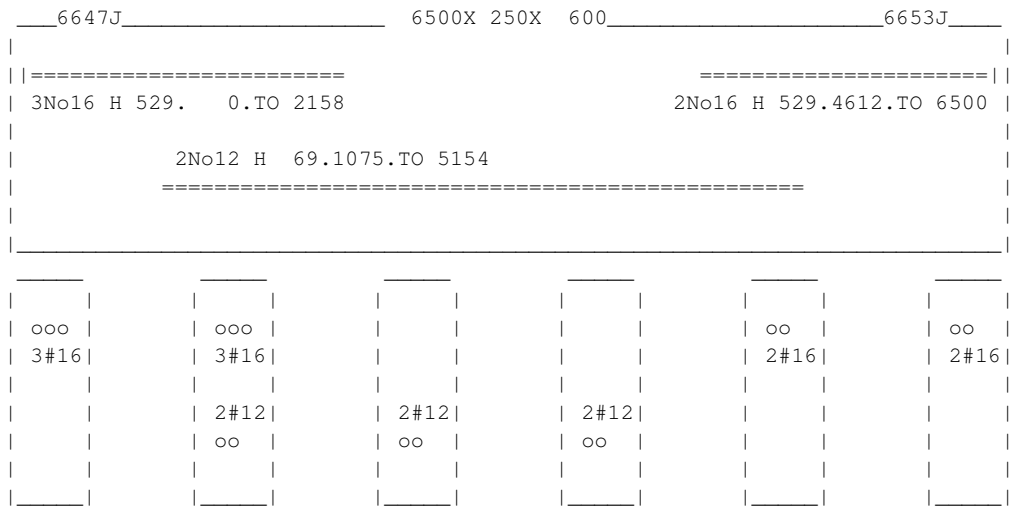

BEAM NO. 146 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 1147.10 KN-MET AT 0.MM, LOAD 201
REQD STEEL= 3552.MM2, RHO=0.0097, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 117. MMS
REQD. DEVELOPMENT LENGTH = 1749. MMS

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 146 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 171.81 KNS Vc= 355.01 KNS Vs= 0.00 KNS
Tu= 17.66 KN-MET Tc= 21.1 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 459. MM C/C FOR 200. MM

AT END SUPPORT - Vu= 176.35 KNS Vc= 356.57 KNS Vs= 0.00 KNS
Tu= 17.66 KN-MET Tc= 21.1 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 459. MM C/C FOR 200. MM

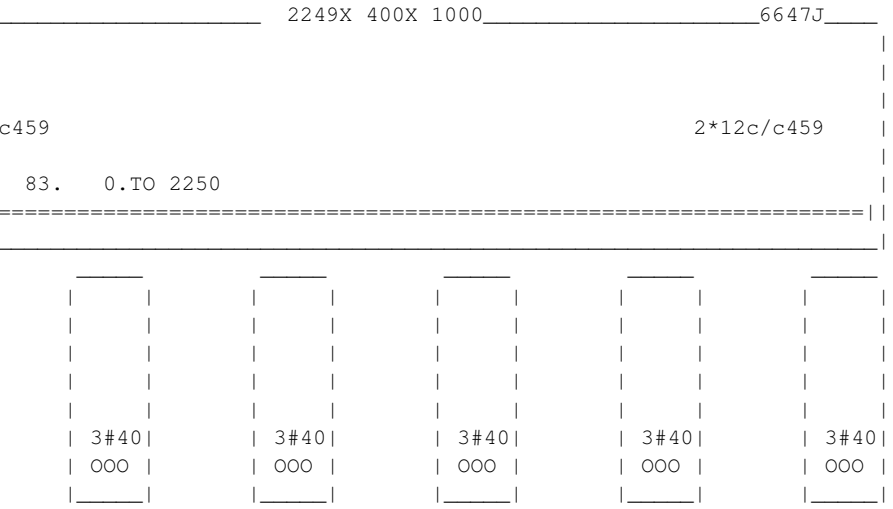

BEAM NO. 147 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	940.	YES	YES

CRITICAL NEG MOMENT= 63.54 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 400.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39533.9 cm^4

B E A M N O. 147 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 48.41 KNS Vc= 105.10 KNS Vs= 0.00 KNS
Tu= 0.28 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 45. MM

AT END SUPPORT - Vu= 47.40 KNS Vc= 105.10 KNS Vs= 0.00 KNS
Tu= 0.28 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 45. MM

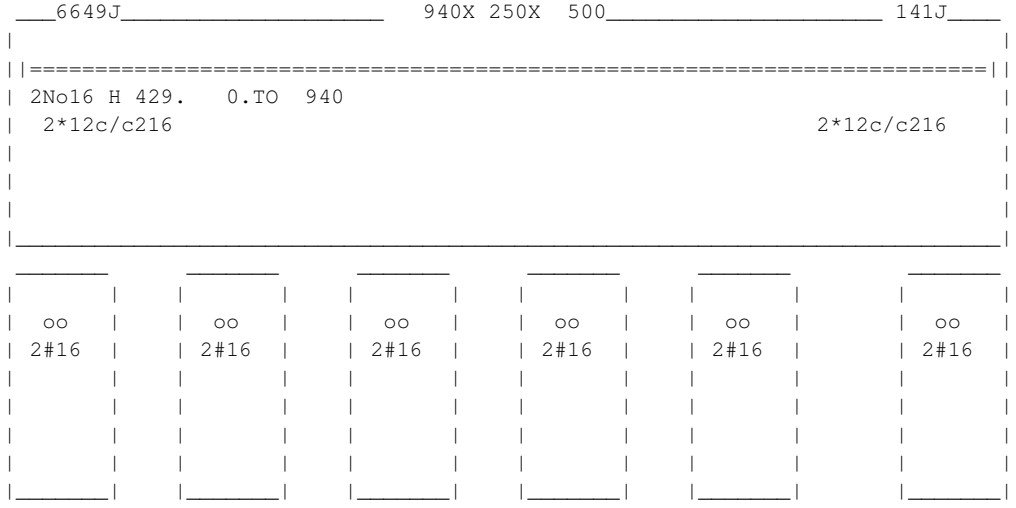

BEAM NO. 148 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	429.	2 - 16MM	0.	940.	YES	YES

CRITICAL NEG MOMENT= 62.68 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 395.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39533.9 cm^4

B E A M N O. 148 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 48.24 KNS Vc= 105.48 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 45. MM

AT END SUPPORT - Vu= 47.23 KNS Vc= 105.48 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 45. MM

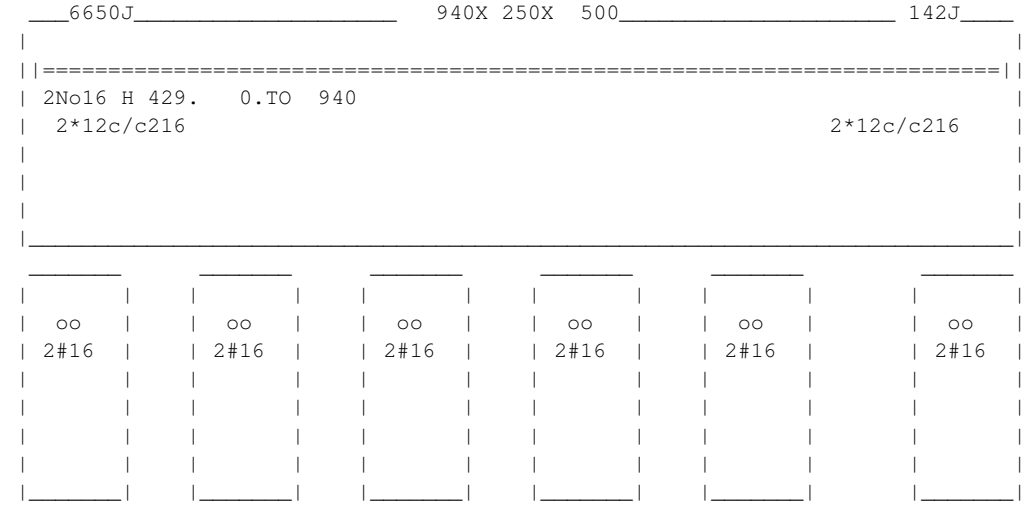

BEAM NO. 149 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	1455.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=   1146.67 KN-MET  AT  1455.MM, LOAD  201|
|   REQD STEEL=  3551.MM2, RHO=0.0097, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   80./  117. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1749. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 149 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 149 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 149 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

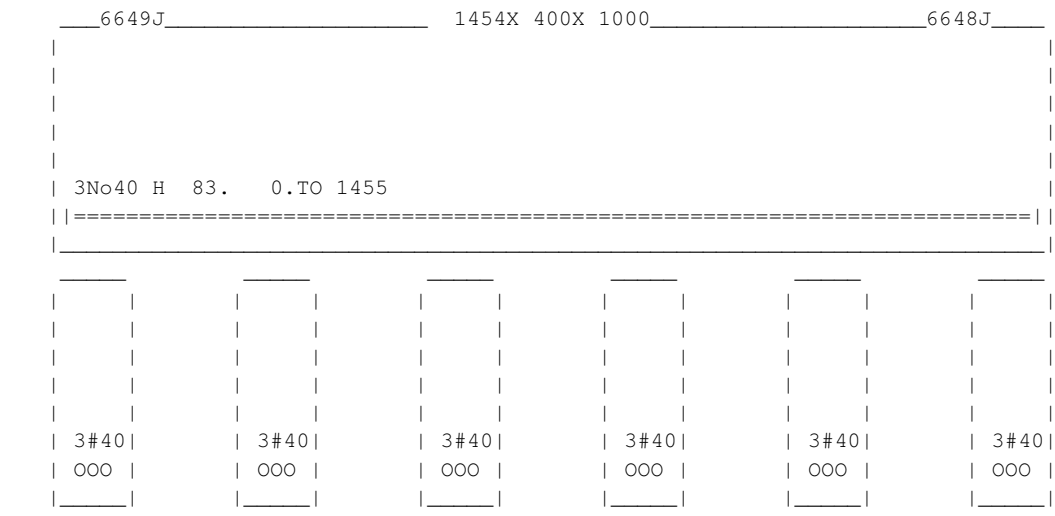

==========

BEAM NO. 150 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	1090.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=   1075.68 KN-MET  AT  1090.MM, LOAD  201|
|   REQD STEEL=  3315.MM2, RHO=0.0090, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   80./  117. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1749. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 150 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 150 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 150 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

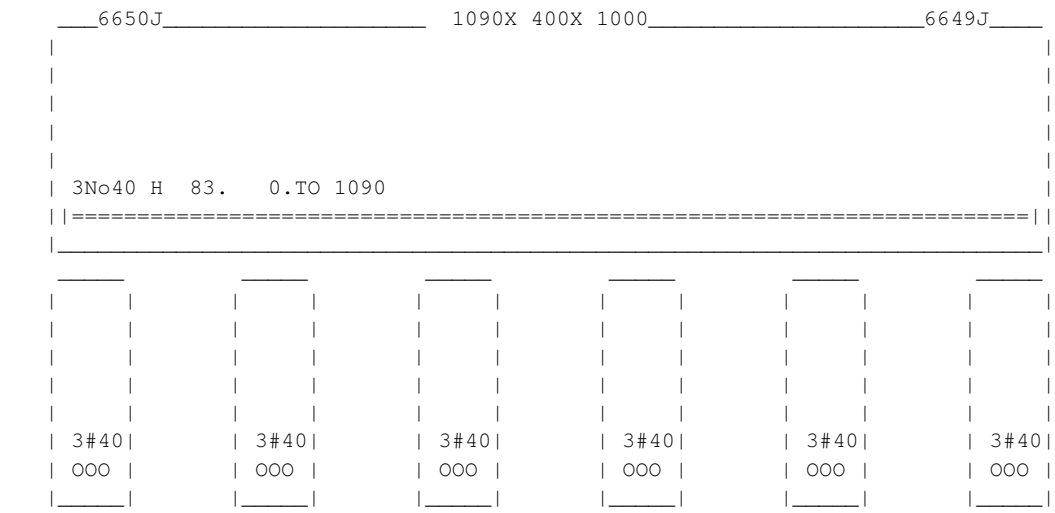

==========

BEAM NO. 151 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1455.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=    899.25 KN-MET  AT  1455.MM, LOAD  201|
|   REQD STEEL=  2725.MM2, RHO=0.0074, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   64./   81. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1624. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 151 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 151 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 151 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

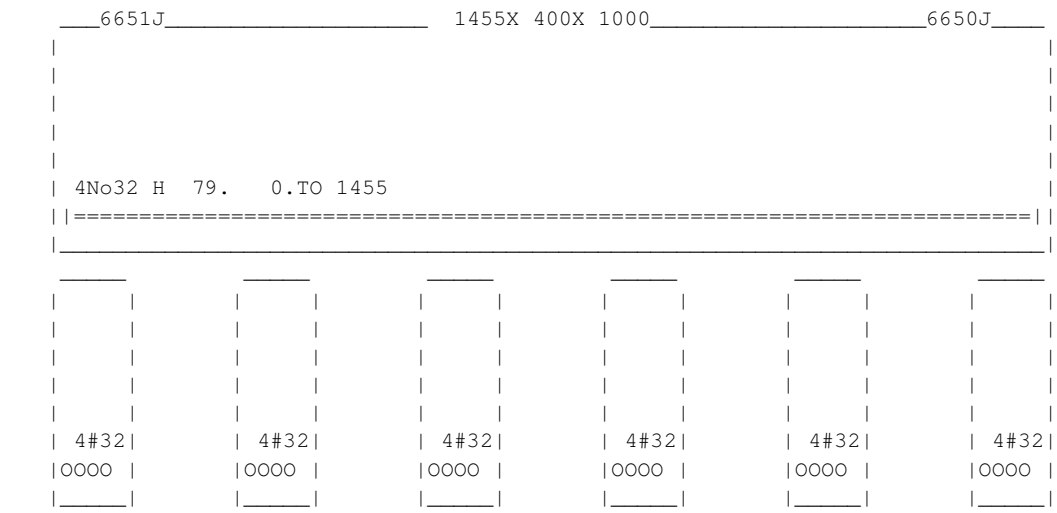

BEAM NO. 152 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	6 - 20MM	0.	1780.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=    539.39 KN-MET  AT     0.MM, LOAD  201|
|   REQD STEEL=  1587.MM2, RHO=0.0043, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   51. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1007. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 815380.7 cm^4

B E A M N O. 152 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 152 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 152 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

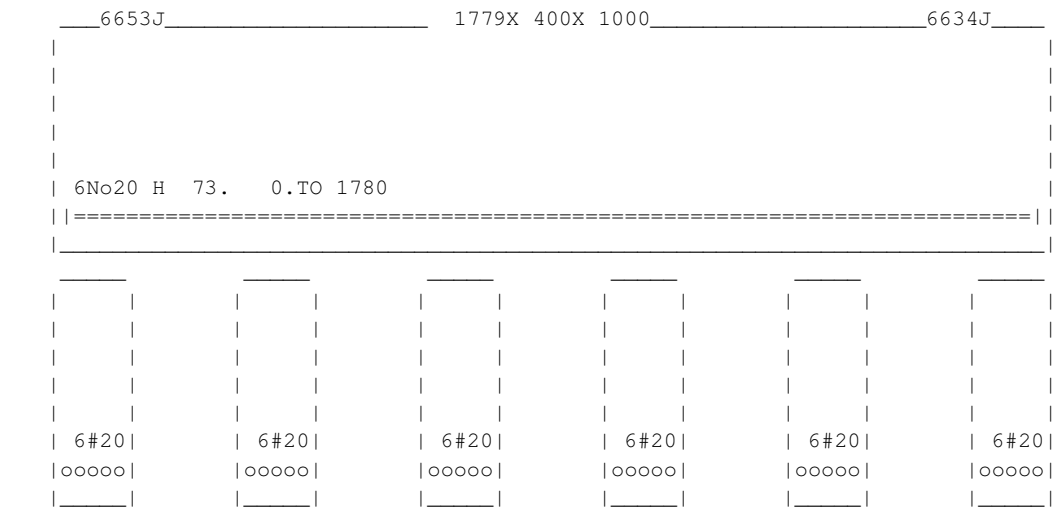

BEAM NO. 153 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	2250.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=    953.77 KN-MET  AT     0.MM, LOAD  201|
|   REQD STEEL=  2901.MM2, RHO=0.0079, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   64./   81. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1624. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 153 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 158.81 KNS Vc= 355.71 KNS Vs= 0.00 KNS
Tu= 34.89 KN-MET Tc= 21.1 KN-MET Ts= 46.5 KN-MET LOAD 222
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 294. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 5.99 SQ.CM.

AT END SUPPORT - Vu= 163.35 KNS Vc= 357.39 KNS Vs= 0.00 KNS
Tu= 34.89 KN-MET Tc= 21.1 KN-MET Ts= 46.5 KN-MET LOAD 222
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 294. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 5.99 SQ.CM.

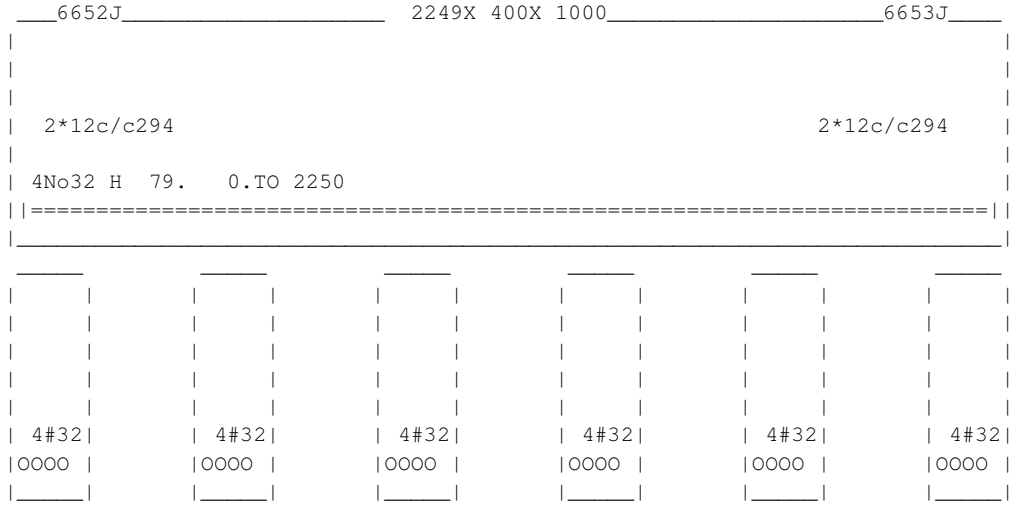

BEAM NO. 154 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	936.	2560.	NO	YES

CRITICAL POS MOMENT=	31.58 KN-MET AT 2560.MM, LOAD 201
REQD STEEL=	261.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH =	328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
2	429.	2 - 16MM	0.	2027.	YES	NO

CRITICAL NEG MOMENT=	59.07 KN-MET AT 0.MM, LOAD 202
REQD STEEL=	377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH =	410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 154 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 40.80 KNS Vc= 103.43 KNS Vs= 0.00 KNS
Tu= 0.37 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 201
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 855. MM

AT END SUPPORT - Vu= 20.36 KNS Vc= 105.80 KNS Vs= 0.00 KNS
Tu= 0.28 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

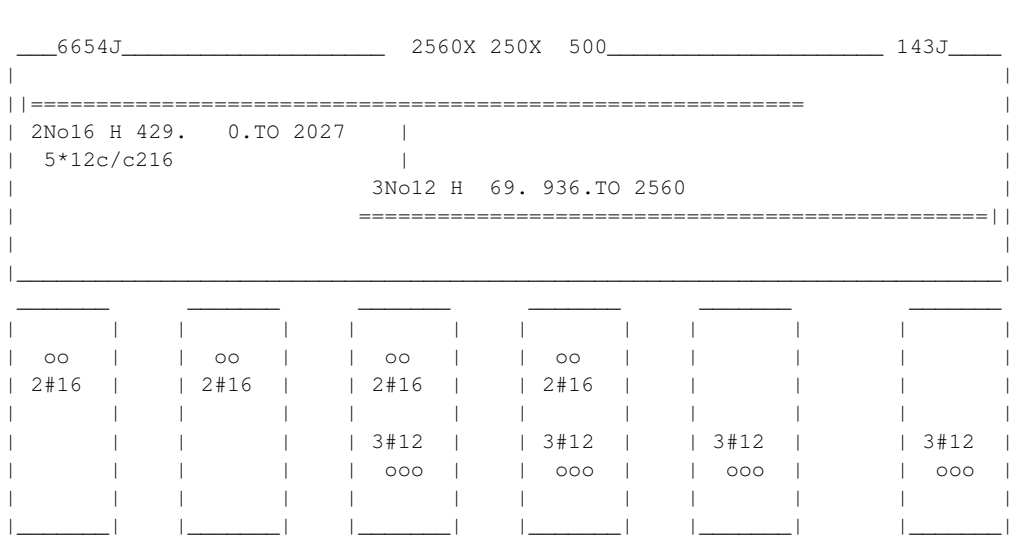

BEAM NO. 155 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2560. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	939.	2560.	NO	YES

CRITICAL POS MOMENT= 31.24 KN-MET AT 2560.MM, LOAD 201
REQD STEEL= 258.MM2, RHO=0.0024, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2	429.	2 - 16MM	0.	2027.	YES	NO

CRITICAL NEG MOMENT= 60.03 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 380.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 155 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 39.67 KNS Vc= 102.85 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 855. MM

AT END SUPPORT - Vu= 20.53 KNS Vc= 103.52 KNS Vs= 0.00 KNS
Tu= 0.68 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

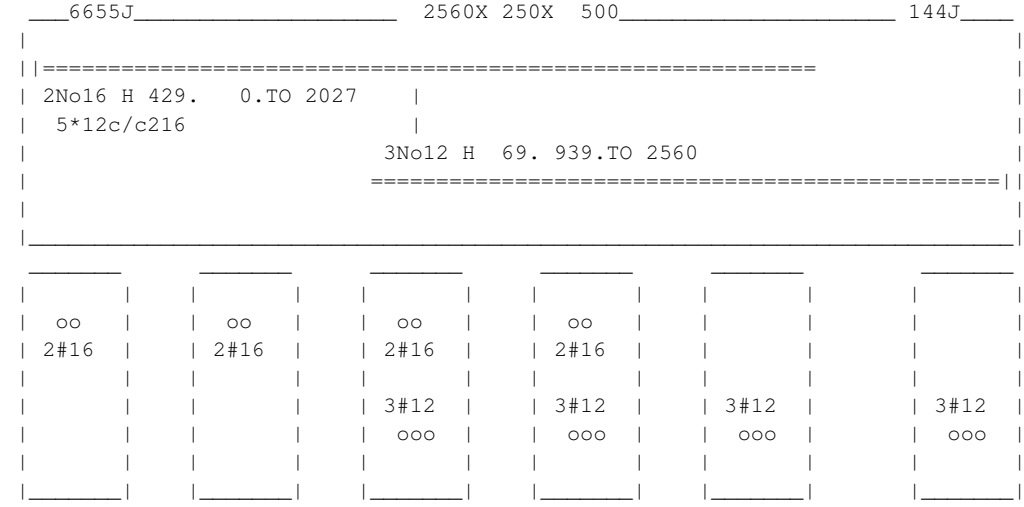

BEAM NO. 156 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 954.61 KN-MET AT 1455.MM, LOAD 201
REQD STEEL= 2904.MM2, RHO=0.0079, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 81. MMS
REQD. DEVELOPMENT LENGTH = 1624. MMS

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 156 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 156 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 156 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

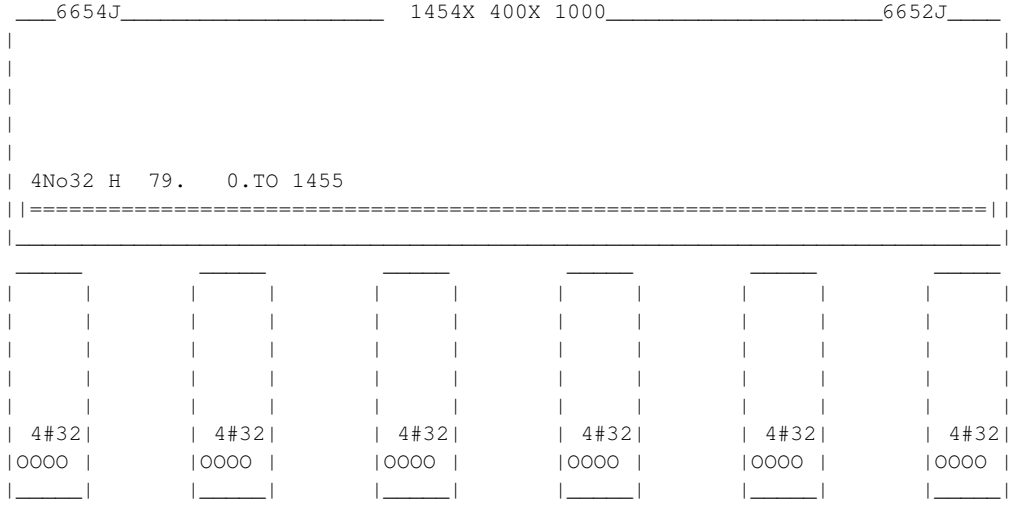

==========

BEAM NO. 157 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 925.58 KN-MET AT 1090.MM, LOAD 201
REQD STEEL= 2810.MM2, RHO=0.0076, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 81. MMS
REQD. DEVELOPMENT LENGTH = 1624. MMS

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 157 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 157 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 157 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

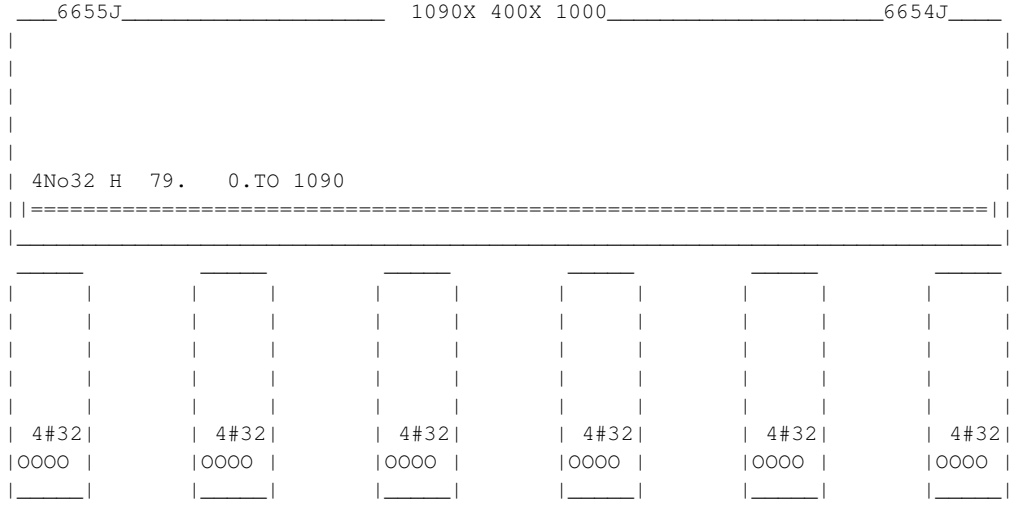

==========

BEAM NO. 158 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT=	779.86 KN-MET AT 1455.MM, LOAD 201
REQD STEEL=	2346.MM2, RHO=0.0064, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH =	1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 158 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 158 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 158 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

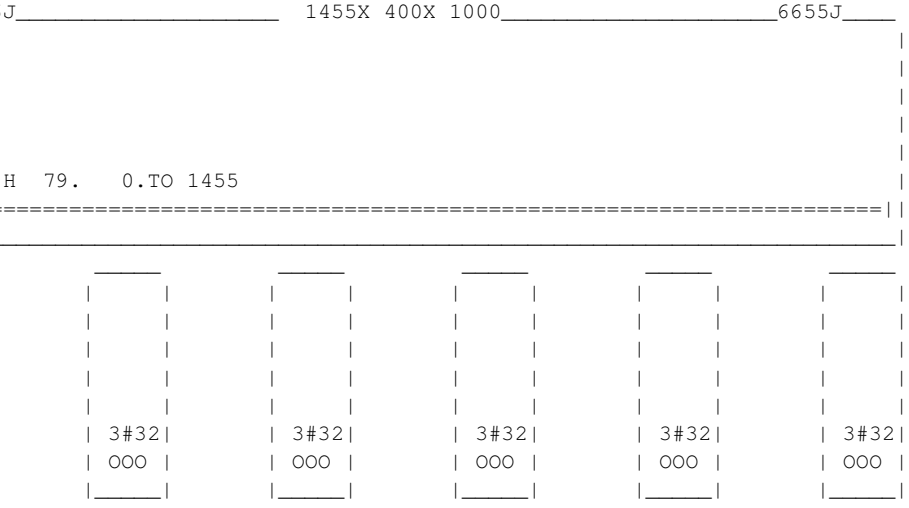

==========

BEAM NO. 159 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	497.	5191.	NO	NO

CRITICAL POS MOMENT= 85.66 KN-MET AT 2708.MM, LOAD 202
REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS
REQD. DEVELOPMENT LENGTH = 605. MMS

Cracked Moment of Inertia Iz at above location = 86583.8 cm^4

```
  2        527.     3 - 20MM         0.         2183.        YES  NO
|-------------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    168.65 KN-MET  AT     0.MM, LOAD  202|
|   REQD STEEL=   889.MM2, RHO=0.0067, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   52. MMS         |
|   REQD. DEVELOPMENT LENGTH =   981. MMS                        |
|-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =   123768.7 cm^4

  3        521.     2 - 32MM      1247.         6500.        NO   YES
|-------------------------------------------------------------------|
|   CRITICAL NEG MOMENT=    189.99 KN-MET  AT  6500.MM, LOAD  202|
|   REQD STEEL=  1021.MM2, RHO=0.0078, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   64./   93. MMS         |
|   REQD. DEVELOPMENT LENGTH =  1418. MMS                        |
|-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =   182422.8 cm^4
```

B E A M N O. 159 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=  146.63 KNS  Vc=  126.86 KNS  Vs=   68.64 KNS
Tu=    2.34 KN-MET  Tc=    4.8 KN-MET  Ts=    0.0 KN-MET  LOAD   223
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM  C/C FOR 2725. MM

AT END   SUPPORT - Vu=  149.64 KNS  Vc=  125.75 KNS  Vs=   73.78 KNS
Tu=    0.44 KN-MET  Tc=    4.7 KN-MET  Ts=    0.0 KN-MET  LOAD   202
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM  C/C FOR 2725. MM
```

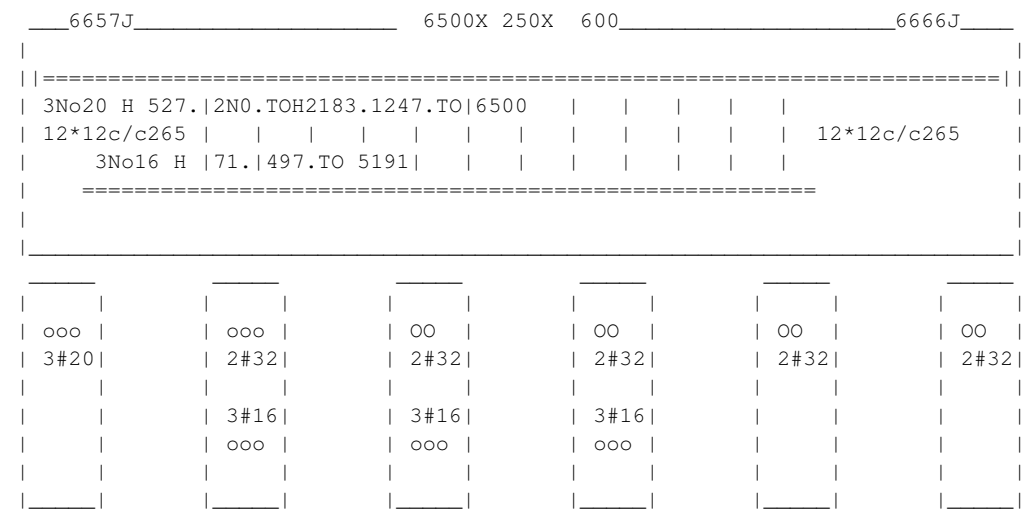

BEAM NO. 160 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	478.	5751.	NO	NO
	CRITICAL POS MOMENT= 95.87 KN-MET AT 3250.MM, LOAD 202					
	REQD STEEL= 492.MM2, RHO=0.0037, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
2	525.	2 - 25MM	0.	2828.	YES	NO
	CRITICAL NEG MOMENT= 180.14 KN-MET AT 0.MM, LOAD 202					
	REQD STEEL= 958.MM2, RHO=0.0073, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS					
	REQD. DEVELOPMENT LENGTH = 805. MMS					
	Cracked Moment of Inertia Iz at above location = 126545.1 cm^4					
3	527.	3 - 20MM	4046.	6500.	NO	YES
	CRITICAL NEG MOMENT= 153.53 KN-MET AT 6500.MM, LOAD 202					
	REQD STEEL= 805.MM2, RHO=0.0061, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					

B E A M N O. 160 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 151.34 KNS Vc= 129.56 KNS Vs= 72.23 KNS
Tu= 0.14 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 223
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 142.27 KNS Vc= 132.10 KNS Vs= 57.59 KNS
Tu= 0.80 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 202
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

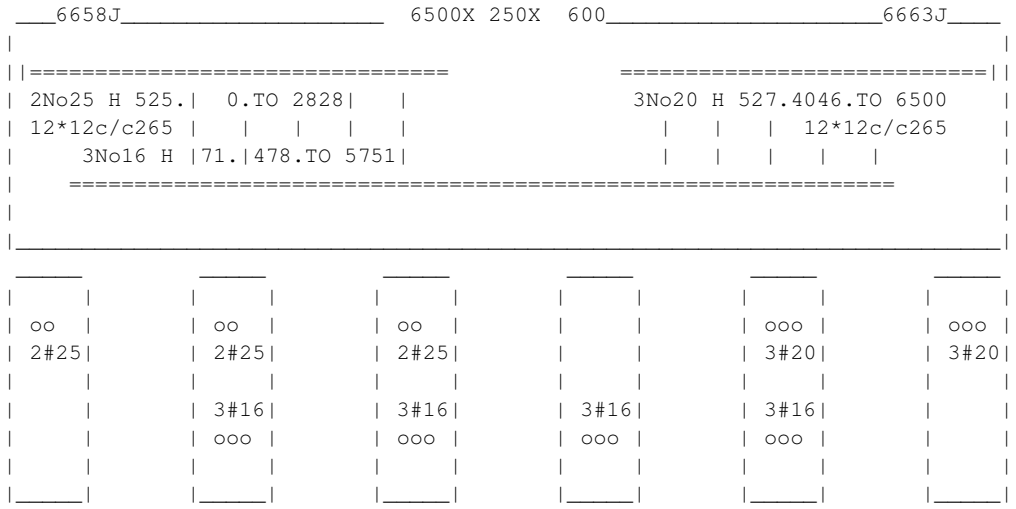

BEAM NO. 161 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 1225.56 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 3840.MM2, RHO=0.0105, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 161 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 145.37 KNS Vc= 357.76 KNS Vs= 0.00 KNS
Tu= 10.61 KN-MET Tc= 21.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 457. MM C/C FOR 200. MM

AT END SUPPORT - Vu= 149.90 KNS Vc= 357.76 KNS Vs= 0.00 KNS
Tu= 10.61 KN-MET Tc= 21.0 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 457. MM C/C FOR 200. MM

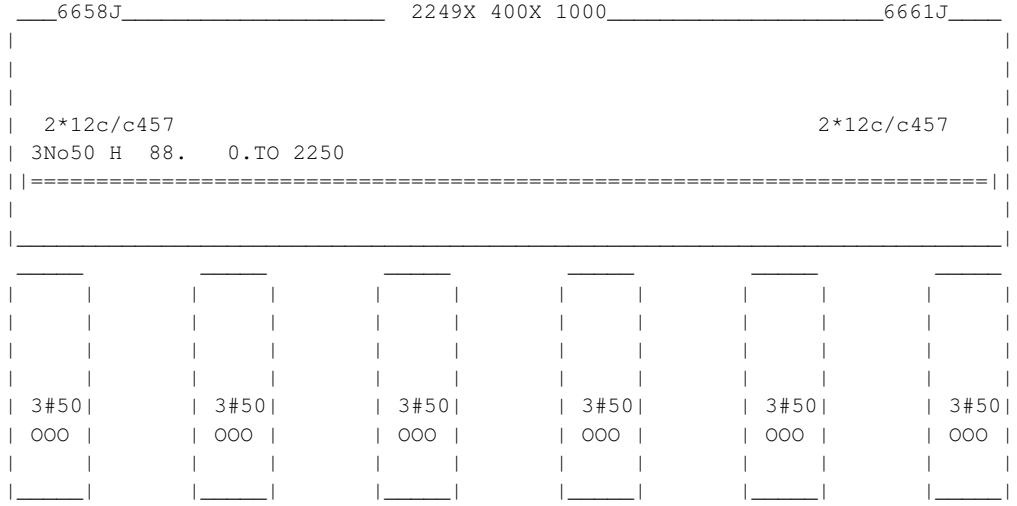

BEAM NO. 162 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 952.00 KN-MET AT 1455.MM, LOAD 202
REQD STEEL= 2895.MM2, RHO=0.0079, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 81. MMS
REQD. DEVELOPMENT LENGTH = 1624. MMS

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 162 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 162 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 162 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

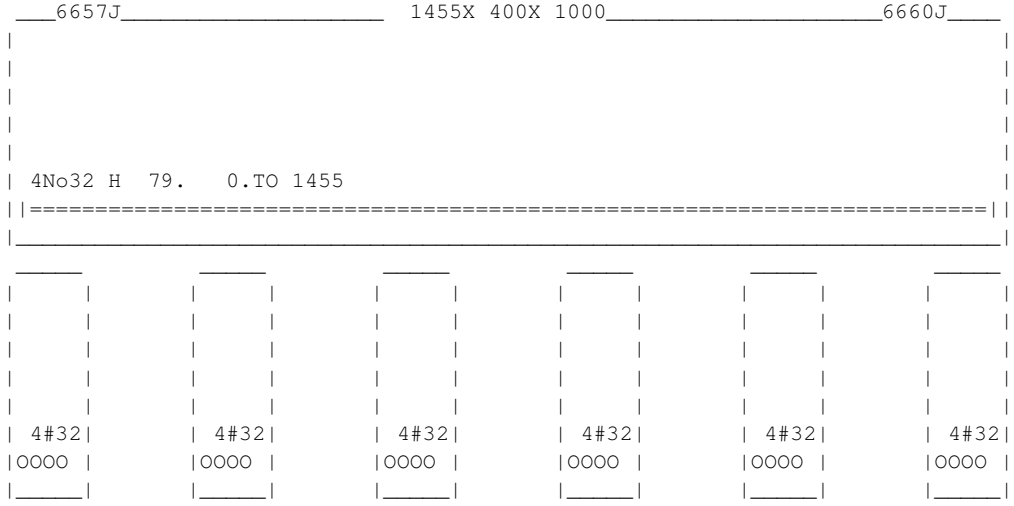

==========

BEAM NO. 163 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	828.	2940.	NO	YES

CRITICAL POS MOMENT= 36.47 KN-MET AT 2940.MM, LOAD 202
REQD STEEL= 302.MM2, RHO=0.0028, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

```
  2        429.     2 - 16MM         0.         2003.        YES  NO
 |-------------------------------------------------------------------|
 |   CRITICAL NEG MOMENT=     57.31 KN-MET  AT     0.MM, LOAD  201|
 |   REQD STEEL=   377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035 |
 |   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  109. MMS         |
 |   REQD. DEVELOPMENT LENGTH =   410. MMS                        |
 |-------------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    39141.0 cm^4
```

B E A M N O. 163 D E S I G N R E S U L T S - SHEAR

```
 AT START SUPPORT - Vu=   39.68 KNS  Vc=  104.90 KNS  Vs=    0.00 KNS
 Tu=    0.65 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
 NO STIRRUPS ARE REQUIRED FOR TORSION.
 REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
 PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM  C/C FOR 1045. MM

 AT END   SUPPORT - Vu=   16.29 KNS  Vc=  104.90 KNS  Vs=    0.00 KNS
 Tu=    0.65 KN-MET  Tc=    3.8 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
```

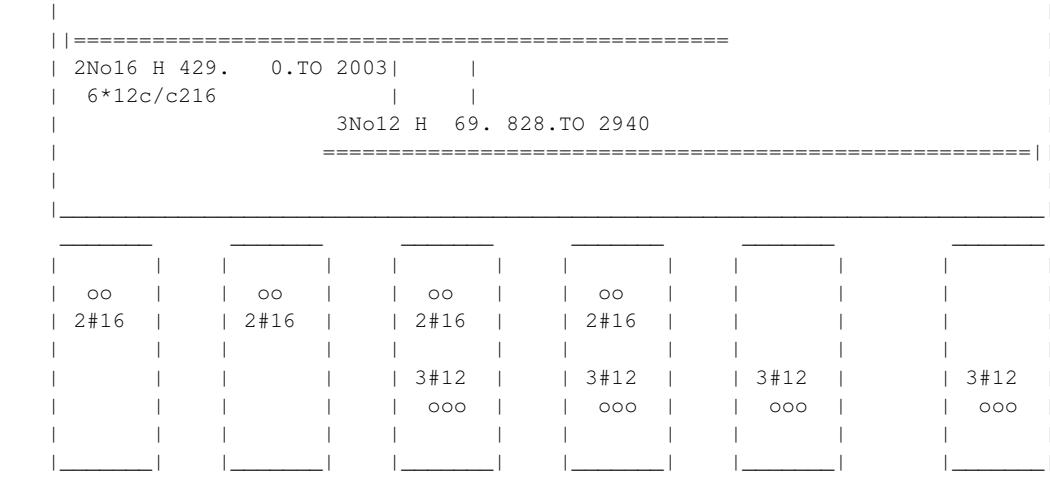

BEAM NO. 164 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2940. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	842.	2940.	NO	YES

CRITICAL POS MOMENT= 34.74 KN-MET AT 2940.MM, LOAD 202
REQD STEEL= 288.MM2, RHO=0.0027, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 34155.8 cm^4

2	429.	2 - 16MM	0.	2003.	YES	NO

CRITICAL NEG MOMENT= 54.04 KN-MET AT 0.MM, LOAD 205
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 164 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 39.00 KNS Vc= 103.80 KNS Vs= 0.00 KNS
Tu= 0.36 KN-MET Tc= 3.9 KN-MET Ts= 0.0 KN-MET LOAD 202
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM C/C FOR 1045. MM

AT END SUPPORT - Vu= 14.90 KNS Vc= 106.07 KNS Vs= 0.00 KNS
Tu= 0.93 KN-MET Tc= 3.8 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

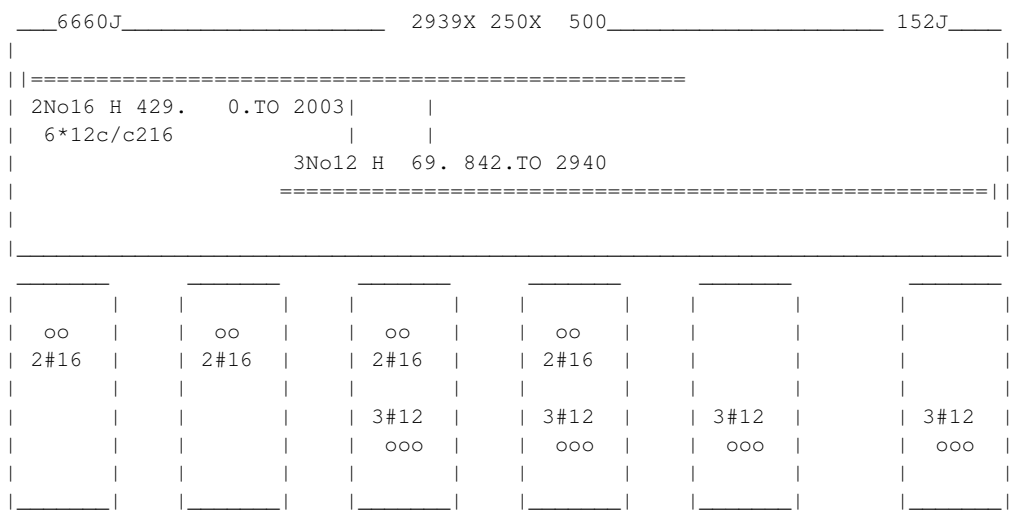

BEAM NO. 165 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 1223.35 KN-MET AT 1455.MM, LOAD 202
REQD STEEL= 3833.MM2, RHO=0.0105, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 165 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 165 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 165 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

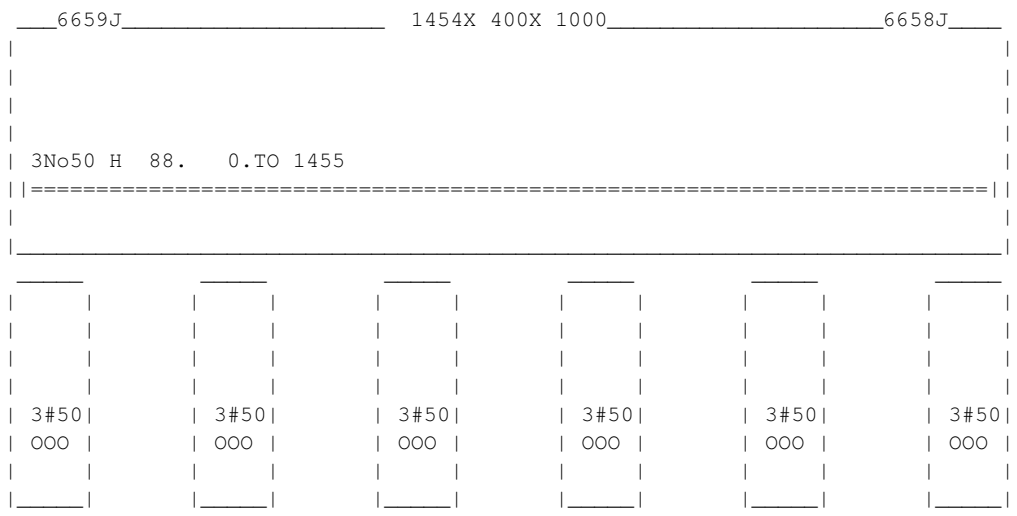

BEAM NO. 166 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 1139.29 KN-MET AT 1090.MM, LOAD 202
REQD STEEL= 3526.MM2, RHO=0.0096, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 117. MMS
REQD. DEVELOPMENT LENGTH = 1749. MMS

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 166 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 166 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 166 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

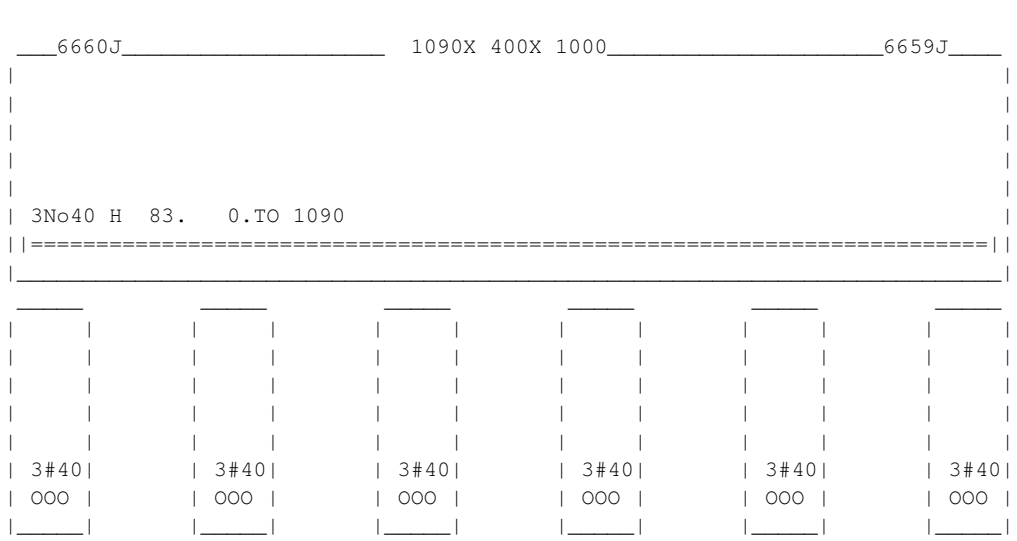

BEAM NO. 167 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 6500. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	2 - 16MM	1008.	6500.	NO	YES
	CRITICAL POS MOMENT= 50.32 KN-MET AT 3792.MM, LOAD 202					
	REQD STEEL= 339.MM2, RHO=0.0026, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS					
	REQD. DEVELOPMENT LENGTH = 410. MMS					
	Cracked Moment of Inertia Iz at above location = 61275.5 cm^4					
2	529.	3 - 16MM	0.	2158.	YES	NO
	CRITICAL NEG MOMENT= 76.87 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 464.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 54. MMS					
	REQD. DEVELOPMENT LENGTH = 605. MMS					
	Cracked Moment of Inertia Iz at above location = 86583.8 cm^4					
3	531.	2 - 12MM	5287.	6500.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     24.49 KN-MET  AT  6500.MM, LOAD  200|
|   REQD STEEL=   163.MM2, RHO=0.0012, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   37./  113. MMS         |
|   REQD. DEVELOPMENT LENGTH =   308. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 37140.7 cm^4

B E A M N O. 167 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 52.51 KNS Vc= 130.02 KNS Vs= 0.00 KNS
Tu= 0.45 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 265. MM C/C FOR 2725. MM

AT END SUPPORT - Vu= 37.42 KNS Vc= 130.02 KNS Vs= 0.00 KNS
Tu= 0.45 KN-MET Tc= 4.9 KN-MET Ts= 0.0 KN-MET LOAD 200
STIRRUPS ARE NOT REQUIRED.

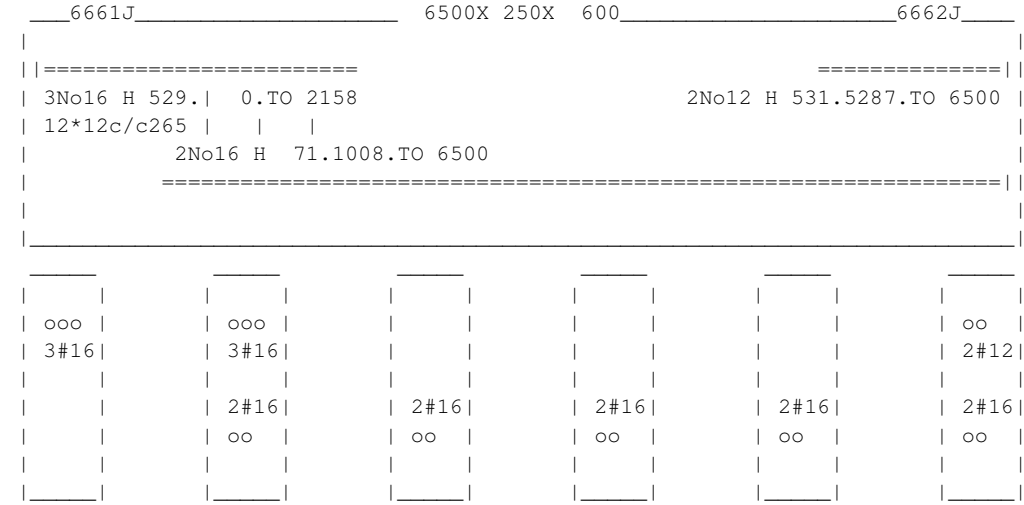

BEAM NO. 168 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1780.	YES	YES

CRITICAL POS MOMENT= 688.41 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 2059.MM2, RHO=0.0056, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 168 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 168 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 168 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

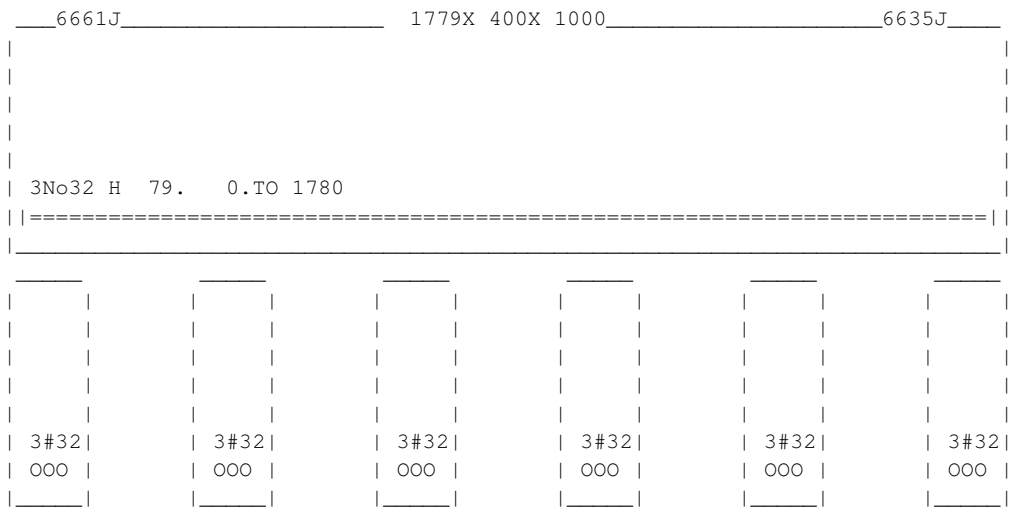

BEAM NO. 169 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1780. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	3 - 32MM	0.	1780.	YES	YES

CRITICAL POS MOMENT= 700.02 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 2095.MM2, RHO=0.0057, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 121. MMS
REQD. DEVELOPMENT LENGTH = 1083. MMS

Cracked Moment of Inertia Iz at above location = 984336.3 cm^4

B E A M N O. 169 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 169 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 169 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

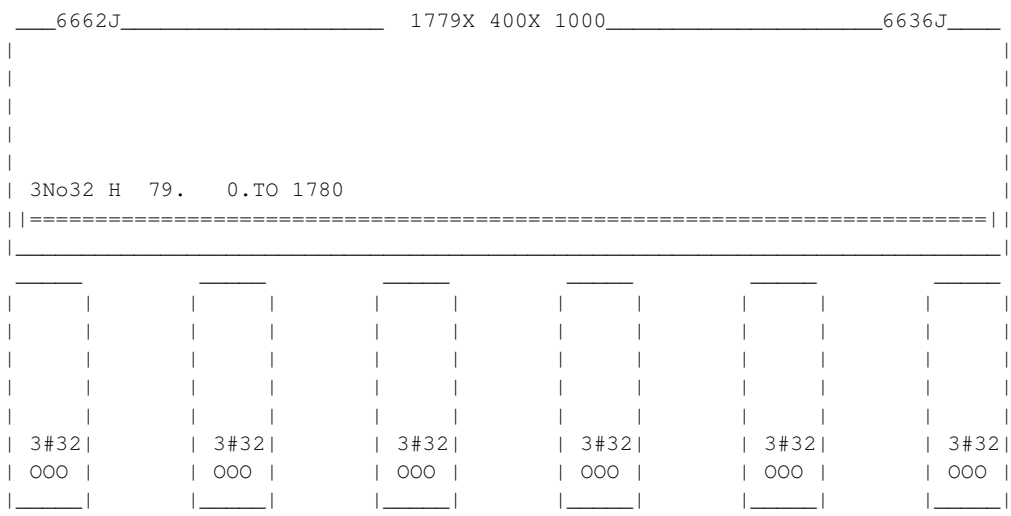

BEAM NO. 170 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2250. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	2250.	YES	YES

CRITICAL POS MOMENT= 1292.03 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 4068.MM2, RHO=0.0111, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 170 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 267.25 KNS Vc= 357.24 KNS Vs= 0.00 KNS
Tu= 53.88 KN-MET Tc= 21.4 KN-MET Ts= 71.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 287. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 9.26 SQ.CM.

AT END SUPPORT - Vu= 271.78 KNS Vc= 359.46 KNS Vs= 2.92 KNS
Tu= 53.88 KN-MET Tc= 21.4 KN-MET Ts= 71.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 285. MM C/C FOR 200. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 9.26 SQ.CM.

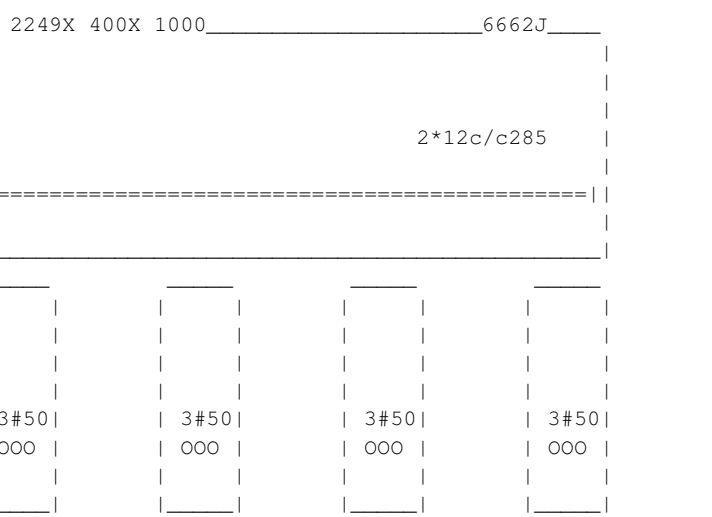

BEAM NO. 171 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	1159.	2440.	NO	YES
	CRITICAL POS MOMENT= 14.53 KN-MET AT 2440.MM, LOAD 203					
	REQD STEEL= 119.MM2, RHO=0.0011, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 308. MMS					
	Cracked Moment of Inertia Iz at above location = 23938.8 cm^4					
2	431.	3 - 12MM	0.	1823.	YES	NO
	CRITICAL NEG MOMENT= 38.15 KN-MET AT 0.MM, LOAD 206					
	REQD STEEL= 316.MM2, RHO=0.0029, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 34155.8 cm^4					

B E A M N O. 171 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 29.63 KNS Vc= 101.90 KNS Vs= 0.00 KNS
Tu= 5.49 KN-MET Tc= 3.9 KN-MET Ts= 7.3 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 795. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.01 SQ.CM.

AT END SUPPORT - Vu= 11.84 KNS Vc= 102.11 KNS Vs= 0.00 KNS
Tu= 5.49 KN-MET Tc= 3.9 KN-MET Ts= 7.3 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 795. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.01 SQ.CM.

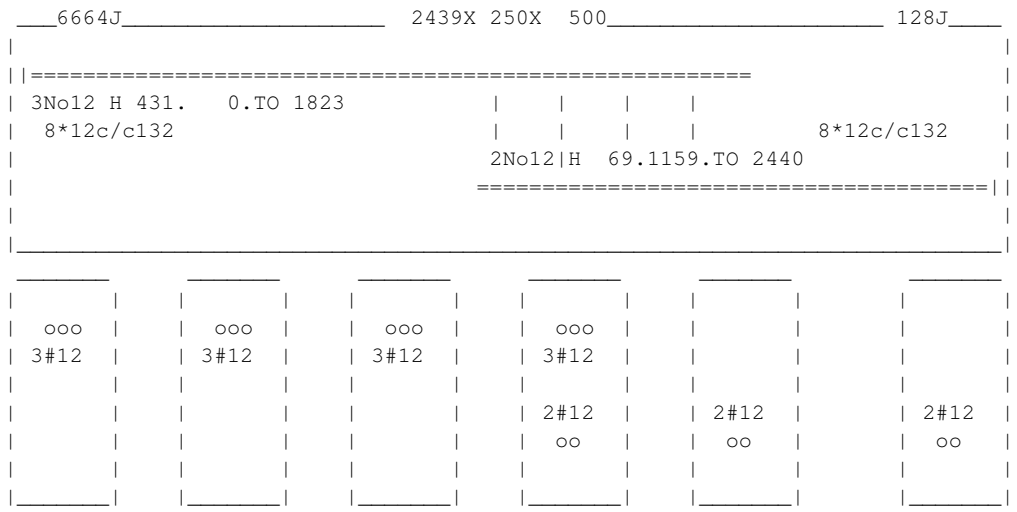

BEAM NO. 172 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 2440. MM FY - 420. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	1390.	2440.	NO	YES

CRITICAL POS MOMENT= 12.10 KN-MET AT 2440.MM, LOAD 203
REQD STEEL= 99.MM2, RHO=0.0009, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 23938.8 cm^4

2	429.	2 - 16MM	0.	2363.	YES	NO

CRITICAL NEG MOMENT= 48.11 KN-MET AT 0.MM, LOAD 206
REQD STEEL= 377.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 109. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 39141.0 cm^4

B E A M N O. 172 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 32.47 KNS Vc= 104.14 KNS Vs= 0.00 KNS
Tu= 5.53 KN-MET Tc= 3.8 KN-MET Ts= 7.4 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 795. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.03 SQ.CM.

AT END SUPPORT - Vu= 14.68 KNS Vc= 104.14 KNS Vs= 0.00 KNS
Tu= 5.53 KN-MET Tc= 3.8 KN-MET Ts= 7.4 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 132. MM C/C FOR 795. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.03 SQ.CM.

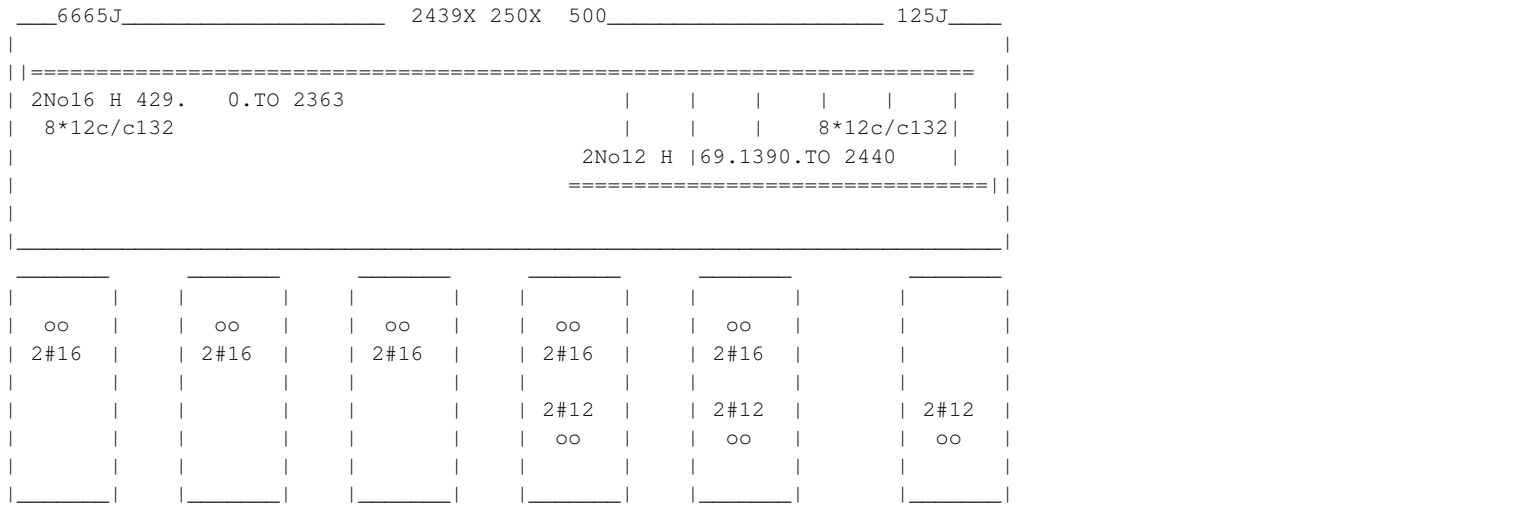

BEAM NO. 173 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	88.	3 - 50MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 1289.08 KN-MET AT 1455.MM, LOAD 203
REQD STEEL= 4058.MM2, RHO=0.0111, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 100./ 112. MMS
REQD. DEVELOPMENT LENGTH = 2855. MMS

Cracked Moment of Inertia Iz at above location = 1901463.4 cm^4

B E A M N O. 173 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 173 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 173 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

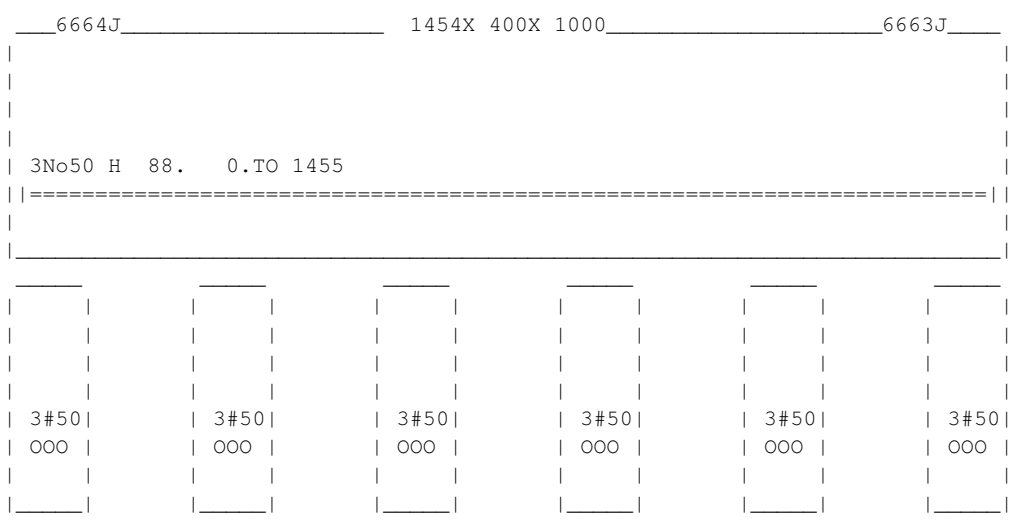

BEAM NO. 174 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	3 - 40MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 1167.42 KN-MET AT 1090.MM, LOAD 203
REQD STEEL= 3620.MM2, RHO=0.0099, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 117. MMS
REQD. DEVELOPMENT LENGTH = 1749. MMS

Cracked Moment of Inertia Iz at above location = 1384709.6 cm^4

B E A M N O. 174 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 174 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 174 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

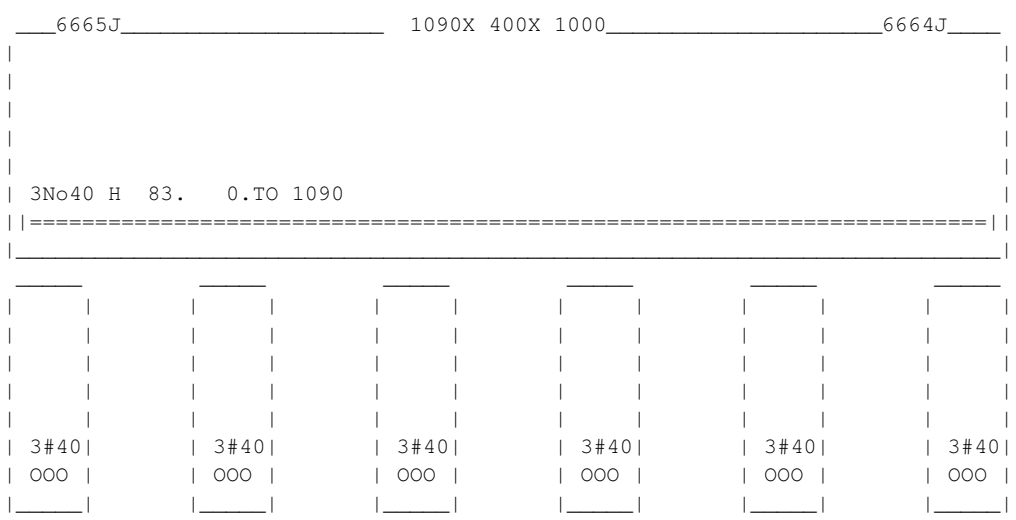

BEAM NO. 175 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1455. MM FY - 420. FC - 35. MPA, SIZE - 400. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	4 - 32MM	0.	1455.	YES	YES

CRITICAL POS MOMENT= 968.20 KN-MET AT 1455.MM, LOAD 203
REQD STEEL= 2948.MM2, RHO=0.0080, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 81. MMS
REQD. DEVELOPMENT LENGTH = 1624. MMS

Cracked Moment of Inertia Iz at above location = 1237195.2 cm^4

B E A M N O. 175 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 175 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 175 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

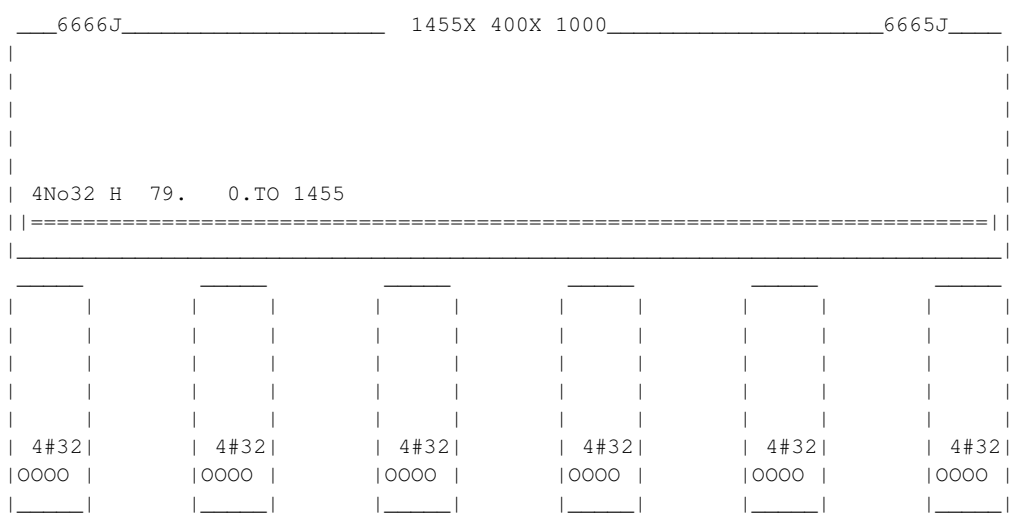

BEAM NO. 176 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 790. MM FY - 420. FC - 35. MPA, SIZE - 250. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	678.	790.	NO	YES

CRITICAL POS MOMENT= 2.57 KN-MET AT 790.MM, LOAD 207
REQD STEEL= 10.MM2, RHO=0.0000, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 119923.2 cm^4

2	931.	2 - 12MM	0.	790.	YES	YES

CRITICAL NEG MOMENT= 37.77 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 143.MM2, RHO=0.0006, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 119923.2 cm^4

B E A M N O. 176 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 176 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 176 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

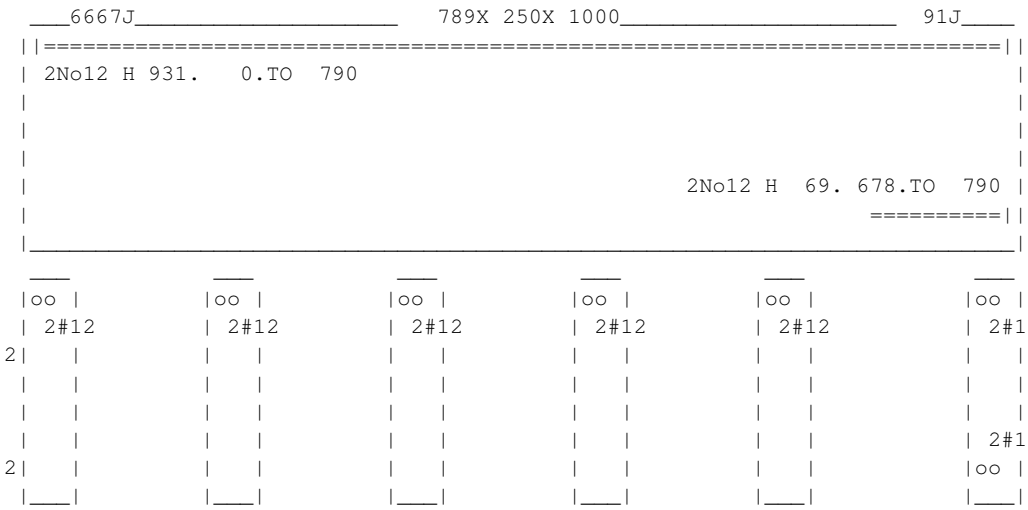

BEAM NO. 177 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 5650. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	73.	5 - 20MM	1788.	5650.	NO	YES
	CRITICAL POS MOMENT= 504.73 KN-MET AT 5650.MM, LOAD 200					
	REQD STEEL= 1489.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS					
	REQD. DEVELOPMENT LENGTH = 1003. MMS					
	Cracked Moment of Inertia Iz at above location = 685092.2 cm^4					
2	927.	5 - 20MM	0.	3454.	YES	NO
	CRITICAL NEG MOMENT= 503.65 KN-MET AT 0.MM, LOAD 200					
	REQD STEEL= 1485.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 51. MMS					
	REQD. DEVELOPMENT LENGTH = 1003. MMS					
	Cracked Moment of Inertia Iz at above location = 685092.2 cm^4					

B E A M N O. 177 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 197.28 KNS Vc= 318.05 KNS Vs= 0.00 KNS
Tu= 15.04 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 464. MM C/C FOR 1900. MM

AT END SUPPORT - Vu= 161.89 KNS Vc= 315.07 KNS Vs= 0.00 KNS
Tu= 15.04 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 464. MM C/C FOR 1675. MM

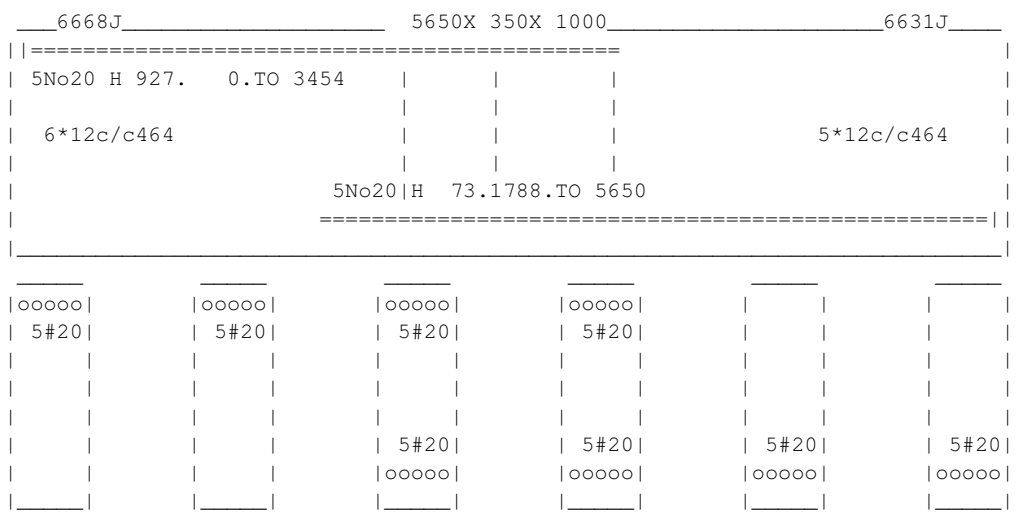

BEAM NO. 178 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	6 - 16MM	1709.	4100.	NO	YES
	CRITICAL POS MOMENT= 386.93 KN-MET AT 4100.MM, LOAD 201					
	REQD STEEL= 1141.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 42. MMS					
	REQD. DEVELOPMENT LENGTH = 787. MMS					
	Cracked Moment of Inertia Iz at above location = 551051.2 cm^4					
2	921.	2 - 32MM	0.	3458.	YES	NO
	CRITICAL NEG MOMENT= 533.02 KN-MET AT 0.MM, LOAD 201					
	REQD STEEL= 1586.MM2, RHO=0.0049, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 193. MMS					
	REQD. DEVELOPMENT LENGTH = 834. MMS					
	Cracked Moment of Inertia Iz at above location = 689182.5 cm^4					

B E A M N O. 178 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 205.47 KNS Vc= 317.54 KNS Vs= 0.00 KNS
Tu= 0.96 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 1125. MM

AT END SUPPORT - Vu= 185.43 KNS Vc= 331.98 KNS Vs= 0.00 KNS
Tu= 0.96 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 900. MM

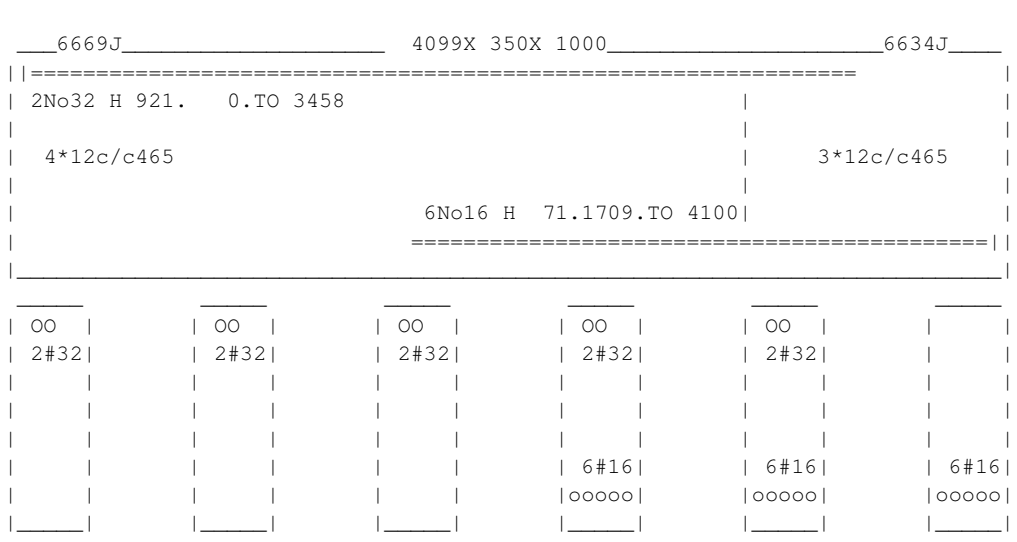

BEAM NO. 179 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 5650. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	6 - 16MM	2077.	5650.	NO	YES

CRITICAL POS MOMENT= 371.57 KN-MET AT 5650.MM, LOAD 202
REQD STEEL= 1141.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 42. MMS
REQD. DEVELOPMENT LENGTH = 787. MMS

Cracked Moment of Inertia Iz at above location = 551051.2 cm^4

2	925.	3 - 25MM	0.	4028.	YES NO

CRITICAL NEG MOMENT= 489.99 KN-MET AT 0.MM, LOAD 202
REQD STEEL= 1448.MM2, RHO=0.0045, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 50./ 100. MMS
REQD. DEVELOPMENT LENGTH = 803. MMS

Cracked Moment of Inertia Iz at above location = 645381.8 cm^4

B E A M N O. 179 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 146.54 KNS Vc= 313.84 KNS Vs= 0.00 KNS
Tu= 0.96 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 1900. MM

AT END SUPPORT - Vu= 120.38 KNS Vc= 314.13 KNS Vs= 0.00 KNS
Tu= 1.56 KN-MET Tc= 16.8 KN-MET Ts= 0.0 KN-MET LOAD 201
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 465. MM C/C FOR 1675. MM

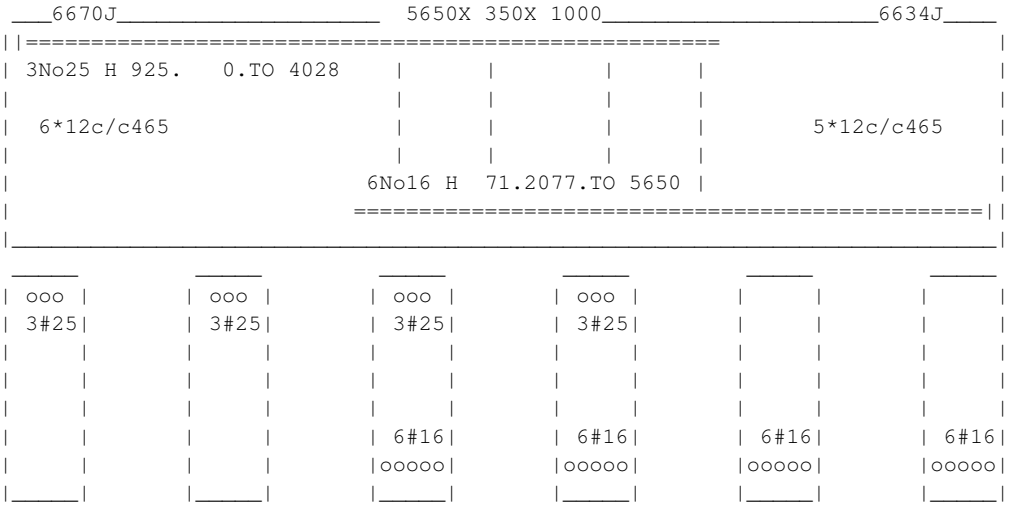

BEAM NO. 180 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4100. MM FY - 420. FC - 35. MPA, SIZE - 350. X 1000. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	929.	6 - 16MM	0.	4100.	YES	YES

CRITICAL NEG MOMENT= 382.65 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 1141.MM2, RHO=0.0035, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 42. MMS
REQD. DEVELOPMENT LENGTH = 787. MMS

Cracked Moment of Inertia Iz at above location = 551051.2 cm^4

B E A M N O. 180 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 93.49 KNS Vc= 320.34 KNS Vs= 0.00 KNS
Tu= 33.56 KN-MET Tc= 16.7 KN-MET Ts= 44.7 KN-MET LOAD 223
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 282. MM C/C FOR 1125. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 6.68 SQ.CM.

AT END SUPPORT - Vu= 73.44 KNS Vc= 320.34 KNS Vs= 0.00 KNS
Tu= 33.56 KN-MET Tc= 16.7 KN-MET Ts= 44.7 KN-MET LOAD 223
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 282. MM C/C FOR 900. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 6.68 SQ.CM.

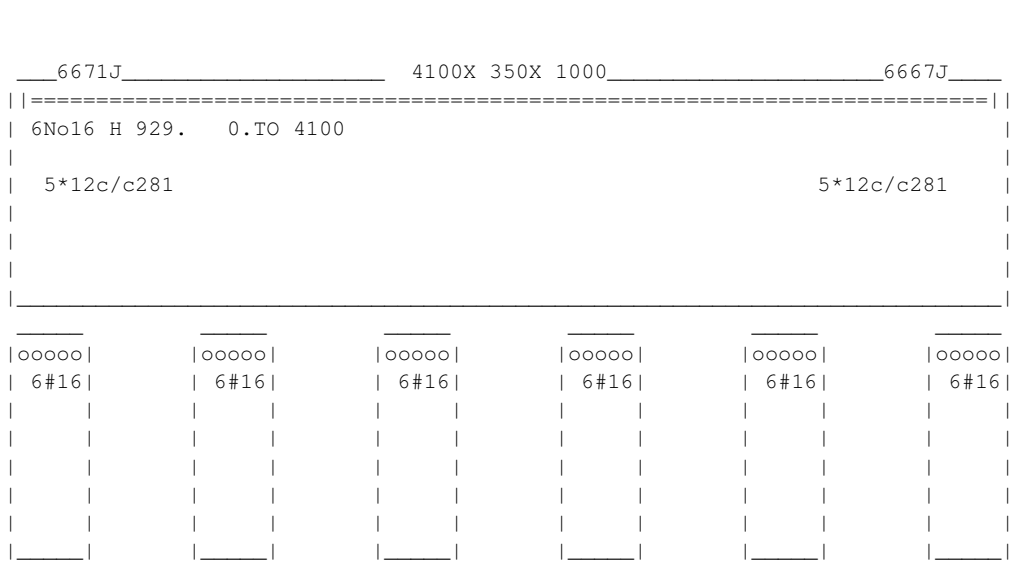

BEAM NO. 188 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 4030. MM FY - 414. FC - 35. MPA, SIZE - 250. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	3276.	YES	NO
	CRITICAL POS MOMENT= 33.80 KN-MET AT 1679.MM, LOAD 210					
	REQD STEEL= 284.MM2, RHO=0.0026, RHOMX=0.0254 RHOMN=0.0036					
	MAX/MIN/ACTUAL BAR SPACING= 224./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 323. MMS					
	Cracked Moment of Inertia Iz at above location = 34155.8 cm^4					
2	431.	2 - 12MM	0.	394.	YES	NO
	CRITICAL NEG MOMENT= 13.07 KN-MET AT 0.MM, LOAD 223					
	REQD STEEL= 109.MM2, RHO=0.0010, RHOMX=0.0254 RHOMN=0.0036					
	MAX/MIN/ACTUAL BAR SPACING= 224./ 37./ 113. MMS					
	REQD. DEVELOPMENT LENGTH = 305. MMS					
	Cracked Moment of Inertia Iz at above location = 23938.8 cm^4					
3	429.	3 - 16MM	2329.	4030.	NO	YES

```
|-------------------------------------------------------------|
|   CRITICAL NEG MOMENT=     70.70 KN-MET  AT  4030.MM, LOAD  205|
|   REQD STEEL=   456.MM2, RHO=0.0042, RHOMX=0.0254 RHOMN=0.0036 |
|   MAX/MIN/ACTUAL BAR SPACING=   224./   41./   54. MMS         |
|   REQD. DEVELOPMENT LENGTH =   596. MMS                       |
|-------------------------------------------------------------|

  Cracked Moment of Inertia Iz at above location =    54963.9 cm^4
```

B E A M N O. 188 D E S I G N R E S U L T S - SHEAR

```
AT START SUPPORT - Vu=   41.33 KNS  Vc=  115.94 KNS  Vs=    0.00 KNS
Tu=    0.88 KN-MET  Tc=    3.9 KN-MET  Ts=    0.0 KN-MET  LOAD   200
                  STIRRUPS ARE NOT REQUIRED.
AT END   SUPPORT - Vu=   59.55 KNS  Vc=  108.61 KNS  Vs=    0.00 KNS
Tu=    0.88 KN-MET  Tc=    3.9 KN-MET  Ts=    0.0 KN-MET  LOAD   200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 216. MM  C/C FOR 1365. MM
```

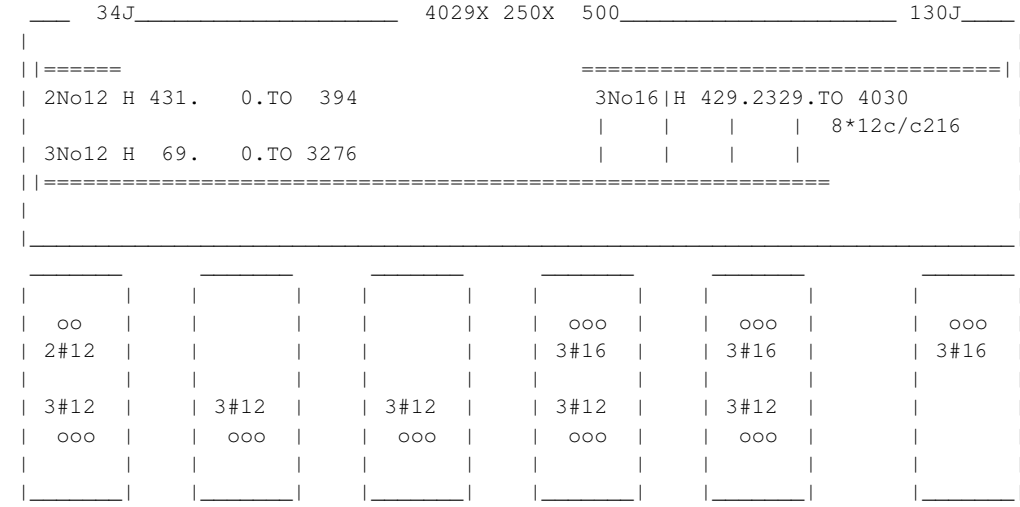

BEAM NO. 189 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1800. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	2 - 32MM	0.	1800.	YES	YES

CRITICAL POS MOMENT= 222.19 KN-MET AT 1800.MM, LOAD 203
REQD STEEL= 1207.MM2, RHO=0.0093, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 93. MMS
REQD. DEVELOPMENT LENGTH = 1418. MMS

Cracked Moment of Inertia Iz at above location = 182422.8 cm^4

B E A M N O. 189 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 35.33 KNS Vc= 127.29 KNS Vs= 0.00 KNS
Tu= 13.12 KN-MET Tc= 4.8 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 375. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

AT END SUPPORT - Vu= 20.51 KNS Vc= 127.29 KNS Vs= 0.00 KNS
Tu= 13.12 KN-MET Tc= 4.8 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 375. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

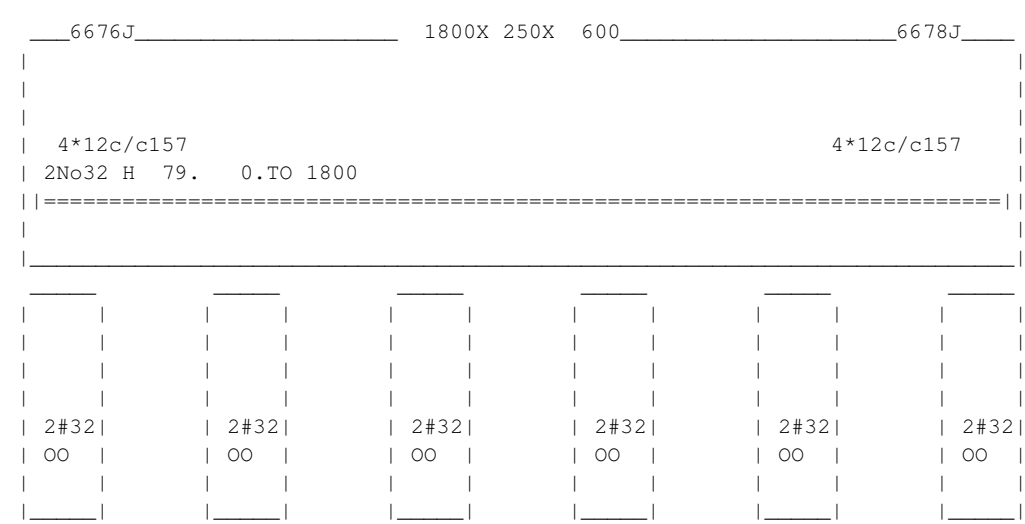

BEAM NO. 190 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1800. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	2 - 40MM	0.	1800.	YES	YES

CRITICAL POS MOMENT= 330.43 KN-MET AT 1500.MM, LOAD 203
REQD STEEL= 1884.MM2, RHO=0.0146, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 85. MMS
REQD. DEVELOPMENT LENGTH = 2425. MMS

Cracked Moment of Inertia Iz at above location = 246684.9 cm^4

B E A M N O. 190 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 52.97 KNS Vc= 125.33 KNS Vs= 0.00 KNS
Tu= 2.49 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 259. MM C/C FOR 375. MM

AT END SUPPORT - Vu= 82.41 KNS Vc= 124.14 KNS Vs= 0.00 KNS
Tu= 3.15 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 203
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 259. MM C/C FOR 375. MM

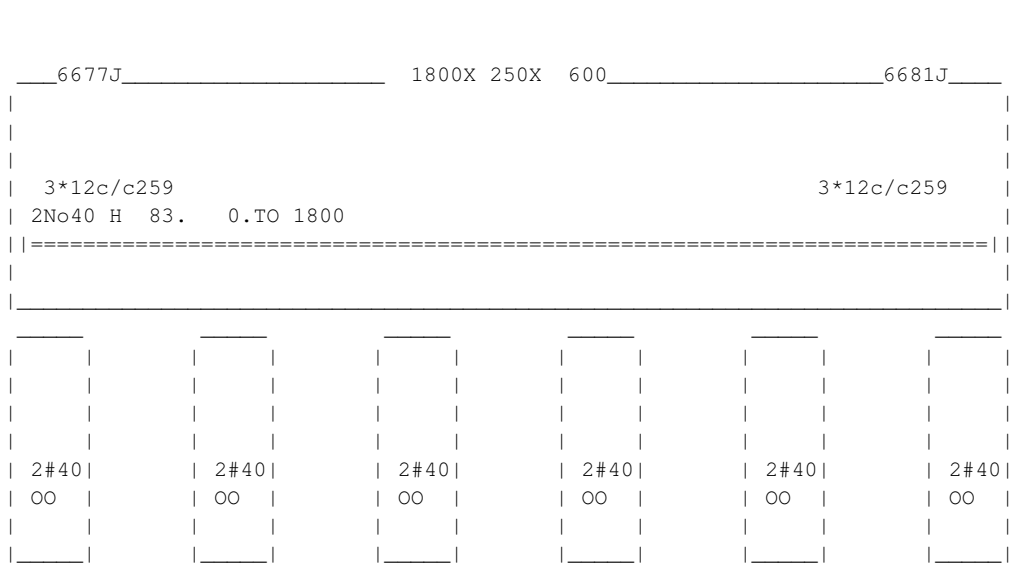

BEAM NO. 191 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1275. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	5 - 12MM	0.	1275.	YES	YES

CRITICAL POS MOMENT= 85.32 KN-MET AT 1275.MM, LOAD 221
REQD STEEL= 537.MM2, RHO=0.0036, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 53. MMS
REQD. DEVELOPMENT LENGTH = 347. MMS

Cracked Moment of Inertia Iz at above location = 55538.4 cm^4

B E A M N O. 191 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 66.22 KNS Vc= 152.62 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.9 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

AT END SUPPORT - Vu= 64.11 KNS Vc= 146.15 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.9 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

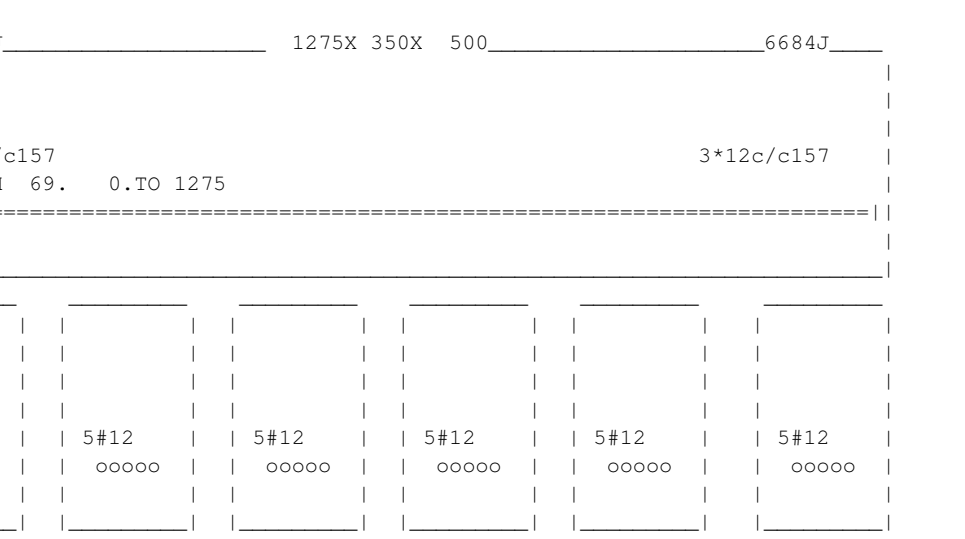

BEAM NO. 194 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3550. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	79.	2 - 32MM	0.	3550.	YES	YES
	CRITICAL POS MOMENT= 236.73 KN-MET AT 0.MM, LOAD 203					
	REQD STEEL= 1292.MM2, RHO=0.0099, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 93. MMS					
	REQD. DEVELOPMENT LENGTH = 1418. MMS					
	Cracked Moment of Inertia Iz at above location = 182422.8 cm^4					
2	521.	2 - 32MM	0.	3550.	YES	YES
	CRITICAL NEG MOMENT= 198.05 KN-MET AT 3550.MM, LOAD 202					
	REQD STEEL= 1067.MM2, RHO=0.0082, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 64./ 93. MMS					
	REQD. DEVELOPMENT LENGTH = 1418. MMS					

Cracked Moment of Inertia Iz at above location = 182422.8 cm^4

B E A M N O. 194 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 91.98 KNS Vc= 126.90 KNS Vs= 0.00 KNS
Tu= 13.12 KN-MET Tc= 4.8 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1250. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

AT END SUPPORT - Vu= 141.34 KNS Vc= 126.90 KNS Vs= 61.54 KNS
Tu= 13.12 KN-MET Tc= 4.8 KN-MET Ts= 17.5 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR SHEAR AND TORSION.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 1250. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.56 SQ.CM.

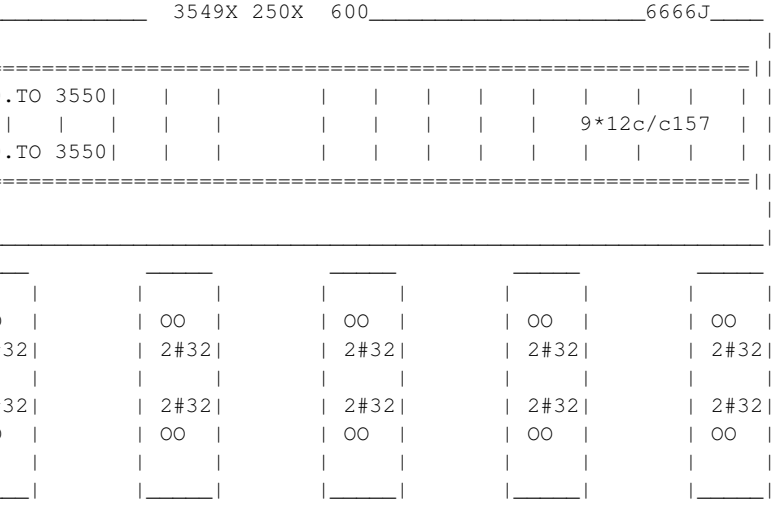

BEAM NO. 196 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1275. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	4 - 16MM	0.	1275.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=    113.01 KN-MET  AT  1275.MM, LOAD  203|
|   REQD STEEL=   721.MM2, RHO=0.0048, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./   70. MMS         |
|   REQD. DEVELOPMENT LENGTH =   472. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 73919.6 cm^4

B E A M N O. 196 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 85.32 KNS Vc= 140.87 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.4 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

AT END SUPPORT - Vu= 83.22 KNS Vc= 140.87 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.4 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

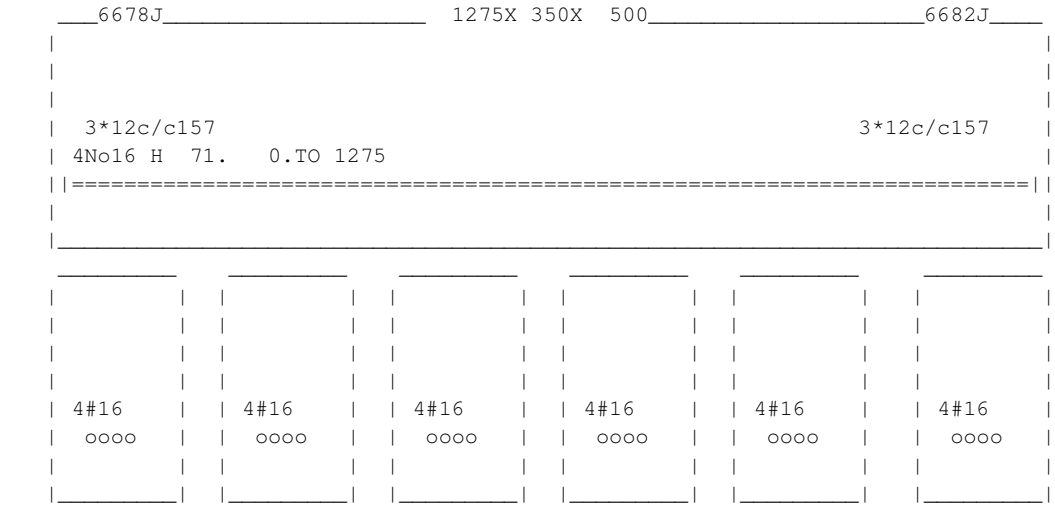

==

BEAM NO. 198 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1090. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	4 - 16MM	0.	1090.	YES	YES

CRITICAL POS MOMENT= 114.84 KN-MET AT 1090.MM, LOAD 203
REQD STEEL= 733.MM2, RHO=0.0049, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 70. MMS
REQD. DEVELOPMENT LENGTH = 472. MMS

Cracked Moment of Inertia Iz at above location = 73919.6 cm^4

B E A M N O. 198 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 1.37 KNS Vc= 147.48 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.6 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 120. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

AT END SUPPORT - Vu= 0.18 KNS Vc= 147.48 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.6 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 120. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

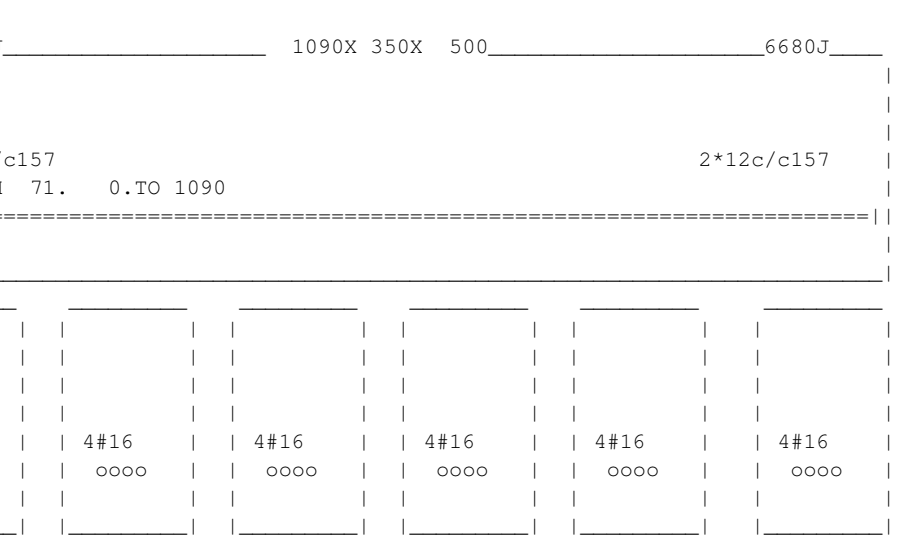

BEAM NO. 199 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 3550. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	83.	2 - 40MM	0.	3550.	YES	YES
	CRITICAL POS MOMENT= 312.50 KN-MET AT 0.MM, LOAD 203					
	REQD STEEL= 1770.MM2, RHO=0.0137, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 80./ 85. MMS					
	REQD. DEVELOPMENT LENGTH = 2425. MMS					
	Cracked Moment of Inertia Iz at above location = 246684.9 cm^4					
2	527.	3 - 20MM	1119.	3550.	NO	YES
	CRITICAL NEG MOMENT= 175.64 KN-MET AT 3550.MM, LOAD 203					
	REQD STEEL= 928.MM2, RHO=0.0070, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 45./ 52. MMS					
	REQD. DEVELOPMENT LENGTH = 981. MMS					
	Cracked Moment of Inertia Iz at above location = 123768.7 cm^4					

B E A M N O. 199 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 72.28 KNS Vc= 124.77 KNS Vs= 0.00 KNS
Tu= 2.49 KN-MET Tc= 4.8 KN-MET Ts= 0.0 KN-MET LOAD 200
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 259. MM C/C FOR 1250. MM

AT END SUPPORT - Vu= 162.18 KNS Vc= 122.81 KNS Vs= 93.43 KNS
Tu= 3.15 KN-MET Tc= 4.7 KN-MET Ts= 0.0 KN-MET LOAD 203
NO STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT IS REQUIRED FOR SHEAR.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 259. MM C/C FOR 1250. MM

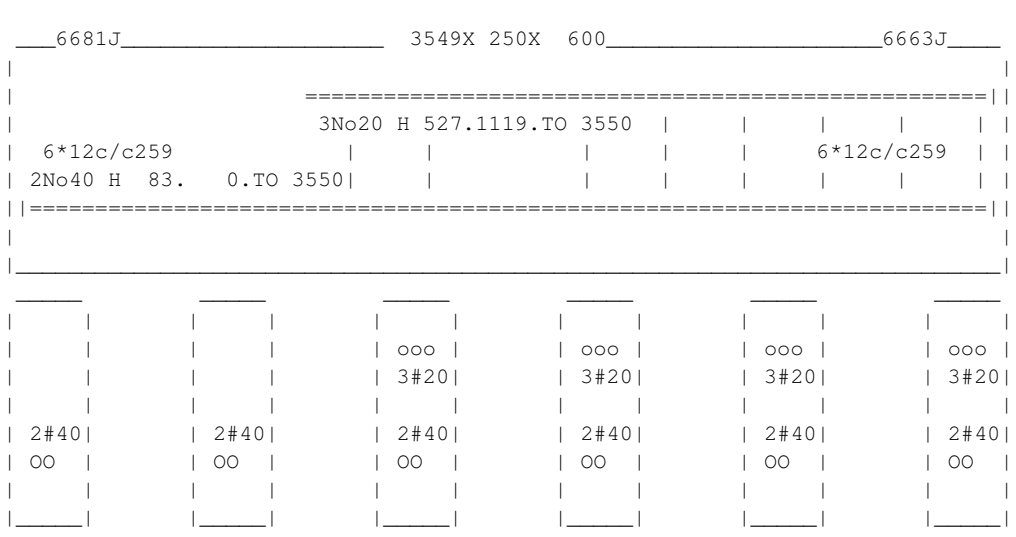

BEAM NO. 200 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 180. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	4 - 16MM	0.	180.	YES	YES

CRITICAL POS MOMENT= 117.58 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 751.MM2, RHO=0.0050, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 70. MMS
REQD. DEVELOPMENT LENGTH = 472. MMS

Cracked Moment of Inertia Iz at above location = 73919.6 cm^4

B E A M N O. 200 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 200 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 200 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

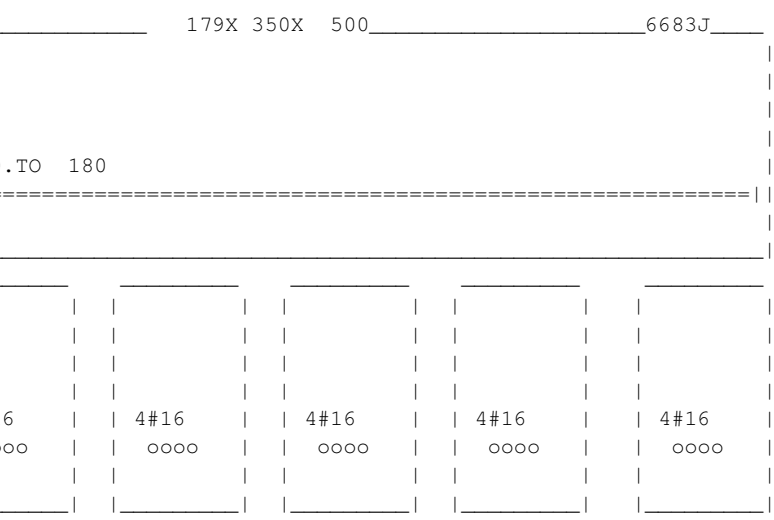

==========

BEAM NO. 201 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 180. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	4 - 16MM	0.	180.	YES	YES

CRITICAL POS MOMENT=	108.78 KN-MET AT 180.MM, LOAD 203
REQD STEEL=	693.MM2, RHO=0.0046, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING=	219./ 41./ 70. MMS
REQD. DEVELOPMENT LENGTH =	472. MMS

Cracked Moment of Inertia Iz at above location = 73919.6 cm^4

B E A M N O. 201 D E S I G N R E S U L T S - SHEAR

** LOCATION FOR DESIGN FOR SHEAR AT START OF MEMBER 201 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

** LOCATION FOR DESIGN FOR SHEAR AT END OF MEMBER 201 IS BEYOND
THE MIDPOINT OF MEMBER. DESIGN FOR SHEAR AND TORSION NOT PERFORMED.

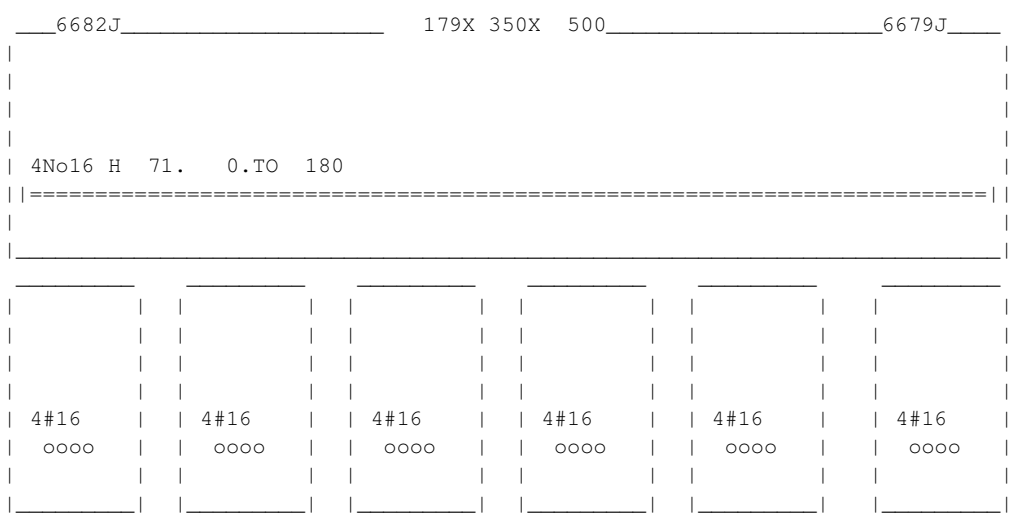

BEAM NO. 202 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1275. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	4 - 16MM	0.	1275.	YES	YES

CRITICAL POS MOMENT= 110.37 KN-MET AT 0.MM, LOAD 200
REQD STEEL= 704.MM2, RHO=0.0047, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 70. MMS
REQD. DEVELOPMENT LENGTH = 472. MMS

Cracked Moment of Inertia Iz at above location = 73919.6 cm^4

B E A M N O. 202 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 84.51 KNS Vc= 146.87 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.9 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

AT END SUPPORT - Vu= 86.61 KNS Vc= 154.48 KNS Vs= 0.00 KNS
Tu= 14.75 KN-MET Tc= 6.9 KN-MET Ts= 19.7 KN-MET LOAD 202
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.74 SQ.CM.

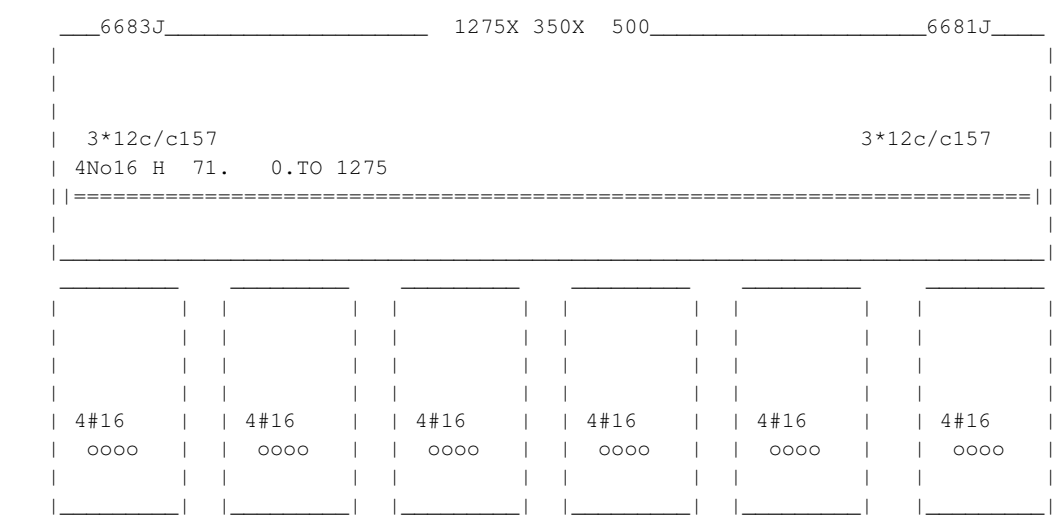

BEAM NO. 203 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1450. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	1450.	YES	YES

```
|-------------------------------------------------------------|
|   CRITICAL POS MOMENT=     91.47 KN-MET  AT     0.MM, LOAD  203|
|   REQD STEEL=   580.MM2, RHO=0.0039, RHOMX=0.0249 RHOMN=0.0035 |
|   MAX/MIN/ACTUAL BAR SPACING=   219./   41./  104. MMS         |
|   REQD. DEVELOPMENT LENGTH =   410. MMS                       |
|-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 58106.9 cm^4

B E A M N O. 203 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 2.01 KNS Vc= 140.54 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.7 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 300. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

AT END SUPPORT - Vu= 4.98 KNS Vc= 140.69 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.7 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 300. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

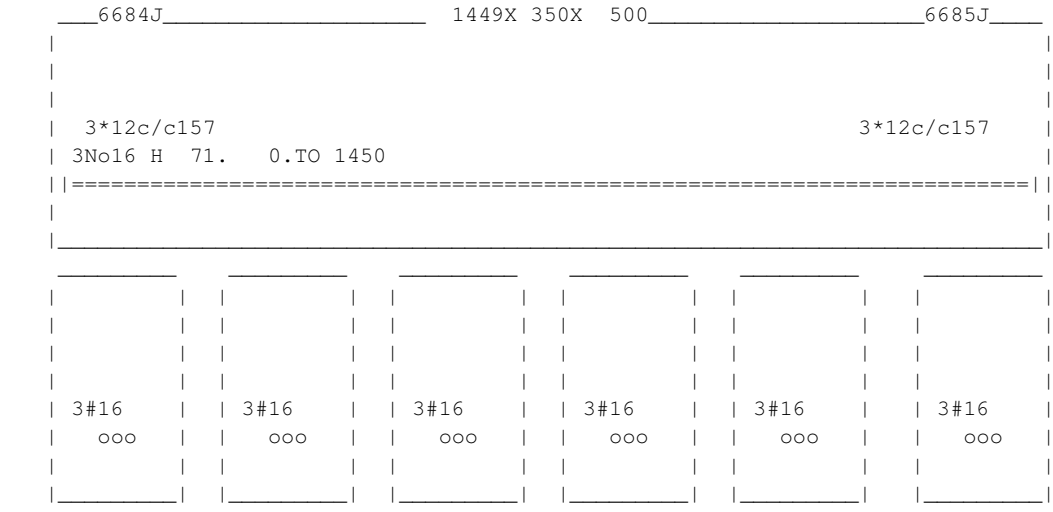

BEAM NO. 204 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1275. MM FY - 420. FC - 35. MPA, SIZE - 350. X 500. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	71.	3 - 16MM	0.	1275.	YES	YES

CRITICAL POS MOMENT= 91.99 KN-MET AT 0.MM, LOAD 203
REQD STEEL= 583.MM2, RHO=0.0039, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 41./ 104. MMS
REQD. DEVELOPMENT LENGTH = 410. MMS

Cracked Moment of Inertia Iz at above location = 58106.9 cm^4

B E A M N O. 204 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 71.10 KNS Vc= 141.96 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.4 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

AT END SUPPORT - Vu= 73.20 KNS Vc= 141.96 KNS Vs= 0.00 KNS
Tu= 27.79 KN-MET Tc= 6.4 KN-MET Ts= 37.1 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 213. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 7.04 SQ.CM.

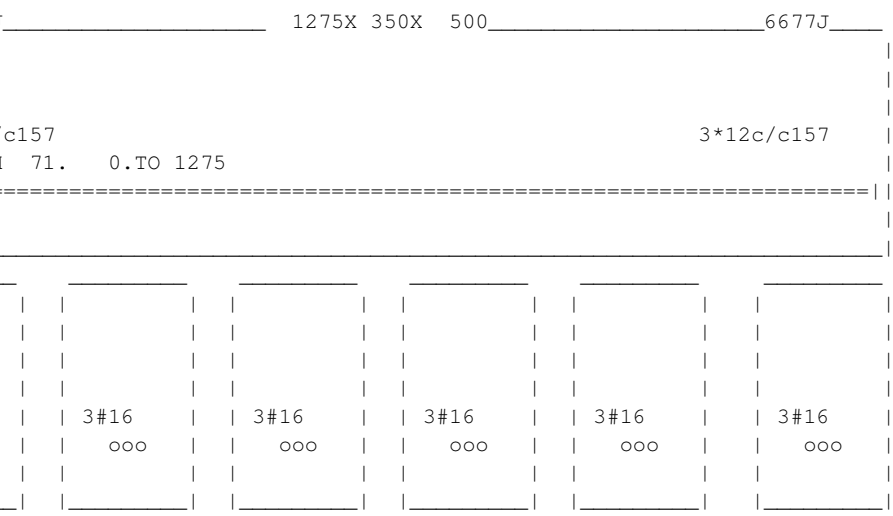

BEAM NO. 205 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1800. MM FY - 420. FC - 35. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	13.	1712.	NO	NO

CRITICAL POS MOMENT= 4.24 KN-MET AT 900.MM, LOAD 200
REQD STEEL= 45.MM2, RHO=0.0005, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 13687.9 cm^4

B E A M N O. 205 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 6.03 KNS Vc= 81.10 KNS Vs= 0.00 KNS
Tu= 8.39 KN-MET Tc= 2.8 KN-MET Ts= 11.2 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 106. MM C/C FOR 575. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.36 SQ.CM.

AT END SUPPORT - Vu= 6.03 KNS Vc= 81.10 KNS Vs= 0.00 KNS
Tu= 8.39 KN-MET Tc= 2.8 KN-MET Ts= 11.2 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 106. MM C/C FOR 575. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 3.36 SQ.CM.

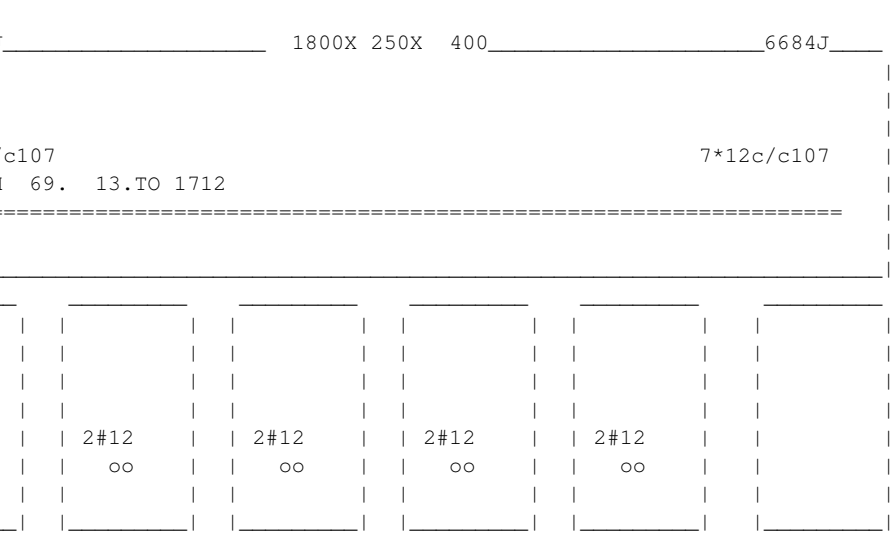

BEAM NO. 206 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1800. MM FY - 420. FC - 35. MPA, SIZE - 250. X 400. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	2 - 12MM	13.	1712.	NO	NO

CRITICAL POS MOMENT= 4.24 KN-MET AT 900.MM, LOAD 200
REQD STEEL= 45.MM2, RHO=0.0005, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 113. MMS
REQD. DEVELOPMENT LENGTH = 308. MMS

Cracked Moment of Inertia Iz at above location = 13687.9 cm^4

B E A M N O. 206 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 6.03 KNS Vc= 78.13 KNS Vs= 0.00 KNS
Tu= 5.58 KN-MET Tc= 2.8 KN-MET Ts= 7.4 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 106. MM C/C FOR 575. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.24 SQ.CM.

AT END SUPPORT - Vu= 6.03 KNS Vc= 78.13 KNS Vs= 0.00 KNS
Tu= 5.58 KN-MET Tc= 2.8 KN-MET Ts= 7.4 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 106. MM C/C FOR 575. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 2.24 SQ.CM.

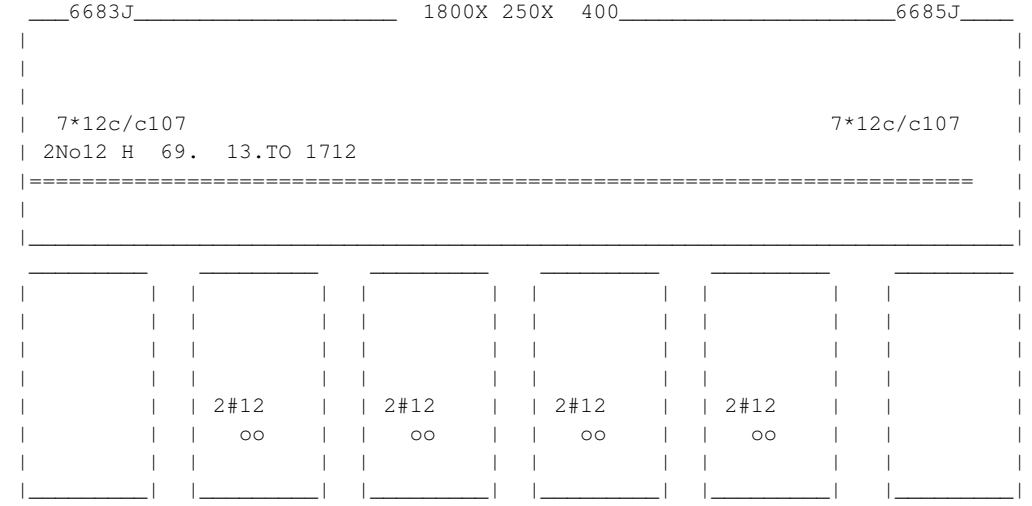

BEAM NO. 207 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1150. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	3 - 12MM	0.	1011.	YES	NO

CRITICAL POS MOMENT= 40.18 KN-MET AT 0.MM, LOAD 206
REQD STEEL= 269.MM2, RHO=0.0020, RHOMX=0.0249 RHOMN=0.0035
MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS
REQD. DEVELOPMENT LENGTH = 328. MMS

Cracked Moment of Inertia Iz at above location = 53246.0 cm^4

```
  2        527.     3 - 20MM         0.         1150.        YES  YES
 |-------------------------------------------------------------|
 |   CRITICAL NEG MOMENT=    155.76 KN-MET  AT  1150.MM, LOAD  208|
 |   REQD STEEL=   818.MM2, RHO=0.0062, RHOMX=0.0249 RHOMN=0.0035 |
 |   MAX/MIN/ACTUAL BAR SPACING=   219./   45./   52. MMS         |
 |   REQD. DEVELOPMENT LENGTH =   981. MMS                       |
 |-------------------------------------------------------------|
```

Cracked Moment of Inertia Iz at above location = 123768.7 cm^4

B E A M N O. 207 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 86.43 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 50. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

AT END SUPPORT - Vu= 88.09 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 50. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

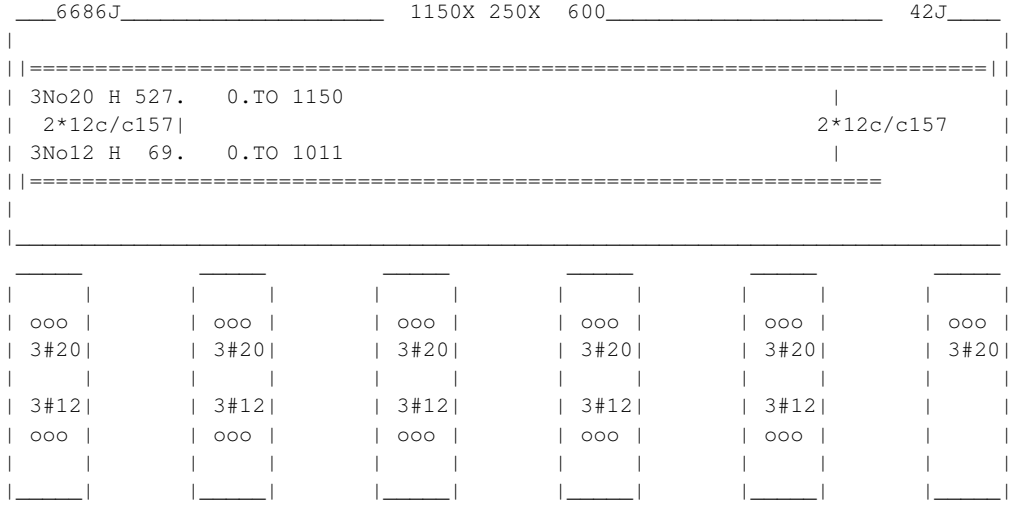

BEAM NO. 208 DESIGN RESULTS - FLEXURE PER CODE ACI 318-08

LEN - 1800. MM FY - 420. FC - 35. MPA, SIZE - 250. X 600. MMS

LEVEL	HEIGHT (MM)	BAR INFO	FROM (MM)	TO (MM)	ANCHOR STA	ANCHOR END
1	69.	4 - 12MM	0.	1800.	YES	YES
	CRITICAL POS MOMENT= 60.76 KN-MET AT 0.MM, LOAD 205					
	REQD STEEL= 409.MM2, RHO=0.0031, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 38. MMS					
	REQD. DEVELOPMENT LENGTH = 492. MMS					
	Cracked Moment of Inertia Iz at above location = 68354.5 cm^4					
2	531.	3 - 12MM	425.	1800.	NO	YES
	CRITICAL NEG MOMENT= 50.03 KN-MET AT 1800.MM, LOAD 208					
	REQD STEEL= 337.MM2, RHO=0.0025, RHOMX=0.0249 RHOMN=0.0035					
	MAX/MIN/ACTUAL BAR SPACING= 219./ 37./ 56. MMS					
	REQD. DEVELOPMENT LENGTH = 328. MMS					
	Cracked Moment of Inertia Iz at above location = 52821.1 cm^4					

B E A M N O. 208 D E S I G N R E S U L T S - SHEAR

AT START SUPPORT - Vu= 33.19 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 375. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

AT END SUPPORT - Vu= 45.58 KNS Vc= 127.98 KNS Vs= 0.00 KNS
Tu= 13.35 KN-MET Tc= 4.8 KN-MET Ts= 17.8 KN-MET LOAD 203
STIRRUPS ARE REQUIRED FOR TORSION.
REINFORCEMENT FOR SHEAR IS PER CL.11.5.5.1.
PROVIDE 12 MM 2-LEGGED STIRRUPS AT 156. MM C/C FOR 375. MM
ADDITIONAL LONGITUDINAL STEEL REQD. FOR TORSIONAL RESISTANCE = 4.64 SQ.CM.

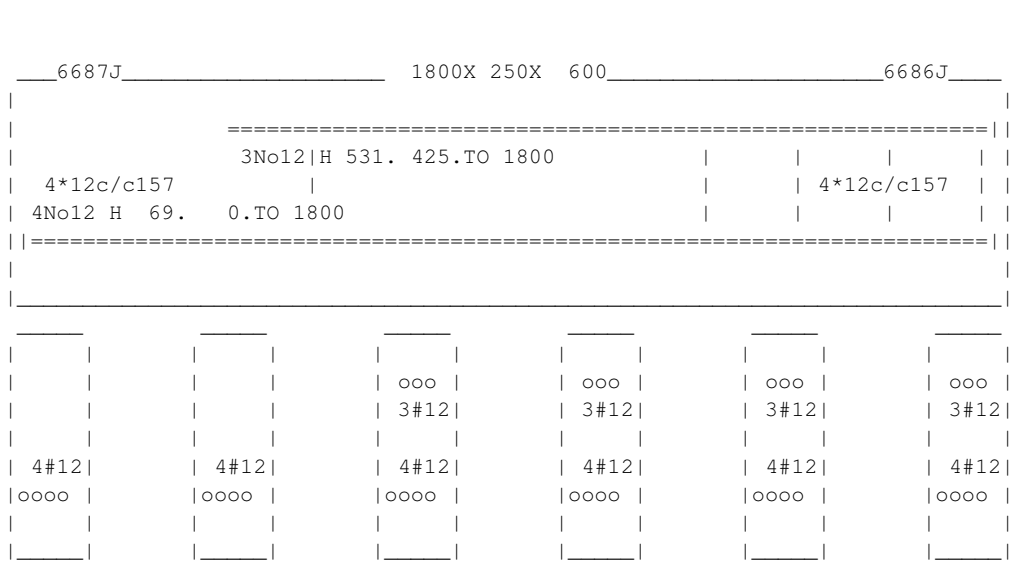

**********END OF BEAM DESIGN**********

********** CONCRETE TAKE OFF **********

(FOR BEAMS, COLUMNS AND PLATES DESIGNED ABOVE)

NOTE: CONCRETE QUANTITY REPRESENTS VOLUME OF CONCRETE IN BEAMS, COLUMNS, AND PLATES DESIGNED ABOVE.
REINFORCING STEEL QUANTITY REPRESENTS REINFORCING STEEL IN BEAMS AND COLUMNS DESIGNED ABOVE.
REINFORCING STEEL IN PLATES IS NOT INCLUDED IN THE REPORTED QUANTITY.

TOTAL VOLUME OF CONCRETE = 138.7 CU.METER

BAR SIZE NUMBER	WEIGHT (in lbs)
12	6600
16	9451
20	1685
25	388
32	1763
40	757
50	1131
*** TOTAL=	21776

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 12: 3:44 ****

****
* For technical assistance on STAAD.Pro, please visit *
* http://selectservices.bentley.com/en-US/ *
* *
* Details about additional assistance from *
* Bentley and Partners can be found at program menu *
* Help->Technical Support *
* *
* Copyright (c) 1997-2014 Bentley Systems, Inc.
* http://www.bentley.com *
****

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

ATTACHMENT 6 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. TF1

```
STAAD SPACE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
UNIT METER MTON
SET ECHO OFF
JOINT COORDINATES
1 0 0 0; 2 0 1 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1;
11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5;
16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1;
21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1;
26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5;
31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5;
36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5;
41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75;
46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 68 1 0 -0.75; 69 1 0 -1;
70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1;
75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1;
80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1;
85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 103 1 0 0.25; 104 1 0 0.5;
105 1 0 0.75; 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75;
110 0.75 0 1; 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1;
115 0.25 0 0.25; 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1;
MEMBER INCIDENCES
101 2 1;
ELEMENT INCIDENCES SHELL
5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20;
10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24;
15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30;
20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37;
25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28;
30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47;
35 44 45 49 48; 36 45 46 6 49; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75;
56 71 72 77 76; 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81;
61 79 78 83 84; 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8;
66 83 85 14 11; 67 85 86 16 14; 68 86 87 1 16; 85 72 103 107 77;
86 103 104 108 107; 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82;
90 107 108 112 111; 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87;
94 111 112 116 115; 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1;
98 115 116 34 32; 99 116 117 36 34; 100 117 118 5 36;
START GROUP DEFINITION
ELEMENT
_MAX_BM 5 TO 7 9 TO 20 22 TO 36 53 TO 67 85 TO 96 98 TO 100
_MAX_SF 5 9 13 17 TO 20 24 28 32 TO 36 53 TO 57 61 65 85 TO 88 92 96 100
END GROUP DEFINITION
ELEMENT PROPERTY
5 TO 36 53 TO 68 85 TO 100 THICKNESS 0.5
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
101 PRIS YD 0.45 ZD 0.45
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
5 TO 36 53 TO 68 85 TO 100 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
*******************************************************************************
LOAD 100 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 1)
SELFWEIGHT Y -1
*CRITICAL SUPPORT REACTION FROM TRIPPER FRAME STAAD ANALYSIS(NODE 109)
JOINT LOAD
2 FX -0.34 FY -49.56 FZ -0.49 MX -3.248 MZ 0.529

ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
* FOR AVG. 4M HIGH STORAGE, SURCHARGE = 4*1.6 = 6.5T/m2
5 TO 36 PR GY -6.5
*******************************************************************************
LOAD 101 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 2)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
```

```
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.37 FY -50.09 FZ -0.5 MX -3.289 MZ 0.654

********************************************************************************
LOAD 102 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 3)
JOINT LOAD
2 FX -0.46 FY -57.7 FZ -0.58 MX -3.691 MZ 0.72


SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
********************************************************************************
LOAD 103 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 4)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.5 FY -55.41 FZ -0.55 MX -3.545 MZ 0.781



********************************************************************************8
LOAD 104 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.19 FY -49.22 FZ -0.46 MX -2.985 MZ 0.038


********************************************************************************
LOAD 105 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.21 FY -49.75 FZ -0.46 MX -3.026 MZ 0.163



********************************************************************************
LOAD 106 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLX(+0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX -0.74 FY -57.78 FZ 0.57 MX 1.095 MZ 4.815

ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
********************************************************************************
LOAD 107 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.69 FY -55.35 FZ 0.59 MX 1.071 MZ 4.555


********************************************************************************
LOAD 108 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.65 FY -51.54 FZ 0.5 MX 0.993 MZ 4.418

          ********************************************************************88
********************************************************************************
LOAD 109 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLX(-0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX -0.67 FY -52.22 FZ 0.46 MX 0.93 MZ 4.557
```

```
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
* FOR AVG. 4M HIGH STORAGE, SURCHARGE = 4*1.6 = 6.5T/m2
5 TO 36 PR GY -6.5
********************************************************************************
LOAD 110 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.81 FY -58.3 FZ 0.51 MX 0.886 MZ 5.275

********************************************************************************
LOAD 111 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLX(-0.55)
JOINT LOAD
2 FX -0.77 FY -55.87 FZ 0.53 MX 0.862 MZ 5.015


SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
********************************************************************************
LOAD 112 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.59 FY -50.71 FZ 0.56 MX 1.252 MZ 3.864


********************************************************************************8
LOAD 113 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.61 FY -51.39 FZ 0.52 MX 1.19 MZ 4.004


********************************************************************************
LOAD 114 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.75 FY -57.47 FZ 0.58 MX 1.145 MZ 4.721


********************************************************************************
LOAD 115 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLZ(+0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX -0.7 FY -55.04 FZ 0.59 MX 1.121 MZ 4.462

ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
********************************************************************************
LOAD 116 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.61 FY -50.9 FZ 0.51 MX 1.098 MZ 3.994


********************************************************************************
LOAD 117 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
```

JOINT LOAD
2 FX -0.62 FY -51.57 FZ 0.48 MX 1.036 MZ 4.134

**********88
LOAD 118 LOADTYPE None TITLE DL+LL+WHEEL_TRIPPER 3+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.77 FY -57.65 FZ 0.53 MX 0.991 MZ 4.851

****
LOAD 119 LOADTYPE None TITLE DL+LL+WHEEL_TRIPPER 4+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.72 FY -55.22 FZ 0.55 MX 0.967 MZ 4.592

****
LOAD 120 LOADTYPE None TITLE 0.6DL+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.23 FY -26.62 FZ 0.22 MX 0.434 MZ 1.719

****
LOAD 121 LOADTYPE None TITLE 0.6DL+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.34 FY -27.32 FZ 0.14 MX 0.154 MZ 2.332

**********88
LOAD 122 LOADTYPE None TITLE 0.6DL+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.26 FY -26.21 FZ 0.23 MX 0.5 MZ 1.594

****
LOAD 123 LOADTYPE None TITLE 0.6DL+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.28 FY -26.46 FZ 0.17 MX 0.295 MZ 1.768

****
LOAD 124 LOADTYPE None TITLE DL+TR1_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.53 FY -44.59 FZ 0.28 MX 0.416 MZ 3.552

****
LOAD 125 LOADTYPE None TITLE DL+TR2_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.55 FY -45.33 FZ 0.24 MX 0.325 MZ 3.737

```
**************************************************************************88
LOAD 126 LOADTYPE None  TITLE DL+TR3_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.78 FY -55.18 FZ 0.29 MX 0.244 MZ 4.896


*****************************************************************************
LOAD 127 LOADTYPE None  TITLE DL+TR4_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FX -0.71 FY -51.75 FZ 0.37 MX 0.279 MZ 4.508


*****************************************************************************8
*****************************************************************************
*LOAD CASES FOR FOUNDATION DESIGN
LOAD 200 LOADTYPE None  TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 1)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
*CRITICAL SUPPORT REACTION FROM TRIPPER FRAME STAAD ANALYSIS(NODE 109)
2 FZ -0.5 FY -64.8 FX -0.61 MZ -4.043 MX 0.802
************************************
LOAD 201 LOADTYPE None  TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 2)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.55 FY -65.93 FX -0.62 MZ -4.132 MX 1.068
*****************************************
LOAD 202 LOADTYPE None  TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 3)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.68 FY -77.91 FX -0.77 MZ -4.869 MX 1.06
**************************************************
LOAD 203 LOADTYPE None  TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 4)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.77 FY -73.03 FX -0.71 MZ -4.558 MX 1.19
**************************************************
LOAD 204 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.1 FY -59.5 FX -0.52 MZ -3.357 MX -0.389
**************************************************
LOAD 205 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.13 FY -60.21 FX -0.52 MZ -3.412 MX -0.223



**************************************************
LOAD 206 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
```

5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.21 FY -67.7 FX -0.62 MZ -3.873 MX -0.228

****
LOAD 207 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.27 FY -64.64 FX -0.58 MZ -3.678 MX -0.147

****
LOAD 208 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.27 FY -64.64 FX -0.58 MZ -3.678 MX -0.147

****
LOAD 209 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -1.06 FY -61.31 FX -0.67 MZ -4.352 MX 2.766

****
LOAD 210 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -1.14 FY -68.8 FX -0.76 MZ -4.813 MX 2.761

****
LOAD 211 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -1.2 FY -65.74 FX -0.73 MZ -4.618 MX 2.842

****
LOAD 212 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.14 FY -60.14 FX -0.59 MZ -3.861 MX -0.245

****
LOAD 213 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5

5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.17 FY -60.85 FX -0.59 MZ -3.916 MX -0.078

****
LOAD 214 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.26 FY -68.34 FX -0.69 MZ -4.377 MX -0.083

****
LOAD 215 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.31 FY -65.29 FX -0.65 MZ -4.182 MX -0.002

****
LOAD 216 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.24 FY -60.23 FX -0.59 MZ -3.919 MX 0.078

****
LOAD 217 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.28 FY -60.94 FX -0.6 MZ -3.974 MX 0.245

****
LOAD 218 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.36 FY -68.43 FX -0.69 MZ -4.435 MX 0.239

****
LOAD 219 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.41 FY -65.37 FX -0.66 MZ -4.24 MX 0.321

****
LOAD 220 LOADTYPE None TITLE 1.2*DL+1.6*TR1_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.37 FY -52.1 FX -0.53 MZ -3.66 MX 0.602

```
*****************************************************
LOAD 221 LOADTYPE None  TITLE 1.2*DL+1.6*TR2_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.31 FY -53.2 FX -0.56 MZ -3.89 MX 0.465


*****************************************************
LOAD 222 LOADTYPE None  TITLE 1.2*DL+1.6*TR3_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.4 FY -68.46 FX -0.94 MZ -5.775 MX 0.355


*****************************************************
LOAD 223 LOADTYPE None  TITLE 1.2*DL+1.6*TR4_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 PR GY -4.5
5 TO 36 PR GY -6.5
JOINT LOAD
2 FZ -0.51 FY -63.13 FX -0.82 MZ -5.143 MX 0.405



*****************************************************
PERFORM ANALYSIS
LOAD LIST 100 to 127
PRINT SUPPORT REACTION ALL
PRINT DISPLACEMENT LIST 2
LOAD LIST 200 TO 223
START CONCRETE DESIGN
CODE ACI
CLB 0.05 MEMB 101
CLS 0.05 ALL
CLT 0.05 MEMB 101
FC 3567 ALL
FYMAIN 42813 ALL
FYSEC 42813 ALL
MAXMAIN 32 ALL
MINMAIN 12 ALL
CLB 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
DESIGN COLUMN 101
END CONCRETE DESIGN
FINISH
```

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    13: 6:55                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_TF1.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. SET ECHO OFF
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.031250
5	0.031250
6	0.015625
8	0.031250
9	0.015625
11	0.062500
12	0.062500
13	0.031250
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.031250
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.031250
26	0.062500
27	0.062500
28	0.062500
29	0.031250
30	0.031250
31	0.031250

32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.031250
39	0.062500
40	0.062500
41	0.062500
42	0.031250
43	0.062500
44	0.062500
45	0.062500
46	0.031250
47	0.031250
48	0.031250
49	0.031250
68	0.031250
69	0.015625
70	0.031250
71	0.031250
72	0.031250
73	0.062500
74	0.031250
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.031250
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.031250
85	0.062500
86	0.062500
87	0.062500
103	0.031250
104	0.031250
105	0.031250
106	0.015625
107	0.062500
108	0.062500
109	0.062500
110	0.031250
111	0.062500
112	0.062500
113	0.062500
114	0.031250
115	0.062500
116	0.062500
117	0.062500
118	0.031250
TOTAL	4.000000

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	82	NUMBER OF MEMBERS	1
NUMBER OF PLATES	64	NUMBER OF SOLIDS	0
NUMBER OF SURFACES	0	NUMBER OF SUPPORTS	81

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 78/ 16/ 54 DOF
TOTAL PRIMARY LOAD CASES = 52, TOTAL DEGREES OF FREEDOM = 249
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 14 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.7/ 165032.2 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

**NOTE-Tension/Compression converged after 1 iterations, Case= 114

**NOTE-Tension/Compression converged after 1 iterations, Case= 115

**NOTE-Tension/Compression converged after 1 iterations, Case= 116

**NOTE-Tension/Compression converged after 1 iterations, Case= 117

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

**NOTE-Tension/Compression converged after 1 iterations, Case= 122

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

**NOTE-Tension/Compression converged after 1 iterations, Case= 125

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

**NOTE-Tension/Compression converged after 1 iterations, Case= 127

**NOTE-Tension/Compression converged after 1 iterations, Case= 200

**NOTE-Tension/Compression converged after 1 iterations, Case= 201

**NOTE-Tension/Compression converged after 1 iterations, Case= 202

**NOTE-Tension/Compression converged after 1 iterations, Case= 203

**NOTE-Tension/Compression converged after 1 iterations, Case= 204

**NOTE-Tension/Compression converged after 1 iterations, Case= 205

**NOTE-Tension/Compression converged after 1 iterations, Case= 206

**NOTE-Tension/Compression converged after 1 iterations, Case= 208

**NOTE-Tension/Compression converged after 1 iterations, Case= 209

**NOTE-Tension/Compression converged after 1 iterations, Case= 210

**NOTE-Tension/Compression converged after 1 iterations, Case= 211

**NOTE-Tension/Compression converged after 1 iterations, Case= 212

**NOTE-Tension/Compression converged after 1 iterations, Case= 213

**NOTE-Tension/Compression converged after 1 iterations, Case= 214

**NOTE-Tension/Compression converged after 1 iterations, Case= 215

**NOTE-Tension/Compression converged after 1 iterations, Case= 216

**NOTE-Tension/Compression converged after 1 iterations, Case= 217

**NOTE-Tension/Compression converged after 1 iterations, Case= 218

**NOTE-Tension/Compression converged after 1 iterations, Case= 219

**NOTE-Tension/Compression converged after 1 iterations, Case= 220

**NOTE-Tension/Compression converged after 1 iterations, Case= 222

**NOTE-Tension/Compression converged after 1 iterations, Case= 223

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	100	0.34	1.38	0.49	0.00	0.00	0.00
	101	0.37	1.39	0.50	0.00	0.00	0.00
	102	0.46	1.51	0.58	0.00	0.00	0.00
	103	0.50	1.47	0.55	0.00	0.00	0.00
	104	0.19	1.37	0.46	0.00	0.00	0.00
	105	0.21	1.38	0.46	0.00	0.00	0.00
	106	0.74	1.51	-0.57	0.00	0.00	0.00
	107	0.69	1.47	-0.59	0.00	0.00	0.00
	108	0.65	1.41	-0.50	0.00	0.00	0.00
	109	0.67	1.42	-0.46	0.00	0.00	0.00
	110	0.81	1.52	-0.51	0.00	0.00	0.00
	111	0.77	1.48	-0.53	0.00	0.00	0.00
	112	0.59	1.40	-0.56	0.00	0.00	0.00
	113	0.61	1.41	-0.52	0.00	0.00	0.00
	114	0.75	1.51	-0.58	0.00	0.00	0.00
	115	0.70	1.47	-0.59	0.00	0.00	0.00
	116	0.61	1.40	-0.51	0.00	0.00	0.00
	117	0.62	1.41	-0.48	0.00	0.00	0.00
	118	0.77	1.51	-0.53	0.00	0.00	0.00
	119	0.72	1.47	-0.55	0.00	0.00	0.00
	120	0.23	1.00	-0.22	0.00	0.00	0.00
	121	0.34	1.01	-0.14	0.00	0.00	0.00
	122	0.26	1.00	-0.23	0.00	0.00	0.00
	123	0.28	1.00	-0.17	0.00	0.00	0.00
	124	0.53	1.30	-0.28	0.00	0.00	0.00
	125	0.55	1.31	-0.24	0.00	0.00	0.00
	126	0.78	1.47	-0.29	0.00	0.00	0.00
	127	0.71	1.41	-0.37	0.00	0.00	0.00
3	100	0.00	0.83	0.00	0.00	0.00	0.00
	101	0.00	0.84	0.00	0.00	0.00	0.00
	102	0.00	0.90	0.00	0.00	0.00	0.00
	103	0.00	0.89	0.00	0.00	0.00	0.00
	104	0.00	0.82	0.00	0.00	0.00	0.00
	105	0.00	0.82	0.00	0.00	0.00	0.00
	106	0.00	1.00	0.00	0.00	0.00	0.00
	107	0.00	0.98	0.00	0.00	0.00	0.00
	108	0.00	0.95	0.00	0.00	0.00	0.00
	109	0.00	0.95	0.00	0.00	0.00	0.00
	110	0.00	1.02	0.00	0.00	0.00	0.00
	111	0.00	1.00	0.00	0.00	0.00	0.00
	112	0.00	0.93	0.00	0.00	0.00	0.00
	113	0.00	0.93	0.00	0.00	0.00	0.00
	114	0.00	1.00	0.00	0.00	0.00	0.00
	115	0.00	0.97	0.00	0.00	0.00	0.00
	116	0.00	0.93	0.00	0.00	0.00	0.00
	117	0.00	0.94	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.01	0.00	0.00	0.00	0.00
	119	0.00	0.98	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.68	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.87	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00
	126	0.00	0.99	0.00	0.00	0.00	0.00
	127	0.00	0.95	0.00	0.00	0.00	0.00
5	100	0.00	0.58	0.00	0.00	0.00	0.00
	101	0.00	0.59	0.00	0.00	0.00	0.00
	102	0.00	0.63	0.00	0.00	0.00	0.00
	103	0.00	0.62	0.00	0.00	0.00	0.00
	104	0.00	0.59	0.00	0.00	0.00	0.00
	105	0.00	0.59	0.00	0.00	0.00	0.00
	106	0.00	0.77	0.00	0.00	0.00	0.00
	107	0.00	0.75	0.00	0.00	0.00	0.00
	108	0.00	0.72	0.00	0.00	0.00	0.00
	109	0.00	0.72	0.00	0.00	0.00	0.00
	110	0.00	0.77	0.00	0.00	0.00	0.00
	111	0.00	0.75	0.00	0.00	0.00	0.00
	112	0.00	0.72	0.00	0.00	0.00	0.00
	113	0.00	0.72	0.00	0.00	0.00	0.00
	114	0.00	0.77	0.00	0.00	0.00	0.00
	115	0.00	0.75	0.00	0.00	0.00	0.00
	116	0.00	0.71	0.00	0.00	0.00	0.00
	117	0.00	0.72	0.00	0.00	0.00	0.00
	118	0.00	0.76	0.00	0.00	0.00	0.00
	119	0.00	0.75	0.00	0.00	0.00	0.00
	120	0.00	0.50	0.00	0.00	0.00	0.00
	121	0.00	0.50	0.00	0.00	0.00	0.00
	122	0.00	0.50	0.00	0.00	0.00	0.00
	123	0.00	0.50	0.00	0.00	0.00	0.00
	124	0.00	0.64	0.00	0.00	0.00	0.00
	125	0.00	0.65	0.00	0.00	0.00	0.00
	126	0.00	0.72	0.00	0.00	0.00	0.00
	127	0.00	0.70	0.00	0.00	0.00	0.00
6	100	0.00	0.37	0.00	0.00	0.00	0.00
	101	0.00	0.37	0.00	0.00	0.00	0.00
	102	0.00	0.40	0.00	0.00	0.00	0.00
	103	0.00	0.39	0.00	0.00	0.00	0.00
	104	0.00	0.37	0.00	0.00	0.00	0.00
	105	0.00	0.37	0.00	0.00	0.00	0.00
	106	0.00	0.52	0.00	0.00	0.00	0.00
	107	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.48	0.00	0.00	0.00	0.00
	109	0.00	0.49	0.00	0.00	0.00	0.00
	110	0.00	0.52	0.00	0.00	0.00	0.00
	111	0.00	0.51	0.00	0.00	0.00	0.00
	112	0.00	0.48	0.00	0.00	0.00	0.00
	113	0.00	0.48	0.00	0.00	0.00	0.00
	114	0.00	0.51	0.00	0.00	0.00	0.00
	115	0.00	0.50	0.00	0.00	0.00	0.00
	116	0.00	0.48	0.00	0.00	0.00	0.00
	117	0.00	0.48	0.00	0.00	0.00	0.00
	118	0.00	0.51	0.00	0.00	0.00	0.00
	119	0.00	0.50	0.00	0.00	0.00	0.00
	120	0.00	0.35	0.00	0.00	0.00	0.00
	121	0.00	0.35	0.00	0.00	0.00	0.00
	122	0.00	0.34	0.00	0.00	0.00	0.00
	123	0.00	0.34	0.00	0.00	0.00	0.00
	124	0.00	0.44	0.00	0.00	0.00	0.00
	125	0.00	0.44	0.00	0.00	0.00	0.00
	126	0.00	0.49	0.00	0.00	0.00	0.00
	127	0.00	0.48	0.00	0.00	0.00	0.00
8	100	0.00	0.75	0.00	0.00	0.00	0.00
	101	0.00	0.76	0.00	0.00	0.00	0.00
	102	0.00	0.83	0.00	0.00	0.00	0.00
	103	0.00	0.81	0.00	0.00	0.00	0.00
	104	0.00	0.74	0.00	0.00	0.00	0.00
	105	0.00	0.75	0.00	0.00	0.00	0.00
	106	0.00	0.69	0.00	0.00	0.00	0.00
	107	0.00	0.67	0.00	0.00	0.00	0.00
	108	0.00	0.65	0.00	0.00	0.00	0.00
	109	0.00	0.66	0.00	0.00	0.00	0.00
	110	0.00	0.70	0.00	0.00	0.00	0.00
	111	0.00	0.68	0.00	0.00	0.00	0.00
	112	0.00	0.63	0.00	0.00	0.00	0.00
	113	0.00	0.64	0.00	0.00	0.00	0.00
	114	0.00	0.69	0.00	0.00	0.00	0.00
	115	0.00	0.67	0.00	0.00	0.00	0.00
	116	0.00	0.64	0.00	0.00	0.00	0.00
	117	0.00	0.65	0.00	0.00	0.00	0.00
	118	0.00	0.70	0.00	0.00	0.00	0.00
	119	0.00	0.68	0.00	0.00	0.00	0.00
	120	0.00	0.47	0.00	0.00	0.00	0.00
	121	0.00	0.49	0.00	0.00	0.00	0.00
	122	0.00	0.47	0.00	0.00	0.00	0.00
	123	0.00	0.48	0.00	0.00	0.00	0.00
	124	0.00	0.61	0.00	0.00	0.00	0.00
	125	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	0.70	0.00	0.00	0.00	0.00
	127	0.00	0.67	0.00	0.00	0.00	0.00
9	100	0.00	0.46	0.00	0.00	0.00	0.00
	101	0.00	0.46	0.00	0.00	0.00	0.00
	102	0.00	0.50	0.00	0.00	0.00	0.00
	103	0.00	0.49	0.00	0.00	0.00	0.00
	104	0.00	0.44	0.00	0.00	0.00	0.00
	105	0.00	0.45	0.00	0.00	0.00	0.00
	106	0.00	0.48	0.00	0.00	0.00	0.00
	107	0.00	0.47	0.00	0.00	0.00	0.00
	108	0.00	0.45	0.00	0.00	0.00	0.00
	109	0.00	0.46	0.00	0.00	0.00	0.00
	110	0.00	0.49	0.00	0.00	0.00	0.00
	111	0.00	0.48	0.00	0.00	0.00	0.00
	112	0.00	0.44	0.00	0.00	0.00	0.00
	113	0.00	0.44	0.00	0.00	0.00	0.00
	114	0.00	0.48	0.00	0.00	0.00	0.00
	115	0.00	0.46	0.00	0.00	0.00	0.00
	116	0.00	0.44	0.00	0.00	0.00	0.00
	117	0.00	0.45	0.00	0.00	0.00	0.00
	118	0.00	0.48	0.00	0.00	0.00	0.00
	119	0.00	0.47	0.00	0.00	0.00	0.00
	120	0.00	0.33	0.00	0.00	0.00	0.00
	121	0.00	0.35	0.00	0.00	0.00	0.00
	122	0.00	0.33	0.00	0.00	0.00	0.00
	123	0.00	0.33	0.00	0.00	0.00	0.00
	124	0.00	0.42	0.00	0.00	0.00	0.00
	125	0.00	0.43	0.00	0.00	0.00	0.00
	126	0.00	0.48	0.00	0.00	0.00	0.00
	127	0.00	0.46	0.00	0.00	0.00	0.00
11	100	0.00	1.47	0.00	0.00	0.00	0.00
	101	0.00	1.48	0.00	0.00	0.00	0.00
	102	0.00	1.62	0.00	0.00	0.00	0.00
	103	0.00	1.57	0.00	0.00	0.00	0.00
	104	0.00	1.45	0.00	0.00	0.00	0.00
	105	0.00	1.46	0.00	0.00	0.00	0.00
	106	0.00	1.41	0.00	0.00	0.00	0.00
	107	0.00	1.38	0.00	0.00	0.00	0.00
	108	0.00	1.32	0.00	0.00	0.00	0.00
	109	0.00	1.34	0.00	0.00	0.00	0.00
	110	0.00	1.43	0.00	0.00	0.00	0.00
	111	0.00	1.39	0.00	0.00	0.00	0.00
	112	0.00	1.30	0.00	0.00	0.00	0.00
	113	0.00	1.31	0.00	0.00	0.00	0.00
	114	0.00	1.41	0.00	0.00	0.00	0.00
	115	0.00	1.37	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.31	0.00	0.00	0.00	0.00
	117	0.00	1.32	0.00	0.00	0.00	0.00
	118	0.00	1.42	0.00	0.00	0.00	0.00
	119	0.00	1.38	0.00	0.00	0.00	0.00
	120	0.00	0.96	0.00	0.00	0.00	0.00
	121	0.00	0.98	0.00	0.00	0.00	0.00
	122	0.00	0.95	0.00	0.00	0.00	0.00
	123	0.00	0.96	0.00	0.00	0.00	0.00
	124	0.00	1.24	0.00	0.00	0.00	0.00
	125	0.00	1.26	0.00	0.00	0.00	0.00
	126	0.00	1.41	0.00	0.00	0.00	0.00
	127	0.00	1.35	0.00	0.00	0.00	0.00
12	100	0.00	1.55	0.00	0.00	0.00	0.00
	101	0.00	1.56	0.00	0.00	0.00	0.00
	102	0.00	1.70	0.00	0.00	0.00	0.00
	103	0.00	1.66	0.00	0.00	0.00	0.00
	104	0.00	1.53	0.00	0.00	0.00	0.00
	105	0.00	1.54	0.00	0.00	0.00	0.00
	106	0.00	1.55	0.00	0.00	0.00	0.00
	107	0.00	1.51	0.00	0.00	0.00	0.00
	108	0.00	1.45	0.00	0.00	0.00	0.00
	109	0.00	1.47	0.00	0.00	0.00	0.00
	110	0.00	1.57	0.00	0.00	0.00	0.00
	111	0.00	1.53	0.00	0.00	0.00	0.00
	112	0.00	1.42	0.00	0.00	0.00	0.00
	113	0.00	1.44	0.00	0.00	0.00	0.00
	114	0.00	1.54	0.00	0.00	0.00	0.00
	115	0.00	1.50	0.00	0.00	0.00	0.00
	116	0.00	1.43	0.00	0.00	0.00	0.00
	117	0.00	1.45	0.00	0.00	0.00	0.00
	118	0.00	1.55	0.00	0.00	0.00	0.00
	119	0.00	1.51	0.00	0.00	0.00	0.00
	120	0.00	1.06	0.00	0.00	0.00	0.00
	121	0.00	1.09	0.00	0.00	0.00	0.00
	122	0.00	1.05	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00
	124	0.00	1.36	0.00	0.00	0.00	0.00
	125	0.00	1.38	0.00	0.00	0.00	0.00
	126	0.00	1.55	0.00	0.00	0.00	0.00
	127	0.00	1.49	0.00	0.00	0.00	0.00
13	100	0.00	0.79	0.00	0.00	0.00	0.00
	101	0.00	0.80	0.00	0.00	0.00	0.00
	102	0.00	0.87	0.00	0.00	0.00	0.00
	103	0.00	0.85	0.00	0.00	0.00	0.00
	104	0.00	0.78	0.00	0.00	0.00	0.00
	105	0.00	0.79	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	0.76	0.00	0.00	0.00	0.00
	107	0.00	0.74	0.00	0.00	0.00	0.00
	108	0.00	0.71	0.00	0.00	0.00	0.00
	109	0.00	0.72	0.00	0.00	0.00	0.00
	110	0.00	0.77	0.00	0.00	0.00	0.00
	111	0.00	0.75	0.00	0.00	0.00	0.00
	112	0.00	0.70	0.00	0.00	0.00	0.00
	113	0.00	0.70	0.00	0.00	0.00	0.00
	114	0.00	0.76	0.00	0.00	0.00	0.00
	115	0.00	0.74	0.00	0.00	0.00	0.00
	116	0.00	0.70	0.00	0.00	0.00	0.00
	117	0.00	0.71	0.00	0.00	0.00	0.00
	118	0.00	0.76	0.00	0.00	0.00	0.00
	119	0.00	0.74	0.00	0.00	0.00	0.00
	120	0.00	0.52	0.00	0.00	0.00	0.00
	121	0.00	0.54	0.00	0.00	0.00	0.00
	122	0.00	0.52	0.00	0.00	0.00	0.00
	123	0.00	0.53	0.00	0.00	0.00	0.00
	124	0.00	0.67	0.00	0.00	0.00	0.00
	125	0.00	0.68	0.00	0.00	0.00	0.00
	126	0.00	0.77	0.00	0.00	0.00	0.00
	127	0.00	0.74	0.00	0.00	0.00	0.00
14	100	0.00	1.44	0.00	0.00	0.00	0.00
	101	0.00	1.45	0.00	0.00	0.00	0.00
	102	0.00	1.58	0.00	0.00	0.00	0.00
	103	0.00	1.54	0.00	0.00	0.00	0.00
	104	0.00	1.42	0.00	0.00	0.00	0.00
	105	0.00	1.43	0.00	0.00	0.00	0.00
	106	0.00	1.44	0.00	0.00	0.00	0.00
	107	0.00	1.40	0.00	0.00	0.00	0.00
	108	0.00	1.35	0.00	0.00	0.00	0.00
	109	0.00	1.36	0.00	0.00	0.00	0.00
	110	0.00	1.46	0.00	0.00	0.00	0.00
	111	0.00	1.42	0.00	0.00	0.00	0.00
	112	0.00	1.33	0.00	0.00	0.00	0.00
	113	0.00	1.34	0.00	0.00	0.00	0.00
	114	0.00	1.44	0.00	0.00	0.00	0.00
	115	0.00	1.40	0.00	0.00	0.00	0.00
	116	0.00	1.34	0.00	0.00	0.00	0.00
	117	0.00	1.35	0.00	0.00	0.00	0.00
	118	0.00	1.44	0.00	0.00	0.00	0.00
	119	0.00	1.41	0.00	0.00	0.00	0.00
	120	0.00	0.97	0.00	0.00	0.00	0.00
	121	0.00	0.99	0.00	0.00	0.00	0.00
	122	0.00	0.97	0.00	0.00	0.00	0.00
	123	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.26	0.00	0.00	0.00	0.00
	125	0.00	1.27	0.00	0.00	0.00	0.00
	126	0.00	1.43	0.00	0.00	0.00	0.00
	127	0.00	1.37	0.00	0.00	0.00	0.00
15	100	0.00	1.52	0.00	0.00	0.00	0.00
	101	0.00	1.53	0.00	0.00	0.00	0.00
	102	0.00	1.66	0.00	0.00	0.00	0.00
	103	0.00	1.62	0.00	0.00	0.00	0.00
	104	0.00	1.50	0.00	0.00	0.00	0.00
	105	0.00	1.51	0.00	0.00	0.00	0.00
	106	0.00	1.58	0.00	0.00	0.00	0.00
	107	0.00	1.54	0.00	0.00	0.00	0.00
	108	0.00	1.48	0.00	0.00	0.00	0.00
	109	0.00	1.49	0.00	0.00	0.00	0.00
	110	0.00	1.60	0.00	0.00	0.00	0.00
	111	0.00	1.56	0.00	0.00	0.00	0.00
	112	0.00	1.45	0.00	0.00	0.00	0.00
	113	0.00	1.47	0.00	0.00	0.00	0.00
	114	0.00	1.57	0.00	0.00	0.00	0.00
	115	0.00	1.53	0.00	0.00	0.00	0.00
	116	0.00	1.46	0.00	0.00	0.00	0.00
	117	0.00	1.47	0.00	0.00	0.00	0.00
	118	0.00	1.58	0.00	0.00	0.00	0.00
	119	0.00	1.54	0.00	0.00	0.00	0.00
	120	0.00	1.07	0.00	0.00	0.00	0.00
	121	0.00	1.10	0.00	0.00	0.00	0.00
	122	0.00	1.06	0.00	0.00	0.00	0.00
	123	0.00	1.07	0.00	0.00	0.00	0.00
	124	0.00	1.38	0.00	0.00	0.00	0.00
	125	0.00	1.39	0.00	0.00	0.00	0.00
	126	0.00	1.56	0.00	0.00	0.00	0.00
	127	0.00	1.50	0.00	0.00	0.00	0.00
16	100	0.00	1.40	0.00	0.00	0.00	0.00
	101	0.00	1.41	0.00	0.00	0.00	0.00
	102	0.00	1.54	0.00	0.00	0.00	0.00
	103	0.00	1.50	0.00	0.00	0.00	0.00
	104	0.00	1.40	0.00	0.00	0.00	0.00
	105	0.00	1.40	0.00	0.00	0.00	0.00
	106	0.00	1.47	0.00	0.00	0.00	0.00
	107	0.00	1.43	0.00	0.00	0.00	0.00
	108	0.00	1.38	0.00	0.00	0.00	0.00
	109	0.00	1.39	0.00	0.00	0.00	0.00
	110	0.00	1.48	0.00	0.00	0.00	0.00
	111	0.00	1.45	0.00	0.00	0.00	0.00
	112	0.00	1.36	0.00	0.00	0.00	0.00
	113	0.00	1.37	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.47	0.00	0.00	0.00	0.00
	115	0.00	1.43	0.00	0.00	0.00	0.00
	116	0.00	1.36	0.00	0.00	0.00	0.00
	117	0.00	1.38	0.00	0.00	0.00	0.00
	118	0.00	1.47	0.00	0.00	0.00	0.00
	119	0.00	1.43	0.00	0.00	0.00	0.00
	120	0.00	0.99	0.00	0.00	0.00	0.00
	121	0.00	1.00	0.00	0.00	0.00	0.00
	122	0.00	0.98	0.00	0.00	0.00	0.00
	123	0.00	0.99	0.00	0.00	0.00	0.00
	124	0.00	1.27	0.00	0.00	0.00	0.00
	125	0.00	1.29	0.00	0.00	0.00	0.00
	126	0.00	1.44	0.00	0.00	0.00	0.00
	127	0.00	1.39	0.00	0.00	0.00	0.00
17	100	0.00	1.49	0.00	0.00	0.00	0.00
	101	0.00	1.50	0.00	0.00	0.00	0.00
	102	0.00	1.62	0.00	0.00	0.00	0.00
	103	0.00	1.59	0.00	0.00	0.00	0.00
	104	0.00	1.47	0.00	0.00	0.00	0.00
	105	0.00	1.48	0.00	0.00	0.00	0.00
	106	0.00	1.61	0.00	0.00	0.00	0.00
	107	0.00	1.57	0.00	0.00	0.00	0.00
	108	0.00	1.50	0.00	0.00	0.00	0.00
	109	0.00	1.52	0.00	0.00	0.00	0.00
	110	0.00	1.63	0.00	0.00	0.00	0.00
	111	0.00	1.58	0.00	0.00	0.00	0.00
	112	0.00	1.48	0.00	0.00	0.00	0.00
	113	0.00	1.49	0.00	0.00	0.00	0.00
	114	0.00	1.60	0.00	0.00	0.00	0.00
	115	0.00	1.56	0.00	0.00	0.00	0.00
	116	0.00	1.49	0.00	0.00	0.00	0.00
	117	0.00	1.50	0.00	0.00	0.00	0.00
	118	0.00	1.61	0.00	0.00	0.00	0.00
	119	0.00	1.57	0.00	0.00	0.00	0.00
	120	0.00	1.08	0.00	0.00	0.00	0.00
	121	0.00	1.10	0.00	0.00	0.00	0.00
	122	0.00	1.07	0.00	0.00	0.00	0.00
	123	0.00	1.08	0.00	0.00	0.00	0.00
	124	0.00	1.39	0.00	0.00	0.00	0.00
	125	0.00	1.41	0.00	0.00	0.00	0.00
	126	0.00	1.58	0.00	0.00	0.00	0.00
	127	0.00	1.52	0.00	0.00	0.00	0.00
18	100	0.00	1.45	0.00	0.00	0.00	0.00
	101	0.00	1.46	0.00	0.00	0.00	0.00
	102	0.00	1.58	0.00	0.00	0.00	0.00
	103	0.00	1.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.43	0.00	0.00	0.00	0.00
	105	0.00	1.44	0.00	0.00	0.00	0.00
	106	0.00	1.63	0.00	0.00	0.00	0.00
	107	0.00	1.59	0.00	0.00	0.00	0.00
	108	0.00	1.53	0.00	0.00	0.00	0.00
	109	0.00	1.54	0.00	0.00	0.00	0.00
	110	0.00	1.65	0.00	0.00	0.00	0.00
	111	0.00	1.60	0.00	0.00	0.00	0.00
	112	0.00	1.51	0.00	0.00	0.00	0.00
	113	0.00	1.52	0.00	0.00	0.00	0.00
	114	0.00	1.63	0.00	0.00	0.00	0.00
	115	0.00	1.58	0.00	0.00	0.00	0.00
	116	0.00	1.51	0.00	0.00	0.00	0.00
	117	0.00	1.52	0.00	0.00	0.00	0.00
	118	0.00	1.63	0.00	0.00	0.00	0.00
	119	0.00	1.59	0.00	0.00	0.00	0.00
	120	0.00	1.09	0.00	0.00	0.00	0.00
	121	0.00	1.11	0.00	0.00	0.00	0.00
	122	0.00	1.08	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.40	0.00	0.00	0.00	0.00
	125	0.00	1.42	0.00	0.00	0.00	0.00
	126	0.00	1.59	0.00	0.00	0.00	0.00
	127	0.00	1.53	0.00	0.00	0.00	0.00
19	100	0.00	1.63	0.00	0.00	0.00	0.00
	101	0.00	1.64	0.00	0.00	0.00	0.00
	102	0.00	1.78	0.00	0.00	0.00	0.00
	103	0.00	1.74	0.00	0.00	0.00	0.00
	104	0.00	1.60	0.00	0.00	0.00	0.00
	105	0.00	1.61	0.00	0.00	0.00	0.00
	106	0.00	1.68	0.00	0.00	0.00	0.00
	107	0.00	1.64	0.00	0.00	0.00	0.00
	108	0.00	1.58	0.00	0.00	0.00	0.00
	109	0.00	1.60	0.00	0.00	0.00	0.00
	110	0.00	1.71	0.00	0.00	0.00	0.00
	111	0.00	1.67	0.00	0.00	0.00	0.00
	112	0.00	1.54	0.00	0.00	0.00	0.00
	113	0.00	1.56	0.00	0.00	0.00	0.00
	114	0.00	1.67	0.00	0.00	0.00	0.00
	115	0.00	1.63	0.00	0.00	0.00	0.00
	116	0.00	1.55	0.00	0.00	0.00	0.00
	117	0.00	1.57	0.00	0.00	0.00	0.00
	118	0.00	1.69	0.00	0.00	0.00	0.00
	119	0.00	1.64	0.00	0.00	0.00	0.00
	120	0.00	1.15	0.00	0.00	0.00	0.00
	121	0.00	1.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	1.14	0.00	0.00	0.00	0.00
	123	0.00	1.16	0.00	0.00	0.00	0.00
	124	0.00	1.48	0.00	0.00	0.00	0.00
	125	0.00	1.50	0.00	0.00	0.00	0.00
	126	0.00	1.68	0.00	0.00	0.00	0.00
	127	0.00	1.61	0.00	0.00	0.00	0.00
20	100	0.00	0.83	0.00	0.00	0.00	0.00
	101	0.00	0.84	0.00	0.00	0.00	0.00
	102	0.00	0.91	0.00	0.00	0.00	0.00
	103	0.00	0.89	0.00	0.00	0.00	0.00
	104	0.00	0.82	0.00	0.00	0.00	0.00
	105	0.00	0.82	0.00	0.00	0.00	0.00
	106	0.00	0.83	0.00	0.00	0.00	0.00
	107	0.00	0.80	0.00	0.00	0.00	0.00
	108	0.00	0.78	0.00	0.00	0.00	0.00
	109	0.00	0.79	0.00	0.00	0.00	0.00
	110	0.00	0.84	0.00	0.00	0.00	0.00
	111	0.00	0.82	0.00	0.00	0.00	0.00
	112	0.00	0.76	0.00	0.00	0.00	0.00
	113	0.00	0.77	0.00	0.00	0.00	0.00
	114	0.00	0.82	0.00	0.00	0.00	0.00
	115	0.00	0.80	0.00	0.00	0.00	0.00
	116	0.00	0.76	0.00	0.00	0.00	0.00
	117	0.00	0.77	0.00	0.00	0.00	0.00
	118	0.00	0.83	0.00	0.00	0.00	0.00
	119	0.00	0.81	0.00	0.00	0.00	0.00
	120	0.00	0.57	0.00	0.00	0.00	0.00
	121	0.00	0.59	0.00	0.00	0.00	0.00
	122	0.00	0.56	0.00	0.00	0.00	0.00
	123	0.00	0.57	0.00	0.00	0.00	0.00
	124	0.00	0.73	0.00	0.00	0.00	0.00
	125	0.00	0.74	0.00	0.00	0.00	0.00
	126	0.00	0.83	0.00	0.00	0.00	0.00
	127	0.00	0.80	0.00	0.00	0.00	0.00
21	100	0.00	1.60	0.00	0.00	0.00	0.00
	101	0.00	1.61	0.00	0.00	0.00	0.00
	102	0.00	1.74	0.00	0.00	0.00	0.00
	103	0.00	1.71	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.58	0.00	0.00	0.00	0.00
	106	0.00	1.71	0.00	0.00	0.00	0.00
	107	0.00	1.66	0.00	0.00	0.00	0.00
	108	0.00	1.60	0.00	0.00	0.00	0.00
	109	0.00	1.62	0.00	0.00	0.00	0.00
	110	0.00	1.73	0.00	0.00	0.00	0.00
	111	0.00	1.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.57	0.00	0.00	0.00	0.00
	113	0.00	1.59	0.00	0.00	0.00	0.00
	114	0.00	1.70	0.00	0.00	0.00	0.00
	115	0.00	1.66	0.00	0.00	0.00	0.00
	116	0.00	1.58	0.00	0.00	0.00	0.00
	117	0.00	1.60	0.00	0.00	0.00	0.00
	118	0.00	1.71	0.00	0.00	0.00	0.00
	119	0.00	1.67	0.00	0.00	0.00	0.00
	120	0.00	1.16	0.00	0.00	0.00	0.00
	121	0.00	1.20	0.00	0.00	0.00	0.00
	122	0.00	1.15	0.00	0.00	0.00	0.00
	123	0.00	1.17	0.00	0.00	0.00	0.00
	124	0.00	1.49	0.00	0.00	0.00	0.00
	125	0.00	1.51	0.00	0.00	0.00	0.00
	126	0.00	1.70	0.00	0.00	0.00	0.00
	127	0.00	1.63	0.00	0.00	0.00	0.00
22	100	0.00	1.56	0.00	0.00	0.00	0.00
	101	0.00	1.57	0.00	0.00	0.00	0.00
	102	0.00	1.70	0.00	0.00	0.00	0.00
	103	0.00	1.67	0.00	0.00	0.00	0.00
	104	0.00	1.54	0.00	0.00	0.00	0.00
	105	0.00	1.55	0.00	0.00	0.00	0.00
	106	0.00	1.73	0.00	0.00	0.00	0.00
	107	0.00	1.69	0.00	0.00	0.00	0.00
	108	0.00	1.63	0.00	0.00	0.00	0.00
	109	0.00	1.64	0.00	0.00	0.00	0.00
	110	0.00	1.76	0.00	0.00	0.00	0.00
	111	0.00	1.71	0.00	0.00	0.00	0.00
	112	0.00	1.60	0.00	0.00	0.00	0.00
	113	0.00	1.61	0.00	0.00	0.00	0.00
	114	0.00	1.73	0.00	0.00	0.00	0.00
	115	0.00	1.68	0.00	0.00	0.00	0.00
	116	0.00	1.60	0.00	0.00	0.00	0.00
	117	0.00	1.62	0.00	0.00	0.00	0.00
	118	0.00	1.74	0.00	0.00	0.00	0.00
	119	0.00	1.69	0.00	0.00	0.00	0.00
	120	0.00	1.17	0.00	0.00	0.00	0.00
	121	0.00	1.20	0.00	0.00	0.00	0.00
	122	0.00	1.16	0.00	0.00	0.00	0.00
	123	0.00	1.17	0.00	0.00	0.00	0.00
	124	0.00	1.50	0.00	0.00	0.00	0.00
	125	0.00	1.52	0.00	0.00	0.00	0.00
	126	0.00	1.71	0.00	0.00	0.00	0.00
	127	0.00	1.64	0.00	0.00	0.00	0.00
23	100	0.00	1.52	0.00	0.00	0.00	0.00
	101	0.00	1.53	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	1.65	0.00	0.00	0.00	0.00
	103	0.00	1.62	0.00	0.00	0.00	0.00
	104	0.00	1.50	0.00	0.00	0.00	0.00
	105	0.00	1.51	0.00	0.00	0.00	0.00
	106	0.00	1.76	0.00	0.00	0.00	0.00
	107	0.00	1.71	0.00	0.00	0.00	0.00
	108	0.00	1.65	0.00	0.00	0.00	0.00
	109	0.00	1.66	0.00	0.00	0.00	0.00
	110	0.00	1.78	0.00	0.00	0.00	0.00
	111	0.00	1.73	0.00	0.00	0.00	0.00
	112	0.00	1.62	0.00	0.00	0.00	0.00
	113	0.00	1.63	0.00	0.00	0.00	0.00
	114	0.00	1.75	0.00	0.00	0.00	0.00
	115	0.00	1.70	0.00	0.00	0.00	0.00
	116	0.00	1.63	0.00	0.00	0.00	0.00
	117	0.00	1.64	0.00	0.00	0.00	0.00
	118	0.00	1.76	0.00	0.00	0.00	0.00
	119	0.00	1.71	0.00	0.00	0.00	0.00
	120	0.00	1.18	0.00	0.00	0.00	0.00
	121	0.00	1.21	0.00	0.00	0.00	0.00
	122	0.00	1.17	0.00	0.00	0.00	0.00
	123	0.00	1.18	0.00	0.00	0.00	0.00
	124	0.00	1.51	0.00	0.00	0.00	0.00
	125	0.00	1.53	0.00	0.00	0.00	0.00
	126	0.00	1.72	0.00	0.00	0.00	0.00
	127	0.00	1.65	0.00	0.00	0.00	0.00
24	100	0.00	1.71	0.00	0.00	0.00	0.00
	101	0.00	1.72	0.00	0.00	0.00	0.00
	102	0.00	1.86	0.00	0.00	0.00	0.00
	103	0.00	1.82	0.00	0.00	0.00	0.00
	104	0.00	1.67	0.00	0.00	0.00	0.00
	105	0.00	1.69	0.00	0.00	0.00	0.00
	106	0.00	1.81	0.00	0.00	0.00	0.00
	107	0.00	1.76	0.00	0.00	0.00	0.00
	108	0.00	1.70	0.00	0.00	0.00	0.00
	109	0.00	1.72	0.00	0.00	0.00	0.00
	110	0.00	1.85	0.00	0.00	0.00	0.00
	111	0.00	1.80	0.00	0.00	0.00	0.00
	112	0.00	1.66	0.00	0.00	0.00	0.00
	113	0.00	1.68	0.00	0.00	0.00	0.00
	114	0.00	1.80	0.00	0.00	0.00	0.00
	115	0.00	1.75	0.00	0.00	0.00	0.00
	116	0.00	1.67	0.00	0.00	0.00	0.00
	117	0.00	1.69	0.00	0.00	0.00	0.00
	118	0.00	1.82	0.00	0.00	0.00	0.00
	119	0.00	1.77	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	1.24	0.00	0.00	0.00	0.00
	121	0.00	1.29	0.00	0.00	0.00	0.00
	122	0.00	1.23	0.00	0.00	0.00	0.00
	123	0.00	1.25	0.00	0.00	0.00	0.00
	124	0.00	1.59	0.00	0.00	0.00	0.00
	125	0.00	1.61	0.00	0.00	0.00	0.00
	126	0.00	1.81	0.00	0.00	0.00	0.00
	127	0.00	1.74	0.00	0.00	0.00	0.00
25	100	0.00	0.87	0.00	0.00	0.00	0.00
	101	0.00	0.88	0.00	0.00	0.00	0.00
	102	0.00	0.95	0.00	0.00	0.00	0.00
	103	0.00	0.93	0.00	0.00	0.00	0.00
	104	0.00	0.85	0.00	0.00	0.00	0.00
	105	0.00	0.86	0.00	0.00	0.00	0.00
	106	0.00	0.89	0.00	0.00	0.00	0.00
	107	0.00	0.87	0.00	0.00	0.00	0.00
	108	0.00	0.84	0.00	0.00	0.00	0.00
	109	0.00	0.85	0.00	0.00	0.00	0.00
	110	0.00	0.91	0.00	0.00	0.00	0.00
	111	0.00	0.89	0.00	0.00	0.00	0.00
	112	0.00	0.82	0.00	0.00	0.00	0.00
	113	0.00	0.83	0.00	0.00	0.00	0.00
	114	0.00	0.89	0.00	0.00	0.00	0.00
	115	0.00	0.86	0.00	0.00	0.00	0.00
	116	0.00	0.82	0.00	0.00	0.00	0.00
	117	0.00	0.83	0.00	0.00	0.00	0.00
	118	0.00	0.90	0.00	0.00	0.00	0.00
	119	0.00	0.87	0.00	0.00	0.00	0.00
	120	0.00	0.62	0.00	0.00	0.00	0.00
	121	0.00	0.64	0.00	0.00	0.00	0.00
	122	0.00	0.61	0.00	0.00	0.00	0.00
	123	0.00	0.62	0.00	0.00	0.00	0.00
	124	0.00	0.79	0.00	0.00	0.00	0.00
	125	0.00	0.80	0.00	0.00	0.00	0.00
	126	0.00	0.90	0.00	0.00	0.00	0.00
	127	0.00	0.86	0.00	0.00	0.00	0.00
26	100	0.00	1.67	0.00	0.00	0.00	0.00
	101	0.00	1.69	0.00	0.00	0.00	0.00
	102	0.00	1.82	0.00	0.00	0.00	0.00
	103	0.00	1.78	0.00	0.00	0.00	0.00
	104	0.00	1.64	0.00	0.00	0.00	0.00
	105	0.00	1.65	0.00	0.00	0.00	0.00
	106	0.00	1.84	0.00	0.00	0.00	0.00
	107	0.00	1.79	0.00	0.00	0.00	0.00
	108	0.00	1.73	0.00	0.00	0.00	0.00
	109	0.00	1.75	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	1.87	0.00	0.00	0.00	0.00
	111	0.00	1.82	0.00	0.00	0.00	0.00
	112	0.00	1.69	0.00	0.00	0.00	0.00
	113	0.00	1.70	0.00	0.00	0.00	0.00
	114	0.00	1.83	0.00	0.00	0.00	0.00
	115	0.00	1.78	0.00	0.00	0.00	0.00
	116	0.00	1.70	0.00	0.00	0.00	0.00
	117	0.00	1.72	0.00	0.00	0.00	0.00
	118	0.00	1.84	0.00	0.00	0.00	0.00
	119	0.00	1.79	0.00	0.00	0.00	0.00
	120	0.00	1.25	0.00	0.00	0.00	0.00
	121	0.00	1.30	0.00	0.00	0.00	0.00
	122	0.00	1.24	0.00	0.00	0.00	0.00
	123	0.00	1.26	0.00	0.00	0.00	0.00
	124	0.00	1.60	0.00	0.00	0.00	0.00
	125	0.00	1.63	0.00	0.00	0.00	0.00
	126	0.00	1.83	0.00	0.00	0.00	0.00
	127	0.00	1.75	0.00	0.00	0.00	0.00
27	100	0.00	1.63	0.00	0.00	0.00	0.00
	101	0.00	1.65	0.00	0.00	0.00	0.00
	102	0.00	1.78	0.00	0.00	0.00	0.00
	103	0.00	1.74	0.00	0.00	0.00	0.00
	104	0.00	1.60	0.00	0.00	0.00	0.00
	105	0.00	1.62	0.00	0.00	0.00	0.00
	106	0.00	1.86	0.00	0.00	0.00	0.00
	107	0.00	1.81	0.00	0.00	0.00	0.00
	108	0.00	1.75	0.00	0.00	0.00	0.00
	109	0.00	1.77	0.00	0.00	0.00	0.00
	110	0.00	1.89	0.00	0.00	0.00	0.00
	111	0.00	1.84	0.00	0.00	0.00	0.00
	112	0.00	1.71	0.00	0.00	0.00	0.00
	113	0.00	1.73	0.00	0.00	0.00	0.00
	114	0.00	1.85	0.00	0.00	0.00	0.00
	115	0.00	1.80	0.00	0.00	0.00	0.00
	116	0.00	1.72	0.00	0.00	0.00	0.00
	117	0.00	1.74	0.00	0.00	0.00	0.00
	118	0.00	1.86	0.00	0.00	0.00	0.00
	119	0.00	1.81	0.00	0.00	0.00	0.00
	120	0.00	1.26	0.00	0.00	0.00	0.00
	121	0.00	1.30	0.00	0.00	0.00	0.00
	122	0.00	1.25	0.00	0.00	0.00	0.00
	123	0.00	1.27	0.00	0.00	0.00	0.00
	124	0.00	1.62	0.00	0.00	0.00	0.00
	125	0.00	1.64	0.00	0.00	0.00	0.00
	126	0.00	1.84	0.00	0.00	0.00	0.00
	127	0.00	1.77	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
28	100	0.00	1.59	0.00	0.00	0.00	0.00
	101	0.00	1.61	0.00	0.00	0.00	0.00
	102	0.00	1.73	0.00	0.00	0.00	0.00
	103	0.00	1.70	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.58	0.00	0.00	0.00	0.00
	106	0.00	1.88	0.00	0.00	0.00	0.00
	107	0.00	1.83	0.00	0.00	0.00	0.00
	108	0.00	1.77	0.00	0.00	0.00	0.00
	109	0.00	1.78	0.00	0.00	0.00	0.00
	110	0.00	1.91	0.00	0.00	0.00	0.00
	111	0.00	1.86	0.00	0.00	0.00	0.00
	112	0.00	1.73	0.00	0.00	0.00	0.00
	113	0.00	1.75	0.00	0.00	0.00	0.00
	114	0.00	1.87	0.00	0.00	0.00	0.00
	115	0.00	1.83	0.00	0.00	0.00	0.00
	116	0.00	1.74	0.00	0.00	0.00	0.00
	117	0.00	1.76	0.00	0.00	0.00	0.00
	118	0.00	1.88	0.00	0.00	0.00	0.00
	119	0.00	1.83	0.00	0.00	0.00	0.00
	120	0.00	1.27	0.00	0.00	0.00	0.00
	121	0.00	1.31	0.00	0.00	0.00	0.00
	122	0.00	1.26	0.00	0.00	0.00	0.00
	123	0.00	1.27	0.00	0.00	0.00	0.00
	124	0.00	1.63	0.00	0.00	0.00	0.00
	125	0.00	1.64	0.00	0.00	0.00	0.00
	126	0.00	1.85	0.00	0.00	0.00	0.00
	127	0.00	1.78	0.00	0.00	0.00	0.00
29	100	0.00	0.89	0.00	0.00	0.00	0.00
	101	0.00	0.90	0.00	0.00	0.00	0.00
	102	0.00	0.97	0.00	0.00	0.00	0.00
	103	0.00	0.95	0.00	0.00	0.00	0.00
	104	0.00	0.87	0.00	0.00	0.00	0.00
	105	0.00	0.88	0.00	0.00	0.00	0.00
	106	0.00	0.97	0.00	0.00	0.00	0.00
	107	0.00	0.94	0.00	0.00	0.00	0.00
	108	0.00	0.91	0.00	0.00	0.00	0.00
	109	0.00	0.92	0.00	0.00	0.00	0.00
	110	0.00	0.99	0.00	0.00	0.00	0.00
	111	0.00	0.97	0.00	0.00	0.00	0.00
	112	0.00	0.89	0.00	0.00	0.00	0.00
	113	0.00	0.90	0.00	0.00	0.00	0.00
	114	0.00	0.96	0.00	0.00	0.00	0.00
	115	0.00	0.94	0.00	0.00	0.00	0.00
	116	0.00	0.90	0.00	0.00	0.00	0.00
	117	0.00	0.91	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	0.97	0.00	0.00	0.00	0.00
	119	0.00	0.95	0.00	0.00	0.00	0.00
	120	0.00	0.67	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.66	0.00	0.00	0.00	0.00
	123	0.00	0.67	0.00	0.00	0.00	0.00
	124	0.00	0.85	0.00	0.00	0.00	0.00
	125	0.00	0.86	0.00	0.00	0.00	0.00
	126	0.00	0.97	0.00	0.00	0.00	0.00
	127	0.00	0.93	0.00	0.00	0.00	0.00
30	100	0.00	0.87	0.00	0.00	0.00	0.00
	101	0.00	0.88	0.00	0.00	0.00	0.00
	102	0.00	0.95	0.00	0.00	0.00	0.00
	103	0.00	0.93	0.00	0.00	0.00	0.00
	104	0.00	0.85	0.00	0.00	0.00	0.00
	105	0.00	0.86	0.00	0.00	0.00	0.00
	106	0.00	0.98	0.00	0.00	0.00	0.00
	107	0.00	0.96	0.00	0.00	0.00	0.00
	108	0.00	0.93	0.00	0.00	0.00	0.00
	109	0.00	0.94	0.00	0.00	0.00	0.00
	110	0.00	1.00	0.00	0.00	0.00	0.00
	111	0.00	0.98	0.00	0.00	0.00	0.00
	112	0.00	0.90	0.00	0.00	0.00	0.00
	113	0.00	0.91	0.00	0.00	0.00	0.00
	114	0.00	0.98	0.00	0.00	0.00	0.00
	115	0.00	0.95	0.00	0.00	0.00	0.00
	116	0.00	0.91	0.00	0.00	0.00	0.00
	117	0.00	0.92	0.00	0.00	0.00	0.00
	118	0.00	0.98	0.00	0.00	0.00	0.00
	119	0.00	0.96	0.00	0.00	0.00	0.00
	120	0.00	0.67	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.67	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.86	0.00	0.00	0.00	0.00
	125	0.00	0.87	0.00	0.00	0.00	0.00
	126	0.00	0.98	0.00	0.00	0.00	0.00
	127	0.00	0.94	0.00	0.00	0.00	0.00
31	100	0.00	0.86	0.00	0.00	0.00	0.00
	101	0.00	0.86	0.00	0.00	0.00	0.00
	102	0.00	0.93	0.00	0.00	0.00	0.00
	103	0.00	0.91	0.00	0.00	0.00	0.00
	104	0.00	0.84	0.00	0.00	0.00	0.00
	105	0.00	0.84	0.00	0.00	0.00	0.00
	106	0.00	0.99	0.00	0.00	0.00	0.00
	107	0.00	0.97	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.94	0.00	0.00	0.00	0.00
	109	0.00	0.95	0.00	0.00	0.00	0.00
	110	0.00	1.01	0.00	0.00	0.00	0.00
	111	0.00	0.99	0.00	0.00	0.00	0.00
	112	0.00	0.91	0.00	0.00	0.00	0.00
	113	0.00	0.92	0.00	0.00	0.00	0.00
	114	0.00	0.99	0.00	0.00	0.00	0.00
	115	0.00	0.96	0.00	0.00	0.00	0.00
	116	0.00	0.92	0.00	0.00	0.00	0.00
	117	0.00	0.93	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	0.97	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.67	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.86	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00
	126	0.00	0.98	0.00	0.00	0.00	0.00
	127	0.00	0.95	0.00	0.00	0.00	0.00
32	100	0.00	1.32	0.00	0.00	0.00	0.00
	101	0.00	1.33	0.00	0.00	0.00	0.00
	102	0.00	1.44	0.00	0.00	0.00	0.00
	103	0.00	1.41	0.00	0.00	0.00	0.00
	104	0.00	1.32	0.00	0.00	0.00	0.00
	105	0.00	1.32	0.00	0.00	0.00	0.00
	106	0.00	1.51	0.00	0.00	0.00	0.00
	107	0.00	1.47	0.00	0.00	0.00	0.00
	108	0.00	1.41	0.00	0.00	0.00	0.00
	109	0.00	1.42	0.00	0.00	0.00	0.00
	110	0.00	1.52	0.00	0.00	0.00	0.00
	111	0.00	1.48	0.00	0.00	0.00	0.00
	112	0.00	1.40	0.00	0.00	0.00	0.00
	113	0.00	1.41	0.00	0.00	0.00	0.00
	114	0.00	1.51	0.00	0.00	0.00	0.00
	115	0.00	1.47	0.00	0.00	0.00	0.00
	116	0.00	1.40	0.00	0.00	0.00	0.00
	117	0.00	1.41	0.00	0.00	0.00	0.00
	118	0.00	1.51	0.00	0.00	0.00	0.00
	119	0.00	1.47	0.00	0.00	0.00	0.00
	120	0.00	1.00	0.00	0.00	0.00	0.00
	121	0.00	1.01	0.00	0.00	0.00	0.00
	122	0.00	1.00	0.00	0.00	0.00	0.00
	123	0.00	1.00	0.00	0.00	0.00	0.00
	124	0.00	1.29	0.00	0.00	0.00	0.00
	125	0.00	1.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	1.46	0.00	0.00	0.00	0.00
	127	0.00	1.40	0.00	0.00	0.00	0.00
33	100	0.00	1.40	0.00	0.00	0.00	0.00
	101	0.00	1.41	0.00	0.00	0.00	0.00
	102	0.00	1.53	0.00	0.00	0.00	0.00
	103	0.00	1.49	0.00	0.00	0.00	0.00
	104	0.00	1.39	0.00	0.00	0.00	0.00
	105	0.00	1.40	0.00	0.00	0.00	0.00
	106	0.00	1.65	0.00	0.00	0.00	0.00
	107	0.00	1.60	0.00	0.00	0.00	0.00
	108	0.00	1.54	0.00	0.00	0.00	0.00
	109	0.00	1.55	0.00	0.00	0.00	0.00
	110	0.00	1.66	0.00	0.00	0.00	0.00
	111	0.00	1.62	0.00	0.00	0.00	0.00
	112	0.00	1.52	0.00	0.00	0.00	0.00
	113	0.00	1.53	0.00	0.00	0.00	0.00
	114	0.00	1.64	0.00	0.00	0.00	0.00
	115	0.00	1.60	0.00	0.00	0.00	0.00
	116	0.00	1.53	0.00	0.00	0.00	0.00
	117	0.00	1.54	0.00	0.00	0.00	0.00
	118	0.00	1.64	0.00	0.00	0.00	0.00
	119	0.00	1.60	0.00	0.00	0.00	0.00
	120	0.00	1.10	0.00	0.00	0.00	0.00
	121	0.00	1.11	0.00	0.00	0.00	0.00
	122	0.00	1.09	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.41	0.00	0.00	0.00	0.00
	125	0.00	1.42	0.00	0.00	0.00	0.00
	126	0.00	1.59	0.00	0.00	0.00	0.00
	127	0.00	1.53	0.00	0.00	0.00	0.00
34	100	0.00	1.27	0.00	0.00	0.00	0.00
	101	0.00	1.27	0.00	0.00	0.00	0.00
	102	0.00	1.38	0.00	0.00	0.00	0.00
	103	0.00	1.35	0.00	0.00	0.00	0.00
	104	0.00	1.27	0.00	0.00	0.00	0.00
	105	0.00	1.27	0.00	0.00	0.00	0.00
	106	0.00	1.52	0.00	0.00	0.00	0.00
	107	0.00	1.48	0.00	0.00	0.00	0.00
	108	0.00	1.42	0.00	0.00	0.00	0.00
	109	0.00	1.43	0.00	0.00	0.00	0.00
	110	0.00	1.52	0.00	0.00	0.00	0.00
	111	0.00	1.48	0.00	0.00	0.00	0.00
	112	0.00	1.41	0.00	0.00	0.00	0.00
	113	0.00	1.42	0.00	0.00	0.00	0.00
	114	0.00	1.52	0.00	0.00	0.00	0.00
	115	0.00	1.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.41	0.00	0.00	0.00	0.00
	117	0.00	1.42	0.00	0.00	0.00	0.00
	118	0.00	1.51	0.00	0.00	0.00	0.00
	119	0.00	1.48	0.00	0.00	0.00	0.00
	120	0.00	1.00	0.00	0.00	0.00	0.00
	121	0.00	1.01	0.00	0.00	0.00	0.00
	122	0.00	1.00	0.00	0.00	0.00	0.00
	123	0.00	1.00	0.00	0.00	0.00	0.00
	124	0.00	1.29	0.00	0.00	0.00	0.00
	125	0.00	1.30	0.00	0.00	0.00	0.00
	126	0.00	1.45	0.00	0.00	0.00	0.00
	127	0.00	1.40	0.00	0.00	0.00	0.00
35	100	0.00	1.35	0.00	0.00	0.00	0.00
	101	0.00	1.36	0.00	0.00	0.00	0.00
	102	0.00	1.47	0.00	0.00	0.00	0.00
	103	0.00	1.44	0.00	0.00	0.00	0.00
	104	0.00	1.34	0.00	0.00	0.00	0.00
	105	0.00	1.35	0.00	0.00	0.00	0.00
	106	0.00	1.65	0.00	0.00	0.00	0.00
	107	0.00	1.61	0.00	0.00	0.00	0.00
	108	0.00	1.55	0.00	0.00	0.00	0.00
	109	0.00	1.56	0.00	0.00	0.00	0.00
	110	0.00	1.66	0.00	0.00	0.00	0.00
	111	0.00	1.62	0.00	0.00	0.00	0.00
	112	0.00	1.53	0.00	0.00	0.00	0.00
	113	0.00	1.54	0.00	0.00	0.00	0.00
	114	0.00	1.65	0.00	0.00	0.00	0.00
	115	0.00	1.61	0.00	0.00	0.00	0.00
	116	0.00	1.53	0.00	0.00	0.00	0.00
	117	0.00	1.54	0.00	0.00	0.00	0.00
	118	0.00	1.65	0.00	0.00	0.00	0.00
	119	0.00	1.61	0.00	0.00	0.00	0.00
	120	0.00	1.10	0.00	0.00	0.00	0.00
	121	0.00	1.11	0.00	0.00	0.00	0.00
	122	0.00	1.09	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.41	0.00	0.00	0.00	0.00
	125	0.00	1.42	0.00	0.00	0.00	0.00
	126	0.00	1.59	0.00	0.00	0.00	0.00
	127	0.00	1.53	0.00	0.00	0.00	0.00
36	100	0.00	1.21	0.00	0.00	0.00	0.00
	101	0.00	1.22	0.00	0.00	0.00	0.00
	102	0.00	1.32	0.00	0.00	0.00	0.00
	103	0.00	1.29	0.00	0.00	0.00	0.00
	104	0.00	1.22	0.00	0.00	0.00	0.00
	105	0.00	1.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.53	0.00	0.00	0.00	0.00
	107	0.00	1.49	0.00	0.00	0.00	0.00
	108	0.00	1.42	0.00	0.00	0.00	0.00
	109	0.00	1.43	0.00	0.00	0.00	0.00
	110	0.00	1.53	0.00	0.00	0.00	0.00
	111	0.00	1.49	0.00	0.00	0.00	0.00
	112	0.00	1.42	0.00	0.00	0.00	0.00
	113	0.00	1.43	0.00	0.00	0.00	0.00
	114	0.00	1.52	0.00	0.00	0.00	0.00
	115	0.00	1.49	0.00	0.00	0.00	0.00
	116	0.00	1.42	0.00	0.00	0.00	0.00
	117	0.00	1.43	0.00	0.00	0.00	0.00
	118	0.00	1.52	0.00	0.00	0.00	0.00
	119	0.00	1.48	0.00	0.00	0.00	0.00
	120	0.00	1.01	0.00	0.00	0.00	0.00
	121	0.00	1.00	0.00	0.00	0.00	0.00
	122	0.00	1.00	0.00	0.00	0.00	0.00
	123	0.00	1.00	0.00	0.00	0.00	0.00
	124	0.00	1.29	0.00	0.00	0.00	0.00
	125	0.00	1.30	0.00	0.00	0.00	0.00
	126	0.00	1.45	0.00	0.00	0.00	0.00
	127	0.00	1.40	0.00	0.00	0.00	0.00
37	100	0.00	1.30	0.00	0.00	0.00	0.00
	101	0.00	1.30	0.00	0.00	0.00	0.00
	102	0.00	1.41	0.00	0.00	0.00	0.00
	103	0.00	1.38	0.00	0.00	0.00	0.00
	104	0.00	1.29	0.00	0.00	0.00	0.00
	105	0.00	1.30	0.00	0.00	0.00	0.00
	106	0.00	1.66	0.00	0.00	0.00	0.00
	107	0.00	1.62	0.00	0.00	0.00	0.00
	108	0.00	1.55	0.00	0.00	0.00	0.00
	109	0.00	1.56	0.00	0.00	0.00	0.00
	110	0.00	1.67	0.00	0.00	0.00	0.00
	111	0.00	1.63	0.00	0.00	0.00	0.00
	112	0.00	1.54	0.00	0.00	0.00	0.00
	113	0.00	1.55	0.00	0.00	0.00	0.00
	114	0.00	1.66	0.00	0.00	0.00	0.00
	115	0.00	1.62	0.00	0.00	0.00	0.00
	116	0.00	1.54	0.00	0.00	0.00	0.00
	117	0.00	1.55	0.00	0.00	0.00	0.00
	118	0.00	1.66	0.00	0.00	0.00	0.00
	119	0.00	1.62	0.00	0.00	0.00	0.00
	120	0.00	1.10	0.00	0.00	0.00	0.00
	121	0.00	1.11	0.00	0.00	0.00	0.00
	122	0.00	1.10	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.41	0.00	0.00	0.00	0.00
	125	0.00	1.42	0.00	0.00	0.00	0.00
	126	0.00	1.58	0.00	0.00	0.00	0.00
	127	0.00	1.53	0.00	0.00	0.00	0.00
38	100	0.00	0.62	0.00	0.00	0.00	0.00
	101	0.00	0.63	0.00	0.00	0.00	0.00
	102	0.00	0.68	0.00	0.00	0.00	0.00
	103	0.00	0.66	0.00	0.00	0.00	0.00
	104	0.00	0.62	0.00	0.00	0.00	0.00
	105	0.00	0.63	0.00	0.00	0.00	0.00
	106	0.00	0.84	0.00	0.00	0.00	0.00
	107	0.00	0.82	0.00	0.00	0.00	0.00
	108	0.00	0.78	0.00	0.00	0.00	0.00
	109	0.00	0.79	0.00	0.00	0.00	0.00
	110	0.00	0.84	0.00	0.00	0.00	0.00
	111	0.00	0.82	0.00	0.00	0.00	0.00
	112	0.00	0.78	0.00	0.00	0.00	0.00
	113	0.00	0.78	0.00	0.00	0.00	0.00
	114	0.00	0.83	0.00	0.00	0.00	0.00
	115	0.00	0.81	0.00	0.00	0.00	0.00
	116	0.00	0.78	0.00	0.00	0.00	0.00
	117	0.00	0.78	0.00	0.00	0.00	0.00
	118	0.00	0.83	0.00	0.00	0.00	0.00
	119	0.00	0.81	0.00	0.00	0.00	0.00
	120	0.00	0.55	0.00	0.00	0.00	0.00
	121	0.00	0.55	0.00	0.00	0.00	0.00
	122	0.00	0.55	0.00	0.00	0.00	0.00
	123	0.00	0.55	0.00	0.00	0.00	0.00
	124	0.00	0.70	0.00	0.00	0.00	0.00
	125	0.00	0.71	0.00	0.00	0.00	0.00
	126	0.00	0.79	0.00	0.00	0.00	0.00
	127	0.00	0.76	0.00	0.00	0.00	0.00
39	100	0.00	1.47	0.00	0.00	0.00	0.00
	101	0.00	1.49	0.00	0.00	0.00	0.00
	102	0.00	1.60	0.00	0.00	0.00	0.00
	103	0.00	1.57	0.00	0.00	0.00	0.00
	104	0.00	1.46	0.00	0.00	0.00	0.00
	105	0.00	1.47	0.00	0.00	0.00	0.00
	106	0.00	1.77	0.00	0.00	0.00	0.00
	107	0.00	1.73	0.00	0.00	0.00	0.00
	108	0.00	1.66	0.00	0.00	0.00	0.00
	109	0.00	1.67	0.00	0.00	0.00	0.00
	110	0.00	1.79	0.00	0.00	0.00	0.00
	111	0.00	1.74	0.00	0.00	0.00	0.00
	112	0.00	1.64	0.00	0.00	0.00	0.00
	113	0.00	1.65	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.77	0.00	0.00	0.00	0.00
	115	0.00	1.72	0.00	0.00	0.00	0.00
	116	0.00	1.64	0.00	0.00	0.00	0.00
	117	0.00	1.65	0.00	0.00	0.00	0.00
	118	0.00	1.77	0.00	0.00	0.00	0.00
	119	0.00	1.73	0.00	0.00	0.00	0.00
	120	0.00	1.19	0.00	0.00	0.00	0.00
	121	0.00	1.21	0.00	0.00	0.00	0.00
	122	0.00	1.18	0.00	0.00	0.00	0.00
	123	0.00	1.18	0.00	0.00	0.00	0.00
	124	0.00	1.52	0.00	0.00	0.00	0.00
	125	0.00	1.53	0.00	0.00	0.00	0.00
	126	0.00	1.72	0.00	0.00	0.00	0.00
	127	0.00	1.66	0.00	0.00	0.00	0.00
40	100	0.00	1.43	0.00	0.00	0.00	0.00
	101	0.00	1.44	0.00	0.00	0.00	0.00
	102	0.00	1.55	0.00	0.00	0.00	0.00
	103	0.00	1.52	0.00	0.00	0.00	0.00
	104	0.00	1.41	0.00	0.00	0.00	0.00
	105	0.00	1.42	0.00	0.00	0.00	0.00
	106	0.00	1.78	0.00	0.00	0.00	0.00
	107	0.00	1.74	0.00	0.00	0.00	0.00
	108	0.00	1.67	0.00	0.00	0.00	0.00
	109	0.00	1.68	0.00	0.00	0.00	0.00
	110	0.00	1.80	0.00	0.00	0.00	0.00
	111	0.00	1.75	0.00	0.00	0.00	0.00
	112	0.00	1.65	0.00	0.00	0.00	0.00
	113	0.00	1.66	0.00	0.00	0.00	0.00
	114	0.00	1.78	0.00	0.00	0.00	0.00
	115	0.00	1.73	0.00	0.00	0.00	0.00
	116	0.00	1.65	0.00	0.00	0.00	0.00
	117	0.00	1.67	0.00	0.00	0.00	0.00
	118	0.00	1.78	0.00	0.00	0.00	0.00
	119	0.00	1.74	0.00	0.00	0.00	0.00
	120	0.00	1.19	0.00	0.00	0.00	0.00
	121	0.00	1.21	0.00	0.00	0.00	0.00
	122	0.00	1.18	0.00	0.00	0.00	0.00
	123	0.00	1.19	0.00	0.00	0.00	0.00
	124	0.00	1.52	0.00	0.00	0.00	0.00
	125	0.00	1.54	0.00	0.00	0.00	0.00
	126	0.00	1.72	0.00	0.00	0.00	0.00
	127	0.00	1.66	0.00	0.00	0.00	0.00
41	100	0.00	1.38	0.00	0.00	0.00	0.00
	101	0.00	1.39	0.00	0.00	0.00	0.00
	102	0.00	1.49	0.00	0.00	0.00	0.00
	103	0.00	1.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.37	0.00	0.00	0.00	0.00
	105	0.00	1.38	0.00	0.00	0.00	0.00
	106	0.00	1.79	0.00	0.00	0.00	0.00
	107	0.00	1.75	0.00	0.00	0.00	0.00
	108	0.00	1.68	0.00	0.00	0.00	0.00
	109	0.00	1.69	0.00	0.00	0.00	0.00
	110	0.00	1.81	0.00	0.00	0.00	0.00
	111	0.00	1.76	0.00	0.00	0.00	0.00
	112	0.00	1.66	0.00	0.00	0.00	0.00
	113	0.00	1.68	0.00	0.00	0.00	0.00
	114	0.00	1.79	0.00	0.00	0.00	0.00
	115	0.00	1.74	0.00	0.00	0.00	0.00
	116	0.00	1.66	0.00	0.00	0.00	0.00
	117	0.00	1.67	0.00	0.00	0.00	0.00
	118	0.00	1.79	0.00	0.00	0.00	0.00
	119	0.00	1.74	0.00	0.00	0.00	0.00
	120	0.00	1.19	0.00	0.00	0.00	0.00
	121	0.00	1.21	0.00	0.00	0.00	0.00
	122	0.00	1.19	0.00	0.00	0.00	0.00
	123	0.00	1.19	0.00	0.00	0.00	0.00
	124	0.00	1.52	0.00	0.00	0.00	0.00
	125	0.00	1.53	0.00	0.00	0.00	0.00
	126	0.00	1.72	0.00	0.00	0.00	0.00
	127	0.00	1.66	0.00	0.00	0.00	0.00
42	100	0.00	0.66	0.00	0.00	0.00	0.00
	101	0.00	0.67	0.00	0.00	0.00	0.00
	102	0.00	0.72	0.00	0.00	0.00	0.00
	103	0.00	0.71	0.00	0.00	0.00	0.00
	104	0.00	0.66	0.00	0.00	0.00	0.00
	105	0.00	0.67	0.00	0.00	0.00	0.00
	106	0.00	0.90	0.00	0.00	0.00	0.00
	107	0.00	0.88	0.00	0.00	0.00	0.00
	108	0.00	0.84	0.00	0.00	0.00	0.00
	109	0.00	0.85	0.00	0.00	0.00	0.00
	110	0.00	0.91	0.00	0.00	0.00	0.00
	111	0.00	0.88	0.00	0.00	0.00	0.00
	112	0.00	0.84	0.00	0.00	0.00	0.00
	113	0.00	0.84	0.00	0.00	0.00	0.00
	114	0.00	0.90	0.00	0.00	0.00	0.00
	115	0.00	0.88	0.00	0.00	0.00	0.00
	116	0.00	0.84	0.00	0.00	0.00	0.00
	117	0.00	0.84	0.00	0.00	0.00	0.00
	118	0.00	0.90	0.00	0.00	0.00	0.00
	119	0.00	0.88	0.00	0.00	0.00	0.00
	120	0.00	0.60	0.00	0.00	0.00	0.00
	121	0.00	0.60	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	0.60	0.00	0.00	0.00	0.00
	123	0.00	0.59	0.00	0.00	0.00	0.00
	124	0.00	0.76	0.00	0.00	0.00	0.00
	125	0.00	0.77	0.00	0.00	0.00	0.00
	126	0.00	0.86	0.00	0.00	0.00	0.00
	127	0.00	0.83	0.00	0.00	0.00	0.00
43	100	0.00	1.55	0.00	0.00	0.00	0.00
	101	0.00	1.56	0.00	0.00	0.00	0.00
	102	0.00	1.68	0.00	0.00	0.00	0.00
	103	0.00	1.65	0.00	0.00	0.00	0.00
	104	0.00	1.53	0.00	0.00	0.00	0.00
	105	0.00	1.54	0.00	0.00	0.00	0.00
	106	0.00	1.90	0.00	0.00	0.00	0.00
	107	0.00	1.85	0.00	0.00	0.00	0.00
	108	0.00	1.78	0.00	0.00	0.00	0.00
	109	0.00	1.80	0.00	0.00	0.00	0.00
	110	0.00	1.92	0.00	0.00	0.00	0.00
	111	0.00	1.87	0.00	0.00	0.00	0.00
	112	0.00	1.75	0.00	0.00	0.00	0.00
	113	0.00	1.77	0.00	0.00	0.00	0.00
	114	0.00	1.89	0.00	0.00	0.00	0.00
	115	0.00	1.84	0.00	0.00	0.00	0.00
	116	0.00	1.76	0.00	0.00	0.00	0.00
	117	0.00	1.77	0.00	0.00	0.00	0.00
	118	0.00	1.90	0.00	0.00	0.00	0.00
	119	0.00	1.85	0.00	0.00	0.00	0.00
	120	0.00	1.28	0.00	0.00	0.00	0.00
	121	0.00	1.31	0.00	0.00	0.00	0.00
	122	0.00	1.27	0.00	0.00	0.00	0.00
	123	0.00	1.28	0.00	0.00	0.00	0.00
	124	0.00	1.63	0.00	0.00	0.00	0.00
	125	0.00	1.65	0.00	0.00	0.00	0.00
	126	0.00	1.85	0.00	0.00	0.00	0.00
	127	0.00	1.78	0.00	0.00	0.00	0.00
44	100	0.00	1.50	0.00	0.00	0.00	0.00
	101	0.00	1.51	0.00	0.00	0.00	0.00
	102	0.00	1.63	0.00	0.00	0.00	0.00
	103	0.00	1.60	0.00	0.00	0.00	0.00
	104	0.00	1.48	0.00	0.00	0.00	0.00
	105	0.00	1.49	0.00	0.00	0.00	0.00
	106	0.00	1.91	0.00	0.00	0.00	0.00
	107	0.00	1.86	0.00	0.00	0.00	0.00
	108	0.00	1.79	0.00	0.00	0.00	0.00
	109	0.00	1.81	0.00	0.00	0.00	0.00
	110	0.00	1.93	0.00	0.00	0.00	0.00
	111	0.00	1.88	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.77	0.00	0.00	0.00	0.00
	113	0.00	1.78	0.00	0.00	0.00	0.00
	114	0.00	1.91	0.00	0.00	0.00	0.00
	115	0.00	1.86	0.00	0.00	0.00	0.00
	116	0.00	1.77	0.00	0.00	0.00	0.00
	117	0.00	1.79	0.00	0.00	0.00	0.00
	118	0.00	1.91	0.00	0.00	0.00	0.00
	119	0.00	1.86	0.00	0.00	0.00	0.00
	120	0.00	1.28	0.00	0.00	0.00	0.00
	121	0.00	1.31	0.00	0.00	0.00	0.00
	122	0.00	1.28	0.00	0.00	0.00	0.00
	123	0.00	1.28	0.00	0.00	0.00	0.00
	124	0.00	1.64	0.00	0.00	0.00	0.00
	125	0.00	1.65	0.00	0.00	0.00	0.00
	126	0.00	1.85	0.00	0.00	0.00	0.00
	127	0.00	1.78	0.00	0.00	0.00	0.00
45	100	0.00	1.45	0.00	0.00	0.00	0.00
	101	0.00	1.47	0.00	0.00	0.00	0.00
	102	0.00	1.57	0.00	0.00	0.00	0.00
	103	0.00	1.55	0.00	0.00	0.00	0.00
	104	0.00	1.44	0.00	0.00	0.00	0.00
	105	0.00	1.45	0.00	0.00	0.00	0.00
	106	0.00	1.92	0.00	0.00	0.00	0.00
	107	0.00	1.88	0.00	0.00	0.00	0.00
	108	0.00	1.81	0.00	0.00	0.00	0.00
	109	0.00	1.82	0.00	0.00	0.00	0.00
	110	0.00	1.94	0.00	0.00	0.00	0.00
	111	0.00	1.89	0.00	0.00	0.00	0.00
	112	0.00	1.78	0.00	0.00	0.00	0.00
	113	0.00	1.79	0.00	0.00	0.00	0.00
	114	0.00	1.92	0.00	0.00	0.00	0.00
	115	0.00	1.87	0.00	0.00	0.00	0.00
	116	0.00	1.78	0.00	0.00	0.00	0.00
	117	0.00	1.80	0.00	0.00	0.00	0.00
	118	0.00	1.92	0.00	0.00	0.00	0.00
	119	0.00	1.87	0.00	0.00	0.00	0.00
	120	0.00	1.29	0.00	0.00	0.00	0.00
	121	0.00	1.31	0.00	0.00	0.00	0.00
	122	0.00	1.28	0.00	0.00	0.00	0.00
	123	0.00	1.28	0.00	0.00	0.00	0.00
	124	0.00	1.64	0.00	0.00	0.00	0.00
	125	0.00	1.65	0.00	0.00	0.00	0.00
	126	0.00	1.85	0.00	0.00	0.00	0.00
	127	0.00	1.78	0.00	0.00	0.00	0.00
46	100	0.00	0.70	0.00	0.00	0.00	0.00
	101	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	0.76	0.00	0.00	0.00	0.00
	103	0.00	0.75	0.00	0.00	0.00	0.00
	104	0.00	0.70	0.00	0.00	0.00	0.00
	105	0.00	0.70	0.00	0.00	0.00	0.00
	106	0.00	0.97	0.00	0.00	0.00	0.00
	107	0.00	0.94	0.00	0.00	0.00	0.00
	108	0.00	0.91	0.00	0.00	0.00	0.00
	109	0.00	0.91	0.00	0.00	0.00	0.00
	110	0.00	0.97	0.00	0.00	0.00	0.00
	111	0.00	0.95	0.00	0.00	0.00	0.00
	112	0.00	0.90	0.00	0.00	0.00	0.00
	113	0.00	0.90	0.00	0.00	0.00	0.00
	114	0.00	0.96	0.00	0.00	0.00	0.00
	115	0.00	0.94	0.00	0.00	0.00	0.00
	116	0.00	0.90	0.00	0.00	0.00	0.00
	117	0.00	0.90	0.00	0.00	0.00	0.00
	118	0.00	0.96	0.00	0.00	0.00	0.00
	119	0.00	0.94	0.00	0.00	0.00	0.00
	120	0.00	0.65	0.00	0.00	0.00	0.00
	121	0.00	0.65	0.00	0.00	0.00	0.00
	122	0.00	0.64	0.00	0.00	0.00	0.00
	123	0.00	0.64	0.00	0.00	0.00	0.00
	124	0.00	0.82	0.00	0.00	0.00	0.00
	125	0.00	0.83	0.00	0.00	0.00	0.00
	126	0.00	0.92	0.00	0.00	0.00	0.00
	127	0.00	0.89	0.00	0.00	0.00	0.00
47	100	0.00	0.81	0.00	0.00	0.00	0.00
	101	0.00	0.82	0.00	0.00	0.00	0.00
	102	0.00	0.88	0.00	0.00	0.00	0.00
	103	0.00	0.87	0.00	0.00	0.00	0.00
	104	0.00	0.80	0.00	0.00	0.00	0.00
	105	0.00	0.80	0.00	0.00	0.00	0.00
	106	0.00	1.01	0.00	0.00	0.00	0.00
	107	0.00	0.99	0.00	0.00	0.00	0.00
	108	0.00	0.95	0.00	0.00	0.00	0.00
	109	0.00	0.96	0.00	0.00	0.00	0.00
	110	0.00	1.03	0.00	0.00	0.00	0.00
	111	0.00	1.00	0.00	0.00	0.00	0.00
	112	0.00	0.93	0.00	0.00	0.00	0.00
	113	0.00	0.94	0.00	0.00	0.00	0.00
	114	0.00	1.01	0.00	0.00	0.00	0.00
	115	0.00	0.98	0.00	0.00	0.00	0.00
	116	0.00	0.94	0.00	0.00	0.00	0.00
	117	0.00	0.95	0.00	0.00	0.00	0.00
	118	0.00	1.01	0.00	0.00	0.00	0.00
	119	0.00	0.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.68	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.87	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00
	126	0.00	0.99	0.00	0.00	0.00	0.00
	127	0.00	0.95	0.00	0.00	0.00	0.00
48	100	0.00	0.79	0.00	0.00	0.00	0.00
	101	0.00	0.80	0.00	0.00	0.00	0.00
	102	0.00	0.85	0.00	0.00	0.00	0.00
	103	0.00	0.84	0.00	0.00	0.00	0.00
	104	0.00	0.78	0.00	0.00	0.00	0.00
	105	0.00	0.78	0.00	0.00	0.00	0.00
	106	0.00	1.02	0.00	0.00	0.00	0.00
	107	0.00	0.99	0.00	0.00	0.00	0.00
	108	0.00	0.96	0.00	0.00	0.00	0.00
	109	0.00	0.97	0.00	0.00	0.00	0.00
	110	0.00	1.03	0.00	0.00	0.00	0.00
	111	0.00	1.01	0.00	0.00	0.00	0.00
	112	0.00	0.94	0.00	0.00	0.00	0.00
	113	0.00	0.95	0.00	0.00	0.00	0.00
	114	0.00	1.02	0.00	0.00	0.00	0.00
	115	0.00	0.99	0.00	0.00	0.00	0.00
	116	0.00	0.95	0.00	0.00	0.00	0.00
	117	0.00	0.95	0.00	0.00	0.00	0.00
	118	0.00	1.02	0.00	0.00	0.00	0.00
	119	0.00	0.99	0.00	0.00	0.00	0.00
	120	0.00	0.69	0.00	0.00	0.00	0.00
	121	0.00	0.71	0.00	0.00	0.00	0.00
	122	0.00	0.68	0.00	0.00	0.00	0.00
	123	0.00	0.69	0.00	0.00	0.00	0.00
	124	0.00	0.87	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00
	126	0.00	0.99	0.00	0.00	0.00	0.00
	127	0.00	0.95	0.00	0.00	0.00	0.00
49	100	0.00	0.77	0.00	0.00	0.00	0.00
	101	0.00	0.77	0.00	0.00	0.00	0.00
	102	0.00	0.83	0.00	0.00	0.00	0.00
	103	0.00	0.81	0.00	0.00	0.00	0.00
	104	0.00	0.75	0.00	0.00	0.00	0.00
	105	0.00	0.76	0.00	0.00	0.00	0.00
	106	0.00	1.03	0.00	0.00	0.00	0.00
	107	0.00	1.00	0.00	0.00	0.00	0.00
	108	0.00	0.96	0.00	0.00	0.00	0.00
	109	0.00	0.97	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	1.04	0.00	0.00	0.00	0.00
	111	0.00	1.01	0.00	0.00	0.00	0.00
	112	0.00	0.95	0.00	0.00	0.00	0.00
	113	0.00	0.96	0.00	0.00	0.00	0.00
	114	0.00	1.02	0.00	0.00	0.00	0.00
	115	0.00	1.00	0.00	0.00	0.00	0.00
	116	0.00	0.95	0.00	0.00	0.00	0.00
	117	0.00	0.96	0.00	0.00	0.00	0.00
	118	0.00	1.02	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.69	0.00	0.00	0.00	0.00
	121	0.00	0.71	0.00	0.00	0.00	0.00
	122	0.00	0.69	0.00	0.00	0.00	0.00
	123	0.00	0.69	0.00	0.00	0.00	0.00
	124	0.00	0.88	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00
	126	0.00	0.99	0.00	0.00	0.00	0.00
	127	0.00	0.96	0.00	0.00	0.00	0.00
68	100	0.00	0.56	0.00	0.00	0.00	0.00
	101	0.00	0.56	0.00	0.00	0.00	0.00
	102	0.00	0.62	0.00	0.00	0.00	0.00
	103	0.00	0.60	0.00	0.00	0.00	0.00
	104	0.00	0.56	0.00	0.00	0.00	0.00
	105	0.00	0.57	0.00	0.00	0.00	0.00
	106	0.00	0.42	0.00	0.00	0.00	0.00
	107	0.00	0.41	0.00	0.00	0.00	0.00
	108	0.00	0.39	0.00	0.00	0.00	0.00
	109	0.00	0.39	0.00	0.00	0.00	0.00
	110	0.00	0.42	0.00	0.00	0.00	0.00
	111	0.00	0.41	0.00	0.00	0.00	0.00
	112	0.00	0.39	0.00	0.00	0.00	0.00
	113	0.00	0.39	0.00	0.00	0.00	0.00
	114	0.00	0.42	0.00	0.00	0.00	0.00
	115	0.00	0.41	0.00	0.00	0.00	0.00
	116	0.00	0.39	0.00	0.00	0.00	0.00
	117	0.00	0.40	0.00	0.00	0.00	0.00
	118	0.00	0.42	0.00	0.00	0.00	0.00
	119	0.00	0.41	0.00	0.00	0.00	0.00
	120	0.00	0.28	0.00	0.00	0.00	0.00
	121	0.00	0.28	0.00	0.00	0.00	0.00
	122	0.00	0.28	0.00	0.00	0.00	0.00
	123	0.00	0.28	0.00	0.00	0.00	0.00
	124	0.00	0.37	0.00	0.00	0.00	0.00
	125	0.00	0.38	0.00	0.00	0.00	0.00
	126	0.00	0.42	0.00	0.00	0.00	0.00
	127	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
69	100	0.00	0.29	0.00	0.00	0.00	0.00
	101	0.00	0.29	0.00	0.00	0.00	0.00
	102	0.00	0.32	0.00	0.00	0.00	0.00
	103	0.00	0.31	0.00	0.00	0.00	0.00
	104	0.00	0.29	0.00	0.00	0.00	0.00
	105	0.00	0.29	0.00	0.00	0.00	0.00
	106	0.00	0.21	0.00	0.00	0.00	0.00
	107	0.00	0.20	0.00	0.00	0.00	0.00
	108	0.00	0.19	0.00	0.00	0.00	0.00
	109	0.00	0.19	0.00	0.00	0.00	0.00
	110	0.00	0.20	0.00	0.00	0.00	0.00
	111	0.00	0.20	0.00	0.00	0.00	0.00
	112	0.00	0.19	0.00	0.00	0.00	0.00
	113	0.00	0.19	0.00	0.00	0.00	0.00
	114	0.00	0.20	0.00	0.00	0.00	0.00
	115	0.00	0.20	0.00	0.00	0.00	0.00
	116	0.00	0.19	0.00	0.00	0.00	0.00
	117	0.00	0.19	0.00	0.00	0.00	0.00
	118	0.00	0.21	0.00	0.00	0.00	0.00
	119	0.00	0.20	0.00	0.00	0.00	0.00
	120	0.00	0.14	0.00	0.00	0.00	0.00
	121	0.00	0.14	0.00	0.00	0.00	0.00
	122	0.00	0.14	0.00	0.00	0.00	0.00
	123	0.00	0.14	0.00	0.00	0.00	0.00
	124	0.00	0.18	0.00	0.00	0.00	0.00
	125	0.00	0.18	0.00	0.00	0.00	0.00
	126	0.00	0.21	0.00	0.00	0.00	0.00
	127	0.00	0.20	0.00	0.00	0.00	0.00
70	100	0.00	0.54	0.00	0.00	0.00	0.00
	101	0.00	0.54	0.00	0.00	0.00	0.00
	102	0.00	0.60	0.00	0.00	0.00	0.00
	103	0.00	0.58	0.00	0.00	0.00	0.00
	104	0.00	0.55	0.00	0.00	0.00	0.00
	105	0.00	0.55	0.00	0.00	0.00	0.00
	106	0.00	0.44	0.00	0.00	0.00	0.00
	107	0.00	0.42	0.00	0.00	0.00	0.00
	108	0.00	0.40	0.00	0.00	0.00	0.00
	109	0.00	0.40	0.00	0.00	0.00	0.00
	110	0.00	0.43	0.00	0.00	0.00	0.00
	111	0.00	0.42	0.00	0.00	0.00	0.00
	112	0.00	0.40	0.00	0.00	0.00	0.00
	113	0.00	0.41	0.00	0.00	0.00	0.00
	114	0.00	0.43	0.00	0.00	0.00	0.00
	115	0.00	0.42	0.00	0.00	0.00	0.00
	116	0.00	0.40	0.00	0.00	0.00	0.00
	117	0.00	0.41	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	0.43	0.00	0.00	0.00	0.00
	119	0.00	0.42	0.00	0.00	0.00	0.00
	120	0.00	0.29	0.00	0.00	0.00	0.00
	121	0.00	0.28	0.00	0.00	0.00	0.00
	122	0.00	0.29	0.00	0.00	0.00	0.00
	123	0.00	0.29	0.00	0.00	0.00	0.00
	124	0.00	0.38	0.00	0.00	0.00	0.00
	125	0.00	0.38	0.00	0.00	0.00	0.00
	126	0.00	0.43	0.00	0.00	0.00	0.00
	127	0.00	0.41	0.00	0.00	0.00	0.00
71	100	0.00	0.52	0.00	0.00	0.00	0.00
	101	0.00	0.52	0.00	0.00	0.00	0.00
	102	0.00	0.58	0.00	0.00	0.00	0.00
	103	0.00	0.56	0.00	0.00	0.00	0.00
	104	0.00	0.53	0.00	0.00	0.00	0.00
	105	0.00	0.53	0.00	0.00	0.00	0.00
	106	0.00	0.45	0.00	0.00	0.00	0.00
	107	0.00	0.43	0.00	0.00	0.00	0.00
	108	0.00	0.41	0.00	0.00	0.00	0.00
	109	0.00	0.41	0.00	0.00	0.00	0.00
	110	0.00	0.44	0.00	0.00	0.00	0.00
	111	0.00	0.43	0.00	0.00	0.00	0.00
	112	0.00	0.42	0.00	0.00	0.00	0.00
	113	0.00	0.42	0.00	0.00	0.00	0.00
	114	0.00	0.45	0.00	0.00	0.00	0.00
	115	0.00	0.43	0.00	0.00	0.00	0.00
	116	0.00	0.42	0.00	0.00	0.00	0.00
	117	0.00	0.42	0.00	0.00	0.00	0.00
	118	0.00	0.45	0.00	0.00	0.00	0.00
	119	0.00	0.43	0.00	0.00	0.00	0.00
	120	0.00	0.29	0.00	0.00	0.00	0.00
	121	0.00	0.28	0.00	0.00	0.00	0.00
	122	0.00	0.29	0.00	0.00	0.00	0.00
	123	0.00	0.29	0.00	0.00	0.00	0.00
	124	0.00	0.38	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.43	0.00	0.00	0.00	0.00
	127	0.00	0.41	0.00	0.00	0.00	0.00
72	100	0.00	0.50	0.00	0.00	0.00	0.00
	101	0.00	0.50	0.00	0.00	0.00	0.00
	102	0.00	0.56	0.00	0.00	0.00	0.00
	103	0.00	0.54	0.00	0.00	0.00	0.00
	104	0.00	0.51	0.00	0.00	0.00	0.00
	105	0.00	0.51	0.00	0.00	0.00	0.00
	106	0.00	0.46	0.00	0.00	0.00	0.00
	107	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.42	0.00	0.00	0.00	0.00
	109	0.00	0.42	0.00	0.00	0.00	0.00
	110	0.00	0.45	0.00	0.00	0.00	0.00
	111	0.00	0.44	0.00	0.00	0.00	0.00
	112	0.00	0.43	0.00	0.00	0.00	0.00
	113	0.00	0.43	0.00	0.00	0.00	0.00
	114	0.00	0.46	0.00	0.00	0.00	0.00
	115	0.00	0.44	0.00	0.00	0.00	0.00
	116	0.00	0.43	0.00	0.00	0.00	0.00
	117	0.00	0.43	0.00	0.00	0.00	0.00
	118	0.00	0.45	0.00	0.00	0.00	0.00
	119	0.00	0.44	0.00	0.00	0.00	0.00
	120	0.00	0.30	0.00	0.00	0.00	0.00
	121	0.00	0.29	0.00	0.00	0.00	0.00
	122	0.00	0.30	0.00	0.00	0.00	0.00
	123	0.00	0.29	0.00	0.00	0.00	0.00
	124	0.00	0.39	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.43	0.00	0.00	0.00	0.00
	127	0.00	0.42	0.00	0.00	0.00	0.00
73	100	0.00	1.21	0.00	0.00	0.00	0.00
	101	0.00	1.21	0.00	0.00	0.00	0.00
	102	0.00	1.34	0.00	0.00	0.00	0.00
	103	0.00	1.29	0.00	0.00	0.00	0.00
	104	0.00	1.21	0.00	0.00	0.00	0.00
	105	0.00	1.22	0.00	0.00	0.00	0.00
	106	0.00	0.99	0.00	0.00	0.00	0.00
	107	0.00	0.96	0.00	0.00	0.00	0.00
	108	0.00	0.92	0.00	0.00	0.00	0.00
	109	0.00	0.92	0.00	0.00	0.00	0.00
	110	0.00	0.99	0.00	0.00	0.00	0.00
	111	0.00	0.96	0.00	0.00	0.00	0.00
	112	0.00	0.91	0.00	0.00	0.00	0.00
	113	0.00	0.92	0.00	0.00	0.00	0.00
	114	0.00	0.99	0.00	0.00	0.00	0.00
	115	0.00	0.96	0.00	0.00	0.00	0.00
	116	0.00	0.92	0.00	0.00	0.00	0.00
	117	0.00	0.93	0.00	0.00	0.00	0.00
	118	0.00	0.99	0.00	0.00	0.00	0.00
	119	0.00	0.96	0.00	0.00	0.00	0.00
	120	0.00	0.67	0.00	0.00	0.00	0.00
	121	0.00	0.67	0.00	0.00	0.00	0.00
	122	0.00	0.66	0.00	0.00	0.00	0.00
	123	0.00	0.67	0.00	0.00	0.00	0.00
	124	0.00	0.87	0.00	0.00	0.00	0.00
	125	0.00	0.88	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	0.98	0.00	0.00	0.00	0.00
	127	0.00	0.94	0.00	0.00	0.00	0.00
74	100	0.00	0.62	0.00	0.00	0.00	0.00
	101	0.00	0.62	0.00	0.00	0.00	0.00
	102	0.00	0.69	0.00	0.00	0.00	0.00
	103	0.00	0.67	0.00	0.00	0.00	0.00
	104	0.00	0.62	0.00	0.00	0.00	0.00
	105	0.00	0.63	0.00	0.00	0.00	0.00
	106	0.00	0.48	0.00	0.00	0.00	0.00
	107	0.00	0.47	0.00	0.00	0.00	0.00
	108	0.00	0.45	0.00	0.00	0.00	0.00
	109	0.00	0.45	0.00	0.00	0.00	0.00
	110	0.00	0.48	0.00	0.00	0.00	0.00
	111	0.00	0.47	0.00	0.00	0.00	0.00
	112	0.00	0.44	0.00	0.00	0.00	0.00
	113	0.00	0.45	0.00	0.00	0.00	0.00
	114	0.00	0.48	0.00	0.00	0.00	0.00
	115	0.00	0.47	0.00	0.00	0.00	0.00
	116	0.00	0.45	0.00	0.00	0.00	0.00
	117	0.00	0.45	0.00	0.00	0.00	0.00
	118	0.00	0.48	0.00	0.00	0.00	0.00
	119	0.00	0.47	0.00	0.00	0.00	0.00
	120	0.00	0.33	0.00	0.00	0.00	0.00
	121	0.00	0.33	0.00	0.00	0.00	0.00
	122	0.00	0.32	0.00	0.00	0.00	0.00
	123	0.00	0.33	0.00	0.00	0.00	0.00
	124	0.00	0.43	0.00	0.00	0.00	0.00
	125	0.00	0.43	0.00	0.00	0.00	0.00
	126	0.00	0.49	0.00	0.00	0.00	0.00
	127	0.00	0.46	0.00	0.00	0.00	0.00
75	100	0.00	1.17	0.00	0.00	0.00	0.00
	101	0.00	1.17	0.00	0.00	0.00	0.00
	102	0.00	1.30	0.00	0.00	0.00	0.00
	103	0.00	1.25	0.00	0.00	0.00	0.00
	104	0.00	1.18	0.00	0.00	0.00	0.00
	105	0.00	1.18	0.00	0.00	0.00	0.00
	106	0.00	1.01	0.00	0.00	0.00	0.00
	107	0.00	0.99	0.00	0.00	0.00	0.00
	108	0.00	0.94	0.00	0.00	0.00	0.00
	109	0.00	0.95	0.00	0.00	0.00	0.00
	110	0.00	1.01	0.00	0.00	0.00	0.00
	111	0.00	0.98	0.00	0.00	0.00	0.00
	112	0.00	0.94	0.00	0.00	0.00	0.00
	113	0.00	0.95	0.00	0.00	0.00	0.00
	114	0.00	1.01	0.00	0.00	0.00	0.00
	115	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	0.94	0.00	0.00	0.00	0.00
	117	0.00	0.95	0.00	0.00	0.00	0.00
	118	0.00	1.01	0.00	0.00	0.00	0.00
	119	0.00	0.99	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.67	0.00	0.00	0.00	0.00
	122	0.00	0.67	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.88	0.00	0.00	0.00	0.00
	125	0.00	0.89	0.00	0.00	0.00	0.00
	126	0.00	1.00	0.00	0.00	0.00	0.00
	127	0.00	0.96	0.00	0.00	0.00	0.00
76	100	0.00	1.13	0.00	0.00	0.00	0.00
	101	0.00	1.14	0.00	0.00	0.00	0.00
	102	0.00	1.25	0.00	0.00	0.00	0.00
	103	0.00	1.21	0.00	0.00	0.00	0.00
	104	0.00	1.14	0.00	0.00	0.00	0.00
	105	0.00	1.15	0.00	0.00	0.00	0.00
	106	0.00	1.04	0.00	0.00	0.00	0.00
	107	0.00	1.01	0.00	0.00	0.00	0.00
	108	0.00	0.96	0.00	0.00	0.00	0.00
	109	0.00	0.97	0.00	0.00	0.00	0.00
	110	0.00	1.03	0.00	0.00	0.00	0.00
	111	0.00	1.00	0.00	0.00	0.00	0.00
	112	0.00	0.96	0.00	0.00	0.00	0.00
	113	0.00	0.97	0.00	0.00	0.00	0.00
	114	0.00	1.04	0.00	0.00	0.00	0.00
	115	0.00	1.01	0.00	0.00	0.00	0.00
	116	0.00	0.96	0.00	0.00	0.00	0.00
	117	0.00	0.97	0.00	0.00	0.00	0.00
	118	0.00	1.04	0.00	0.00	0.00	0.00
	119	0.00	1.01	0.00	0.00	0.00	0.00
	120	0.00	0.69	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	0.68	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.89	0.00	0.00	0.00	0.00
	125	0.00	0.90	0.00	0.00	0.00	0.00
	126	0.00	1.01	0.00	0.00	0.00	0.00
	127	0.00	0.97	0.00	0.00	0.00	0.00
77	100	0.00	1.09	0.00	0.00	0.00	0.00
	101	0.00	1.09	0.00	0.00	0.00	0.00
	102	0.00	1.21	0.00	0.00	0.00	0.00
	103	0.00	1.17	0.00	0.00	0.00	0.00
	104	0.00	1.11	0.00	0.00	0.00	0.00
	105	0.00	1.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.06	0.00	0.00	0.00	0.00
	107	0.00	1.03	0.00	0.00	0.00	0.00
	108	0.00	0.98	0.00	0.00	0.00	0.00
	109	0.00	0.98	0.00	0.00	0.00	0.00
	110	0.00	1.05	0.00	0.00	0.00	0.00
	111	0.00	1.02	0.00	0.00	0.00	0.00
	112	0.00	0.99	0.00	0.00	0.00	0.00
	113	0.00	0.99	0.00	0.00	0.00	0.00
	114	0.00	1.06	0.00	0.00	0.00	0.00
	115	0.00	1.03	0.00	0.00	0.00	0.00
	116	0.00	0.98	0.00	0.00	0.00	0.00
	117	0.00	0.99	0.00	0.00	0.00	0.00
	118	0.00	1.05	0.00	0.00	0.00	0.00
	119	0.00	1.03	0.00	0.00	0.00	0.00
	120	0.00	0.70	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	0.69	0.00	0.00	0.00	0.00
	123	0.00	0.69	0.00	0.00	0.00	0.00
	124	0.00	0.90	0.00	0.00	0.00	0.00
	125	0.00	0.91	0.00	0.00	0.00	0.00
	126	0.00	1.01	0.00	0.00	0.00	0.00
	127	0.00	0.98	0.00	0.00	0.00	0.00
78	100	0.00	1.30	0.00	0.00	0.00	0.00
	101	0.00	1.30	0.00	0.00	0.00	0.00
	102	0.00	1.43	0.00	0.00	0.00	0.00
	103	0.00	1.39	0.00	0.00	0.00	0.00
	104	0.00	1.30	0.00	0.00	0.00	0.00
	105	0.00	1.30	0.00	0.00	0.00	0.00
	106	0.00	1.13	0.00	0.00	0.00	0.00
	107	0.00	1.10	0.00	0.00	0.00	0.00
	108	0.00	1.05	0.00	0.00	0.00	0.00
	109	0.00	1.06	0.00	0.00	0.00	0.00
	110	0.00	1.14	0.00	0.00	0.00	0.00
	111	0.00	1.11	0.00	0.00	0.00	0.00
	112	0.00	1.04	0.00	0.00	0.00	0.00
	113	0.00	1.05	0.00	0.00	0.00	0.00
	114	0.00	1.13	0.00	0.00	0.00	0.00
	115	0.00	1.10	0.00	0.00	0.00	0.00
	116	0.00	1.05	0.00	0.00	0.00	0.00
	117	0.00	1.06	0.00	0.00	0.00	0.00
	118	0.00	1.13	0.00	0.00	0.00	0.00
	119	0.00	1.10	0.00	0.00	0.00	0.00
	120	0.00	0.77	0.00	0.00	0.00	0.00
	121	0.00	0.77	0.00	0.00	0.00	0.00
	122	0.00	0.76	0.00	0.00	0.00	0.00
	123	0.00	0.77	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	0.99	0.00	0.00	0.00	0.00
	125	0.00	1.01	0.00	0.00	0.00	0.00
	126	0.00	1.13	0.00	0.00	0.00	0.00
	127	0.00	1.08	0.00	0.00	0.00	0.00
79	100	0.00	0.67	0.00	0.00	0.00	0.00
	101	0.00	0.67	0.00	0.00	0.00	0.00
	102	0.00	0.74	0.00	0.00	0.00	0.00
	103	0.00	0.71	0.00	0.00	0.00	0.00
	104	0.00	0.66	0.00	0.00	0.00	0.00
	105	0.00	0.67	0.00	0.00	0.00	0.00
	106	0.00	0.55	0.00	0.00	0.00	0.00
	107	0.00	0.54	0.00	0.00	0.00	0.00
	108	0.00	0.51	0.00	0.00	0.00	0.00
	109	0.00	0.52	0.00	0.00	0.00	0.00
	110	0.00	0.56	0.00	0.00	0.00	0.00
	111	0.00	0.54	0.00	0.00	0.00	0.00
	112	0.00	0.51	0.00	0.00	0.00	0.00
	113	0.00	0.51	0.00	0.00	0.00	0.00
	114	0.00	0.55	0.00	0.00	0.00	0.00
	115	0.00	0.54	0.00	0.00	0.00	0.00
	116	0.00	0.51	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.55	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.38	0.00	0.00	0.00	0.00
	121	0.00	0.38	0.00	0.00	0.00	0.00
	122	0.00	0.37	0.00	0.00	0.00	0.00
	123	0.00	0.38	0.00	0.00	0.00	0.00
	124	0.00	0.49	0.00	0.00	0.00	0.00
	125	0.00	0.50	0.00	0.00	0.00	0.00
	126	0.00	0.56	0.00	0.00	0.00	0.00
	127	0.00	0.53	0.00	0.00	0.00	0.00
80	100	0.00	1.26	0.00	0.00	0.00	0.00
	101	0.00	1.27	0.00	0.00	0.00	0.00
	102	0.00	1.39	0.00	0.00	0.00	0.00
	103	0.00	1.35	0.00	0.00	0.00	0.00
	104	0.00	1.26	0.00	0.00	0.00	0.00
	105	0.00	1.27	0.00	0.00	0.00	0.00
	106	0.00	1.16	0.00	0.00	0.00	0.00
	107	0.00	1.13	0.00	0.00	0.00	0.00
	108	0.00	1.08	0.00	0.00	0.00	0.00
	109	0.00	1.09	0.00	0.00	0.00	0.00
	110	0.00	1.16	0.00	0.00	0.00	0.00
	111	0.00	1.13	0.00	0.00	0.00	0.00
	112	0.00	1.07	0.00	0.00	0.00	0.00
	113	0.00	1.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.15	0.00	0.00	0.00	0.00
	115	0.00	1.12	0.00	0.00	0.00	0.00
	116	0.00	1.07	0.00	0.00	0.00	0.00
	117	0.00	1.08	0.00	0.00	0.00	0.00
	118	0.00	1.16	0.00	0.00	0.00	0.00
	119	0.00	1.13	0.00	0.00	0.00	0.00
	120	0.00	0.78	0.00	0.00	0.00	0.00
	121	0.00	0.78	0.00	0.00	0.00	0.00
	122	0.00	0.77	0.00	0.00	0.00	0.00
	123	0.00	0.78	0.00	0.00	0.00	0.00
	124	0.00	1.01	0.00	0.00	0.00	0.00
	125	0.00	1.02	0.00	0.00	0.00	0.00
	126	0.00	1.14	0.00	0.00	0.00	0.00
	127	0.00	1.10	0.00	0.00	0.00	0.00
81	100	0.00	1.22	0.00	0.00	0.00	0.00
	101	0.00	1.23	0.00	0.00	0.00	0.00
	102	0.00	1.35	0.00	0.00	0.00	0.00
	103	0.00	1.31	0.00	0.00	0.00	0.00
	104	0.00	1.23	0.00	0.00	0.00	0.00
	105	0.00	1.24	0.00	0.00	0.00	0.00
	106	0.00	1.18	0.00	0.00	0.00	0.00
	107	0.00	1.15	0.00	0.00	0.00	0.00
	108	0.00	1.10	0.00	0.00	0.00	0.00
	109	0.00	1.11	0.00	0.00	0.00	0.00
	110	0.00	1.18	0.00	0.00	0.00	0.00
	111	0.00	1.15	0.00	0.00	0.00	0.00
	112	0.00	1.10	0.00	0.00	0.00	0.00
	113	0.00	1.10	0.00	0.00	0.00	0.00
	114	0.00	1.18	0.00	0.00	0.00	0.00
	115	0.00	1.15	0.00	0.00	0.00	0.00
	116	0.00	1.10	0.00	0.00	0.00	0.00
	117	0.00	1.11	0.00	0.00	0.00	0.00
	118	0.00	1.18	0.00	0.00	0.00	0.00
	119	0.00	1.15	0.00	0.00	0.00	0.00
	120	0.00	0.79	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.78	0.00	0.00	0.00	0.00
	123	0.00	0.78	0.00	0.00	0.00	0.00
	124	0.00	1.02	0.00	0.00	0.00	0.00
	125	0.00	1.03	0.00	0.00	0.00	0.00
	126	0.00	1.15	0.00	0.00	0.00	0.00
	127	0.00	1.11	0.00	0.00	0.00	0.00
82	100	0.00	1.18	0.00	0.00	0.00	0.00
	101	0.00	1.19	0.00	0.00	0.00	0.00
	102	0.00	1.30	0.00	0.00	0.00	0.00
	103	0.00	1.27	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.19	0.00	0.00	0.00	0.00
	105	0.00	1.20	0.00	0.00	0.00	0.00
	106	0.00	1.21	0.00	0.00	0.00	0.00
	107	0.00	1.17	0.00	0.00	0.00	0.00
	108	0.00	1.12	0.00	0.00	0.00	0.00
	109	0.00	1.13	0.00	0.00	0.00	0.00
	110	0.00	1.20	0.00	0.00	0.00	0.00
	111	0.00	1.17	0.00	0.00	0.00	0.00
	112	0.00	1.12	0.00	0.00	0.00	0.00
	113	0.00	1.13	0.00	0.00	0.00	0.00
	114	0.00	1.20	0.00	0.00	0.00	0.00
	115	0.00	1.17	0.00	0.00	0.00	0.00
	116	0.00	1.12	0.00	0.00	0.00	0.00
	117	0.00	1.13	0.00	0.00	0.00	0.00
	118	0.00	1.20	0.00	0.00	0.00	0.00
	119	0.00	1.17	0.00	0.00	0.00	0.00
	120	0.00	0.80	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.79	0.00	0.00	0.00	0.00
	123	0.00	0.79	0.00	0.00	0.00	0.00
	124	0.00	1.03	0.00	0.00	0.00	0.00
	125	0.00	1.04	0.00	0.00	0.00	0.00
	126	0.00	1.16	0.00	0.00	0.00	0.00
	127	0.00	1.12	0.00	0.00	0.00	0.00
83	100	0.00	1.38	0.00	0.00	0.00	0.00
	101	0.00	1.39	0.00	0.00	0.00	0.00
	102	0.00	1.53	0.00	0.00	0.00	0.00
	103	0.00	1.48	0.00	0.00	0.00	0.00
	104	0.00	1.38	0.00	0.00	0.00	0.00
	105	0.00	1.38	0.00	0.00	0.00	0.00
	106	0.00	1.27	0.00	0.00	0.00	0.00
	107	0.00	1.24	0.00	0.00	0.00	0.00
	108	0.00	1.19	0.00	0.00	0.00	0.00
	109	0.00	1.20	0.00	0.00	0.00	0.00
	110	0.00	1.29	0.00	0.00	0.00	0.00
	111	0.00	1.25	0.00	0.00	0.00	0.00
	112	0.00	1.17	0.00	0.00	0.00	0.00
	113	0.00	1.18	0.00	0.00	0.00	0.00
	114	0.00	1.27	0.00	0.00	0.00	0.00
	115	0.00	1.23	0.00	0.00	0.00	0.00
	116	0.00	1.18	0.00	0.00	0.00	0.00
	117	0.00	1.19	0.00	0.00	0.00	0.00
	118	0.00	1.28	0.00	0.00	0.00	0.00
	119	0.00	1.24	0.00	0.00	0.00	0.00
	120	0.00	0.86	0.00	0.00	0.00	0.00
	121	0.00	0.88	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	0.86	0.00	0.00	0.00	0.00
	123	0.00	0.87	0.00	0.00	0.00	0.00
	124	0.00	1.12	0.00	0.00	0.00	0.00
	125	0.00	1.13	0.00	0.00	0.00	0.00
	126	0.00	1.27	0.00	0.00	0.00	0.00
	127	0.00	1.22	0.00	0.00	0.00	0.00
84	100	0.00	0.71	0.00	0.00	0.00	0.00
	101	0.00	0.71	0.00	0.00	0.00	0.00
	102	0.00	0.78	0.00	0.00	0.00	0.00
	103	0.00	0.76	0.00	0.00	0.00	0.00
	104	0.00	0.70	0.00	0.00	0.00	0.00
	105	0.00	0.71	0.00	0.00	0.00	0.00
	106	0.00	0.62	0.00	0.00	0.00	0.00
	107	0.00	0.61	0.00	0.00	0.00	0.00
	108	0.00	0.58	0.00	0.00	0.00	0.00
	109	0.00	0.59	0.00	0.00	0.00	0.00
	110	0.00	0.63	0.00	0.00	0.00	0.00
	111	0.00	0.61	0.00	0.00	0.00	0.00
	112	0.00	0.57	0.00	0.00	0.00	0.00
	113	0.00	0.58	0.00	0.00	0.00	0.00
	114	0.00	0.62	0.00	0.00	0.00	0.00
	115	0.00	0.60	0.00	0.00	0.00	0.00
	116	0.00	0.58	0.00	0.00	0.00	0.00
	117	0.00	0.58	0.00	0.00	0.00	0.00
	118	0.00	0.63	0.00	0.00	0.00	0.00
	119	0.00	0.61	0.00	0.00	0.00	0.00
	120	0.00	0.43	0.00	0.00	0.00	0.00
	121	0.00	0.44	0.00	0.00	0.00	0.00
	122	0.00	0.42	0.00	0.00	0.00	0.00
	123	0.00	0.43	0.00	0.00	0.00	0.00
	124	0.00	0.55	0.00	0.00	0.00	0.00
	125	0.00	0.56	0.00	0.00	0.00	0.00
	126	0.00	0.63	0.00	0.00	0.00	0.00
	127	0.00	0.60	0.00	0.00	0.00	0.00
85	100	0.00	1.35	0.00	0.00	0.00	0.00
	101	0.00	1.36	0.00	0.00	0.00	0.00
	102	0.00	1.49	0.00	0.00	0.00	0.00
	103	0.00	1.45	0.00	0.00	0.00	0.00
	104	0.00	1.35	0.00	0.00	0.00	0.00
	105	0.00	1.35	0.00	0.00	0.00	0.00
	106	0.00	1.30	0.00	0.00	0.00	0.00
	107	0.00	1.27	0.00	0.00	0.00	0.00
	108	0.00	1.21	0.00	0.00	0.00	0.00
	109	0.00	1.23	0.00	0.00	0.00	0.00
	110	0.00	1.31	0.00	0.00	0.00	0.00
	111	0.00	1.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.20	0.00	0.00	0.00	0.00
	113	0.00	1.21	0.00	0.00	0.00	0.00
	114	0.00	1.30	0.00	0.00	0.00	0.00
	115	0.00	1.26	0.00	0.00	0.00	0.00
	116	0.00	1.21	0.00	0.00	0.00	0.00
	117	0.00	1.22	0.00	0.00	0.00	0.00
	118	0.00	1.30	0.00	0.00	0.00	0.00
	119	0.00	1.27	0.00	0.00	0.00	0.00
	120	0.00	0.88	0.00	0.00	0.00	0.00
	121	0.00	0.89	0.00	0.00	0.00	0.00
	122	0.00	0.87	0.00	0.00	0.00	0.00
	123	0.00	0.88	0.00	0.00	0.00	0.00
	124	0.00	1.13	0.00	0.00	0.00	0.00
	125	0.00	1.15	0.00	0.00	0.00	0.00
	126	0.00	1.29	0.00	0.00	0.00	0.00
	127	0.00	1.23	0.00	0.00	0.00	0.00
86	100	0.00	1.32	0.00	0.00	0.00	0.00
	101	0.00	1.32	0.00	0.00	0.00	0.00
	102	0.00	1.45	0.00	0.00	0.00	0.00
	103	0.00	1.41	0.00	0.00	0.00	0.00
	104	0.00	1.32	0.00	0.00	0.00	0.00
	105	0.00	1.32	0.00	0.00	0.00	0.00
	106	0.00	1.33	0.00	0.00	0.00	0.00
	107	0.00	1.30	0.00	0.00	0.00	0.00
	108	0.00	1.24	0.00	0.00	0.00	0.00
	109	0.00	1.25	0.00	0.00	0.00	0.00
	110	0.00	1.34	0.00	0.00	0.00	0.00
	111	0.00	1.30	0.00	0.00	0.00	0.00
	112	0.00	1.23	0.00	0.00	0.00	0.00
	113	0.00	1.24	0.00	0.00	0.00	0.00
	114	0.00	1.33	0.00	0.00	0.00	0.00
	115	0.00	1.29	0.00	0.00	0.00	0.00
	116	0.00	1.23	0.00	0.00	0.00	0.00
	117	0.00	1.24	0.00	0.00	0.00	0.00
	118	0.00	1.33	0.00	0.00	0.00	0.00
	119	0.00	1.29	0.00	0.00	0.00	0.00
	120	0.00	0.89	0.00	0.00	0.00	0.00
	121	0.00	0.89	0.00	0.00	0.00	0.00
	122	0.00	0.88	0.00	0.00	0.00	0.00
	123	0.00	0.89	0.00	0.00	0.00	0.00
	124	0.00	1.15	0.00	0.00	0.00	0.00
	125	0.00	1.16	0.00	0.00	0.00	0.00
	126	0.00	1.30	0.00	0.00	0.00	0.00
	127	0.00	1.25	0.00	0.00	0.00	0.00
87	100	0.00	1.28	0.00	0.00	0.00	0.00
	101	0.00	1.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	1.40	0.00	0.00	0.00	0.00
	103	0.00	1.37	0.00	0.00	0.00	0.00
	104	0.00	1.28	0.00	0.00	0.00	0.00
	105	0.00	1.29	0.00	0.00	0.00	0.00
	106	0.00	1.35	0.00	0.00	0.00	0.00
	107	0.00	1.32	0.00	0.00	0.00	0.00
	108	0.00	1.26	0.00	0.00	0.00	0.00
	109	0.00	1.27	0.00	0.00	0.00	0.00
	110	0.00	1.36	0.00	0.00	0.00	0.00
	111	0.00	1.32	0.00	0.00	0.00	0.00
	112	0.00	1.25	0.00	0.00	0.00	0.00
	113	0.00	1.26	0.00	0.00	0.00	0.00
	114	0.00	1.35	0.00	0.00	0.00	0.00
	115	0.00	1.31	0.00	0.00	0.00	0.00
	116	0.00	1.25	0.00	0.00	0.00	0.00
	117	0.00	1.26	0.00	0.00	0.00	0.00
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.32	0.00	0.00	0.00	0.00
	120	0.00	0.90	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	0.89	0.00	0.00	0.00	0.00
	123	0.00	0.89	0.00	0.00	0.00	0.00
	124	0.00	1.16	0.00	0.00	0.00	0.00
	125	0.00	1.17	0.00	0.00	0.00	0.00
	126	0.00	1.31	0.00	0.00	0.00	0.00
	127	0.00	1.26	0.00	0.00	0.00	0.00
103	100	0.00	0.48	0.00	0.00	0.00	0.00
	101	0.00	0.48	0.00	0.00	0.00	0.00
	102	0.00	0.53	0.00	0.00	0.00	0.00
	103	0.00	0.51	0.00	0.00	0.00	0.00
	104	0.00	0.49	0.00	0.00	0.00	0.00
	105	0.00	0.49	0.00	0.00	0.00	0.00
	106	0.00	0.47	0.00	0.00	0.00	0.00
	107	0.00	0.45	0.00	0.00	0.00	0.00
	108	0.00	0.43	0.00	0.00	0.00	0.00
	109	0.00	0.43	0.00	0.00	0.00	0.00
	110	0.00	0.46	0.00	0.00	0.00	0.00
	111	0.00	0.44	0.00	0.00	0.00	0.00
	112	0.00	0.44	0.00	0.00	0.00	0.00
	113	0.00	0.44	0.00	0.00	0.00	0.00
	114	0.00	0.47	0.00	0.00	0.00	0.00
	115	0.00	0.45	0.00	0.00	0.00	0.00
	116	0.00	0.43	0.00	0.00	0.00	0.00
	117	0.00	0.43	0.00	0.00	0.00	0.00
	118	0.00	0.46	0.00	0.00	0.00	0.00
	119	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.30	0.00	0.00	0.00	0.00
	121	0.00	0.29	0.00	0.00	0.00	0.00
	122	0.00	0.30	0.00	0.00	0.00	0.00
	123	0.00	0.30	0.00	0.00	0.00	0.00
	124	0.00	0.39	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.44	0.00	0.00	0.00	0.00
	127	0.00	0.42	0.00	0.00	0.00	0.00
104	100	0.00	0.46	0.00	0.00	0.00	0.00
	101	0.00	0.46	0.00	0.00	0.00	0.00
	102	0.00	0.50	0.00	0.00	0.00	0.00
	103	0.00	0.49	0.00	0.00	0.00	0.00
	104	0.00	0.47	0.00	0.00	0.00	0.00
	105	0.00	0.47	0.00	0.00	0.00	0.00
	106	0.00	0.47	0.00	0.00	0.00	0.00
	107	0.00	0.46	0.00	0.00	0.00	0.00
	108	0.00	0.43	0.00	0.00	0.00	0.00
	109	0.00	0.43	0.00	0.00	0.00	0.00
	110	0.00	0.46	0.00	0.00	0.00	0.00
	111	0.00	0.45	0.00	0.00	0.00	0.00
	112	0.00	0.45	0.00	0.00	0.00	0.00
	113	0.00	0.45	0.00	0.00	0.00	0.00
	114	0.00	0.47	0.00	0.00	0.00	0.00
	115	0.00	0.46	0.00	0.00	0.00	0.00
	116	0.00	0.44	0.00	0.00	0.00	0.00
	117	0.00	0.44	0.00	0.00	0.00	0.00
	118	0.00	0.47	0.00	0.00	0.00	0.00
	119	0.00	0.46	0.00	0.00	0.00	0.00
	120	0.00	0.30	0.00	0.00	0.00	0.00
	121	0.00	0.29	0.00	0.00	0.00	0.00
	122	0.00	0.30	0.00	0.00	0.00	0.00
	123	0.00	0.30	0.00	0.00	0.00	0.00
	124	0.00	0.39	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.44	0.00	0.00	0.00	0.00
	127	0.00	0.42	0.00	0.00	0.00	0.00
105	100	0.00	0.43	0.00	0.00	0.00	0.00
	101	0.00	0.43	0.00	0.00	0.00	0.00
	102	0.00	0.48	0.00	0.00	0.00	0.00
	103	0.00	0.46	0.00	0.00	0.00	0.00
	104	0.00	0.45	0.00	0.00	0.00	0.00
	105	0.00	0.45	0.00	0.00	0.00	0.00
	106	0.00	0.48	0.00	0.00	0.00	0.00
	107	0.00	0.47	0.00	0.00	0.00	0.00
	108	0.00	0.44	0.00	0.00	0.00	0.00
	109	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	0.47	0.00	0.00	0.00	0.00
	111	0.00	0.46	0.00	0.00	0.00	0.00
	112	0.00	0.45	0.00	0.00	0.00	0.00
	113	0.00	0.45	0.00	0.00	0.00	0.00
	114	0.00	0.48	0.00	0.00	0.00	0.00
	115	0.00	0.47	0.00	0.00	0.00	0.00
	116	0.00	0.45	0.00	0.00	0.00	0.00
	117	0.00	0.45	0.00	0.00	0.00	0.00
	118	0.00	0.47	0.00	0.00	0.00	0.00
	119	0.00	0.46	0.00	0.00	0.00	0.00
	120	0.00	0.31	0.00	0.00	0.00	0.00
	121	0.00	0.29	0.00	0.00	0.00	0.00
	122	0.00	0.31	0.00	0.00	0.00	0.00
	123	0.00	0.30	0.00	0.00	0.00	0.00
	124	0.00	0.40	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.44	0.00	0.00	0.00	0.00
	127	0.00	0.42	0.00	0.00	0.00	0.00
106	100	0.00	0.20	0.00	0.00	0.00	0.00
	101	0.00	0.20	0.00	0.00	0.00	0.00
	102	0.00	0.23	0.00	0.00	0.00	0.00
	103	0.00	0.22	0.00	0.00	0.00	0.00
	104	0.00	0.21	0.00	0.00	0.00	0.00
	105	0.00	0.21	0.00	0.00	0.00	0.00
	106	0.00	0.24	0.00	0.00	0.00	0.00
	107	0.00	0.24	0.00	0.00	0.00	0.00
	108	0.00	0.22	0.00	0.00	0.00	0.00
	109	0.00	0.22	0.00	0.00	0.00	0.00
	110	0.00	0.24	0.00	0.00	0.00	0.00
	111	0.00	0.23	0.00	0.00	0.00	0.00
	112	0.00	0.23	0.00	0.00	0.00	0.00
	113	0.00	0.23	0.00	0.00	0.00	0.00
	114	0.00	0.24	0.00	0.00	0.00	0.00
	115	0.00	0.24	0.00	0.00	0.00	0.00
	116	0.00	0.23	0.00	0.00	0.00	0.00
	117	0.00	0.23	0.00	0.00	0.00	0.00
	118	0.00	0.24	0.00	0.00	0.00	0.00
	119	0.00	0.23	0.00	0.00	0.00	0.00
	120	0.00	0.15	0.00	0.00	0.00	0.00
	121	0.00	0.14	0.00	0.00	0.00	0.00
	122	0.00	0.15	0.00	0.00	0.00	0.00
	123	0.00	0.15	0.00	0.00	0.00	0.00
	124	0.00	0.20	0.00	0.00	0.00	0.00
	125	0.00	0.20	0.00	0.00	0.00	0.00
	126	0.00	0.22	0.00	0.00	0.00	0.00
	127	0.00	0.21	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
107	100	0.00	1.05	0.00	0.00	0.00	0.00
	101	0.00	1.05	0.00	0.00	0.00	0.00
	102	0.00	1.16	0.00	0.00	0.00	0.00
	103	0.00	1.12	0.00	0.00	0.00	0.00
	104	0.00	1.07	0.00	0.00	0.00	0.00
	105	0.00	1.07	0.00	0.00	0.00	0.00
	106	0.00	1.08	0.00	0.00	0.00	0.00
	107	0.00	1.05	0.00	0.00	0.00	0.00
	108	0.00	0.99	0.00	0.00	0.00	0.00
	109	0.00	1.00	0.00	0.00	0.00	0.00
	110	0.00	1.06	0.00	0.00	0.00	0.00
	111	0.00	1.04	0.00	0.00	0.00	0.00
	112	0.00	1.01	0.00	0.00	0.00	0.00
	113	0.00	1.01	0.00	0.00	0.00	0.00
	114	0.00	1.07	0.00	0.00	0.00	0.00
	115	0.00	1.05	0.00	0.00	0.00	0.00
	116	0.00	1.00	0.00	0.00	0.00	0.00
	117	0.00	1.00	0.00	0.00	0.00	0.00
	118	0.00	1.07	0.00	0.00	0.00	0.00
	119	0.00	1.04	0.00	0.00	0.00	0.00
	120	0.00	0.70	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	0.70	0.00	0.00	0.00	0.00
	123	0.00	0.69	0.00	0.00	0.00	0.00
	124	0.00	0.91	0.00	0.00	0.00	0.00
	125	0.00	0.91	0.00	0.00	0.00	0.00
	126	0.00	1.02	0.00	0.00	0.00	0.00
	127	0.00	0.98	0.00	0.00	0.00	0.00
108	100	0.00	1.00	0.00	0.00	0.00	0.00
	101	0.00	1.00	0.00	0.00	0.00	0.00
	102	0.00	1.10	0.00	0.00	0.00	0.00
	103	0.00	1.07	0.00	0.00	0.00	0.00
	104	0.00	1.02	0.00	0.00	0.00	0.00
	105	0.00	1.03	0.00	0.00	0.00	0.00
	106	0.00	1.09	0.00	0.00	0.00	0.00
	107	0.00	1.06	0.00	0.00	0.00	0.00
	108	0.00	1.01	0.00	0.00	0.00	0.00
	109	0.00	1.01	0.00	0.00	0.00	0.00
	110	0.00	1.07	0.00	0.00	0.00	0.00
	111	0.00	1.05	0.00	0.00	0.00	0.00
	112	0.00	1.02	0.00	0.00	0.00	0.00
	113	0.00	1.02	0.00	0.00	0.00	0.00
	114	0.00	1.09	0.00	0.00	0.00	0.00
	115	0.00	1.06	0.00	0.00	0.00	0.00
	116	0.00	1.01	0.00	0.00	0.00	0.00
	117	0.00	1.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.08	0.00	0.00	0.00	0.00
	119	0.00	1.06	0.00	0.00	0.00	0.00
	120	0.00	0.71	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	0.71	0.00	0.00	0.00	0.00
	123	0.00	0.70	0.00	0.00	0.00	0.00
	124	0.00	0.91	0.00	0.00	0.00	0.00
	125	0.00	0.92	0.00	0.00	0.00	0.00
	126	0.00	1.02	0.00	0.00	0.00	0.00
	127	0.00	0.99	0.00	0.00	0.00	0.00
109	100	0.00	0.95	0.00	0.00	0.00	0.00
	101	0.00	0.95	0.00	0.00	0.00	0.00
	102	0.00	1.05	0.00	0.00	0.00	0.00
	103	0.00	1.02	0.00	0.00	0.00	0.00
	104	0.00	0.98	0.00	0.00	0.00	0.00
	105	0.00	0.98	0.00	0.00	0.00	0.00
	106	0.00	1.10	0.00	0.00	0.00	0.00
	107	0.00	1.08	0.00	0.00	0.00	0.00
	108	0.00	1.02	0.00	0.00	0.00	0.00
	109	0.00	1.02	0.00	0.00	0.00	0.00
	110	0.00	1.08	0.00	0.00	0.00	0.00
	111	0.00	1.06	0.00	0.00	0.00	0.00
	112	0.00	1.04	0.00	0.00	0.00	0.00
	113	0.00	1.04	0.00	0.00	0.00	0.00
	114	0.00	1.10	0.00	0.00	0.00	0.00
	115	0.00	1.08	0.00	0.00	0.00	0.00
	116	0.00	1.03	0.00	0.00	0.00	0.00
	117	0.00	1.03	0.00	0.00	0.00	0.00
	118	0.00	1.09	0.00	0.00	0.00	0.00
	119	0.00	1.07	0.00	0.00	0.00	0.00
	120	0.00	0.71	0.00	0.00	0.00	0.00
	121	0.00	0.69	0.00	0.00	0.00	0.00
	122	0.00	0.71	0.00	0.00	0.00	0.00
	123	0.00	0.70	0.00	0.00	0.00	0.00
	124	0.00	0.92	0.00	0.00	0.00	0.00
	125	0.00	0.92	0.00	0.00	0.00	0.00
	126	0.00	1.02	0.00	0.00	0.00	0.00
	127	0.00	0.99	0.00	0.00	0.00	0.00
110	100	0.00	0.45	0.00	0.00	0.00	0.00
	101	0.00	0.45	0.00	0.00	0.00	0.00
	102	0.00	0.50	0.00	0.00	0.00	0.00
	103	0.00	0.48	0.00	0.00	0.00	0.00
	104	0.00	0.47	0.00	0.00	0.00	0.00
	105	0.00	0.47	0.00	0.00	0.00	0.00
	106	0.00	0.56	0.00	0.00	0.00	0.00
	107	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.51	0.00	0.00	0.00	0.00
	109	0.00	0.51	0.00	0.00	0.00	0.00
	110	0.00	0.55	0.00	0.00	0.00	0.00
	111	0.00	0.53	0.00	0.00	0.00	0.00
	112	0.00	0.53	0.00	0.00	0.00	0.00
	113	0.00	0.53	0.00	0.00	0.00	0.00
	114	0.00	0.56	0.00	0.00	0.00	0.00
	115	0.00	0.54	0.00	0.00	0.00	0.00
	116	0.00	0.52	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.55	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.36	0.00	0.00	0.00	0.00
	121	0.00	0.34	0.00	0.00	0.00	0.00
	122	0.00	0.36	0.00	0.00	0.00	0.00
	123	0.00	0.35	0.00	0.00	0.00	0.00
	124	0.00	0.46	0.00	0.00	0.00	0.00
	125	0.00	0.46	0.00	0.00	0.00	0.00
	126	0.00	0.51	0.00	0.00	0.00	0.00
	127	0.00	0.49	0.00	0.00	0.00	0.00
111	100	0.00	1.14	0.00	0.00	0.00	0.00
	101	0.00	1.14	0.00	0.00	0.00	0.00
	102	0.00	1.25	0.00	0.00	0.00	0.00
	103	0.00	1.22	0.00	0.00	0.00	0.00
	104	0.00	1.15	0.00	0.00	0.00	0.00
	105	0.00	1.16	0.00	0.00	0.00	0.00
	106	0.00	1.22	0.00	0.00	0.00	0.00
	107	0.00	1.19	0.00	0.00	0.00	0.00
	108	0.00	1.13	0.00	0.00	0.00	0.00
	109	0.00	1.14	0.00	0.00	0.00	0.00
	110	0.00	1.22	0.00	0.00	0.00	0.00
	111	0.00	1.18	0.00	0.00	0.00	0.00
	112	0.00	1.14	0.00	0.00	0.00	0.00
	113	0.00	1.14	0.00	0.00	0.00	0.00
	114	0.00	1.22	0.00	0.00	0.00	0.00
	115	0.00	1.19	0.00	0.00	0.00	0.00
	116	0.00	1.13	0.00	0.00	0.00	0.00
	117	0.00	1.14	0.00	0.00	0.00	0.00
	118	0.00	1.22	0.00	0.00	0.00	0.00
	119	0.00	1.19	0.00	0.00	0.00	0.00
	120	0.00	0.80	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.80	0.00	0.00	0.00	0.00
	123	0.00	0.79	0.00	0.00	0.00	0.00
	124	0.00	1.04	0.00	0.00	0.00	0.00
	125	0.00	1.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	1.17	0.00	0.00	0.00	0.00
	127	0.00	1.12	0.00	0.00	0.00	0.00
112	100	0.00	1.09	0.00	0.00	0.00	0.00
	101	0.00	1.09	0.00	0.00	0.00	0.00
	102	0.00	1.20	0.00	0.00	0.00	0.00
	103	0.00	1.16	0.00	0.00	0.00	0.00
	104	0.00	1.11	0.00	0.00	0.00	0.00
	105	0.00	1.11	0.00	0.00	0.00	0.00
	106	0.00	1.24	0.00	0.00	0.00	0.00
	107	0.00	1.20	0.00	0.00	0.00	0.00
	108	0.00	1.14	0.00	0.00	0.00	0.00
	109	0.00	1.15	0.00	0.00	0.00	0.00
	110	0.00	1.23	0.00	0.00	0.00	0.00
	111	0.00	1.19	0.00	0.00	0.00	0.00
	112	0.00	1.15	0.00	0.00	0.00	0.00
	113	0.00	1.16	0.00	0.00	0.00	0.00
	114	0.00	1.23	0.00	0.00	0.00	0.00
	115	0.00	1.20	0.00	0.00	0.00	0.00
	116	0.00	1.15	0.00	0.00	0.00	0.00
	117	0.00	1.15	0.00	0.00	0.00	0.00
	118	0.00	1.23	0.00	0.00	0.00	0.00
	119	0.00	1.20	0.00	0.00	0.00	0.00
	120	0.00	0.81	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.80	0.00	0.00	0.00	0.00
	123	0.00	0.80	0.00	0.00	0.00	0.00
	124	0.00	1.04	0.00	0.00	0.00	0.00
	125	0.00	1.04	0.00	0.00	0.00	0.00
	126	0.00	1.17	0.00	0.00	0.00	0.00
	127	0.00	1.13	0.00	0.00	0.00	0.00
113	100	0.00	1.04	0.00	0.00	0.00	0.00
	101	0.00	1.04	0.00	0.00	0.00	0.00
	102	0.00	1.14	0.00	0.00	0.00	0.00
	103	0.00	1.11	0.00	0.00	0.00	0.00
	104	0.00	1.06	0.00	0.00	0.00	0.00
	105	0.00	1.06	0.00	0.00	0.00	0.00
	106	0.00	1.25	0.00	0.00	0.00	0.00
	107	0.00	1.22	0.00	0.00	0.00	0.00
	108	0.00	1.15	0.00	0.00	0.00	0.00
	109	0.00	1.16	0.00	0.00	0.00	0.00
	110	0.00	1.23	0.00	0.00	0.00	0.00
	111	0.00	1.20	0.00	0.00	0.00	0.00
	112	0.00	1.17	0.00	0.00	0.00	0.00
	113	0.00	1.17	0.00	0.00	0.00	0.00
	114	0.00	1.25	0.00	0.00	0.00	0.00
	115	0.00	1.21	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.16	0.00	0.00	0.00	0.00
	117	0.00	1.16	0.00	0.00	0.00	0.00
	118	0.00	1.24	0.00	0.00	0.00	0.00
	119	0.00	1.21	0.00	0.00	0.00	0.00
	120	0.00	0.81	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.81	0.00	0.00	0.00	0.00
	123	0.00	0.80	0.00	0.00	0.00	0.00
	124	0.00	1.04	0.00	0.00	0.00	0.00
	125	0.00	1.04	0.00	0.00	0.00	0.00
	126	0.00	1.16	0.00	0.00	0.00	0.00
	127	0.00	1.13	0.00	0.00	0.00	0.00
114	100	0.00	0.50	0.00	0.00	0.00	0.00
	101	0.00	0.50	0.00	0.00	0.00	0.00
	102	0.00	0.54	0.00	0.00	0.00	0.00
	103	0.00	0.53	0.00	0.00	0.00	0.00
	104	0.00	0.51	0.00	0.00	0.00	0.00
	105	0.00	0.51	0.00	0.00	0.00	0.00
	106	0.00	0.63	0.00	0.00	0.00	0.00
	107	0.00	0.61	0.00	0.00	0.00	0.00
	108	0.00	0.58	0.00	0.00	0.00	0.00
	109	0.00	0.58	0.00	0.00	0.00	0.00
	110	0.00	0.62	0.00	0.00	0.00	0.00
	111	0.00	0.61	0.00	0.00	0.00	0.00
	112	0.00	0.59	0.00	0.00	0.00	0.00
	113	0.00	0.59	0.00	0.00	0.00	0.00
	114	0.00	0.63	0.00	0.00	0.00	0.00
	115	0.00	0.61	0.00	0.00	0.00	0.00
	116	0.00	0.59	0.00	0.00	0.00	0.00
	117	0.00	0.59	0.00	0.00	0.00	0.00
	118	0.00	0.62	0.00	0.00	0.00	0.00
	119	0.00	0.61	0.00	0.00	0.00	0.00
	120	0.00	0.41	0.00	0.00	0.00	0.00
	121	0.00	0.40	0.00	0.00	0.00	0.00
	122	0.00	0.41	0.00	0.00	0.00	0.00
	123	0.00	0.40	0.00	0.00	0.00	0.00
	124	0.00	0.52	0.00	0.00	0.00	0.00
	125	0.00	0.52	0.00	0.00	0.00	0.00
	126	0.00	0.58	0.00	0.00	0.00	0.00
	127	0.00	0.56	0.00	0.00	0.00	0.00
115	100	0.00	1.23	0.00	0.00	0.00	0.00
	101	0.00	1.24	0.00	0.00	0.00	0.00
	102	0.00	1.35	0.00	0.00	0.00	0.00
	103	0.00	1.31	0.00	0.00	0.00	0.00
	104	0.00	1.24	0.00	0.00	0.00	0.00
	105	0.00	1.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.37	0.00	0.00	0.00	0.00
	107	0.00	1.33	0.00	0.00	0.00	0.00
	108	0.00	1.27	0.00	0.00	0.00	0.00
	109	0.00	1.28	0.00	0.00	0.00	0.00
	110	0.00	1.37	0.00	0.00	0.00	0.00
	111	0.00	1.33	0.00	0.00	0.00	0.00
	112	0.00	1.27	0.00	0.00	0.00	0.00
	113	0.00	1.28	0.00	0.00	0.00	0.00
	114	0.00	1.37	0.00	0.00	0.00	0.00
	115	0.00	1.33	0.00	0.00	0.00	0.00
	116	0.00	1.27	0.00	0.00	0.00	0.00
	117	0.00	1.28	0.00	0.00	0.00	0.00
	118	0.00	1.37	0.00	0.00	0.00	0.00
	119	0.00	1.33	0.00	0.00	0.00	0.00
	120	0.00	0.90	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	0.90	0.00	0.00	0.00	0.00
	123	0.00	0.90	0.00	0.00	0.00	0.00
	124	0.00	1.17	0.00	0.00	0.00	0.00
	125	0.00	1.17	0.00	0.00	0.00	0.00
	126	0.00	1.31	0.00	0.00	0.00	0.00
	127	0.00	1.27	0.00	0.00	0.00	0.00
116	100	0.00	1.18	0.00	0.00	0.00	0.00
	101	0.00	1.18	0.00	0.00	0.00	0.00
	102	0.00	1.29	0.00	0.00	0.00	0.00
	103	0.00	1.26	0.00	0.00	0.00	0.00
	104	0.00	1.19	0.00	0.00	0.00	0.00
	105	0.00	1.19	0.00	0.00	0.00	0.00
	106	0.00	1.38	0.00	0.00	0.00	0.00
	107	0.00	1.34	0.00	0.00	0.00	0.00
	108	0.00	1.28	0.00	0.00	0.00	0.00
	109	0.00	1.29	0.00	0.00	0.00	0.00
	110	0.00	1.38	0.00	0.00	0.00	0.00
	111	0.00	1.34	0.00	0.00	0.00	0.00
	112	0.00	1.28	0.00	0.00	0.00	0.00
	113	0.00	1.29	0.00	0.00	0.00	0.00
	114	0.00	1.38	0.00	0.00	0.00	0.00
	115	0.00	1.34	0.00	0.00	0.00	0.00
	116	0.00	1.28	0.00	0.00	0.00	0.00
	117	0.00	1.29	0.00	0.00	0.00	0.00
	118	0.00	1.37	0.00	0.00	0.00	0.00
	119	0.00	1.34	0.00	0.00	0.00	0.00
	120	0.00	0.91	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	0.90	0.00	0.00	0.00	0.00
	123	0.00	0.90	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.17	0.00	0.00	0.00	0.00
	125	0.00	1.17	0.00	0.00	0.00	0.00
	126	0.00	1.31	0.00	0.00	0.00	0.00
	127	0.00	1.26	0.00	0.00	0.00	0.00
117	100	0.00	1.13	0.00	0.00	0.00	0.00
	101	0.00	1.13	0.00	0.00	0.00	0.00
	102	0.00	1.23	0.00	0.00	0.00	0.00
	103	0.00	1.20	0.00	0.00	0.00	0.00
	104	0.00	1.14	0.00	0.00	0.00	0.00
	105	0.00	1.15	0.00	0.00	0.00	0.00
	106	0.00	1.39	0.00	0.00	0.00	0.00
	107	0.00	1.35	0.00	0.00	0.00	0.00
	108	0.00	1.29	0.00	0.00	0.00	0.00
	109	0.00	1.30	0.00	0.00	0.00	0.00
	110	0.00	1.38	0.00	0.00	0.00	0.00
	111	0.00	1.35	0.00	0.00	0.00	0.00
	112	0.00	1.30	0.00	0.00	0.00	0.00
	113	0.00	1.30	0.00	0.00	0.00	0.00
	114	0.00	1.39	0.00	0.00	0.00	0.00
	115	0.00	1.35	0.00	0.00	0.00	0.00
	116	0.00	1.29	0.00	0.00	0.00	0.00
	117	0.00	1.30	0.00	0.00	0.00	0.00
	118	0.00	1.38	0.00	0.00	0.00	0.00
	119	0.00	1.35	0.00	0.00	0.00	0.00
	120	0.00	0.91	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	0.91	0.00	0.00	0.00	0.00
	123	0.00	0.90	0.00	0.00	0.00	0.00
	124	0.00	1.17	0.00	0.00	0.00	0.00
	125	0.00	1.17	0.00	0.00	0.00	0.00
	126	0.00	1.31	0.00	0.00	0.00	0.00
	127	0.00	1.26	0.00	0.00	0.00	0.00
118	100	0.00	0.54	0.00	0.00	0.00	0.00
	101	0.00	0.54	0.00	0.00	0.00	0.00
	102	0.00	0.59	0.00	0.00	0.00	0.00
	103	0.00	0.57	0.00	0.00	0.00	0.00
	104	0.00	0.55	0.00	0.00	0.00	0.00
	105	0.00	0.55	0.00	0.00	0.00	0.00
	106	0.00	0.70	0.00	0.00	0.00	0.00
	107	0.00	0.68	0.00	0.00	0.00	0.00
	108	0.00	0.65	0.00	0.00	0.00	0.00
	109	0.00	0.65	0.00	0.00	0.00	0.00
	110	0.00	0.69	0.00	0.00	0.00	0.00
	111	0.00	0.68	0.00	0.00	0.00	0.00
	112	0.00	0.65	0.00	0.00	0.00	0.00
	113	0.00	0.66	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	0.70	0.00	0.00	0.00	0.00
	115	0.00	0.68	0.00	0.00	0.00	0.00
	116	0.00	0.65	0.00	0.00	0.00	0.00
	117	0.00	0.65	0.00	0.00	0.00	0.00
	118	0.00	0.69	0.00	0.00	0.00	0.00
	119	0.00	0.68	0.00	0.00	0.00	0.00
	120	0.00	0.46	0.00	0.00	0.00	0.00
	121	0.00	0.45	0.00	0.00	0.00	0.00
	122	0.00	0.46	0.00	0.00	0.00	0.00
	123	0.00	0.45	0.00	0.00	0.00	0.00
	124	0.00	0.58	0.00	0.00	0.00	0.00
	125	0.00	0.59	0.00	0.00	0.00	0.00
	126	0.00	0.65	0.00	0.00	0.00	0.00
	127	0.00	0.63	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	100	-0.1065	-0.4193	-0.0825	-0.0010	0.0000	0.0011
	101	-0.1099	-0.4220	-0.0836	-0.0011	0.0000	0.0011
	102	-0.1132	-0.4606	-0.0942	-0.0012	0.0000	0.0012
	103	-0.1154	-0.4490	-0.0903	-0.0011	0.0000	0.0012
	104	-0.0924	-0.4176	-0.0760	-0.0010	0.0000	0.0009
	105	-0.0956	-0.4203	-0.0769	-0.0010	0.0000	0.0010
	106	-0.2102	-0.4610	0.0362	0.0004	0.0000	0.0024
	107	-0.2034	-0.4487	0.0361	0.0004	0.0000	0.0023
	108	-0.1995	-0.4293	0.0325	0.0004	0.0000	0.0023
	109	-0.2030	-0.4328	0.0302	0.0004	0.0000	0.0023
	110	-0.2219	-0.4636	0.0303	0.0004	0.0000	0.0026
	111	-0.2153	-0.4513	0.0302	0.0004	0.0000	0.0025
	112	-0.1859	-0.4251	0.0395	0.0005	0.0000	0.0021
	113	-0.1894	-0.4286	0.0373	0.0005	0.0000	0.0022
	114	-0.2083	-0.4594	0.0375	0.0005	0.0000	0.0024
	115	-0.2015	-0.4471	0.0372	0.0005	0.0000	0.0023
	116	-0.1892	-0.4261	0.0350	0.0004	0.0000	0.0022
	117	-0.1925	-0.4295	0.0330	0.0004	0.0000	0.0022
	118	-0.2116	-0.4603	0.0330	0.0004	0.0000	0.0024
	119	-0.2048	-0.4480	0.0329	0.0004	0.0000	0.0024
	120	-0.1307	-0.3031	0.0142	0.0002	0.0000	0.0014
	121	-0.1466	-0.3066	0.0063	0.0001	0.0000	0.0016
	122	-0.1285	-0.3010	0.0159	0.0002	0.0000	0.0014
	123	-0.1328	-0.3023	0.0101	0.0001	0.0000	0.0014
	124	-0.1777	-0.3941	0.0151	0.0002	0.0000	0.0020
	125	-0.1822	-0.3979	0.0122	0.0001	0.0000	0.0021
	126	-0.2128	-0.4478	0.0114	0.0001	0.0000	0.0025
	127	-0.2027	-0.4304	0.0139	0.0002	0.0000	0.0023

********** END OF LATEST ANALYSIS RESULT **********

==========

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 450.0 X 450.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2025.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
20 - 12 MM	1.117	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 192.00 MM

**********END OF COLUMN DESIGN RESULTS**********

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 13: 9:18 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

ATTACHMENT 7 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F1

```
STAAD SPACE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
SET ECHO OFF
UNIT METER MTON
JOINT COORDINATES
1 0 0 0; 2 0 1 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1;
11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5;
16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1;
21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1;
26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5;
31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5;
36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5;
41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75;
46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 68 1 0 -0.75; 69 1 0 -1;
70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1;
75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1;
80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1;
85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 103 1 0 0.25; 104 1 0 0.5;
105 1 0 0.75; 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75;
110 0.75 0 1; 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1;
115 0.25 0 0.25; 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1;
119 -1.25 0 -0.75; 120 -1.25 0 -1; 121 -1.25 0 -0.5; 122 -1.25 0 -0.25;
123 -1.25 0 0; 124 -1.25 0 0.25; 125 -1.25 0 0.5; 126 -1.25 0 0.75;
127 -1.25 0 1; 128 -1.5 0 -0.75; 129 -1.5 0 -1; 130 -1.5 0 -0.5;
131 -1.5 0 -0.25; 132 -1.5 0 0; 133 -1.5 0 0.25; 134 -1.5 0 0.5;
135 -1.5 0 0.75; 136 -1.5 0 1; 137 1.25 0 -1; 138 1.25 0 -0.75;
139 1.25 0 -0.5; 140 1.25 0 -0.25; 141 1.25 0 0; 142 1.25 0 0.25;
143 1.25 0 0.5; 144 1.25 0 0.75; 145 1.25 0 1; 146 -1.75 0 -0.75;
147 -1.75 0 -1; 148 -1.75 0 -0.5; 149 -1.75 0 -0.25; 150 -1.75 0 0;
151 -1.75 0 0.25; 152 -1.75 0 0.5; 153 -1.75 0 0.75; 154 -1.75 0 1;
MEMBER INCIDENCES
101 2 1;
ELEMENT INCIDENCES SHELL
5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20;
10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24;
15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30;
20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37;
25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28;
30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47;
35 44 45 49 48; 36 45 46 6 49; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75;
56 71 72 77 76; 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81;
61 79 78 83 84; 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8;
66 83 85 14 11; 67 85 86 16 14; 68 86 87 1 16; 85 72 103 107 77;
86 103 104 108 107; 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82;
90 107 108 112 111; 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87;
94 111 112 116 115; 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1;
98 115 116 34 32; 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120;
103 29 30 121 119; 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123;
107 47 48 125 124; 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129;
111 119 121 130 128; 112 121 122 131 130; 113 122 123 132 131;
114 123 124 133 132; 115 124 125 134 133; 116 125 126 135 134;
117 126 127 136 135; 118 137 138 68 69; 119 138 139 70 68; 120 139 140 71 70;
121 140 141 72 71; 122 141 142 103 72; 123 142 143 104 103;
124 143 144 105 104; 125 144 145 106 105; 126 129 128 146 147;
127 128 130 148 146; 128 130 131 149 148; 129 131 132 150 149;
130 132 133 151 150; 131 133 134 152 151; 132 134 135 153 152;
133 135 136 154 153;
START GROUP DEFINITION
ELEMENT
_MAX_BM 5 TO 7 9 TO 11 13 TO 20 22 TO 24 26 TO 36 53 TO 67 85 TO 96 -
98 TO 100 102 TO 133
_MAX_SF 5 9 13 17 24 28 32 36 53 TO 57 61 65 85 TO 88 92 96 100 102 TO 133
END GROUP DEFINITION
ELEMENT PROPERTY
5 TO 36 53 TO 68 85 TO 100 102 TO 133 THICKNESS 0.5
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
101 PRIS YD 0.85 ZD 0.65
```

```
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
5 TO 36 53 TO 68 85 TO 100 102 TO 132 -
133 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
********************************************************************************
LOAD 100 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 1)
SELFWEIGHT Y -1
*CRITICAL SUPPORT REACTION FROM TRIPPER FRAME STAAD ANALYSIS(NODE 7)
JOINT LOAD
2 FX 2.87 FY -69.68 FZ -0.34 MX 2.989 MZ -13.534
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
* FOR AVG. 4M HIGH STORAGE, SURCHARGE = 4*1.6 = 6.5T/m2
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 101 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 2)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 2.88 FY -69.66 FZ -0.25 MX 2.578 MZ -13.396
********************************************************************************
LOAD 102 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 3)
JOINT LOAD
2 FX 4.28 FY -80.17 FZ -0.63 MX 3.688 MZ -11.687
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 103 LOADTYPE None  TITLE (DL+LL+WHEEL_TRIPPER 4)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 4.74 FY -81.57 FZ -0.47 MX 3.386 MZ -10.483
********************************************************************************8
LOAD 104 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 3.57 FY -70.55 FZ 1.12 MX -4.479 MZ -9.711
********************************************************************************
LOAD 105 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 3.58 FY -70.53 FZ 1.21 MX -4.89 MZ -9.573
********************************************************************************
LOAD 106 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLX(+0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX 4.63 FY -76.65 FZ 0.89 MX -4.02 MZ -8.486
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 107 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 5.09 FY -78.05 FZ 1.04 MX -4.323 MZ -7.282
********************************************************************************
LOAD 108 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 2.56 FY -62.8 FZ -1.39 MX 8.013 MZ -15.277
********************************************************************88
```

```
********************************************************************************
LOAD 109 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLX(-0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX 2.58 FY -62.78 FZ -1.3 MX 7.602 MZ -15.139
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
* FOR AVG. 4M HIGH STORAGE, SURCHARGE = 4*1.6 = 6.5T/m2
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 110 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 3.62 FY -68.9 FZ -1.62 MX 8.472 MZ -14.052
********************************************************************************
LOAD 111 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLX(-0.55)
JOINT LOAD
2 FX 4.08 FY -70.3 FZ -1.47 MX 8.169 MZ -12.848
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 112 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 3.08 FY -82.89 FZ 0.95 MX -3.711 MZ -12.301
********************************************************************************8
LOAD 113 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 3.09 FY -82.86 FZ 1.04 MX -4.122 MZ -12.163
********************************************************************************
LOAD 114 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 4.14 FY -88.98 FZ 0.72 MX -3.252 MZ -11.077
********************************************************************************
LOAD 115 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLZ(+0.55)
SELFWEIGHT Y -1
JOINT LOAD
2 FX 4.6 FY -90.38 FZ 0.87 MX -3.555 MZ -9.873
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
********************************************************************************
LOAD 116 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 1+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 2.94 FY -78.83 FZ 0.42 MX -1.072 MZ -13.061
********************************************************************************
LOAD 117 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 2+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 2.96 FY -78.81 FZ 0.51 MX -1.483 MZ -12.923
********************************************************************88
LOAD 118 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 3+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
```

```
2 FX 4 FY -84.93 FZ 0.18 MX -0.614 MZ -11.836
*********************************************************************************
LOAD 119 LOADTYPE None  TITLE DL+LL+WHEEL_TRIPPER 4+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 4.46 FY -86.33 FZ 0.34 MX -0.916 MZ -10.632
*********************************************************************
LOAD 120 LOADTYPE None  TITLE 0.6DL+WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -3.6
5 TO 36 102 TO 117 126 TO 133 PR GY -4
JOINT LOAD
2 FX 2.03 FY -35.06 FZ 1.87 MX -8.72 MZ -4.078
*********************************************************************************
LOAD 121 LOADTYPE None  TITLE 0.6DL+WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -3.6
5 TO 36 102 TO 117 126 TO 133 PR GY -4
JOINT LOAD
2 FX 0.69 FY -24.74 FZ -1.48 MX 7.936 MZ -11.5
*****************************************************************88
LOAD 122 LOADTYPE None  TITLE 0.6DL+WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -3.6
5 TO 36 102 TO 117 126 TO 133 PR GY -4
JOINT LOAD
2 FX 1.37 FY -51.51 FZ 1.64 MX -7.696 MZ -7.532
*********************************************************************************
LOAD 123 LOADTYPE None  TITLE 0.6DL+WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -3.6
5 TO 36 102 TO 117 126 TO 133 PR GY -4
JOINT LOAD
2 FX 1.19 FY -46.1 FZ 0.93 MX -4.178 MZ -8.545
*****************************************************************
LOAD 124 LOADTYPE None  TITLE DL+TR1_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 1.83 FY -56.52 FZ -0.14 MX 2.095 MZ -15.258
*********************************************************************************
LOAD 125 LOADTYPE None  TITLE DL+TR2_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 1.73 FY -56.45 FZ -0.12 MX 1.992 MZ -15.713
*****************************************************************88
LOAD 126 LOADTYPE None  TITLE DL+TR3_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 1.95 FY -64.28 FZ -0.6 MX 3.35 MZ -20.401
*********************************************************************************
LOAD 127 LOADTYPE None  TITLE DL+TR4_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -6
5 TO 36 102 TO 117 126 TO 133 PR GY -6.5
JOINT LOAD
2 FX 2.67 FY -67.6 FZ -0.39 MX 2.839 MZ -19.179
*********************************************************************************8
*********************************************************************************
*LOAD CASES FOR FOUNDATION DESIGN
LOAD 200 LOADTYPE None  TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 1)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
```

5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
*CRITICAL SUPPORT REACTION FROM TRIPPER FRAME STAAD ANALYSIS(NODE 7)
2 FZ -0.6 FY -95.91 FX 4.41 MZ -14.599 MX 4.452

****
LOAD 201 LOADTYPE None TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 2)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.42 FY -95.87 FX 4.45 MZ -14.305 MX 3.575

****
LOAD 202 LOADTYPE None TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 3)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -1.1 FY -108.92 FX 6.68 MZ -11.987 MX 5.43

****
LOAD 203 LOADTYPE None TITLE (1.2*DL+1.6*LL+1.6*WHEEL_TRIPPER 4)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.77 FY -111.91 FX 7.66 MZ -9.419 MX 4.785

****
LOAD 204 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.69 FY -87.23 FX 5.07 MZ -7.85 MX -12.221

****
LOAD 205 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.8 FY -87.2 FX 5.1 MZ -7.666 MX -12.769

****
LOAD 206 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.37 FY -95.36 FX 6.49 MZ -6.217 MX -11.609

****
LOAD 207 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.58 FY -97.22 FX 7.1 MZ -4.612 MX -12.013

****
LOAD 208 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8

```
JOINT LOAD
2 FZ -2.67 FY -70.7 FX 2.93 MZ -19.725 MX 14.428

*****************************************************
LOAD 209 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -2.55 FY -70.67 FX 2.95 MZ -19.54 MX 13.88

*****************************************************
LOAD 210 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -2.98 FY -78.83 FX 4.34 MZ -18.092 MX 15.04

*****************************************************
LOAD 211 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLX(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -2.78 FY -80.7 FX 4.95 MZ -16.487 MX 14.636

*****************************************************
LOAD 212 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.32 FY -113.54 FX 4.03 MZ -13.377 MX -10.583

*****************************************************
LOAD 213 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.44 FY -113.51 FX 4.05 MZ -13.192 MX -11.131

*****************************************************
LOAD 214 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.01 FY -121.67 FX 5.44 MZ -11.744 MX -9.972

*****************************************************
LOAD 215 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(+0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 2.22 FY -123.54 FX 6.06 MZ -10.139 MX -10.375

*****************************************************
LOAD 216 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 1+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 1.18 FY -104.89 FX 3.74 MZ -14.997 MX -4.954

*****************************************************
LOAD 217 LOADTYPE None  TITLE 1.2*DL+LL+WHEEL_TRIPPER 2+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
```

5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 1.3 FY -104.86 FX 3.76 MZ -14.813 MX -5.502

****
LOAD 218 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 3+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 0.87 FY -113.02 FX 5.15 MZ -13.364 MX -4.343

****
LOAD 219 LOADTYPE None TITLE 1.2*DL+LL+WHEEL_TRIPPER 4+1.6*WLZ(-0.55)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ 1.08 FY -114.88 FX 5.77 MZ -11.759 MX -4.746

****
LOAD 220 LOADTYPE None TITLE 1.2*DL+1.6*TR1_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.17 FY -67.83 FX 2.2 MZ -18.295 MX 2.528

****
LOAD 221 LOADTYPE None TITLE 1.2*DL+1.6*TR2_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.14 FY -67.72 FX 2.04 MZ -19.024 MX 2.362

****
LOAD 222 LOADTYPE None TITLE 1.2*DL+1.6*TR3_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.91 FY -80.25 FX 2.39 MZ -26.525 MX 4.534

****
LOAD 223 LOADTYPE None TITLE 1.2*DL+1.6*TR4_CHOCKED
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -7.2
5 TO 36 102 TO 117 126 TO 133 PR GY -7.8
JOINT LOAD
2 FZ -0.57 FY -85.56 FX 3.55 MZ -24.57 MX 3.718

****
LOAD 224 LOADTYPE None TITLE 0.9*DL+1.6*WL(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -5.4
5 TO 36 102 TO 117 126 TO 133 PR GY -6
JOINT LOAD
2 FZ 3 FY -52.71 FX 3.14 MZ -5.607 MX -14.075

****
LOAD 225 LOADTYPE None TITLE 0.9*DL+1.6*WL(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -5.4
5 TO 36 102 TO 117 126 TO 133 PR GY -6
JOINT LOAD
2 FZ -2.35 FY -36.19 FX 0.99 MZ -17.482 MX 12.574

****
LOAD 226 LOADTYPE None TITLE 0.9*DL+1.6*WL(+Z)

```
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -5.4
5 TO 36 102 TO 117 126 TO 133 PR GY -6
JOINT LOAD
2 FZ 2.64 FY -79.03 FX 2.09 MZ -11.134 MX -12.438


*****************************************************
LOAD 227 LOADTYPE None  TITLE 0.9*DL+1.6*WL(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 133 PR GY -5.4
5 TO 36 102 TO 117 126 TO 133 PR GY -6
JOINT LOAD
2 FZ 1.5 FY -70.37 FX 1.8 MZ -12.754 MX -6.809


*****************************************************
PERFORM ANALYSIS
LOAD LIST 100 TO 127
PRINT SUPPORT REACTION ALL
PRINT JOINT DISPLACEMENTS LIST 2
LOAD LIST 200 TO 227
START CONCRETE DESIGN
CODE ACI
CLB 0.05 MEMB 101
CLS 0.05 ALL
CLT 0.05 MEMB 101
FC 3567 MEMB 5 TO 36 53 TO 68 85 TO 117
FYMAIN 42813 MEMB 5 TO 36 53 TO 68 85 TO 117
FYSEC 42813 ALL
MAXMAIN 32 ALL
MINMAIN 12 ALL
CLB 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 133
CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 133
CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 133
DESIGN COLUMN 101
END CONCRETE DESIGN
FINISH
```

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    13: 8:19                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F1.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. SET ECHO OFF
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.031250
6	0.031250
8	0.031250
9	0.031250
11	0.062500
12	0.062500
13	0.031250
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.031250
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.031250
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500

33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.031250
39	0.062500
40	0.062500
41	0.062500
42	0.031250
43	0.062500
44	0.062500
45	0.062500
46	0.031250
47	0.062500
48	0.062500
49	0.062500
68	0.062500
69	0.031250
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.031250
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.031250
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.031250
85	0.062500
86	0.062500
87	0.062500
103	0.062500
104	0.062500
105	0.062500
106	0.031250
107	0.062500
108	0.062500
109	0.062500
110	0.031250
111	0.062500
112	0.062500
113	0.062500
114	0.031250
115	0.062500
116	0.062500
117	0.062500
118	0.031250
119	0.062500
120	0.031250
121	0.062500

122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.031250
128	0.062500
129	0.031250
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.031250
137	0.015625
138	0.031250
139	0.031250
140	0.031250
141	0.031250
142	0.031250
143	0.031250
144	0.031250
145	0.015625
146	0.031250
147	0.015625
148	0.031250
149	0.031250
150	0.031250
151	0.031250
152	0.031250
153	0.031250
154	0.015625
TOTAL	6.000000

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS 118 NUMBER OF MEMBERS 1
NUMBER OF PLATES 96 NUMBER OF SOLIDS 0
NUMBER OF SURFACES 0 NUMBER OF SUPPORTS 117

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 86/ 15/ 48 DOF
TOTAL PRIMARY LOAD CASES = 56, TOTAL DEGREES OF FREEDOM = 357
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 18 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.0/ 165031.9 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 114

**NOTE-Tension/Compression converged after 1 iterations, Case= 115

**NOTE-Tension/Compression converged after 1 iterations, Case= 116

**NOTE-Tension/Compression converged after 1 iterations, Case= 117

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

**NOTE-Tension/Compression converged after 1 iterations, Case= 121

**NOTE-Tension/Compression converged after 1 iterations, Case= 122

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

**NOTE-Tension/Compression converged after 1 iterations, Case= 125

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

**NOTE-Tension/Compression converged after 1 iterations, Case= 200

**NOTE-Tension/Compression converged after 1 iterations, Case= 201

**NOTE-Tension/Compression converged after 1 iterations, Case= 202

**NOTE-Tension/Compression converged after 1 iterations, Case= 203

**NOTE-Tension/Compression converged after 1 iterations, Case= 204

**NOTE-Tension/Compression converged after 1 iterations, Case= 205

**NOTE-Tension/Compression converged after 1 iterations, Case= 206

**NOTE-Tension/Compression converged after 1 iterations, Case= 207

**NOTE-Tension/Compression converged after 1 iterations, Case= 208

**NOTE-Tension/Compression converged after 1 iterations, Case= 209

**NOTE-Tension/Compression converged after 1 iterations, Case= 210

**NOTE-Tension/Compression converged after 1 iterations, Case= 211

**NOTE-Tension/Compression converged after 1 iterations, Case= 212

**NOTE-Tension/Compression converged after 1 iterations, Case= 214

**NOTE-Tension/Compression converged after 1 iterations, Case= 215

**NOTE-Tension/Compression converged after 1 iterations, Case= 216

**NOTE-Tension/Compression converged after 1 iterations, Case= 217

**NOTE-Tension/Compression converged after 1 iterations, Case= 218

**NOTE-Tension/Compression converged after 1 iterations, Case= 219

**NOTE-Tension/Compression converged after 1 iterations, Case= 220

**NOTE-Tension/Compression converged after 1 iterations, Case= 221

**NOTE-Tension/Compression converged after 1 iterations, Case= 222

**NOTE-Tension/Compression converged after 1 iterations, Case= 223

**NOTE-Tension/Compression converged after 1 iterations, Case= 224

**NOTE-Tension/Compression converged after 1 iterations, Case= 225

**NOTE-Tension/Compression converged after 1 iterations, Case= 226

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	100	-2.87	1.56	0.34	0.00	0.00	0.00
	101	-2.88	1.56	0.25	0.00	0.00	0.00
	102	-4.28	1.69	0.63	0.00	0.00	0.00
	103	-4.74	1.71	0.47	0.00	0.00	0.00
	104	-3.57	1.57	-1.12	0.00	0.00	0.00
	105	-3.58	1.56	-1.21	0.00	0.00	0.00
	106	-4.63	1.64	-0.89	0.00	0.00	0.00
	107	-5.09	1.65	-1.04	0.00	0.00	0.00
	108	-2.56	1.48	1.39	0.00	0.00	0.00
	109	-2.58	1.48	1.30	0.00	0.00	0.00
	110	-3.62	1.56	1.62	0.00	0.00	0.00
	111	-4.08	1.57	1.47	0.00	0.00	0.00
	112	-3.08	1.72	-0.95	0.00	0.00	0.00
	113	-3.09	1.72	-1.04	0.00	0.00	0.00
	114	-4.14	1.80	-0.72	0.00	0.00	0.00
	115	-4.60	1.81	-0.87	0.00	0.00	0.00
	116	-2.94	1.68	-0.42	0.00	0.00	0.00
	117	-2.96	1.68	-0.51	0.00	0.00	0.00
	118	-4.00	1.75	-0.18	0.00	0.00	0.00
	119	-4.46	1.77	-0.34	0.00	0.00	0.00
	120	-2.03	0.88	-1.87	0.00	0.00	0.00
	121	-0.69	0.78	1.48	0.00	0.00	0.00
	122	-1.37	1.09	-1.64	0.00	0.00	0.00
	123	-1.19	1.03	-0.93	0.00	0.00	0.00
	124	-1.83	1.40	0.14	0.00	0.00	0.00
	125	-1.73	1.41	0.12	0.00	0.00	0.00
	126	-1.95	1.52	0.60	0.00	0.00	0.00
	127	-2.67	1.56	0.39	0.00	0.00	0.00
3	100	0.00	1.22	0.00	0.00	0.00	0.00
	101	0.00	1.23	0.00	0.00	0.00	0.00
	102	0.00	1.31	0.00	0.00	0.00	0.00
	103	0.00	1.33	0.00	0.00	0.00	0.00
	104	0.00	1.26	0.00	0.00	0.00	0.00
	105	0.00	1.26	0.00	0.00	0.00	0.00
	106	0.00	1.31	0.00	0.00	0.00	0.00
	107	0.00	1.33	0.00	0.00	0.00	0.00
	108	0.00	1.15	0.00	0.00	0.00	0.00
	109	0.00	1.16	0.00	0.00	0.00	0.00
	110	0.00	1.20	0.00	0.00	0.00	0.00
	111	0.00	1.22	0.00	0.00	0.00	0.00
	112	0.00	1.34	0.00	0.00	0.00	0.00
	113	0.00	1.34	0.00	0.00	0.00	0.00
	114	0.00	1.39	0.00	0.00	0.00	0.00
	115	0.00	1.41	0.00	0.00	0.00	0.00
	116	0.00	1.30	0.00	0.00	0.00	0.00
	117	0.00	1.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.37	0.00	0.00	0.00	0.00
	120	0.00	0.76	0.00	0.00	0.00	0.00
	121	0.00	0.61	0.00	0.00	0.00	0.00
	122	0.00	0.86	0.00	0.00	0.00	0.00
	123	0.00	0.81	0.00	0.00	0.00	0.00
	124	0.00	1.11	0.00	0.00	0.00	0.00
	125	0.00	1.11	0.00	0.00	0.00	0.00
	126	0.00	1.12	0.00	0.00	0.00	0.00
	127	0.00	1.15	0.00	0.00	0.00	0.00
5	100	0.00	0.80	0.00	0.00	0.00	0.00
	101	0.00	0.79	0.00	0.00	0.00	0.00
	102	0.00	0.86	0.00	0.00	0.00	0.00
	103	0.00	0.87	0.00	0.00	0.00	0.00
	104	0.00	0.70	0.00	0.00	0.00	0.00
	105	0.00	0.70	0.00	0.00	0.00	0.00
	106	0.00	0.74	0.00	0.00	0.00	0.00
	107	0.00	0.75	0.00	0.00	0.00	0.00
	108	0.00	0.82	0.00	0.00	0.00	0.00
	109	0.00	0.81	0.00	0.00	0.00	0.00
	110	0.00	0.86	0.00	0.00	0.00	0.00
	111	0.00	0.86	0.00	0.00	0.00	0.00
	112	0.00	0.79	0.00	0.00	0.00	0.00
	113	0.00	0.78	0.00	0.00	0.00	0.00
	114	0.00	0.83	0.00	0.00	0.00	0.00
	115	0.00	0.83	0.00	0.00	0.00	0.00
	116	0.00	0.80	0.00	0.00	0.00	0.00
	117	0.00	0.79	0.00	0.00	0.00	0.00
	118	0.00	0.84	0.00	0.00	0.00	0.00
	119	0.00	0.84	0.00	0.00	0.00	0.00
	120	0.00	0.32	0.00	0.00	0.00	0.00
	121	0.00	0.48	0.00	0.00	0.00	0.00
	122	0.00	0.43	0.00	0.00	0.00	0.00
	123	0.00	0.45	0.00	0.00	0.00	0.00
	124	0.00	0.71	0.00	0.00	0.00	0.00
	125	0.00	0.71	0.00	0.00	0.00	0.00
	126	0.00	0.77	0.00	0.00	0.00	0.00
	127	0.00	0.79	0.00	0.00	0.00	0.00
6	100	0.00	0.65	0.00	0.00	0.00	0.00
	101	0.00	0.64	0.00	0.00	0.00	0.00
	102	0.00	0.70	0.00	0.00	0.00	0.00
	103	0.00	0.70	0.00	0.00	0.00	0.00
	104	0.00	0.58	0.00	0.00	0.00	0.00
	105	0.00	0.57	0.00	0.00	0.00	0.00
	106	0.00	0.61	0.00	0.00	0.00	0.00
	107	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.67	0.00	0.00	0.00	0.00
	109	0.00	0.67	0.00	0.00	0.00	0.00
	110	0.00	0.70	0.00	0.00	0.00	0.00
	111	0.00	0.71	0.00	0.00	0.00	0.00
	112	0.00	0.62	0.00	0.00	0.00	0.00
	113	0.00	0.62	0.00	0.00	0.00	0.00
	114	0.00	0.65	0.00	0.00	0.00	0.00
	115	0.00	0.66	0.00	0.00	0.00	0.00
	116	0.00	0.64	0.00	0.00	0.00	0.00
	117	0.00	0.63	0.00	0.00	0.00	0.00
	118	0.00	0.66	0.00	0.00	0.00	0.00
	119	0.00	0.67	0.00	0.00	0.00	0.00
	120	0.00	0.28	0.00	0.00	0.00	0.00
	121	0.00	0.40	0.00	0.00	0.00	0.00
	122	0.00	0.34	0.00	0.00	0.00	0.00
	123	0.00	0.35	0.00	0.00	0.00	0.00
	124	0.00	0.58	0.00	0.00	0.00	0.00
	125	0.00	0.58	0.00	0.00	0.00	0.00
	126	0.00	0.60	0.00	0.00	0.00	0.00
	127	0.00	0.61	0.00	0.00	0.00	0.00
8	100	0.00	0.71	0.00	0.00	0.00	0.00
	101	0.00	0.72	0.00	0.00	0.00	0.00
	102	0.00	0.77	0.00	0.00	0.00	0.00
	103	0.00	0.78	0.00	0.00	0.00	0.00
	104	0.00	0.81	0.00	0.00	0.00	0.00
	105	0.00	0.81	0.00	0.00	0.00	0.00
	106	0.00	0.84	0.00	0.00	0.00	0.00
	107	0.00	0.85	0.00	0.00	0.00	0.00
	108	0.00	0.62	0.00	0.00	0.00	0.00
	109	0.00	0.62	0.00	0.00	0.00	0.00
	110	0.00	0.65	0.00	0.00	0.00	0.00
	111	0.00	0.66	0.00	0.00	0.00	0.00
	112	0.00	0.87	0.00	0.00	0.00	0.00
	113	0.00	0.88	0.00	0.00	0.00	0.00
	114	0.00	0.90	0.00	0.00	0.00	0.00
	115	0.00	0.91	0.00	0.00	0.00	0.00
	116	0.00	0.82	0.00	0.00	0.00	0.00
	117	0.00	0.82	0.00	0.00	0.00	0.00
	118	0.00	0.85	0.00	0.00	0.00	0.00
	119	0.00	0.86	0.00	0.00	0.00	0.00
	120	0.00	0.53	0.00	0.00	0.00	0.00
	121	0.00	0.28	0.00	0.00	0.00	0.00
	122	0.00	0.62	0.00	0.00	0.00	0.00
	123	0.00	0.55	0.00	0.00	0.00	0.00
	124	0.00	0.65	0.00	0.00	0.00	0.00
	125	0.00	0.65	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	0.69	0.00	0.00	0.00	0.00
	127	0.00	0.71	0.00	0.00	0.00	0.00
9	100	0.00	0.57	0.00	0.00	0.00	0.00
	101	0.00	0.57	0.00	0.00	0.00	0.00
	102	0.00	0.61	0.00	0.00	0.00	0.00
	103	0.00	0.62	0.00	0.00	0.00	0.00
	104	0.00	0.68	0.00	0.00	0.00	0.00
	105	0.00	0.68	0.00	0.00	0.00	0.00
	106	0.00	0.70	0.00	0.00	0.00	0.00
	107	0.00	0.71	0.00	0.00	0.00	0.00
	108	0.00	0.47	0.00	0.00	0.00	0.00
	109	0.00	0.48	0.00	0.00	0.00	0.00
	110	0.00	0.50	0.00	0.00	0.00	0.00
	111	0.00	0.51	0.00	0.00	0.00	0.00
	112	0.00	0.71	0.00	0.00	0.00	0.00
	113	0.00	0.71	0.00	0.00	0.00	0.00
	114	0.00	0.73	0.00	0.00	0.00	0.00
	115	0.00	0.74	0.00	0.00	0.00	0.00
	116	0.00	0.65	0.00	0.00	0.00	0.00
	117	0.00	0.66	0.00	0.00	0.00	0.00
	118	0.00	0.68	0.00	0.00	0.00	0.00
	119	0.00	0.69	0.00	0.00	0.00	0.00
	120	0.00	0.48	0.00	0.00	0.00	0.00
	121	0.00	0.21	0.00	0.00	0.00	0.00
	122	0.00	0.52	0.00	0.00	0.00	0.00
	123	0.00	0.45	0.00	0.00	0.00	0.00
	124	0.00	0.52	0.00	0.00	0.00	0.00
	125	0.00	0.52	0.00	0.00	0.00	0.00
	126	0.00	0.51	0.00	0.00	0.00	0.00
	127	0.00	0.53	0.00	0.00	0.00	0.00
11	100	0.00	1.46	0.00	0.00	0.00	0.00
	101	0.00	1.46	0.00	0.00	0.00	0.00
	102	0.00	1.57	0.00	0.00	0.00	0.00
	103	0.00	1.59	0.00	0.00	0.00	0.00
	104	0.00	1.60	0.00	0.00	0.00	0.00
	105	0.00	1.60	0.00	0.00	0.00	0.00
	106	0.00	1.66	0.00	0.00	0.00	0.00
	107	0.00	1.68	0.00	0.00	0.00	0.00
	108	0.00	1.29	0.00	0.00	0.00	0.00
	109	0.00	1.30	0.00	0.00	0.00	0.00
	110	0.00	1.35	0.00	0.00	0.00	0.00
	111	0.00	1.37	0.00	0.00	0.00	0.00
	112	0.00	1.73	0.00	0.00	0.00	0.00
	113	0.00	1.74	0.00	0.00	0.00	0.00
	114	0.00	1.80	0.00	0.00	0.00	0.00
	115	0.00	1.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.64	0.00	0.00	0.00	0.00
	117	0.00	1.65	0.00	0.00	0.00	0.00
	118	0.00	1.70	0.00	0.00	0.00	0.00
	119	0.00	1.72	0.00	0.00	0.00	0.00
	120	0.00	1.02	0.00	0.00	0.00	0.00
	121	0.00	0.61	0.00	0.00	0.00	0.00
	122	0.00	1.20	0.00	0.00	0.00	0.00
	123	0.00	1.07	0.00	0.00	0.00	0.00
	124	0.00	1.32	0.00	0.00	0.00	0.00
	125	0.00	1.32	0.00	0.00	0.00	0.00
	126	0.00	1.41	0.00	0.00	0.00	0.00
	127	0.00	1.45	0.00	0.00	0.00	0.00
12	100	0.00	1.39	0.00	0.00	0.00	0.00
	101	0.00	1.40	0.00	0.00	0.00	0.00
	102	0.00	1.49	0.00	0.00	0.00	0.00
	103	0.00	1.51	0.00	0.00	0.00	0.00
	104	0.00	1.54	0.00	0.00	0.00	0.00
	105	0.00	1.55	0.00	0.00	0.00	0.00
	106	0.00	1.60	0.00	0.00	0.00	0.00
	107	0.00	1.62	0.00	0.00	0.00	0.00
	108	0.00	1.22	0.00	0.00	0.00	0.00
	109	0.00	1.23	0.00	0.00	0.00	0.00
	110	0.00	1.28	0.00	0.00	0.00	0.00
	111	0.00	1.30	0.00	0.00	0.00	0.00
	112	0.00	1.66	0.00	0.00	0.00	0.00
	113	0.00	1.66	0.00	0.00	0.00	0.00
	114	0.00	1.72	0.00	0.00	0.00	0.00
	115	0.00	1.74	0.00	0.00	0.00	0.00
	116	0.00	1.56	0.00	0.00	0.00	0.00
	117	0.00	1.57	0.00	0.00	0.00	0.00
	118	0.00	1.63	0.00	0.00	0.00	0.00
	119	0.00	1.64	0.00	0.00	0.00	0.00
	120	0.00	1.00	0.00	0.00	0.00	0.00
	121	0.00	0.57	0.00	0.00	0.00	0.00
	122	0.00	1.15	0.00	0.00	0.00	0.00
	123	0.00	1.03	0.00	0.00	0.00	0.00
	124	0.00	1.26	0.00	0.00	0.00	0.00
	125	0.00	1.26	0.00	0.00	0.00	0.00
	126	0.00	1.33	0.00	0.00	0.00	0.00
	127	0.00	1.37	0.00	0.00	0.00	0.00
13	100	0.00	0.68	0.00	0.00	0.00	0.00
	101	0.00	0.69	0.00	0.00	0.00	0.00
	102	0.00	0.73	0.00	0.00	0.00	0.00
	103	0.00	0.74	0.00	0.00	0.00	0.00
	104	0.00	0.78	0.00	0.00	0.00	0.00
	105	0.00	0.78	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	0.81	0.00	0.00	0.00	0.00
	107	0.00	0.82	0.00	0.00	0.00	0.00
	108	0.00	0.58	0.00	0.00	0.00	0.00
	109	0.00	0.59	0.00	0.00	0.00	0.00
	110	0.00	0.61	0.00	0.00	0.00	0.00
	111	0.00	0.62	0.00	0.00	0.00	0.00
	112	0.00	0.83	0.00	0.00	0.00	0.00
	113	0.00	0.84	0.00	0.00	0.00	0.00
	114	0.00	0.86	0.00	0.00	0.00	0.00
	115	0.00	0.87	0.00	0.00	0.00	0.00
	116	0.00	0.78	0.00	0.00	0.00	0.00
	117	0.00	0.79	0.00	0.00	0.00	0.00
	118	0.00	0.81	0.00	0.00	0.00	0.00
	119	0.00	0.82	0.00	0.00	0.00	0.00
	120	0.00	0.52	0.00	0.00	0.00	0.00
	121	0.00	0.26	0.00	0.00	0.00	0.00
	122	0.00	0.60	0.00	0.00	0.00	0.00
	123	0.00	0.53	0.00	0.00	0.00	0.00
	124	0.00	0.62	0.00	0.00	0.00	0.00
	125	0.00	0.62	0.00	0.00	0.00	0.00
	126	0.00	0.65	0.00	0.00	0.00	0.00
	127	0.00	0.67	0.00	0.00	0.00	0.00
14	100	0.00	1.49	0.00	0.00	0.00	0.00
	101	0.00	1.49	0.00	0.00	0.00	0.00
	102	0.00	1.60	0.00	0.00	0.00	0.00
	103	0.00	1.62	0.00	0.00	0.00	0.00
	104	0.00	1.58	0.00	0.00	0.00	0.00
	105	0.00	1.59	0.00	0.00	0.00	0.00
	106	0.00	1.65	0.00	0.00	0.00	0.00
	107	0.00	1.67	0.00	0.00	0.00	0.00
	108	0.00	1.35	0.00	0.00	0.00	0.00
	109	0.00	1.35	0.00	0.00	0.00	0.00
	110	0.00	1.42	0.00	0.00	0.00	0.00
	111	0.00	1.43	0.00	0.00	0.00	0.00
	112	0.00	1.72	0.00	0.00	0.00	0.00
	113	0.00	1.73	0.00	0.00	0.00	0.00
	114	0.00	1.79	0.00	0.00	0.00	0.00
	115	0.00	1.81	0.00	0.00	0.00	0.00
	116	0.00	1.65	0.00	0.00	0.00	0.00
	117	0.00	1.65	0.00	0.00	0.00	0.00
	118	0.00	1.71	0.00	0.00	0.00	0.00
	119	0.00	1.73	0.00	0.00	0.00	0.00
	120	0.00	0.97	0.00	0.00	0.00	0.00
	121	0.00	0.66	0.00	0.00	0.00	0.00
	122	0.00	1.16	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.35	0.00	0.00	0.00	0.00
	125	0.00	1.35	0.00	0.00	0.00	0.00
	126	0.00	1.44	0.00	0.00	0.00	0.00
	127	0.00	1.48	0.00	0.00	0.00	0.00
15	100	0.00	1.42	0.00	0.00	0.00	0.00
	101	0.00	1.42	0.00	0.00	0.00	0.00
	102	0.00	1.53	0.00	0.00	0.00	0.00
	103	0.00	1.54	0.00	0.00	0.00	0.00
	104	0.00	1.52	0.00	0.00	0.00	0.00
	105	0.00	1.53	0.00	0.00	0.00	0.00
	106	0.00	1.58	0.00	0.00	0.00	0.00
	107	0.00	1.60	0.00	0.00	0.00	0.00
	108	0.00	1.28	0.00	0.00	0.00	0.00
	109	0.00	1.28	0.00	0.00	0.00	0.00
	110	0.00	1.34	0.00	0.00	0.00	0.00
	111	0.00	1.36	0.00	0.00	0.00	0.00
	112	0.00	1.65	0.00	0.00	0.00	0.00
	113	0.00	1.65	0.00	0.00	0.00	0.00
	114	0.00	1.71	0.00	0.00	0.00	0.00
	115	0.00	1.73	0.00	0.00	0.00	0.00
	116	0.00	1.57	0.00	0.00	0.00	0.00
	117	0.00	1.57	0.00	0.00	0.00	0.00
	118	0.00	1.63	0.00	0.00	0.00	0.00
	119	0.00	1.65	0.00	0.00	0.00	0.00
	120	0.00	0.95	0.00	0.00	0.00	0.00
	121	0.00	0.63	0.00	0.00	0.00	0.00
	122	0.00	1.12	0.00	0.00	0.00	0.00
	123	0.00	1.01	0.00	0.00	0.00	0.00
	124	0.00	1.28	0.00	0.00	0.00	0.00
	125	0.00	1.28	0.00	0.00	0.00	0.00
	126	0.00	1.35	0.00	0.00	0.00	0.00
	127	0.00	1.39	0.00	0.00	0.00	0.00
16	100	0.00	1.52	0.00	0.00	0.00	0.00
	101	0.00	1.52	0.00	0.00	0.00	0.00
	102	0.00	1.64	0.00	0.00	0.00	0.00
	103	0.00	1.66	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.57	0.00	0.00	0.00	0.00
	106	0.00	1.64	0.00	0.00	0.00	0.00
	107	0.00	1.66	0.00	0.00	0.00	0.00
	108	0.00	1.41	0.00	0.00	0.00	0.00
	109	0.00	1.41	0.00	0.00	0.00	0.00
	110	0.00	1.48	0.00	0.00	0.00	0.00
	111	0.00	1.50	0.00	0.00	0.00	0.00
	112	0.00	1.72	0.00	0.00	0.00	0.00
	113	0.00	1.72	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.79	0.00	0.00	0.00	0.00
	115	0.00	1.80	0.00	0.00	0.00	0.00
	116	0.00	1.65	0.00	0.00	0.00	0.00
	117	0.00	1.66	0.00	0.00	0.00	0.00
	118	0.00	1.73	0.00	0.00	0.00	0.00
	119	0.00	1.74	0.00	0.00	0.00	0.00
	120	0.00	0.93	0.00	0.00	0.00	0.00
	121	0.00	0.72	0.00	0.00	0.00	0.00
	122	0.00	1.13	0.00	0.00	0.00	0.00
	123	0.00	1.04	0.00	0.00	0.00	0.00
	124	0.00	1.37	0.00	0.00	0.00	0.00
	125	0.00	1.37	0.00	0.00	0.00	0.00
	126	0.00	1.47	0.00	0.00	0.00	0.00
	127	0.00	1.51	0.00	0.00	0.00	0.00
17	100	0.00	1.45	0.00	0.00	0.00	0.00
	101	0.00	1.45	0.00	0.00	0.00	0.00
	102	0.00	1.56	0.00	0.00	0.00	0.00
	103	0.00	1.58	0.00	0.00	0.00	0.00
	104	0.00	1.51	0.00	0.00	0.00	0.00
	105	0.00	1.51	0.00	0.00	0.00	0.00
	106	0.00	1.57	0.00	0.00	0.00	0.00
	107	0.00	1.59	0.00	0.00	0.00	0.00
	108	0.00	1.34	0.00	0.00	0.00	0.00
	109	0.00	1.34	0.00	0.00	0.00	0.00
	110	0.00	1.40	0.00	0.00	0.00	0.00
	111	0.00	1.42	0.00	0.00	0.00	0.00
	112	0.00	1.64	0.00	0.00	0.00	0.00
	113	0.00	1.64	0.00	0.00	0.00	0.00
	114	0.00	1.70	0.00	0.00	0.00	0.00
	115	0.00	1.72	0.00	0.00	0.00	0.00
	116	0.00	1.57	0.00	0.00	0.00	0.00
	117	0.00	1.58	0.00	0.00	0.00	0.00
	118	0.00	1.64	0.00	0.00	0.00	0.00
	119	0.00	1.66	0.00	0.00	0.00	0.00
	120	0.00	0.90	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	1.08	0.00	0.00	0.00	0.00
	123	0.00	0.99	0.00	0.00	0.00	0.00
	124	0.00	1.31	0.00	0.00	0.00	0.00
	125	0.00	1.30	0.00	0.00	0.00	0.00
	126	0.00	1.38	0.00	0.00	0.00	0.00
	127	0.00	1.42	0.00	0.00	0.00	0.00
18	100	0.00	1.47	0.00	0.00	0.00	0.00
	101	0.00	1.47	0.00	0.00	0.00	0.00
	102	0.00	1.59	0.00	0.00	0.00	0.00
	103	0.00	1.60	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.48	0.00	0.00	0.00	0.00
	105	0.00	1.48	0.00	0.00	0.00	0.00
	106	0.00	1.55	0.00	0.00	0.00	0.00
	107	0.00	1.57	0.00	0.00	0.00	0.00
	108	0.00	1.39	0.00	0.00	0.00	0.00
	109	0.00	1.39	0.00	0.00	0.00	0.00
	110	0.00	1.46	0.00	0.00	0.00	0.00
	111	0.00	1.48	0.00	0.00	0.00	0.00
	112	0.00	1.62	0.00	0.00	0.00	0.00
	113	0.00	1.62	0.00	0.00	0.00	0.00
	114	0.00	1.69	0.00	0.00	0.00	0.00
	115	0.00	1.70	0.00	0.00	0.00	0.00
	116	0.00	1.57	0.00	0.00	0.00	0.00
	117	0.00	1.57	0.00	0.00	0.00	0.00
	118	0.00	1.64	0.00	0.00	0.00	0.00
	119	0.00	1.66	0.00	0.00	0.00	0.00
	120	0.00	0.85	0.00	0.00	0.00	0.00
	121	0.00	0.73	0.00	0.00	0.00	0.00
	122	0.00	1.03	0.00	0.00	0.00	0.00
	123	0.00	0.97	0.00	0.00	0.00	0.00
	124	0.00	1.32	0.00	0.00	0.00	0.00
	125	0.00	1.32	0.00	0.00	0.00	0.00
	126	0.00	1.41	0.00	0.00	0.00	0.00
	127	0.00	1.44	0.00	0.00	0.00	0.00
19	100	0.00	1.32	0.00	0.00	0.00	0.00
	101	0.00	1.32	0.00	0.00	0.00	0.00
	102	0.00	1.41	0.00	0.00	0.00	0.00
	103	0.00	1.43	0.00	0.00	0.00	0.00
	104	0.00	1.47	0.00	0.00	0.00	0.00
	105	0.00	1.48	0.00	0.00	0.00	0.00
	106	0.00	1.53	0.00	0.00	0.00	0.00
	107	0.00	1.55	0.00	0.00	0.00	0.00
	108	0.00	1.15	0.00	0.00	0.00	0.00
	109	0.00	1.16	0.00	0.00	0.00	0.00
	110	0.00	1.21	0.00	0.00	0.00	0.00
	111	0.00	1.23	0.00	0.00	0.00	0.00
	112	0.00	1.57	0.00	0.00	0.00	0.00
	113	0.00	1.58	0.00	0.00	0.00	0.00
	114	0.00	1.63	0.00	0.00	0.00	0.00
	115	0.00	1.65	0.00	0.00	0.00	0.00
	116	0.00	1.48	0.00	0.00	0.00	0.00
	117	0.00	1.49	0.00	0.00	0.00	0.00
	118	0.00	1.54	0.00	0.00	0.00	0.00
	119	0.00	1.56	0.00	0.00	0.00	0.00
	120	0.00	0.97	0.00	0.00	0.00	0.00
	121	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	1.10	0.00	0.00	0.00	0.00
	123	0.00	0.98	0.00	0.00	0.00	0.00
	124	0.00	1.20	0.00	0.00	0.00	0.00
	125	0.00	1.20	0.00	0.00	0.00	0.00
	126	0.00	1.24	0.00	0.00	0.00	0.00
	127	0.00	1.28	0.00	0.00	0.00	0.00
20	100	0.00	0.64	0.00	0.00	0.00	0.00
	101	0.00	0.65	0.00	0.00	0.00	0.00
	102	0.00	0.69	0.00	0.00	0.00	0.00
	103	0.00	0.70	0.00	0.00	0.00	0.00
	104	0.00	0.75	0.00	0.00	0.00	0.00
	105	0.00	0.75	0.00	0.00	0.00	0.00
	106	0.00	0.77	0.00	0.00	0.00	0.00
	107	0.00	0.78	0.00	0.00	0.00	0.00
	108	0.00	0.55	0.00	0.00	0.00	0.00
	109	0.00	0.55	0.00	0.00	0.00	0.00
	110	0.00	0.57	0.00	0.00	0.00	0.00
	111	0.00	0.59	0.00	0.00	0.00	0.00
	112	0.00	0.79	0.00	0.00	0.00	0.00
	113	0.00	0.80	0.00	0.00	0.00	0.00
	114	0.00	0.82	0.00	0.00	0.00	0.00
	115	0.00	0.83	0.00	0.00	0.00	0.00
	116	0.00	0.74	0.00	0.00	0.00	0.00
	117	0.00	0.75	0.00	0.00	0.00	0.00
	118	0.00	0.77	0.00	0.00	0.00	0.00
	119	0.00	0.78	0.00	0.00	0.00	0.00
	120	0.00	0.51	0.00	0.00	0.00	0.00
	121	0.00	0.24	0.00	0.00	0.00	0.00
	122	0.00	0.57	0.00	0.00	0.00	0.00
	123	0.00	0.50	0.00	0.00	0.00	0.00
	124	0.00	0.59	0.00	0.00	0.00	0.00
	125	0.00	0.59	0.00	0.00	0.00	0.00
	126	0.00	0.61	0.00	0.00	0.00	0.00
	127	0.00	0.63	0.00	0.00	0.00	0.00
21	100	0.00	1.34	0.00	0.00	0.00	0.00
	101	0.00	1.35	0.00	0.00	0.00	0.00
	102	0.00	1.44	0.00	0.00	0.00	0.00
	103	0.00	1.46	0.00	0.00	0.00	0.00
	104	0.00	1.45	0.00	0.00	0.00	0.00
	105	0.00	1.46	0.00	0.00	0.00	0.00
	106	0.00	1.51	0.00	0.00	0.00	0.00
	107	0.00	1.53	0.00	0.00	0.00	0.00
	108	0.00	1.21	0.00	0.00	0.00	0.00
	109	0.00	1.21	0.00	0.00	0.00	0.00
	110	0.00	1.26	0.00	0.00	0.00	0.00
	111	0.00	1.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.56	0.00	0.00	0.00	0.00
	113	0.00	1.56	0.00	0.00	0.00	0.00
	114	0.00	1.62	0.00	0.00	0.00	0.00
	115	0.00	1.64	0.00	0.00	0.00	0.00
	116	0.00	1.48	0.00	0.00	0.00	0.00
	117	0.00	1.49	0.00	0.00	0.00	0.00
	118	0.00	1.54	0.00	0.00	0.00	0.00
	119	0.00	1.56	0.00	0.00	0.00	0.00
	120	0.00	0.92	0.00	0.00	0.00	0.00
	121	0.00	0.59	0.00	0.00	0.00	0.00
	122	0.00	1.06	0.00	0.00	0.00	0.00
	123	0.00	0.96	0.00	0.00	0.00	0.00
	124	0.00	1.22	0.00	0.00	0.00	0.00
	125	0.00	1.22	0.00	0.00	0.00	0.00
	126	0.00	1.26	0.00	0.00	0.00	0.00
	127	0.00	1.30	0.00	0.00	0.00	0.00
22	100	0.00	1.37	0.00	0.00	0.00	0.00
	101	0.00	1.37	0.00	0.00	0.00	0.00
	102	0.00	1.47	0.00	0.00	0.00	0.00
	103	0.00	1.49	0.00	0.00	0.00	0.00
	104	0.00	1.43	0.00	0.00	0.00	0.00
	105	0.00	1.44	0.00	0.00	0.00	0.00
	106	0.00	1.49	0.00	0.00	0.00	0.00
	107	0.00	1.51	0.00	0.00	0.00	0.00
	108	0.00	1.26	0.00	0.00	0.00	0.00
	109	0.00	1.26	0.00	0.00	0.00	0.00
	110	0.00	1.32	0.00	0.00	0.00	0.00
	111	0.00	1.34	0.00	0.00	0.00	0.00
	112	0.00	1.54	0.00	0.00	0.00	0.00
	113	0.00	1.55	0.00	0.00	0.00	0.00
	114	0.00	1.60	0.00	0.00	0.00	0.00
	115	0.00	1.62	0.00	0.00	0.00	0.00
	116	0.00	1.49	0.00	0.00	0.00	0.00
	117	0.00	1.49	0.00	0.00	0.00	0.00
	118	0.00	1.55	0.00	0.00	0.00	0.00
	119	0.00	1.56	0.00	0.00	0.00	0.00
	120	0.00	0.87	0.00	0.00	0.00	0.00
	121	0.00	0.64	0.00	0.00	0.00	0.00
	122	0.00	1.02	0.00	0.00	0.00	0.00
	123	0.00	0.94	0.00	0.00	0.00	0.00
	124	0.00	1.24	0.00	0.00	0.00	0.00
	125	0.00	1.23	0.00	0.00	0.00	0.00
	126	0.00	1.29	0.00	0.00	0.00	0.00
	127	0.00	1.32	0.00	0.00	0.00	0.00
23	100	0.00	1.39	0.00	0.00	0.00	0.00
	101	0.00	1.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	1.50	0.00	0.00	0.00	0.00
	103	0.00	1.51	0.00	0.00	0.00	0.00
	104	0.00	1.41	0.00	0.00	0.00	0.00
	105	0.00	1.41	0.00	0.00	0.00	0.00
	106	0.00	1.47	0.00	0.00	0.00	0.00
	107	0.00	1.49	0.00	0.00	0.00	0.00
	108	0.00	1.31	0.00	0.00	0.00	0.00
	109	0.00	1.31	0.00	0.00	0.00	0.00
	110	0.00	1.38	0.00	0.00	0.00	0.00
	111	0.00	1.39	0.00	0.00	0.00	0.00
	112	0.00	1.53	0.00	0.00	0.00	0.00
	113	0.00	1.53	0.00	0.00	0.00	0.00
	114	0.00	1.59	0.00	0.00	0.00	0.00
	115	0.00	1.61	0.00	0.00	0.00	0.00
	116	0.00	1.48	0.00	0.00	0.00	0.00
	117	0.00	1.48	0.00	0.00	0.00	0.00
	118	0.00	1.54	0.00	0.00	0.00	0.00
	119	0.00	1.56	0.00	0.00	0.00	0.00
	120	0.00	0.82	0.00	0.00	0.00	0.00
	121	0.00	0.69	0.00	0.00	0.00	0.00
	122	0.00	0.97	0.00	0.00	0.00	0.00
	123	0.00	0.92	0.00	0.00	0.00	0.00
	124	0.00	1.25	0.00	0.00	0.00	0.00
	125	0.00	1.25	0.00	0.00	0.00	0.00
	126	0.00	1.31	0.00	0.00	0.00	0.00
	127	0.00	1.34	0.00	0.00	0.00	0.00
24	100	0.00	1.24	0.00	0.00	0.00	0.00
	101	0.00	1.25	0.00	0.00	0.00	0.00
	102	0.00	1.33	0.00	0.00	0.00	0.00
	103	0.00	1.35	0.00	0.00	0.00	0.00
	104	0.00	1.40	0.00	0.00	0.00	0.00
	105	0.00	1.41	0.00	0.00	0.00	0.00
	106	0.00	1.45	0.00	0.00	0.00	0.00
	107	0.00	1.48	0.00	0.00	0.00	0.00
	108	0.00	1.08	0.00	0.00	0.00	0.00
	109	0.00	1.08	0.00	0.00	0.00	0.00
	110	0.00	1.13	0.00	0.00	0.00	0.00
	111	0.00	1.15	0.00	0.00	0.00	0.00
	112	0.00	1.48	0.00	0.00	0.00	0.00
	113	0.00	1.49	0.00	0.00	0.00	0.00
	114	0.00	1.53	0.00	0.00	0.00	0.00
	115	0.00	1.56	0.00	0.00	0.00	0.00
	116	0.00	1.40	0.00	0.00	0.00	0.00
	117	0.00	1.40	0.00	0.00	0.00	0.00
	118	0.00	1.45	0.00	0.00	0.00	0.00
	119	0.00	1.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.94	0.00	0.00	0.00	0.00
	121	0.00	0.50	0.00	0.00	0.00	0.00
	122	0.00	1.05	0.00	0.00	0.00	0.00
	123	0.00	0.93	0.00	0.00	0.00	0.00
	124	0.00	1.13	0.00	0.00	0.00	0.00
	125	0.00	1.13	0.00	0.00	0.00	0.00
	126	0.00	1.15	0.00	0.00	0.00	0.00
	127	0.00	1.19	0.00	0.00	0.00	0.00
25	100	0.00	0.61	0.00	0.00	0.00	0.00
	101	0.00	0.61	0.00	0.00	0.00	0.00
	102	0.00	0.65	0.00	0.00	0.00	0.00
	103	0.00	0.66	0.00	0.00	0.00	0.00
	104	0.00	0.71	0.00	0.00	0.00	0.00
	105	0.00	0.72	0.00	0.00	0.00	0.00
	106	0.00	0.74	0.00	0.00	0.00	0.00
	107	0.00	0.75	0.00	0.00	0.00	0.00
	108	0.00	0.51	0.00	0.00	0.00	0.00
	109	0.00	0.52	0.00	0.00	0.00	0.00
	110	0.00	0.54	0.00	0.00	0.00	0.00
	111	0.00	0.55	0.00	0.00	0.00	0.00
	112	0.00	0.75	0.00	0.00	0.00	0.00
	113	0.00	0.76	0.00	0.00	0.00	0.00
	114	0.00	0.77	0.00	0.00	0.00	0.00
	115	0.00	0.79	0.00	0.00	0.00	0.00
	116	0.00	0.70	0.00	0.00	0.00	0.00
	117	0.00	0.70	0.00	0.00	0.00	0.00
	118	0.00	0.72	0.00	0.00	0.00	0.00
	119	0.00	0.73	0.00	0.00	0.00	0.00
	120	0.00	0.49	0.00	0.00	0.00	0.00
	121	0.00	0.23	0.00	0.00	0.00	0.00
	122	0.00	0.55	0.00	0.00	0.00	0.00
	123	0.00	0.48	0.00	0.00	0.00	0.00
	124	0.00	0.56	0.00	0.00	0.00	0.00
	125	0.00	0.56	0.00	0.00	0.00	0.00
	126	0.00	0.56	0.00	0.00	0.00	0.00
	127	0.00	0.58	0.00	0.00	0.00	0.00
26	100	0.00	1.26	0.00	0.00	0.00	0.00
	101	0.00	1.27	0.00	0.00	0.00	0.00
	102	0.00	1.35	0.00	0.00	0.00	0.00
	103	0.00	1.37	0.00	0.00	0.00	0.00
	104	0.00	1.38	0.00	0.00	0.00	0.00
	105	0.00	1.39	0.00	0.00	0.00	0.00
	106	0.00	1.44	0.00	0.00	0.00	0.00
	107	0.00	1.46	0.00	0.00	0.00	0.00
	108	0.00	1.13	0.00	0.00	0.00	0.00
	109	0.00	1.14	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	1.18	0.00	0.00	0.00	0.00
	111	0.00	1.20	0.00	0.00	0.00	0.00
	112	0.00	1.47	0.00	0.00	0.00	0.00
	113	0.00	1.47	0.00	0.00	0.00	0.00
	114	0.00	1.52	0.00	0.00	0.00	0.00
	115	0.00	1.54	0.00	0.00	0.00	0.00
	116	0.00	1.40	0.00	0.00	0.00	0.00
	117	0.00	1.40	0.00	0.00	0.00	0.00
	118	0.00	1.45	0.00	0.00	0.00	0.00
	119	0.00	1.47	0.00	0.00	0.00	0.00
	120	0.00	0.89	0.00	0.00	0.00	0.00
	121	0.00	0.55	0.00	0.00	0.00	0.00
	122	0.00	1.01	0.00	0.00	0.00	0.00
	123	0.00	0.91	0.00	0.00	0.00	0.00
	124	0.00	1.15	0.00	0.00	0.00	0.00
	125	0.00	1.15	0.00	0.00	0.00	0.00
	126	0.00	1.17	0.00	0.00	0.00	0.00
	127	0.00	1.21	0.00	0.00	0.00	0.00
27	100	0.00	1.28	0.00	0.00	0.00	0.00
	101	0.00	1.29	0.00	0.00	0.00	0.00
	102	0.00	1.38	0.00	0.00	0.00	0.00
	103	0.00	1.40	0.00	0.00	0.00	0.00
	104	0.00	1.36	0.00	0.00	0.00	0.00
	105	0.00	1.36	0.00	0.00	0.00	0.00
	106	0.00	1.42	0.00	0.00	0.00	0.00
	107	0.00	1.43	0.00	0.00	0.00	0.00
	108	0.00	1.18	0.00	0.00	0.00	0.00
	109	0.00	1.19	0.00	0.00	0.00	0.00
	110	0.00	1.24	0.00	0.00	0.00	0.00
	111	0.00	1.26	0.00	0.00	0.00	0.00
	112	0.00	1.45	0.00	0.00	0.00	0.00
	113	0.00	1.46	0.00	0.00	0.00	0.00
	114	0.00	1.51	0.00	0.00	0.00	0.00
	115	0.00	1.53	0.00	0.00	0.00	0.00
	116	0.00	1.40	0.00	0.00	0.00	0.00
	117	0.00	1.40	0.00	0.00	0.00	0.00
	118	0.00	1.45	0.00	0.00	0.00	0.00
	119	0.00	1.47	0.00	0.00	0.00	0.00
	120	0.00	0.84	0.00	0.00	0.00	0.00
	121	0.00	0.60	0.00	0.00	0.00	0.00
	122	0.00	0.96	0.00	0.00	0.00	0.00
	123	0.00	0.89	0.00	0.00	0.00	0.00
	124	0.00	1.17	0.00	0.00	0.00	0.00
	125	0.00	1.16	0.00	0.00	0.00	0.00
	126	0.00	1.19	0.00	0.00	0.00	0.00
	127	0.00	1.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
28	100	0.00	1.31	0.00	0.00	0.00	0.00
	101	0.00	1.31	0.00	0.00	0.00	0.00
	102	0.00	1.40	0.00	0.00	0.00	0.00
	103	0.00	1.42	0.00	0.00	0.00	0.00
	104	0.00	1.34	0.00	0.00	0.00	0.00
	105	0.00	1.34	0.00	0.00	0.00	0.00
	106	0.00	1.39	0.00	0.00	0.00	0.00
	107	0.00	1.41	0.00	0.00	0.00	0.00
	108	0.00	1.23	0.00	0.00	0.00	0.00
	109	0.00	1.23	0.00	0.00	0.00	0.00
	110	0.00	1.29	0.00	0.00	0.00	0.00
	111	0.00	1.31	0.00	0.00	0.00	0.00
	112	0.00	1.43	0.00	0.00	0.00	0.00
	113	0.00	1.43	0.00	0.00	0.00	0.00
	114	0.00	1.49	0.00	0.00	0.00	0.00
	115	0.00	1.51	0.00	0.00	0.00	0.00
	116	0.00	1.39	0.00	0.00	0.00	0.00
	117	0.00	1.39	0.00	0.00	0.00	0.00
	118	0.00	1.45	0.00	0.00	0.00	0.00
	119	0.00	1.47	0.00	0.00	0.00	0.00
	120	0.00	0.79	0.00	0.00	0.00	0.00
	121	0.00	0.65	0.00	0.00	0.00	0.00
	122	0.00	0.92	0.00	0.00	0.00	0.00
	123	0.00	0.86	0.00	0.00	0.00	0.00
	124	0.00	1.18	0.00	0.00	0.00	0.00
	125	0.00	1.18	0.00	0.00	0.00	0.00
	126	0.00	1.21	0.00	0.00	0.00	0.00
	127	0.00	1.25	0.00	0.00	0.00	0.00
29	100	0.00	1.16	0.00	0.00	0.00	0.00
	101	0.00	1.17	0.00	0.00	0.00	0.00
	102	0.00	1.24	0.00	0.00	0.00	0.00
	103	0.00	1.26	0.00	0.00	0.00	0.00
	104	0.00	1.33	0.00	0.00	0.00	0.00
	105	0.00	1.34	0.00	0.00	0.00	0.00
	106	0.00	1.38	0.00	0.00	0.00	0.00
	107	0.00	1.40	0.00	0.00	0.00	0.00
	108	0.00	1.00	0.00	0.00	0.00	0.00
	109	0.00	1.01	0.00	0.00	0.00	0.00
	110	0.00	1.05	0.00	0.00	0.00	0.00
	111	0.00	1.07	0.00	0.00	0.00	0.00
	112	0.00	1.39	0.00	0.00	0.00	0.00
	113	0.00	1.40	0.00	0.00	0.00	0.00
	114	0.00	1.44	0.00	0.00	0.00	0.00
	115	0.00	1.46	0.00	0.00	0.00	0.00
	116	0.00	1.31	0.00	0.00	0.00	0.00
	117	0.00	1.32	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.37	0.00	0.00	0.00	0.00
	120	0.00	0.91	0.00	0.00	0.00	0.00
	121	0.00	0.47	0.00	0.00	0.00	0.00
	122	0.00	0.99	0.00	0.00	0.00	0.00
	123	0.00	0.88	0.00	0.00	0.00	0.00
	124	0.00	1.06	0.00	0.00	0.00	0.00
	125	0.00	1.06	0.00	0.00	0.00	0.00
	126	0.00	1.05	0.00	0.00	0.00	0.00
	127	0.00	1.09	0.00	0.00	0.00	0.00
30	100	0.00	1.18	0.00	0.00	0.00	0.00
	101	0.00	1.19	0.00	0.00	0.00	0.00
	102	0.00	1.26	0.00	0.00	0.00	0.00
	103	0.00	1.28	0.00	0.00	0.00	0.00
	104	0.00	1.31	0.00	0.00	0.00	0.00
	105	0.00	1.32	0.00	0.00	0.00	0.00
	106	0.00	1.36	0.00	0.00	0.00	0.00
	107	0.00	1.38	0.00	0.00	0.00	0.00
	108	0.00	1.05	0.00	0.00	0.00	0.00
	109	0.00	1.06	0.00	0.00	0.00	0.00
	110	0.00	1.10	0.00	0.00	0.00	0.00
	111	0.00	1.12	0.00	0.00	0.00	0.00
	112	0.00	1.38	0.00	0.00	0.00	0.00
	113	0.00	1.38	0.00	0.00	0.00	0.00
	114	0.00	1.42	0.00	0.00	0.00	0.00
	115	0.00	1.44	0.00	0.00	0.00	0.00
	116	0.00	1.31	0.00	0.00	0.00	0.00
	117	0.00	1.31	0.00	0.00	0.00	0.00
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.37	0.00	0.00	0.00	0.00
	120	0.00	0.86	0.00	0.00	0.00	0.00
	121	0.00	0.52	0.00	0.00	0.00	0.00
	122	0.00	0.95	0.00	0.00	0.00	0.00
	123	0.00	0.86	0.00	0.00	0.00	0.00
	124	0.00	1.08	0.00	0.00	0.00	0.00
	125	0.00	1.08	0.00	0.00	0.00	0.00
	126	0.00	1.08	0.00	0.00	0.00	0.00
	127	0.00	1.11	0.00	0.00	0.00	0.00
31	100	0.00	1.20	0.00	0.00	0.00	0.00
	101	0.00	1.21	0.00	0.00	0.00	0.00
	102	0.00	1.29	0.00	0.00	0.00	0.00
	103	0.00	1.31	0.00	0.00	0.00	0.00
	104	0.00	1.29	0.00	0.00	0.00	0.00
	105	0.00	1.29	0.00	0.00	0.00	0.00
	106	0.00	1.34	0.00	0.00	0.00	0.00
	107	0.00	1.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	1.10	0.00	0.00	0.00	0.00
	109	0.00	1.11	0.00	0.00	0.00	0.00
	110	0.00	1.15	0.00	0.00	0.00	0.00
	111	0.00	1.17	0.00	0.00	0.00	0.00
	112	0.00	1.36	0.00	0.00	0.00	0.00
	113	0.00	1.36	0.00	0.00	0.00	0.00
	114	0.00	1.41	0.00	0.00	0.00	0.00
	115	0.00	1.43	0.00	0.00	0.00	0.00
	116	0.00	1.30	0.00	0.00	0.00	0.00
	117	0.00	1.31	0.00	0.00	0.00	0.00
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.37	0.00	0.00	0.00	0.00
	120	0.00	0.81	0.00	0.00	0.00	0.00
	121	0.00	0.57	0.00	0.00	0.00	0.00
	122	0.00	0.91	0.00	0.00	0.00	0.00
	123	0.00	0.83	0.00	0.00	0.00	0.00
	124	0.00	1.10	0.00	0.00	0.00	0.00
	125	0.00	1.09	0.00	0.00	0.00	0.00
	126	0.00	1.10	0.00	0.00	0.00	0.00
	127	0.00	1.13	0.00	0.00	0.00	0.00
32	100	0.00	1.56	0.00	0.00	0.00	0.00
	101	0.00	1.56	0.00	0.00	0.00	0.00
	102	0.00	1.69	0.00	0.00	0.00	0.00
	103	0.00	1.70	0.00	0.00	0.00	0.00
	104	0.00	1.52	0.00	0.00	0.00	0.00
	105	0.00	1.51	0.00	0.00	0.00	0.00
	106	0.00	1.59	0.00	0.00	0.00	0.00
	107	0.00	1.60	0.00	0.00	0.00	0.00
	108	0.00	1.52	0.00	0.00	0.00	0.00
	109	0.00	1.51	0.00	0.00	0.00	0.00
	110	0.00	1.59	0.00	0.00	0.00	0.00
	111	0.00	1.60	0.00	0.00	0.00	0.00
	112	0.00	1.67	0.00	0.00	0.00	0.00
	113	0.00	1.67	0.00	0.00	0.00	0.00
	114	0.00	1.75	0.00	0.00	0.00	0.00
	115	0.00	1.76	0.00	0.00	0.00	0.00
	116	0.00	1.64	0.00	0.00	0.00	0.00
	117	0.00	1.64	0.00	0.00	0.00	0.00
	118	0.00	1.72	0.00	0.00	0.00	0.00
	119	0.00	1.73	0.00	0.00	0.00	0.00
	120	0.00	0.82	0.00	0.00	0.00	0.00
	121	0.00	0.82	0.00	0.00	0.00	0.00
	122	0.00	1.03	0.00	0.00	0.00	0.00
	123	0.00	0.99	0.00	0.00	0.00	0.00
	124	0.00	1.40	0.00	0.00	0.00	0.00
	125	0.00	1.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	1.52	0.00	0.00	0.00	0.00
	127	0.00	1.55	0.00	0.00	0.00	0.00
33	100	0.00	1.49	0.00	0.00	0.00	0.00
	101	0.00	1.49	0.00	0.00	0.00	0.00
	102	0.00	1.61	0.00	0.00	0.00	0.00
	103	0.00	1.62	0.00	0.00	0.00	0.00
	104	0.00	1.45	0.00	0.00	0.00	0.00
	105	0.00	1.45	0.00	0.00	0.00	0.00
	106	0.00	1.52	0.00	0.00	0.00	0.00
	107	0.00	1.54	0.00	0.00	0.00	0.00
	108	0.00	1.44	0.00	0.00	0.00	0.00
	109	0.00	1.44	0.00	0.00	0.00	0.00
	110	0.00	1.51	0.00	0.00	0.00	0.00
	111	0.00	1.53	0.00	0.00	0.00	0.00
	112	0.00	1.59	0.00	0.00	0.00	0.00
	113	0.00	1.59	0.00	0.00	0.00	0.00
	114	0.00	1.66	0.00	0.00	0.00	0.00
	115	0.00	1.68	0.00	0.00	0.00	0.00
	116	0.00	1.56	0.00	0.00	0.00	0.00
	117	0.00	1.56	0.00	0.00	0.00	0.00
	118	0.00	1.63	0.00	0.00	0.00	0.00
	119	0.00	1.65	0.00	0.00	0.00	0.00
	120	0.00	0.79	0.00	0.00	0.00	0.00
	121	0.00	0.78	0.00	0.00	0.00	0.00
	122	0.00	0.98	0.00	0.00	0.00	0.00
	123	0.00	0.94	0.00	0.00	0.00	0.00
	124	0.00	1.34	0.00	0.00	0.00	0.00
	125	0.00	1.33	0.00	0.00	0.00	0.00
	126	0.00	1.42	0.00	0.00	0.00	0.00
	127	0.00	1.46	0.00	0.00	0.00	0.00
34	100	0.00	1.57	0.00	0.00	0.00	0.00
	101	0.00	1.56	0.00	0.00	0.00	0.00
	102	0.00	1.70	0.00	0.00	0.00	0.00
	103	0.00	1.71	0.00	0.00	0.00	0.00
	104	0.00	1.48	0.00	0.00	0.00	0.00
	105	0.00	1.47	0.00	0.00	0.00	0.00
	106	0.00	1.55	0.00	0.00	0.00	0.00
	107	0.00	1.56	0.00	0.00	0.00	0.00
	108	0.00	1.56	0.00	0.00	0.00	0.00
	109	0.00	1.55	0.00	0.00	0.00	0.00
	110	0.00	1.63	0.00	0.00	0.00	0.00
	111	0.00	1.64	0.00	0.00	0.00	0.00
	112	0.00	1.64	0.00	0.00	0.00	0.00
	113	0.00	1.63	0.00	0.00	0.00	0.00
	114	0.00	1.71	0.00	0.00	0.00	0.00
	115	0.00	1.73	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.63	0.00	0.00	0.00	0.00
	117	0.00	1.62	0.00	0.00	0.00	0.00
	118	0.00	1.70	0.00	0.00	0.00	0.00
	119	0.00	1.71	0.00	0.00	0.00	0.00
	120	0.00	0.76	0.00	0.00	0.00	0.00
	121	0.00	0.86	0.00	0.00	0.00	0.00
	122	0.00	0.97	0.00	0.00	0.00	0.00
	123	0.00	0.96	0.00	0.00	0.00	0.00
	124	0.00	1.41	0.00	0.00	0.00	0.00
	125	0.00	1.41	0.00	0.00	0.00	0.00
	126	0.00	1.53	0.00	0.00	0.00	0.00
	127	0.00	1.56	0.00	0.00	0.00	0.00
35	100	0.00	1.50	0.00	0.00	0.00	0.00
	101	0.00	1.49	0.00	0.00	0.00	0.00
	102	0.00	1.62	0.00	0.00	0.00	0.00
	103	0.00	1.63	0.00	0.00	0.00	0.00
	104	0.00	1.42	0.00	0.00	0.00	0.00
	105	0.00	1.41	0.00	0.00	0.00	0.00
	106	0.00	1.49	0.00	0.00	0.00	0.00
	107	0.00	1.50	0.00	0.00	0.00	0.00
	108	0.00	1.48	0.00	0.00	0.00	0.00
	109	0.00	1.48	0.00	0.00	0.00	0.00
	110	0.00	1.56	0.00	0.00	0.00	0.00
	111	0.00	1.57	0.00	0.00	0.00	0.00
	112	0.00	1.56	0.00	0.00	0.00	0.00
	113	0.00	1.56	0.00	0.00	0.00	0.00
	114	0.00	1.63	0.00	0.00	0.00	0.00
	115	0.00	1.64	0.00	0.00	0.00	0.00
	116	0.00	1.55	0.00	0.00	0.00	0.00
	117	0.00	1.54	0.00	0.00	0.00	0.00
	118	0.00	1.62	0.00	0.00	0.00	0.00
	119	0.00	1.63	0.00	0.00	0.00	0.00
	120	0.00	0.74	0.00	0.00	0.00	0.00
	121	0.00	0.83	0.00	0.00	0.00	0.00
	122	0.00	0.93	0.00	0.00	0.00	0.00
	123	0.00	0.91	0.00	0.00	0.00	0.00
	124	0.00	1.34	0.00	0.00	0.00	0.00
	125	0.00	1.34	0.00	0.00	0.00	0.00
	126	0.00	1.44	0.00	0.00	0.00	0.00
	127	0.00	1.47	0.00	0.00	0.00	0.00
36	100	0.00	1.58	0.00	0.00	0.00	0.00
	101	0.00	1.57	0.00	0.00	0.00	0.00
	102	0.00	1.71	0.00	0.00	0.00	0.00
	103	0.00	1.72	0.00	0.00	0.00	0.00
	104	0.00	1.44	0.00	0.00	0.00	0.00
	105	0.00	1.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.52	0.00	0.00	0.00	0.00
	107	0.00	1.53	0.00	0.00	0.00	0.00
	108	0.00	1.60	0.00	0.00	0.00	0.00
	109	0.00	1.59	0.00	0.00	0.00	0.00
	110	0.00	1.67	0.00	0.00	0.00	0.00
	111	0.00	1.68	0.00	0.00	0.00	0.00
	112	0.00	1.60	0.00	0.00	0.00	0.00
	113	0.00	1.60	0.00	0.00	0.00	0.00
	114	0.00	1.68	0.00	0.00	0.00	0.00
	115	0.00	1.69	0.00	0.00	0.00	0.00
	116	0.00	1.61	0.00	0.00	0.00	0.00
	117	0.00	1.60	0.00	0.00	0.00	0.00
	118	0.00	1.68	0.00	0.00	0.00	0.00
	119	0.00	1.69	0.00	0.00	0.00	0.00
	120	0.00	0.70	0.00	0.00	0.00	0.00
	121	0.00	0.91	0.00	0.00	0.00	0.00
	122	0.00	0.92	0.00	0.00	0.00	0.00
	123	0.00	0.92	0.00	0.00	0.00	0.00
	124	0.00	1.41	0.00	0.00	0.00	0.00
	125	0.00	1.41	0.00	0.00	0.00	0.00
	126	0.00	1.54	0.00	0.00	0.00	0.00
	127	0.00	1.57	0.00	0.00	0.00	0.00
37	100	0.00	1.51	0.00	0.00	0.00	0.00
	101	0.00	1.50	0.00	0.00	0.00	0.00
	102	0.00	1.63	0.00	0.00	0.00	0.00
	103	0.00	1.65	0.00	0.00	0.00	0.00
	104	0.00	1.38	0.00	0.00	0.00	0.00
	105	0.00	1.38	0.00	0.00	0.00	0.00
	106	0.00	1.45	0.00	0.00	0.00	0.00
	107	0.00	1.47	0.00	0.00	0.00	0.00
	108	0.00	1.53	0.00	0.00	0.00	0.00
	109	0.00	1.52	0.00	0.00	0.00	0.00
	110	0.00	1.60	0.00	0.00	0.00	0.00
	111	0.00	1.61	0.00	0.00	0.00	0.00
	112	0.00	1.53	0.00	0.00	0.00	0.00
	113	0.00	1.52	0.00	0.00	0.00	0.00
	114	0.00	1.60	0.00	0.00	0.00	0.00
	115	0.00	1.61	0.00	0.00	0.00	0.00
	116	0.00	1.53	0.00	0.00	0.00	0.00
	117	0.00	1.53	0.00	0.00	0.00	0.00
	118	0.00	1.61	0.00	0.00	0.00	0.00
	119	0.00	1.62	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.87	0.00	0.00	0.00	0.00
	122	0.00	0.88	0.00	0.00	0.00	0.00
	123	0.00	0.88	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.35	0.00	0.00	0.00	0.00
	125	0.00	1.35	0.00	0.00	0.00	0.00
	126	0.00	1.45	0.00	0.00	0.00	0.00
	127	0.00	1.48	0.00	0.00	0.00	0.00
38	100	0.00	0.76	0.00	0.00	0.00	0.00
	101	0.00	0.76	0.00	0.00	0.00	0.00
	102	0.00	0.82	0.00	0.00	0.00	0.00
	103	0.00	0.83	0.00	0.00	0.00	0.00
	104	0.00	0.68	0.00	0.00	0.00	0.00
	105	0.00	0.67	0.00	0.00	0.00	0.00
	106	0.00	0.71	0.00	0.00	0.00	0.00
	107	0.00	0.72	0.00	0.00	0.00	0.00
	108	0.00	0.79	0.00	0.00	0.00	0.00
	109	0.00	0.78	0.00	0.00	0.00	0.00
	110	0.00	0.82	0.00	0.00	0.00	0.00
	111	0.00	0.83	0.00	0.00	0.00	0.00
	112	0.00	0.75	0.00	0.00	0.00	0.00
	113	0.00	0.75	0.00	0.00	0.00	0.00
	114	0.00	0.79	0.00	0.00	0.00	0.00
	115	0.00	0.79	0.00	0.00	0.00	0.00
	116	0.00	0.76	0.00	0.00	0.00	0.00
	117	0.00	0.76	0.00	0.00	0.00	0.00
	118	0.00	0.80	0.00	0.00	0.00	0.00
	119	0.00	0.80	0.00	0.00	0.00	0.00
	120	0.00	0.31	0.00	0.00	0.00	0.00
	121	0.00	0.46	0.00	0.00	0.00	0.00
	122	0.00	0.41	0.00	0.00	0.00	0.00
	123	0.00	0.43	0.00	0.00	0.00	0.00
	124	0.00	0.68	0.00	0.00	0.00	0.00
	125	0.00	0.68	0.00	0.00	0.00	0.00
	126	0.00	0.73	0.00	0.00	0.00	0.00
	127	0.00	0.75	0.00	0.00	0.00	0.00
39	100	0.00	1.41	0.00	0.00	0.00	0.00
	101	0.00	1.40	0.00	0.00	0.00	0.00
	102	0.00	1.52	0.00	0.00	0.00	0.00
	103	0.00	1.53	0.00	0.00	0.00	0.00
	104	0.00	1.38	0.00	0.00	0.00	0.00
	105	0.00	1.38	0.00	0.00	0.00	0.00
	106	0.00	1.45	0.00	0.00	0.00	0.00
	107	0.00	1.46	0.00	0.00	0.00	0.00
	108	0.00	1.36	0.00	0.00	0.00	0.00
	109	0.00	1.36	0.00	0.00	0.00	0.00
	110	0.00	1.43	0.00	0.00	0.00	0.00
	111	0.00	1.44	0.00	0.00	0.00	0.00
	112	0.00	1.50	0.00	0.00	0.00	0.00
	113	0.00	1.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.57	0.00	0.00	0.00	0.00
	115	0.00	1.58	0.00	0.00	0.00	0.00
	116	0.00	1.48	0.00	0.00	0.00	0.00
	117	0.00	1.47	0.00	0.00	0.00	0.00
	118	0.00	1.54	0.00	0.00	0.00	0.00
	119	0.00	1.55	0.00	0.00	0.00	0.00
	120	0.00	0.77	0.00	0.00	0.00	0.00
	121	0.00	0.74	0.00	0.00	0.00	0.00
	122	0.00	0.93	0.00	0.00	0.00	0.00
	123	0.00	0.89	0.00	0.00	0.00	0.00
	124	0.00	1.27	0.00	0.00	0.00	0.00
	125	0.00	1.26	0.00	0.00	0.00	0.00
	126	0.00	1.33	0.00	0.00	0.00	0.00
	127	0.00	1.36	0.00	0.00	0.00	0.00
40	100	0.00	1.42	0.00	0.00	0.00	0.00
	101	0.00	1.42	0.00	0.00	0.00	0.00
	102	0.00	1.53	0.00	0.00	0.00	0.00
	103	0.00	1.55	0.00	0.00	0.00	0.00
	104	0.00	1.35	0.00	0.00	0.00	0.00
	105	0.00	1.35	0.00	0.00	0.00	0.00
	106	0.00	1.42	0.00	0.00	0.00	0.00
	107	0.00	1.43	0.00	0.00	0.00	0.00
	108	0.00	1.41	0.00	0.00	0.00	0.00
	109	0.00	1.40	0.00	0.00	0.00	0.00
	110	0.00	1.47	0.00	0.00	0.00	0.00
	111	0.00	1.49	0.00	0.00	0.00	0.00
	112	0.00	1.48	0.00	0.00	0.00	0.00
	113	0.00	1.47	0.00	0.00	0.00	0.00
	114	0.00	1.54	0.00	0.00	0.00	0.00
	115	0.00	1.55	0.00	0.00	0.00	0.00
	116	0.00	1.46	0.00	0.00	0.00	0.00
	117	0.00	1.46	0.00	0.00	0.00	0.00
	118	0.00	1.53	0.00	0.00	0.00	0.00
	119	0.00	1.54	0.00	0.00	0.00	0.00
	120	0.00	0.71	0.00	0.00	0.00	0.00
	121	0.00	0.79	0.00	0.00	0.00	0.00
	122	0.00	0.88	0.00	0.00	0.00	0.00
	123	0.00	0.86	0.00	0.00	0.00	0.00
	124	0.00	1.28	0.00	0.00	0.00	0.00
	125	0.00	1.27	0.00	0.00	0.00	0.00
	126	0.00	1.35	0.00	0.00	0.00	0.00
	127	0.00	1.38	0.00	0.00	0.00	0.00
41	100	0.00	1.44	0.00	0.00	0.00	0.00
	101	0.00	1.43	0.00	0.00	0.00	0.00
	102	0.00	1.55	0.00	0.00	0.00	0.00
	103	0.00	1.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.32	0.00	0.00	0.00	0.00
	105	0.00	1.31	0.00	0.00	0.00	0.00
	106	0.00	1.39	0.00	0.00	0.00	0.00
	107	0.00	1.40	0.00	0.00	0.00	0.00
	108	0.00	1.45	0.00	0.00	0.00	0.00
	109	0.00	1.45	0.00	0.00	0.00	0.00
	110	0.00	1.52	0.00	0.00	0.00	0.00
	111	0.00	1.53	0.00	0.00	0.00	0.00
	112	0.00	1.45	0.00	0.00	0.00	0.00
	113	0.00	1.44	0.00	0.00	0.00	0.00
	114	0.00	1.51	0.00	0.00	0.00	0.00
	115	0.00	1.53	0.00	0.00	0.00	0.00
	116	0.00	1.45	0.00	0.00	0.00	0.00
	117	0.00	1.45	0.00	0.00	0.00	0.00
	118	0.00	1.52	0.00	0.00	0.00	0.00
	119	0.00	1.53	0.00	0.00	0.00	0.00
	120	0.00	0.66	0.00	0.00	0.00	0.00
	121	0.00	0.83	0.00	0.00	0.00	0.00
	122	0.00	0.83	0.00	0.00	0.00	0.00
	123	0.00	0.83	0.00	0.00	0.00	0.00
	124	0.00	1.29	0.00	0.00	0.00	0.00
	125	0.00	1.28	0.00	0.00	0.00	0.00
	126	0.00	1.36	0.00	0.00	0.00	0.00
	127	0.00	1.39	0.00	0.00	0.00	0.00
42	100	0.00	0.73	0.00	0.00	0.00	0.00
	101	0.00	0.72	0.00	0.00	0.00	0.00
	102	0.00	0.78	0.00	0.00	0.00	0.00
	103	0.00	0.79	0.00	0.00	0.00	0.00
	104	0.00	0.64	0.00	0.00	0.00	0.00
	105	0.00	0.64	0.00	0.00	0.00	0.00
	106	0.00	0.68	0.00	0.00	0.00	0.00
	107	0.00	0.68	0.00	0.00	0.00	0.00
	108	0.00	0.75	0.00	0.00	0.00	0.00
	109	0.00	0.74	0.00	0.00	0.00	0.00
	110	0.00	0.78	0.00	0.00	0.00	0.00
	111	0.00	0.79	0.00	0.00	0.00	0.00
	112	0.00	0.71	0.00	0.00	0.00	0.00
	113	0.00	0.71	0.00	0.00	0.00	0.00
	114	0.00	0.74	0.00	0.00	0.00	0.00
	115	0.00	0.75	0.00	0.00	0.00	0.00
	116	0.00	0.72	0.00	0.00	0.00	0.00
	117	0.00	0.72	0.00	0.00	0.00	0.00
	118	0.00	0.75	0.00	0.00	0.00	0.00
	119	0.00	0.76	0.00	0.00	0.00	0.00
	120	0.00	0.30	0.00	0.00	0.00	0.00
	121	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	0.39	0.00	0.00	0.00	0.00
	123	0.00	0.40	0.00	0.00	0.00	0.00
	124	0.00	0.65	0.00	0.00	0.00	0.00
	125	0.00	0.65	0.00	0.00	0.00	0.00
	126	0.00	0.69	0.00	0.00	0.00	0.00
	127	0.00	0.70	0.00	0.00	0.00	0.00
43	100	0.00	1.32	0.00	0.00	0.00	0.00
	101	0.00	1.32	0.00	0.00	0.00	0.00
	102	0.00	1.43	0.00	0.00	0.00	0.00
	103	0.00	1.44	0.00	0.00	0.00	0.00
	104	0.00	1.31	0.00	0.00	0.00	0.00
	105	0.00	1.31	0.00	0.00	0.00	0.00
	106	0.00	1.37	0.00	0.00	0.00	0.00
	107	0.00	1.38	0.00	0.00	0.00	0.00
	108	0.00	1.28	0.00	0.00	0.00	0.00
	109	0.00	1.28	0.00	0.00	0.00	0.00
	110	0.00	1.34	0.00	0.00	0.00	0.00
	111	0.00	1.36	0.00	0.00	0.00	0.00
	112	0.00	1.41	0.00	0.00	0.00	0.00
	113	0.00	1.41	0.00	0.00	0.00	0.00
	114	0.00	1.47	0.00	0.00	0.00	0.00
	115	0.00	1.49	0.00	0.00	0.00	0.00
	116	0.00	1.39	0.00	0.00	0.00	0.00
	117	0.00	1.38	0.00	0.00	0.00	0.00
	118	0.00	1.44	0.00	0.00	0.00	0.00
	119	0.00	1.46	0.00	0.00	0.00	0.00
	120	0.00	0.74	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	0.87	0.00	0.00	0.00	0.00
	123	0.00	0.84	0.00	0.00	0.00	0.00
	124	0.00	1.20	0.00	0.00	0.00	0.00
	125	0.00	1.19	0.00	0.00	0.00	0.00
	126	0.00	1.23	0.00	0.00	0.00	0.00
	127	0.00	1.26	0.00	0.00	0.00	0.00
44	100	0.00	1.34	0.00	0.00	0.00	0.00
	101	0.00	1.34	0.00	0.00	0.00	0.00
	102	0.00	1.45	0.00	0.00	0.00	0.00
	103	0.00	1.46	0.00	0.00	0.00	0.00
	104	0.00	1.28	0.00	0.00	0.00	0.00
	105	0.00	1.28	0.00	0.00	0.00	0.00
	106	0.00	1.34	0.00	0.00	0.00	0.00
	107	0.00	1.36	0.00	0.00	0.00	0.00
	108	0.00	1.33	0.00	0.00	0.00	0.00
	109	0.00	1.33	0.00	0.00	0.00	0.00
	110	0.00	1.39	0.00	0.00	0.00	0.00
	111	0.00	1.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.39	0.00	0.00	0.00	0.00
	113	0.00	1.38	0.00	0.00	0.00	0.00
	114	0.00	1.44	0.00	0.00	0.00	0.00
	115	0.00	1.46	0.00	0.00	0.00	0.00
	116	0.00	1.38	0.00	0.00	0.00	0.00
	117	0.00	1.37	0.00	0.00	0.00	0.00
	118	0.00	1.44	0.00	0.00	0.00	0.00
	119	0.00	1.45	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.75	0.00	0.00	0.00	0.00
	122	0.00	0.82	0.00	0.00	0.00	0.00
	123	0.00	0.81	0.00	0.00	0.00	0.00
	124	0.00	1.21	0.00	0.00	0.00	0.00
	125	0.00	1.20	0.00	0.00	0.00	0.00
	126	0.00	1.25	0.00	0.00	0.00	0.00
	127	0.00	1.28	0.00	0.00	0.00	0.00
45	100	0.00	1.36	0.00	0.00	0.00	0.00
	101	0.00	1.35	0.00	0.00	0.00	0.00
	102	0.00	1.46	0.00	0.00	0.00	0.00
	103	0.00	1.48	0.00	0.00	0.00	0.00
	104	0.00	1.25	0.00	0.00	0.00	0.00
	105	0.00	1.25	0.00	0.00	0.00	0.00
	106	0.00	1.31	0.00	0.00	0.00	0.00
	107	0.00	1.33	0.00	0.00	0.00	0.00
	108	0.00	1.38	0.00	0.00	0.00	0.00
	109	0.00	1.37	0.00	0.00	0.00	0.00
	110	0.00	1.44	0.00	0.00	0.00	0.00
	111	0.00	1.45	0.00	0.00	0.00	0.00
	112	0.00	1.36	0.00	0.00	0.00	0.00
	113	0.00	1.35	0.00	0.00	0.00	0.00
	114	0.00	1.42	0.00	0.00	0.00	0.00
	115	0.00	1.43	0.00	0.00	0.00	0.00
	116	0.00	1.37	0.00	0.00	0.00	0.00
	117	0.00	1.36	0.00	0.00	0.00	0.00
	118	0.00	1.43	0.00	0.00	0.00	0.00
	119	0.00	1.44	0.00	0.00	0.00	0.00
	120	0.00	0.63	0.00	0.00	0.00	0.00
	121	0.00	0.80	0.00	0.00	0.00	0.00
	122	0.00	0.77	0.00	0.00	0.00	0.00
	123	0.00	0.78	0.00	0.00	0.00	0.00
	124	0.00	1.22	0.00	0.00	0.00	0.00
	125	0.00	1.22	0.00	0.00	0.00	0.00
	126	0.00	1.27	0.00	0.00	0.00	0.00
	127	0.00	1.30	0.00	0.00	0.00	0.00
46	100	0.00	0.69	0.00	0.00	0.00	0.00
	101	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	0.74	0.00	0.00	0.00	0.00
	103	0.00	0.75	0.00	0.00	0.00	0.00
	104	0.00	0.61	0.00	0.00	0.00	0.00
	105	0.00	0.61	0.00	0.00	0.00	0.00
	106	0.00	0.64	0.00	0.00	0.00	0.00
	107	0.00	0.65	0.00	0.00	0.00	0.00
	108	0.00	0.71	0.00	0.00	0.00	0.00
	109	0.00	0.71	0.00	0.00	0.00	0.00
	110	0.00	0.74	0.00	0.00	0.00	0.00
	111	0.00	0.75	0.00	0.00	0.00	0.00
	112	0.00	0.67	0.00	0.00	0.00	0.00
	113	0.00	0.66	0.00	0.00	0.00	0.00
	114	0.00	0.70	0.00	0.00	0.00	0.00
	115	0.00	0.70	0.00	0.00	0.00	0.00
	116	0.00	0.68	0.00	0.00	0.00	0.00
	117	0.00	0.67	0.00	0.00	0.00	0.00
	118	0.00	0.71	0.00	0.00	0.00	0.00
	119	0.00	0.72	0.00	0.00	0.00	0.00
	120	0.00	0.29	0.00	0.00	0.00	0.00
	121	0.00	0.42	0.00	0.00	0.00	0.00
	122	0.00	0.36	0.00	0.00	0.00	0.00
	123	0.00	0.38	0.00	0.00	0.00	0.00
	124	0.00	0.62	0.00	0.00	0.00	0.00
	125	0.00	0.61	0.00	0.00	0.00	0.00
	126	0.00	0.64	0.00	0.00	0.00	0.00
	127	0.00	0.66	0.00	0.00	0.00	0.00
47	100	0.00	1.24	0.00	0.00	0.00	0.00
	101	0.00	1.24	0.00	0.00	0.00	0.00
	102	0.00	1.33	0.00	0.00	0.00	0.00
	103	0.00	1.35	0.00	0.00	0.00	0.00
	104	0.00	1.24	0.00	0.00	0.00	0.00
	105	0.00	1.24	0.00	0.00	0.00	0.00
	106	0.00	1.29	0.00	0.00	0.00	0.00
	107	0.00	1.31	0.00	0.00	0.00	0.00
	108	0.00	1.20	0.00	0.00	0.00	0.00
	109	0.00	1.20	0.00	0.00	0.00	0.00
	110	0.00	1.25	0.00	0.00	0.00	0.00
	111	0.00	1.27	0.00	0.00	0.00	0.00
	112	0.00	1.32	0.00	0.00	0.00	0.00
	113	0.00	1.32	0.00	0.00	0.00	0.00
	114	0.00	1.37	0.00	0.00	0.00	0.00
	115	0.00	1.39	0.00	0.00	0.00	0.00
	116	0.00	1.29	0.00	0.00	0.00	0.00
	117	0.00	1.29	0.00	0.00	0.00	0.00
	118	0.00	1.35	0.00	0.00	0.00	0.00
	119	0.00	1.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.71	0.00	0.00	0.00	0.00
	121	0.00	0.66	0.00	0.00	0.00	0.00
	122	0.00	0.82	0.00	0.00	0.00	0.00
	123	0.00	0.78	0.00	0.00	0.00	0.00
	124	0.00	1.13	0.00	0.00	0.00	0.00
	125	0.00	1.12	0.00	0.00	0.00	0.00
	126	0.00	1.14	0.00	0.00	0.00	0.00
	127	0.00	1.17	0.00	0.00	0.00	0.00
48	100	0.00	1.26	0.00	0.00	0.00	0.00
	101	0.00	1.26	0.00	0.00	0.00	0.00
	102	0.00	1.35	0.00	0.00	0.00	0.00
	103	0.00	1.37	0.00	0.00	0.00	0.00
	104	0.00	1.21	0.00	0.00	0.00	0.00
	105	0.00	1.21	0.00	0.00	0.00	0.00
	106	0.00	1.26	0.00	0.00	0.00	0.00
	107	0.00	1.28	0.00	0.00	0.00	0.00
	108	0.00	1.25	0.00	0.00	0.00	0.00
	109	0.00	1.25	0.00	0.00	0.00	0.00
	110	0.00	1.30	0.00	0.00	0.00	0.00
	111	0.00	1.32	0.00	0.00	0.00	0.00
	112	0.00	1.29	0.00	0.00	0.00	0.00
	113	0.00	1.29	0.00	0.00	0.00	0.00
	114	0.00	1.35	0.00	0.00	0.00	0.00
	115	0.00	1.36	0.00	0.00	0.00	0.00
	116	0.00	1.29	0.00	0.00	0.00	0.00
	117	0.00	1.28	0.00	0.00	0.00	0.00
	118	0.00	1.34	0.00	0.00	0.00	0.00
	119	0.00	1.36	0.00	0.00	0.00	0.00
	120	0.00	0.66	0.00	0.00	0.00	0.00
	121	0.00	0.71	0.00	0.00	0.00	0.00
	122	0.00	0.77	0.00	0.00	0.00	0.00
	123	0.00	0.76	0.00	0.00	0.00	0.00
	124	0.00	1.14	0.00	0.00	0.00	0.00
	125	0.00	1.13	0.00	0.00	0.00	0.00
	126	0.00	1.16	0.00	0.00	0.00	0.00
	127	0.00	1.18	0.00	0.00	0.00	0.00
49	100	0.00	1.28	0.00	0.00	0.00	0.00
	101	0.00	1.27	0.00	0.00	0.00	0.00
	102	0.00	1.37	0.00	0.00	0.00	0.00
	103	0.00	1.39	0.00	0.00	0.00	0.00
	104	0.00	1.18	0.00	0.00	0.00	0.00
	105	0.00	1.18	0.00	0.00	0.00	0.00
	106	0.00	1.24	0.00	0.00	0.00	0.00
	107	0.00	1.25	0.00	0.00	0.00	0.00
	108	0.00	1.30	0.00	0.00	0.00	0.00
	109	0.00	1.29	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	1.35	0.00	0.00	0.00	0.00
	111	0.00	1.37	0.00	0.00	0.00	0.00
	112	0.00	1.27	0.00	0.00	0.00	0.00
	113	0.00	1.26	0.00	0.00	0.00	0.00
	114	0.00	1.32	0.00	0.00	0.00	0.00
	115	0.00	1.34	0.00	0.00	0.00	0.00
	116	0.00	1.28	0.00	0.00	0.00	0.00
	117	0.00	1.27	0.00	0.00	0.00	0.00
	118	0.00	1.33	0.00	0.00	0.00	0.00
	119	0.00	1.35	0.00	0.00	0.00	0.00
	120	0.00	0.60	0.00	0.00	0.00	0.00
	121	0.00	0.76	0.00	0.00	0.00	0.00
	122	0.00	0.72	0.00	0.00	0.00	0.00
	123	0.00	0.73	0.00	0.00	0.00	0.00
	124	0.00	1.15	0.00	0.00	0.00	0.00
	125	0.00	1.15	0.00	0.00	0.00	0.00
	126	0.00	1.18	0.00	0.00	0.00	0.00
	127	0.00	1.20	0.00	0.00	0.00	0.00
68	100	0.00	1.67	0.00	0.00	0.00	0.00
	101	0.00	1.67	0.00	0.00	0.00	0.00
	102	0.00	1.80	0.00	0.00	0.00	0.00
	103	0.00	1.81	0.00	0.00	0.00	0.00
	104	0.00	1.76	0.00	0.00	0.00	0.00
	105	0.00	1.77	0.00	0.00	0.00	0.00
	106	0.00	1.84	0.00	0.00	0.00	0.00
	107	0.00	1.85	0.00	0.00	0.00	0.00
	108	0.00	1.50	0.00	0.00	0.00	0.00
	109	0.00	1.51	0.00	0.00	0.00	0.00
	110	0.00	1.58	0.00	0.00	0.00	0.00
	111	0.00	1.59	0.00	0.00	0.00	0.00
	112	0.00	1.96	0.00	0.00	0.00	0.00
	113	0.00	1.96	0.00	0.00	0.00	0.00
	114	0.00	2.04	0.00	0.00	0.00	0.00
	115	0.00	2.05	0.00	0.00	0.00	0.00
	116	0.00	1.87	0.00	0.00	0.00	0.00
	117	0.00	1.87	0.00	0.00	0.00	0.00
	118	0.00	1.94	0.00	0.00	0.00	0.00
	119	0.00	1.95	0.00	0.00	0.00	0.00
	120	0.00	1.07	0.00	0.00	0.00	0.00
	121	0.00	0.73	0.00	0.00	0.00	0.00
	122	0.00	1.33	0.00	0.00	0.00	0.00
	123	0.00	1.21	0.00	0.00	0.00	0.00
	124	0.00	1.51	0.00	0.00	0.00	0.00
	125	0.00	1.52	0.00	0.00	0.00	0.00
	126	0.00	1.69	0.00	0.00	0.00	0.00
	127	0.00	1.74	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
69	100	0.00	0.82	0.00	0.00	0.00	0.00
	101	0.00	0.82	0.00	0.00	0.00	0.00
	102	0.00	0.88	0.00	0.00	0.00	0.00
	103	0.00	0.89	0.00	0.00	0.00	0.00
	104	0.00	0.89	0.00	0.00	0.00	0.00
	105	0.00	0.89	0.00	0.00	0.00	0.00
	106	0.00	0.93	0.00	0.00	0.00	0.00
	107	0.00	0.93	0.00	0.00	0.00	0.00
	108	0.00	0.72	0.00	0.00	0.00	0.00
	109	0.00	0.73	0.00	0.00	0.00	0.00
	110	0.00	0.76	0.00	0.00	0.00	0.00
	111	0.00	0.77	0.00	0.00	0.00	0.00
	112	0.00	0.99	0.00	0.00	0.00	0.00
	113	0.00	0.99	0.00	0.00	0.00	0.00
	114	0.00	1.02	0.00	0.00	0.00	0.00
	115	0.00	1.03	0.00	0.00	0.00	0.00
	116	0.00	0.93	0.00	0.00	0.00	0.00
	117	0.00	0.94	0.00	0.00	0.00	0.00
	118	0.00	0.97	0.00	0.00	0.00	0.00
	119	0.00	0.97	0.00	0.00	0.00	0.00
	120	0.00	0.56	0.00	0.00	0.00	0.00
	121	0.00	0.34	0.00	0.00	0.00	0.00
	122	0.00	0.69	0.00	0.00	0.00	0.00
	123	0.00	0.61	0.00	0.00	0.00	0.00
	124	0.00	0.74	0.00	0.00	0.00	0.00
	125	0.00	0.75	0.00	0.00	0.00	0.00
	126	0.00	0.83	0.00	0.00	0.00	0.00
	127	0.00	0.86	0.00	0.00	0.00	0.00
70	100	0.00	1.69	0.00	0.00	0.00	0.00
	101	0.00	1.70	0.00	0.00	0.00	0.00
	102	0.00	1.83	0.00	0.00	0.00	0.00
	103	0.00	1.84	0.00	0.00	0.00	0.00
	104	0.00	1.74	0.00	0.00	0.00	0.00
	105	0.00	1.75	0.00	0.00	0.00	0.00
	106	0.00	1.82	0.00	0.00	0.00	0.00
	107	0.00	1.83	0.00	0.00	0.00	0.00
	108	0.00	1.56	0.00	0.00	0.00	0.00
	109	0.00	1.56	0.00	0.00	0.00	0.00
	110	0.00	1.64	0.00	0.00	0.00	0.00
	111	0.00	1.65	0.00	0.00	0.00	0.00
	112	0.00	1.95	0.00	0.00	0.00	0.00
	113	0.00	1.95	0.00	0.00	0.00	0.00
	114	0.00	2.03	0.00	0.00	0.00	0.00
	115	0.00	2.04	0.00	0.00	0.00	0.00
	116	0.00	1.87	0.00	0.00	0.00	0.00
	117	0.00	1.87	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.95	0.00	0.00	0.00	0.00
	119	0.00	1.96	0.00	0.00	0.00	0.00
	120	0.00	1.02	0.00	0.00	0.00	0.00
	121	0.00	0.78	0.00	0.00	0.00	0.00
	122	0.00	1.29	0.00	0.00	0.00	0.00
	123	0.00	1.19	0.00	0.00	0.00	0.00
	124	0.00	1.53	0.00	0.00	0.00	0.00
	125	0.00	1.54	0.00	0.00	0.00	0.00
	126	0.00	1.72	0.00	0.00	0.00	0.00
	127	0.00	1.76	0.00	0.00	0.00	0.00
71	100	0.00	1.72	0.00	0.00	0.00	0.00
	101	0.00	1.72	0.00	0.00	0.00	0.00
	102	0.00	1.86	0.00	0.00	0.00	0.00
	103	0.00	1.87	0.00	0.00	0.00	0.00
	104	0.00	1.72	0.00	0.00	0.00	0.00
	105	0.00	1.72	0.00	0.00	0.00	0.00
	106	0.00	1.80	0.00	0.00	0.00	0.00
	107	0.00	1.81	0.00	0.00	0.00	0.00
	108	0.00	1.62	0.00	0.00	0.00	0.00
	109	0.00	1.62	0.00	0.00	0.00	0.00
	110	0.00	1.70	0.00	0.00	0.00	0.00
	111	0.00	1.71	0.00	0.00	0.00	0.00
	112	0.00	1.93	0.00	0.00	0.00	0.00
	113	0.00	1.93	0.00	0.00	0.00	0.00
	114	0.00	2.01	0.00	0.00	0.00	0.00
	115	0.00	2.02	0.00	0.00	0.00	0.00
	116	0.00	1.87	0.00	0.00	0.00	0.00
	117	0.00	1.87	0.00	0.00	0.00	0.00
	118	0.00	1.95	0.00	0.00	0.00	0.00
	119	0.00	1.96	0.00	0.00	0.00	0.00
	120	0.00	0.97	0.00	0.00	0.00	0.00
	121	0.00	0.83	0.00	0.00	0.00	0.00
	122	0.00	1.25	0.00	0.00	0.00	0.00
	123	0.00	1.17	0.00	0.00	0.00	0.00
	124	0.00	1.55	0.00	0.00	0.00	0.00
	125	0.00	1.56	0.00	0.00	0.00	0.00
	126	0.00	1.75	0.00	0.00	0.00	0.00
	127	0.00	1.79	0.00	0.00	0.00	0.00
72	100	0.00	1.74	0.00	0.00	0.00	0.00
	101	0.00	1.74	0.00	0.00	0.00	0.00
	102	0.00	1.88	0.00	0.00	0.00	0.00
	103	0.00	1.89	0.00	0.00	0.00	0.00
	104	0.00	1.70	0.00	0.00	0.00	0.00
	105	0.00	1.70	0.00	0.00	0.00	0.00
	106	0.00	1.78	0.00	0.00	0.00	0.00
	107	0.00	1.79	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	1.67	0.00	0.00	0.00	0.00
	109	0.00	1.67	0.00	0.00	0.00	0.00
	110	0.00	1.75	0.00	0.00	0.00	0.00
	111	0.00	1.76	0.00	0.00	0.00	0.00
	112	0.00	1.91	0.00	0.00	0.00	0.00
	113	0.00	1.91	0.00	0.00	0.00	0.00
	114	0.00	2.00	0.00	0.00	0.00	0.00
	115	0.00	2.00	0.00	0.00	0.00	0.00
	116	0.00	1.86	0.00	0.00	0.00	0.00
	117	0.00	1.86	0.00	0.00	0.00	0.00
	118	0.00	1.95	0.00	0.00	0.00	0.00
	119	0.00	1.96	0.00	0.00	0.00	0.00
	120	0.00	0.92	0.00	0.00	0.00	0.00
	121	0.00	0.88	0.00	0.00	0.00	0.00
	122	0.00	1.20	0.00	0.00	0.00	0.00
	123	0.00	1.14	0.00	0.00	0.00	0.00
	124	0.00	1.57	0.00	0.00	0.00	0.00
	125	0.00	1.57	0.00	0.00	0.00	0.00
	126	0.00	1.77	0.00	0.00	0.00	0.00
	127	0.00	1.81	0.00	0.00	0.00	0.00
73	100	0.00	1.62	0.00	0.00	0.00	0.00
	101	0.00	1.63	0.00	0.00	0.00	0.00
	102	0.00	1.75	0.00	0.00	0.00	0.00
	103	0.00	1.76	0.00	0.00	0.00	0.00
	104	0.00	1.73	0.00	0.00	0.00	0.00
	105	0.00	1.73	0.00	0.00	0.00	0.00
	106	0.00	1.80	0.00	0.00	0.00	0.00
	107	0.00	1.81	0.00	0.00	0.00	0.00
	108	0.00	1.46	0.00	0.00	0.00	0.00
	109	0.00	1.46	0.00	0.00	0.00	0.00
	110	0.00	1.53	0.00	0.00	0.00	0.00
	111	0.00	1.54	0.00	0.00	0.00	0.00
	112	0.00	1.91	0.00	0.00	0.00	0.00
	113	0.00	1.92	0.00	0.00	0.00	0.00
	114	0.00	1.99	0.00	0.00	0.00	0.00
	115	0.00	2.00	0.00	0.00	0.00	0.00
	116	0.00	1.82	0.00	0.00	0.00	0.00
	117	0.00	1.82	0.00	0.00	0.00	0.00
	118	0.00	1.89	0.00	0.00	0.00	0.00
	119	0.00	1.90	0.00	0.00	0.00	0.00
	120	0.00	1.06	0.00	0.00	0.00	0.00
	121	0.00	0.70	0.00	0.00	0.00	0.00
	122	0.00	1.30	0.00	0.00	0.00	0.00
	123	0.00	1.18	0.00	0.00	0.00	0.00
	124	0.00	1.47	0.00	0.00	0.00	0.00
	125	0.00	1.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	1.63	0.00	0.00	0.00	0.00
	127	0.00	1.67	0.00	0.00	0.00	0.00
74	100	0.00	0.80	0.00	0.00	0.00	0.00
	101	0.00	0.80	0.00	0.00	0.00	0.00
	102	0.00	0.86	0.00	0.00	0.00	0.00
	103	0.00	0.86	0.00	0.00	0.00	0.00
	104	0.00	0.87	0.00	0.00	0.00	0.00
	105	0.00	0.88	0.00	0.00	0.00	0.00
	106	0.00	0.91	0.00	0.00	0.00	0.00
	107	0.00	0.92	0.00	0.00	0.00	0.00
	108	0.00	0.70	0.00	0.00	0.00	0.00
	109	0.00	0.70	0.00	0.00	0.00	0.00
	110	0.00	0.74	0.00	0.00	0.00	0.00
	111	0.00	0.74	0.00	0.00	0.00	0.00
	112	0.00	0.96	0.00	0.00	0.00	0.00
	113	0.00	0.97	0.00	0.00	0.00	0.00
	114	0.00	1.00	0.00	0.00	0.00	0.00
	115	0.00	1.00	0.00	0.00	0.00	0.00
	116	0.00	0.91	0.00	0.00	0.00	0.00
	117	0.00	0.91	0.00	0.00	0.00	0.00
	118	0.00	0.94	0.00	0.00	0.00	0.00
	119	0.00	0.95	0.00	0.00	0.00	0.00
	120	0.00	0.55	0.00	0.00	0.00	0.00
	121	0.00	0.32	0.00	0.00	0.00	0.00
	122	0.00	0.67	0.00	0.00	0.00	0.00
	123	0.00	0.60	0.00	0.00	0.00	0.00
	124	0.00	0.72	0.00	0.00	0.00	0.00
	125	0.00	0.73	0.00	0.00	0.00	0.00
	126	0.00	0.80	0.00	0.00	0.00	0.00
	127	0.00	0.82	0.00	0.00	0.00	0.00
75	100	0.00	1.65	0.00	0.00	0.00	0.00
	101	0.00	1.65	0.00	0.00	0.00	0.00
	102	0.00	1.78	0.00	0.00	0.00	0.00
	103	0.00	1.79	0.00	0.00	0.00	0.00
	104	0.00	1.71	0.00	0.00	0.00	0.00
	105	0.00	1.71	0.00	0.00	0.00	0.00
	106	0.00	1.79	0.00	0.00	0.00	0.00
	107	0.00	1.80	0.00	0.00	0.00	0.00
	108	0.00	1.51	0.00	0.00	0.00	0.00
	109	0.00	1.52	0.00	0.00	0.00	0.00
	110	0.00	1.59	0.00	0.00	0.00	0.00
	111	0.00	1.60	0.00	0.00	0.00	0.00
	112	0.00	1.90	0.00	0.00	0.00	0.00
	113	0.00	1.90	0.00	0.00	0.00	0.00
	114	0.00	1.98	0.00	0.00	0.00	0.00
	115	0.00	1.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.82	0.00	0.00	0.00	0.00
	117	0.00	1.82	0.00	0.00	0.00	0.00
	118	0.00	1.90	0.00	0.00	0.00	0.00
	119	0.00	1.91	0.00	0.00	0.00	0.00
	120	0.00	1.01	0.00	0.00	0.00	0.00
	121	0.00	0.75	0.00	0.00	0.00	0.00
	122	0.00	1.26	0.00	0.00	0.00	0.00
	123	0.00	1.16	0.00	0.00	0.00	0.00
	124	0.00	1.49	0.00	0.00	0.00	0.00
	125	0.00	1.49	0.00	0.00	0.00	0.00
	126	0.00	1.66	0.00	0.00	0.00	0.00
	127	0.00	1.70	0.00	0.00	0.00	0.00
76	100	0.00	1.68	0.00	0.00	0.00	0.00
	101	0.00	1.68	0.00	0.00	0.00	0.00
	102	0.00	1.81	0.00	0.00	0.00	0.00
	103	0.00	1.82	0.00	0.00	0.00	0.00
	104	0.00	1.69	0.00	0.00	0.00	0.00
	105	0.00	1.69	0.00	0.00	0.00	0.00
	106	0.00	1.77	0.00	0.00	0.00	0.00
	107	0.00	1.78	0.00	0.00	0.00	0.00
	108	0.00	1.57	0.00	0.00	0.00	0.00
	109	0.00	1.57	0.00	0.00	0.00	0.00
	110	0.00	1.65	0.00	0.00	0.00	0.00
	111	0.00	1.66	0.00	0.00	0.00	0.00
	112	0.00	1.88	0.00	0.00	0.00	0.00
	113	0.00	1.88	0.00	0.00	0.00	0.00
	114	0.00	1.96	0.00	0.00	0.00	0.00
	115	0.00	1.97	0.00	0.00	0.00	0.00
	116	0.00	1.82	0.00	0.00	0.00	0.00
	117	0.00	1.82	0.00	0.00	0.00	0.00
	118	0.00	1.90	0.00	0.00	0.00	0.00
	119	0.00	1.91	0.00	0.00	0.00	0.00
	120	0.00	0.96	0.00	0.00	0.00	0.00
	121	0.00	0.80	0.00	0.00	0.00	0.00
	122	0.00	1.22	0.00	0.00	0.00	0.00
	123	0.00	1.14	0.00	0.00	0.00	0.00
	124	0.00	1.51	0.00	0.00	0.00	0.00
	125	0.00	1.51	0.00	0.00	0.00	0.00
	126	0.00	1.68	0.00	0.00	0.00	0.00
	127	0.00	1.72	0.00	0.00	0.00	0.00
77	100	0.00	1.70	0.00	0.00	0.00	0.00
	101	0.00	1.70	0.00	0.00	0.00	0.00
	102	0.00	1.84	0.00	0.00	0.00	0.00
	103	0.00	1.84	0.00	0.00	0.00	0.00
	104	0.00	1.67	0.00	0.00	0.00	0.00
	105	0.00	1.66	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.75	0.00	0.00	0.00	0.00
	107	0.00	1.76	0.00	0.00	0.00	0.00
	108	0.00	1.62	0.00	0.00	0.00	0.00
	109	0.00	1.62	0.00	0.00	0.00	0.00
	110	0.00	1.70	0.00	0.00	0.00	0.00
	111	0.00	1.71	0.00	0.00	0.00	0.00
	112	0.00	1.86	0.00	0.00	0.00	0.00
	113	0.00	1.86	0.00	0.00	0.00	0.00
	114	0.00	1.95	0.00	0.00	0.00	0.00
	115	0.00	1.95	0.00	0.00	0.00	0.00
	116	0.00	1.82	0.00	0.00	0.00	0.00
	117	0.00	1.82	0.00	0.00	0.00	0.00
	118	0.00	1.90	0.00	0.00	0.00	0.00
	119	0.00	1.91	0.00	0.00	0.00	0.00
	120	0.00	0.91	0.00	0.00	0.00	0.00
	121	0.00	0.86	0.00	0.00	0.00	0.00
	122	0.00	1.18	0.00	0.00	0.00	0.00
	123	0.00	1.11	0.00	0.00	0.00	0.00
	124	0.00	1.53	0.00	0.00	0.00	0.00
	125	0.00	1.53	0.00	0.00	0.00	0.00
	126	0.00	1.71	0.00	0.00	0.00	0.00
	127	0.00	1.75	0.00	0.00	0.00	0.00
78	100	0.00	1.57	0.00	0.00	0.00	0.00
	101	0.00	1.58	0.00	0.00	0.00	0.00
	102	0.00	1.69	0.00	0.00	0.00	0.00
	103	0.00	1.71	0.00	0.00	0.00	0.00
	104	0.00	1.69	0.00	0.00	0.00	0.00
	105	0.00	1.70	0.00	0.00	0.00	0.00
	106	0.00	1.76	0.00	0.00	0.00	0.00
	107	0.00	1.78	0.00	0.00	0.00	0.00
	108	0.00	1.40	0.00	0.00	0.00	0.00
	109	0.00	1.41	0.00	0.00	0.00	0.00
	110	0.00	1.48	0.00	0.00	0.00	0.00
	111	0.00	1.49	0.00	0.00	0.00	0.00
	112	0.00	1.86	0.00	0.00	0.00	0.00
	113	0.00	1.86	0.00	0.00	0.00	0.00
	114	0.00	1.93	0.00	0.00	0.00	0.00
	115	0.00	1.94	0.00	0.00	0.00	0.00
	116	0.00	1.76	0.00	0.00	0.00	0.00
	117	0.00	1.77	0.00	0.00	0.00	0.00
	118	0.00	1.83	0.00	0.00	0.00	0.00
	119	0.00	1.85	0.00	0.00	0.00	0.00
	120	0.00	1.05	0.00	0.00	0.00	0.00
	121	0.00	0.67	0.00	0.00	0.00	0.00
	122	0.00	1.27	0.00	0.00	0.00	0.00
	123	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.42	0.00	0.00	0.00	0.00
	125	0.00	1.43	0.00	0.00	0.00	0.00
	126	0.00	1.56	0.00	0.00	0.00	0.00
	127	0.00	1.61	0.00	0.00	0.00	0.00
79	100	0.00	0.77	0.00	0.00	0.00	0.00
	101	0.00	0.78	0.00	0.00	0.00	0.00
	102	0.00	0.83	0.00	0.00	0.00	0.00
	103	0.00	0.84	0.00	0.00	0.00	0.00
	104	0.00	0.85	0.00	0.00	0.00	0.00
	105	0.00	0.86	0.00	0.00	0.00	0.00
	106	0.00	0.89	0.00	0.00	0.00	0.00
	107	0.00	0.90	0.00	0.00	0.00	0.00
	108	0.00	0.67	0.00	0.00	0.00	0.00
	109	0.00	0.68	0.00	0.00	0.00	0.00
	110	0.00	0.71	0.00	0.00	0.00	0.00
	111	0.00	0.72	0.00	0.00	0.00	0.00
	112	0.00	0.93	0.00	0.00	0.00	0.00
	113	0.00	0.94	0.00	0.00	0.00	0.00
	114	0.00	0.97	0.00	0.00	0.00	0.00
	115	0.00	0.98	0.00	0.00	0.00	0.00
	116	0.00	0.88	0.00	0.00	0.00	0.00
	117	0.00	0.88	0.00	0.00	0.00	0.00
	118	0.00	0.91	0.00	0.00	0.00	0.00
	119	0.00	0.92	0.00	0.00	0.00	0.00
	120	0.00	0.55	0.00	0.00	0.00	0.00
	121	0.00	0.31	0.00	0.00	0.00	0.00
	122	0.00	0.66	0.00	0.00	0.00	0.00
	123	0.00	0.58	0.00	0.00	0.00	0.00
	124	0.00	0.70	0.00	0.00	0.00	0.00
	125	0.00	0.70	0.00	0.00	0.00	0.00
	126	0.00	0.77	0.00	0.00	0.00	0.00
	127	0.00	0.79	0.00	0.00	0.00	0.00
80	100	0.00	1.60	0.00	0.00	0.00	0.00
	101	0.00	1.60	0.00	0.00	0.00	0.00
	102	0.00	1.73	0.00	0.00	0.00	0.00
	103	0.00	1.74	0.00	0.00	0.00	0.00
	104	0.00	1.67	0.00	0.00	0.00	0.00
	105	0.00	1.68	0.00	0.00	0.00	0.00
	106	0.00	1.75	0.00	0.00	0.00	0.00
	107	0.00	1.76	0.00	0.00	0.00	0.00
	108	0.00	1.46	0.00	0.00	0.00	0.00
	109	0.00	1.47	0.00	0.00	0.00	0.00
	110	0.00	1.54	0.00	0.00	0.00	0.00
	111	0.00	1.55	0.00	0.00	0.00	0.00
	112	0.00	1.85	0.00	0.00	0.00	0.00
	113	0.00	1.85	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.92	0.00	0.00	0.00	0.00
	115	0.00	1.94	0.00	0.00	0.00	0.00
	116	0.00	1.77	0.00	0.00	0.00	0.00
	117	0.00	1.77	0.00	0.00	0.00	0.00
	118	0.00	1.84	0.00	0.00	0.00	0.00
	119	0.00	1.86	0.00	0.00	0.00	0.00
	120	0.00	1.00	0.00	0.00	0.00	0.00
	121	0.00	0.72	0.00	0.00	0.00	0.00
	122	0.00	1.23	0.00	0.00	0.00	0.00
	123	0.00	1.13	0.00	0.00	0.00	0.00
	124	0.00	1.45	0.00	0.00	0.00	0.00
	125	0.00	1.45	0.00	0.00	0.00	0.00
	126	0.00	1.59	0.00	0.00	0.00	0.00
	127	0.00	1.63	0.00	0.00	0.00	0.00
81	100	0.00	1.63	0.00	0.00	0.00	0.00
	101	0.00	1.63	0.00	0.00	0.00	0.00
	102	0.00	1.76	0.00	0.00	0.00	0.00
	103	0.00	1.77	0.00	0.00	0.00	0.00
	104	0.00	1.66	0.00	0.00	0.00	0.00
	105	0.00	1.66	0.00	0.00	0.00	0.00
	106	0.00	1.73	0.00	0.00	0.00	0.00
	107	0.00	1.74	0.00	0.00	0.00	0.00
	108	0.00	1.52	0.00	0.00	0.00	0.00
	109	0.00	1.52	0.00	0.00	0.00	0.00
	110	0.00	1.60	0.00	0.00	0.00	0.00
	111	0.00	1.61	0.00	0.00	0.00	0.00
	112	0.00	1.84	0.00	0.00	0.00	0.00
	113	0.00	1.84	0.00	0.00	0.00	0.00
	114	0.00	1.91	0.00	0.00	0.00	0.00
	115	0.00	1.92	0.00	0.00	0.00	0.00
	116	0.00	1.77	0.00	0.00	0.00	0.00
	117	0.00	1.77	0.00	0.00	0.00	0.00
	118	0.00	1.85	0.00	0.00	0.00	0.00
	119	0.00	1.86	0.00	0.00	0.00	0.00
	120	0.00	0.95	0.00	0.00	0.00	0.00
	121	0.00	0.78	0.00	0.00	0.00	0.00
	122	0.00	1.19	0.00	0.00	0.00	0.00
	123	0.00	1.11	0.00	0.00	0.00	0.00
	124	0.00	1.47	0.00	0.00	0.00	0.00
	125	0.00	1.47	0.00	0.00	0.00	0.00
	126	0.00	1.62	0.00	0.00	0.00	0.00
	127	0.00	1.66	0.00	0.00	0.00	0.00
82	100	0.00	1.65	0.00	0.00	0.00	0.00
	101	0.00	1.65	0.00	0.00	0.00	0.00
	102	0.00	1.79	0.00	0.00	0.00	0.00
	103	0.00	1.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	1.63	0.00	0.00	0.00	0.00
	105	0.00	1.63	0.00	0.00	0.00	0.00
	106	0.00	1.71	0.00	0.00	0.00	0.00
	107	0.00	1.72	0.00	0.00	0.00	0.00
	108	0.00	1.58	0.00	0.00	0.00	0.00
	109	0.00	1.58	0.00	0.00	0.00	0.00
	110	0.00	1.66	0.00	0.00	0.00	0.00
	111	0.00	1.67	0.00	0.00	0.00	0.00
	112	0.00	1.82	0.00	0.00	0.00	0.00
	113	0.00	1.82	0.00	0.00	0.00	0.00
	114	0.00	1.90	0.00	0.00	0.00	0.00
	115	0.00	1.91	0.00	0.00	0.00	0.00
	116	0.00	1.77	0.00	0.00	0.00	0.00
	117	0.00	1.77	0.00	0.00	0.00	0.00
	118	0.00	1.85	0.00	0.00	0.00	0.00
	119	0.00	1.86	0.00	0.00	0.00	0.00
	120	0.00	0.90	0.00	0.00	0.00	0.00
	121	0.00	0.83	0.00	0.00	0.00	0.00
	122	0.00	1.15	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.49	0.00	0.00	0.00	0.00
	125	0.00	1.49	0.00	0.00	0.00	0.00
	126	0.00	1.65	0.00	0.00	0.00	0.00
	127	0.00	1.68	0.00	0.00	0.00	0.00
83	100	0.00	1.52	0.00	0.00	0.00	0.00
	101	0.00	1.52	0.00	0.00	0.00	0.00
	102	0.00	1.63	0.00	0.00	0.00	0.00
	103	0.00	1.65	0.00	0.00	0.00	0.00
	104	0.00	1.65	0.00	0.00	0.00	0.00
	105	0.00	1.65	0.00	0.00	0.00	0.00
	106	0.00	1.72	0.00	0.00	0.00	0.00
	107	0.00	1.73	0.00	0.00	0.00	0.00
	108	0.00	1.35	0.00	0.00	0.00	0.00
	109	0.00	1.36	0.00	0.00	0.00	0.00
	110	0.00	1.42	0.00	0.00	0.00	0.00
	111	0.00	1.43	0.00	0.00	0.00	0.00
	112	0.00	1.80	0.00	0.00	0.00	0.00
	113	0.00	1.81	0.00	0.00	0.00	0.00
	114	0.00	1.87	0.00	0.00	0.00	0.00
	115	0.00	1.88	0.00	0.00	0.00	0.00
	116	0.00	1.70	0.00	0.00	0.00	0.00
	117	0.00	1.71	0.00	0.00	0.00	0.00
	118	0.00	1.77	0.00	0.00	0.00	0.00
	119	0.00	1.79	0.00	0.00	0.00	0.00
	120	0.00	1.04	0.00	0.00	0.00	0.00
	121	0.00	0.64	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	1.24	0.00	0.00	0.00	0.00
	123	0.00	1.11	0.00	0.00	0.00	0.00
	124	0.00	1.38	0.00	0.00	0.00	0.00
	125	0.00	1.38	0.00	0.00	0.00	0.00
	126	0.00	1.49	0.00	0.00	0.00	0.00
	127	0.00	1.53	0.00	0.00	0.00	0.00
84	100	0.00	0.74	0.00	0.00	0.00	0.00
	101	0.00	0.75	0.00	0.00	0.00	0.00
	102	0.00	0.80	0.00	0.00	0.00	0.00
	103	0.00	0.81	0.00	0.00	0.00	0.00
	104	0.00	0.83	0.00	0.00	0.00	0.00
	105	0.00	0.84	0.00	0.00	0.00	0.00
	106	0.00	0.86	0.00	0.00	0.00	0.00
	107	0.00	0.87	0.00	0.00	0.00	0.00
	108	0.00	0.65	0.00	0.00	0.00	0.00
	109	0.00	0.65	0.00	0.00	0.00	0.00
	110	0.00	0.68	0.00	0.00	0.00	0.00
	111	0.00	0.69	0.00	0.00	0.00	0.00
	112	0.00	0.91	0.00	0.00	0.00	0.00
	113	0.00	0.91	0.00	0.00	0.00	0.00
	114	0.00	0.94	0.00	0.00	0.00	0.00
	115	0.00	0.95	0.00	0.00	0.00	0.00
	116	0.00	0.85	0.00	0.00	0.00	0.00
	117	0.00	0.85	0.00	0.00	0.00	0.00
	118	0.00	0.88	0.00	0.00	0.00	0.00
	119	0.00	0.89	0.00	0.00	0.00	0.00
	120	0.00	0.54	0.00	0.00	0.00	0.00
	121	0.00	0.29	0.00	0.00	0.00	0.00
	122	0.00	0.64	0.00	0.00	0.00	0.00
	123	0.00	0.57	0.00	0.00	0.00	0.00
	124	0.00	0.68	0.00	0.00	0.00	0.00
	125	0.00	0.68	0.00	0.00	0.00	0.00
	126	0.00	0.73	0.00	0.00	0.00	0.00
	127	0.00	0.75	0.00	0.00	0.00	0.00
85	100	0.00	1.55	0.00	0.00	0.00	0.00
	101	0.00	1.55	0.00	0.00	0.00	0.00
	102	0.00	1.67	0.00	0.00	0.00	0.00
	103	0.00	1.69	0.00	0.00	0.00	0.00
	104	0.00	1.63	0.00	0.00	0.00	0.00
	105	0.00	1.64	0.00	0.00	0.00	0.00
	106	0.00	1.70	0.00	0.00	0.00	0.00
	107	0.00	1.72	0.00	0.00	0.00	0.00
	108	0.00	1.41	0.00	0.00	0.00	0.00
	109	0.00	1.41	0.00	0.00	0.00	0.00
	110	0.00	1.48	0.00	0.00	0.00	0.00
	111	0.00	1.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.79	0.00	0.00	0.00	0.00
	113	0.00	1.79	0.00	0.00	0.00	0.00
	114	0.00	1.86	0.00	0.00	0.00	0.00
	115	0.00	1.88	0.00	0.00	0.00	0.00
	116	0.00	1.71	0.00	0.00	0.00	0.00
	117	0.00	1.72	0.00	0.00	0.00	0.00
	118	0.00	1.78	0.00	0.00	0.00	0.00
	119	0.00	1.80	0.00	0.00	0.00	0.00
	120	0.00	0.99	0.00	0.00	0.00	0.00
	121	0.00	0.69	0.00	0.00	0.00	0.00
	122	0.00	1.20	0.00	0.00	0.00	0.00
	123	0.00	1.10	0.00	0.00	0.00	0.00
	124	0.00	1.40	0.00	0.00	0.00	0.00
	125	0.00	1.40	0.00	0.00	0.00	0.00
	126	0.00	1.52	0.00	0.00	0.00	0.00
	127	0.00	1.56	0.00	0.00	0.00	0.00
86	100	0.00	1.58	0.00	0.00	0.00	0.00
	101	0.00	1.58	0.00	0.00	0.00	0.00
	102	0.00	1.71	0.00	0.00	0.00	0.00
	103	0.00	1.72	0.00	0.00	0.00	0.00
	104	0.00	1.62	0.00	0.00	0.00	0.00
	105	0.00	1.62	0.00	0.00	0.00	0.00
	106	0.00	1.69	0.00	0.00	0.00	0.00
	107	0.00	1.71	0.00	0.00	0.00	0.00
	108	0.00	1.47	0.00	0.00	0.00	0.00
	109	0.00	1.48	0.00	0.00	0.00	0.00
	110	0.00	1.55	0.00	0.00	0.00	0.00
	111	0.00	1.56	0.00	0.00	0.00	0.00
	112	0.00	1.79	0.00	0.00	0.00	0.00
	113	0.00	1.79	0.00	0.00	0.00	0.00
	114	0.00	1.86	0.00	0.00	0.00	0.00
	115	0.00	1.87	0.00	0.00	0.00	0.00
	116	0.00	1.72	0.00	0.00	0.00	0.00
	117	0.00	1.72	0.00	0.00	0.00	0.00
	118	0.00	1.80	0.00	0.00	0.00	0.00
	119	0.00	1.81	0.00	0.00	0.00	0.00
	120	0.00	0.94	0.00	0.00	0.00	0.00
	121	0.00	0.75	0.00	0.00	0.00	0.00
	122	0.00	1.17	0.00	0.00	0.00	0.00
	123	0.00	1.08	0.00	0.00	0.00	0.00
	124	0.00	1.43	0.00	0.00	0.00	0.00
	125	0.00	1.43	0.00	0.00	0.00	0.00
	126	0.00	1.55	0.00	0.00	0.00	0.00
	127	0.00	1.60	0.00	0.00	0.00	0.00
87	100	0.00	1.61	0.00	0.00	0.00	0.00
	101	0.00	1.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	1.74	0.00	0.00	0.00	0.00
	103	0.00	1.75	0.00	0.00	0.00	0.00
	104	0.00	1.60	0.00	0.00	0.00	0.00
	105	0.00	1.60	0.00	0.00	0.00	0.00
	106	0.00	1.67	0.00	0.00	0.00	0.00
	107	0.00	1.69	0.00	0.00	0.00	0.00
	108	0.00	1.53	0.00	0.00	0.00	0.00
	109	0.00	1.53	0.00	0.00	0.00	0.00
	110	0.00	1.61	0.00	0.00	0.00	0.00
	111	0.00	1.62	0.00	0.00	0.00	0.00
	112	0.00	1.77	0.00	0.00	0.00	0.00
	113	0.00	1.77	0.00	0.00	0.00	0.00
	114	0.00	1.85	0.00	0.00	0.00	0.00
	115	0.00	1.86	0.00	0.00	0.00	0.00
	116	0.00	1.72	0.00	0.00	0.00	0.00
	117	0.00	1.72	0.00	0.00	0.00	0.00
	118	0.00	1.80	0.00	0.00	0.00	0.00
	119	0.00	1.81	0.00	0.00	0.00	0.00
	120	0.00	0.89	0.00	0.00	0.00	0.00
	121	0.00	0.80	0.00	0.00	0.00	0.00
	122	0.00	1.12	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00
	124	0.00	1.45	0.00	0.00	0.00	0.00
	125	0.00	1.45	0.00	0.00	0.00	0.00
	126	0.00	1.58	0.00	0.00	0.00	0.00
	127	0.00	1.62	0.00	0.00	0.00	0.00
103	100	0.00	1.76	0.00	0.00	0.00	0.00
	101	0.00	1.75	0.00	0.00	0.00	0.00
	102	0.00	1.90	0.00	0.00	0.00	0.00
	103	0.00	1.91	0.00	0.00	0.00	0.00
	104	0.00	1.67	0.00	0.00	0.00	0.00
	105	0.00	1.67	0.00	0.00	0.00	0.00
	106	0.00	1.76	0.00	0.00	0.00	0.00
	107	0.00	1.76	0.00	0.00	0.00	0.00
	108	0.00	1.72	0.00	0.00	0.00	0.00
	109	0.00	1.71	0.00	0.00	0.00	0.00
	110	0.00	1.80	0.00	0.00	0.00	0.00
	111	0.00	1.81	0.00	0.00	0.00	0.00
	112	0.00	1.89	0.00	0.00	0.00	0.00
	113	0.00	1.88	0.00	0.00	0.00	0.00
	114	0.00	1.97	0.00	0.00	0.00	0.00
	115	0.00	1.98	0.00	0.00	0.00	0.00
	116	0.00	1.86	0.00	0.00	0.00	0.00
	117	0.00	1.85	0.00	0.00	0.00	0.00
	118	0.00	1.94	0.00	0.00	0.00	0.00
	119	0.00	1.95	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.87	0.00	0.00	0.00	0.00
	121	0.00	0.93	0.00	0.00	0.00	0.00
	122	0.00	1.16	0.00	0.00	0.00	0.00
	123	0.00	1.12	0.00	0.00	0.00	0.00
	124	0.00	1.58	0.00	0.00	0.00	0.00
	125	0.00	1.58	0.00	0.00	0.00	0.00
	126	0.00	1.79	0.00	0.00	0.00	0.00
	127	0.00	1.82	0.00	0.00	0.00	0.00
104	100	0.00	1.78	0.00	0.00	0.00	0.00
	101	0.00	1.77	0.00	0.00	0.00	0.00
	102	0.00	1.92	0.00	0.00	0.00	0.00
	103	0.00	1.93	0.00	0.00	0.00	0.00
	104	0.00	1.64	0.00	0.00	0.00	0.00
	105	0.00	1.63	0.00	0.00	0.00	0.00
	106	0.00	1.73	0.00	0.00	0.00	0.00
	107	0.00	1.73	0.00	0.00	0.00	0.00
	108	0.00	1.76	0.00	0.00	0.00	0.00
	109	0.00	1.76	0.00	0.00	0.00	0.00
	110	0.00	1.85	0.00	0.00	0.00	0.00
	111	0.00	1.86	0.00	0.00	0.00	0.00
	112	0.00	1.86	0.00	0.00	0.00	0.00
	113	0.00	1.85	0.00	0.00	0.00	0.00
	114	0.00	1.95	0.00	0.00	0.00	0.00
	115	0.00	1.95	0.00	0.00	0.00	0.00
	116	0.00	1.85	0.00	0.00	0.00	0.00
	117	0.00	1.84	0.00	0.00	0.00	0.00
	118	0.00	1.93	0.00	0.00	0.00	0.00
	119	0.00	1.94	0.00	0.00	0.00	0.00
	120	0.00	0.81	0.00	0.00	0.00	0.00
	121	0.00	0.98	0.00	0.00	0.00	0.00
	122	0.00	1.11	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.59	0.00	0.00	0.00	0.00
	125	0.00	1.59	0.00	0.00	0.00	0.00
	126	0.00	1.80	0.00	0.00	0.00	0.00
	127	0.00	1.84	0.00	0.00	0.00	0.00
105	100	0.00	1.79	0.00	0.00	0.00	0.00
	101	0.00	1.78	0.00	0.00	0.00	0.00
	102	0.00	1.94	0.00	0.00	0.00	0.00
	103	0.00	1.94	0.00	0.00	0.00	0.00
	104	0.00	1.61	0.00	0.00	0.00	0.00
	105	0.00	1.60	0.00	0.00	0.00	0.00
	106	0.00	1.70	0.00	0.00	0.00	0.00
	107	0.00	1.70	0.00	0.00	0.00	0.00
	108	0.00	1.81	0.00	0.00	0.00	0.00
	109	0.00	1.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	1.90	0.00	0.00	0.00	0.00
	111	0.00	1.90	0.00	0.00	0.00	0.00
	112	0.00	1.83	0.00	0.00	0.00	0.00
	113	0.00	1.82	0.00	0.00	0.00	0.00
	114	0.00	1.92	0.00	0.00	0.00	0.00
	115	0.00	1.93	0.00	0.00	0.00	0.00
	116	0.00	1.84	0.00	0.00	0.00	0.00
	117	0.00	1.83	0.00	0.00	0.00	0.00
	118	0.00	1.92	0.00	0.00	0.00	0.00
	119	0.00	1.93	0.00	0.00	0.00	0.00
	120	0.00	0.76	0.00	0.00	0.00	0.00
	121	0.00	1.02	0.00	0.00	0.00	0.00
	122	0.00	1.06	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00
	124	0.00	1.60	0.00	0.00	0.00	0.00
	125	0.00	1.60	0.00	0.00	0.00	0.00
	126	0.00	1.82	0.00	0.00	0.00	0.00
	127	0.00	1.85	0.00	0.00	0.00	0.00
106	100	0.00	0.90	0.00	0.00	0.00	0.00
	101	0.00	0.90	0.00	0.00	0.00	0.00
	102	0.00	0.98	0.00	0.00	0.00	0.00
	103	0.00	0.98	0.00	0.00	0.00	0.00
	104	0.00	0.79	0.00	0.00	0.00	0.00
	105	0.00	0.78	0.00	0.00	0.00	0.00
	106	0.00	0.83	0.00	0.00	0.00	0.00
	107	0.00	0.83	0.00	0.00	0.00	0.00
	108	0.00	0.93	0.00	0.00	0.00	0.00
	109	0.00	0.92	0.00	0.00	0.00	0.00
	110	0.00	0.97	0.00	0.00	0.00	0.00
	111	0.00	0.97	0.00	0.00	0.00	0.00
	112	0.00	0.90	0.00	0.00	0.00	0.00
	113	0.00	0.90	0.00	0.00	0.00	0.00
	114	0.00	0.95	0.00	0.00	0.00	0.00
	115	0.00	0.95	0.00	0.00	0.00	0.00
	116	0.00	0.91	0.00	0.00	0.00	0.00
	117	0.00	0.91	0.00	0.00	0.00	0.00
	118	0.00	0.96	0.00	0.00	0.00	0.00
	119	0.00	0.96	0.00	0.00	0.00	0.00
	120	0.00	0.35	0.00	0.00	0.00	0.00
	121	0.00	0.53	0.00	0.00	0.00	0.00
	122	0.00	0.50	0.00	0.00	0.00	0.00
	123	0.00	0.51	0.00	0.00	0.00	0.00
	124	0.00	0.80	0.00	0.00	0.00	0.00
	125	0.00	0.81	0.00	0.00	0.00	0.00
	126	0.00	0.92	0.00	0.00	0.00	0.00
	127	0.00	0.93	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
107	100	0.00	1.72	0.00	0.00	0.00	0.00
	101	0.00	1.71	0.00	0.00	0.00	0.00
	102	0.00	1.86	0.00	0.00	0.00	0.00
	103	0.00	1.86	0.00	0.00	0.00	0.00
	104	0.00	1.64	0.00	0.00	0.00	0.00
	105	0.00	1.63	0.00	0.00	0.00	0.00
	106	0.00	1.72	0.00	0.00	0.00	0.00
	107	0.00	1.73	0.00	0.00	0.00	0.00
	108	0.00	1.67	0.00	0.00	0.00	0.00
	109	0.00	1.67	0.00	0.00	0.00	0.00
	110	0.00	1.76	0.00	0.00	0.00	0.00
	111	0.00	1.76	0.00	0.00	0.00	0.00
	112	0.00	1.84	0.00	0.00	0.00	0.00
	113	0.00	1.84	0.00	0.00	0.00	0.00
	114	0.00	1.92	0.00	0.00	0.00	0.00
	115	0.00	1.93	0.00	0.00	0.00	0.00
	116	0.00	1.81	0.00	0.00	0.00	0.00
	117	0.00	1.81	0.00	0.00	0.00	0.00
	118	0.00	1.89	0.00	0.00	0.00	0.00
	119	0.00	1.90	0.00	0.00	0.00	0.00
	120	0.00	0.86	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	1.13	0.00	0.00	0.00	0.00
	123	0.00	1.09	0.00	0.00	0.00	0.00
	124	0.00	1.54	0.00	0.00	0.00	0.00
	125	0.00	1.54	0.00	0.00	0.00	0.00
	126	0.00	1.73	0.00	0.00	0.00	0.00
	127	0.00	1.76	0.00	0.00	0.00	0.00
108	100	0.00	1.73	0.00	0.00	0.00	0.00
	101	0.00	1.72	0.00	0.00	0.00	0.00
	102	0.00	1.87	0.00	0.00	0.00	0.00
	103	0.00	1.88	0.00	0.00	0.00	0.00
	104	0.00	1.61	0.00	0.00	0.00	0.00
	105	0.00	1.60	0.00	0.00	0.00	0.00
	106	0.00	1.69	0.00	0.00	0.00	0.00
	107	0.00	1.70	0.00	0.00	0.00	0.00
	108	0.00	1.72	0.00	0.00	0.00	0.00
	109	0.00	1.71	0.00	0.00	0.00	0.00
	110	0.00	1.80	0.00	0.00	0.00	0.00
	111	0.00	1.81	0.00	0.00	0.00	0.00
	112	0.00	1.81	0.00	0.00	0.00	0.00
	113	0.00	1.81	0.00	0.00	0.00	0.00
	114	0.00	1.90	0.00	0.00	0.00	0.00
	115	0.00	1.90	0.00	0.00	0.00	0.00
	116	0.00	1.80	0.00	0.00	0.00	0.00
	117	0.00	1.79	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.88	0.00	0.00	0.00	0.00
	119	0.00	1.89	0.00	0.00	0.00	0.00
	120	0.00	0.80	0.00	0.00	0.00	0.00
	121	0.00	0.95	0.00	0.00	0.00	0.00
	122	0.00	1.08	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00
	124	0.00	1.55	0.00	0.00	0.00	0.00
	125	0.00	1.55	0.00	0.00	0.00	0.00
	126	0.00	1.74	0.00	0.00	0.00	0.00
	127	0.00	1.77	0.00	0.00	0.00	0.00
109	100	0.00	1.74	0.00	0.00	0.00	0.00
	101	0.00	1.73	0.00	0.00	0.00	0.00
	102	0.00	1.89	0.00	0.00	0.00	0.00
	103	0.00	1.89	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.56	0.00	0.00	0.00	0.00
	106	0.00	1.66	0.00	0.00	0.00	0.00
	107	0.00	1.66	0.00	0.00	0.00	0.00
	108	0.00	1.76	0.00	0.00	0.00	0.00
	109	0.00	1.75	0.00	0.00	0.00	0.00
	110	0.00	1.85	0.00	0.00	0.00	0.00
	111	0.00	1.85	0.00	0.00	0.00	0.00
	112	0.00	1.78	0.00	0.00	0.00	0.00
	113	0.00	1.77	0.00	0.00	0.00	0.00
	114	0.00	1.87	0.00	0.00	0.00	0.00
	115	0.00	1.87	0.00	0.00	0.00	0.00
	116	0.00	1.79	0.00	0.00	0.00	0.00
	117	0.00	1.78	0.00	0.00	0.00	0.00
	118	0.00	1.87	0.00	0.00	0.00	0.00
	119	0.00	1.88	0.00	0.00	0.00	0.00
	120	0.00	0.75	0.00	0.00	0.00	0.00
	121	0.00	1.00	0.00	0.00	0.00	0.00
	122	0.00	1.03	0.00	0.00	0.00	0.00
	123	0.00	1.03	0.00	0.00	0.00	0.00
	124	0.00	1.56	0.00	0.00	0.00	0.00
	125	0.00	1.56	0.00	0.00	0.00	0.00
	126	0.00	1.75	0.00	0.00	0.00	0.00
	127	0.00	1.79	0.00	0.00	0.00	0.00
110	100	0.00	0.88	0.00	0.00	0.00	0.00
	101	0.00	0.87	0.00	0.00	0.00	0.00
	102	0.00	0.95	0.00	0.00	0.00	0.00
	103	0.00	0.95	0.00	0.00	0.00	0.00
	104	0.00	0.77	0.00	0.00	0.00	0.00
	105	0.00	0.76	0.00	0.00	0.00	0.00
	106	0.00	0.81	0.00	0.00	0.00	0.00
	107	0.00	0.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	0.90	0.00	0.00	0.00	0.00
	109	0.00	0.90	0.00	0.00	0.00	0.00
	110	0.00	0.95	0.00	0.00	0.00	0.00
	111	0.00	0.95	0.00	0.00	0.00	0.00
	112	0.00	0.88	0.00	0.00	0.00	0.00
	113	0.00	0.87	0.00	0.00	0.00	0.00
	114	0.00	0.92	0.00	0.00	0.00	0.00
	115	0.00	0.92	0.00	0.00	0.00	0.00
	116	0.00	0.89	0.00	0.00	0.00	0.00
	117	0.00	0.88	0.00	0.00	0.00	0.00
	118	0.00	0.93	0.00	0.00	0.00	0.00
	119	0.00	0.93	0.00	0.00	0.00	0.00
	120	0.00	0.35	0.00	0.00	0.00	0.00
	121	0.00	0.52	0.00	0.00	0.00	0.00
	122	0.00	0.49	0.00	0.00	0.00	0.00
	123	0.00	0.50	0.00	0.00	0.00	0.00
	124	0.00	0.78	0.00	0.00	0.00	0.00
	125	0.00	0.78	0.00	0.00	0.00	0.00
	126	0.00	0.88	0.00	0.00	0.00	0.00
	127	0.00	0.90	0.00	0.00	0.00	0.00
111	100	0.00	1.67	0.00	0.00	0.00	0.00
	101	0.00	1.67	0.00	0.00	0.00	0.00
	102	0.00	1.81	0.00	0.00	0.00	0.00
	103	0.00	1.82	0.00	0.00	0.00	0.00
	104	0.00	1.60	0.00	0.00	0.00	0.00
	105	0.00	1.60	0.00	0.00	0.00	0.00
	106	0.00	1.68	0.00	0.00	0.00	0.00
	107	0.00	1.69	0.00	0.00	0.00	0.00
	108	0.00	1.63	0.00	0.00	0.00	0.00
	109	0.00	1.62	0.00	0.00	0.00	0.00
	110	0.00	1.71	0.00	0.00	0.00	0.00
	111	0.00	1.72	0.00	0.00	0.00	0.00
	112	0.00	1.79	0.00	0.00	0.00	0.00
	113	0.00	1.79	0.00	0.00	0.00	0.00
	114	0.00	1.87	0.00	0.00	0.00	0.00
	115	0.00	1.88	0.00	0.00	0.00	0.00
	116	0.00	1.76	0.00	0.00	0.00	0.00
	117	0.00	1.76	0.00	0.00	0.00	0.00
	118	0.00	1.84	0.00	0.00	0.00	0.00
	119	0.00	1.85	0.00	0.00	0.00	0.00
	120	0.00	0.85	0.00	0.00	0.00	0.00
	121	0.00	0.88	0.00	0.00	0.00	0.00
	122	0.00	1.10	0.00	0.00	0.00	0.00
	123	0.00	1.06	0.00	0.00	0.00	0.00
	124	0.00	1.50	0.00	0.00	0.00	0.00
	125	0.00	1.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	1.66	0.00	0.00	0.00	0.00
	127	0.00	1.70	0.00	0.00	0.00	0.00
112	100	0.00	1.68	0.00	0.00	0.00	0.00
	101	0.00	1.68	0.00	0.00	0.00	0.00
	102	0.00	1.82	0.00	0.00	0.00	0.00
	103	0.00	1.83	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.56	0.00	0.00	0.00	0.00
	106	0.00	1.65	0.00	0.00	0.00	0.00
	107	0.00	1.66	0.00	0.00	0.00	0.00
	108	0.00	1.67	0.00	0.00	0.00	0.00
	109	0.00	1.66	0.00	0.00	0.00	0.00
	110	0.00	1.75	0.00	0.00	0.00	0.00
	111	0.00	1.76	0.00	0.00	0.00	0.00
	112	0.00	1.76	0.00	0.00	0.00	0.00
	113	0.00	1.76	0.00	0.00	0.00	0.00
	114	0.00	1.84	0.00	0.00	0.00	0.00
	115	0.00	1.85	0.00	0.00	0.00	0.00
	116	0.00	1.75	0.00	0.00	0.00	0.00
	117	0.00	1.74	0.00	0.00	0.00	0.00
	118	0.00	1.83	0.00	0.00	0.00	0.00
	119	0.00	1.84	0.00	0.00	0.00	0.00
	120	0.00	0.79	0.00	0.00	0.00	0.00
	121	0.00	0.92	0.00	0.00	0.00	0.00
	122	0.00	1.05	0.00	0.00	0.00	0.00
	123	0.00	1.03	0.00	0.00	0.00	0.00
	124	0.00	1.51	0.00	0.00	0.00	0.00
	125	0.00	1.51	0.00	0.00	0.00	0.00
	126	0.00	1.68	0.00	0.00	0.00	0.00
	127	0.00	1.71	0.00	0.00	0.00	0.00
113	100	0.00	1.69	0.00	0.00	0.00	0.00
	101	0.00	1.68	0.00	0.00	0.00	0.00
	102	0.00	1.84	0.00	0.00	0.00	0.00
	103	0.00	1.84	0.00	0.00	0.00	0.00
	104	0.00	1.53	0.00	0.00	0.00	0.00
	105	0.00	1.53	0.00	0.00	0.00	0.00
	106	0.00	1.62	0.00	0.00	0.00	0.00
	107	0.00	1.62	0.00	0.00	0.00	0.00
	108	0.00	1.71	0.00	0.00	0.00	0.00
	109	0.00	1.70	0.00	0.00	0.00	0.00
	110	0.00	1.79	0.00	0.00	0.00	0.00
	111	0.00	1.80	0.00	0.00	0.00	0.00
	112	0.00	1.73	0.00	0.00	0.00	0.00
	113	0.00	1.72	0.00	0.00	0.00	0.00
	114	0.00	1.81	0.00	0.00	0.00	0.00
	115	0.00	1.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	1.73	0.00	0.00	0.00	0.00
	117	0.00	1.72	0.00	0.00	0.00	0.00
	118	0.00	1.81	0.00	0.00	0.00	0.00
	119	0.00	1.82	0.00	0.00	0.00	0.00
	120	0.00	0.73	0.00	0.00	0.00	0.00
	121	0.00	0.97	0.00	0.00	0.00	0.00
	122	0.00	0.99	0.00	0.00	0.00	0.00
	123	0.00	1.00	0.00	0.00	0.00	0.00
	124	0.00	1.51	0.00	0.00	0.00	0.00
	125	0.00	1.51	0.00	0.00	0.00	0.00
	126	0.00	1.69	0.00	0.00	0.00	0.00
	127	0.00	1.72	0.00	0.00	0.00	0.00
114	100	0.00	0.85	0.00	0.00	0.00	0.00
	101	0.00	0.85	0.00	0.00	0.00	0.00
	102	0.00	0.92	0.00	0.00	0.00	0.00
	103	0.00	0.93	0.00	0.00	0.00	0.00
	104	0.00	0.75	0.00	0.00	0.00	0.00
	105	0.00	0.74	0.00	0.00	0.00	0.00
	106	0.00	0.79	0.00	0.00	0.00	0.00
	107	0.00	0.80	0.00	0.00	0.00	0.00
	108	0.00	0.88	0.00	0.00	0.00	0.00
	109	0.00	0.87	0.00	0.00	0.00	0.00
	110	0.00	0.92	0.00	0.00	0.00	0.00
	111	0.00	0.92	0.00	0.00	0.00	0.00
	112	0.00	0.85	0.00	0.00	0.00	0.00
	113	0.00	0.84	0.00	0.00	0.00	0.00
	114	0.00	0.89	0.00	0.00	0.00	0.00
	115	0.00	0.89	0.00	0.00	0.00	0.00
	116	0.00	0.86	0.00	0.00	0.00	0.00
	117	0.00	0.85	0.00	0.00	0.00	0.00
	118	0.00	0.90	0.00	0.00	0.00	0.00
	119	0.00	0.90	0.00	0.00	0.00	0.00
	120	0.00	0.34	0.00	0.00	0.00	0.00
	121	0.00	0.51	0.00	0.00	0.00	0.00
	122	0.00	0.47	0.00	0.00	0.00	0.00
	123	0.00	0.48	0.00	0.00	0.00	0.00
	124	0.00	0.76	0.00	0.00	0.00	0.00
	125	0.00	0.76	0.00	0.00	0.00	0.00
	126	0.00	0.85	0.00	0.00	0.00	0.00
	127	0.00	0.86	0.00	0.00	0.00	0.00
115	100	0.00	1.62	0.00	0.00	0.00	0.00
	101	0.00	1.62	0.00	0.00	0.00	0.00
	102	0.00	1.76	0.00	0.00	0.00	0.00
	103	0.00	1.77	0.00	0.00	0.00	0.00
	104	0.00	1.57	0.00	0.00	0.00	0.00
	105	0.00	1.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	1.64	0.00	0.00	0.00	0.00
	107	0.00	1.66	0.00	0.00	0.00	0.00
	108	0.00	1.58	0.00	0.00	0.00	0.00
	109	0.00	1.58	0.00	0.00	0.00	0.00
	110	0.00	1.66	0.00	0.00	0.00	0.00
	111	0.00	1.67	0.00	0.00	0.00	0.00
	112	0.00	1.74	0.00	0.00	0.00	0.00
	113	0.00	1.74	0.00	0.00	0.00	0.00
	114	0.00	1.82	0.00	0.00	0.00	0.00
	115	0.00	1.83	0.00	0.00	0.00	0.00
	116	0.00	1.71	0.00	0.00	0.00	0.00
	117	0.00	1.71	0.00	0.00	0.00	0.00
	118	0.00	1.79	0.00	0.00	0.00	0.00
	119	0.00	1.80	0.00	0.00	0.00	0.00
	120	0.00	0.84	0.00	0.00	0.00	0.00
	121	0.00	0.85	0.00	0.00	0.00	0.00
	122	0.00	1.07	0.00	0.00	0.00	0.00
	123	0.00	1.03	0.00	0.00	0.00	0.00
	124	0.00	1.46	0.00	0.00	0.00	0.00
	125	0.00	1.46	0.00	0.00	0.00	0.00
	126	0.00	1.60	0.00	0.00	0.00	0.00
	127	0.00	1.63	0.00	0.00	0.00	0.00
116	100	0.00	1.63	0.00	0.00	0.00	0.00
	101	0.00	1.62	0.00	0.00	0.00	0.00
	102	0.00	1.77	0.00	0.00	0.00	0.00
	103	0.00	1.78	0.00	0.00	0.00	0.00
	104	0.00	1.53	0.00	0.00	0.00	0.00
	105	0.00	1.52	0.00	0.00	0.00	0.00
	106	0.00	1.61	0.00	0.00	0.00	0.00
	107	0.00	1.62	0.00	0.00	0.00	0.00
	108	0.00	1.62	0.00	0.00	0.00	0.00
	109	0.00	1.61	0.00	0.00	0.00	0.00
	110	0.00	1.70	0.00	0.00	0.00	0.00
	111	0.00	1.71	0.00	0.00	0.00	0.00
	112	0.00	1.71	0.00	0.00	0.00	0.00
	113	0.00	1.70	0.00	0.00	0.00	0.00
	114	0.00	1.78	0.00	0.00	0.00	0.00
	115	0.00	1.79	0.00	0.00	0.00	0.00
	116	0.00	1.69	0.00	0.00	0.00	0.00
	117	0.00	1.69	0.00	0.00	0.00	0.00
	118	0.00	1.77	0.00	0.00	0.00	0.00
	119	0.00	1.78	0.00	0.00	0.00	0.00
	120	0.00	0.78	0.00	0.00	0.00	0.00
	121	0.00	0.90	0.00	0.00	0.00	0.00
	122	0.00	1.01	0.00	0.00	0.00	0.00
	123	0.00	1.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	1.46	0.00	0.00	0.00	0.00
	125	0.00	1.46	0.00	0.00	0.00	0.00
	126	0.00	1.61	0.00	0.00	0.00	0.00
	127	0.00	1.64	0.00	0.00	0.00	0.00
117	100	0.00	1.64	0.00	0.00	0.00	0.00
	101	0.00	1.63	0.00	0.00	0.00	0.00
	102	0.00	1.78	0.00	0.00	0.00	0.00
	103	0.00	1.79	0.00	0.00	0.00	0.00
	104	0.00	1.49	0.00	0.00	0.00	0.00
	105	0.00	1.48	0.00	0.00	0.00	0.00
	106	0.00	1.57	0.00	0.00	0.00	0.00
	107	0.00	1.58	0.00	0.00	0.00	0.00
	108	0.00	1.66	0.00	0.00	0.00	0.00
	109	0.00	1.65	0.00	0.00	0.00	0.00
	110	0.00	1.74	0.00	0.00	0.00	0.00
	111	0.00	1.75	0.00	0.00	0.00	0.00
	112	0.00	1.67	0.00	0.00	0.00	0.00
	113	0.00	1.66	0.00	0.00	0.00	0.00
	114	0.00	1.75	0.00	0.00	0.00	0.00
	115	0.00	1.76	0.00	0.00	0.00	0.00
	116	0.00	1.67	0.00	0.00	0.00	0.00
	117	0.00	1.67	0.00	0.00	0.00	0.00
	118	0.00	1.75	0.00	0.00	0.00	0.00
	119	0.00	1.76	0.00	0.00	0.00	0.00
	120	0.00	0.72	0.00	0.00	0.00	0.00
	121	0.00	0.94	0.00	0.00	0.00	0.00
	122	0.00	0.96	0.00	0.00	0.00	0.00
	123	0.00	0.96	0.00	0.00	0.00	0.00
	124	0.00	1.47	0.00	0.00	0.00	0.00
	125	0.00	1.47	0.00	0.00	0.00	0.00
	126	0.00	1.62	0.00	0.00	0.00	0.00
	127	0.00	1.65	0.00	0.00	0.00	0.00
118	100	0.00	0.83	0.00	0.00	0.00	0.00
	101	0.00	0.82	0.00	0.00	0.00	0.00
	102	0.00	0.89	0.00	0.00	0.00	0.00
	103	0.00	0.90	0.00	0.00	0.00	0.00
	104	0.00	0.73	0.00	0.00	0.00	0.00
	105	0.00	0.72	0.00	0.00	0.00	0.00
	106	0.00	0.77	0.00	0.00	0.00	0.00
	107	0.00	0.77	0.00	0.00	0.00	0.00
	108	0.00	0.85	0.00	0.00	0.00	0.00
	109	0.00	0.84	0.00	0.00	0.00	0.00
	110	0.00	0.89	0.00	0.00	0.00	0.00
	111	0.00	0.89	0.00	0.00	0.00	0.00
	112	0.00	0.82	0.00	0.00	0.00	0.00
	113	0.00	0.81	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	0.86	0.00	0.00	0.00	0.00
	115	0.00	0.86	0.00	0.00	0.00	0.00
	116	0.00	0.83	0.00	0.00	0.00	0.00
	117	0.00	0.82	0.00	0.00	0.00	0.00
	118	0.00	0.87	0.00	0.00	0.00	0.00
	119	0.00	0.87	0.00	0.00	0.00	0.00
	120	0.00	0.33	0.00	0.00	0.00	0.00
	121	0.00	0.49	0.00	0.00	0.00	0.00
	122	0.00	0.45	0.00	0.00	0.00	0.00
	123	0.00	0.47	0.00	0.00	0.00	0.00
	124	0.00	0.74	0.00	0.00	0.00	0.00
	125	0.00	0.74	0.00	0.00	0.00	0.00
	126	0.00	0.81	0.00	0.00	0.00	0.00
	127	0.00	0.83	0.00	0.00	0.00	0.00
119	100	0.00	1.08	0.00	0.00	0.00	0.00
	101	0.00	1.09	0.00	0.00	0.00	0.00
	102	0.00	1.15	0.00	0.00	0.00	0.00
	103	0.00	1.17	0.00	0.00	0.00	0.00
	104	0.00	1.26	0.00	0.00	0.00	0.00
	105	0.00	1.27	0.00	0.00	0.00	0.00
	106	0.00	1.30	0.00	0.00	0.00	0.00
	107	0.00	1.32	0.00	0.00	0.00	0.00
	108	0.00	0.93	0.00	0.00	0.00	0.00
	109	0.00	0.93	0.00	0.00	0.00	0.00
	110	0.00	0.96	0.00	0.00	0.00	0.00
	111	0.00	0.99	0.00	0.00	0.00	0.00
	112	0.00	1.30	0.00	0.00	0.00	0.00
	113	0.00	1.31	0.00	0.00	0.00	0.00
	114	0.00	1.34	0.00	0.00	0.00	0.00
	115	0.00	1.36	0.00	0.00	0.00	0.00
	116	0.00	1.22	0.00	0.00	0.00	0.00
	117	0.00	1.23	0.00	0.00	0.00	0.00
	118	0.00	1.26	0.00	0.00	0.00	0.00
	119	0.00	1.28	0.00	0.00	0.00	0.00
	120	0.00	0.88	0.00	0.00	0.00	0.00
	121	0.00	0.43	0.00	0.00	0.00	0.00
	122	0.00	0.94	0.00	0.00	0.00	0.00
	123	0.00	0.83	0.00	0.00	0.00	0.00
	124	0.00	1.00	0.00	0.00	0.00	0.00
	125	0.00	0.99	0.00	0.00	0.00	0.00
	126	0.00	0.96	0.00	0.00	0.00	0.00
	127	0.00	1.00	0.00	0.00	0.00	0.00
120	100	0.00	0.53	0.00	0.00	0.00	0.00
	101	0.00	0.53	0.00	0.00	0.00	0.00
	102	0.00	0.56	0.00	0.00	0.00	0.00
	103	0.00	0.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	0.64	0.00	0.00	0.00	0.00
	105	0.00	0.65	0.00	0.00	0.00	0.00
	106	0.00	0.66	0.00	0.00	0.00	0.00
	107	0.00	0.67	0.00	0.00	0.00	0.00
	108	0.00	0.44	0.00	0.00	0.00	0.00
	109	0.00	0.44	0.00	0.00	0.00	0.00
	110	0.00	0.46	0.00	0.00	0.00	0.00
	111	0.00	0.47	0.00	0.00	0.00	0.00
	112	0.00	0.66	0.00	0.00	0.00	0.00
	113	0.00	0.67	0.00	0.00	0.00	0.00
	114	0.00	0.68	0.00	0.00	0.00	0.00
	115	0.00	0.69	0.00	0.00	0.00	0.00
	116	0.00	0.61	0.00	0.00	0.00	0.00
	117	0.00	0.62	0.00	0.00	0.00	0.00
	118	0.00	0.63	0.00	0.00	0.00	0.00
	119	0.00	0.64	0.00	0.00	0.00	0.00
	120	0.00	0.46	0.00	0.00	0.00	0.00
	121	0.00	0.19	0.00	0.00	0.00	0.00
	122	0.00	0.49	0.00	0.00	0.00	0.00
	123	0.00	0.42	0.00	0.00	0.00	0.00
	124	0.00	0.49	0.00	0.00	0.00	0.00
	125	0.00	0.49	0.00	0.00	0.00	0.00
	126	0.00	0.47	0.00	0.00	0.00	0.00
	127	0.00	0.49	0.00	0.00	0.00	0.00
121	100	0.00	1.10	0.00	0.00	0.00	0.00
	101	0.00	1.11	0.00	0.00	0.00	0.00
	102	0.00	1.17	0.00	0.00	0.00	0.00
	103	0.00	1.19	0.00	0.00	0.00	0.00
	104	0.00	1.24	0.00	0.00	0.00	0.00
	105	0.00	1.24	0.00	0.00	0.00	0.00
	106	0.00	1.28	0.00	0.00	0.00	0.00
	107	0.00	1.30	0.00	0.00	0.00	0.00
	108	0.00	0.98	0.00	0.00	0.00	0.00
	109	0.00	0.98	0.00	0.00	0.00	0.00
	110	0.00	1.02	0.00	0.00	0.00	0.00
	111	0.00	1.04	0.00	0.00	0.00	0.00
	112	0.00	1.28	0.00	0.00	0.00	0.00
	113	0.00	1.29	0.00	0.00	0.00	0.00
	114	0.00	1.32	0.00	0.00	0.00	0.00
	115	0.00	1.35	0.00	0.00	0.00	0.00
	116	0.00	1.22	0.00	0.00	0.00	0.00
	117	0.00	1.22	0.00	0.00	0.00	0.00
	118	0.00	1.26	0.00	0.00	0.00	0.00
	119	0.00	1.28	0.00	0.00	0.00	0.00
	120	0.00	0.83	0.00	0.00	0.00	0.00
	121	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	0.89	0.00	0.00	0.00	0.00
	123	0.00	0.80	0.00	0.00	0.00	0.00
	124	0.00	1.01	0.00	0.00	0.00	0.00
	125	0.00	1.01	0.00	0.00	0.00	0.00
	126	0.00	0.98	0.00	0.00	0.00	0.00
	127	0.00	1.02	0.00	0.00	0.00	0.00
122	100	0.00	1.12	0.00	0.00	0.00	0.00
	101	0.00	1.13	0.00	0.00	0.00	0.00
	102	0.00	1.20	0.00	0.00	0.00	0.00
	103	0.00	1.22	0.00	0.00	0.00	0.00
	104	0.00	1.21	0.00	0.00	0.00	0.00
	105	0.00	1.22	0.00	0.00	0.00	0.00
	106	0.00	1.26	0.00	0.00	0.00	0.00
	107	0.00	1.28	0.00	0.00	0.00	0.00
	108	0.00	1.03	0.00	0.00	0.00	0.00
	109	0.00	1.03	0.00	0.00	0.00	0.00
	110	0.00	1.07	0.00	0.00	0.00	0.00
	111	0.00	1.09	0.00	0.00	0.00	0.00
	112	0.00	1.27	0.00	0.00	0.00	0.00
	113	0.00	1.27	0.00	0.00	0.00	0.00
	114	0.00	1.31	0.00	0.00	0.00	0.00
	115	0.00	1.33	0.00	0.00	0.00	0.00
	116	0.00	1.21	0.00	0.00	0.00	0.00
	117	0.00	1.22	0.00	0.00	0.00	0.00
	118	0.00	1.26	0.00	0.00	0.00	0.00
	119	0.00	1.28	0.00	0.00	0.00	0.00
	120	0.00	0.78	0.00	0.00	0.00	0.00
	121	0.00	0.53	0.00	0.00	0.00	0.00
	122	0.00	0.85	0.00	0.00	0.00	0.00
	123	0.00	0.78	0.00	0.00	0.00	0.00
	124	0.00	1.03	0.00	0.00	0.00	0.00
	125	0.00	1.02	0.00	0.00	0.00	0.00
	126	0.00	1.00	0.00	0.00	0.00	0.00
	127	0.00	1.04	0.00	0.00	0.00	0.00
123	100	0.00	1.14	0.00	0.00	0.00	0.00
	101	0.00	1.14	0.00	0.00	0.00	0.00
	102	0.00	1.22	0.00	0.00	0.00	0.00
	103	0.00	1.24	0.00	0.00	0.00	0.00
	104	0.00	1.19	0.00	0.00	0.00	0.00
	105	0.00	1.19	0.00	0.00	0.00	0.00
	106	0.00	1.23	0.00	0.00	0.00	0.00
	107	0.00	1.25	0.00	0.00	0.00	0.00
	108	0.00	1.08	0.00	0.00	0.00	0.00
	109	0.00	1.08	0.00	0.00	0.00	0.00
	110	0.00	1.12	0.00	0.00	0.00	0.00
	111	0.00	1.14	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	1.25	0.00	0.00	0.00	0.00
	113	0.00	1.25	0.00	0.00	0.00	0.00
	114	0.00	1.29	0.00	0.00	0.00	0.00
	115	0.00	1.31	0.00	0.00	0.00	0.00
	116	0.00	1.21	0.00	0.00	0.00	0.00
	117	0.00	1.21	0.00	0.00	0.00	0.00
	118	0.00	1.25	0.00	0.00	0.00	0.00
	119	0.00	1.27	0.00	0.00	0.00	0.00
	120	0.00	0.73	0.00	0.00	0.00	0.00
	121	0.00	0.58	0.00	0.00	0.00	0.00
	122	0.00	0.80	0.00	0.00	0.00	0.00
	123	0.00	0.76	0.00	0.00	0.00	0.00
	124	0.00	1.04	0.00	0.00	0.00	0.00
	125	0.00	1.04	0.00	0.00	0.00	0.00
	126	0.00	1.02	0.00	0.00	0.00	0.00
	127	0.00	1.05	0.00	0.00	0.00	0.00
124	100	0.00	1.16	0.00	0.00	0.00	0.00
	101	0.00	1.16	0.00	0.00	0.00	0.00
	102	0.00	1.24	0.00	0.00	0.00	0.00
	103	0.00	1.26	0.00	0.00	0.00	0.00
	104	0.00	1.16	0.00	0.00	0.00	0.00
	105	0.00	1.16	0.00	0.00	0.00	0.00
	106	0.00	1.21	0.00	0.00	0.00	0.00
	107	0.00	1.23	0.00	0.00	0.00	0.00
	108	0.00	1.12	0.00	0.00	0.00	0.00
	109	0.00	1.12	0.00	0.00	0.00	0.00
	110	0.00	1.17	0.00	0.00	0.00	0.00
	111	0.00	1.19	0.00	0.00	0.00	0.00
	112	0.00	1.22	0.00	0.00	0.00	0.00
	113	0.00	1.22	0.00	0.00	0.00	0.00
	114	0.00	1.27	0.00	0.00	0.00	0.00
	115	0.00	1.29	0.00	0.00	0.00	0.00
	116	0.00	1.20	0.00	0.00	0.00	0.00
	117	0.00	1.20	0.00	0.00	0.00	0.00
	118	0.00	1.25	0.00	0.00	0.00	0.00
	119	0.00	1.27	0.00	0.00	0.00	0.00
	120	0.00	0.68	0.00	0.00	0.00	0.00
	121	0.00	0.62	0.00	0.00	0.00	0.00
	122	0.00	0.76	0.00	0.00	0.00	0.00
	123	0.00	0.73	0.00	0.00	0.00	0.00
	124	0.00	1.06	0.00	0.00	0.00	0.00
	125	0.00	1.05	0.00	0.00	0.00	0.00
	126	0.00	1.04	0.00	0.00	0.00	0.00
	127	0.00	1.07	0.00	0.00	0.00	0.00
125	100	0.00	1.18	0.00	0.00	0.00	0.00
	101	0.00	1.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	1.26	0.00	0.00	0.00	0.00
	103	0.00	1.28	0.00	0.00	0.00	0.00
	104	0.00	1.14	0.00	0.00	0.00	0.00
	105	0.00	1.14	0.00	0.00	0.00	0.00
	106	0.00	1.19	0.00	0.00	0.00	0.00
	107	0.00	1.20	0.00	0.00	0.00	0.00
	108	0.00	1.17	0.00	0.00	0.00	0.00
	109	0.00	1.17	0.00	0.00	0.00	0.00
	110	0.00	1.22	0.00	0.00	0.00	0.00
	111	0.00	1.24	0.00	0.00	0.00	0.00
	112	0.00	1.20	0.00	0.00	0.00	0.00
	113	0.00	1.20	0.00	0.00	0.00	0.00
	114	0.00	1.25	0.00	0.00	0.00	0.00
	115	0.00	1.27	0.00	0.00	0.00	0.00
	116	0.00	1.20	0.00	0.00	0.00	0.00
	117	0.00	1.19	0.00	0.00	0.00	0.00
	118	0.00	1.24	0.00	0.00	0.00	0.00
	119	0.00	1.26	0.00	0.00	0.00	0.00
	120	0.00	0.63	0.00	0.00	0.00	0.00
	121	0.00	0.67	0.00	0.00	0.00	0.00
	122	0.00	0.71	0.00	0.00	0.00	0.00
	123	0.00	0.71	0.00	0.00	0.00	0.00
	124	0.00	1.07	0.00	0.00	0.00	0.00
	125	0.00	1.06	0.00	0.00	0.00	0.00
	126	0.00	1.06	0.00	0.00	0.00	0.00
	127	0.00	1.09	0.00	0.00	0.00	0.00
126	100	0.00	1.20	0.00	0.00	0.00	0.00
	101	0.00	1.19	0.00	0.00	0.00	0.00
	102	0.00	1.28	0.00	0.00	0.00	0.00
	103	0.00	1.30	0.00	0.00	0.00	0.00
	104	0.00	1.11	0.00	0.00	0.00	0.00
	105	0.00	1.11	0.00	0.00	0.00	0.00
	106	0.00	1.16	0.00	0.00	0.00	0.00
	107	0.00	1.18	0.00	0.00	0.00	0.00
	108	0.00	1.22	0.00	0.00	0.00	0.00
	109	0.00	1.21	0.00	0.00	0.00	0.00
	110	0.00	1.27	0.00	0.00	0.00	0.00
	111	0.00	1.28	0.00	0.00	0.00	0.00
	112	0.00	1.18	0.00	0.00	0.00	0.00
	113	0.00	1.17	0.00	0.00	0.00	0.00
	114	0.00	1.23	0.00	0.00	0.00	0.00
	115	0.00	1.24	0.00	0.00	0.00	0.00
	116	0.00	1.19	0.00	0.00	0.00	0.00
	117	0.00	1.18	0.00	0.00	0.00	0.00
	118	0.00	1.24	0.00	0.00	0.00	0.00
	119	0.00	1.25	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.58	0.00	0.00	0.00	0.00
	121	0.00	0.72	0.00	0.00	0.00	0.00
	122	0.00	0.67	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	1.08	0.00	0.00	0.00	0.00
	125	0.00	1.08	0.00	0.00	0.00	0.00
	126	0.00	1.08	0.00	0.00	0.00	0.00
	127	0.00	1.10	0.00	0.00	0.00	0.00
127	100	0.00	0.61	0.00	0.00	0.00	0.00
	101	0.00	0.60	0.00	0.00	0.00	0.00
	102	0.00	0.65	0.00	0.00	0.00	0.00
	103	0.00	0.66	0.00	0.00	0.00	0.00
	104	0.00	0.54	0.00	0.00	0.00	0.00
	105	0.00	0.54	0.00	0.00	0.00	0.00
	106	0.00	0.57	0.00	0.00	0.00	0.00
	107	0.00	0.57	0.00	0.00	0.00	0.00
	108	0.00	0.63	0.00	0.00	0.00	0.00
	109	0.00	0.63	0.00	0.00	0.00	0.00
	110	0.00	0.66	0.00	0.00	0.00	0.00
	111	0.00	0.67	0.00	0.00	0.00	0.00
	112	0.00	0.58	0.00	0.00	0.00	0.00
	113	0.00	0.57	0.00	0.00	0.00	0.00
	114	0.00	0.60	0.00	0.00	0.00	0.00
	115	0.00	0.61	0.00	0.00	0.00	0.00
	116	0.00	0.59	0.00	0.00	0.00	0.00
	117	0.00	0.59	0.00	0.00	0.00	0.00
	118	0.00	0.62	0.00	0.00	0.00	0.00
	119	0.00	0.62	0.00	0.00	0.00	0.00
	120	0.00	0.26	0.00	0.00	0.00	0.00
	121	0.00	0.38	0.00	0.00	0.00	0.00
	122	0.00	0.31	0.00	0.00	0.00	0.00
	123	0.00	0.33	0.00	0.00	0.00	0.00
	124	0.00	0.55	0.00	0.00	0.00	0.00
	125	0.00	0.54	0.00	0.00	0.00	0.00
	126	0.00	0.55	0.00	0.00	0.00	0.00
	127	0.00	0.56	0.00	0.00	0.00	0.00
128	100	0.00	1.00	0.00	0.00	0.00	0.00
	101	0.00	1.01	0.00	0.00	0.00	0.00
	102	0.00	1.06	0.00	0.00	0.00	0.00
	103	0.00	1.08	0.00	0.00	0.00	0.00
	104	0.00	1.19	0.00	0.00	0.00	0.00
	105	0.00	1.20	0.00	0.00	0.00	0.00
	106	0.00	1.22	0.00	0.00	0.00	0.00
	107	0.00	1.24	0.00	0.00	0.00	0.00
	108	0.00	0.85	0.00	0.00	0.00	0.00
	109	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	0.88	0.00	0.00	0.00	0.00
	111	0.00	0.90	0.00	0.00	0.00	0.00
	112	0.00	1.21	0.00	0.00	0.00	0.00
	113	0.00	1.22	0.00	0.00	0.00	0.00
	114	0.00	1.24	0.00	0.00	0.00	0.00
	115	0.00	1.26	0.00	0.00	0.00	0.00
	116	0.00	1.13	0.00	0.00	0.00	0.00
	117	0.00	1.14	0.00	0.00	0.00	0.00
	118	0.00	1.16	0.00	0.00	0.00	0.00
	119	0.00	1.19	0.00	0.00	0.00	0.00
	120	0.00	0.85	0.00	0.00	0.00	0.00
	121	0.00	0.40	0.00	0.00	0.00	0.00
	122	0.00	0.88	0.00	0.00	0.00	0.00
	123	0.00	0.77	0.00	0.00	0.00	0.00
	124	0.00	0.93	0.00	0.00	0.00	0.00
	125	0.00	0.92	0.00	0.00	0.00	0.00
	126	0.00	0.87	0.00	0.00	0.00	0.00
	127	0.00	0.90	0.00	0.00	0.00	0.00
129	100	0.00	0.49	0.00	0.00	0.00	0.00
	101	0.00	0.49	0.00	0.00	0.00	0.00
	102	0.00	0.52	0.00	0.00	0.00	0.00
	103	0.00	0.53	0.00	0.00	0.00	0.00
	104	0.00	0.61	0.00	0.00	0.00	0.00
	105	0.00	0.61	0.00	0.00	0.00	0.00
	106	0.00	0.62	0.00	0.00	0.00	0.00
	107	0.00	0.63	0.00	0.00	0.00	0.00
	108	0.00	0.40	0.00	0.00	0.00	0.00
	109	0.00	0.40	0.00	0.00	0.00	0.00
	110	0.00	0.41	0.00	0.00	0.00	0.00
	111	0.00	0.43	0.00	0.00	0.00	0.00
	112	0.00	0.61	0.00	0.00	0.00	0.00
	113	0.00	0.62	0.00	0.00	0.00	0.00
	114	0.00	0.63	0.00	0.00	0.00	0.00
	115	0.00	0.64	0.00	0.00	0.00	0.00
	116	0.00	0.57	0.00	0.00	0.00	0.00
	117	0.00	0.57	0.00	0.00	0.00	0.00
	118	0.00	0.58	0.00	0.00	0.00	0.00
	119	0.00	0.59	0.00	0.00	0.00	0.00
	120	0.00	0.45	0.00	0.00	0.00	0.00
	121	0.00	0.17	0.00	0.00	0.00	0.00
	122	0.00	0.46	0.00	0.00	0.00	0.00
	123	0.00	0.40	0.00	0.00	0.00	0.00
	124	0.00	0.46	0.00	0.00	0.00	0.00
	125	0.00	0.45	0.00	0.00	0.00	0.00
	126	0.00	0.42	0.00	0.00	0.00	0.00
	127	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
130	100	0.00	1.02	0.00	0.00	0.00	0.00
	101	0.00	1.03	0.00	0.00	0.00	0.00
	102	0.00	1.08	0.00	0.00	0.00	0.00
	103	0.00	1.10	0.00	0.00	0.00	0.00
	104	0.00	1.16	0.00	0.00	0.00	0.00
	105	0.00	1.17	0.00	0.00	0.00	0.00
	106	0.00	1.20	0.00	0.00	0.00	0.00
	107	0.00	1.22	0.00	0.00	0.00	0.00
	108	0.00	0.90	0.00	0.00	0.00	0.00
	109	0.00	0.91	0.00	0.00	0.00	0.00
	110	0.00	0.93	0.00	0.00	0.00	0.00
	111	0.00	0.96	0.00	0.00	0.00	0.00
	112	0.00	1.19	0.00	0.00	0.00	0.00
	113	0.00	1.20	0.00	0.00	0.00	0.00
	114	0.00	1.22	0.00	0.00	0.00	0.00
	115	0.00	1.25	0.00	0.00	0.00	0.00
	116	0.00	1.13	0.00	0.00	0.00	0.00
	117	0.00	1.13	0.00	0.00	0.00	0.00
	118	0.00	1.16	0.00	0.00	0.00	0.00
	119	0.00	1.18	0.00	0.00	0.00	0.00
	120	0.00	0.80	0.00	0.00	0.00	0.00
	121	0.00	0.45	0.00	0.00	0.00	0.00
	122	0.00	0.84	0.00	0.00	0.00	0.00
	123	0.00	0.75	0.00	0.00	0.00	0.00
	124	0.00	0.94	0.00	0.00	0.00	0.00
	125	0.00	0.94	0.00	0.00	0.00	0.00
	126	0.00	0.89	0.00	0.00	0.00	0.00
	127	0.00	0.92	0.00	0.00	0.00	0.00
131	100	0.00	1.04	0.00	0.00	0.00	0.00
	101	0.00	1.04	0.00	0.00	0.00	0.00
	102	0.00	1.10	0.00	0.00	0.00	0.00
	103	0.00	1.13	0.00	0.00	0.00	0.00
	104	0.00	1.14	0.00	0.00	0.00	0.00
	105	0.00	1.15	0.00	0.00	0.00	0.00
	106	0.00	1.18	0.00	0.00	0.00	0.00
	107	0.00	1.20	0.00	0.00	0.00	0.00
	108	0.00	0.95	0.00	0.00	0.00	0.00
	109	0.00	0.95	0.00	0.00	0.00	0.00
	110	0.00	0.98	0.00	0.00	0.00	0.00
	111	0.00	1.01	0.00	0.00	0.00	0.00
	112	0.00	1.17	0.00	0.00	0.00	0.00
	113	0.00	1.18	0.00	0.00	0.00	0.00
	114	0.00	1.21	0.00	0.00	0.00	0.00
	115	0.00	1.23	0.00	0.00	0.00	0.00
	116	0.00	1.12	0.00	0.00	0.00	0.00
	117	0.00	1.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	1.16	0.00	0.00	0.00	0.00
	119	0.00	1.18	0.00	0.00	0.00	0.00
	120	0.00	0.75	0.00	0.00	0.00	0.00
	121	0.00	0.49	0.00	0.00	0.00	0.00
	122	0.00	0.79	0.00	0.00	0.00	0.00
	123	0.00	0.73	0.00	0.00	0.00	0.00
	124	0.00	0.96	0.00	0.00	0.00	0.00
	125	0.00	0.95	0.00	0.00	0.00	0.00
	126	0.00	0.91	0.00	0.00	0.00	0.00
	127	0.00	0.94	0.00	0.00	0.00	0.00
132	100	0.00	1.06	0.00	0.00	0.00	0.00
	101	0.00	1.06	0.00	0.00	0.00	0.00
	102	0.00	1.13	0.00	0.00	0.00	0.00
	103	0.00	1.15	0.00	0.00	0.00	0.00
	104	0.00	1.12	0.00	0.00	0.00	0.00
	105	0.00	1.12	0.00	0.00	0.00	0.00
	106	0.00	1.15	0.00	0.00	0.00	0.00
	107	0.00	1.18	0.00	0.00	0.00	0.00
	108	0.00	1.00	0.00	0.00	0.00	0.00
	109	0.00	1.00	0.00	0.00	0.00	0.00
	110	0.00	1.03	0.00	0.00	0.00	0.00
	111	0.00	1.06	0.00	0.00	0.00	0.00
	112	0.00	1.15	0.00	0.00	0.00	0.00
	113	0.00	1.15	0.00	0.00	0.00	0.00
	114	0.00	1.19	0.00	0.00	0.00	0.00
	115	0.00	1.21	0.00	0.00	0.00	0.00
	116	0.00	1.12	0.00	0.00	0.00	0.00
	117	0.00	1.12	0.00	0.00	0.00	0.00
	118	0.00	1.16	0.00	0.00	0.00	0.00
	119	0.00	1.18	0.00	0.00	0.00	0.00
	120	0.00	0.70	0.00	0.00	0.00	0.00
	121	0.00	0.54	0.00	0.00	0.00	0.00
	122	0.00	0.75	0.00	0.00	0.00	0.00
	123	0.00	0.70	0.00	0.00	0.00	0.00
	124	0.00	0.97	0.00	0.00	0.00	0.00
	125	0.00	0.97	0.00	0.00	0.00	0.00
	126	0.00	0.93	0.00	0.00	0.00	0.00
	127	0.00	0.96	0.00	0.00	0.00	0.00
133	100	0.00	1.08	0.00	0.00	0.00	0.00
	101	0.00	1.08	0.00	0.00	0.00	0.00
	102	0.00	1.15	0.00	0.00	0.00	0.00
	103	0.00	1.17	0.00	0.00	0.00	0.00
	104	0.00	1.09	0.00	0.00	0.00	0.00
	105	0.00	1.09	0.00	0.00	0.00	0.00
	106	0.00	1.13	0.00	0.00	0.00	0.00
	107	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	108	0.00	1.05	0.00	0.00	0.00	0.00
	109	0.00	1.04	0.00	0.00	0.00	0.00
	110	0.00	1.08	0.00	0.00	0.00	0.00
	111	0.00	1.10	0.00	0.00	0.00	0.00
	112	0.00	1.13	0.00	0.00	0.00	0.00
	113	0.00	1.13	0.00	0.00	0.00	0.00
	114	0.00	1.17	0.00	0.00	0.00	0.00
	115	0.00	1.19	0.00	0.00	0.00	0.00
	116	0.00	1.11	0.00	0.00	0.00	0.00
	117	0.00	1.11	0.00	0.00	0.00	0.00
	118	0.00	1.15	0.00	0.00	0.00	0.00
	119	0.00	1.17	0.00	0.00	0.00	0.00
	120	0.00	0.65	0.00	0.00	0.00	0.00
	121	0.00	0.59	0.00	0.00	0.00	0.00
	122	0.00	0.70	0.00	0.00	0.00	0.00
	123	0.00	0.68	0.00	0.00	0.00	0.00
	124	0.00	0.99	0.00	0.00	0.00	0.00
	125	0.00	0.98	0.00	0.00	0.00	0.00
	126	0.00	0.95	0.00	0.00	0.00	0.00
	127	0.00	0.98	0.00	0.00	0.00	0.00
134	100	0.00	1.10	0.00	0.00	0.00	0.00
	101	0.00	1.09	0.00	0.00	0.00	0.00
	102	0.00	1.17	0.00	0.00	0.00	0.00
	103	0.00	1.19	0.00	0.00	0.00	0.00
	104	0.00	1.07	0.00	0.00	0.00	0.00
	105	0.00	1.06	0.00	0.00	0.00	0.00
	106	0.00	1.11	0.00	0.00	0.00	0.00
	107	0.00	1.12	0.00	0.00	0.00	0.00
	108	0.00	1.09	0.00	0.00	0.00	0.00
	109	0.00	1.09	0.00	0.00	0.00	0.00
	110	0.00	1.13	0.00	0.00	0.00	0.00
	111	0.00	1.15	0.00	0.00	0.00	0.00
	112	0.00	1.11	0.00	0.00	0.00	0.00
	113	0.00	1.11	0.00	0.00	0.00	0.00
	114	0.00	1.15	0.00	0.00	0.00	0.00
	115	0.00	1.17	0.00	0.00	0.00	0.00
	116	0.00	1.11	0.00	0.00	0.00	0.00
	117	0.00	1.10	0.00	0.00	0.00	0.00
	118	0.00	1.15	0.00	0.00	0.00	0.00
	119	0.00	1.17	0.00	0.00	0.00	0.00
	120	0.00	0.60	0.00	0.00	0.00	0.00
	121	0.00	0.63	0.00	0.00	0.00	0.00
	122	0.00	0.66	0.00	0.00	0.00	0.00
	123	0.00	0.65	0.00	0.00	0.00	0.00
	124	0.00	1.00	0.00	0.00	0.00	0.00
	125	0.00	0.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	126	0.00	0.97	0.00	0.00	0.00	0.00
	127	0.00	0.99	0.00	0.00	0.00	0.00
135	100	0.00	1.12	0.00	0.00	0.00	0.00
	101	0.00	1.11	0.00	0.00	0.00	0.00
	102	0.00	1.19	0.00	0.00	0.00	0.00
	103	0.00	1.21	0.00	0.00	0.00	0.00
	104	0.00	1.04	0.00	0.00	0.00	0.00
	105	0.00	1.03	0.00	0.00	0.00	0.00
	106	0.00	1.08	0.00	0.00	0.00	0.00
	107	0.00	1.10	0.00	0.00	0.00	0.00
	108	0.00	1.14	0.00	0.00	0.00	0.00
	109	0.00	1.13	0.00	0.00	0.00	0.00
	110	0.00	1.18	0.00	0.00	0.00	0.00
	111	0.00	1.20	0.00	0.00	0.00	0.00
	112	0.00	1.09	0.00	0.00	0.00	0.00
	113	0.00	1.08	0.00	0.00	0.00	0.00
	114	0.00	1.13	0.00	0.00	0.00	0.00
	115	0.00	1.15	0.00	0.00	0.00	0.00
	116	0.00	1.10	0.00	0.00	0.00	0.00
	117	0.00	1.10	0.00	0.00	0.00	0.00
	118	0.00	1.14	0.00	0.00	0.00	0.00
	119	0.00	1.16	0.00	0.00	0.00	0.00
	120	0.00	0.55	0.00	0.00	0.00	0.00
	121	0.00	0.68	0.00	0.00	0.00	0.00
	122	0.00	0.61	0.00	0.00	0.00	0.00
	123	0.00	0.63	0.00	0.00	0.00	0.00
	124	0.00	1.01	0.00	0.00	0.00	0.00
	125	0.00	1.01	0.00	0.00	0.00	0.00
	126	0.00	0.99	0.00	0.00	0.00	0.00
	127	0.00	1.01	0.00	0.00	0.00	0.00
136	100	0.00	0.57	0.00	0.00	0.00	0.00
	101	0.00	0.56	0.00	0.00	0.00	0.00
	102	0.00	0.61	0.00	0.00	0.00	0.00
	103	0.00	0.61	0.00	0.00	0.00	0.00
	104	0.00	0.51	0.00	0.00	0.00	0.00
	105	0.00	0.50	0.00	0.00	0.00	0.00
	106	0.00	0.53	0.00	0.00	0.00	0.00
	107	0.00	0.54	0.00	0.00	0.00	0.00
	108	0.00	0.59	0.00	0.00	0.00	0.00
	109	0.00	0.59	0.00	0.00	0.00	0.00
	110	0.00	0.62	0.00	0.00	0.00	0.00
	111	0.00	0.62	0.00	0.00	0.00	0.00
	112	0.00	0.53	0.00	0.00	0.00	0.00
	113	0.00	0.53	0.00	0.00	0.00	0.00
	114	0.00	0.55	0.00	0.00	0.00	0.00
	115	0.00	0.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	116	0.00	0.55	0.00	0.00	0.00	0.00
	117	0.00	0.54	0.00	0.00	0.00	0.00
	118	0.00	0.57	0.00	0.00	0.00	0.00
	119	0.00	0.58	0.00	0.00	0.00	0.00
	120	0.00	0.25	0.00	0.00	0.00	0.00
	121	0.00	0.36	0.00	0.00	0.00	0.00
	122	0.00	0.28	0.00	0.00	0.00	0.00
	123	0.00	0.30	0.00	0.00	0.00	0.00
	124	0.00	0.51	0.00	0.00	0.00	0.00
	125	0.00	0.51	0.00	0.00	0.00	0.00
	126	0.00	0.50	0.00	0.00	0.00	0.00
	127	0.00	0.51	0.00	0.00	0.00	0.00
137	100	0.00	0.42	0.00	0.00	0.00	0.00
	101	0.00	0.42	0.00	0.00	0.00	0.00
	102	0.00	0.45	0.00	0.00	0.00	0.00
	103	0.00	0.46	0.00	0.00	0.00	0.00
	104	0.00	0.45	0.00	0.00	0.00	0.00
	105	0.00	0.46	0.00	0.00	0.00	0.00
	106	0.00	0.47	0.00	0.00	0.00	0.00
	107	0.00	0.48	0.00	0.00	0.00	0.00
	108	0.00	0.37	0.00	0.00	0.00	0.00
	109	0.00	0.38	0.00	0.00	0.00	0.00
	110	0.00	0.39	0.00	0.00	0.00	0.00
	111	0.00	0.40	0.00	0.00	0.00	0.00
	112	0.00	0.51	0.00	0.00	0.00	0.00
	113	0.00	0.51	0.00	0.00	0.00	0.00
	114	0.00	0.53	0.00	0.00	0.00	0.00
	115	0.00	0.53	0.00	0.00	0.00	0.00
	116	0.00	0.48	0.00	0.00	0.00	0.00
	117	0.00	0.48	0.00	0.00	0.00	0.00
	118	0.00	0.50	0.00	0.00	0.00	0.00
	119	0.00	0.50	0.00	0.00	0.00	0.00
	120	0.00	0.28	0.00	0.00	0.00	0.00
	121	0.00	0.18	0.00	0.00	0.00	0.00
	122	0.00	0.35	0.00	0.00	0.00	0.00
	123	0.00	0.31	0.00	0.00	0.00	0.00
	124	0.00	0.38	0.00	0.00	0.00	0.00
	125	0.00	0.39	0.00	0.00	0.00	0.00
	126	0.00	0.43	0.00	0.00	0.00	0.00
	127	0.00	0.44	0.00	0.00	0.00	0.00
138	100	0.00	0.86	0.00	0.00	0.00	0.00
	101	0.00	0.86	0.00	0.00	0.00	0.00
	102	0.00	0.92	0.00	0.00	0.00	0.00
	103	0.00	0.93	0.00	0.00	0.00	0.00
	104	0.00	0.90	0.00	0.00	0.00	0.00
	105	0.00	0.90	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	106	0.00	0.94	0.00	0.00	0.00	0.00
	107	0.00	0.94	0.00	0.00	0.00	0.00
	108	0.00	0.78	0.00	0.00	0.00	0.00
	109	0.00	0.78	0.00	0.00	0.00	0.00
	110	0.00	0.82	0.00	0.00	0.00	0.00
	111	0.00	0.82	0.00	0.00	0.00	0.00
	112	0.00	1.00	0.00	0.00	0.00	0.00
	113	0.00	1.01	0.00	0.00	0.00	0.00
	114	0.00	1.05	0.00	0.00	0.00	0.00
	115	0.00	1.05	0.00	0.00	0.00	0.00
	116	0.00	0.96	0.00	0.00	0.00	0.00
	117	0.00	0.96	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.54	0.00	0.00	0.00	0.00
	121	0.00	0.38	0.00	0.00	0.00	0.00
	122	0.00	0.68	0.00	0.00	0.00	0.00
	123	0.00	0.62	0.00	0.00	0.00	0.00
	124	0.00	0.78	0.00	0.00	0.00	0.00
	125	0.00	0.78	0.00	0.00	0.00	0.00
	126	0.00	0.88	0.00	0.00	0.00	0.00
	127	0.00	0.90	0.00	0.00	0.00	0.00
139	100	0.00	0.87	0.00	0.00	0.00	0.00
	101	0.00	0.87	0.00	0.00	0.00	0.00
	102	0.00	0.94	0.00	0.00	0.00	0.00
	103	0.00	0.94	0.00	0.00	0.00	0.00
	104	0.00	0.89	0.00	0.00	0.00	0.00
	105	0.00	0.89	0.00	0.00	0.00	0.00
	106	0.00	0.93	0.00	0.00	0.00	0.00
	107	0.00	0.93	0.00	0.00	0.00	0.00
	108	0.00	0.80	0.00	0.00	0.00	0.00
	109	0.00	0.81	0.00	0.00	0.00	0.00
	110	0.00	0.85	0.00	0.00	0.00	0.00
	111	0.00	0.85	0.00	0.00	0.00	0.00
	112	0.00	1.00	0.00	0.00	0.00	0.00
	113	0.00	1.00	0.00	0.00	0.00	0.00
	114	0.00	1.04	0.00	0.00	0.00	0.00
	115	0.00	1.04	0.00	0.00	0.00	0.00
	116	0.00	0.96	0.00	0.00	0.00	0.00
	117	0.00	0.96	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.52	0.00	0.00	0.00	0.00
	121	0.00	0.40	0.00	0.00	0.00	0.00
	122	0.00	0.66	0.00	0.00	0.00	0.00
	123	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	124	0.00	0.79	0.00	0.00	0.00	0.00
	125	0.00	0.79	0.00	0.00	0.00	0.00
	126	0.00	0.89	0.00	0.00	0.00	0.00
	127	0.00	0.91	0.00	0.00	0.00	0.00
140	100	0.00	0.88	0.00	0.00	0.00	0.00
	101	0.00	0.88	0.00	0.00	0.00	0.00
	102	0.00	0.95	0.00	0.00	0.00	0.00
	103	0.00	0.96	0.00	0.00	0.00	0.00
	104	0.00	0.88	0.00	0.00	0.00	0.00
	105	0.00	0.88	0.00	0.00	0.00	0.00
	106	0.00	0.92	0.00	0.00	0.00	0.00
	107	0.00	0.92	0.00	0.00	0.00	0.00
	108	0.00	0.83	0.00	0.00	0.00	0.00
	109	0.00	0.83	0.00	0.00	0.00	0.00
	110	0.00	0.87	0.00	0.00	0.00	0.00
	111	0.00	0.88	0.00	0.00	0.00	0.00
	112	0.00	0.99	0.00	0.00	0.00	0.00
	113	0.00	0.99	0.00	0.00	0.00	0.00
	114	0.00	1.03	0.00	0.00	0.00	0.00
	115	0.00	1.03	0.00	0.00	0.00	0.00
	116	0.00	0.96	0.00	0.00	0.00	0.00
	117	0.00	0.96	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.49	0.00	0.00	0.00	0.00
	121	0.00	0.43	0.00	0.00	0.00	0.00
	122	0.00	0.64	0.00	0.00	0.00	0.00
	123	0.00	0.60	0.00	0.00	0.00	0.00
	124	0.00	0.80	0.00	0.00	0.00	0.00
	125	0.00	0.80	0.00	0.00	0.00	0.00
	126	0.00	0.90	0.00	0.00	0.00	0.00
	127	0.00	0.93	0.00	0.00	0.00	0.00
141	100	0.00	0.89	0.00	0.00	0.00	0.00
	101	0.00	0.89	0.00	0.00	0.00	0.00
	102	0.00	0.97	0.00	0.00	0.00	0.00
	103	0.00	0.97	0.00	0.00	0.00	0.00
	104	0.00	0.87	0.00	0.00	0.00	0.00
	105	0.00	0.87	0.00	0.00	0.00	0.00
	106	0.00	0.91	0.00	0.00	0.00	0.00
	107	0.00	0.91	0.00	0.00	0.00	0.00
	108	0.00	0.86	0.00	0.00	0.00	0.00
	109	0.00	0.86	0.00	0.00	0.00	0.00
	110	0.00	0.90	0.00	0.00	0.00	0.00
	111	0.00	0.90	0.00	0.00	0.00	0.00
	112	0.00	0.98	0.00	0.00	0.00	0.00
	113	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	114	0.00	1.02	0.00	0.00	0.00	0.00
	115	0.00	1.03	0.00	0.00	0.00	0.00
	116	0.00	0.96	0.00	0.00	0.00	0.00
	117	0.00	0.95	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.47	0.00	0.00	0.00	0.00
	121	0.00	0.45	0.00	0.00	0.00	0.00
	122	0.00	0.62	0.00	0.00	0.00	0.00
	123	0.00	0.58	0.00	0.00	0.00	0.00
	124	0.00	0.80	0.00	0.00	0.00	0.00
	125	0.00	0.81	0.00	0.00	0.00	0.00
	126	0.00	0.92	0.00	0.00	0.00	0.00
	127	0.00	0.94	0.00	0.00	0.00	0.00
142	100	0.00	0.90	0.00	0.00	0.00	0.00
	101	0.00	0.90	0.00	0.00	0.00	0.00
	102	0.00	0.98	0.00	0.00	0.00	0.00
	103	0.00	0.98	0.00	0.00	0.00	0.00
	104	0.00	0.85	0.00	0.00	0.00	0.00
	105	0.00	0.85	0.00	0.00	0.00	0.00
	106	0.00	0.90	0.00	0.00	0.00	0.00
	107	0.00	0.90	0.00	0.00	0.00	0.00
	108	0.00	0.88	0.00	0.00	0.00	0.00
	109	0.00	0.88	0.00	0.00	0.00	0.00
	110	0.00	0.93	0.00	0.00	0.00	0.00
	111	0.00	0.93	0.00	0.00	0.00	0.00
	112	0.00	0.97	0.00	0.00	0.00	0.00
	113	0.00	0.97	0.00	0.00	0.00	0.00
	114	0.00	1.01	0.00	0.00	0.00	0.00
	115	0.00	1.01	0.00	0.00	0.00	0.00
	116	0.00	0.95	0.00	0.00	0.00	0.00
	117	0.00	0.95	0.00	0.00	0.00	0.00
	118	0.00	1.00	0.00	0.00	0.00	0.00
	119	0.00	1.00	0.00	0.00	0.00	0.00
	120	0.00	0.44	0.00	0.00	0.00	0.00
	121	0.00	0.48	0.00	0.00	0.00	0.00
	122	0.00	0.59	0.00	0.00	0.00	0.00
	123	0.00	0.57	0.00	0.00	0.00	0.00
	124	0.00	0.81	0.00	0.00	0.00	0.00
	125	0.00	0.81	0.00	0.00	0.00	0.00
	126	0.00	0.93	0.00	0.00	0.00	0.00
	127	0.00	0.94	0.00	0.00	0.00	0.00
143	100	0.00	0.91	0.00	0.00	0.00	0.00
	101	0.00	0.91	0.00	0.00	0.00	0.00
	102	0.00	0.99	0.00	0.00	0.00	0.00
	103	0.00	0.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	104	0.00	0.84	0.00	0.00	0.00	0.00
	105	0.00	0.83	0.00	0.00	0.00	0.00
	106	0.00	0.88	0.00	0.00	0.00	0.00
	107	0.00	0.88	0.00	0.00	0.00	0.00
	108	0.00	0.91	0.00	0.00	0.00	0.00
	109	0.00	0.90	0.00	0.00	0.00	0.00
	110	0.00	0.95	0.00	0.00	0.00	0.00
	111	0.00	0.95	0.00	0.00	0.00	0.00
	112	0.00	0.96	0.00	0.00	0.00	0.00
	113	0.00	0.95	0.00	0.00	0.00	0.00
	114	0.00	1.00	0.00	0.00	0.00	0.00
	115	0.00	1.00	0.00	0.00	0.00	0.00
	116	0.00	0.95	0.00	0.00	0.00	0.00
	117	0.00	0.94	0.00	0.00	0.00	0.00
	118	0.00	0.99	0.00	0.00	0.00	0.00
	119	0.00	0.99	0.00	0.00	0.00	0.00
	120	0.00	0.41	0.00	0.00	0.00	0.00
	121	0.00	0.50	0.00	0.00	0.00	0.00
	122	0.00	0.57	0.00	0.00	0.00	0.00
	123	0.00	0.56	0.00	0.00	0.00	0.00
	124	0.00	0.82	0.00	0.00	0.00	0.00
	125	0.00	0.82	0.00	0.00	0.00	0.00
	126	0.00	0.93	0.00	0.00	0.00	0.00
	127	0.00	0.95	0.00	0.00	0.00	0.00
144	100	0.00	0.92	0.00	0.00	0.00	0.00
	101	0.00	0.91	0.00	0.00	0.00	0.00
	102	0.00	0.99	0.00	0.00	0.00	0.00
	103	0.00	1.00	0.00	0.00	0.00	0.00
	104	0.00	0.82	0.00	0.00	0.00	0.00
	105	0.00	0.82	0.00	0.00	0.00	0.00
	106	0.00	0.87	0.00	0.00	0.00	0.00
	107	0.00	0.87	0.00	0.00	0.00	0.00
	108	0.00	0.93	0.00	0.00	0.00	0.00
	109	0.00	0.92	0.00	0.00	0.00	0.00
	110	0.00	0.97	0.00	0.00	0.00	0.00
	111	0.00	0.97	0.00	0.00	0.00	0.00
	112	0.00	0.94	0.00	0.00	0.00	0.00
	113	0.00	0.94	0.00	0.00	0.00	0.00
	114	0.00	0.99	0.00	0.00	0.00	0.00
	115	0.00	0.99	0.00	0.00	0.00	0.00
	116	0.00	0.94	0.00	0.00	0.00	0.00
	117	0.00	0.94	0.00	0.00	0.00	0.00
	118	0.00	0.99	0.00	0.00	0.00	0.00
	119	0.00	0.99	0.00	0.00	0.00	0.00
	120	0.00	0.38	0.00	0.00	0.00	0.00
	121	0.00	0.52	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	122	0.00	0.54	0.00	0.00	0.00	0.00
	123	0.00	0.54	0.00	0.00	0.00	0.00
	124	0.00	0.82	0.00	0.00	0.00	0.00
	125	0.00	0.82	0.00	0.00	0.00	0.00
	126	0.00	0.94	0.00	0.00	0.00	0.00
	127	0.00	0.96	0.00	0.00	0.00	0.00
145	100	0.00	0.46	0.00	0.00	0.00	0.00
	101	0.00	0.46	0.00	0.00	0.00	0.00
	102	0.00	0.50	0.00	0.00	0.00	0.00
	103	0.00	0.50	0.00	0.00	0.00	0.00
	104	0.00	0.40	0.00	0.00	0.00	0.00
	105	0.00	0.40	0.00	0.00	0.00	0.00
	106	0.00	0.43	0.00	0.00	0.00	0.00
	107	0.00	0.43	0.00	0.00	0.00	0.00
	108	0.00	0.47	0.00	0.00	0.00	0.00
	109	0.00	0.47	0.00	0.00	0.00	0.00
	110	0.00	0.50	0.00	0.00	0.00	0.00
	111	0.00	0.50	0.00	0.00	0.00	0.00
	112	0.00	0.46	0.00	0.00	0.00	0.00
	113	0.00	0.46	0.00	0.00	0.00	0.00
	114	0.00	0.49	0.00	0.00	0.00	0.00
	115	0.00	0.49	0.00	0.00	0.00	0.00
	116	0.00	0.47	0.00	0.00	0.00	0.00
	117	0.00	0.47	0.00	0.00	0.00	0.00
	118	0.00	0.49	0.00	0.00	0.00	0.00
	119	0.00	0.49	0.00	0.00	0.00	0.00
	120	0.00	0.18	0.00	0.00	0.00	0.00
	121	0.00	0.27	0.00	0.00	0.00	0.00
	122	0.00	0.26	0.00	0.00	0.00	0.00
	123	0.00	0.26	0.00	0.00	0.00	0.00
	124	0.00	0.41	0.00	0.00	0.00	0.00
	125	0.00	0.41	0.00	0.00	0.00	0.00
	126	0.00	0.47	0.00	0.00	0.00	0.00
	127	0.00	0.48	0.00	0.00	0.00	0.00
146	100	0.00	0.46	0.00	0.00	0.00	0.00
	101	0.00	0.46	0.00	0.00	0.00	0.00
	102	0.00	0.48	0.00	0.00	0.00	0.00
	103	0.00	0.49	0.00	0.00	0.00	0.00
	104	0.00	0.56	0.00	0.00	0.00	0.00
	105	0.00	0.56	0.00	0.00	0.00	0.00
	106	0.00	0.57	0.00	0.00	0.00	0.00
	107	0.00	0.58	0.00	0.00	0.00	0.00
	108	0.00	0.39	0.00	0.00	0.00	0.00
	109	0.00	0.39	0.00	0.00	0.00	0.00
	110	0.00	0.40	0.00	0.00	0.00	0.00
	111	0.00	0.41	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	112	0.00	0.56	0.00	0.00	0.00	0.00
	113	0.00	0.56	0.00	0.00	0.00	0.00
	114	0.00	0.57	0.00	0.00	0.00	0.00
	115	0.00	0.58	0.00	0.00	0.00	0.00
	116	0.00	0.52	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.55	0.00	0.00	0.00	0.00
	120	0.00	0.41	0.00	0.00	0.00	0.00
	121	0.00	0.18	0.00	0.00	0.00	0.00
	122	0.00	0.41	0.00	0.00	0.00	0.00
	123	0.00	0.36	0.00	0.00	0.00	0.00
	124	0.00	0.43	0.00	0.00	0.00	0.00
	125	0.00	0.43	0.00	0.00	0.00	0.00
	126	0.00	0.39	0.00	0.00	0.00	0.00
	127	0.00	0.40	0.00	0.00	0.00	0.00
147	100	0.00	0.22	0.00	0.00	0.00	0.00
	101	0.00	0.23	0.00	0.00	0.00	0.00
	102	0.00	0.24	0.00	0.00	0.00	0.00
	103	0.00	0.24	0.00	0.00	0.00	0.00
	104	0.00	0.28	0.00	0.00	0.00	0.00
	105	0.00	0.29	0.00	0.00	0.00	0.00
	106	0.00	0.29	0.00	0.00	0.00	0.00
	107	0.00	0.30	0.00	0.00	0.00	0.00
	108	0.00	0.18	0.00	0.00	0.00	0.00
	109	0.00	0.18	0.00	0.00	0.00	0.00
	110	0.00	0.19	0.00	0.00	0.00	0.00
	111	0.00	0.19	0.00	0.00	0.00	0.00
	112	0.00	0.28	0.00	0.00	0.00	0.00
	113	0.00	0.29	0.00	0.00	0.00	0.00
	114	0.00	0.29	0.00	0.00	0.00	0.00
	115	0.00	0.30	0.00	0.00	0.00	0.00
	116	0.00	0.26	0.00	0.00	0.00	0.00
	117	0.00	0.26	0.00	0.00	0.00	0.00
	118	0.00	0.27	0.00	0.00	0.00	0.00
	119	0.00	0.27	0.00	0.00	0.00	0.00
	120	0.00	0.22	0.00	0.00	0.00	0.00
	121	0.00	0.08	0.00	0.00	0.00	0.00
	122	0.00	0.22	0.00	0.00	0.00	0.00
	123	0.00	0.19	0.00	0.00	0.00	0.00
	124	0.00	0.21	0.00	0.00	0.00	0.00
	125	0.00	0.21	0.00	0.00	0.00	0.00
	126	0.00	0.19	0.00	0.00	0.00	0.00
	127	0.00	0.20	0.00	0.00	0.00	0.00
148	100	0.00	0.47	0.00	0.00	0.00	0.00
	101	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	102	0.00	0.49	0.00	0.00	0.00	0.00
	103	0.00	0.51	0.00	0.00	0.00	0.00
	104	0.00	0.55	0.00	0.00	0.00	0.00
	105	0.00	0.55	0.00	0.00	0.00	0.00
	106	0.00	0.56	0.00	0.00	0.00	0.00
	107	0.00	0.57	0.00	0.00	0.00	0.00
	108	0.00	0.41	0.00	0.00	0.00	0.00
	109	0.00	0.41	0.00	0.00	0.00	0.00
	110	0.00	0.42	0.00	0.00	0.00	0.00
	111	0.00	0.44	0.00	0.00	0.00	0.00
	112	0.00	0.55	0.00	0.00	0.00	0.00
	113	0.00	0.55	0.00	0.00	0.00	0.00
	114	0.00	0.56	0.00	0.00	0.00	0.00
	115	0.00	0.57	0.00	0.00	0.00	0.00
	116	0.00	0.52	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.38	0.00	0.00	0.00	0.00
	121	0.00	0.20	0.00	0.00	0.00	0.00
	122	0.00	0.39	0.00	0.00	0.00	0.00
	123	0.00	0.35	0.00	0.00	0.00	0.00
	124	0.00	0.44	0.00	0.00	0.00	0.00
	125	0.00	0.43	0.00	0.00	0.00	0.00
	126	0.00	0.40	0.00	0.00	0.00	0.00
	127	0.00	0.41	0.00	0.00	0.00	0.00
149	100	0.00	0.48	0.00	0.00	0.00	0.00
	101	0.00	0.48	0.00	0.00	0.00	0.00
	102	0.00	0.51	0.00	0.00	0.00	0.00
	103	0.00	0.52	0.00	0.00	0.00	0.00
	104	0.00	0.53	0.00	0.00	0.00	0.00
	105	0.00	0.54	0.00	0.00	0.00	0.00
	106	0.00	0.55	0.00	0.00	0.00	0.00
	107	0.00	0.56	0.00	0.00	0.00	0.00
	108	0.00	0.44	0.00	0.00	0.00	0.00
	109	0.00	0.44	0.00	0.00	0.00	0.00
	110	0.00	0.45	0.00	0.00	0.00	0.00
	111	0.00	0.46	0.00	0.00	0.00	0.00
	112	0.00	0.54	0.00	0.00	0.00	0.00
	113	0.00	0.54	0.00	0.00	0.00	0.00
	114	0.00	0.55	0.00	0.00	0.00	0.00
	115	0.00	0.57	0.00	0.00	0.00	0.00
	116	0.00	0.52	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	120	0.00	0.36	0.00	0.00	0.00	0.00
	121	0.00	0.23	0.00	0.00	0.00	0.00
	122	0.00	0.37	0.00	0.00	0.00	0.00
	123	0.00	0.34	0.00	0.00	0.00	0.00
	124	0.00	0.45	0.00	0.00	0.00	0.00
	125	0.00	0.44	0.00	0.00	0.00	0.00
	126	0.00	0.41	0.00	0.00	0.00	0.00
	127	0.00	0.42	0.00	0.00	0.00	0.00
150	100	0.00	0.49	0.00	0.00	0.00	0.00
	101	0.00	0.49	0.00	0.00	0.00	0.00
	102	0.00	0.52	0.00	0.00	0.00	0.00
	103	0.00	0.53	0.00	0.00	0.00	0.00
	104	0.00	0.52	0.00	0.00	0.00	0.00
	105	0.00	0.52	0.00	0.00	0.00	0.00
	106	0.00	0.54	0.00	0.00	0.00	0.00
	107	0.00	0.55	0.00	0.00	0.00	0.00
	108	0.00	0.46	0.00	0.00	0.00	0.00
	109	0.00	0.46	0.00	0.00	0.00	0.00
	110	0.00	0.48	0.00	0.00	0.00	0.00
	111	0.00	0.49	0.00	0.00	0.00	0.00
	112	0.00	0.53	0.00	0.00	0.00	0.00
	113	0.00	0.53	0.00	0.00	0.00	0.00
	114	0.00	0.55	0.00	0.00	0.00	0.00
	115	0.00	0.56	0.00	0.00	0.00	0.00
	116	0.00	0.51	0.00	0.00	0.00	0.00
	117	0.00	0.52	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.34	0.00	0.00	0.00	0.00
	121	0.00	0.25	0.00	0.00	0.00	0.00
	122	0.00	0.35	0.00	0.00	0.00	0.00
	123	0.00	0.32	0.00	0.00	0.00	0.00
	124	0.00	0.45	0.00	0.00	0.00	0.00
	125	0.00	0.45	0.00	0.00	0.00	0.00
	126	0.00	0.42	0.00	0.00	0.00	0.00
	127	0.00	0.43	0.00	0.00	0.00	0.00
151	100	0.00	0.50	0.00	0.00	0.00	0.00
	101	0.00	0.50	0.00	0.00	0.00	0.00
	102	0.00	0.53	0.00	0.00	0.00	0.00
	103	0.00	0.54	0.00	0.00	0.00	0.00
	104	0.00	0.51	0.00	0.00	0.00	0.00
	105	0.00	0.51	0.00	0.00	0.00	0.00
	106	0.00	0.53	0.00	0.00	0.00	0.00
	107	0.00	0.54	0.00	0.00	0.00	0.00
	108	0.00	0.48	0.00	0.00	0.00	0.00
	109	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	110	0.00	0.50	0.00	0.00	0.00	0.00
	111	0.00	0.51	0.00	0.00	0.00	0.00
	112	0.00	0.52	0.00	0.00	0.00	0.00
	113	0.00	0.52	0.00	0.00	0.00	0.00
	114	0.00	0.54	0.00	0.00	0.00	0.00
	115	0.00	0.55	0.00	0.00	0.00	0.00
	116	0.00	0.51	0.00	0.00	0.00	0.00
	117	0.00	0.51	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.31	0.00	0.00	0.00	0.00
	121	0.00	0.27	0.00	0.00	0.00	0.00
	122	0.00	0.32	0.00	0.00	0.00	0.00
	123	0.00	0.31	0.00	0.00	0.00	0.00
	124	0.00	0.46	0.00	0.00	0.00	0.00
	125	0.00	0.46	0.00	0.00	0.00	0.00
	126	0.00	0.43	0.00	0.00	0.00	0.00
	127	0.00	0.44	0.00	0.00	0.00	0.00
152	100	0.00	0.51	0.00	0.00	0.00	0.00
	101	0.00	0.51	0.00	0.00	0.00	0.00
	102	0.00	0.54	0.00	0.00	0.00	0.00
	103	0.00	0.55	0.00	0.00	0.00	0.00
	104	0.00	0.50	0.00	0.00	0.00	0.00
	105	0.00	0.50	0.00	0.00	0.00	0.00
	106	0.00	0.51	0.00	0.00	0.00	0.00
	107	0.00	0.52	0.00	0.00	0.00	0.00
	108	0.00	0.51	0.00	0.00	0.00	0.00
	109	0.00	0.51	0.00	0.00	0.00	0.00
	110	0.00	0.52	0.00	0.00	0.00	0.00
	111	0.00	0.53	0.00	0.00	0.00	0.00
	112	0.00	0.51	0.00	0.00	0.00	0.00
	113	0.00	0.51	0.00	0.00	0.00	0.00
	114	0.00	0.53	0.00	0.00	0.00	0.00
	115	0.00	0.54	0.00	0.00	0.00	0.00
	116	0.00	0.51	0.00	0.00	0.00	0.00
	117	0.00	0.51	0.00	0.00	0.00	0.00
	118	0.00	0.53	0.00	0.00	0.00	0.00
	119	0.00	0.54	0.00	0.00	0.00	0.00
	120	0.00	0.29	0.00	0.00	0.00	0.00
	121	0.00	0.30	0.00	0.00	0.00	0.00
	122	0.00	0.30	0.00	0.00	0.00	0.00
	123	0.00	0.30	0.00	0.00	0.00	0.00
	124	0.00	0.47	0.00	0.00	0.00	0.00
	125	0.00	0.46	0.00	0.00	0.00	0.00
	126	0.00	0.44	0.00	0.00	0.00	0.00
	127	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
153	100	0.00	0.52	0.00	0.00	0.00	0.00
	101	0.00	0.51	0.00	0.00	0.00	0.00
	102	0.00	0.55	0.00	0.00	0.00	0.00
	103	0.00	0.56	0.00	0.00	0.00	0.00
	104	0.00	0.48	0.00	0.00	0.00	0.00
	105	0.00	0.48	0.00	0.00	0.00	0.00
	106	0.00	0.50	0.00	0.00	0.00	0.00
	107	0.00	0.51	0.00	0.00	0.00	0.00
	108	0.00	0.53	0.00	0.00	0.00	0.00
	109	0.00	0.53	0.00	0.00	0.00	0.00
	110	0.00	0.55	0.00	0.00	0.00	0.00
	111	0.00	0.56	0.00	0.00	0.00	0.00
	112	0.00	0.50	0.00	0.00	0.00	0.00
	113	0.00	0.50	0.00	0.00	0.00	0.00
	114	0.00	0.52	0.00	0.00	0.00	0.00
	115	0.00	0.52	0.00	0.00	0.00	0.00
	116	0.00	0.51	0.00	0.00	0.00	0.00
	117	0.00	0.50	0.00	0.00	0.00	0.00
	118	0.00	0.52	0.00	0.00	0.00	0.00
	119	0.00	0.53	0.00	0.00	0.00	0.00
	120	0.00	0.26	0.00	0.00	0.00	0.00
	121	0.00	0.32	0.00	0.00	0.00	0.00
	122	0.00	0.28	0.00	0.00	0.00	0.00
	123	0.00	0.29	0.00	0.00	0.00	0.00
	124	0.00	0.47	0.00	0.00	0.00	0.00
	125	0.00	0.47	0.00	0.00	0.00	0.00
	126	0.00	0.45	0.00	0.00	0.00	0.00
	127	0.00	0.46	0.00	0.00	0.00	0.00
154	100	0.00	0.26	0.00	0.00	0.00	0.00
	101	0.00	0.26	0.00	0.00	0.00	0.00
	102	0.00	0.28	0.00	0.00	0.00	0.00
	103	0.00	0.28	0.00	0.00	0.00	0.00
	104	0.00	0.24	0.00	0.00	0.00	0.00
	105	0.00	0.23	0.00	0.00	0.00	0.00
	106	0.00	0.24	0.00	0.00	0.00	0.00
	107	0.00	0.25	0.00	0.00	0.00	0.00
	108	0.00	0.28	0.00	0.00	0.00	0.00
	109	0.00	0.28	0.00	0.00	0.00	0.00
	110	0.00	0.29	0.00	0.00	0.00	0.00
	111	0.00	0.29	0.00	0.00	0.00	0.00
	112	0.00	0.24	0.00	0.00	0.00	0.00
	113	0.00	0.24	0.00	0.00	0.00	0.00
	114	0.00	0.25	0.00	0.00	0.00	0.00
	115	0.00	0.26	0.00	0.00	0.00	0.00
	116	0.00	0.25	0.00	0.00	0.00	0.00
	117	0.00	0.25	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	118	0.00	0.26	0.00	0.00	0.00	0.00
	119	0.00	0.26	0.00	0.00	0.00	0.00
	120	0.00	0.12	0.00	0.00	0.00	0.00
	121	0.00	0.17	0.00	0.00	0.00	0.00
	122	0.00	0.13	0.00	0.00	0.00	0.00
	123	0.00	0.14	0.00	0.00	0.00	0.00
	124	0.00	0.24	0.00	0.00	0.00	0.00
	125	0.00	0.24	0.00	0.00	0.00	0.00
	126	0.00	0.23	0.00	0.00	0.00	0.00
	127	0.00	0.23	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	100	0.1236	-0.4693	0.0330	0.0004	0.0000	-0.0013
	101	0.1227	-0.4691	0.0290	0.0003	0.0000	-0.0013
	102	0.1303	-0.5080	0.0381	0.0004	0.0000	-0.0014
	103	0.1263	-0.5126	0.0364	0.0004	0.0000	-0.0013
	104	0.1023	-0.4697	-0.0420	-0.0005	0.0000	-0.0011
	105	0.1014	-0.4695	-0.0460	-0.0005	0.0000	-0.0011
	106	0.1068	-0.4923	-0.0391	-0.0004	0.0000	-0.0011
	107	0.1028	-0.4968	-0.0410	-0.0005	0.0000	-0.0011
	108	0.1274	-0.4450	0.0826	0.0009	0.0000	-0.0014
	109	0.1266	-0.4448	0.0786	0.0009	0.0000	-0.0014
	110	0.1319	-0.4676	0.0855	0.0010	0.0000	-0.0014
	111	0.1279	-0.4721	0.0836	0.0009	0.0000	-0.0014
	112	0.1286	-0.5176	-0.0345	-0.0004	0.0000	-0.0014
	113	0.1277	-0.5174	-0.0385	-0.0004	0.0000	-0.0014
	114	0.1331	-0.5402	-0.0316	-0.0004	0.0000	-0.0014
	115	0.1291	-0.5447	-0.0335	-0.0004	0.0000	-0.0014
	116	0.1293	-0.5031	-0.0082	-0.0001	0.0000	-0.0014
	117	0.1284	-0.5029	-0.0122	-0.0001	0.0000	-0.0014
	118	0.1337	-0.5256	-0.0054	-0.0001	0.0000	-0.0014
	119	0.1298	-0.5302	-0.0072	-0.0001	0.0000	-0.0014
	120	0.0411	-0.2647	-0.0855	-0.0010	0.0000	-0.0004
	121	0.0746	-0.2319	0.0806	0.0009	0.0000	-0.0008
	122	0.0761	-0.3286	-0.0756	-0.0008	0.0000	-0.0008
	123	0.0770	-0.3092	-0.0406	-0.0005	0.0000	-0.0008
	124	0.1163	-0.4209	0.0243	0.0003	0.0000	-0.0013
	125	0.1187	-0.4210	0.0233	0.0003	0.0000	-0.0013
	126	0.1608	-0.4547	0.0343	0.0004	0.0000	-0.0017
	127	0.1603	-0.4666	0.0305	0.0003	0.0000	-0.0017

********** END OF LATEST ANALYSIS RESULT **********

==========

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	200	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 13:11: 2 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 8 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F2

```
STAAD SPACE
START JOB INFORMATION
ENGINEER DATE 16-Dec-19
END JOB INFORMATION
INPUT WIDTH 79
SET ECHO OFF
UNIT METER MTON
JOINT COORDINATES
1 0 0 0; 2 0 9.35 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1;
11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5;
16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1;
21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1;
26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5;
31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5;
36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5;
41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75;
46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 63 1.25 0 -0.75;
64 1.25 0 -1; 65 1.25 0 -0.5; 66 1.25 0 -0.25; 67 1.25 0 0; 68 1 0 -0.75;
69 1 0 -1; 70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1;
75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1;
80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1;
85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 99 1.25 0 0.25; 100 1.25 0 0.5;
101 1.25 0 0.75; 102 1.25 0 1; 103 1 0 0.25; 104 1 0 0.5; 105 1 0 0.75;
106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75; 110 0.75 0 1;
111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1; 115 0.25 0 0.25;
116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1; 119 -1.25 0 -0.75;
120 -1.25 0 -1; 121 -1.25 0 -0.5; 122 -1.25 0 -0.25; 123 -1.25 0 0;
124 -1.25 0 0.25; 125 -1.25 0 0.5; 126 -1.25 0 0.75; 127 -1.25 0 1;
128 -1.5 0 -0.75; 129 -1.5 0 -1; 130 -1.5 0 -0.5; 131 -1.5 0 -0.25;
132 -1.5 0 0; 133 -1.5 0 0.25; 134 -1.5 0 0.5; 135 -1.5 0 0.75; 136 -1.5 0 1;
137 -1.75 0 -0.75; 138 -1.75 0 -1; 139 -1.75 0 -0.5; 140 -1.75 0 -0.25;
141 -1.75 0 0; 142 -1.75 0 0.25; 143 -1.75 0 0.5; 144 -1.75 0 0.75;
145 -1.75 0 1; 146 0 0 -1.25; 147 -0.25 0 -1.25; 148 -0.5 0 -1.25;
149 -0.75 0 -1.25; 150 -1 0 -1.25; 152 1.25 0 -1.25; 153 1 0 -1.25;
154 0.75 0 -1.25; 155 0.5 0 -1.25; 156 0.25 0 -1.25; 157 -1.25 0 -1.25;
158 -1.5 0 -1.25; 159 -1.75 0 -1.25; 160 0 0 1.25; 161 -0.25 0 1.25;
162 -0.5 0 1.25; 163 -0.75 0 1.25; 164 -1 0 1.25; 166 1.25 0 1.25;
167 1 0 1.25; 168 0.75 0 1.25; 169 0.5 0 1.25; 170 0.25 0 1.25;
171 -1.25 0 1.25; 172 -1.5 0 1.25; 173 -1.75 0 1.25; 174 -2 0 -0.75;
175 -2 0 -1; 176 -2 0 -0.5; 177 -2 0 -0.25; 178 -2 0 0; 179 -2 0 0.25;
180 -2 0 0.5; 181 -2 0 0.75; 182 -2 0 1; 183 -2 0 -1.25; 184 -2 0 1.25;
185 1.5 0 -1; 186 1.5 0 -0.75; 187 1.5 0 -0.5; 188 1.5 0 -0.25; 189 1.5 0 0;
190 1.5 0 0.25; 191 1.5 0 0.5; 192 1.5 0 0.75; 193 1.5 0 1; 194 1.5 0 -1.25;
195 1.5 0 1.25; 196 0 0 -1.375; 197 -0.25 0 -1.375; 198 -0.5 0 -1.375;
199 -0.75 0 -1.375; 200 -1 0 -1.375; 201 1.25 0 -1.375; 202 1 0 -1.375;
203 0.75 0 -1.375; 204 0.5 0 -1.375; 205 0.25 0 -1.375; 206 -1.25 0 -1.375;
207 -1.5 0 -1.375; 208 -1.75 0 -1.375; 209 -2 0 -1.375; 210 1.5 0 -1.375;
211 0 0 1.375; 212 -0.25 0 1.375; 213 -0.5 0 1.375; 214 -0.75 0 1.375;
215 -1 0 1.375; 216 1.25 0 1.375; 217 1 0 1.375; 218 0.75 0 1.375;
219 0.5 0 1.375; 220 0.25 0 1.375; 221 -1.25 0 1.375; 222 -1.5 0 1.375;
223 -1.75 0 1.375; 224 -2 0 1.375; 225 1.5 0 1.375;
MEMBER INCIDENCES
101 2 1;
ELEMENT INCIDENCES SHELL
5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20;
10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24;
15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30;
20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37;
25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28;
30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47;
35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70;
52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76;
57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84;
62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11;
67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103;
83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107;
87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111;
91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115;
95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32;
99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119;
104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124;
108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128;
112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132;
115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135;
118 129 128 137 138; 119 128 130 139 137; 120 130 131 140 139;
121 131 132 141 140; 122 132 133 142 141; 123 133 134 143 142;
124 134 135 144 143; 125 135 136 145 144; 126 146 8 13 147; 127 147 13 20 148;
128 148 20 25 149; 129 149 25 9 150; 131 152 64 69 153; 132 153 69 74 154;
133 154 74 79 155; 134 155 79 84 156; 135 156 84 8 146; 136 150 9 120 157;
137 157 120 129 158; 138 158 129 138 159; 139 5 160 161 38; 140 38 161 162 42;
```

```
141 42 162 163 46; 142 46 163 164 6; 144 102 166 167 106; 145 106 167 168 110;
146 110 168 169 114; 147 114 169 170 118; 148 118 170 160 5; 149 6 164 171 127;
150 127 171 172 136; 151 136 172 173 145; 152 138 137 174 175;
153 137 139 176 174; 154 139 140 177 176; 155 140 141 178 177;
156 141 142 179 178; 157 142 143 180 179; 158 143 144 181 180;
159 144 145 182 181; 160 159 138 175 183; 161 145 173 184 182;
162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66;
166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100;
169 192 193 102 101; 170 194 185 64 152; 171 193 195 166 102;
172 183 209 208 159; 173 159 208 207 158; 174 158 207 206 157;
175 157 206 200 150; 176 150 200 199 149; 177 149 199 198 148;
178 148 198 197 147; 179 147 197 196 146; 180 146 196 205 156;
181 156 205 204 155; 182 155 204 203 154; 183 154 203 202 153;
184 153 202 201 152; 185 152 201 210 194; 186 184 224 223 173;
187 173 223 222 172; 188 172 222 221 171; 189 171 221 215 164;
190 164 215 214 163; 191 163 214 213 162; 192 162 213 212 161;
193 161 212 211 160; 194 160 211 220 170; 195 170 220 219 169;
196 169 219 218 168; 197 168 218 217 167; 198 167 217 216 166;
199 166 216 225 195;
START GROUP DEFINITION
ELEMENT
_MAX_BM 5 TO 7 9 TO 11 13 TO 20 22 TO 24 26 TO 36 49 TO 67 81 TO 96 -
98 TO 100 102 TO 129 131 TO 142 144 TO 199
_MAX_SF 5 9 13 17 24 28 32 36 49 TO 57 61 65 81 TO 88 92 96 100 102 TO 129 -
131 TO 135 137 TO 142 144 TO 199
END GROUP DEFINITION
ELEMENT PROPERTY
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 199 THICKNESS 0.6
DEFINE MATERIAL START
ISOTROPIC CONCRETE
E 2.21467e+006
POISSON 0.17
DENSITY 2.40262
ALPHA 1e-005
DAMP 0.05
TYPE CONCRETE
STRENGTH FCU 2812.28
END DEFINE MATERIAL
MEMBER PROPERTY AMERICAN
101 PRIS YD 0.85 ZD 0.85
CONSTANTS
MATERIAL CONCRETE ALL
SUPPORTS
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 198 -
199 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
LOAD 1 LOADTYPE None  TITLE DL+0.75*LL+0.75*LR+H
SELFWEIGHT Y -1
JOINT LOAD
2 FX -1.1 FY -15 FZ -0.4
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
MEMBER LOAD
101 CON GX 6.3 4.45
LOAD 2 LOADTYPE None  TITLE DL+0.75*(LL+LR+W(+X))+H
SELFWEIGHT Y -1
MEMBER LOAD
101 CON GX 6.3 4.45
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
*CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 660
JOINT LOAD
2 FX 1.1 FY -15.6 FZ -5
LOAD 3 LOADTYPE None  TITLE DL+0.75*(LL+LR+W(-X))+H
JOINT LOAD
2 FX 2.2 FY -19.9 FZ -3.3
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
LOAD 4 LOADTYPE None  TITLE DL+0.75*(LL+LR+W(+Z))+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
```

```
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
JOINT LOAD
2 FX -1.1 FY -27.5 FZ -5.2
LOAD 5 LOADTYPE None  TITLE DL+0.75*(LL+LR+W(-Z))+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
JOINT LOAD
2 FX -1.1 FY -28.7 FZ -6.3
LOAD 6 LOADTYPE None  TITLE 0.6DL+WLX1+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -3.5
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -6
JOINT LOAD
2 FX 2.6 FY -7.6 FZ -6.4
LOAD 7 LOADTYPE None  TITLE 0.6DL+WLX2+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
JOINT LOAD
2 FX 4.1 FY -13.4 FZ -4.2
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -3.5
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -6
LOAD 8 LOADTYPE None  TITLE 0.6DL+WLZ1+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -3.5
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -6
JOINT LOAD
2 FX -0.4 FY -23.4 FZ -6.7
LOAD 9 LOADTYPE None  TITLE 0.6DL+WLZ2+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -3.5
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -6
JOINT LOAD
2 FX -0.4 FY -25 FZ -8.2
LOAD 10 LOADTYPE None  TITLE DL+LL+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
JOINT LOAD
2 FX -0.7 FY -10.5 FZ -0.5
LOAD 11 LOADTYPE None  TITLE DL+LR+H
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.8
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -9.6
JOINT LOAD
2 FX -1.3 FY -16.3 FZ -0.1
**************************************************************88
************************************************************
*LOAD CASES FOR FOUNDATION DESIGN
LOAD 100 LOADTYPE None  TITLE 1.4(DL+LL)
```

```
MEMBER LOAD
101 CON GX 6.3 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -8.1
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -13.44
JOINT LOAD
*CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 660
2 FX -1 FY -14.7 FZ -0.6
**************************************
LOAD 101 LOADTYPE None  TITLE 1.4DL+1.7LL + 0.5LR + 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -8.1
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -13.44
JOINT LOAD
2 FX -1.2 FY -17.8 FZ -0.7
*****************************************
LOAD 102 LOADTYPE None  TITLE 1.2DL+1.6LR+0.5W(+X)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX -0.2 FY -22.4 FZ -3.2
*****************************************************
LOAD 103 LOADTYPE None  TITLE 1.2DL+1.6LR+0.5W(-X)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX 0.5 FY -25.3 FZ -2.1
*****************************************************
LOAD 104 LOADTYPE None  TITLE 1.2DL+1.6LR+0.5W(+Z)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX -1.8 FY -30.3 FZ -3.4
*****************************************************
LOAD 105 LOADTYPE None  TITLE 1.2DL+1.6LR+0.5W(-Z)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX -1.7 FY -31.1 FZ -4.1
*****************************************************
LOAD 106 LOADTYPE None  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX 3.7 FY -16.9 FZ -10.3
*****************************************************
LOAD 107 LOADTYPE None  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
```

```
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX 6 FY -25.6 FZ -6.6
*****************************************************
LOAD 108 LOADTYPE None  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX -1.2 FY -41.7 FZ -10.6
*****************************************************
LOAD 109 LOADTYPE None  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)+ 1.6H
MEMBER LOAD
101 CON GX 10 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -7
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -11.52
JOINT LOAD
2 FX -1.1 FY -44.2 FZ -13
*****************************************************
LOAD 110 LOADTYPE None  TITLE 0.9D + 1.6W(+X) +0.9H
MEMBER LOAD
101 CON GX 6 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.2
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -8.64
JOINT LOAD
2 FX 4.2 FY -12 FZ -10.4
*****************************************************
LOAD 111 LOADTYPE None  TITLE 0.9D + 1.6W(-X) +0.9H
MEMBER LOAD
101 CON GX 6 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.2
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -8.64
JOINT LOAD
2 FX 6.5 FY -20.7 FZ -6.7
*****************************************************
LOAD 112 LOADTYPE None  TITLE 0.9D + 1.6W(+Z) +0.9H
MEMBER LOAD
101 CON GX 6 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.2
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -8.64
JOINT LOAD
2 FX -0.7 FY -36.8 FZ -10.8
*****************************************************
LOAD 113 LOADTYPE None  TITLE 0.9D + 1.6W(-Z) +0.9H
MEMBER LOAD
101 CON GX 6 4.45
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
195 TO 199 PR GY -5.2
5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 PR GY -8.64
JOINT LOAD
2 FX -0.5 FY -39.3 FZ -13.1
*****************************************************
PERFORM ANALYSIS
LOAD LIST 1 TO 11
PRINT SUPPORT REACTION ALL
LOAD LIST 100 TO 113
START CONCRETE DESIGN
CODE ACI
```

```
CLB 0.05 MEMB 101
CLS 0.05 ALL
CLT 0.05 MEMB 101
FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 129 131 TO 142 144 TO 161
FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 129 131 TO 142 144 TO 161
FYSEC 42813 ALL
MAXMAIN 32 ALL
MINMAIN 12 ALL
CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171
CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171
CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171
DESIGN COLUMN 101
END CONCRETE DESIGN
FINISH
```

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    MAR 30, 2020                *
*           Time=     9:15:19                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F2.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. SET ECHO OFF
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500

33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.062500
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.062500
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.062500
103	0.062500
104	0.062500
105	0.062500
106	0.062500
107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500

113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
128	0.062500
129	0.062500
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.062500
137	0.062500
138	0.062500
139	0.062500
140	0.062500
141	0.062500
142	0.062500
143	0.062500
144	0.062500
145	0.062500
146	0.046875
147	0.046875
148	0.046875
149	0.046875
150	0.046875
152	0.046875
153	0.046875
154	0.046875
155	0.046875
156	0.046875
157	0.046875
158	0.046875
159	0.046875
160	0.046875
161	0.046875
162	0.046875
163	0.046875
164	0.046875
166	0.046875
167	0.046875
168	0.046875
169	0.046875
170	0.046875

171	0.046875
172	0.046875
173	0.046875
174	0.031250
175	0.031250
176	0.031250
177	0.031250
178	0.031250
179	0.031250
180	0.031250
181	0.031250
182	0.031250
183	0.023438
184	0.023438
185	0.031250
186	0.031250
187	0.031250
188	0.031250
189	0.031250
190	0.031250
191	0.031250
192	0.031250
193	0.031250
194	0.023437
195	0.023437
196	0.015625
197	0.015625
198	0.015625
199	0.015625
200	0.015625
201	0.015625
202	0.015625
203	0.015625
204	0.015625
205	0.015625
206	0.015625
207	0.015625
208	0.015625
209	0.007812
210	0.007812
211	0.015625
212	0.015625
213	0.015625
214	0.015625
215	0.015625
216	0.015625
217	0.015625
218	0.015625
219	0.015625
220	0.015625
221	0.015625
222	0.015625
223	0.015625
224	0.007812
225	0.007812
TOTAL	9.625000

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	196	NUMBER OF MEMBERS	1
NUMBER OF PLATES	168	NUMBER OF SOLIDS	0
NUMBER OF SURFACES	0	NUMBER OF SUPPORTS	195

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 137/ 23/ 72 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 591
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 43 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.5/ 165243.4 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**NOTE-Tension/Compression converged after 1 iterations, Case= 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 4

**NOTE-Tension/Compression converged after 1 iterations, Case= 5

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 6

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 7

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 8

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 106

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 107

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 108

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 109

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 110

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 111

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 112

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 113

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	-5.20	0.99	0.40	0.00	0.00	0.00
	2	-7.40	1.03	5.00	0.00	0.00	0.00
	3	-8.50	1.07	3.30	0.00	0.00	0.00
	4	-5.20	1.09	5.20	0.00	0.00	0.00
	5	-5.20	1.10	6.30	0.00	0.00	0.00
	6	-8.90	0.70	6.40	0.00	0.00	0.00
	7	-10.40	0.80	4.20	0.00	0.00	0.00
	8	-5.90	0.82	6.70	0.00	0.00	0.00
	9	-5.90	0.79	8.20	0.00	0.00	0.00
	10	-5.60	0.96	0.50	0.00	0.00	0.00
	11	-5.00	1.00	0.10	0.00	0.00	0.00
3	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
5	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.55	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
6	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.05	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
8	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	1.49	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.37	0.00	0.00	0.00	0.00
	4	0.00	1.56	0.00	0.00	0.00	0.00
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	1.39	0.00	0.00	0.00	0.00
	7	0.00	1.21	0.00	0.00	0.00	0.00
	8	0.00	1.46	0.00	0.00	0.00	0.00
	9	0.00	1.65	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
9	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	1.39	0.00	0.00	0.00	0.00
	3	0.00	1.21	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	1.09	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	1.33	0.00	0.00	0.00	0.00
	9	0.00	1.51	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
11	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	1.38	0.00	0.00	0.00	0.00
	3	0.00	1.30	0.00	0.00	0.00	0.00
	4	0.00	1.45	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	1.22	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.30	0.00	0.00	0.00	0.00
	9	0.00	1.44	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
12	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.35	0.00	0.00	0.00	0.00
	3	0.00	1.26	0.00	0.00	0.00	0.00
	4	0.00	1.45	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	1.27	0.00	0.00	0.00	0.00
	9	0.00	1.41	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
13	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.47	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	1.32	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.43	0.00	0.00	0.00	0.00
	9	0.00	1.62	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
14	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	1.26	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	1.33	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	1.14	0.00	0.00	0.00	0.00
	9	0.00	1.23	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
15	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.18	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.97	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	1.11	0.00	0.00	0.00	0.00
	9	0.00	1.20	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
16	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.15	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.88	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.98	0.00	0.00	0.00	0.00
	9	0.00	1.02	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
17	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.95	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
18	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.08	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.75	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
19	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.21	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	1.24	0.00	0.00	0.00	0.00
	9	0.00	1.37	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
20	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.44	0.00	0.00	0.00	0.00
	3	0.00	1.29	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00
	5	0.00	1.69	0.00	0.00	0.00	0.00
	6	0.00	1.24	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	1.40	0.00	0.00	0.00	0.00
	9	0.00	1.59	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
21	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	1.16	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
22	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.94	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
23	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	0.97	0.00	0.00	0.00	0.00
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.75	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
24	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.30	0.00	0.00	0.00	0.00
	3	0.00	1.17	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	0.99	0.00	0.00	0.00	0.00
	7	0.00	0.82	0.00	0.00	0.00	0.00
	8	0.00	1.21	0.00	0.00	0.00	0.00
	9	0.00	1.34	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
25	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.42	0.00	0.00	0.00	0.00
	3	0.00	1.25	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00
	5	0.00	1.69	0.00	0.00	0.00	0.00
	6	0.00	1.16	0.00	0.00	0.00	0.00
	7	0.00	0.93	0.00	0.00	0.00	0.00
	8	0.00	1.37	0.00	0.00	0.00	0.00
	9	0.00	1.55	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.03	0.00	0.00	0.00	0.00
26	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.19	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	1.12	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
27	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.07	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.89	0.00	0.00	0.00	0.00
	9	0.00	0.90	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
28	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	0.46	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
29	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.28	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	1.18	0.00	0.00	0.00	0.00
	9	0.00	1.30	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
30	1	0.00	1.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.05	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	1.02	0.00	0.00	0.00	0.00
	9	0.00	1.09	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
31	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
32	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	0.94	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
33	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
34	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
35	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.82	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
36	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
37	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
38	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
39	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.84	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.96	0.00	0.00	0.00	0.00
	5	0.00	0.94	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
40	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
41	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.04	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
42	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.08	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
43	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	0.83	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.96	0.00	0.00	0.00	0.00
	5	0.00	0.94	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
44	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
45	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.02	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
46	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.06	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
47	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.95	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
48	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
49	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
63	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	1.44	0.00	0.00	0.00	0.00
	3	0.00	1.46	0.00	0.00	0.00	0.00
	4	0.00	1.36	0.00	0.00	0.00	0.00
	5	0.00	1.45	0.00	0.00	0.00	0.00
	6	0.00	1.57	0.00	0.00	0.00	0.00
	7	0.00	1.54	0.00	0.00	0.00	0.00
	8	0.00	1.38	0.00	0.00	0.00	0.00
	9	0.00	1.53	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	1.56	0.00	0.00	0.00	0.00
	3	0.00	1.53	0.00	0.00	0.00	0.00
	4	0.00	1.48	0.00	0.00	0.00	0.00
	5	0.00	1.60	0.00	0.00	0.00	0.00
	6	0.00	1.73	0.00	0.00	0.00	0.00
	7	0.00	1.64	0.00	0.00	0.00	0.00
	8	0.00	1.54	0.00	0.00	0.00	0.00
	9	0.00	1.74	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
65	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.38	0.00	0.00	0.00	0.00
	4	0.00	1.24	0.00	0.00	0.00	0.00
	5	0.00	1.30	0.00	0.00	0.00	0.00
	6	0.00	1.40	0.00	0.00	0.00	0.00
	7	0.00	1.44	0.00	0.00	0.00	0.00
	8	0.00	1.22	0.00	0.00	0.00	0.00
	9	0.00	1.32	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
66	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.31	0.00	0.00	0.00	0.00
	4	0.00	1.12	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.23	0.00	0.00	0.00	0.00
	7	0.00	1.34	0.00	0.00	0.00	0.00
	8	0.00	1.06	0.00	0.00	0.00	0.00
	9	0.00	1.10	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
67	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.23	0.00	0.00	0.00	0.00
	4	0.00	1.00	0.00	0.00	0.00	0.00
	5	0.00	1.01	0.00	0.00	0.00	0.00
	6	0.00	1.05	0.00	0.00	0.00	0.00
	7	0.00	1.23	0.00	0.00	0.00	0.00
	8	0.00	0.89	0.00	0.00	0.00	0.00
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
68	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	1.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.43	0.00	0.00	0.00	0.00
	4	0.00	1.38	0.00	0.00	0.00	0.00
	5	0.00	1.47	0.00	0.00	0.00	0.00
	6	0.00	1.50	0.00	0.00	0.00	0.00
	7	0.00	1.46	0.00	0.00	0.00	0.00
	8	0.00	1.37	0.00	0.00	0.00	0.00
	9	0.00	1.52	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
69	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	1.55	0.00	0.00	0.00	0.00
	3	0.00	1.50	0.00	0.00	0.00	0.00
	4	0.00	1.50	0.00	0.00	0.00	0.00
	5	0.00	1.62	0.00	0.00	0.00	0.00
	6	0.00	1.67	0.00	0.00	0.00	0.00
	7	0.00	1.55	0.00	0.00	0.00	0.00
	8	0.00	1.52	0.00	0.00	0.00	0.00
	9	0.00	1.73	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
70	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	1.32	0.00	0.00	0.00	0.00
	3	0.00	1.36	0.00	0.00	0.00	0.00
	4	0.00	1.26	0.00	0.00	0.00	0.00
	5	0.00	1.32	0.00	0.00	0.00	0.00
	6	0.00	1.33	0.00	0.00	0.00	0.00
	7	0.00	1.36	0.00	0.00	0.00	0.00
	8	0.00	1.21	0.00	0.00	0.00	0.00
	9	0.00	1.30	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
71	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.28	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.18	0.00	0.00	0.00	0.00
	6	0.00	1.16	0.00	0.00	0.00	0.00
	7	0.00	1.25	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	1.09	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
72	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.20	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	0.88	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
73	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	1.42	0.00	0.00	0.00	0.00
	3	0.00	1.40	0.00	0.00	0.00	0.00
	4	0.00	1.40	0.00	0.00	0.00	0.00
	5	0.00	1.49	0.00	0.00	0.00	0.00
	6	0.00	1.44	0.00	0.00	0.00	0.00
	7	0.00	1.37	0.00	0.00	0.00	0.00
	8	0.00	1.35	0.00	0.00	0.00	0.00
	9	0.00	1.50	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
74	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	1.54	0.00	0.00	0.00	0.00
	3	0.00	1.47	0.00	0.00	0.00	0.00
	4	0.00	1.52	0.00	0.00	0.00	0.00
	5	0.00	1.63	0.00	0.00	0.00	0.00
	6	0.00	1.60	0.00	0.00	0.00	0.00
	7	0.00	1.47	0.00	0.00	0.00	0.00
	8	0.00	1.51	0.00	0.00	0.00	0.00
	9	0.00	1.71	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
75	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	1.31	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	1.28	0.00	0.00	0.00	0.00
	5	0.00	1.35	0.00	0.00	0.00	0.00
	6	0.00	1.27	0.00	0.00	0.00	0.00
	7	0.00	1.27	0.00	0.00	0.00	0.00
	8	0.00	1.19	0.00	0.00	0.00	0.00
	9	0.00	1.29	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
76	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	1.19	0.00	0.00	0.00	0.00
	3	0.00	1.25	0.00	0.00	0.00	0.00
	4	0.00	1.16	0.00	0.00	0.00	0.00
	5	0.00	1.20	0.00	0.00	0.00	0.00
	6	0.00	1.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	1.17	0.00	0.00	0.00	0.00
	8	0.00	1.03	0.00	0.00	0.00	0.00
	9	0.00	1.07	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
77	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	1.07	0.00	0.00	0.00	0.00
	3	0.00	1.17	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	0.92	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
78	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.41	0.00	0.00	0.00	0.00
	3	0.00	1.37	0.00	0.00	0.00	0.00
	4	0.00	1.42	0.00	0.00	0.00	0.00
	5	0.00	1.51	0.00	0.00	0.00	0.00
	6	0.00	1.37	0.00	0.00	0.00	0.00
	7	0.00	1.29	0.00	0.00	0.00	0.00
	8	0.00	1.34	0.00	0.00	0.00	0.00
	9	0.00	1.49	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
79	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.52	0.00	0.00	0.00	0.00
	3	0.00	1.44	0.00	0.00	0.00	0.00
	4	0.00	1.54	0.00	0.00	0.00	0.00
	5	0.00	1.65	0.00	0.00	0.00	0.00
	6	0.00	1.54	0.00	0.00	0.00	0.00
	7	0.00	1.38	0.00	0.00	0.00	0.00
	8	0.00	1.49	0.00	0.00	0.00	0.00
	9	0.00	1.70	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
80	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.30	0.00	0.00	0.00	0.00
	3	0.00	1.30	0.00	0.00	0.00	0.00
	4	0.00	1.30	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	1.20	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	1.27	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
81	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	1.18	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	1.18	0.00	0.00	0.00	0.00
	5	0.00	1.22	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.09	0.00	0.00	0.00	0.00
	8	0.00	1.02	0.00	0.00	0.00	0.00
	9	0.00	1.06	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
82	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.06	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	0.85	0.00	0.00	0.00	0.00
	9	0.00	0.83	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
83	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.40	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	1.44	0.00	0.00	0.00	0.00
	5	0.00	1.53	0.00	0.00	0.00	0.00
	6	0.00	1.30	0.00	0.00	0.00	0.00
	7	0.00	1.20	0.00	0.00	0.00	0.00
	8	0.00	1.32	0.00	0.00	0.00	0.00
	9	0.00	1.47	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
84	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.51	0.00	0.00	0.00	0.00
	3	0.00	1.40	0.00	0.00	0.00	0.00
	4	0.00	1.55	0.00	0.00	0.00	0.00
	5	0.00	1.67	0.00	0.00	0.00	0.00
	6	0.00	1.47	0.00	0.00	0.00	0.00
	7	0.00	1.30	0.00	0.00	0.00	0.00
	8	0.00	1.48	0.00	0.00	0.00	0.00
	9	0.00	1.68	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.97	0.00	0.00	0.00	0.00
85	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.28	0.00	0.00	0.00	0.00
	3	0.00	1.26	0.00	0.00	0.00	0.00
	4	0.00	1.32	0.00	0.00	0.00	0.00
	5	0.00	1.38	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	1.10	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	1.26	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
86	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.19	0.00	0.00	0.00	0.00
	4	0.00	1.20	0.00	0.00	0.00	0.00
	5	0.00	1.24	0.00	0.00	0.00	0.00
	6	0.00	0.96	0.00	0.00	0.00	0.00
	7	0.00	1.00	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00
	9	0.00	1.04	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
87	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
99	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.97	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	0.87	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.88	0.00	0.00	0.00	0.00
	7	0.00	1.12	0.00	0.00	0.00	0.00
	8	0.00	0.73	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
100	1	0.00	0.87	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.86	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
101	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
102	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.83	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
103	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.96	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	1.04	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
104	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.84	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.76	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.93	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
105	1	0.00	0.87	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.95	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.86	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
106	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
107	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
108	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
109	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.17	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
110	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.86	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
111	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
112	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
113	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
114	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
115	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
116	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.75	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
117	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
118	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
119	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	1.26	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	1.15	0.00	0.00	0.00	0.00
	9	0.00	1.26	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
120	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.37	0.00	0.00	0.00	0.00
	3	0.00	1.17	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	1.30	0.00	0.00	0.00	0.00
	9	0.00	1.47	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.99	0.00	0.00	0.00	0.00
	9	0.00	1.05	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
122	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.84	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
123	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
124	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
125	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
126	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
127	1	0.00	1.00	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.03	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
128	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.23	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	1.23	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
129	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.35	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	1.27	0.00	0.00	0.00	0.00
	9	0.00	1.44	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
130	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	1.02	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
131	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
132	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
133	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
134	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.17	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
135	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.17	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
136	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.01	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
137	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.54	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	1.19	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
138	1	0.00	1.09	0.00	0.00	0.00	0.00
	2	0.00	1.32	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.58	0.00	0.00	0.00	0.00
	5	0.00	1.68	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	1.24	0.00	0.00	0.00	0.00
	9	0.00	1.40	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
139	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	1.34	0.00	0.00	0.00	0.00
	5	0.00	1.40	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.93	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
140	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.25	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
141	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	0.87	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.08	0.00	0.00	0.00	0.00
142	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
143	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.87	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
144	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.75	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
145	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.96	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
146	1	0.00	0.76	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.08	0.00	0.00	0.00	0.00
	4	0.00	1.26	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	1.17	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	1.21	0.00	0.00	0.00	0.00
	9	0.00	1.40	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
147	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	1.19	0.00	0.00	0.00	0.00
	3	0.00	1.05	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	1.19	0.00	0.00	0.00	0.00
	9	0.00	1.37	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
148	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	1.35	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
149	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	1.15	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	1.00	0.00	0.00	0.00	0.00
	7	0.00	0.77	0.00	0.00	0.00	0.00
	8	0.00	1.14	0.00	0.00	0.00	0.00
	9	0.00	1.32	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
150	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	1.29	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
152	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	1.25	0.00	0.00	0.00	0.00
	3	0.00	1.20	0.00	0.00	0.00	0.00
	4	0.00	1.20	0.00	0.00	0.00	0.00
	5	0.00	1.31	0.00	0.00	0.00	0.00
	6	0.00	1.43	0.00	0.00	0.00	0.00
	7	0.00	1.30	0.00	0.00	0.00	0.00
	8	0.00	1.27	0.00	0.00	0.00	0.00
	9	0.00	1.47	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
153	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.18	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.32	0.00	0.00	0.00	0.00
	6	0.00	1.38	0.00	0.00	0.00	0.00
	7	0.00	1.24	0.00	0.00	0.00	0.00
	8	0.00	1.26	0.00	0.00	0.00	0.00
	9	0.00	1.46	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
154	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.16	0.00	0.00	0.00	0.00
	4	0.00	1.23	0.00	0.00	0.00	0.00
	5	0.00	1.33	0.00	0.00	0.00	0.00
	6	0.00	1.33	0.00	0.00	0.00	0.00
	7	0.00	1.18	0.00	0.00	0.00	0.00
	8	0.00	1.25	0.00	0.00	0.00	0.00
	9	0.00	1.44	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
155	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	1.23	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.24	0.00	0.00	0.00	0.00
	5	0.00	1.35	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	1.28	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.24	0.00	0.00	0.00	0.00
	9	0.00	1.43	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
156	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.25	0.00	0.00	0.00	0.00
	5	0.00	1.36	0.00	0.00	0.00	0.00
	6	0.00	1.23	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.00	0.00	0.00	0.00
	8	0.00	1.22	0.00	0.00	0.00	0.00
	9	0.00	1.41	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
157	1	0.00	0.81	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	1.26	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
158	1	0.00	0.82	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	1.07	0.00	0.00	0.00	0.00
	9	0.00	1.24	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.81	0.00	0.00	0.00	0.00
159	1	0.00	0.82	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	1.27	0.00	0.00	0.00	0.00
	5	0.00	1.37	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	1.21	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.82	0.00	0.00	0.00	0.00
160	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
161	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.33	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
162	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
163	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.35	0.00	0.00	0.00	0.00
	5	0.00	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
164	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.27	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
166	1	0.00	0.62	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.27	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
167	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.28	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.03	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
168	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.01	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
169	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
170	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
171	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.28	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
172	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.28	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
173	1	0.00	0.76	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.29	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
174	1	0.00	0.55	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
175	1	0.00	0.55	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
176	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.45	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
177	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
178	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
179	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
180	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.06	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
181	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.06	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
182	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.23	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.27	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
183	1	0.00	0.42	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
184	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.11	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.15	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
185	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
186	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
187	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.73	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
188	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.55	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
189	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.45	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.43	0.00	0.00	0.00	0.00
190	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
191	1	0.00	0.42	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
192	1	0.00	0.42	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.27	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.42	0.00	0.00	0.00	0.00
193	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.01	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.42	0.00	0.00	0.00	0.00
194	1	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.74	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
195	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.08	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.03	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.30	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
196	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
197	1	0.00	0.26	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
198	1	0.00	0.26	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
199	1	0.00	0.26	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
200	1	0.00	0.27	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
201	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
202	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
203	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.46	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
204	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
205	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
206	1	0.00	0.27	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.27	0.00	0.00	0.00	0.00
207	1	0.00	0.27	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.27	0.00	0.00	0.00	0.00
208	1	0.00	0.28	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.27	0.00	0.00	0.00	0.00
	11	0.00	0.27	0.00	0.00	0.00	0.00
209	1	0.00	0.14	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.18	0.00	0.00	0.00	0.00
	9	0.00	0.21	0.00	0.00	0.00	0.00
	10	0.00	0.13	0.00	0.00	0.00	0.00
	11	0.00	0.14	0.00	0.00	0.00	0.00
210	1	0.00	0.11	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.11	0.00	0.00	0.00	0.00
211	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
212	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
213	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
214	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.07	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
215	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.07	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
216	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.07	0.00	0.00	0.00	0.00
	5	0.00	0.04	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
217	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.08	0.00	0.00	0.00	0.00
	5	0.00	0.04	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
218	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.08	0.00	0.00	0.00	0.00
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
219	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.08	0.00	0.00	0.00	0.00
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
220	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.09	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
221	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.11	0.00	0.00	0.00	0.00
	5	0.00	0.07	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
222	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.11	0.00	0.00	0.00	0.00
	5	0.00	0.08	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
223	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.08	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.27	0.00	0.00	0.00	0.00
224	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.03	0.00	0.00	0.00	0.00
	3	0.00	0.04	0.00	0.00	0.00	0.00
	4	0.00	0.06	0.00	0.00	0.00	0.00
	5	0.00	0.04	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
225	1	0.00	0.10	0.00	0.00	0.00	0.00
	2	0.00	0.05	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.04	0.00	0.00	0.00	0.00
	5	0.00	0.02	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.10	0.00	0.00	0.00	0.00
	11	0.00	0.10	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

==========

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 850.0 X 850.0 MMS, TIED
AREA OF STEEL REQUIRED = 14970.2 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
48 - 20 MM	2.087	106	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 30,2020 TIME= 9:17:41 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 9 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F3

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    13:19:24                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F3.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     7. UNIT METER MTON
     8. JOINT COORDINATES
     9. 1 0 0 0; 2 0 3.5 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1.
    10. 11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5
    11. 16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1.
    12. 21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1.
    13. 26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5
    14. 31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5
    15. 36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5
    16. 41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75
    17. 46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 63 1.25 0 -0.75
    18. 64 1.25 0 -1; 65 1.25 0 -0.5; 66 1.25 0 -0.25; 67 1.25 0 0; 68 1 0 -0.75
    19. 69 1 0 -1; 70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1.
    20. 75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1.
    21. 80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1.
    22. 85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 99 1.25 0 0.25; 100 1.25 0 0.5
    23. 101 1.25 0 0.75; 102 1.25 0 1; 103 1 0 0.25; 104 1 0 0.5; 105 1 0 0.75
    24. 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75; 110 0.75 0 1
    25. 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1; 115 0.25 0 0.25
    26. 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1; 119 -1.25 0 -0.75
    27. 120 -1.25 0 -1; 121 -1.25 0 -0.5; 122 -1.25 0 -0.25; 123 -1.25 0 0
    28. 124 -1.25 0 0.25; 125 -1.25 0 0.5; 126 -1.25 0 0.75; 127 -1.25 0 1
    29. 128 -1.5 0 -0.75; 129 -1.5 0 -1; 130 -1.5 0 -0.5; 131 -1.5 0 -0.25
    30. 132 -1.5 0 0; 133 -1.5 0 0.25; 134 -1.5 0 0.5; 135 -1.5 0 0.75; 136 -1.5 0 1
    31. 185 1.5 0 -1; 186 1.5 0 -0.75; 187 1.5 0 -0.5; 188 1.5 0 -0.25; 189 1.5 0 0
    32. 190 1.5 0 0.25; 191 1.5 0 0.5; 192 1.5 0 0.75; 193 1.5 0 1; 194 0 0 -1.25
    33. 195 -0.25 0 -1.25; 196 -0.5 0 -1.25; 197 -0.75 0 -1.25; 198 -1 0 -1.25
    34. 199 1.25 0 -1.25; 200 1 0 -1.25; 201 0.75 0 -1.25; 202 0.5 0 -1.25
    35. 203 0.25 0 -1.25; 204 -1.25 0 -1.25; 205 -1.5 0 -1.25; 206 1.5 0 -1.25
    36. 207 0 0 1.25; 208 -0.25 0 1.25; 209 -0.5 0 1.25; 210 -0.75 0 1.25
    37. 211 -1 0 1.25; 212 1.25 0 1.25; 213 1 0 1.25; 214 0.75 0 1.25; 215 0.5 0 1.25
    38. 216 0.25 0 1.25; 217 -1.25 0 1.25; 218 -1.5 0 1.25; 219 1.5 0 1.25
    39. 220 -1.75 0 -0.75; 221 -1.75 0 -1; 222 -1.75 0 -0.5; 223 -1.75 0 -0.25
```

```
40. 224 -1.75 0 0; 225 -1.75 0 0.25; 226 -1.75 0 0.5; 227 -1.75 0 0.75
41. 228 -1.75 0 1; 229 -1.75 0 -1.25; 230 -1.75 0 1.25; 231 1.75 0 -1.
42. 232 1.75 0 -0.75; 233 1.75 0 -0.5; 234 1.75 0 -0.25; 235 1.75 0 0
43. 236 1.75 0 0.25; 237 1.75 0 0.5; 238 1.75 0 0.75; 239 1.75 0 1
44. 240 1.75 0 -1.25; 241 1.75 0 1.25; 242 0 0 -1.5; 243 -0.25 0 -1.5
45. 244 -0.5 0 -1.5; 245 -0.75 0 -1.5; 246 -1 0 -1.5; 247 1.25 0 -1.5
46. 248 1 0 -1.5; 249 0.75 0 -1.5; 250 0.5 0 -1.5; 251 0.25 0 -1.5
47. 252 -1.25 0 -1.5; 253 -1.5 0 -1.5; 254 1.5 0 -1.5; 255 -1.75 0 -1.5
48. 256 1.75 0 -1.5; 257 0 0 1.5; 258 -0.25 0 1.5; 259 -0.5 0 1.5; 260 -0.75 0 1.5
49. 261 -1 0 1.5; 262 1.25 0 1.5; 263 1 0 1.5; 264 0.75 0 1.5; 265 0.5 0 1.5
50. 266 0.25 0 1.5; 267 -1.25 0 1.5; 268 -1.5 0 1.5; 269 1.5 0 1.5
51. 270 -1.75 0 1.5; 271 1.75 0 1.5; 272 0 0 -1.75; 273 -0.25 0 -1.75
52. 274 -0.5 0 -1.75; 275 -0.75 0 -1.75; 276 -1 0 -1.75; 277 1.25 0 -1.75
53. 278 1 0 -1.75; 279 0.75 0 -1.75; 280 0.5 0 -1.75; 281 0.25 0 -1.75
54. 282 -1.25 0 -1.75; 283 -1.5 0 -1.75; 284 1.5 0 -1.75; 285 -1.75 0 -1.75
55. 286 1.75 0 -1.75; 287 0 0 1.75; 288 -0.25 0 1.75; 289 -0.5 0 1.75
56. 290 -0.75 0 1.75; 291 -1 0 1.75; 292 1.25 0 1.75; 293 1 0 1.75
57. 294 0.75 0 1.75; 295 0.5 0 1.75; 296 0.25 0 1.75; 297 -1.25 0 1.75
58. 298 -1.5 0 1.75; 299 1.5 0 1.75; 300 -1.75 0 1.75; 301 1.75 0 1.75
59. MEMBER INCIDENCES
60. 101 2 1
61. ELEMENT INCIDENCES SHELL
62. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
63. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
64. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
65. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
66. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
67. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
68. 35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70
69. 52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76
70. 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84
71. 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11
72. 67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103
73. 83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107
74. 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111
75. 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115
76. 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32
77. 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119
78. 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124
79. 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128
80. 112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132
81. 115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135
82. 162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66
83. 166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100
84. 169 192 193 102 101; 170 194 8 13 195; 171 195 13 20 196; 172 196 20 25 197
85. 173 197 25 9 198; 174 199 64 69 200; 175 200 69 74 201; 176 201 74 79 202
86. 177 202 79 84 203; 178 203 84 8 194; 179 198 9 120 204; 180 204 120 129 205
87. 181 206 185 64 199; 182 5 207 208 38; 183 38 208 209 42; 184 42 209 210 46
88. 185 46 210 211 6; 186 102 212 213 106; 187 106 213 214 110
89. 188 110 214 215 114; 189 114 215 216 118; 190 118 216 207 5; 191 6 211 217 127
90. 192 127 217 218 136; 193 193 219 212 102; 194 129 128 220 221
91. 195 128 130 222 220; 196 130 131 223 222; 197 131 132 224 223
92. 198 132 133 225 224; 199 133 134 226 225; 200 134 135 227 226
93. 201 135 136 228 227; 202 205 129 221 229; 203 136 218 230 228
94. 204 231 232 186 185; 205 232 233 187 186; 206 233 234 188 187
95. 207 234 235 189 188; 208 235 236 190 189; 209 236 237 191 190
```

```
 96. 210 237 238 192 191; 211 238 239 193 192; 212 240 231 185 206
 97. 213 239 241 219 193; 214 242 194 195 243; 215 243 195 196 244
 98. 216 244 196 197 245; 217 245 197 198 246; 218 247 199 200 248
 99. 219 248 200 201 249; 220 249 201 202 250; 221 250 202 203 251
100. 222 251 203 194 242; 223 246 198 204 252; 224 252 204 205 253
101. 225 254 206 199 247; 226 253 205 229 255; 227 256 240 206 254
102. 228 207 257 258 208; 229 208 258 259 209; 230 209 259 260 210
103. 231 210 260 261 211; 232 212 262 263 213; 233 213 263 264 214
104. 234 214 264 265 215; 235 215 265 266 216; 236 216 266 257 207
105. 237 211 261 267 217; 238 217 267 268 218; 239 219 269 262 212
106. 240 218 268 270 230; 241 241 271 269 219; 242 272 242 243 273
107. 243 273 243 244 274; 244 274 244 245 275; 245 275 245 246 276
108. 246 277 247 248 278; 247 278 248 249 279; 248 279 249 250 280
109. 249 280 250 251 281; 250 281 251 242 272; 251 276 246 252 282
110. 252 282 252 253 283; 253 284 254 247 277; 254 283 253 255 285
111. 255 286 256 254 284; 256 257 287 288 258; 257 258 288 289 259
112. 258 259 289 290 260; 259 260 290 291 261; 260 262 292 293 263
113. 261 263 293 294 264; 262 264 294 295 265; 263 265 295 296 266
114. 264 266 296 287 257; 265 261 291 297 267; 266 267 297 298 268
115. 267 269 299 292 262; 268 268 298 300 270; 269 271 301 299 269
116. START GROUP DEFINITION
117. ELEMENT
118. _MAX_BM 5 TO 7 9 TO 11 13 TO 20 22 TO 24 26 TO 36 49 TO 67 81 TO 96 -
119. 98 TO 100 102 TO 117 162 TO 269
120. _MAX_SF 49 TO 52 81 TO 84 110 TO 117 162 TO 269
121. END GROUP DEFINITION
122. ELEMENT PROPERTY
123. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 THICKNESS 0.65
124. DEFINE MATERIAL START
125. ISOTROPIC CONCRETE
126. E 2.21467E+006
127. POISSON 0.17
128. DENSITY 2.40262
129. ALPHA 1E-005
130. DAMP 0.05
131. TYPE CONCRETE
132. STRENGTH FCU 2812.28
133. END DEFINE MATERIAL
134. MEMBER PROPERTY AMERICAN
135. 101 PRIS YD 0.85 ZD 0.65
136. CONSTANTS
137. MATERIAL CONCRETE ALL
138. SUPPORTS
139. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 268 -
140. 269 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500

12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.062500
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.062500
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500

81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.062500
103	0.062500
104	0.062500
105	0.062500
106	0.062500
107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500
113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
128	0.062500
129	0.062500
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.062500
185	0.062500
186	0.062500
187	0.062500
188	0.062500
189	0.062500
190	0.062500
191	0.062500
192	0.062500
193	0.062500
194	0.062500
195	0.062500

196	0.062500
197	0.062500
198	0.062500
199	0.062500
200	0.062500
201	0.062500
202	0.062500
203	0.062500
204	0.062500
205	0.062500
206	0.062500
207	0.062500
208	0.062500
209	0.062500
210	0.062500
211	0.062500
212	0.062500
213	0.062500
214	0.062500
215	0.062500
216	0.062500
217	0.062500
218	0.062500
219	0.062500
220	0.031250
221	0.031250
222	0.031250
223	0.031250
224	0.031250
225	0.031250
226	0.031250
227	0.031250
228	0.031250
229	0.031250
230	0.031250
231	0.031250
232	0.031250
233	0.031250
234	0.031250
235	0.031250
236	0.031250
237	0.031250
238	0.031250
239	0.031250
240	0.031250
241	0.031250
242	0.062500
243	0.062500
244	0.062500
245	0.062500
246	0.062500
247	0.062500
248	0.062500
249	0.062500
250	0.062500
251	0.062500

252	0.062500
253	0.062500
254	0.062500
255	0.031250
256	0.031250
257	0.062500
258	0.062500
259	0.062500
260	0.062500
261	0.062500
262	0.062500
263	0.062500
264	0.062500
265	0.062500
266	0.062500
267	0.062500
268	0.062500
269	0.062500
270	0.031250
271	0.031250
272	0.031250
273	0.031250
274	0.031250
275	0.031250
276	0.031250
277	0.031250
278	0.031250
279	0.031250
280	0.031250
281	0.031250
282	0.031250
283	0.031250
284	0.031250
285	0.015625
286	0.015625
287	0.031250
288	0.031250
289	0.031250
290	0.031250
291	0.031250
292	0.031250
293	0.031250
294	0.031250
295	0.031250
296	0.031250
297	0.031250
298	0.031250
299	0.031250
300	0.015625
301	0.015625
TOTAL	12.250000

```
141. LOAD 1 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR
142. SELFWEIGHT Y -1
143. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 607
144. JOINT LOAD
145. 2 FX -0.5 FY -17.3 FZ 0.1
```

```
146. ELEMENT LOAD
147. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
148. LOAD 2 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
149. SELFWEIGHT Y -1
150. ELEMENT LOAD
151. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
152. JOINT LOAD
153. 2 FX 1 FY 11.7 FZ -4.7
154. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
155. SELFWEIGHT Y -1
156. ELEMENT LOAD
157. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
158. JOINT LOAD
159. 2 FX 4.1 FY -8.5 FZ -1.3
160. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
161. SELFWEIGHT Y -1
162. ELEMENT LOAD
163. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
164. JOINT LOAD
165. 2 FX -0.5 FY -10.3 FZ -1.4
166. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
167. SELFWEIGHT Y -1
168. ELEMENT LOAD
169. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
170. JOINT LOAD
171. 2 FX -0.5 FY -11.3 FZ -1.1
172. LOAD 6 LOADTYPE NONE  TITLE 0.6DL+WLX1
173. SELFWEIGHT Y -1
174. ELEMENT LOAD
175. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
176. JOINT LOAD
177. 2 FX 1.9 FY 31.3 FZ -6.3
178. LOAD 7 LOADTYPE NONE  TITLE 0.6DL+WLX2
179. SELFWEIGHT Y -1
180. JOINT LOAD
181. 2 FX 6.1 FY 4.4 FZ -1.8
182. ELEMENT LOAD
183. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -2.7
184. LOAD 8 LOADTYPE NONE  TITLE 0.6DL+WLZ1
185. SELFWEIGHT Y -1
186. ELEMENT LOAD
187. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -2.7
188. JOINT LOAD
189. 2 FX -0.2 FY 2 FZ -1.9
190. LOAD 9 LOADTYPE NONE  TITLE 0.6DL+WLZ2
191. SELFWEIGHT Y -1
192. ELEMENT LOAD
193. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -2.7
194. JOINT LOAD
195. 2 FX -0.2 FY 0.6 FZ -1.4
196. LOAD 10 LOADTYPE NONE  TITLE DL+LL
197. SELFWEIGHT Y -1
198. ELEMENT LOAD
199. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
200. JOINT LOAD
201. 2 FX -0.3 FY -13.8 FZ 0.2
```

```
LOAD 11 LOADTYPE NONE  TITLE DL+LR
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4.5
JOINT LOAD
2 FX -0.6 FY -18.4 FZ 0.1
*****************************************************************
*LOAD CASES FOR FOUNDATION DESIGN
LOAD 100 LOADTYPE NONE  TITLE 1.4(DL+LL)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -6.3
JOINT LOAD
*CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 607
2 FX -0.5 FY -19.3 FZ 0.3
************************************
LOAD 101 LOADTYPE NONE  TITLE 1.4DL+1.7LL + 0.5LR
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -6.3
JOINT LOAD
2 FX -0.6 FY -21.6 FZ 0.2
*****************************************
LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX 0.3 FY -4.7 FZ -3.2
*************************************************
LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX 2.3 FY -18.1 FZ -0.9
*************************************************
LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX -0.8 FY -19.3 FZ -1.
*************************************************
LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX -0.8 FY -20 FZ -0.8
*************************************************
LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
```

```
2 FX 2.8 FY 42.9 FZ -10.1
**************************************************
LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX 9.4 FY 0 FZ -2.8
**************************************************
LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX -0.5 FY -4.2 FZ -3.1
**************************************************
LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -5.4
JOINT LOAD
2 FX -0.5 FY -6.3 FZ -2.3
**************************************************
LOAD 110 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4
JOINT LOAD
2 FX 3.1 FY 51.2 FZ -10.2
**************************************************
LOAD 111 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4
JOINT LOAD
2 FX 9.7 FY 8.2 FZ -2.9
**************************************************
LOAD 112 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4
JOINT LOAD
2 FX -0.2 FY 4 FZ -3.1
**************************************************
LOAD 113 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269 PR GY -4
JOINT LOAD
2 FX -0.2 FY 2 FZ -2.4
**************************************************
PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	226	NUMBER OF MEMBERS	1
NUMBER OF PLATES	196	NUMBER OF SOLIDS	0
NUMBER OF SURFACES	0	NUMBER OF SUPPORTS	225

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 137/ 25/ 78 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 681
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 54 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.8/ 165027.7 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**NOTE-Tension/Compression converged after 1 iterations, Case= 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 4

**NOTE-Tension/Compression converged after 1 iterations, Case= 5

**NOTE-Tension/Compression converged after 1 iterations, Case= 6

**NOTE-Tension/Compression converged after 1 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

```
**START ITERATION NO.          7
**START ITERATION NO.          8
**START ITERATION NO.          9

**NOTE-Tension/Compression converged after  9 iterations, Case=  110



**START ITERATION NO.          2
**START ITERATION NO.          3

**NOTE-Tension/Compression converged after  3 iterations, Case=  111



**NOTE-Tension/Compression converged after  1 iterations, Case=  112



**NOTE-Tension/Compression converged after  1 iterations, Case=  113


 310. LOAD LIST 1 TO 11
 311. PRINT SUPPORT REACTION LIST 1 TO 3 5 6 8 9 11 TO 49 63 TO 87 99 TO 136 185 -
 312. 186 TO 271
```

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.50	0.51	-0.10	0.00	0.00	0.00
	2	-1.00	0.34	4.70	0.00	0.00	0.00
	3	-4.10	0.46	1.30	0.00	0.00	0.00
	4	0.50	0.47	1.40	0.00	0.00	0.00
	5	0.50	0.47	1.10	0.00	0.00	0.00
	6	-1.90	0.22	6.30	0.00	0.00	0.00
	7	-6.10	0.27	1.80	0.00	0.00	0.00
	8	0.20	0.28	1.90	0.00	0.00	0.00
	9	0.20	0.29	1.40	0.00	0.00	0.00
	10	0.30	0.49	-0.20	0.00	0.00	0.00
	11	0.60	0.52	-0.10	0.00	0.00	0.00
3	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
5	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
6	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
8	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
9	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
11	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
12	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
13	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
14	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
15	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
16	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
17	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
18	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
19	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
20	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
21	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
22	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
23	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
24	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
25	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.50	0.00	0.00	0.00	0.00
26	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
27	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
28	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
29	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
30	1	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
31	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
32	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
33	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
34	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
35	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
36	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
37	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
38	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
39	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
40	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
41	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
42	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
43	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
44	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
45	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
46	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
47	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
48	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
49	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
63	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
65	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
66	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
67	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
68	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
69	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
70	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
71	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
72	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
73	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
74	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
75	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
76	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
77	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
78	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
79	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
80	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
81	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
82	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
83	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
84	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.50	0.00	0.00	0.00	0.00
85	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
86	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
87	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
99	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
100	1	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
101	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
102	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
103	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
104	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
105	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
106	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
107	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
108	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
109	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
110	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
111	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
112	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
113	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
114	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
115	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
116	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
117	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
118	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
119	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
120	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
122	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
123	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
124	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
125	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
126	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
127	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
128	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
129	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
130	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
131	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
132	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
133	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
134	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
135	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
136	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
185	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
186	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
187	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
188	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
189	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.48	0.00	0.00	0.00	0.00
190	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
191	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
192	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
193	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
194	1	0.00	0.49	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
195	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
196	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
197	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
198	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
199	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
200	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
201	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
202	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
203	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
204	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
205	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
206	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
207	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
208	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
209	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
210	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
211	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
212	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
213	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
214	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
215	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
216	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
217	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
218	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
219	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
220	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
221	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
222	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
223	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
224	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
225	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.15	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
226	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
227	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
228	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
229	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
230	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.11	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
231	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
232	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
233	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
234	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
235	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.24	0.00	0.00	0.00	0.00
236	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
237	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
238	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
239	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.15	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
240	1	0.00	0.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
241	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
242	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
243	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
244	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
245	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
246	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
247	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
248	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
249	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
250	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
251	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
252	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
253	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
254	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.46	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
255	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.17	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
256	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
257	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
258	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
259	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
260	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
261	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
262	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
263	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
264	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
265	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
266	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
267	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.05	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
268	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.05	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
269	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
270	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
271	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.26	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

313. PRINT JOINT DISPLACEMENTS LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	-0.0263	-0.1565	0.0066	0.0000	0.0000	0.0001
	2	0.0526	-0.0972	-0.3121	-0.0011	0.0000	-0.0002
	3	0.2158	-0.1385	-0.0863	-0.0003	0.0000	-0.0007
	4	-0.0263	-0.1422	-0.0930	-0.0003	0.0000	0.0001
	5	-0.0263	-0.1442	-0.0730	-0.0003	0.0000	0.0001
	6	0.1000	-0.0571	-0.4183	-0.0015	0.0000	-0.0003
	7	0.3210	-0.0788	-0.1195	-0.0004	0.0000	-0.0011
	8	-0.0105	-0.0837	-0.1262	-0.0004	0.0000	0.0000
	9	-0.0105	-0.0865	-0.0930	-0.0003	0.0000	0.0000
	10	-0.0158	-0.1493	0.0133	0.0000	0.0000	0.0001
	11	-0.0316	-0.1587	0.0066	0.0000	0.0000	0.0001

********** END OF LATEST ANALYSIS RESULT **********

314. LOAD LIST 100 TO 113
315. START CONCRETE DESIGN

```
316. CODE ACI
317. CLB 0.05 MEMB 101
318. CLS 0.05 ALL
319. CLT 0.05 MEMB 101
320. FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 194 TO 203 214 -
321. 215 TO 224 226 228 TO 238 240 242 TO 252 254 256 TO 266 268
322. FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 -
323. 194 TO 203 214 TO 224 226 228 TO 238 240 242 TO 252 254 256 TO 266 268
324. FYSEC 42813 ALL
325. MAXMAIN 32 ALL
326. MINMAIN 12 ALL
327. CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269
328. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269
329. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 269
330. DESIGN COLUMN 101
```

==========

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	100	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

331. END CONCRETE DESIGN
332. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 13:21: 2 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 10 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F4

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    15:43:51                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F4.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 3.5 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1.
     9. 11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5
    10. 16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1.
    11. 21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1.
    12. 26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5
    13. 31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5
    14. 36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5
    15. 41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75
    16. 46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 63 1.25 0 -0.75
    17. 64 1.25 0 -1; 65 1.25 0 -0.5; 66 1.25 0 -0.25; 67 1.25 0 0; 68 1 0 -0.75
    18. 69 1 0 -1; 70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1.
    19. 75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1.
    20. 80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1.
    21. 85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 99 1.25 0 0.25; 100 1.25 0 0.5
    22. 101 1.25 0 0.75; 102 1.25 0 1; 103 1 0 0.25; 104 1 0 0.5; 105 1 0 0.75
    23. 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75; 110 0.75 0 1
    24. 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1; 115 0.25 0 0.25
    25. 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1; 119 -1.25 0 -0.75
    26. 120 -1.25 0 -1; 121 -1.25 0 -0.5; 122 -1.25 0 -0.25; 123 -1.25 0 0
    27. 124 -1.25 0 0.25; 125 -1.25 0 0.5; 126 -1.25 0 0.75; 127 -1.25 0 1
    28. 128 -1.5 0 -0.75; 129 -1.5 0 -1; 130 -1.5 0 -0.5; 131 -1.5 0 -0.25
    29. 132 -1.5 0 0; 133 -1.5 0 0.25; 134 -1.5 0 0.5; 135 -1.5 0 0.75; 136 -1.5 0 1
    30. 185 1.5 0 -1; 186 1.5 0 -0.75; 187 1.5 0 -0.5; 188 1.5 0 -0.25; 189 1.5 0 0
    31. 190 1.5 0 0.25; 191 1.5 0 0.5; 192 1.5 0 0.75; 193 1.5 0 1
    32. MEMBER INCIDENCES
    33. 101 2 1
    34. ELEMENT INCIDENCES SHELL
    35. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
    36. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
    37. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
    38. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
```

```
39. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
40. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
41. 35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70
42. 52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76
43. 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84
44. 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11
45. 67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103
46. 83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107
47. 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111
48. 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115
49. 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32
50. 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119
51. 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124
52. 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128
53. 112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132
54. 115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135
55. 162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66
56. 166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100
57. 169 192 193 102 101
58. START GROUP DEFINITION
59. ELEMENT
60. _MAX_BM 5 TO 7 9 TO 20 22 TO 36 49 TO 67 81 TO 96 98 TO 100 102 TO 117 162 -
61. 163 TO 169
62. _MAX_SF 5 9 13 17 TO 20 24 28 32 TO 36 49 TO 57 61 65 81 TO 88 92 96 100 102 -
63. 103 TO 117 162 TO 169
64. END GROUP DEFINITION
65. ELEMENT PROPERTY
66. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 THICKNESS 0.5
67. DEFINE MATERIAL START
68. ISOTROPIC CONCRETE
69. E 2.21467E+006
70. POISSON 0.17
71. DENSITY 2.40262
72. ALPHA 1E-005
73. DAMP 0.05
74. TYPE CONCRETE
75. STRENGTH FCU 2812.28
76. END DEFINE MATERIAL
77. MEMBER PROPERTY AMERICAN
78. 101 PRIS YD 0.85 ZD 0.65
79. CONSTANTS
80. MATERIAL CONCRETE ALL
81. SUPPORTS
82. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 168 -
83. 169 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.031250
6	0.031250
8	0.031250
9	0.031250
11	0.062500

12	0.062500
13	0.031250
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.031250
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.031250
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.031250
39	0.062500
40	0.062500
41	0.062500
42	0.031250
43	0.062500
44	0.062500
45	0.062500
46	0.031250
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.031250
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.031250
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.031250
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.031250
80	0.062500

81	0.062500
82	0.062500
83	0.062500
84	0.031250
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.031250
103	0.062500
104	0.062500
105	0.062500
106	0.031250
107	0.062500
108	0.062500
109	0.062500
110	0.031250
111	0.062500
112	0.062500
113	0.062500
114	0.031250
115	0.062500
116	0.062500
117	0.062500
118	0.031250
119	0.062500
120	0.031250
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.031250
128	0.031250
129	0.015625
130	0.031250
131	0.031250
132	0.031250
133	0.031250
134	0.031250
135	0.031250
136	0.015625
185	0.015625
186	0.031250
187	0.031250
188	0.031250
189	0.031250
190	0.031250
191	0.031250
192	0.031250
193	0.015625
TOTAL	6.000000

84. LOAD 1 LOADTYPE NONE TITLE DL+0.75*LL+0.75*LR

```
 85. SELFWEIGHT Y -1
 86. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 730
 87. JOINT LOAD
 88. 2 FX 0.0 FY -10.1 FZ 5.7
 90. ELEMENT LOAD
 91. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
 92. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
 93. LOAD 2 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
 94. SELFWEIGHT Y -1
 95. ELEMENT LOAD
 96. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
 97. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
 98. JOINT LOAD
 99. 2 FX 0.1 FY -10.1 FZ 1.3
101. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
102. SELFWEIGHT Y -1
103. ELEMENT LOAD
104. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
105. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
106. JOINT LOAD
107. 2 FX 0.1 FY -10.1 FZ 5.2
109. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
110. SELFWEIGHT Y -1
111. ELEMENT LOAD
112. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
113. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
114. JOINT LOAD
115. 2 FX 0.0 FY -10.1 FZ 5.9
117. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
118. SELFWEIGHT Y -1
119. ELEMENT LOAD
120. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
121. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
122. JOINT LOAD
123. 2 FX 0.0 FY -10.1 FZ 5.9
125. LOAD 6 LOADTYPE NONE  TITLE 0.6DL+WLX1
126. SELFWEIGHT Y -1
127. ELEMENT LOAD
128. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -2.7
129. 49 TO 68 81 TO 100 162 TO 169 PR GY -6
130. JOINT LOAD
131. 2 FX 0.2 FY -2.7 FZ -5.8
133. LOAD 7 LOADTYPE NONE  TITLE 0.6DL+WLX2
134. SELFWEIGHT Y -1
135. JOINT LOAD
136. 2 FX 0.1 FY -2.7 FZ -0.7
138. ELEMENT LOAD
139. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -2.7
140. 49 TO 68 81 TO 100 162 TO 169 PR GY -6
141. LOAD 8 LOADTYPE NONE  TITLE 0.6DL+WLZ1
142. SELFWEIGHT Y -1
143. ELEMENT LOAD
144. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -2.7
145. 49 TO 68 81 TO 100 162 TO 169 PR GY -6
146. JOINT LOAD
147. 2 FX 0.0 FY -2.7 FZ 0.3
```

```
149. LOAD 9 LOADTYPE NONE  TITLE 0.6DL+WLZ2
150. SELFWEIGHT Y -1
151. ELEMENT LOAD
152. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -2.7
153. 49 TO 68 81 TO 100 162 TO 169 PR GY -6
154. JOINT LOAD
155. 2 FX 0.0 FY -2.7 FZ 0.3
158. LOAD 10 LOADTYPE NONE  TITLE DL+LL
159. SELFWEIGHT Y -1
160. ELEMENT LOAD
161. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
162. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
163. JOINT LOAD
164. 2 FX 0.0 FY -11.3 FZ 5.7
167. LOAD 11 LOADTYPE NONE  TITLE DL+LR
168. SELFWEIGHT Y -1
169. ELEMENT LOAD
170. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4.5
171. 49 TO 68 81 TO 100 162 TO 169 PR GY -10
172. JOINT LOAD
173. 2 FX 0.0 FY -6.5 FZ 5.6
176. ************************************************************88
177. ************************************************************
178. *LOAD CASES FOR FOUNDATION DESIGN
179. LOAD 100 LOADTYPE NONE  TITLE 1.4(DL+LL)
180. SELFWEIGHT Y -1
181. ELEMENT LOAD
182. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -6.3
183. 49 TO 68 81 TO 100 162 TO 169 PR GY -14
184. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 730
185. JOINT LOAD
186. 2 FX 0.0 FY -15.9 FZ 8.0
189. ************************************
190. LOAD 101 LOADTYPE NONE  TITLE 1.4DL+1.7LL + 0.5LR
191. SELFWEIGHT Y -1
192. ELEMENT LOAD
193. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -6.3
194. 49 TO 68 81 TO 100 162 TO 169 PR GY -14
195. JOINT LOAD
196. 2 FX 0.0 FY -17.3 FZ 8.0
199. ******************************************
200. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
201. SELFWEIGHT Y -1
202. ELEMENT LOAD
203. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
204. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
205. JOINT LOAD
206. 2 FX 0.1 FY -7.8 FZ 3.8
209. ******************************************************
210. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
211. SELFWEIGHT Y -1
212. ELEMENT LOAD
213. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
214. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
215. JOINT LOAD
216. 2 FX 0.1 FY -7.8 FZ 6.4
```

```
219. ******************************************************
220. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
221. SELFWEIGHT Y -1
222. ELEMENT LOAD
223. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
224. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
225. JOINT LOAD
226. 2 FX 0.0 FY -7.8 FZ 6.9
229. ******************************************************
230. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
231. SELFWEIGHT Y -1
232. ELEMENT LOAD
233. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
234. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
235. JOINT LOAD
236. 2 FX 0.0 FY -7.8 FZ 6.9
239. ******************************************************
240. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
241. SELFWEIGHT Y -1
242. ELEMENT LOAD
243. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
244. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
245. JOINT LOAD
246. 2 FX 0.3 FY -12.7 FZ -2.1
250. ******************************************************
251. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
252. SELFWEIGHT Y -1
253. ELEMENT LOAD
254. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
255. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
256. JOINT LOAD
257. 2 FX 0.3 FY -12.7 FZ 5.5
261. ******************************************************
262. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
263. SELFWEIGHT Y -1
264. ELEMENT LOAD
265. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
266. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
268. JOINT LOAD
269. 2 FX 0.0 FY -12.7 FZ 6.8
273. ******************************************************
274. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
275. SELFWEIGHT Y -1
276. ELEMENT LOAD
277. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -5.4
278. 49 TO 68 81 TO 100 162 TO 169 PR GY -12
279. JOINT LOAD
280. 2 FX 0.0 FY -12.7 FZ 6.8
284. ******************************************************
285. LOAD 110 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
286. SELFWEIGHT Y -1
287. ELEMENT LOAD
288. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4
289. 49 TO 68 81 TO 100 162 TO 169 PR GY -9
290. JOINT LOAD
291. 2 FX 0.2 FY -4.1 FZ -8.5
```

```
295. ******************************************************
296. LOAD 111 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
297. SELFWEIGHT Y -1
298. ELEMENT LOAD
299. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4
300. 49 TO 68 81 TO 100 162 TO 169 PR GY -9
301. JOINT LOAD
302. 2 FX 0.2 FY -4.1 FZ -0.9
306. ******************************************************
307. LOAD 112 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
308. SELFWEIGHT Y -1
309. ELEMENT LOAD
310. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4
311. 49 TO 68 81 TO 100 162 TO 169 PR GY -9
312. JOINT LOAD
313. 2 FX 0.0 FY -4.1 FZ 0.4
317. ******************************************************
318. LOAD 113 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
319. SELFWEIGHT Y -1
320. ELEMENT LOAD
321. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169 PR GY -4
322. 49 TO 68 81 TO 100 162 TO 169 PR GY -9
323. JOINT LOAD
324. 2 FX 0.0 FY -4.1 FZ 0.4
328. ******************************************************
329. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**118**	**NUMBER OF MEMBERS**	**1**
NUMBER OF PLATES	**96**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**117**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 95/ 15/ 48 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 357
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 18 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.8/ 164801.0 MB

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 3

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 4

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 5

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 6

**NOTE-Tension/Compression converged after 1 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 10

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 11

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 100

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 101

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 102

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 103

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 104

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 107

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 108

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 109

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

330. LOAD LIST 1 TO 11
331. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	0.84	-5.70	0.00	0.00	0.00
	2	-0.10	0.84	-1.30	0.00	0.00	0.00
	3	-0.10	0.84	-5.20	0.00	0.00	0.00
	4	0.00	0.83	-5.90	0.00	0.00	0.00
	5	0.00	0.83	-5.90	0.00	0.00	0.00
	6	-0.20	0.48	5.80	0.00	0.00	0.00
	7	-0.10	0.52	0.70	0.00	0.00	0.00
	8	0.00	0.52	-0.30	0.00	0.00	0.00
	9	0.00	0.52	-0.30	0.00	0.00	0.00
	10	0.00	0.85	-5.70	0.00	0.00	0.00
	11	0.00	0.79	-5.60	0.00	0.00	0.00
3	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
5	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
6	1	0.00	0.55	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.18	0.00	0.00	0.00	0.00
	9	0.00	0.18	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
8	1	0.00	0.10	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.09	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.09	0.00	0.00	0.00	0.00
9	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
11	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.49	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
12	1	0.00	0.28	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.26	0.00	0.00	0.00	0.00
	5	0.00	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
13	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.05	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.07	0.00	0.00	0.00	0.00
	11	0.00	0.05	0.00	0.00	0.00	0.00
14	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
15	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.45	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
16	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
17	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
18	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.75	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.75	0.00	0.00	0.00	0.00
	5	0.00	0.75	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
19	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.18	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.17	0.00	0.00	0.00	0.00
20	1	0.00	0.02	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.05	0.00	0.00	0.00	0.00
	4	0.00	0.01	0.00	0.00	0.00	0.00
	5	0.00	0.01	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.03	0.00	0.00	0.00	0.00
	11	0.00	0.01	0.00	0.00	0.00	0.00
21	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
22	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
23	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
24	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.14	0.00	0.00	0.00	0.00
	11	0.00	0.09	0.00	0.00	0.00	0.00
25	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.01	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.17	0.00	0.00	0.00	0.00
	9	0.00	0.17	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.00	0.00	0.00	0.00	0.00
26	1	0.00	0.28	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.26	0.00	0.00	0.00	0.00
	5	0.00	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00
27	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.36	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
28	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
29	1	0.00	0.04	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.02	0.00	0.00	0.00	0.00
	5	0.00	0.02	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.01	0.00	0.00	0.00	0.00
30	1	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.18	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.16	0.00	0.00	0.00	0.00
31	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
32	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.87	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.00	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
33	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
34	1	0.00	1.14	0.00	0.00	0.00	0.00
	2	0.00	0.90	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.15	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.53	0.00	0.00	0.00	0.00
	10	0.00	1.16	0.00	0.00	0.00	0.00
	11	0.00	1.10	0.00	0.00	0.00	0.00
35	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.07	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	1.07	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
36	1	0.00	1.29	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	1.25	0.00	0.00	0.00	0.00
	4	0.00	1.31	0.00	0.00	0.00	0.00
	5	0.00	1.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	1.31	0.00	0.00	0.00	0.00
	11	0.00	1.25	0.00	0.00	0.00	0.00
37	1	0.00	1.21	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	1.17	0.00	0.00	0.00	0.00
	4	0.00	1.23	0.00	0.00	0.00	0.00
	5	0.00	1.23	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.49	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	1.23	0.00	0.00	0.00	0.00
	11	0.00	1.17	0.00	0.00	0.00	0.00
38	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
39	1	0.00	0.82	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
40	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.95	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.99	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
41	1	0.00	1.13	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.14	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	1.14	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
42	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
43	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
44	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
45	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	1.00	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.06	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	1.06	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
46	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
47	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
48	1	0.00	0.81	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.82	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
49	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
63	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	1.27	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.29	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.30	0.00	0.00	0.00	0.00
	11	0.00	0.29	0.00	0.00	0.00	0.00
65	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	1.10	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
66	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.73	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	1.06	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
67	1	0.00	1.20	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.21	0.00	0.00	0.00	0.00
	4	0.00	1.20	0.00	0.00	0.00	0.00
	5	0.00	1.20	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.73	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	1.21	0.00	0.00	0.00	0.00
	11	0.00	1.17	0.00	0.00	0.00	0.00
68	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	1.22	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
69	1	0.00	0.26	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.27	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
70	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	1.05	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
71	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	1.00	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	0.88	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
72	1	0.00	1.13	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	1.14	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
73	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	1.17	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
74	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.25	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
75	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	1.00	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
76	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
77	1	0.00	1.06	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.06	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	1.07	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
78	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.88	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
79	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.17	0.00	0.00	0.00	0.00
	5	0.00	0.17	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.17	0.00	0.00	0.00	0.00
80	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
81	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.82	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
82	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
83	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.53	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
84	1	0.00	0.14	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.13	0.00	0.00	0.00	0.00
85	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.84	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
86	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.88	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
87	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
99	1	0.00	1.35	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.34	0.00	0.00	0.00	0.00
	4	0.00	1.36	0.00	0.00	0.00	0.00
	5	0.00	1.36	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.74	0.00	0.00	0.00	0.00
	10	0.00	1.37	0.00	0.00	0.00	0.00
	11	0.00	1.32	0.00	0.00	0.00	0.00
100	1	0.00	1.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	1.27	0.00	0.00	0.00	0.00
	3	0.00	1.48	0.00	0.00	0.00	0.00
	4	0.00	1.52	0.00	0.00	0.00	0.00
	5	0.00	1.52	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.75	0.00	0.00	0.00	0.00
	9	0.00	0.75	0.00	0.00	0.00	0.00
	10	0.00	1.52	0.00	0.00	0.00	0.00
	11	0.00	1.47	0.00	0.00	0.00	0.00
101	1	0.00	1.66	0.00	0.00	0.00	0.00
	2	0.00	1.31	0.00	0.00	0.00	0.00
	3	0.00	1.62	0.00	0.00	0.00	0.00
	4	0.00	1.67	0.00	0.00	0.00	0.00
	5	0.00	1.67	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	1.67	0.00	0.00	0.00	0.00
	11	0.00	1.62	0.00	0.00	0.00	0.00
102	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
103	1	0.00	1.28	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.27	0.00	0.00	0.00	0.00
	4	0.00	1.29	0.00	0.00	0.00	0.00
	5	0.00	1.29	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.29	0.00	0.00	0.00	0.00
	11	0.00	1.24	0.00	0.00	0.00	0.00
104	1	0.00	1.43	0.00	0.00	0.00	0.00
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.41	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	1.45	0.00	0.00	0.00	0.00
	5	0.00	1.45	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.45	0.00	0.00	0.00	0.00
	11	0.00	1.39	0.00	0.00	0.00	0.00
105	1	0.00	1.59	0.00	0.00	0.00	0.00
	2	0.00	1.23	0.00	0.00	0.00	0.00
	3	0.00	1.55	0.00	0.00	0.00	0.00
	4	0.00	1.60	0.00	0.00	0.00	0.00
	5	0.00	1.60	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.60	0.00	0.00	0.00	0.00
	11	0.00	1.54	0.00	0.00	0.00	0.00
106	1	0.00	0.87	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.88	0.00	0.00	0.00	0.00
	5	0.00	0.88	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.36	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
107	1	0.00	1.21	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.20	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.22	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.22	0.00	0.00	0.00	0.00
	11	0.00	1.17	0.00	0.00	0.00	0.00
108	1	0.00	1.36	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.34	0.00	0.00	0.00	0.00
	4	0.00	1.38	0.00	0.00	0.00	0.00
	5	0.00	1.38	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.38	0.00	0.00	0.00	0.00
	11	0.00	1.32	0.00	0.00	0.00	0.00
109	1	0.00	1.52	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.48	0.00	0.00	0.00	0.00
	4	0.00	1.53	0.00	0.00	0.00	0.00
	5	0.00	1.53	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.53	0.00	0.00	0.00	0.00
	11	0.00	1.47	0.00	0.00	0.00	0.00
110	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.81	0.00	0.00	0.00	0.00
111	1	0.00	1.14	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.14	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.61	0.00	0.00	0.00	0.00
	10	0.00	1.15	0.00	0.00	0.00	0.00
	11	0.00	1.10	0.00	0.00	0.00	0.00
112	1	0.00	1.29	0.00	0.00	0.00	0.00
	2	0.00	1.05	0.00	0.00	0.00	0.00
	3	0.00	1.27	0.00	0.00	0.00	0.00
	4	0.00	1.30	0.00	0.00	0.00	0.00
	5	0.00	1.30	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	1.30	0.00	0.00	0.00	0.00
	11	0.00	1.25	0.00	0.00	0.00	0.00
113	1	0.00	1.44	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.40	0.00	0.00	0.00	0.00
	4	0.00	1.46	0.00	0.00	0.00	0.00
	5	0.00	1.46	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	1.46	0.00	0.00	0.00	0.00
	11	0.00	1.40	0.00	0.00	0.00	0.00
114	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
115	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.07	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.00	0.00	0.00	0.00
	10	0.00	1.08	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
116	1	0.00	1.22	0.00	0.00	0.00	0.00
	2	0.00	0.98	0.00	0.00	0.00	0.00
	3	0.00	1.19	0.00	0.00	0.00	0.00
	4	0.00	1.23	0.00	0.00	0.00	0.00
	5	0.00	1.23	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	1.23	0.00	0.00	0.00	0.00
	11	0.00	1.18	0.00	0.00	0.00	0.00
117	1	0.00	1.37	0.00	0.00	0.00	0.00
	2	0.00	1.01	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	1.39	0.00	0.00	0.00	0.00
	5	0.00	1.39	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	1.38	0.00	0.00	0.00	0.00
	11	0.00	1.32	0.00	0.00	0.00	0.00
118	1	0.00	0.76	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
119	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
120	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.13	0.00	0.00	0.00	0.00
	11	0.00	0.08	0.00	0.00	0.00	0.00
122	1	0.00	0.27	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.26	0.00	0.00	0.00	0.00
	5	0.00	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.28	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
123	1	0.00	0.42	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
124	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
125	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
126	1	0.00	0.87	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
127	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
128	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.10	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
129	1	0.00	0.00	0.00	0.00	0.00	0.00
	2	0.00	0.05	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.05	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
130	1	0.00	0.02	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.03	0.00	0.00	0.00	0.00
	4	0.00	0.01	0.00	0.00	0.00	0.00
	5	0.00	0.01	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.10	0.00	0.00	0.00	0.00
	10	0.00	0.02	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
131	1	0.00	0.09	0.00	0.00	0.00	0.00
	2	0.00	0.15	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.09	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.10	0.00	0.00	0.00	0.00
	11	0.00	0.07	0.00	0.00	0.00	0.00
132	1	0.00	0.17	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.17	0.00	0.00	0.00	0.00
	5	0.00	0.17	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.15	0.00	0.00	0.00	0.00
133	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
134	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.33	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
135	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
136	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.06	0.00	0.00	0.00	0.00
	9	0.00	0.06	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
185	1	0.00	0.17	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.16	0.00	0.00	0.00	0.00
	5	0.00	0.16	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.17	0.00	0.00	0.00	0.00
	11	0.00	0.16	0.00	0.00	0.00	0.00
186	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
187	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
188	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
189	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.62	0.00	0.00	0.00	0.00
190	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
191	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
192	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.87	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.84	0.00	0.00	0.00	0.00
193	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.20	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

332. PRINT JOINT DISPLACEMENT LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	0.3277	-0.2511	0.9889	0.0031	0.0000	-0.0009
	2	0.3316	-0.2521	0.2234	0.0007	0.0000	-0.0009
	3	0.3350	-0.2516	0.8990	0.0028	0.0000	-0.0010
	4	0.3289	-0.2509	1.0253	0.0032	0.0000	-0.0009
	5	0.3289	-0.2509	1.0253	0.0032	0.0000	-0.0009
	6	0.2530	-0.1444	-1.0809	-0.0034	0.0000	-0.0007
	7	0.2028	-0.1543	-0.1203	-0.0004	0.0000	-0.0006
	8	0.1931	-0.1543	0.0515	0.0002	0.0000	-0.0006
	9	0.1931	-0.1543	0.0515	0.0002	0.0000	-0.0006
	10	0.3269	-0.2557	0.9876	0.0031	0.0000	-0.0009
	11	0.3294	-0.2375	0.9745	0.0030	0.0000	-0.0009

********** END OF LATEST ANALYSIS RESULT **********

333. LOAD LIST 100 TO 113
334. START CONCRETE DESIGN

```
335. CODE ACI
336. CLB 0.05 MEMB 101
337. CLS 0.05 ALL
338. CLT 0.05 MEMB 101
339. FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 117
340. FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 117
341. FYSEC 42813 ALL
342. MAXMAIN 32 ALL
343. MINMAIN 12 ALL
344. CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169
345. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169
346. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 169
347. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	100	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

348. END CONCRETE DESIGN
349. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 15:45:29 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 11 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F5

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5           *
*           Version  20.07.10.64                  *
*           Proprietary Program of                *
*           Bentley Systems, Inc.                 *
*           Date=    APR  1, 2020                 *
*           Time=    16: 9:10                     *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F5.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 3.5 0; 3 0 0 1; 5 1 0 0; 6 1 0 1; 8 -1 0 0; 9 -1 0 1
     9. 11 -0.75 0 0; 12 -0.75 0 0.25; 13 -1 0 0.25; 14 -0.5 0 0; 15 -0.5 0 0.25
    10. 16 -0.25 0 0; 17 -0.25 0 0.25; 18 0 0 0.25; 19 -0.75 0 0.5; 20 -1 0 0.5
    11. 21 -0.5 0 0.5; 22 -0.25 0 0.5; 23 0 0 0.5; 24 -0.75 0 0.75; 25 -1 0 0.75
    12. 26 -0.5 0 0.75; 27 -0.25 0 0.75; 28 0 0 0.75; 29 -0.75 0 1; 30 -0.5 0 1
    13. 31 -0.25 0 1; 32 0.25 0 0; 33 0.25 0 0.25; 34 0.5 0 0; 35 0.5 0 0.25
    14. 36 0.75 0 0; 37 0.75 0 0.25; 38 1 0 0.25; 39 0.25 0 0.5; 40 0.5 0 0.5
    15. 41 0.75 0 0.5; 42 1 0 0.5; 43 0.25 0 0.75; 44 0.5 0 0.75; 45 0.75 0 0.75
    16. 46 1 0 0.75; 47 0.25 0 1; 48 0.5 0 1; 49 0.75 0 1; 63 -0.75 0 -1.25
    17. 64 -1 0 -1.25; 65 -0.5 0 -1.25; 66 -0.25 0 -1.25; 67 0 0 -1.25; 68 -0.75 0 -1.
    18. 69 -1 0 -1; 70 -0.5 0 -1; 71 -0.25 0 -1; 72 0 0 -1; 73 -0.75 0 -0.75
    19. 74 -1 0 -0.75; 75 -0.5 0 -0.75; 76 -0.25 0 -0.75; 77 0 0 -0.75
    20. 78 -0.75 0 -0.5; 79 -1 0 -0.5; 80 -0.5 0 -0.5; 81 -0.25 0 -0.5; 82 0 0 -0.5
    21. 83 -0.75 0 -0.25; 84 -1 0 -0.25; 85 -0.5 0 -0.25; 86 -0.25 0 -0.25
    22. 87 0 0 -0.25; 99 0.25 0 -1.25; 100 0.5 0 -1.25; 101 0.75 0 -1.25
    23. 102 1 0 -1.25; 103 0.25 0 -1; 104 0.5 0 -1; 105 0.75 0 -1; 106 1 0 -1.
    24. 107 0.25 0 -0.75; 108 0.5 0 -0.75; 109 0.75 0 -0.75; 110 1 0 -0.75
    25. 111 0.25 0 -0.5; 112 0.5 0 -0.5; 113 0.75 0 -0.5; 114 1 0 -0.5
    26. 115 0.25 0 -0.25; 116 0.5 0 -0.25; 117 0.75 0 -0.25; 118 1 0 -0.25
    27. 119 -0.75 0 1.25; 120 -1 0 1.25; 121 -0.5 0 1.25; 122 -0.25 0 1.25
    28. 123 0 0 1.25; 124 0.25 0 1.25; 125 0.5 0 1.25; 126 0.75 0 1.25; 127 1 0 1.25
    29. 128 -0.75 0 1.5; 129 -1 0 1.5; 130 -0.5 0 1.5; 131 -0.25 0 1.5; 132 0 0 1.5
    30. 133 0.25 0 1.5; 134 0.5 0 1.5; 135 0.75 0 1.5; 136 1 0 1.5; 185 -1 0 -1.5
    31. 186 -0.75 0 -1.5; 187 -0.5 0 -1.5; 188 -0.25 0 -1.5; 189 0 0 -1.5
    32. 190 0.25 0 -1.5; 191 0.5 0 -1.5; 192 0.75 0 -1.5; 193 1 0 -1.5; 194 -1.25 0 0
    33. 195 -1.25 0 0.25; 196 -1.25 0 0.5; 197 -1.25 0 0.75; 198 -1.25 0 1
    34. 199 -1.25 0 -1.25; 200 -1.25 0 -1; 201 -1.25 0 -0.75; 202 -1.25 0 -0.5
    35. 203 -1.25 0 -0.25; 204 -1.25 0 1.25; 205 -1.25 0 1.5; 206 -1.25 0 -1.5
    36. 207 1.25 0 0; 208 1.25 0 0.25; 209 1.25 0 0.5; 210 1.25 0 0.75; 211 1.25 0 1
    37. 212 1.25 0 -1.25; 213 1.25 0 -1; 214 1.25 0 -0.75; 215 1.25 0 -0.5
    38. 216 1.25 0 -0.25; 217 1.25 0 1.25; 218 1.25 0 1.5; 219 1.25 0 -1.5
```

```
39. 220 -1 0 -1.75; 221 -0.75 0 -1.75; 222 -0.5 0 -1.75; 223 -0.25 0 -1.75
40. 224 0 0 -1.75; 225 0.25 0 -1.75; 226 0.5 0 -1.75; 227 0.75 0 -1.75
41. 228 1 0 -1.75; 229 -1.25 0 -1.75; 230 1.25 0 -1.75; 231 -0.75 0 1.75
42. 232 -1 0 1.75; 233 -0.5 0 1.75; 234 -0.25 0 1.75; 235 0 0 1.75
43. 236 0.25 0 1.75; 237 0.5 0 1.75; 238 0.75 0 1.75; 239 1 0 1.75
44. 240 -1.25 0 1.75; 241 1.25 0 1.75; 242 -1.5 0 0; 243 -1.5 0 0.25
45. 244 -1.5 0 0.5; 245 -1.5 0 0.75; 246 -1.5 0 1; 247 -1.5 0 -1.25; 248 -1.5 0 -1.
46. 249 -1.5 0 -0.75; 250 -1.5 0 -0.5; 251 -1.5 0 -0.25; 252 -1.5 0 1.25
47. 253 -1.5 0 1.5; 254 -1.5 0 -1.5; 255 -1.5 0 -1.75; 256 -1.5 0 1.75
48. 257 1.5 0 0; 258 1.5 0 0.25; 259 1.5 0 0.5; 260 1.5 0 0.75; 261 1.5 0 1
49. 262 1.5 0 -1.25; 263 1.5 0 -1; 264 1.5 0 -0.75; 265 1.5 0 -0.5
50. 266 1.5 0 -0.25; 267 1.5 0 1.25; 268 1.5 0 1.5; 269 1.5 0 -1.5
51. 270 1.5 0 -1.75; 271 1.5 0 1.75
52. MEMBER INCIDENCES
53. 101 2 1
54. ELEMENT INCIDENCES SHELL
55. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
56. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
57. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
58. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
59. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
60. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
61. 35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70
62. 52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76
63. 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84
64. 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11
65. 67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103
66. 83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107
67. 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111
68. 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115
69. 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32
70. 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119
71. 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124
72. 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128
73. 112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132
74. 115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135
75. 162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66
76. 166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100
77. 169 192 193 102 101; 170 194 8 13 195; 171 195 13 20 196; 172 196 20 25 197
78. 173 197 25 9 198; 174 199 64 69 200; 175 200 69 74 201; 176 201 74 79 202
79. 177 202 79 84 203; 178 203 84 8 194; 179 198 9 120 204; 180 204 120 129 205
80. 181 206 185 64 199; 182 5 207 208 38; 183 38 208 209 42; 184 42 209 210 46
81. 185 46 210 211 6; 186 102 212 213 106; 187 106 213 214 110
82. 188 110 214 215 114; 189 114 215 216 118; 190 118 216 207 5; 191 6 211 217 127
83. 192 127 217 218 136; 193 193 219 212 102; 194 220 221 186 185
84. 195 221 222 187 186; 196 222 223 188 187; 197 223 224 189 188
85. 198 224 225 190 189; 199 225 226 191 190; 200 226 227 192 191
86. 201 227 228 193 192; 202 229 220 185 206; 203 228 230 219 193
87. 204 129 128 231 232; 205 128 130 233 231; 206 130 131 234 233
88. 207 131 132 235 234; 208 132 133 236 235; 209 133 134 237 236
89. 210 134 135 238 237; 211 135 136 239 238; 212 205 129 232 240
90. 213 136 218 241 239; 214 242 194 195 243; 215 243 195 196 244
91. 216 244 196 197 245; 217 245 197 198 246; 218 247 199 200 248
92. 219 248 200 201 249; 220 249 201 202 250; 221 250 202 203 251
93. 222 251 203 194 242; 223 246 198 204 252; 224 252 204 205 253
94. 225 254 206 199 247; 226 255 229 206 254; 227 253 205 240 256
```

```
 95. 228 207 257 258 208; 229 208 258 259 209; 230 209 259 260 210
 96. 231 210 260 261 211; 232 212 262 263 213; 233 213 263 264 214
 97. 234 214 264 265 215; 235 215 265 266 216; 236 216 266 257 207
 98. 237 211 261 267 217; 238 217 267 268 218; 239 219 269 262 212
 99. 240 230 270 269 219; 241 218 268 271 241
100. START GROUP DEFINITION
101. ELEMENT
102. _MAX_BM 5 TO 7 9 TO 20 22 TO 36 49 TO 67 81 TO 96 98 TO 100 102 TO 117 162 -
103. 163 TO 241
104. _MAX_SF 5 9 13 17 TO 20 24 28 32 TO 36 49 TO 57 61 65 81 TO 88 92 96 100 102 -
105. 103 TO 117 162 TO 241
106. END GROUP DEFINITION
107. ELEMENT PROPERTY
108. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 THICKNESS 0.5
109. DEFINE MATERIAL START
110. ISOTROPIC CONCRETE
111. E 2.21467E+006
112. POISSON 0.17
113. DENSITY 2.40262
114. ALPHA 1E-005
115. DAMP 0.05
116. TYPE CONCRETE
117. STRENGTH FCU 2812.28
118. END DEFINE MATERIAL
119. MEMBER PROPERTY AMERICAN
120. 101 PRIS YD 0.85 ZD 0.65
121. CONSTANTS
122. BETA 90 ALL
123. MATERIAL CONCRETE ALL
124. SUPPORTS
125. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 240 -
126. 241 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500

25	0.062500
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.062500
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.062500
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.062500
103	0.062500
104	0.062500

105	0.062500
106	0.062500
107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500
113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
128	0.062500
129	0.062500
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.062500
185	0.062500
186	0.062500
187	0.062500
188	0.062500
189	0.062500
190	0.062500
191	0.062500
192	0.062500
193	0.062500
194	0.062500
195	0.062500
196	0.062500
197	0.062500
198	0.062500
199	0.062500
200	0.062500
201	0.062500
202	0.062500
203	0.062500
204	0.062500
205	0.062500
206	0.062500
207	0.062500
208	0.062500

209	0.062500
210	0.062500
211	0.062500
212	0.062500
213	0.062500
214	0.062500
215	0.062500
216	0.062500
217	0.062500
218	0.062500
219	0.062500
220	0.031250
221	0.031250
222	0.031250
223	0.031250
224	0.031250
225	0.031250
226	0.031250
227	0.031250
228	0.031250
229	0.031250
230	0.031250
231	0.031250
232	0.031250
233	0.031250
234	0.031250
235	0.031250
236	0.031250
237	0.031250
238	0.031250
239	0.031250
240	0.031250
241	0.031250
242	0.031250
243	0.031250
244	0.031250
245	0.031250
246	0.031250
247	0.031250
248	0.031250
249	0.031250
250	0.031250
251	0.031250
252	0.031250
253	0.031250
254	0.031250
255	0.015625
256	0.015625
257	0.031250
258	0.031250
259	0.031250
260	0.031250
261	0.031250
262	0.031250
263	0.031250
264	0.031250

```
       265          0.031250
       266          0.031250
       267          0.031250
       268          0.031250
       269          0.031250
       270          0.015625
       271          0.015625
    TOTAL          10.500000
127. LOAD 1 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR
128. SELFWEIGHT Y -1
129. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 739
130. JOINT LOAD
131. 2 FX -0.4 FY -2.5 FZ 0
132. ELEMENT LOAD
133. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
134. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
135. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
136. LOAD 2 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
137. SELFWEIGHT Y -1
138. ELEMENT LOAD
139. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
140. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
141. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
142. JOINT LOAD
143. 2 FX 6.2 FY -17.7 FZ -4.6
144. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
145. SELFWEIGHT Y -1
146. ELEMENT LOAD
147. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
148. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
149. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
150. JOINT LOAD
151. 2 FX 7.2 FY -19.5 FZ -0.6
152. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
153. SELFWEIGHT Y -1
154. ELEMENT LOAD
155. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
156. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
157. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
158. JOINT LOAD
159. 2 FX -0.5 FY -2.2 FZ 0
160. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
161. SELFWEIGHT Y -1
162. ELEMENT LOAD
163. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
164. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
165. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
166. JOINT LOAD
167. 2 FX -0.4 FY -2.4 FZ 0
168. LOAD 6 LOADTYPE NONE  TITLE 0.6DL+WLX1
169. SELFWEIGHT Y -1
170. ELEMENT LOAD
171. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
172. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
173. 218 TO 222 225 226 232 TO 236 239 240 PR GY -6
174. JOINT LOAD
```

```
175. 2 FX 8.7 FY -21.9 FZ -6.2
176. LOAD 7 LOADTYPE NONE  TITLE 0.6DL+WLX2
177. SELFWEIGHT Y -1
178. JOINT LOAD
179. 2 FX 10.1 FY -24.3 FZ -0.8
180. ELEMENT LOAD
181. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
182. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
183. 218 TO 222 225 226 232 TO 236 239 240 PR GY -6
184. LOAD 8 LOADTYPE NONE  TITLE 0.6DL+WLZ1
185. SELFWEIGHT Y -1
186. ELEMENT LOAD
187. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
188. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
189. 218 TO 222 225 226 232 TO 236 239 240 PR GY -6
190. JOINT LOAD
191. 2 FX -0.3 FY -1.2 FZ 0
192. LOAD 9 LOADTYPE NONE  TITLE 0.6DL+WLZ2
193. SELFWEIGHT Y -1
194. ELEMENT LOAD
195. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
196. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
197. 218 TO 222 225 226 232 TO 236 239 240 PR GY -6
198. JOINT LOAD
199. 2 FX -0.2 FY -1.5 FZ 0
200. LOAD 10 LOADTYPE NONE  TITLE DL+LL
201. SELFWEIGHT Y -1
202. ELEMENT LOAD
203. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
204. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
205. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
206. JOINT LOAD
207. 2 FX -0.2 FY -2.8 FZ 0
208. LOAD 11 LOADTYPE NONE  TITLE DL+LR
209. SELFWEIGHT Y -1
210. ELEMENT LOAD
211. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
212. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
213. 218 TO 222 225 226 232 TO 236 239 240 PR GY -10
214. JOINT LOAD
215. 2 FX -0.5 FY -2.3 FZ 0
216. ************************************************************************88
217. ************************************************************
218. *LOAD CASES FOR FOUNDATION DESIGN
219. LOAD 100 LOADTYPE NONE  TITLE 1.4(DL+LL)
220. SELFWEIGHT Y -1
221. ELEMENT LOAD
222. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -6.3
223. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
224. 218 TO 222 225 226 232 TO 236 239 240 PR GY -14
225. JOINT LOAD
226. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 739
227. 2 FX -0.3 FY -4 FZ 0
228. ************************************
229. LOAD 101 LOADTYPE NONE  TITLE 1.4DL+1.7LL + 0.5LR
230. SELFWEIGHT Y -1
```

```
231. ELEMENT LOAD
232. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -6.3
233. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
234. 218 TO 222 225 226 232 TO 236 239 240 PR GY -14
235. JOINT LOAD
236. 2 FX -0.4 FY -3.8 FZ 0
237. ********************************************
238. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
239. SELFWEIGHT Y -1
240. ELEMENT LOAD
241. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
242. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
243. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
244. JOINT LOAD
245. 2 FX 3.7 FY -12.7 FZ -3.1
246. ****************************************************
247. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
248. SELFWEIGHT Y -1
249. ELEMENT LOAD
250. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
251. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
252. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
253. JOINT LOAD
254. 2 FX 4.4 FY -13.9 FZ -0.4
255. ****************************************************
256. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
257. SELFWEIGHT Y -1
258. ELEMENT LOAD
259. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
260. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
261. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
262. JOINT LOAD
263. 2 FX -0.8 FY -2.4 FZ 0
264. ****************************************************
265. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
266. SELFWEIGHT Y -1
267. ELEMENT LOAD
268. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
269. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
270. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
271. JOINT LOAD
272. 2 FX -0.7 FY -2.5 FZ 0
273. ****************************************************
274. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
275. SELFWEIGHT Y -1
276. ELEMENT LOAD
277. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
278. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
279. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
280. JOINT LOAD
281. 2 FX 13.8 FY -35.4 FZ -9.9
282. ****************************************************
283. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
284. SELFWEIGHT Y -1
285. ELEMENT LOAD
286. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
```

```
287. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
288. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
289. JOINT LOAD
290. 2 FX 15.7 FY -38.8 FZ -1.2
291. ******************************************************
292. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
293. SELFWEIGHT Y -1
294. ELEMENT LOAD
295. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
296. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
297. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
298. JOINT LOAD
299. 2 FX -0.7 FY -2.4 FZ 0
300. ******************************************************
301. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
302. SELFWEIGHT Y -1
303. ELEMENT LOAD
304. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
305. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
306. 218 TO 222 225 226 232 TO 236 239 240 PR GY -12
307. JOINT LOAD
308. 2 FX -0.6 FY -2.9 FZ 0
309. ******************************************************
310. LOAD 110 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
311. SELFWEIGHT Y -1
312. ELEMENT LOAD
313. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
314. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
315. 218 TO 222 225 226 232 TO 236 239 240 PR GY -9
316. JOINT LOAD
317. 2 FX 14.1 FY -34.8 FZ -9.9
318. ******************************************************
319. LOAD 111 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
320. SELFWEIGHT Y -1
321. ELEMENT LOAD
322. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
323. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
324. 218 TO 222 225 226 232 TO 236 239 240 PR GY -9
325. JOINT LOAD
326. 2 FX 15.9 FY -38.2 FZ -1.2
327. ******************************************************
328. LOAD 112 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
329. SELFWEIGHT Y -1
330. ELEMENT LOAD
331. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
332. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
333. 218 TO 222 225 226 232 TO 236 239 240 PR GY -9
334. JOINT LOAD
335. 2 FX -0.5 FY -1.8 FZ 0
336. ******************************************************
337. LOAD 113 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
338. SELFWEIGHT Y -1
339. ELEMENT LOAD
340. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
341. 49 TO 68 81 TO 100 162 TO 169 174 TO 178 181 186 TO 190 193 TO 203 -
342. 218 TO 222 225 226 232 TO 236 239 240 PR GY -9
```

```
343. JOINT LOAD
344. 2 FX -0.3 FY -2.2 FZ 0
345. ************************************************
346. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**196**	**NUMBER OF MEMBERS**	**1**
NUMBER OF PLATES	**168**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**195**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 137/ 23/ 75 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 591
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 45 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.5/ 164799.8 MB

```
**NOTE-Tension/Compression converged after  1 iterations, Case=    1


**START ITERATION NO.          2
**START ITERATION NO.          3

**NOTE-Tension/Compression converged after  3 iterations, Case=    2



**NOTE-Tension/Compression converged after  1 iterations, Case=    3



**NOTE-Tension/Compression converged after  1 iterations, Case=    4



**NOTE-Tension/Compression converged after  1 iterations, Case=    5


**START ITERATION NO.          2
**START ITERATION NO.          3

**NOTE-Tension/Compression converged after  3 iterations, Case=    6


**START ITERATION NO.          2
```

**NOTE-Tension/Compression converged after 2 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 106

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 110

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

347. LOAD LIST 1 TO 11
348. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.40	0.72	0.00	0.00	0.00	0.00
	2	-6.20	0.83	4.60	0.00	0.00	0.00
	3	-7.20	0.85	0.60	0.00	0.00	0.00
	4	0.50	0.72	0.00	0.00	0.00	0.00
	5	0.40	0.72	0.00	0.00	0.00	0.00
	6	-8.70	0.62	6.20	0.00	0.00	0.00
	7	-10.10	0.64	0.80	0.00	0.00	0.00
	8	0.30	0.47	0.00	0.00	0.00	0.00
	9	0.20	0.48	0.00	0.00	0.00	0.00
	10	0.20	0.72	0.00	0.00	0.00	0.00
	11	0.50	0.72	0.00	0.00	0.00	0.00
3	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
5	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
6	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
8	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
9	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
11	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
12	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
13	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
14	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
15	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
16	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
17	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
18	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
19	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
20	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
21	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
22	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
23	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
24	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
25	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.52	0.00	0.00	0.00	0.00
26	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
27	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
28	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
29	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
30	1	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
31	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
32	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.88	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
33	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
34	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
35	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.43	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
36	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
37	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
38	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
39	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
40	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
41	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
42	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
43	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.35	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
44	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
45	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
46	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
47	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
48	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
49	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
63	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.07	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
65	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
66	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.04	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
67	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.25	0.00	0.00	0.00	0.00
	3	0.00	1.16	0.00	0.00	0.00	0.00
	4	0.00	1.04	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.82	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
68	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
69	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.99	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
70	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
71	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.05	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
72	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
73	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
74	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.90	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
75	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
76	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
77	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
78	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
79	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
80	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
81	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.96	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
82	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	1.01	0.00	0.00	0.00	0.00
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
83	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
84	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.79	0.00	0.00	0.00	0.00
85	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
86	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.87	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
87	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
99	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.29	0.00	0.00	0.00	0.00
	3	0.00	1.21	0.00	0.00	0.00	0.00
	4	0.00	1.04	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
100	1	0.00	1.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.25	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	0.96	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
101	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.37	0.00	0.00	0.00	0.00
	3	0.00	1.30	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
102	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.41	0.00	0.00	0.00	0.00
	3	0.00	1.34	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	1.18	0.00	0.00	0.00	0.00
	7	0.00	1.08	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
103	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
104	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.25	0.00	0.00	0.00	0.00
	3	0.00	1.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
105	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.29	0.00	0.00	0.00	0.00
	3	0.00	1.24	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
106	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.28	0.00	0.00	0.00	0.00
	4	0.00	0.96	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
107	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.82	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
108	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	1.17	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
109	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.21	0.00	0.00	0.00	0.00
	3	0.00	1.18	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	1.00	0.00	0.00	0.00	0.00
	7	0.00	0.96	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
110	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.25	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
111	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	1.05	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
112	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.84	0.00	0.00	0.00	0.00
113	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.84	0.00	0.00	0.00	0.00
114	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.16	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.99	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
115	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.97	0.00	0.00	0.00	0.00
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
116	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	1.01	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.83	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
117	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.05	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
118	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
119	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
120	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.26	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
122	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
123	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
124	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
125	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
126	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
127	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.36	0.00	0.00	0.00	0.00
128	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
129	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.09	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
130	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
131	1	0.00	0.31	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
132	1	0.00	0.31	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
133	1	0.00	0.31	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
134	1	0.00	0.31	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
135	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
136	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
185	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.12	0.00	0.00	0.00	0.00
186	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.11	0.00	0.00	0.00	0.00
187	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.11	0.00	0.00	0.00	0.00
188	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.29	0.00	0.00	0.00	0.00
	3	0.00	1.17	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.11	0.00	0.00	0.00	0.00
189	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.10	0.00	0.00	0.00	0.00
190	1	0.00	1.10	0.00	0.00	0.00	0.00
	2	0.00	1.37	0.00	0.00	0.00	0.00
	3	0.00	1.27	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.10	0.00	0.00	0.00	0.00
191	1	0.00	1.10	0.00	0.00	0.00	0.00
	2	0.00	1.41	0.00	0.00	0.00	0.00
	3	0.00	1.31	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	1.10	0.00	0.00	0.00	0.00
192	1	0.00	1.10	0.00	0.00	0.00	0.00
	2	0.00	1.45	0.00	0.00	0.00	0.00
	3	0.00	1.36	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.19	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
193	1	0.00	1.09	0.00	0.00	0.00	0.00
	2	0.00	1.48	0.00	0.00	0.00	0.00
	3	0.00	1.40	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.24	0.00	0.00	0.00	0.00
	7	0.00	1.12	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
194	1	0.00	0.73	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
195	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
196	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.40	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
197	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
198	1	0.00	0.46	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
199	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
200	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.94	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.99	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
201	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
202	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
203	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
204	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
205	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.05	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.32	0.00	0.00	0.00	0.00
206	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	1.12	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	1.12	0.00	0.00	0.00	0.00
207	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.97	0.00	0.00	0.00	0.00
	8	0.00	0.46	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
208	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	1.00	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.42	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
209	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.84	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
210	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
211	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.42	0.00	0.00	0.00	0.00
212	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.44	0.00	0.00	0.00	0.00
	3	0.00	1.39	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	1.23	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
213	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	1.36	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	0.96	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	1.17	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
214	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	1.28	0.00	0.00	0.00	0.00
	3	0.00	1.27	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.08	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
215	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.20	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	1.05	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
216	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	0.76	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
217	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.36	0.00	0.00	0.00	0.00
218	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.30	0.00	0.00	0.00	0.00
	11	0.00	0.29	0.00	0.00	0.00	0.00
219	1	0.00	1.09	0.00	0.00	0.00	0.00
	2	0.00	1.52	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.44	0.00	0.00	0.00	0.00
	4	0.00	1.08	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.29	0.00	0.00	0.00	0.00
	7	0.00	1.18	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
220	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
221	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
222	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
223	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
224	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
225	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
226	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
227	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
228	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
229	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.37	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
230	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
231	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
232	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.00	0.06	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.10	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
233	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.04	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
234	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
235	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.12	0.00	0.00	0.00	0.00
236	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
237	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
238	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.23	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
239	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.25	0.00	0.00	0.00	0.00
	4	0.00	0.11	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.11	0.00	0.00	0.00	0.00
240	1	0.00	0.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.00	0.04	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.10	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
241	1	0.00	0.11	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.11	0.00	0.00	0.00	0.00
	5	0.00	0.11	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.11	0.00	0.00	0.00	0.00
242	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.26	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
243	1	0.00	0.33	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.33	0.00	0.00	0.00	0.00
	5	0.00	0.33	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.33	0.00	0.00	0.00	0.00
	11	0.00	0.33	0.00	0.00	0.00	0.00
244	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.20	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
245	1	0.00	0.26	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.26	0.00	0.00	0.00	0.00
	5	0.00	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.18	0.00	0.00	0.00	0.00
	9	0.00	0.18	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
246	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.09	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
247	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
248	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.25	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
249	1	0.00	0.46	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
250	1	0.00	0.43	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
251	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
252	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.05	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
253	1	0.00	0.16	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.00	0.05	0.00	0.00	0.00	0.00
	4	0.00	0.16	0.00	0.00	0.00	0.00
	5	0.00	0.16	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.16	0.00	0.00	0.00	0.00
	11	0.00	0.16	0.00	0.00	0.00	0.00
254	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
255	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.25	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.30	0.00	0.00	0.00	0.00
256	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.00	0.01	0.00	0.00	0.00	0.00
	4	0.00	0.06	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.05	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00
257	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.35	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.34	0.00	0.00	0.00	0.00
258	1	0.00	0.31	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.21	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.31	0.00	0.00	0.00	0.00
259	1	0.00	0.28	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.28	0.00	0.00	0.00	0.00
	5	0.00	0.28	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.28	0.00	0.00	0.00	0.00
	11	0.00	0.28	0.00	0.00	0.00	0.00
260	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.17	0.00	0.00	0.00	0.00
	9	0.00	0.17	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
261	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
262	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
263	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
264	1	0.00	0.45	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
265	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
266	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
267	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.18	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
268	1	0.00	0.15	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.14	0.00	0.00	0.00	0.00
	5	0.00	0.15	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.15	0.00	0.00	0.00	0.00
	11	0.00	0.14	0.00	0.00	0.00	0.00
269	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.55	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
270	1	0.00	0.29	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.29	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.18	0.00	0.00	0.00	0.00
	9	0.00	0.18	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.29	0.00	0.00	0.00	0.00
271	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.06	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.04	0.00	0.00	0.00	0.00
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

349. PRINT JOINT DISPLACEMENTS LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	-0.0364	-0.2151	-0.2784	-0.0008	0.0000	0.0001
	2	0.5648	-0.2526	-0.6002	-0.0018	0.0000	-0.0019
	3	0.6553	-0.2571	-0.3203	-0.0009	0.0000	-0.0022
	4	-0.0455	-0.2144	-0.2784	-0.0008	0.0000	0.0002
	5	-0.0364	-0.2149	-0.2784	-0.0008	0.0000	0.0001
	6	0.8032	-0.1908	-0.6107	-0.0019	0.0000	-0.0027
	7	0.9210	-0.1983	-0.2243	-0.0007	0.0000	-0.0031
	8	-0.0273	-0.1416	-0.1670	-0.0005	0.0000	0.0001
	9	-0.0182	-0.1423	-0.1670	-0.0005	0.0000	0.0001
	10	-0.0182	-0.2159	-0.2784	-0.0008	0.0000	0.0001
	11	-0.0455	-0.2146	-0.2784	-0.0008	0.0000	0.0002

********** END OF LATEST ANALYSIS RESULT **********

350. LOAD LIST 100 TO 113
351. START CONCRETE DESIGN

```
352. CODE ACI
353. CLB 0.05 MEMB 101
354. CLS 0.05 ALL
355. CLT 0.05 MEMB 101
356. FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 204 TO 224 227 -
357. 228 TO 238 241
358. FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 -
359. 204 TO 224 227 TO 238 241
360. FYSEC 42813 ALL
361. MAXMAIN 32 ALL
362. MINMAIN 12 ALL
363. CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
364. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
365. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
366. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
AREA OF STEEL REQUIRED = 7569.2 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
16 - 25 MM	1.422	106	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

367. END CONCRETE DESIGN
368. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 16:10:45 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

ATTACHMENT 12 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F7

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    16:28:57                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F7.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 3.5 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1.
     9. 11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5
    10. 16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1.
    11. 21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1.
    12. 26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5
    13. 31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5
    14. 36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5
    15. 41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75
    16. 46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 68 1 0 -0.75; 69 1 0 -1.
    17. 70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1.
    18. 75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1.
    19. 80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1.
    20. 85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 103 1 0 0.25; 104 1 0 0.5
    21. 105 1 0 0.75; 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75
    22. 110 0.75 0 1; 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1
    23. 115 0.25 0 0.25; 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1
    24. MEMBER INCIDENCES
    25. 101 2 1
    26. ELEMENT INCIDENCES SHELL
    27. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
    28. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
    29. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
    30. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
    31. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
    32. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
    33. 35 44 45 49 48; 36 45 46 6 49; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75
    34. 56 71 72 77 76; 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81
    35. 61 79 78 83 84; 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8
    36. 66 83 85 14 11; 67 85 86 16 14; 68 86 87 1 16; 85 72 103 107 77
    37. 86 103 104 108 107; 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82
    38. 90 107 108 112 111; 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87
```

```
39. 94 111 112 116 115; 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1
40. 98 115 116 34 32; 99 116 117 36 34; 100 117 118 5 36
41. START GROUP DEFINITION
42. ELEMENT
43. _MAX_BM 5 TO 7 9 TO 20 22 TO 36 53 TO 67 85 TO 96 98 TO 100
44. _MAX_SF 5 6 9 10 13 TO 20 23 24 27 TO 36 53 TO 62 65 66 85 TO 92 95 96 99 100
45. END GROUP DEFINITION
46. ELEMENT PROPERTY
47. 5 TO 36 53 TO 68 85 TO 100 THICKNESS 0.35
48. DEFINE MATERIAL START
49. ISOTROPIC CONCRETE
50. E 2.21467E+006
51. POISSON 0.17
52. DENSITY 2.40262
53. ALPHA 1E-005
54. DAMP 0.05
55. TYPE CONCRETE
56. STRENGTH FCU 2812.28
57. END DEFINE MATERIAL
58. MEMBER PROPERTY AMERICAN
59. 101 PRIS YD 0.5 ZD 0.5
60. CONSTANTS
61. MATERIAL CONCRETE ALL
62. SUPPORTS
63. 5 TO 36 53 TO 68 85 TO 100 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.031250
5	0.031250
6	0.015625
8	0.031250
9	0.015625
11	0.062500
12	0.062500
13	0.031250
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.031250
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.031250
26	0.062500
27	0.062500
28	0.062500
29	0.031250
30	0.031250
31	0.031250

32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.031250
39	0.062500
40	0.062500
41	0.062500
42	0.031250
43	0.062500
44	0.062500
45	0.062500
46	0.031250
47	0.031250
48	0.031250
49	0.031250
68	0.031250
69	0.015625
70	0.031250
71	0.031250
72	0.031250
73	0.062500
74	0.031250
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.031250
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.031250
85	0.062500
86	0.062500
87	0.062500
103	0.031250
104	0.031250
105	0.031250
106	0.015625
107	0.062500
108	0.062500
109	0.062500
110	0.031250
111	0.062500
112	0.062500
113	0.062500
114	0.031250
115	0.062500
116	0.062500
117	0.062500
118	0.031250
TOTAL	4.000000

64. LOAD 1 LOADTYPE NONE TITLE DL+0.75*LL+0.75*LR

```
 65. SELFWEIGHT Y -1
 66. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 1844
 67. JOINT LOAD
 68. 2 FX 0.1 FY -0.6 FZ 0.1
 69. ELEMENT LOAD
 70. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
 71. LOAD 2 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
 72. SELFWEIGHT Y -1
 73. ELEMENT LOAD
 74. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
 75. JOINT LOAD
 76. 2 FX 0.1 FY -1.4 FZ 0
 77. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
 78. SELFWEIGHT Y -1
 79. ELEMENT LOAD
 80. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
 81. JOINT LOAD
 82. 2 FX -0.2 FY -0.3 FZ 0.1
 83. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
 84. SELFWEIGHT Y -1
 85. ELEMENT LOAD
 86. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
 87. JOINT LOAD
 88. 2 FX 0.1 FY -1 FZ 0
 89. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
 90. SELFWEIGHT Y -1
 91. ELEMENT LOAD
 92. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
 93. JOINT LOAD
 94. 2 FX 0.1 FY -0.9 FZ 0.1
 95. LOAD 6 LOADTYPE NONE  TITLE 0.6DL+WLX1
 96. SELFWEIGHT Y -1
 97. ELEMENT LOAD
 98. 5 TO 36 53 TO 68 85 TO 100 PR GY -2.9
 99. JOINT LOAD
100. 2 FX 0 FY -1.6 FZ -0.1
101. LOAD 7 LOADTYPE NONE  TITLE 0.6DL+WLX2
102. SELFWEIGHT Y -1
103. JOINT LOAD
104. 2 FX -0.3 FY -0.2 FZ 0
105. ELEMENT LOAD
106. 5 TO 36 53 TO 68 85 TO 100 PR GY -2.9
107. LOAD 8 LOADTYPE NONE  TITLE 0.6DL+WLZ1
108. SELFWEIGHT Y -1
109. ELEMENT LOAD
110. 5 TO 36 53 TO 68 85 TO 100 PR GY -2.9
111. JOINT LOAD
112. 2 FX 0 FY -1.1 FZ 0
113. LOAD 9 LOADTYPE NONE  TITLE 0.6DL+WLZ2
114. SELFWEIGHT Y -1
115. ELEMENT LOAD
116. 5 TO 36 53 TO 68 85 TO 100 PR GY -2.9
117. JOINT LOAD
118. 2 FX 0 FY -0.9 FZ 0
119. LOAD 10 LOADTYPE NONE  TITLE DL+LL
120. SELFWEIGHT Y -1
```

```
121. ELEMENT LOAD
122. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
123. JOINT LOAD
124. 2 FX 0.1 FY -0.6 FZ 0.1
125. LOAD 11 LOADTYPE NONE  TITLE DL+LR
126. SELFWEIGHT Y -1
127. ELEMENT LOAD
128. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.8
129. JOINT LOAD
130. 2 FX 0.1 FY -0.3 FZ 0.1
131. ************************************************************************88
132. ****************************************************************
133. *LOAD CASES FOR FOUNDATION DESIGN
134. LOAD 100 LOADTYPE NONE  TITLE 1.4(DL+LL)
135. SELFWEIGHT Y -1
136. ELEMENT LOAD
137. 5 TO 36 53 TO 68 85 TO 100 PR GY -6.7
138. JOINT LOAD
139. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 739
140. 2 FX 0.1 FY -2.3 FZ -0.1
142. ************************************
143. LOAD 101 LOADTYPE NONE  TITLE 1.4DL+1.7LL + 0.5LR
144. SELFWEIGHT Y -1
145. ELEMENT LOAD
146. 5 TO 36 53 TO 68 85 TO 100 PR GY -6.7
147. JOINT LOAD
148. 2 FX 0.1 FY -1 FZ 0.1
150. ******************************************
151. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
152. SELFWEIGHT Y -1
153. ELEMENT LOAD
154. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
155. JOINT LOAD
156. 2 FX 0.1 FY -0.9 FZ 0
157. ******************************************************
158. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
159. SELFWEIGHT Y -1
160. ELEMENT LOAD
161. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
162. JOINT LOAD
163. 2 FX -0.1 FY -0.2 FZ 0.1
164. ******************************************************
165. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
166. SELFWEIGHT Y -1
167. ELEMENT LOAD
168. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
169. JOINT LOAD
170. 2 FX 0.1 FY -0.7 FZ 0.1
171. ******************************************************
172. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
173. SELFWEIGHT Y -1
174. ELEMENT LOAD
175. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
176. JOINT LOAD
177. 2 FX 0.1 FY -0.6 FZ 0.1
178. ******************************************************
```

```
179. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.0W(+X)
180. SELFWEIGHT Y -1
181. ELEMENT LOAD
182. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
183. JOINT LOAD
184. 2 FX 0.1 FY -2.3 FZ -0.1
186. ******************************************************
187. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.0W(-X)
188. SELFWEIGHT Y -1
189. ELEMENT LOAD
190. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
191. JOINT LOAD
192. 2 FX -0.5 FY -0.1 FZ 0.1
195. ******************************************************
196. ******************************************************
197. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.0W(+Z)
198. SELFWEIGHT Y -1
199. ELEMENT LOAD
200. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
201. JOINT LOAD
202. 2 FX 0.1 FY -1.6 FZ 0.1
204. ******************************************************
205. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.0W(-Z)
206. SELFWEIGHT Y -1
207. ELEMENT LOAD
208. 5 TO 36 53 TO 68 85 TO 100 PR GY -5.8
209. JOINT LOAD
210. 2 FX 0.1 FY -1.3 FZ 0.1
212. ******************************************************
213. LOAD 110 LOADTYPE NONE  TITLE 0.9D + 1.0W(+X)
214. SELFWEIGHT Y -1
215. ELEMENT LOAD
216. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.3
217. JOINT LOAD
218. 2 FX 0.0 FY -2.5 FZ -0.2
220. ******************************************************
221. LOAD 111 LOADTYPE NONE  TITLE 0.9D + 1.0W(-X)
222. SELFWEIGHT Y -1
223. ELEMENT LOAD
224. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.3
225. JOINT LOAD
226. 2 FX -0.5 FY -0.2 FZ 0.0
228. ******************************************************
229. LOAD 112 LOADTYPE NONE  TITLE 0.9D + 1.0W(+Z)
230. SELFWEIGHT Y -1
231. ELEMENT LOAD
232. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.3
233. JOINT LOAD
234. 2 FX 0.0 FY -1.7 FZ 0.0
236. ******************************************************
237. LOAD 113 LOADTYPE NONE  TITLE 0.9D + 1.0W(-Z)
238. SELFWEIGHT Y -1
239. ELEMENT LOAD
240. 5 TO 36 53 TO 68 85 TO 100 PR GY -4.3
241. JOINT LOAD
242. 2 FX 0.0 FY -1.4 FZ 0.0
```

```
244. ******************************************************
245. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**82**	**NUMBER OF MEMBERS**	**1**
NUMBER OF PLATES	**64**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**81**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 78/ 16/ 54 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 249
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 14 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.6/ 164798.0 MB

```
**NOTE-Tension/Compression converged after  1 iterations, Case=    1

**NOTE-Tension/Compression converged after  1 iterations, Case=    2

**NOTE-Tension/Compression converged after  1 iterations, Case=    3

**NOTE-Tension/Compression converged after  1 iterations, Case=    4

**NOTE-Tension/Compression converged after  1 iterations, Case=    5

**NOTE-Tension/Compression converged after  1 iterations, Case=    6

**NOTE-Tension/Compression converged after  1 iterations, Case=    7

**NOTE-Tension/Compression converged after  1 iterations, Case=    8
```

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

246. LOAD LIST 1 TO 11
247. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	-0.10	0.40	-0.10	0.00	0.00	0.00
	2	-0.10	0.41	0.00	0.00	0.00	0.00
	3	0.20	0.39	-0.10	0.00	0.00	0.00
	4	-0.10	0.41	0.00	0.00	0.00	0.00
	5	-0.10	0.40	-0.10	0.00	0.00	0.00
	6	0.00	0.30	0.10	0.00	0.00	0.00
	7	0.30	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	-0.10	0.40	-0.10	0.00	0.00	0.00
	11	-0.10	0.39	-0.10	0.00	0.00	0.00
3	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
5	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
6	1	0.00	0.10	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.07	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.10	0.00	0.00	0.00	0.00
	11	0.00	0.10	0.00	0.00	0.00	0.00
8	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
9	1	0.00	0.09	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.09	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.07	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.09	0.00	0.00	0.00	0.00
	11	0.00	0.09	0.00	0.00	0.00	0.00
11	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
12	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
13	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
14	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
15	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
16	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
17	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
18	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
19	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
20	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
21	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
22	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
23	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
24	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
25	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.18	0.00	0.00	0.00	0.00
26	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
27	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
28	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
29	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
30	1	0.00	0.18	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
31	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
32	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
33	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
34	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
35	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
36	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
37	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
38	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
39	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
40	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
41	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
42	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
43	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
44	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
45	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
46	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
47	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
48	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
49	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
68	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
69	1	0.00	0.10	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.07	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.10	0.00	0.00	0.00	0.00
	11	0.00	0.10	0.00	0.00	0.00	0.00
70	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
71	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
72	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
73	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
74	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.17	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
75	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
76	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
77	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
78	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
79	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
80	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
81	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
82	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
83	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
84	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
85	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
86	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
87	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
103	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00
104	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.21	0.00	0.00	0.00	0.00
105	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
106	1	0.00	0.11	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.11	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.07	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.10	0.00	0.00	0.00	0.00
107	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
108	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
109	1	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
110	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
111	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
112	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
113	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
114	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.21	0.00	0.00	0.00	0.00
115	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
116	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
117	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
118	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.20	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

248. PRINT JOINT DISPLACEMENT LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	0.0358	-0.1193	0.0358	0.0001	0.0000	-0.0001
	2	0.0358	-0.1239	0.0000	0.0000	0.0000	-0.0001
	3	-0.0716	-0.1176	0.0358	0.0001	0.0000	0.0002
	4	0.0358	-0.1216	0.0000	0.0000	0.0000	-0.0001
	5	0.0358	-0.1210	0.0358	0.0001	0.0000	-0.0001
	6	0.0000	-0.0899	-0.0358	-0.0001	0.0000	0.0000
	7	-0.1074	-0.0818	0.0000	0.0000	0.0000	0.0004
	8	0.0000	-0.0870	0.0000	0.0000	0.0000	0.0000
	9	0.0000	-0.0858	0.0000	0.0000	0.0000	0.0000
	10	0.0358	-0.1193	0.0358	0.0001	0.0000	-0.0001
	11	0.0358	-0.1176	0.0358	0.0001	0.0000	-0.0001

********** END OF LATEST ANALYSIS RESULT **********

250. LOAD LIST 100 TO 113
251. START CONCRETE DESIGN

```
252. CODE ACI
253. CLB 0.05 MEMB 101
254. CLS 0.05 ALL
255. CLT 0.05 MEMB 101
256. FC 3567 ALL
257. FYMAIN 42813 ALL
258. FYSEC 42813 ALL
259. MAXMAIN 32 ALL
260. MINMAIN 12 ALL
261. CLB 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
262. CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
263. CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100
264. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 500.0 X 500.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 2500.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
8 - 20 MM	1.005	100	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 320.00 MM

**********END OF COLUMN DESIGN RESULTS**********

265. END CONCRETE DESIGN
266. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 16:29:55 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 13 STAAD OUTPUT FILE OF CONCENTRATE STORAGE BUILDING

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    MAR 30, 2020                *
*           Time=     9:16: 7                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-ST-CAL-2216-A02.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 12-NOV-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 3 16.55 17.634 0; 6 0.3 0.731 0; 8 32.8 0.731 0; 10 0.3 15.9782 0
     9. 11 32.8 15.9782 0; 13 0.3 15.9782 13; 14 16.55 17.634 13; 15 32.8 15.9782 13
    10. 19 0.3 0.731 13; 22 0.3 15.9782 19.5; 23 16.55 17.634 19.5
    11. 24 32.8 15.9782 19.5; 31 0.3 15.9782 32.5; 32 16.55 17.634 32.5
    12. 33 32.8 15.9782 32.5; 40 0.3 15.9782 39; 41 16.55 17.634 39
    13. 42 32.8 15.9782 39; 49 0.3 15.9782 52; 50 16.55 17.634 52; 51 32.8 15.9782 52
    14. 80 0.3 14.431 52; 96 32.8 14.431 52; 119 0.3 14.431 39; 135 32.8 14.431 39
    15. 151 0.3 14.431 32.5; 167 32.8 14.431 32.5; 183 0.3 14.431 19.5
    16. 199 32.8 14.431 19.5; 215 0.3 14.431 13; 231 32.8 14.431 13; 247 0.3 14.431 0
    17. 263 32.8 14.431 0; 266 16.549 14.4308 52; 273 13.3004 14.4311 52
    18. 274 2.39944 14.4312 52; 275 4.59988 14.4315 52; 276 6.80004 14.4313 52
    19. 277 10.0502 14.4312 52; 285 19.8006 14.4311 52; 286 30.7006 14.4312 52
    20. 287 28.5011 14.4315 52; 289 23.0508 14.4312 52; 294 16.55 14.4308 39
    21. 295 19.8006 14.4311 39; 300 13.3004 14.4311 39; 303 6.80004 14.4313 39
    22. 304 10.0502 14.4312 39; 310 23.0508 14.4312 39; 323 16.55 14.4308 32.5
    23. 324 19.8006 14.4311 32.5; 329 13.3004 14.4311 32.5; 332 6.80004 14.4313 32.5
    24. 333 10.0502 14.4312 32.5; 339 23.0508 14.4312 32.5; 352 16.55 14.4308 19.5
    25. 353 19.8006 14.4311 19.5; 358 13.3004 14.4311 19.5; 361 6.80004 14.4313 19.5
    26. 362 10.0502 14.4312 19.5; 368 23.0508 14.4312 19.5; 381 16.55 14.4308 13
    27. 382 19.8006 14.4311 13; 387 13.3004 14.4311 13; 390 6.80004 14.4313 13
    28. 391 10.0502 14.4312 13; 397 23.0508 14.4312 13; 410 16.55 14.4308 0
    29. 411 19.8006 14.4311 0; 416 13.3004 14.4311 0; 419 6.80004 14.4313 0
    30. 420 10.0502 14.4312 0; 426 23.0508 14.4312 0; 442 16.55 17.634 6.5
    31. 445 16.55 17.634 45.5; 447 16.55 17.634 26; 463 16.55 14.4308 45.5
    32. 465 16.55 14.4308 26; 467 16.55 14.4308 6.5; 471 10.0502 14.4312 45.5
    33. 472 10.0502 14.4312 26; 473 10.0502 14.4312 6.5; 477 23.0508 14.4312 45.5
    34. 478 23.0508 14.4312 6.5; 481 23.0508 14.4312 26; 491 0.300002 15.9782 45.5
    35. 502 32.8 15.9782 45.5; 513 0.300002 14.431 45.5; 527 32.8 14.431 45.5
    36. 535 19.8006 14.4311 45.5; 539 13.3004 14.4311 45.5; 540 6.80003 14.4313 45.5
    37. 547 0.300002 15.9782 26; 558 32.8 15.9782 26; 572 0.300002 14.431 26
    38. 586 32.8 14.431 26; 589 19.8006 14.4311 26; 592 13.3004 14.4311 26
```

39. 593 6.80003 14.4313 26; 601 0.300002 15.9782 6.5; 607 0.3 0.731 6.5
40. 609 32.8 0.731 6.5; 612 32.8 15.9782 6.5; 628 0.300002 14.431 6.5
41. 642 32.8 14.431 6.5; 645 19.8006 14.4311 6.5; 648 13.3004 14.4311 6.5
42. 649 6.80003 14.4313 6.5; 657 0.3 6.031 0; 658 0.3 6.031 6.5; 659 0.3 6.875 39
43. 660 0.3 6.875 45.5; 661 0.3 6.875 32.5; 662 0.3 6.875 19.5; 663 0.3 6.875 26
44. 664 0.3 6.031 13; 676 0.3 6.875 52; 677 32.8 6.031 0; 678 32.8 6.031 6.5
45. 679 32.8 6.875 39; 680 32.8 6.875 45.5; 681 32.8 6.875 32.5
46. 682 32.8 6.875 19.5; 683 32.8 6.875 26; 684 32.8 6.875 13; 696 32.8 6.875 52
47. 699 0.300001 15.9782 48.75; 708 0.300001 15.9782 3.25; 715 32.8 15.9782 48.75
48. 723 32.8 15.9782 3.25; 729 6.80004 0.7313 0; 730 26.301 0.7313 0
49. 737 13.3004 0.730801 0; 739 19.8006 0.731101 0; 740 6.80004 6.031 0
50. 741 26.301 6.031 0; 742 13.3004 6.031 0; 743 19.8006 6.031 0
51. 749 13.3004 17.3029 0; 751 10.0502 16.9717 0; 752 6.80004 16.6405 0
52. 757 26.3 14.4313 0; 759 19.7996 17.3029 0; 760 23.0498 16.9717 0
53. 761 26.3 16.6405 0; 764 13.3004 17.3029 6.5; 765 10.0502 16.9717 6.5
54. 766 6.80004 16.6405 6.5; 770 26.3 14.4313 6.5; 772 19.7996 17.3029 6.5
55. 773 23.0498 16.9717 6.5; 774 26.3 16.6405 6.5; 777 13.3004 17.3029 13
56. 778 10.0502 16.9717 13; 779 6.80004 16.6405 13; 783 26.3 14.4313 13
57. 785 19.7996 17.3029 13; 786 23.0498 16.9717 13; 787 26.3 16.6405 13
58. 790 13.3004 17.3029 19.5; 791 10.0502 16.9717 19.5; 792 6.80004 16.6405 19.5
59. 796 26.3 14.4313 19.5; 798 19.7996 17.3029 19.5; 799 23.0498 16.9717 19.5
60. 800 26.3 16.6405 19.5; 803 13.3004 17.3029 26; 804 10.0502 16.9717 26
61. 805 6.80004 16.6405 26; 809 26.3 14.4313 26; 811 19.7996 17.3029 26
62. 812 23.0498 16.9717 26; 813 26.3 16.6405 26; 816 13.3004 17.3029 32.5
63. 817 10.0502 16.9717 32.5; 818 6.80004 16.6405 32.5; 822 26.3 14.4313 32.5
64. 824 19.7996 17.3029 32.5; 825 23.0498 16.9717 32.5; 826 26.3 16.6405 32.5
65. 829 13.3004 17.3029 39; 830 10.0502 16.9717 39; 831 6.80004 16.6405 39
66. 835 26.3 14.4313 39; 837 19.7996 17.3029 39; 838 23.0498 16.9717 39
67. 839 26.3 16.6405 39; 842 13.3004 17.3029 45.5; 843 10.0502 16.9717 45.5
68. 844 6.80004 16.6405 45.5; 848 26.3 14.4313 45.5; 850 19.7996 17.3029 45.5
69. 851 23.0498 16.9717 45.5; 852 26.3 16.6405 45.5; 861 26.3 14.4313 52
70. 906 18.1748 15.8668 0; 907 18.1748 17.4684 0; 908 21.4252 15.7014 0
71. 909 21.4247 17.1373 0; 910 24.6754 15.5358 0; 921 14.9252 15.8668 0
72. 922 14.9252 17.4684 0; 923 11.6748 15.7014 0; 924 11.6753 17.1373 0
73. 925 8.4246 15.5358 0; 927 3.5489 14.4314 0; 928 3.54985 16.3093 0
74. 930 5.17492 16.4749 0; 932 1.92492 16.1438 0; 933 18.1748 15.8668 6.5
75. 934 21.4252 15.7014 6.5; 935 24.6754 15.5358 6.5; 941 14.9252 15.8668 6.5
76. 942 11.6748 15.7014 6.5; 943 8.4246 15.5358 6.5; 945 3.5489 14.4314 6.5
77. 946 3.54985 16.3093 6.5; 948 5.17492 16.4749 6.5; 950 1.92492 16.1438 6.5
78. 951 18.1748 15.8668 13; 952 21.4252 15.7014 13; 953 24.6754 15.5358 13
79. 959 14.9252 15.8668 13; 960 11.6748 15.7014 13; 961 8.4246 15.5358 13
80. 963 3.5489 14.4314 13; 964 3.54985 16.3093 13; 966 5.17492 16.4749 13
81. 968 1.92492 16.1438 13; 969 18.1748 15.8668 19.5; 970 21.4252 15.7014 19.5
82. 971 24.6754 15.5358 19.5; 977 14.9252 15.8668 19.5; 978 11.6748 15.7014 19.5
83. 979 8.4246 15.5358 19.5; 981 3.5489 14.4314 19.5; 982 3.54985 16.3093 19.5
84. 984 5.17492 16.4749 19.5; 986 1.92492 16.1438 19.5; 987 18.1748 15.8668 26
85. 988 21.4252 15.7014 26; 989 24.6754 15.5358 26; 995 14.9252 15.8668 26
86. 996 11.6748 15.7014 26; 997 8.4246 15.5358 26; 999 3.5489 14.4314 26
87. 1000 3.54985 16.3093 26; 1002 5.17492 16.4749 26; 1004 1.92492 16.1438 26
88. 1005 18.1748 15.8668 32.5; 1006 21.4252 15.7014 32.5
89. 1007 24.6754 15.5358 32.5; 1013 14.9252 15.8668 32.5
90. 1014 11.6748 15.7014 32.5; 1015 8.4246 15.5358 32.5; 1017 3.5489 14.4314 32.5
91. 1018 3.54985 16.3093 32.5; 1020 5.17492 16.4749 32.5
92. 1022 1.92492 16.1438 32.5; 1023 18.1748 15.8668 39; 1024 21.4252 15.7014 39
93. 1025 24.6754 15.5358 39; 1031 14.9252 15.8668 39; 1032 11.6748 15.7014 39
94. 1033 8.4246 15.5358 39; 1035 3.5489 14.4314 39; 1036 3.54985 16.3093 39

95. 1038 5.17492 16.4749 39; 1040 1.92492 16.1438 39; 1041 18.1748 15.8668 45.5
96. 1042 21.4252 15.7014 45.5; 1043 24.6754 15.5358 45.5
97. 1049 14.9252 15.8668 45.5; 1050 11.6748 15.7014 45.5; 1051 8.4246 15.5358 45.5
98. 1053 3.5489 14.4314 45.5; 1054 3.54985 16.3093 45.5; 1056 5.17492 16.4749 45.5
99. 1058 1.92492 16.1438 45.5; 1077 18.1748 17.4684 6.5; 1078 21.4247 17.1373 6.5
100. 1081 14.9252 17.4684 6.5; 1082 11.6753 17.1373 6.5; 1083 18.1748 17.4684 13
101. 1084 21.4247 17.1373 13; 1087 14.9252 17.4684 13; 1088 11.6753 17.1373 13
102. 1089 18.1748 17.4684 19.5; 1090 21.4247 17.1373 19.5
103. 1093 14.9252 17.4684 19.5; 1094 11.6753 17.1373 19.5; 1095 18.1748 17.4684 26
104. 1096 21.4247 17.1373 26; 1099 14.9252 17.4684 26; 1100 11.6753 17.1373 26
105. 1101 18.1748 17.4684 32.5; 1102 21.4247 17.1373 32.5
106. 1105 14.9252 17.4684 32.5; 1106 11.6753 17.1373 32.5; 1107 18.1748 17.4684 39
107. 1108 21.4247 17.1373 39; 1111 14.9252 17.4684 39; 1112 11.6753 17.1373 39
108. 1113 18.1748 17.4684 45.5; 1114 21.4247 17.1373 45.5
109. 1117 14.9252 17.4684 45.5; 1118 11.6753 17.1373 45.5; 1145 16.55 17.634 3.25
110. 1167 26.3 14.4313 3.489; 1194 0.3 -1.93715E-007 56.95
111. 1195 0.3 -1.93715E-007 63.45; 1196 0.3 -1.93715E-007 68.4
112. 1197 0.3 4.9199 56.95; 1198 0.3 4.9199 58.65; 1199 0.3 4.9199 60.2
113. 1200 0.3 4.9199 63.45; 1201 0.3 4.9199 68.4; 1203 0.3 10.25 56.95
114. 1204 0.3 10.25 58.65; 1205 0.3 10.25 60.2; 1206 0.3 10.25 61.52
115. 1207 0.3 10.25 63.45; 1208 0.3 10.25 65.5; 1209 0.3 10.25 68.4
116. 1210 0.3 15.431 52; 1212 0.3 13.878 56.95; 1213 0.3 13.878 58.65
117. 1214 0.3 13.878 60.2; 1215 0.3 13.878 61.52; 1216 0.3 13.878 63.45
118. 1217 0.3 13.878 65.5; 1218 0.3 13.878 68.4; 1219 0.3 14.6782 52
119. 1220 0.3 18.15 52; 1221 0.3 18.15 53.5; 1222 0.3 18.15 56.95
120. 1223 0.3 18.15 60.2; 1224 0.3 18.15 63.45; 1225 0.3 18.15 66.9
121. 1226 0.3 18.15 68.4; 1227 0.3 22.2592 52; 1228 0.3 22.2592 68.4
122. 1229 0.3 22.7783 56.95; 1230 0.3 22.7783 63.45; 1231 0.3 23.1192 60.2
123. 1232 1.5996 18.15 53.5; 1233 1.5996 18.15 66.9; 1234 3.05 18.15 52
124. 1235 3.05 18.15 68.4; 1236 3.67474 10.25 65.4969; 1237 3.67474 13.878 65.4969
125. 1238 3.67487 10.25 61.5294; 1239 3.67487 13.878 61.5294
126. 1240 4.3496 18.15 53.5; 1241 4.3496 18.15 66.9; 1242 5.7245 23.1192 60.2
127. 1243 5.72454 22.7783 56.95; 1244 5.72454 22.7783 63.45
128. 1245 5.7246 0.000200272 68.4; 1246 5.7246 4.9199 68.4; 1247 5.7246 6.875 52
129. 1248 5.7246 7.86 68.4; 1249 5.7246 10.25 68.4; 1250 5.7246 14.431 52
130. 1251 5.7246 13.878 68.4; 1253 5.7246 16.675 68.4; 1254 5.7246 18.15 52
131. 1255 5.7246 18.15 53.5; 1256 5.7246 18.15 66.9; 1257 5.7246 18.15 68.4
132. 1258 5.7246 22.2592 52; 1259 5.7246 22.2592 68.4; 1260 5.72474 4.3499 65.495
133. 1261 5.72474 7.86 65.495; 1262 5.72474 10.25 65.495
134. 1263 5.72474 13.878 65.495; 1264 5.72486 4.3499 61.535
135. 1265 5.72486 7.86 61.535; 1266 5.72486 10.25 61.535
136. 1267 5.72486 13.878 61.535; 1268 5.725 -1.93715E-007 58.65
137. 1269 5.725 4.9199 58.65; 1270 5.725 7.86 58.65; 1271 5.725 10.25 58.65
138. 1272 5.725 13.878 58.65; 1273 7.0806 18.15 53.5; 1274 7.0806 18.15 66.9
139. 1275 8.4346 18.15 52; 1276 8.4346 18.15 68.4; 1277 9.7906 18.15 53.5
140. 1278 9.7906 18.15 66.9; 1279 11.1 -1.93715E-007 58.65; 1280 11.1 4.9199 58.65
141. 1281 11.1 7.86 58.65; 1282 11.1 10.25 58.65; 1283 11.1 13.878 58.65
142. 1284 11.1172 5.0999 61.55; 1285 11.1172 7.86 61.55; 1286 11.1172 10.25 61.55
143. 1287 11.1172 13.878 61.55; 1288 11.1316 5.0999 65.49; 1289 11.1316 7.86 65.49
144. 1290 11.1316 10.25 65.49; 1291 11.1316 13.878 65.49; 1292 11.149 23.1192 60.2
145. 1293 11.1491 22.7783 56.95; 1294 11.1491 22.7783 63.45
146. 1295 11.1492 -0.00010033 68.4; 1296 11.1492 4.9199 68.4
147. 1297 11.1492 6.8749 52; 1298 11.1492 7.86 68.4; 1299 11.1492 10.25 68.4
148. 1301 11.1492 14.431 52; 1302 11.1492 13.878 68.4; 1303 11.1492 15.7044 52
149. 1304 11.1492 16.7044 52; 1305 11.1492 16.7044 68.4; 1306 11.1492 18.15 52
150. 1307 11.1492 18.15 53.5; 1308 11.1492 18.15 66.9; 1309 11.1492 18.15 68.4

151. 1310 11.1492 22.2592 52; 1311 11.1492 22.2592 68.4; 1312 12.4992 18.15 53.5
152. 1313 12.4992 18.15 66.9; 1314 13.8492 18.15 52; 1315 13.8492 18.15 68.4
153. 1316 15.1992 18.15 53.5; 1317 15.1992 18.15 66.9
154. 1318 16.5 -1.93715E-007 58.65; 1319 16.5 4.9199 58.65; 1320 16.5 7.86 58.65
155. 1321 16.5 10.25 58.65; 1322 16.5 13.878 58.65; 1323 16.5172 5.8599 61.565
156. 1324 16.5172 7.86 61.565; 1325 16.5172 10.25 61.565
157. 1326 16.5172 13.878 61.565; 1327 16.5315 5.8599 65.485
158. 1328 16.5315 7.86 65.485; 1329 16.5315 10.25 65.485
159. 1330 16.5315 13.878 65.485; 1331 16.549 0.000200272 68.4
160. 1332 16.549 4.9199 68.4; 1333 16.548 6.875 52; 1334 16.549 7.86 68.4
161. 1335 16.549 10.25 68.4; 1337 16.549 13.878 68.4; 1338 16.549 16.675 52
162. 1339 16.549 16.675 68.4; 1340 16.549 18.15 52; 1341 16.549 18.15 53.5
163. 1342 16.549 18.15 66.9; 1343 16.549 18.15 68.4; 1344 16.549 22.2592 52
164. 1345 16.549 22.2592 68.4; 1346 16.549 22.7783 56.95; 1347 16.549 22.7783 63.45
165. 1348 16.549 23.1192 60.2; 1349 17.899 18.15 53.5; 1350 17.899 18.15 66.9
166. 1351 19.249 18.15 52; 1352 19.249 18.15 68.4; 1353 20.599 18.15 53.5
167. 1354 20.599 18.15 66.9; 1355 21.9 -1.93715E-007 58.65; 1356 21.9 4.9199 58.65
168. 1357 21.9 10.25 58.65; 1358 21.9 13.878 58.65; 1359 21.9172 10.25 61.5799
169. 1360 21.9172 13.878 61.5799; 1361 21.9313 10.25 65.48
170. 1362 21.9313 13.878 65.48; 1363 21.9488 -0.00010033 68.4
171. 1364 21.9488 4.9199 68.4; 1365 21.9488 6.8749 52; 1367 21.9488 10.25 68.4
172. 1369 21.9488 14.431 52; 1370 21.9488 13.878 68.4; 1371 21.9488 15.7044 52
173. 1372 21.9488 16.7044 52; 1373 21.9488 16.7044 68.4; 1374 21.9488 18.15 52
174. 1375 21.9488 18.15 53.5; 1376 21.9488 18.15 66.9; 1377 21.9488 18.15 68.4
175. 1378 21.9488 22.2592 52; 1379 21.9488 22.2592 68.4; 1380 21.9489 22.7783 56.95
176. 1381 21.9489 22.7783 63.45; 1382 21.949 23.1192 60.2; 1383 23.2988 18.15 53.5
177. 1384 23.2988 18.15 66.9; 1385 24.6488 18.15 52; 1386 24.6488 18.15 68.4
178. 1387 25.9988 18.15 53.5; 1388 25.9988 18.15 66.9
179. 1389 26.8 -1.93715E-007 58.65; 1390 26.8 4.92 58.65; 1391 26.8 10.25 58.65
180. 1392 26.8 13.878 58.65; 1393 26.8 10.25 61.595; 1394 26.8 13.878 61.595
181. 1395 26.8 10.25 65.4749; 1396 26.8 13.878 65.4749
182. 1397 26.8004 0.000200272 68.4; 1398 26.8004 4.92 68.4; 1402 26.8 10.25 68.4
183. 1403 26.8004 14.431 52; 1404 26.8 13.878 68.4; 1406 26.8004 16.675 68.4
184. 1407 26.8004 18.15 52; 1408 26.8004 18.15 53.5; 1409 26.8004 18.15 66.9
185. 1410 26.8004 18.15 68.4; 1411 26.8004 22.2592 52; 1412 26.8004 22.2592 68.4
186. 1413 26.8005 22.7783 56.95; 1414 26.8005 22.7783 63.45
187. 1415 26.8005 23.1192 60.2; 1416 28.7234 18.15 53.5; 1417 28.7234 18.15 66.9
188. 1418 30.0857 18.15 52; 1419 30.0857 18.15 68.4; 1420 31.4234 18.15 53.5
189. 1421 31.4234 18.15 66.9; 1422 32.8 -1.93715E-007 56.95
190. 1423 32.8 -1.93715E-007 63.45; 1424 32.8 -1.93715E-007 68.4
191. 1425 32.8 4.92 60.2; 1426 32.8 4.92 56.95; 1427 32.8 4.92 63.45
192. 1428 32.8 4.92 68.4; 1430 32.8 10.25 52; 1431 32.8 10.25 56.95
193. 1432 32.8 10.25 60.2; 1433 32.8 10.25 63.45; 1434 32.8 10.25 68.4
194. 1435 32.8 15.431 52; 1437 32.8 13.878 56.95; 1438 32.8 13.878 60.2
195. 1439 32.8 13.878 63.45; 1440 32.8 13.878 68.4; 1441 32.8 14.6782 52
196. 1442 32.8 18.15 52; 1443 32.8 18.15 53.5; 1444 32.8 18.15 56.95
197. 1445 32.8 18.15 60.2; 1446 32.8 18.15 63.45; 1447 32.8 18.15 66.9
198. 1448 32.8 18.15 68.4; 1449 32.8 22.2592 52; 1450 32.8 22.2592 68.4
199. 1451 32.8 22.7783 56.95; 1452 32.8 22.7783 63.45; 1453 32.8 23.1192 60.2
200. 1454 3.5489 14.4314 52; 1455 29.5511 14.4314 52; 1472 5.7246 4.3499 68.4
201. 1475 5.725 4.3499 58.65; 1476 11.1 5.0999 58.65; 1479 11.1492 5.0999 68.4
202. 1480 16.5 5.8599 58.65; 1483 16.549 5.8599 68.4; 1484 21.9 6.6199 58.65
203. 1485 21.9488 6.6199 68.4; 1486 11.1492 22.508 54.3726
204. 1487 21.9488 22.5187 54.475; 1488 16.549 22.5134 54.4238
205. 1489 11.1492 22.5187 65.925; 1490 21.9488 22.5187 65.925
206. 1491 16.549 22.5187 65.925; 1494 19.2489 22.5187 65.925

207. 1495 13.8491 22.5187 65.925; 1500 13.8482 22.5107 54.3982
208. 1501 19.2486 22.5161 54.4494; 1504 13.849 23.1192 60.2
209. 1505 19.249 23.1192 60.2; 1519 32.8 13.878 52; 1520 0.3 13.878 52
210. 1521 1.5996 18.15 56.95; 1522 1.5996 18.15 63.45; 1523 0.3 18.15 55.225
211. 1524 0.3 18.15 58.575; 1525 1.5996 18.15 60.2; 1526 0.3 18.15 61.825
212. 1527 0.3 18.15 65.175; 1530 26.8002 4.92 63.4502; 1531 26.8 4.92 56.95
213. 1538 28.045 4.92 68.4; 1540 29.495 4.92 68.4; 1542 30.315 4.92 68.4
214. 1544 31.565 4.92 68.4; 1545 28.045 4.92 63.4502; 1546 29.495 4.92 63.4501
215. 1547 30.315 4.92 63.4501; 1548 31.565 4.92 63.45; 1549 28.045 4.92 56.95
216. 1550 29.495 4.92 56.95; 1551 30.315 4.92 56.95; 1552 31.565 4.92 56.95
217. 1553 26.8001 4.92 60.2003; 1554 28.045 4.92 60.2002; 1555 29.495 4.92 60.2001
218. 1556 30.315 4.92 60.2001; 1557 31.565 4.92 60.2001; 1558 25.25 4.91997 58.65
219. 1561 25.25 4.91998 55; 1562 26.8 4.92 55; 1563 32.8 4.92 52.75
220. 1564 25.25 4.91999 52.75; 1565 28.045 4.92 52.75; 1566 29.495 4.92 52.75
221. 1567 30.315 4.92 52.75; 1568 31.565 4.92 52.75; 1569 26.8 4.92 52.75
222. 1570 30.315 4.92 65.6501; 1571 30.315 4.92 61.3501; 1572 26.8002 4.92 64.3852
223. 1573 26.8002 4.92 62.6153; 1575 32.8 6.031 2.5; 1576 26.301 6.031 2.5
224. 1579 26.301 6.031 6.5; 1580 28.045 6.031 2.5; 1581 28.045 6.031 6.5
225. 1582 29.495 6.031 2.5; 1583 29.495 6.031 6.5; 1584 30.6 6.031 2.5
226. 1585 30.6 6.031 6.5; 1586 31.705 6.031 2.5; 1587 31.705 6.031 6.5
227. 1588 28.045 6.031 0; 1589 29.495 6.031 0; 1590 30.6 6.031 0
228. 1591 31.705 6.031 0; 1594 0.3 22.5187 54.475; 1595 32.8 22.5187 54.475
229. 1596 0.3 22.5187 65.925; 1597 32.8 22.5187 65.925
230. 1598 5.72457 22.5134 54.4238; 1599 5.72457 22.5187 65.925
231. 1600 26.8004 22.5187 54.475; 1601 26.8004 22.5187 65.925
232. 1609 26.3 14.4315 7.872; 1614 29.55 14.4312 7.872; 1616 5.7246 16.5309 52
233. 1617 11.1492 17.0837 52; 1618 21.9488 17.0839 52; 1619 26.8004 16.5895 52
234. 1621 21.9508 17.0837 52; 1622 28.7711 14.4314 0; 1624 28.7711 14.4314 6.5
235. 1625 28.771 16.3893 6.5; 1626 28.7711 14.4314 13; 1627 28.7702 16.3893 13
236. 1628 28.7711 14.4314 19.5; 1629 28.771 16.3893 19.5; 1630 28.7711 14.431 26
237. 1631 28.771 16.3893 26; 1632 28.7711 14.431 32.5; 1633 28.771 16.3893 32.5
238. 1634 28.771 14.4314 39; 1635 28.771 16.3893 39; 1636 28.7711 14.4314 45.5
239. 1637 28.771 16.3893 45.5; 1638 28.771 16.3888 0; 1639 27.5355 15.41 0
240. 1640 8.42512 16.8061 0; 1641 24.6749 16.8061 0; 1643 30.7855 16.1835 0
241. 1644 27.5355 16.5146 0; 1645 27.5355 15.41 6.5; 1647 30.7855 16.1837 6.5
242. 1648 27.5355 16.5149 6.5; 1649 27.5355 15.41 13; 1651 30.7855 16.1837 13
243. 1652 27.5355 16.5149 13; 1653 27.5355 15.41 19.5; 1655 30.7855 16.1837 19.5
244. 1656 27.5355 16.5149 19.5; 1657 27.5355 15.41 26; 1659 30.7855 16.1837 26
245. 1660 27.5355 16.5149 26; 1661 27.5355 15.41 32.5; 1663 30.7855 16.1837 32.5
246. 1664 27.5355 16.5149 32.5; 1665 27.5355 15.41 39; 1667 30.7855 16.1837 39
247. 1668 27.5355 16.5149 39; 1669 27.5355 15.41 45.5; 1671 30.7855 16.1837 45.5
248. 1672 27.5355 16.5149 45.5; 1673 8.42512 16.8061 6.5; 1674 8.42512 16.8061 13
249. 1675 8.42512 16.8061 19.5; 1676 8.42512 16.8061 26; 1677 8.42512 16.8061 32.5
250. 1678 8.42512 16.8061 39; 1679 8.42512 16.8061 45.5; 1680 24.6749 16.8061 6.5
251. 1681 24.6749 16.8061 13; 1682 24.6749 16.8061 19.5; 1683 24.6749 16.8061 26
252. 1684 24.6749 16.8061 32.5; 1685 24.6749 16.8061 39; 1686 24.6749 16.8061 45.5
253. 1689 16.5505 14.4311 3.5; 1690 23.0503 14.4312 3.49; 1693 19.8006 14.4311 3.49
254. 1695 28.7711 14.4314 3.25; 1696 32.8 14.431 5.5; 1697 28.7711 14.4314 5.5
255. 1698 31 14.4312 5.5; 1699 26.3 14.4314 11.572; 1701 32.8 14.431 11.572
256. 1702 28.7711 14.4312 11.572; 1703 29.55 14.4312 11.572; 1704 32.8 14.431 7.872
257. 1705 27.173 6.031 0; 1706 27.173 6.031 2.5; 1707 27.173 6.031 6.5
258. 1708 6.80004 10.2311 0; 1709 26.3005 10.2311 0; 1710 13.3004 10.2311 0
259. 1711 19.8006 10.2311 0; 1714 16.5505 10.231 0; 1715 13.9879 17.3729 48.5836
260. 1716 19.1121 17.3729 48.5836; 1717 11.1492 14.4312 45.5
261. 1718 21.9488 14.4312 45.5; 1719 13.8493 14.431 48.7503
262. 1720 19.2491 14.4309 48.7497; 1721 30.7861 14.4312 0; 1722 29.7783 15.3075 0

263. 1723 29.7782 16.2861 0; 1724 31.7927 15.3073 0; 1725 31.7927 16.0809 0
264. 1726 30.7861 14.4312 6.5; 1727 29.7783 15.3075 6.5; 1728 29.7783 16.2865 6.5
265. 1729 31.7927 15.3073 6.5; 1730 31.7928 16.0809 6.5; 1731 30.7861 14.4312 13
266. 1732 29.7783 15.3075 13; 1733 29.7783 16.2865 13; 1734 31.7927 15.3073 13
267. 1735 31.7928 16.0809 13; 1736 30.7861 14.4312 19.5; 1737 29.7783 15.3075 19.5
268. 1738 29.7783 16.2865 19.5; 1739 31.7927 15.3073 19.5
269. 1740 31.7928 16.0809 19.5; 1741 30.7861 14.431 26; 1742 29.7783 15.3075 26
270. 1743 29.7783 16.2865 26; 1744 31.7927 15.3073 26; 1745 31.7928 16.0809 26
271. 1746 30.7861 14.431 32.5; 1747 29.7783 15.3075 32.5; 1748 29.7783 16.2865 32.5
272. 1749 31.7927 15.3073 32.5; 1750 31.7928 16.0809 32.5; 1751 30.7861 14.4312 39
273. 1752 29.7783 15.3075 39; 1753 29.7783 16.2865 39; 1754 31.7927 15.3073 39
274. 1755 31.7928 16.0809 39; 1756 30.7861 14.4312 45.5; 1757 29.7783 15.3075 45.5
275. 1758 29.7783 16.2865 45.5; 1759 31.7927 15.3073 45.5
276. 1760 31.7928 16.0809 45.5; 1761 4.3289 14.4314 0; 1762 4.32901 16.3887 0
277. 1763 5.5645 15.41 0; 1764 2.3145 16.1835 0; 1765 5.5645 16.5146 0
278. 1766 2.3139 14.4312 0; 1767 3.3217 15.3075 0; 1768 3.32176 16.2861 0
279. 1769 1.30725 15.3073 0; 1770 1.30725 16.0809 0; 1771 4.3289 14.4314 6.5
280. 1772 4.32901 16.3887 6.5; 1773 5.5645 15.41 6.5; 1774 2.3145 16.1835 6.5
281. 1775 5.5645 16.5146 6.5; 1776 2.3139 14.4312 6.5; 1777 3.3217 15.3075 6.5
282. 1778 3.32176 16.2861 6.5; 1779 1.30725 15.3073 6.5; 1780 1.30725 16.0809 6.5
283. 1781 4.3289 14.4314 13; 1782 4.32901 16.3887 13; 1783 5.5645 15.41 13
284. 1784 2.3145 16.1835 13; 1785 5.5645 16.5146 13; 1786 2.3139 14.4312 13
285. 1787 3.3217 15.3075 13; 1788 3.32176 16.2861 13; 1789 1.30725 15.3073 13
286. 1790 1.30725 16.0809 13; 1791 4.3289 14.4314 19.5; 1792 4.32901 16.3887 19.5
287. 1793 5.5645 15.41 19.5; 1794 2.3145 16.1835 19.5; 1795 5.5645 16.5146 19.5
288. 1796 2.3139 14.4312 19.5; 1797 3.3217 15.3075 19.5; 1798 3.32176 16.2861 19.5
289. 1799 1.30725 15.3073 19.5; 1800 1.30725 16.0809 19.5; 1801 4.3289 14.4314 26
290. 1802 4.32901 16.3887 26; 1803 5.5645 15.41 26; 1804 2.3145 16.1835 26
291. 1805 5.5645 16.5146 26; 1806 2.3139 14.4312 26; 1807 3.3217 15.3075 26
292. 1808 3.32176 16.2861 26; 1809 1.30725 15.3073 26; 1810 1.30725 16.0809 26
293. 1811 4.3289 14.4314 32.5; 1812 4.32901 16.3887 32.5; 1813 5.5645 15.41 32.5
294. 1814 2.3145 16.1835 32.5; 1815 5.5645 16.5146 32.5; 1816 2.3139 14.4312 32.5
295. 1817 3.3217 15.3075 32.5; 1818 3.32176 16.2861 32.5; 1819 1.30725 15.3073 32.5
296. 1820 1.30725 16.0809 32.5; 1821 4.3289 14.4314 39; 1822 4.32901 16.3887 39
297. 1823 5.5645 15.41 39; 1824 2.3145 16.1835 39; 1825 5.5645 16.5146 39
298. 1826 2.3139 14.4312 39; 1827 3.3217 15.3075 39; 1828 3.32176 16.2861 39
299. 1829 1.30725 15.3073 39; 1830 1.30725 16.0809 39; 1831 4.3289 14.4314 45.5
300. 1832 4.32901 16.3887 45.5; 1833 5.5645 15.41 45.5; 1834 2.3145 16.1835 45.5
301. 1835 5.5645 16.5146 45.5; 1836 2.3139 14.4312 45.5; 1837 3.3217 15.3075 45.5
302. 1838 3.32176 16.2861 45.5; 1839 1.30725 15.3073 45.5
303. 1840 1.30725 16.0809 45.5; 1841 32.8 0.731 -3.5; 1842 32.8 6.031 -3.5
304. 1843 26.301 6.031 -3.5; 1844 26.301 0.7313 -3.5; 1845 32.8 3.4185 -3.5
305. 1846 26.301 3.38115 -3.5; 1847 26.301 3.38115 0; 1848 26.301 6.031 -1.75
306. 1849 26.301 3.38115 -1.75; 1850 29.5505 6.031 -3.5; 1851 29.5505 3.39983 -3.5
307. 1852 32.8 3.4185 0; 1853 32.8 6.031 5.25; 1854 31.705 6.031 5.25
308. 1855 28.045 6.031 5.25; 1856 27.173 6.031 5.25; 1857 29.495 6.031 5.25
309. 1858 30.6 6.031 5.25; 1859 26.301 6.031 5.25; 1860 30.195 6.031 2.5
310. 1861 30.195 6.031 5.25; 1862 32.8 3.38115 -3.5; 1863 32.8 6.031 -1.75
311. 1864 32.8 3.38115 0; 1866 32.8 3.38115 -1.75; 1867 22.801 6.031 6.5
312. 1868 22.8 4.91999 52.75
313. **********
314. MEMBER INCIDENCES
315. 5 6 657; 13 19 664; 97 80 1520; 130 96 1519; 175 119 659; 208 135 679
316. 241 151 661; 274 167 681; 307 183 662; 340 199 682; 373 215 664; 406 231 684
317. 439 247 657; 460 1864 8; 472 263 677; 551 294 295; 552 119 1826; 559 300 294
318. 564 303 1821; 565 303 304; 566 304 300; 583 295 310; 584 135 1751; 587 310 835

319. 612 323 324; 620 329 323; 624 1017 1816; 625 332 1811; 626 332 333
320. 627 333 329; 644 324 339; 645 167 1746; 648 339 822; 673 352 353; 674 183 1796
321. 681 358 352; 686 361 1791; 687 361 362; 688 362 358; 705 353 368; 706 199 1736
322. 709 368 796; 734 381 382; 735 215 1786; 742 387 381; 747 390 1781; 748 390 391
323. 749 391 387; 766 382 397; 767 231 1731; 770 397 783; 795 410 411; 796 247 1766
324. 800 3 410; 802 410 921; 803 416 410; 806 416 923; 808 419 1761; 809 419 420
325. 810 420 416; 818 420 925; 827 411 426; 828 263 1721; 831 426 757; 853 3 1145
326. 855 23 447; 856 32 41; 857 41 445; 858 14 23; 890 442 14; 898 445 50
327. 903 447 32; 1005 463 266; 1019 471 1717; 1020 540 1831; 1021 472 592
328. 1022 593 1801; 1023 473 648; 1024 649 1771; 1047 848 1636; 1049 770 1624
329. 1072 809 1630; 1126 513 660; 1128 513 1836; 1160 527 680; 1162 527 1756
330. 1202 539 463; 1206 540 471; 1275 572 663; 1283 572 1806; 1309 586 683
331. 1317 586 1741; 1337 592 465; 1341 593 472; 1388 607 658; 1414 628 658
332. 1422 628 1776; 1436 678 609; 1448 642 678; 1476 648 467; 1480 649 473
333. 1497 642 1726; 1523 657 658; 1537 80 513; 1540 119 151; 1544 183 215
334. 1546 215 628; 1547 513 119; 1549 572 183; 1551 628 247; 1556 658 664
335. 1573 96 527; 1576 135 167; 1577 167 586; 1580 199 231; 1582 231 1701
336. 1583 527 135; 1585 586 199; 1587 642 1696; 1596 49 699; 1597 40 31
337. 1598 31 547; 1599 22 13; 1600 13 601; 1601 491 40; 1602 547 22; 1604 51 715
338. 1605 42 33; 1606 33 558; 1607 24 15; 1608 15 612; 1609 502 42; 1610 558 24
339. 1611 612 723; 1629 80 699; 1633 699 491; 1637 699 513; 1644 572 151
340. 1652 708 10; 1661 708 628; 1670 96 715; 1673 715 502; 1677 715 527
341. 1689 263 1696; 1690 263 723; 1691 1704 1701; 1693 723 11; 1697 723 642
342. 1709 419 1708; 1747 247 10; 1748 263 11; 1823 416 1710; 1824 411 1711
343. 1837 677 1591; 1838 740 729; 1839 741 1847; 1840 742 737; 1841 743 739
344. 1842 740 657; 1843 742 740; 1844 743 742; 1845 741 743; 1940 419 649
345. 1941 416 648; 1942 411 1693; 1966 3 922; 1968 749 416; 1970 751 420
346. 1971 752 419; 1973 752 1765; 1974 752 1640; 1976 751 924; 1979 932 1764
347. 1981 928 1762; 1987 410 906; 1988 411 908; 1989 1622 1638; 1991 426 910
348. 1995 3 907; 1996 759 411; 1997 760 426; 1998 761 757; 1999 761 1644
349. 2000 761 1641; 2001 760 909; 2002 11 1725; 2004 645 467; 2005 770 478
350. 2006 478 645; 2015 628 601; 2016 642 612; 2019 442 1081; 2023 766 1775
351. 2024 766 1673; 2025 765 1082; 2026 950 1774; 2027 946 1772; 2036 442 1077
352. 2040 774 1648; 2041 774 1680; 2042 773 1078; 2043 612 1730; 2055 215 13
353. 2056 231 15; 2059 14 1087; 2063 779 1785; 2064 779 1674; 2065 778 1088
354. 2066 968 1784; 2067 964 1782; 2076 14 1083; 2080 787 1652; 2081 787 1681
355. 2082 786 1084; 2083 15 1735; 2095 183 22; 2096 199 24; 2099 23 1093
356. 2103 792 1795; 2104 792 1675; 2105 791 1094; 2106 986 1794; 2107 982 1792
357. 2116 23 1089; 2120 800 1656; 2121 800 1682; 2122 799 1090; 2123 24 1740
358. 2125 589 465; 2126 809 481; 2127 481 589; 2135 572 547; 2136 586 558
359. 2139 447 1099; 2143 805 1805; 2144 805 1676; 2145 804 1100; 2146 1004 1804
360. 2147 1000 1802; 2156 447 1095; 2160 813 1660; 2161 813 1683; 2162 812 1096
361. 2163 558 1745; 2175 151 31; 2176 167 33; 2179 32 1105; 2183 818 1815
362. 2184 818 1677; 2185 817 1106; 2186 1022 1814; 2187 1018 1812; 2196 32 1101
363. 2200 826 1664; 2201 826 1684; 2202 825 1102; 2203 33 1750; 2215 119 40
364. 2216 135 42; 2219 41 1111; 2223 831 1825; 2224 831 1678; 2225 830 1112
365. 2226 1040 1824; 2227 1036 1822; 2236 41 1107; 2240 839 1668; 2241 839 1685
366. 2242 838 1108; 2243 42 1755; 2245 535 463; 2246 848 477; 2247 477 1718
367. 2256 513 491; 2257 527 502; 2260 445 1117; 2264 844 1835; 2265 844 1679
368. 2266 843 1118; 2267 1058 1834; 2268 1054 1832; 2277 445 1113; 2281 852 1672
369. 2282 852 1686; 2283 851 1114; 2284 502 1760; 2298 96 1441; 2471 842 829
370. 2473 816 829; 2475 790 803; 2476 777 790; 2499 824 837; 2501 798 811
371. 2502 785 798; 2521 850 837; 2534 906 759; 2535 3 906; 2536 907 759
372. 2537 906 907; 2538 908 760; 2539 759 908; 2540 909 759; 2541 908 909
373. 2542 910 761; 2543 760 910; 2556 921 749; 2557 922 749; 2558 923 751
374. 2559 924 749; 2560 925 752; 2565 932 1770; 2567 3 921; 2568 921 922

375. 2569 749 923; 2570 923 924; 2571 751 925; 2588 950 1780; 2589 648 942
376. 2590 467 933; 2591 645 934; 2592 1624 1625; 2593 478 935; 2594 933 772
377. 2595 442 933; 2596 934 773; 2598 935 774; 2599 773 935; 2607 941 764
378. 2608 942 765; 2609 943 766; 2611 442 941; 2613 765 943; 2630 968 1790
379. 2631 387 960; 2632 381 951; 2633 382 952; 2634 1626 1627; 2635 397 953
380. 2636 951 785; 2637 14 951; 2638 952 786; 2639 785 952; 2640 953 787
381. 2641 786 953; 2649 959 777; 2650 960 778; 2651 961 779; 2653 14 959
382. 2654 777 960; 2655 778 961; 2672 986 1800; 2673 358 978; 2674 352 969
383. 2675 353 970; 2676 1628 1629; 2677 368 971; 2678 969 798; 2679 23 969
384. 2680 970 799; 2681 798 970; 2682 971 800; 2683 799 971; 2691 977 790
385. 2692 978 791; 2693 979 792; 2695 23 977; 2696 790 978; 2697 791 979
386. 2714 1004 1810; 2715 592 996; 2716 465 987; 2717 589 988; 2718 1630 1631
387. 2719 481 989; 2720 987 811; 2721 447 987; 2722 988 812; 2723 811 988
388. 2724 989 813; 2725 812 989; 2733 995 803; 2734 996 804; 2735 997 805
389. 2737 447 995; 2738 803 996; 2739 804 997; 2756 1022 1820; 2757 329 1014
390. 2758 323 1005; 2759 324 1006; 2760 1632 1633; 2761 339 1007; 2762 1005 824
391. 2763 32 1005; 2764 1006 825; 2765 824 1006; 2766 1007 826; 2767 825 1007
392. 2775 1013 816; 2776 1014 817; 2777 1015 818; 2779 32 1013; 2780 816 1014
393. 2781 817 1015; 2798 1040 1830; 2799 300 1032; 2800 294 1023; 2801 295 1024
394. 2802 1634 1635; 2803 310 1025; 2804 1023 837; 2805 41 1023; 2806 1024 838
395. 2807 837 1024; 2808 1025 839; 2809 838 1025; 2817 1031 829; 2818 1032 830
396. 2819 1033 831; 2821 41 1031; 2822 829 1032; 2823 830 1033; 2840 1058 1840
397. 2841 539 1050; 2842 463 1041; 2843 535 1042; 2844 1636 1637; 2845 477 1043
398. 2846 1041 850; 2847 445 1041; 2848 1042 851; 2849 850 1042; 2850 1043 852
399. 2851 851 1043; 2859 1049 842; 2860 1050 843; 2861 1051 844; 2863 445 1049
400. 2864 842 1050; 2865 843 1051; 2917 765 473; 2918 766 649; 2919 773 478
401. 2920 774 770; 2921 778 391; 2922 779 390; 2923 786 397; 2924 787 783
402. 2925 791 362; 2926 792 361; 2927 799 368; 2928 800 796; 2929 804 472
403. 2930 805 593; 2931 812 481; 2932 813 809; 2933 817 333; 2934 818 332
404. 2935 825 339; 2936 826 822; 2937 830 304; 2938 831 303; 2939 838 310
405. 2940 839 835; 2941 843 471; 2942 844 540; 2943 851 477; 2944 852 848
406. 2949 442 467; 2950 14 381; 2951 23 352; 2952 447 465; 2953 32 323; 2954 41 294
407. 2955 445 463; 2956 50 1338; 2959 777 387; 2960 785 382; 2961 790 358
408. 2962 798 353; 2963 803 592; 2964 811 589; 2965 816 329; 2966 824 324
409. 2967 829 300; 2968 837 295; 2969 842 539; 2970 850 535; 2973 467 941
410. 2974 473 943; 2975 381 959; 2976 391 961; 2977 352 977; 2978 362 979
411. 2979 465 995; 2980 472 997; 2981 323 1013; 2982 333 1015; 2983 294 1031
412. 2984 304 1033; 2985 463 1049; 2986 471 1051; 2989 1077 772; 2990 1078 772
413. 2993 1081 764; 2994 1082 764; 2995 933 1077; 2996 934 1078; 2999 941 1081
414. 3000 942 1082; 3001 1083 785; 3002 1084 785; 3005 1087 777; 3006 1088 777
415. 3007 951 1083; 3008 952 1084; 3011 959 1087; 3012 960 1088; 3013 1089 798
416. 3014 1090 798; 3017 1093 790; 3018 1094 790; 3019 969 1089; 3020 970 1090
417. 3023 977 1093; 3024 978 1094; 3025 1095 811; 3026 1096 811; 3029 1099 803
418. 3030 1100 803; 3031 987 1095; 3032 988 1096; 3035 995 1099; 3036 996 1100
419. 3037 1101 824; 3038 1102 824; 3041 1105 816; 3042 1106 816; 3043 1005 1101
420. 3044 1006 1102; 3047 1013 1105; 3048 1014 1106; 3049 1107 837; 3050 1108 837
421. 3053 1111 829; 3054 1112 829; 3055 1023 1107; 3056 1024 1108; 3059 1031 1111
422. 3060 1032 1112; 3061 1113 850; 3062 1114 850; 3065 1117 842; 3066 1118 842
423. 3067 1041 1113; 3068 1042 1114; 3071 1049 1117; 3072 1050 1118; 3085 601 708
424. 3088 247 708; 3096 764 942; 3097 764 648; 3101 772 934; 3102 772 645
425. 3106 1145 442; 3166 764 777; 3170 772 785; 3215 749 764; 3217 759 772
426. 3269 757 1709; 3276 757 1167; 3277 1167 770; 3307 247 658; 3308 628 657
427. 3309 657 607; 3310 658 6; 3311 263 678; 3312 642 677; 3437 1194 1197
428. 3438 1194 1199; 3439 1195 1199; 3440 1195 1200; 3441 1196 1201; 3442 1198 1197
429. 3443 1199 1198; 3444 1200 1199; 3445 1201 1200; 3446 1197 1203; 3447 1197 1205
430. 3448 1200 1205; 3449 1200 1207; 3450 1201 1209; 3451 1210 1219; 3452 1204 1203

431. 3453 1205 1204; 3454 1206 1205; 3455 1207 1206; 3456 1208 1207; 3457 1209 1208
432. 3458 1203 1212; 3459 1203 1214; 3460 1207 1214; 3461 1207 1216; 3462 1209 1218
433. 3464 1213 1212; 3465 1214 1213; 3466 1215 1214; 3467 1216 1215; 3468 1217 1216
434. 3469 1218 1217; 3471 1212 1222; 3472 1212 1223; 3473 1216 1223; 3474 1216 1224
435. 3475 1218 1226; 3477 1221 1220; 3478 1222 1523; 3479 1223 1524; 3480 1224 1526
436. 3481 1225 1527; 3482 1226 1225; 3483 1220 1227; 3484 1226 1228; 3485 1222 1229
437. 3486 1224 1230; 3487 1222 1231; 3488 1224 1231; 3489 1227 1594; 3490 1228 1596
438. 3491 1229 1231; 3492 1230 1231; 3493 1232 1220; 3494 1232 1221; 3495 1233 1225
439. 3496 1233 1226; 3497 1220 1234; 3498 1226 1235; 3499 1236 1208; 3500 1237 1217
440. 3501 1238 1206; 3502 1239 1215; 3503 1234 1232; 3504 1235 1233; 3505 1240 1232
441. 3506 1241 1233; 3507 1231 1242; 3510 1229 1243; 3511 1230 1244; 3512 1201 1246
442. 3513 1209 1249; 3514 80 274; 3515 1218 1251; 3516 1227 1258; 3517 1228 1259
443. 3520 1269 1198; 3521 1271 1204; 3522 1272 1213; 3523 1238 1236; 3524 1239 1237
444. 3525 1240 1234; 3526 1241 1235; 3527 1234 1254; 3528 1235 1257; 3529 1262 1236
445. 3530 1263 1237; 3531 1266 1238; 3532 1267 1239; 3533 1254 1240; 3534 1255 1240
446. 3535 1256 1241; 3536 1257 1241; 3537 1243 1242; 3538 1244 1242; 3539 1258 1598
447. 3540 1259 1599; 3541 1245 1472; 3542 1248 1246; 3543 1249 1248; 3544 1247 1250
448. 3545 1251 1249; 3546 1250 1616; 3547 1253 1251; 3548 1254 1616; 3551 1257 1253
449. 3552 1254 1255; 3553 1257 1256; 3554 1258 1254; 3555 1259 1257; 3556 1260 1472
450. 3557 1261 1472; 3558 1248 1260; 3559 1261 1248; 3560 1262 1248; 3561 1249 1261
451. 3562 1262 1249; 3563 1263 1251; 3564 1261 1260; 3565 1262 1261; 3566 1263 1262
452. 3567 1264 1260; 3568 1265 1264; 3569 1266 1265; 3570 1267 1266; 3571 1475 1264
453. 3572 1265 1475; 3573 1270 1264; 3574 1270 1265; 3575 1266 1270; 3576 1271 1265
454. 3577 1271 1266; 3578 1272 1267; 3579 1268 1475; 3580 1269 1270; 3581 1270 1271
455. 3582 1271 1272; 3583 1254 1273; 3584 1255 1273; 3585 1256 1274; 3586 1257 1274
456. 3587 1254 1275; 3588 1257 1276; 3589 1273 1275; 3590 1274 1276; 3591 1280 1269
457. 3592 1282 1271; 3593 1283 1272; 3594 1286 1266; 3595 1287 1267; 3596 1290 1262
458. 3597 1291 1263; 3598 1273 1277; 3599 1274 1278; 3600 1242 1292; 3601 1243 1293
459. 3602 1244 1294; 3607 1246 1296; 3608 1249 1299; 3609 1250 276; 3610 1251 1302
460. 3611 1258 1310; 3612 1259 1311; 3613 1275 1277; 3614 1276 1278; 3615 1275 1306
461. 3616 1276 1309; 3617 1277 1306; 3618 1277 1307; 3619 1278 1308; 3620 1278 1309
462. 3621 1279 1280; 3622 1280 1476; 3623 1281 1282; 3624 1282 1283; 3625 1476 1284
463. 3626 1281 1284; 3627 1285 1476; 3628 1281 1285; 3629 1282 1285; 3630 1286 1281
464. 3631 1282 1286; 3632 1283 1287; 3633 1285 1284; 3634 1286 1285; 3635 1287 1286
465. 3636 1284 1288; 3637 1289 1288; 3638 1290 1289; 3639 1291 1290; 3640 1288 1479
466. 3641 1289 1479; 3642 1298 1288; 3643 1289 1298; 3644 1290 1298; 3645 1299 1289
467. 3646 1290 1299; 3647 1291 1302; 3648 1293 1292; 3649 1294 1292; 3650 1310 1486
468. 3651 1311 1489; 3652 1295 1296; 3653 1296 1479; 3654 1298 1299; 3655 1297 1301
469. 3656 1299 1302; 3658 1303 1301; 3659 1302 1305; 3660 1303 1304; 3661 1304 1617
470. 3662 1307 1304; 3663 1308 1305; 3664 1305 1309; 3665 1306 1307; 3666 1309 1308
471. 3667 1306 1310; 3668 1309 1311; 3669 1306 1312; 3670 1307 1312; 3671 1308 1313
472. 3672 1309 1313; 3673 1306 1314; 3674 1309 1315; 3675 1312 1314; 3676 1313 1315
473. 3677 1319 1280; 3678 1321 1282; 3679 1322 1283; 3680 1325 1286; 3681 1326 1287
474. 3682 1329 1290; 3683 1330 1291; 3686 1292 1504; 3689 1293 1346; 3690 1294 1347
475. 3693 1332 1295; 3694 1296 1332; 3695 1335 1296; 3696 1297 266; 3697 1299 1335
476. 3698 1337 1299; 3699 1301 273; 3700 1302 1337; 3701 1340 1301; 3702 1343 1302
477. 3703 1344 1306; 3704 1345 1309; 3705 1310 1344; 3706 1311 1345; 3707 1310 1500
478. 3708 1311 1495; 3709 1312 1316; 3710 1313 1317; 3711 1314 1316; 3712 1315 1317
479. 3713 1314 1340; 3714 1315 1343; 3715 1316 1340; 3716 1316 1341; 3717 1317 1342
480. 3718 1317 1343; 3719 1318 1319; 3720 1319 1480; 3721 1320 1321; 3722 1321 1322
481. 3723 1480 1323; 3724 1320 1323; 3725 1324 1480; 3726 1320 1324; 3727 1321 1324
482. 3728 1325 1320; 3729 1321 1325; 3730 1322 1326; 3731 1324 1323; 3732 1325 1324
483. 3733 1326 1325; 3734 1323 1327; 3735 1328 1327; 3736 1329 1328; 3737 1330 1329
484. 3738 1327 1483; 3739 1328 1483; 3740 1334 1327; 3741 1328 1334; 3742 1329 1334
485. 3743 1335 1328; 3744 1329 1335; 3745 1330 1337; 3746 1331 1332; 3747 1334 1483
486. 3748 1335 1334; 3749 1333 266; 3750 1337 1335; 3752 1339 1337; 3756 1343 1339

487. 3757 1340 1341; 3758 1343 1342; 3759 1344 1340; 3760 1345 1343; 3761 1344 1488
488. 3762 1345 1491; 3763 1346 1348; 3764 1347 1348; 3765 1340 1349; 3766 1341 1349
489. 3767 1342 1350; 3768 1343 1350; 3769 1340 1351; 3770 1343 1352; 3771 1349 1351
490. 3772 1350 1352; 3773 1356 1319; 3774 1357 1321; 3775 1358 1322; 3776 1359 1325
491. 3777 1360 1326; 3778 1361 1329; 3779 1362 1330; 3780 1332 1363; 3781 1332 1364
492. 3782 1335 1364; 3783 1365 266; 3784 1335 1367; 3785 1337 1367; 3787 1337 1370
493. 3788 1340 1369; 3789 1343 1370; 3790 1344 1374; 3791 1345 1377; 3792 1344 1378
494. 3793 1345 1379; 3796 1344 1501; 3797 1345 1494; 3798 1346 1380; 3799 1347 1381
495. 3802 1349 1353; 3803 1350 1354; 3806 1348 1505; 3807 1351 1353; 3808 1352 1354
496. 3809 1351 1374; 3810 1352 1377; 3811 1353 1374; 3812 1353 1375; 3813 1354 1376
497. 3814 1354 1377; 3815 1355 1356; 3816 1356 1484; 3817 1357 1358; 3818 1357 1359
498. 3819 1358 1360; 3820 1359 1361; 3821 1360 1362; 3822 1484 1485; 3823 1361 1367
499. 3824 1362 1370; 3825 1363 1364; 3826 1364 1485; 3828 1365 1369; 3829 1367 1370
500. 3831 1371 1369; 3832 1370 1373; 3833 1371 1372; 3834 1372 1618; 3835 1375 1372
501. 3836 1376 1373; 3837 1373 1377; 3838 1374 1375; 3839 1377 1376; 3840 1374 1378
502. 3841 1377 1379; 3842 1378 1487; 3843 1379 1490; 3844 1380 1382; 3845 1381 1382
503. 3846 1374 1383; 3847 1375 1383; 3848 1376 1384; 3849 1377 1384; 3850 1374 1385
504. 3851 1377 1386; 3852 1383 1385; 3853 1384 1386; 3854 1390 1558; 3855 1391 1357
505. 3856 1392 1358; 3857 1393 1359; 3858 1394 1360; 3859 1395 1361; 3860 1396 1362
506. 3861 1383 1387; 3862 1384 1388; 3863 1364 1398; 3864 1367 1402; 3865 1369 289
507. 3866 1370 1404; 3867 1378 1411; 3868 1379 1412; 3873 1380 1413; 3874 1381 1414
508. 3875 1382 1415; 3876 1385 1387; 3877 1386 1388; 3878 1385 1407; 3879 1386 1410
509. 3880 1387 1407; 3881 1387 1408; 3882 1388 1409; 3883 1388 1410; 3884 1389 1390
510. 3885 1390 1391; 3886 1391 1392; 3887 1391 1393; 3888 1392 1394; 3889 1393 1395
511. 3890 1394 1396; 3891 1390 1553; 3892 1395 1402; 3893 1396 1404; 3897 1402 1398
512. 3899 1404 1402; 3900 1619 1407; 3901 1406 1404; 3905 1410 1406; 3906 1407 1408
513. 3907 1410 1409; 3908 1411 1407; 3909 1412 1410; 3910 1411 1600; 3911 1412 1601
514. 3912 1413 1415; 3913 1414 1415; 3914 1407 1416; 3915 1408 1416; 3916 1409 1417
515. 3917 1410 1417; 3918 1407 1418; 3919 1410 1419; 3920 1416 1418; 3921 1417 1419
516. 3922 1416 1420; 3923 1417 1421; 3924 1398 1538; 3925 1402 1434; 3926 1403 287
517. 3927 1404 1440; 3928 1411 1449; 3929 1412 1450; 3934 1413 1451; 3935 1414 1452
518. 3936 1415 1453; 3937 1418 1420; 3938 1419 1421; 3939 1418 1442; 3940 1419 1448
519. 3941 1420 1442; 3942 1420 1443; 3943 1421 1447; 3944 1421 1448; 3945 1422 1425
520. 3946 1423 1425; 3947 1422 1426; 3948 1423 1427; 3949 1424 1428; 3950 1425 1426
521. 3951 1427 1425; 3952 1428 1427; 3953 1431 1426; 3954 1426 1432; 3955 1427 1432
522. 3956 1433 1427; 3957 1434 1428; 3958 1430 696; 3959 1431 1430; 3960 1432 1431
523. 3961 1433 1432; 3962 1434 1433; 3964 1431 1437; 3965 1431 1438; 3966 1433 1438
524. 3967 1433 1439; 3968 1434 1440; 3971 1438 1437; 3972 1439 1438; 3973 1440 1439
525. 3975 1437 1444; 3976 1437 1445; 3977 1439 1445; 3978 1439 1446; 3979 1440 1448
526. 3980 1441 1435; 3981 1443 1442; 3982 1444 1443; 3983 1445 1444; 3984 1446 1445
527. 3985 1447 1446; 3986 1448 1447; 3987 1442 1449; 3988 1448 1450; 3989 1444 1451
528. 3990 1446 1452; 3991 1444 1453; 3992 1446 1453; 3993 1449 1595; 3994 1450 1597
529. 3995 1451 1453; 3996 1452 1453; 4024 277 1301; 4025 275 1250; 4028 96 286
530. 4029 274 1454; 4030 273 266; 4031 276 277; 4032 286 1455; 4033 285 266
531. 4034 861 289; 4036 50 1617; 4037 1616 1617; 4040 49 1616; 4042 50 1618
532. 4043 1619 1621; 4046 51 1619; 4049 1455 287; 4052 1454 275; 4064 49 1210
533. 4066 51 1435; 4076 285 1369; 4080 861 1403; 4092 1472 1246; 4093 1475 1269
534. 4096 1480 1320; 4099 1483 1332; 4100 1484 1357; 4102 1486 1293; 4103 1487 1380
535. 4104 1486 1500; 4105 1488 1346; 4106 1488 1501; 4107 1489 1294; 4108 1490 1381
536. 4109 1489 1495; 4110 1491 1347; 4111 1491 1494; 4117 1494 1490; 4118 1495 1345
537. 4120 1495 1491; 4122 1487 1501; 4124 1501 1378; 4126 1488 1500; 4128 1500 1344
538. 4129 1494 1379; 4131 1293 1500; 4132 1500 1346; 4134 1346 1501; 4135 1501 1380
539. 4136 1504 1348; 4137 1293 1504; 4138 1504 1346; 4139 1505 1382; 4140 1346 1505
540. 4141 1505 1380; 4142 1294 1495; 4143 1495 1347; 4144 1347 1494; 4145 1494 1381
541. 4146 1294 1504; 4147 1504 1347; 4148 1347 1505; 4149 1505 1381; 4347 1485 1367
542. 4348 49 1220; 4349 50 1340; 4350 51 1442; 4353 1219 80; 4354 1338 266

543. 4358 1519 1430; 4359 1437 1519; 4360 1520 676; 4361 1212 1520; 4362 513 676
544. 4363 80 660; 4364 527 696; 4365 96 680; 4366 540 1250; 4369 848 1403
545. 4370 513 1250; 4371 540 80; 4372 540 1301; 4373 1717 1250; 4374 1717 1719
546. 4375 463 1719; 4376 463 1720; 4377 266 1720; 4378 1369 848; 4379 1718 1403
547. 4380 848 96; 4381 527 1403; 4382 247 649; 4383 628 419; 4384 628 390
548. 4385 649 215; 4386 215 361; 4387 390 183; 4388 183 593; 4389 361 572
549. 4390 572 332; 4391 593 151; 4392 151 303; 4393 332 119; 4394 119 540
550. 4395 303 513; 4396 835 527; 4397 135 848; 4398 822 135; 4399 167 835
551. 4400 809 167; 4401 586 822; 4402 796 586; 4403 199 809; 4404 783 199
552. 4405 231 796; 4406 770 1614; 4407 642 1614; 4408 757 1695; 4409 263 1695
553. 4415 1232 1521; 4416 1521 1525; 4417 1222 1521; 4418 1522 1233; 4419 1224 1522
554. 4420 1523 1221; 4421 1232 1523; 4422 1523 1521; 4423 1524 1222; 4424 1521 1524
555. 4425 1525 1522; 4426 1524 1525; 4427 1526 1223; 4428 1525 1526; 4429 1526 1522
556. 4430 1527 1224; 4431 1522 1527; 4432 1527 1233; 4436 1398 1397; 4437 1476 1281
557. 4438 1479 1298; 4439 1426 1563; 4440 1390 1531; 4441 1530 1572; 4442 1427 1548
558. 4443 1531 1562; 4444 1426 1552; 4445 1538 1540; 4449 1540 1542; 4450 1542 1544
559. 4452 1544 1428; 4454 1545 1530; 4455 1546 1545; 4456 1547 1546; 4457 1548 1547
560. 4458 1549 1531; 4459 1550 1549; 4460 1551 1550; 4461 1552 1551; 4462 1545 1538
561. 4463 1549 1554; 4464 1546 1540; 4465 1550 1555; 4466 1547 1570; 4467 1551 1556
562. 4468 1548 1544; 4469 1552 1557; 4470 1553 1573; 4471 1425 1557; 4472 1554 1545
563. 4473 1555 1546; 4474 1556 1571; 4475 1557 1548; 4476 1554 1553; 4477 1555 1554
564. 4478 1556 1555; 4479 1557 1556; 4480 1558 1356; 4481 1558 1561; 4482 1561 1564
565. 4483 1562 1569; 4484 1561 1562; 4487 1563 1568; 4488 1565 1549; 4489 1566 1550
566. 4490 1567 1551; 4491 1568 1552; 4493 1569 1564; 4494 1565 1569; 4495 1566 1565
567. 4496 1567 1566; 4497 1568 1567; 4498 1570 1542; 4499 1571 1547; 4500 1572 1398
568. 4501 1573 1530; 4502 741 1576; 4503 677 1575; 4504 1575 1853; 4505 1576 1859
569. 4506 1575 1586; 4513 1580 1706; 4515 1580 1855; 4516 1582 1580; 4518 1582 1857
570. 4519 1584 1860; 4521 1584 1858; 4522 1586 1584; 4524 1586 1854; 4525 1588 1705
571. 4526 1580 1588; 4527 1589 1588; 4528 1582 1589; 4529 1590 1589; 4530 1584 1590
572. 4531 1591 1590; 4532 1586 1591; 4535 1594 1229; 4536 1594 1598; 4537 1595 1451
573. 4538 1487 1600; 4539 1596 1230; 4540 1596 1599; 4541 1597 1452; 4542 1490 1601
574. 4543 1598 1243; 4544 1599 1244; 4545 1600 1413; 4546 1601 1414; 4547 1598 1486
575. 4548 1600 1595; 4549 1599 1489; 4550 1601 1597; 4555 390 361; 4556 361 593
576. 4557 332 303; 4558 303 540; 4559 649 390; 4560 593 332; 4567 300 329
577. 4568 329 592; 4569 358 387; 4570 387 648; 4571 539 300; 4572 592 358
578. 4573 835 848; 4574 770 1609; 4575 783 796; 4576 796 809; 4577 822 835
579. 4578 809 822; 4579 1609 1699; 4585 382 645; 4586 535 295; 4587 295 324
580. 4588 324 589; 4589 353 382; 4590 589 353; 4591 419 648; 4592 649 416
581. 4593 416 1689; 4594 648 1689; 4595 411 1690; 4596 757 1690; 4597 1609 1614
582. 4598 1614 1701; 4599 1614 1699; 4602 1695 1698; 4603 1695 770; 4605 752 766
583. 4606 766 779; 4607 779 792; 4608 792 805; 4609 805 818; 4610 818 831
584. 4611 831 844; 4614 761 774; 4615 774 787; 4616 787 800; 4617 800 813
585. 4618 813 826; 4619 826 839; 4620 839 852; 4623 10 766; 4624 752 601
586. 4625 752 764; 4626 749 766; 4627 749 1145; 4628 1145 764; 4629 1145 759
587. 4630 1145 772; 4631 759 774; 4632 772 761; 4633 761 612; 4634 774 11
588. 4659 803 816; 4660 811 824; 4663 1617 1306; 4665 1618 1374; 4666 1619 1403
589. 4669 844 1616; 4670 1118 1617; 4671 1114 1618; 4672 852 1619; 4674 844 49
590. 4675 844 1617; 4676 1118 1616; 4677 491 1616; 4678 1118 1715; 4679 445 1715
591. 4681 1621 1618; 4682 852 51; 4683 852 1621; 4684 1114 1619; 4685 502 1619
592. 4686 1114 1716; 4687 445 1716; 4688 1622 757; 4690 1626 783; 4691 1628 796
593. 4693 1632 822; 4694 1634 835; 4705 757 1639; 4706 1622 1722; 4707 1639 1638
594. 4708 1639 761; 4709 1640 751; 4710 925 1640; 4711 1641 760; 4712 910 1641
595. 4713 1643 1724; 4714 1643 1723; 4715 1721 1643; 4717 1644 1638; 4718 1639 1644
596. 4719 1647 1728; 4720 1648 1625; 4721 770 1645; 4723 1645 1625; 4724 1645 774
597. 4728 1645 1648; 4729 1651 1733; 4730 1652 1627; 4731 783 1649; 4733 1649 1627
598. 4734 1649 787; 4738 1649 1652; 4739 1655 1738; 4740 1656 1629; 4741 796 1653

599. 4743 1653 1629; 4744 1653 800; 4748 1653 1656; 4749 1659 1743; 4750 1660 1631
600. 4751 809 1657; 4753 1657 1631; 4754 1657 813; 4758 1657 1660; 4759 1663 1748
601. 4760 1664 1633; 4761 822 1661; 4763 1661 1633; 4764 1661 826; 4768 1661 1664
602. 4769 1667 1753; 4770 1668 1635; 4771 835 1665; 4773 1665 1635; 4774 1665 839
603. 4778 1665 1668; 4779 1671 1758; 4780 1672 1637; 4781 848 1669; 4783 1669 1637
604. 4784 1669 852; 4788 1669 1672; 4789 1673 765; 4790 943 1673; 4791 1674 778
605. 4792 961 1674; 4793 1675 791; 4794 979 1675; 4795 1676 804; 4796 997 1676
606. 4797 1677 817; 4798 1015 1677; 4799 1678 830; 4800 1033 1678; 4801 1679 843
607. 4802 1051 1679; 4803 1680 773; 4804 935 1680; 4805 1681 786; 4806 953 1681
608. 4807 1682 799; 4808 971 1682; 4809 1683 812; 4810 989 1683; 4811 1684 825
609. 4812 1007 1684; 4813 1685 838; 4814 1025 1685; 4815 1686 851; 4816 1043 1686
610. 4817 1167 1690; 4822 1689 645; 4823 1689 411; 4824 1690 770; 4825 1690 645
611. 4829 1690 1693; 4832 1693 645; 4836 410 1689; 4837 1689 467; 4838 1622 1695
612. 4840 1695 1697; 4842 1697 1624; 4843 1696 1698; 4844 1698 1697; 4845 1698 642
613. 4846 1699 783; 4847 1699 1702; 4849 1702 1703; 4851 783 1702; 4852 231 1702
614. 4853 1703 1701; 4854 1614 1703; 4855 1704 642; 4856 1704 1614; 4857 1705 741
615. 4858 1706 1576; 4859 1705 1706; 4861 1706 1856; 4862 416 1714; 4863 743 737
616. 4864 742 739; 4865 411 1714; 4866 1708 740; 4867 1709 741; 4868 1708 1710
617. 4869 1710 742; 4870 1711 743; 4875 1714 743; 4876 1714 742; 4877 1709 1711
618. 4879 1714 1711; 4880 1710 1714; 4882 1715 50; 4883 1715 1617; 4884 1716 50
619. 4885 1716 1621; 4886 539 1715; 4887 535 1716; 4888 1717 539; 4889 1301 1717
620. 4890 1718 535; 4891 1369 1718; 4892 1719 266; 4893 1719 1301; 4894 1720 1369
621. 4895 1720 1718; 4896 539 1719; 4897 535 1720; 4898 1721 1622; 4899 1722 1643
622. 4900 1638 1722; 4901 1723 1638; 4902 1722 1723; 4903 1724 263; 4904 11 1724
623. 4905 1725 1643; 4906 1724 1725; 4907 1726 1624; 4908 1728 1625; 4909 1730 1647
624. 4910 1624 1727; 4911 1647 1729; 4912 1726 1647; 4913 1727 1647; 4914 1625 1727
625. 4915 1727 1728; 4916 1729 642; 4917 612 1729; 4918 1729 1730; 4919 1731 1626
626. 4920 1733 1627; 4921 1735 1651; 4922 1626 1732; 4923 1651 1734; 4924 1731 1651
627. 4925 1732 1651; 4926 1627 1732; 4927 1732 1733; 4928 1734 231; 4929 15 1734
628. 4930 1734 1735; 4931 1736 1628; 4932 1738 1629; 4933 1740 1655; 4934 1628 1737
629. 4935 1655 1739; 4936 1736 1655; 4937 1737 1655; 4938 1629 1737; 4939 1737 1738
630. 4940 1739 199; 4941 24 1739; 4942 1739 1740; 4943 1741 1630; 4944 1743 1631
631. 4945 1745 1659; 4946 1630 1742; 4947 1659 1744; 4948 1741 1659; 4949 1742 1659
632. 4950 1631 1742; 4951 1742 1743; 4952 1744 586; 4953 558 1744; 4954 1744 1745
633. 4955 1746 1632; 4956 1748 1633; 4957 1750 1663; 4958 1632 1747; 4959 1663 1749
634. 4960 1746 1663; 4961 1747 1663; 4962 1633 1747; 4963 1747 1748; 4964 1749 167
635. 4965 33 1749; 4966 1749 1750; 4967 1751 1634; 4968 1753 1635; 4969 1755 1667
636. 4970 1634 1752; 4971 1667 1754; 4972 1751 1667; 4973 1752 1667; 4974 1635 1752
637. 4975 1752 1753; 4976 1754 135; 4977 42 1754; 4978 1754 1755; 4979 1756 1636
638. 4980 1758 1637; 4981 1760 1671; 4982 1636 1757; 4983 1671 1759; 4984 1756 1671
639. 4985 1757 1671; 4986 1637 1757; 4987 1757 1758; 4988 1759 527; 4989 502 1759
640. 4990 1759 1760; 4991 1761 927; 4992 1762 930; 4993 1764 1768; 4994 1765 930
641. 4995 1766 927; 4996 1768 928; 4997 1770 10; 4998 1761 1762; 4999 419 1763
642. 5000 1761 1767; 5001 1763 1762; 5002 1763 752; 5003 1764 1769; 5004 1766 1764
643. 5005 1763 1765; 5006 1767 1764; 5007 1762 1767; 5008 1767 1768; 5009 1769 247
644. 5010 10 1769; 5011 1769 1770; 5012 1771 945; 5013 1772 948; 5014 1774 1778
645. 5015 1775 948; 5016 1776 945; 5017 1778 946; 5018 1780 601; 5019 1771 1772
646. 5020 649 1773; 5021 1771 1777; 5022 1773 1772; 5023 1773 766; 5024 1774 1779
647. 5025 1776 1774; 5026 1773 1775; 5027 1777 1774; 5028 1772 1777; 5029 1777 1778
648. 5030 1779 628; 5031 601 1779; 5032 1779 1780; 5033 1781 963; 5034 1782 966
649. 5035 1784 1788; 5036 1785 966; 5037 1786 963; 5038 1788 964; 5039 1790 13
650. 5040 1781 1782; 5041 390 1783; 5042 1781 1787; 5043 1783 1782; 5044 1783 779
651. 5045 1784 1789; 5046 1786 1784; 5047 1783 1785; 5048 1787 1784; 5049 1782 1787
652. 5050 1787 1788; 5051 1789 215; 5052 13 1789; 5053 1789 1790; 5054 1791 981
653. 5055 1792 984; 5056 1794 1798; 5057 1795 984; 5058 1796 981; 5059 1798 982
654. 5060 1800 22; 5061 1791 1792; 5062 361 1793; 5063 1791 1797; 5064 1793 1792

```
655. 5065 1793 792; 5066 1794 1799; 5067 1796 1794; 5068 1793 1795; 5069 1797 1794
656. 5070 1792 1797; 5071 1797 1798; 5072 1799 183; 5073 22 1799; 5074 1799 1800
657. 5075 1801 999; 5076 1802 1002; 5077 1804 1808; 5078 1805 1002; 5079 1806 999
658. 5080 1808 1000; 5081 1810 547; 5082 1801 1802; 5083 593 1803; 5084 1801 1807
659. 5085 1803 1802; 5086 1803 805; 5087 1804 1809; 5088 1806 1804; 5089 1803 1805
660. 5090 1807 1804; 5091 1802 1807; 5092 1807 1808; 5093 1809 572; 5094 547 1809
661. 5095 1809 1810; 5096 1811 1017; 5097 1812 1020; 5098 1814 1818; 5099 1815 1020
662. 5100 1816 151; 5101 1818 1018; 5102 1820 31; 5103 1811 1812; 5104 332 1813
663. 5105 1811 1817; 5106 1813 1812; 5107 1813 818; 5108 1814 1819; 5109 1816 1814
664. 5110 1813 1815; 5111 1817 1814; 5112 1812 1817; 5113 1817 1818; 5114 1819 151
665. 5115 31 1819; 5116 1819 1820; 5117 1821 1035; 5118 1822 1038; 5119 1824 1828
666. 5120 1825 1038; 5121 1826 1035; 5122 1828 1036; 5123 1830 40; 5124 1821 1822
667. 5125 303 1823; 5126 1821 1827; 5127 1823 1822; 5128 1823 831; 5129 1824 1829
668. 5130 1826 1824; 5131 1823 1825; 5132 1827 1824; 5133 1822 1827; 5134 1827 1828
669. 5135 1829 119; 5136 40 1829; 5137 1829 1830; 5138 1831 1053; 5139 1832 1056
670. 5140 1834 1838; 5141 1835 1056; 5142 1836 1053; 5143 1838 1054; 5144 1840 491
671. 5145 1831 1832; 5146 540 1833; 5147 1831 1837; 5148 1833 1832; 5149 1833 844
672. 5150 1834 1839; 5151 1836 1834; 5152 1833 1835; 5153 1837 1834; 5154 1832 1837
673. 5155 1837 1838; 5156 1839 513; 5157 491 1839; 5158 1839 1840; 5160 1843 1846
674. 5161 1842 1863; 5162 1843 1848; 5163 1843 1850; 5164 1845 1842; 5165 1846 1844
675. 5166 1845 1851; 5167 1847 730; 5168 1846 1849; 5169 1848 741; 5172 1849 1847
676. 5175 1850 1842; 5176 1845 1850; 5177 1846 1850; 5178 1851 1846; 5180 1844 1851
677. 5181 1852 677; 5182 1845 1852; 5183 1853 678; 5184 1854 1587; 5185 1853 1854
678. 5186 1855 1581; 5187 1856 1707; 5188 1855 1856; 5189 1857 1583; 5190 1857 1855
679. 5191 1858 1585; 5192 1858 1861; 5193 1854 1858; 5194 1859 1579; 5195 1856 1859
680. 5196 1860 1582; 5197 1861 1857; 5198 1860 1861; 5199 1862 1845; 5200 1863 677
681. 5201 1862 1863; 5202 1864 1852; 5203 1864 1863; 5204 1841 1866; 5205 8 1866
682. 5206 1841 1862; 5207 1841 1851; 5208 678 1587; 5209 1707 1579; 5210 1581 1707
683. 5211 1583 1581; 5212 1585 1583; 5213 1587 1585; 5214 1579 1867; 5215 1564 1868
684. 5216 1575 1591; 5217 1591 1584; 5218 1584 1589; 5219 1589 1580; 5220 1580 1705
685. 5221 1705 1576
686. ******************************************************************************
687. ELEMENT INCIDENCES SHELL
688. 4004 1204 1271 1266 1206; 4006 1271 1282 1286 1266; 4007 1272 1283 1287 1267
689. 4008 1262 1290 1299 1249; 4009 1263 1291 1302 1251; 4010 1282 1321 1325 1286
690. 4011 1283 1322 1326 1287; 4012 1290 1329 1335 1299; 4013 1291 1330 1337 1302
691. 4014 1321 1357 1359 1325; 4015 1322 1358 1360 1326; 4016 1329 1361 1367 1335
692. 4017 1330 1362 1370 1337; 4018 1357 1391 1393 1359; 4019 1358 1392 1394 1360
693. 4020 1359 1393 1395 1361; 4021 1360 1394 1396 1362; 4022 1395 1402 1367 1361
694. 4023 1396 1404 1370 1362; 4410 1215 1213 1272 1267; 4411 1217 1215 1239 1237
695. 4412 1218 1217 1263 1251; 4413 1208 1206 1238 1236; 4414 1209 1208 1262 1249
696. ******************************************************************************
697. ELEMENT PROPERTY
698. 4004 4006 TO 4023 4410 TO 4414 THICKNESS 0.2
699. DEFINE MATERIAL START
700. ISOTROPIC STEEL
701. E 2.09042E+007
702. POISSON 0.3
703. DENSITY 7.83341
704. ALPHA 1.2E-005
705. DAMP 0.03
706. TYPE STEEL
707. STRENGTH FY 25819.2 FU 41584 RY 1.5 RT 1.2
708. ISOTROPIC CONCRETE
709. E 2.21467E+006
710. POISSON 0.17
```

```
711. DENSITY 2.40262
712. ALPHA 1E-005
713. DAMP 0.05
714. TYPE CONCRETE
715. STRENGTH FCU 2812.28
716. END DEFINE MATERIAL
717. MEMBER PROPERTY EUROPEAN
718. 97 130 2298 4358 4360 TABLE ST IPE550
719. MEMBER PROPERTY INDIAN
720. 853 855 TO 858 890 898 903 1596 TO 1602 1604 TO 1611 1633 1652 1673 1693 3085 -
721. 3106 TABLE LD ISA75X75X8 SP 0.01
722. MEMBER PROPERTY INDIAN
723. 2537 2539 2541 2543 2568 TO 2571 2599 2613 2639 2641 2654 2655 2681 2683 2696 -
724. 2697 2723 2725 2738 2739 2765 2767 2780 2781 2807 2809 2822 2823 2849 2851 -
725. 2864 2865 2995 2996 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 3031 -
726. 3032 3035 3036 3043 3044 3047 3048 3055 3056 3059 3060 3067 3068 3071 3072 -
727. 3096 3101 4708 4710 4712 4718 4724 4728 4734 4738 4744 4748 4754 4758 4764 -
728. 4768 4774 4778 4784 4788 4790 4792 4794 4796 4798 4800 4802 4804 4806 4808 -
729. 4810 4812 4814 4816 4900 4902 4904 4906 4914 4915 4917 4918 4926 4927 4929 -
730. 4930 4938 4939 4941 4942 4950 4951 4953 4954 4962 4963 4965 4966 4974 4975 -
731. 4977 4978 4986 4987 4989 4990 5002 5005 5007 5008 5010 5011 5023 5026 5028 -
732. 5029 5031 5032 5044 5047 5049 5050 5052 5053 5065 5068 5070 5071 5073 5074 -
733. 5086 5089 5091 5092 5094 5095 5107 5110 5112 5113 5115 5116 5128 5131 5133 -
734. 5134 5136 5137 5149 5152 5154 5155 5157 5158 TABLE ST ISA50X50X6
735. 2535 2567 2595 2611 2637 2653 2679 2695 2721 2737 2763 2779 2805 2821 2847 -
736. 2863 TABLE ST ISA65X65X6
737. 802 806 1987 1988 2534 2538 2556 2558 2589 TO 2591 2594 2596 2607 2608 2631 -
738. 2632 TO 2633 2636 2638 2649 2650 2673 TO 2675 2678 2680 2691 2692 -
739. 2715 TO 2717 2720 2722 2733 2734 2757 TO 2759 2762 2764 2775 2776 -
740. 2799 TO 2801 2804 2806 2817 2818 2841 TO 2843 2846 2848 2859 2860 2973 2975 -
741. 2977 2979 2981 2983 2985 TABLE LD ISA65X65X6 SP 0.01
742. 1005 1941 4567 TO 4572 4585 TO 4590 4817 4829 4889 -
743. 4891 TABLE LD ISA90X90X8 SP 0.01
744. 4024 4025 4028 TO 4034 4049 4052 TABLE LD ISA110X110X10 SP 0.01
745. 1968 1970 1971 1997 2917 TO 2919 2921 TO 2944 2959 TO 2970 3097 4715 4912 -
746. 4924 4936 4948 4960 4972 4984 5004 5025 5046 5067 5088 5109 5130 -
747. 5151 TABLE ST ISA75X75X8
748. ********************************************************************************
749. MEMBER PROPERTY EUROPEAN
750. 3959 TO 3962 3971 TO 3973 4484 TABLE ST IPE200
751. 1837 1842 1942 3513 TO 3515 3521 3522 3524 3592 3593 3608 TO 3610 3678 3679 -
752. 3697 3699 3700 3774 3775 3784 3787 3855 TO 3860 3864 TO 3866 3925 TO 3927 -
753. 4076 4080 4525 4527 4529 4531 4597 4832 4836 TO 4838 4840 4842 TO 4844 4847 -
754. 4849 4853 4854 4856 4857 TABLE ST IPE300
755. 3562 3563 3574 3577 3578 3628 3631 3632 3646 3647 3726 3729 3730 3744 -
756. 3745 TABLE ST IPE200
757. 3523 TABLE ST UPN140
758. 3500 3502 3530 3532 3595 3597 3681 3683 3777 3779 TABLE ST IPE300
759. 3507 3510 3511 3516 3517 3600 TO 3602 3611 3612 3686 3689 3690 3705 TO 3708 -
760. 3792 3793 3796 TO 3799 3806 3867 3868 3873 TO 3875 3928 3929 3934 TO 3936 -
761. 4104 4106 4109 4111 4117 4118 4120 4122 4124 4126 4128 4129 4131 4132 4134 -
762. 4135 TO 4149 4536 4538 4540 4542 4547 TO 4550 TABLE LD L75X75X6 SP 0.01
763. MEMBER PROPERTY INDIAN
764. 3557 TO 3561 3572 3573 3575 3576 3626 3627 3629 3630 3641 TO 3645 3724 3725 -
765. 3727 3728 3739 TO 3743 TABLE ST ISA65X65X6
766. MEMBER PROPERTY EUROPEAN
```

```
767. 3564 TO 3566 3568 TO 3570 3633 TO 3635 3637 TO 3639 3731 TO 3733 3735 TO 3736 -
768. 3737 TABLE ST IPE200
769. 4359 4361 TABLE ST IPE200
770. 3442 TO 3444 3552 3553 3556 3567 3571 3625 3636 3640 3665 3666 3723 3734 3738 -
771. 3757 3758 3822 3838 3839 3891 3906 3907 3924 3950 TO 3952 4439 4441 4445 -
772. 4449 4450 4452 4466 TO 4470 4474 4475 4490 4491 4498 TO 4500 -
773. 4501 TABLE ST IPE300
774. 3477 TO 3482 3981 TO 3986 4415 4416 4418 4420 4423 4425 4427 -
775. 4430 TABLE ST UPN200
776. MEMBER PROPERTY INDIAN
777. 3493 3496 3503 3504 3525 3526 3533 3536 3583 3586 3589 3590 3613 3614 3617 -
778. 3620 3669 3672 3675 3676 3711 3712 3715 3718 3765 3768 3771 3772 3807 3808 -
779. 3811 3814 3846 3849 3852 3853 3876 3877 3880 3883 3914 3917 3920 3921 3937 -
780. 3938 3941 3944 TABLE ST ISA65X65X6
781. 3662 3663 3835 3836 TABLE ST ISA65X65X6
782. MEMBER PROPERTY EUROPEAN
783. 3441 3450 3451 3462 3475 3483 3484 3489 TO 3492 3949 3957 3958 3968 3979 3980 -
784. 3987 3988 3993 TO 3996 4064 4066 4348 4350 4353 4535 4537 4539 -
785. 4541 TABLE ST IPE450
786. 3541 TO 3543 3545 3547 3551 3652 TO 3654 3656 3659 3664 3746 TO 3748 3750 -
787. 3752 3756 3825 3826 3829 3832 3837 3897 3899 3901 3905 4092 4099 4347 4436 -
788. 4438 TABLE ST HE500A
789. 2956 3537 TO 3540 3544 3546 3548 3554 3555 3648 TO 3651 3655 3658 3660 3661 -
790. 3667 3668 3749 3759 TO 3764 3828 3831 3833 3834 3840 TO 3845 3900 -
791. 3908 TO 3913 4102 4103 4105 4107 4108 4110 4349 4354 4543 TO 4546 4663 4665 -
792. 4666 TABLE ST IPE450
793. 3579 TO 3582 3621 TO 3624 3719 TO 3722 3815 TO 3817 3884 TO 3886 4093 4096 -
794. 4100 4437 TABLE ST IPE500
795. MEMBER PROPERTY INDIAN
796. 3459 3460 3698 3702 TO 3704 3785 3789 TO 3791 3965 -
797. 3966 TABLE LD ISA90X90X6 SP 0.01
798. 3438 3439 3447 3448 3472 3473 3487 3488 3693 3695 3696 3701 3780 3782 3783 -
799. 3788 3945 3946 3954 3955 3976 3977 3991 -
800. 3992 TABLE LD ISA110X110X10 SP 0.01
801. MEMBER PROPERTY EUROPEAN
802. 3494 3495 3505 3506 3534 3535 3584 3585 3598 3599 3618 3619 3670 3671 3709 -
803. 3710 3716 3717 3766 3767 3802 3803 3812 3813 3847 3848 3861 3862 3881 3882 -
804. 3915 3916 3922 3923 3942 3943 TABLE ST UPN200
805. 3497 3498 3527 3528 3587 3588 3615 3616 3673 3674 3713 3714 3769 3770 3809 -
806. 3810 3850 3851 3878 3879 3918 3919 3939 3940 TABLE D UPN200 SP 0.01
807. 3819 3821 3824 3887 TO 3890 3892 3893 TABLE ST IPE500
808. 3452 TO 3457 3464 TO 3469 TABLE TB IPE500 WP 0.15 TH 0.016 BW 0.15 BT 0.016
809. 3512 3520 3591 3607 3677 3694 3773 3781 3854 3863 4480 4713 4903 4911 4916 -
810. 4923 4928 4935 4940 4947 4952 4959 4964 4971 4976 4983 4988 5003 5009 5024 -
811. 5030 5045 5051 5066 5072 5087 5093 5108 5114 5129 5135 5150 -
812. 5156 TABLE LD L90X90X8 SP 0.01
813. MEMBER PROPERTY EUROPEAN
814. 3445 TABLE LD L75X75X8 SP 0.01
815. 3499 3501 3529 3531 3680 3682 3776 3778 3818 3820 3823 TABLE ST IPE600
816. 3594 3596 TABLE TB IPE600 WP 0.2 TH 0.02 BW 0.2 BT 0.02
817. 4417 4419 4421 4422 4424 4426 4428 4429 4431 4432 TABLE ST L50X50X6
818. 4440 4442 TO 4444 4454 TO 4465 4471 TO 4473 4476 TO 4479 4481 TO 4483 4488 -
819. 4489 4503 4504 4515 4518 5183 5186 5189 5198 TABLE ST IPE400
820. MEMBER PROPERTY INDIAN
821. 2950 TO 2955 TABLE ST ISA90X90X8
822. MEMBER PROPERTY EUROPEAN
```

```
823. 818 1991 2542 2560 2593 2598 2609 2635 2640 2651 2677 2682 2693 2719 2724 -
824. 2735 2761 2766 2777 2803 2808 2819 2845 2850 2861 2974 2976 2978 2980 2982 -
825. 2984 2986 4705 TO 4707 4721 4723 4731 4733 4741 4743 4751 4753 4761 4763 -
826. 4771 4773 4781 4783 4899 4910 4913 4922 4925 4934 4937 4946 4949 4958 4961 -
827. 4970 4973 4982 4985 4999 TO 5001 5006 5020 TO 5022 5027 5041 TO 5043 5048 -
828. 5062 TO 5064 5069 5083 TO 5085 5090 5104 TO 5106 5111 5125 TO 5127 5132 5146 -
829. 5147 TO 5148 5153 TABLE LD L75X75X8 SP 0.01
830. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2019 2023 TO 2027 2036 2040 -
831. 2041 TO 2043 2059 2063 TO 2067 2076 2080 TO 2083 2099 2103 TO 2107 2116 2120 -
832. 2121 TO 2123 2139 2143 TO 2147 2156 2160 TO 2163 2179 2183 TO 2187 2196 2200 -
833. 2201 TO 2203 2219 2223 TO 2227 2236 2240 TO 2243 2260 2264 TO 2268 2277 2281 -
834. 2282 TO 2284 2536 2540 2557 2559 2565 2588 2630 2672 2714 2756 2798 2840 2989 -
835. 2990 2993 2994 3001 3002 3005 3006 3013 3014 3017 3018 3025 3026 3029 3030 -
836. 3037 3038 3041 3042 3049 3050 3053 3054 3061 3062 3065 3066 4036 4037 4040 -
837. 4042 4043 4046 4372 4373 4378 4379 4558 4573 4681 4709 4711 4714 4717 4719 -
838. 4720 4729 4730 4739 4740 4749 4750 4759 4760 4769 4770 4779 4780 4789 4791 -
839. 4793 4795 4797 4799 4801 4803 4805 4807 4809 4811 4813 4815 4901 4905 4908 -
840. 4909 4920 4921 4932 4933 4944 4945 4956 4957 4968 4969 4980 4981 -
841. 4992 TO 4994 4996 4997 5013 TO 5015 5017 5018 5034 TO 5036 5038 5039 5055 -
842. 5056 TO 5057 5059 5060 5076 TO 5078 5080 5081 5097 TO 5099 5101 5102 5118 -
843. 5119 TO 5120 5122 5123 5139 TO 5141 5143 5144 TABLE LD L130X130X13 SP 0.01
844. 1523 1556 1843 TO 1845 3309 3310 4862 TO 4865 4868 4875 TO 4877 4879 -
845. 4880 TABLE LD L100X100X10 SP 0.01
846. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 TABLE ST HE500A
847. MEMBER PROPERTY EUROPEAN
848. 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 -
849. 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 803 -
850. 808 TO 810 827 828 831 1019 TO 1024 1047 1049 1072 1128 1162 1202 1206 1283 -
851. 1317 1337 1341 1422 1476 1480 1497 2004 TO 2006 2125 TO 2127 2245 TO 2247 -
852. 3276 3277 4574 4579 4688 4690 4691 4693 4694 4846 4888 4890 4898 4907 4919 -
853. 4931 4943 4955 4967 4979 4991 4995 5012 5016 5033 5037 5054 5058 5075 5079 -
854. 5096 5100 5117 5121 5138 5142 TABLE LD L130X130X13 SP 0.01
855. 4408 4409 4593 TO 4596 4598 4599 4602 4603 4822 TO 4825 -
856. 4845 TABLE LD L75X75X8 SP 0.01
857. 1629 1637 1661 1670 1677 1690 1697 3088 TABLE LD L90X90X8 SP 0.01
858. 800 1996 1998 2920 2949 3102 TABLE ST UPN240
859. 4521 4524 4526 4528 4530 4532 4859 4861 5184 5187 5191 TABLE ST UPN200
860. 4406 4407 4851 4852 TABLE ST L90X90X8
861. 3307 3308 3311 3312 4362 TO 4365 TABLE LD L130X130X10 SP 0.01
862. 4623 TO 4634 4674 TO 4679 4682 TO 4687 4882 TO 4885 TABLE ST L130X130X10
863. 2471 2473 2475 2476 2499 2501 2502 2521 3166 3170 3215 3217 4605 TO 4611 4614 -
864. 4615 TO 4620 4659 4660 4669 TO 4672 4886 4887 TABLE ST L130X130X10
865. 4896 4897 TABLE ST L90X90X8
866. 1989 2592 2634 2676 2718 2760 2802 2844 4998 5019 5040 5061 5082 5103 5124 -
867. 5145 TABLE ST L75X75X8
868. 5 13 175 208 241 274 307 340 373 406 439 460 472 1126 1160 1275 1309 1388 -
869. 1414 1436 1448 1747 1748 2015 2016 2055 2056 2095 2096 2135 2136 2175 2176 -
870. 2215 2216 2256 2257 5181 5202 TABLE ST HE500A
871. MEMBER PROPERTY EUROPEAN
872. 1940 4366 4369 4555 TO 4557 4559 4560 4575 TO 4578 TABLE LD L100X100X10 SP 0.01
873. 1537 1540 1544 1546 1547 1549 1551 1573 1576 1577 1580 1583 1585 1644 4370 -
874. 4371 4374 TO 4377 4380 TO 4405 4591 4592 4892 TO 4894 -
875. 4895 TABLE LD L100X100X10 SP 0.01
876. 5160 5164 5165 5199 5206 TABLE ST IPE200
877. 5161 5162 5168 5169 5172 5182 5200 TABLE ST UPN200
878. 5176 5177 5180 5201 5203 TO 5205 5207 TABLE ST L65X65X6
```

```
879. 5163 5166 5175 5178 TABLE LD L65X65X6 SP 0.01
880. 3437 3440 3446 3449 3458 3461 3471 3474 3485 3486 3947 3948 3953 3956 3964 -
881. 3967 3975 3978 3989 3990 4487 4493 TO 4497 5208 TO 5215 TABLE ST IPE500
882. 5217 TO 5220 TABLE ST L90X90X8
883. 1582 1587 1689 1691 4855 TABLE D UPN240 SP 0.01
884. 4502 4505 4506 4513 4516 4519 4522 4858 5185 5188 5190 5192 TO 5196 -
885. 5197 TABLE ST IPE450
886. 5216 5221 TABLE ST L100X100X10
887. ********************************************************************************
888. CONSTANTS
889. BETA 90 MEMB 97 130 800 1709 1823 1824 1838 TO 1841 1989 1996 1998 2592 2920 -
890. 2949 3102 3269 3441 3450 3451 3462 3475 3483 3484 3541 TO 3548 3551 3554 -
891. 3555 3564 TO 3566 3568 TO 3570 3579 TO 3582 3621 TO 3624 3633 TO 3635 3637 -
892. 3638 TO 3639 3652 TO 3656 3658 TO 3661 3664 3667 3668 3719 TO 3722 -
893. 3731 TO 3733 3735 TO 3737 3746 TO 3750 3752 3756 3759 3760 3815 TO 3817 3825 -
894. 3826 3828 3829 3831 TO 3834 3837 3840 3841 3884 TO 3886 3897 3899 TO 3901 -
895. 3905 3908 3909 3949 3957 3958 3968 3979 3980 3987 3988 4064 4066 4092 4093 -
896. 4096 4099 4100 4347 TO 4350 4353 4358 4360 4436 TO 4438 4663 4665 4666 4866 -
897. 4867 4869 4870 4998 5019 5040 5061 5082 5103 5124 5145 5160 5164 5165 5167 -
898. 5199 5206
899. ********************************************************************************
900. ********************************************************************************
901. MATERIAL STEEL MEMB 5 13 97 130 175 208 241 274 307 340 373 406 439 460 472 -
902. 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 -
903. 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 -
904. 802 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 1019 -
905. 1020 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 1317 -
906. 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 1546 -
907. 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 1596 TO 1602 -
908. 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 TO 1691 1693 -
909. 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 1966 1968 1970 1971 -
910. 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 2004 TO 2006 2015 -
911. 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 2063 TO 2067 2076 -
912. 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 2125 TO 2127 2135 -
913. 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 2183 TO 2187 2196 -
914. 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 2245 TO 2247 2256 -
915. 2257 2260 2264 TO 2268 2277 2281 TO 2284 2298 2471 2473 2475 2476 2499 2501 -
916. 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 2588 TO 2596 2598 2599 -
917. 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 TO 2655 2672
918. MATERIAL STEEL MEMB 2673 TO 2683 2691 TO 2693 2695 TO 2697 2714 TO 2725 2733 -
919. 2734 TO 2735 2737 TO 2739 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 -
920. 2817 TO 2819 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 -
921. 2917 TO 2944 2949 TO 2956 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 -
922. 2999 TO 3002 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 -
923. 3029 TO 3032 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 -
924. 3059 TO 3062 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 -
925. 3170 3215 3217 3269 3276 3277 3307 TO 3312 3437 TO 3462 3464 TO 3469 3471 -
926. 3472 TO 3475 3477 TO 3507 3510 TO 3517 3520 TO 3548 3551 TO 3602 3607 TO 3656 -
927. 3658 TO 3683 3686 3689 3690 3693 TO 3750 3752 3756 TO 3785 3787 TO 3793 3796 -
928. 3797 TO 3799 3802 3803 3806 TO 3826 3828 3829 3831 TO 3868 3873 TO 3893 3897 -
929. 3899 TO 3901 3905 TO 3929 3934 TO 3962 3964 TO 3968 3971 TO 3973 -
930. 3975 TO 3996 4024 4025 4028 TO 4034 4036 4037 4040 4042 4043 4046 4049 4052 -
931. 4064 4066 4076 4080 4092 4093 4096 4099 4100 4102 TO 4111 4117 4118 4120 -
932. 4122 4124 4126 4128 4129 4131 4132 4134 TO 4149 4347 TO 4350 4353 4354 4358 -
933. 4359 TO 4366 4369 TO 4409 4415 TO 4432 4436 TO 4445 4449 4450 4452 -
934. 4454 TO 4484 4487 TO 4491 4493 TO 4506 4513 4515 4516 4518 4519 4521 4522 -
```

```
935. 4524 TO 4532 4535 TO 4550 4555 TO 4560 4567 TO 4579 4585
936. MATERIAL STEEL MEMB 4586 TO 4599 4602 4603 4605 TO 4611 4614 TO 4620 -
937. 4623 TO 4634 4659 4660 4663 4665 4666 4669 TO 4672 4674 TO 4679 4681 TO 4688 -
938. 4690 4691 4693 4694 4705 TO 4715 4717 TO 4721 4723 4724 4728 TO 4731 4733 -
939. 4734 4738 TO 4741 4743 4744 4748 TO 4751 4753 4754 4758 TO 4761 4763 4764 -
940. 4768 TO 4771 4773 4774 4778 TO 4781 4783 4784 4788 TO 4817 4822 TO 4825 4829 -
941. 4832 4836 TO 4838 4840 4842 TO 4847 4849 4851 TO 4859 4861 TO 4870 -
942. 4875 TO 4877 4879 4880 4882 TO 5158 5160 TO 5169 5172 5175 TO 5178 -
943. 5180 TO 5221
944. ********************************************************************************
945. MATERIAL CONCRETE MEMB 4004 4006 TO 4023 4410 TO 4414
946. ********************************************************************************
947. SUPPORTS
948. 6 8 19 607 609 729 730 737 739 1841 1844 PINNED
949. 659 TO 663 676 679 TO 684 696 PINNED
950. ********************************************************************************
951. 1196 1245 1295 1331 1363 1397 1424 FIXED BUT MY MZ
952. *1210 1219 1303  1371 1435 1441 FIXED BUT FY MX MY MZ
953. 1194 1195 1268 1279 1318 1355 1389 1422 1423 PINNED
954. 1247 1297 1333 1365 PINNED
955. 1707 1867 FIXED BUT FX FZ MX MY MZ
956. 1563 1569 1868 FIXED BUT FX FZ MX MY MZ
957. ********************************************************************************
958. MEMBER RELEASE
959. 552 584 645 674 706 735 767 796 802 806 818 828 853 855 TO 858 890 898 903 -
960. 1005 1128 1162 1283 1317 1422 1497 1537 1540 1544 1546 1547 1549 1556 1573 -
961. 1576 1577 1580 1583 1585 1587 1596 TO 1602 1604 TO 1611 1629 1637 1644 1661 -
962. 1670 1677 1690 1697 1837 1842 TO 1845 1940 TO 1942 1966 1968 1970 1971 1987 -
963. 1988 TO 1989 1991 1995 TO 1998 2002 2019 2036 2043 2059 2076 2083 2099 2116 -
964. 2123 2139 2156 2163 2179 2196 2203 2219 2236 2243 2260 2277 2284 2471 2473 -
965. 2475 2476 2499 2501 2502 2521 2535 2537 2539 2541 2543 2567 TO 2571 2589 -
966. 2590 TO 2593 2595 2599 2611 2613 2631 TO 2635 2637 2639 2641 2653 TO 2655 -
967. 2673 TO 2677 2679 2681 2683 2695 TO 2697 2715 TO 2719 2721 2723 2725 2737 -
968. 2738 TO 2739 2757 TO 2761 2763 2765 2767 2779 TO 2781 2799 TO 2803 2805 2807 -
969. 2809 2821 TO 2823 3085 3166 3170 3215 3217 3276 3548 3562 3646 3689 4036 -
970. 4037 4040 4042 4043 4046 4359 4361 4366 4369 4374 TO 4377 4415 4417 4419 -
971. 4421 4422 4424 4426 4428 4429 4431 4432 4439 4462 TO 4469 4471 TO 4475 4555 -
972. 4556 TO 4560 4568 4571 TO 4578 4586 4678 4679 4686 4687 4705 4706 4708 4710 -
973. 4712 4713 4715 4718 4721 4724 4859 4861 4868 4875 TO 4877 4880 4886 4887 -
974. 4889 4891 4896 4897 4900 4902 4904 4906 4910 TO 4912 4914 4915 4917 4918 -
975. 4922 TO 4924 4926 4927 4929 4930 4934 TO 4936 4938 4939 4941 4942 -
976. 4946 TO 4948 4950 4951 4953 4954 4958 TO 4960 4962 4963 4965 4966 -
977. 4970 TO 4972 START MY MZ
978. 5184 5186 5187 5189 5191 START MY MZ
979. 5161 TO 5163 5166 5168 5182 START MY MZ
980. 4974 4975 4977 4978 4982 TO 4984 4986 4987 4989 4990 4998 TO 5000 -
981. 5002 TO 5005 5007 5008 5010 5011 5019 TO 5021 5023 TO 5026 5028 5029 5031 -
982. 5032 5040 TO 5042 5044 TO 5047 5049 5050 5052 5053 5061 TO 5063 5065 TO 5068 -
983. 5070 5071 5073 5074 5082 TO 5084 5086 TO 5089 5091 5092 5094 5095 -
984. 5103 TO 5105 5107 TO 5110 5112 5113 5115 5116 5124 TO 5126 5128 TO 5131 5133 -
985. 5134 5136 5137 5145 TO 5147 5149 TO 5152 5154 5155 5157 5158 START MY MZ
986. 1551 1689 4836 4838 4843 4847 4854 START MY MZ
987. 4728 4731 4734 4738 4741 4744 4748 4751 4817 START MY MZ
988. 4754 4758 4761 4764 4768 4771 4774 4778 4781 4784 4788 4790 4792 4794 4796 -
989. 4798 4800 4802 4804 4806 4808 4810 4812 4814 4816 START MY MZ
990. 4590 4597 4605 TO 4611 4614 4856 START MY MZ
```

```
 991. 4615 TO 4620 4659 4660 4669 TO 4672 START MY MZ
 992. 4502 4536 START MY MZ
 993. 4538 4540 4542 4547 TO 4550 START MY MZ
 994. 4503 4506 4515 4518 4521 4524 4526 4528 4530 4532 5185 5198 START MY MZ
 995. 4481 4484 4488 TO 4491 START MY MZ
 996. 3798 4104 4106 4109 4111 4118 4122 4124 4126 4128 4129 4131 4132 4134 4135 -
 997. 4137 4138 4140 TO 4149 START MY MZ
 998. 4028 START MY MZ
 999. 4362 TO 4365 START MY MZ
1000. 3307 TO 3312 START MY MZ
1001. 2841 TO 2845 2847 2849 2851 2863 TO 2865 2917 TO 2944 2959 TO 2970 -
1002. 2973 TO 2986 2995 2996 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 -
1003. 3031 3032 3035 3036 3043 3044 3047 3048 3055 3056 3059 3060 3067 3068 3071 -
1004. 3072 START MY MZ
1005. 1582 4567 4569 4570 4585 4587 TO 4589 START MY MZ
1006. 800 2949 TO 2955 3906 START MY MZ
1007. 855 TO 858 890 898 903 1005 1537 1540 1544 1546 1547 1549 1551 1573 1576 1577 -
1008. 1580 1583 1585 1597 TO 1602 1605 TO 1610 1629 1633 1637 1644 1652 1661 1670 -
1009. 1673 1677 1690 1693 1697 1842 TO 1845 1940 1941 1968 1970 1971 1989 1996 -
1010. 1997 TO 1998 2471 2473 2499 2521 2534 2535 2537 TO 2539 2541 TO 2543 2558 -
1011. 2560 2567 TO 2571 2592 2594 TO 2596 2598 2599 2607 TO 2609 2611 2613 2634 -
1012. 2636 TO 2641 2649 TO 2651 2653 TO 2655 2676 2678 TO 2683 2691 TO 2693 2695 -
1013. 2696 TO 2697 2718 2720 TO 2725 2733 TO 2735 2737 TO 2739 2760 2762 TO 2767 -
1014. 2775 TO 2777 2779 TO 2781 2802 2804 TO 2809 2817 TO 2819 2821 TO 2823 2844 -
1015. 2846 TO 2851 2859 TO 2861 2863 TO 2865 2917 TO 2944 2959 TO 2970 2995 2996 -
1016. 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 3031 3032 3035 3036 3043 -
1017. 3044 3047 3048 3055 3215 3277 3562 3577 3631 3689 3696 3707 3708 3757 3783 -
1018. 3796 TO 3798 3908 4036 4037 4040 4042 4043 4046 4349 4359 4361 4366 4369 -
1019. 4417 TO 4419 4421 4422 4424 4521 4524 4555 TO 4560 4568 4570 4572 4573 4575 -
1020. 4576 TO 4578 4585 4588 4590 4605 TO 4611 4614 TO 4620 4669 TO 4672 4707 4708 -
1021. 4710 4712 4715 4718 4723 4724 4728 4733 4734 4738 4743 4744 4748 4753 4754 -
1022. 4758 4763 4764 4768 4773 4774 4778 4783 4784 4788 4790 4792 4794 4796 4798 -
1023. 4800 4802 4804 4806 4808 4810 4812 4814 4816 4829 4832 4859 4861 4862 4865 -
1024. 4868 4875 TO 4877 4879 4882 TO 4887 4889 4891 TO 4897 END MY MZ
1025. 4899 4900 5183 5184 5186 5187 5189 5191 END MY MZ
1026. 5169 5172 5175 5178 5182 5200 END MY MZ
1027. 4902 TO 4904 4906 4912 TO 4918 4924 TO 4930 4936 TO 4942 4948 TO 4954 4960 -
1028. 4961 TO 4966 4972 TO 4978 4984 TO 4990 4997 4998 5001 5002 5004 TO 5011 5018 -
1029. 5019 5022 5023 5025 TO 5032 5039 5040 5043 5044 5046 TO 5053 5060 5061 5064 -
1030. 5065 5067 TO 5074 5081 5082 5085 5086 5088 TO 5095 5100 5102 5103 5106 5107 -
1031. 5109 TO 5116 5123 5124 5127 5128 5130 TO 5137 5144 5145 5148 5149 -
1032. 5151 TO 5158 END MY MZ
1033. 4837 END MY MZ
1034. 4842 4844 4853 TO 4855 END MY MZ
1035. 4536 4538 4540 4542 4547 TO 4550 END MY MZ
1036. 4526 4528 4530 4532 4857 4858 5195 END MY MZ
1037. 4454 4458 4462 TO 4465 4467 TO 4469 4472 4473 4475 4476 4482 4484 -
1038. 4488 TO 4491 4498 4499 END MY MZ
1039. 4426 4428 4429 END MY MZ
1040. 3906 4024 4025 4431 4432 4666 END MY MZ
1041. 4030 4033 4117 4120 4131 4132 4134 4135 4137 4138 4140 TO 4149 END MY MZ
1042. 4362 TO 4365 END MY MZ
1043. 3307 TO 3312 END MY MZ
1044. 3056 3059 3060 3067 3068 3071 3072 3088 3096 3097 3101 3102 3106 END MY MZ
1045. 1556 END MY MZ
1046. 4567 4569 4571 4586 4587 4589 4846 END MY MZ
```

```
1047. 800 2949 TO 2955 END MY MZ
1048. ********************************************************************
1049. 3438 3439 3444 3445 3447 3448 3455 3457 3459 3460 3467 3469 3472 3473 3478 -
1050. 3480 3482 3487 3488 3493 3496 TO 3498 3503 3504 3507 3510 TO 3517 -
1051. 3520 TO 3526 3529 TO 3533 3536 3539 3540 3551 TO 3555 3557 TO 3561 -
1052. 3572 TO 3578 3583 3586 3589 TO 3597 3600 TO 3602 3607 TO 3610 3613 3614 3617 -
1053. 3620 3626 TO 3632 3641 TO 3645 3662 3663 3665 3666 3669 TO 3683 3686 3690 -
1054. 3693 TO 3708 3711 3712 3715 3718 3724 TO 3730 3739 TO 3743 3756 TO 3762 3765 -
1055. 3768 3771 TO 3785 3787 TO 3791 3796 3797 3799 3806 TO 3808 3811 3814 3835 -
1056. 3836 3838 3839 3846 TO 3860 3863 TO 3868 3873 TO 3877 3880 3883 3905 3907 -
1057. 3908 TO 3911 3914 3917 3920 3921 3924 3925 3927 3934 TO 3938 3941 -
1058. 3944 TO 3946 3951 3952 3959 3961 3962 3965 3966 3972 3973 3976 3977 3982 -
1059. 3984 3986 3991 3992 START MY MZ
1060. 3438 3439 3442 3445 3447 3448 3452 3456 3459 3460 3464 3468 3472 3473 3477 -
1061. 3487 3488 3493 TO 3496 3499 TO 3504 3507 3510 TO 3513 3515 3520 TO 3526 3533 -
1062. 3536 3552 TO 3555 3557 TO 3561 3563 3564 3568 3572 TO 3576 3583 3586 3589 -
1063. 3590 TO 3597 3600 TO 3602 3607 3608 3610 TO 3620 3627 TO 3630 3633 3637 3641 -
1064. 3643 TO 3647 3662 3663 3669 3672 3675 TO 3683 3690 3693 TO 3695 3697 3698 -
1065. 3700 TO 3704 3711 3712 3715 3718 3725 TO 3728 3731 3735 3739 TO 3745 3758 -
1066. 3759 TO 3760 3765 3768 3771 TO 3781 3784 3785 3787 TO 3793 3799 3807 TO 3814 -
1067. 3835 3836 3846 3849 3852 3853 3855 TO 3860 3863 3864 3866 3873 TO 3877 3880 -
1068. 3883 3907 3909 3914 3917 3920 3921 3925 3927 TO 3929 3934 TO 3946 3950 3952 -
1069. 3954 3955 3959 3960 3962 3965 3966 3971 3973 3976 3977 3981 3983 3985 3991 -
1070. 3992 4076 4118 4124 4128 4129 4136 4139 4423 4430 4452 4480 END MY MZ
1071. 2475 2476 2501 2502 3166 3170 3217 4659 4660 END MY MZ
1072. 3900 END MY MZ
1073. 1523 START MY MZ
1074. 1523 END MY MZ
1075. 1709 1823 1824 3269 START FX
1076. 4862 4865 START FX FY FZ
1077. 4515 END MY MZ
1078. 4518 END MY MZ
1079. 5198 END MY MZ
1080. ********************************************************************
1081. MEMBER TRUSS
1082. 4370 TO 4373 4378 TO 4409 4591 TO 4596 4598 4599 4602 4603 4623 TO 4634 4674 -
1083. 4675 TO 4677 4682 TO 4685 4822 TO 4825 4845 4851 4852 4863 4864 5216 TO 5221
1084. MEMBER TRUSS
1085. 4370 TO 4373 4378 TO 4381 4384 TO 4407 4409 4598 4599 4602 4603
1086. ELEMENT PLANE STRESS
1087. 4004 4006 TO 4023 4410 TO 4414
1088. ********************************************************************
1089. *PRIMARY LOAD CASES*************************************************
1090. LOAD 1 LOADTYPE DEAD  TITLE DEAD LOAD
1091. SELFWEIGHT Y -1
1092. SELFWEIGHT Y -1 LIST 460
1093. *CONC. STORAGE BLDG ROOF DEAD LOAD
1094. JOINT LOAD
1095. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1096. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1097. 1768 1770 FY -0.07
1098. 10 11 FY -0.035
1099. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1100. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1101. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1102. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
```

```
1103. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1104. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1105. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1106. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1107. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY -0.15
1108. ********************************************************************************
1109. ********************************************************************************
1110. *ADDITIONAL LOAD FOR PIPING(ASSUMED)
1111. JOINT LOAD
1112. 80 96 119 135 151 167 183 199 215 231 247 263 513 527 572 586 628 642 FY -2
1113. *SHEETING + SIDE RUNNER LOAD
1114. MEMBER LOAD
1115. 5 13 175 208 241 274 307 340 373 406 439 472 1126 1160 1275 1309 1388 1414 -
1116. 1448 1747 1748 2015 2016 2055 2056 2095 2096 2135 2136 2175 2176 2215 2216 -
1117. 2256 2257 5181 5202 UNI GY -0.09
1118. 460 UNI GY -0.09 2.57515 2.65015
1119. 460 UNI GY -0.09 0 2.57515
1120. 1436 UNI GY -0.09 0 5.225
1121. *JOINT LOAD
1122. *80 119 151 183 215 247 513 572 628 MZ 1
1123. *96 135 167 199 231 247 263 527 586 642 MZ -1
1124. *********************************************
1125. *6 O/P CHEQD PL LOAD @55KG/M2
1126. 4521 4524 4526 4528 4530 4532 4859 4861 5184 5187 5191 UNI GY -0.055
1127. ************************************************************
1128. *STAIRCASE DEAD LOAD
1129. 5162 5182 CON GY -0.2 0.2
1130. 5162 5182 CON GY -0.2 1.4
1131. 5182 CON GY -0.2 1.8
1132. 5182 CON GY -0.2 3
1133. 5169 CON GY -0.2 0.05
1134. 5169 CON GY -0.2 1.25
1135. 5198 CON GY -2.6
1136. *LOAD ON FILTRATION BLDG************************
1137. *LOAD FOR CONVEYOR PLATFORM
1138. FLOOR LOAD
1139. YRANGE 4 5 FLOAD -0.055 XRANGE 26.8 32.8  ZRANGE 52 68.4  GY
**NOTE** about Floor/OneWay Loads/Weights.
  Please note that depending on the shape of the floor you may
  have to break up the FLOOR/ONEWAY LOAD into multiple commands.
  For details please refer to Technical Reference Manual
  Section 5.32.4.2 Note d and/or "5.32.4.3 Note f.

1140. YRANGE 4 5 FLOAD -0.055 XRANGE 25.25 26.8  ZRANGE 52 55  GY
1141. *LOAD FOR CONVEYOR WALKWAY
1142. JOINT LOAD
1143. 1570 1571 FY -0.2
1144. 1572 1573 FY -0.23
1145. 1545 1546 1549 1550 1554 1555 1565 1566 FY -3.25
1146. MEMBER LOAD
1147. 4462 4464 4488 4489 CON GY -2.5
1148. *SIDE SHEETING LOAD
1149. MEMBER LOAD
```

```
1150. 2956 3437 3440 3446 3449 3458 3461 3471 3474 3485 3486 3541 TO 3548 3551 3554 -
1151. 3555 3652 TO 3656 3658 TO 3661 3664 3667 3668 3746 TO 3750 3752 3756 3759 -
1152. 3760 3825 3826 3828 3829 3831 TO 3834 3837 3840 3841 3897 3899 TO 3901 3905 -
1153. 3908 3909 3947 3948 3953 3956 3964 3967 3975 3978 3989 3990 4092 4099 4347 -
1154. 4349 4354 4436 4438 4663 4665 4666 4681 UNI GY -0.08
1155. 97 130 2298 3441 3450 3451 3462 3475 3483 3484 3949 3957 3958 3968 3979 3980 -
1156. 3987 3988 4064 4066 4348 4350 4353 4358 4360 UNI GY -0.08
1157. ************************************************************
1158. *ROOF SHEETING + PURLIN LOAD
1159. *LOAD ON INTERNAL FRAMES
1160. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.11 1.375
1161. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.11 0.249
1162. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.11 1.624
1163. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.11 0.51
1164. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.11 1.885
1165. JOINT LOAD
1166. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY -0.055
1167. 1242 1292 1348 1382 1415 FY -0.11
1168. JOINT LOAD
1169. 1227 1228 1449 1450 FY -0.03
1170. *LOAD ON EXTERNAL FRAMES
1171. MEMBER LOAD
1172. 3489 3490 3993 3994 CON Y -0.055 1.375
1173. 4535 4537 4539 4541 CON Y -0.055 0.249
1174. 4535 4537 4539 4541 CON Y -0.055 1.624
1175. 3491 3492 3995 3996 CON Y -0.055 0.51
1176. 3491 3492 3995 3996 CON Y -0.055 1.885
1177. *DEAD LOAD @ CRANE WALKWAY LEVEL @50KG/M2
1178. MEMBER LOAD
1179. 3477 TO 3482 4415 4416 4418 4420 4423 4425 4427 4430 UNI GY -0.033
1180. 3494 3495 3497 3498 3505 3506 3527 3528 3534 3535 3584 3585 3587 3588 3598 -
1181. 3599 3615 3616 3618 3619 3670 3671 3673 3674 3709 3710 3713 3714 3716 3717 -
1182. 3766 3767 3769 3770 3802 3803 3809 3810 3812 3813 3847 3848 3850 3851 3861 -
1183. 3862 3878 3879 3881 3882 3915 3916 3918 3919 3922 3923 3939 3940 3942 -
1184. 3943 UNI GY -0.038
1185. ************************************************************
1186. *3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
1187. *4105 4107 4108 4110 4543 TO 4546 UNI GY -0.11
1188. *3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI GY -0.055
1189. ************************************************************************
1190. ************************************************************************
1191. LOAD 2 LOADTYPE LIVE  TITLE LIVE LOAD
1192. ************************************************************************
1193. MEMBER LOAD
1194. *LIVE LOAD @500KG/M2
1195. 4521 4524 4526 4528 4530 4532 4859 4861 5184 5187 5191 UNI GY -0.5
1196. ************************************************************************
1197. *STAIRCASE LIVE LOAD
1198. 5162 CON GY -0.7 0.2
1199. 5162 CON GY -0.7 1.4
1200. 5182 CON GY -0.7 1.8
1201. 5182 CON GY -0.7 3
1202. 5169 CON GY -0.7 0.05
1203. 5169 CON GY -0.7 1.25
1204. ************************************************************************8
1205. *500KG/M2 ON FILTER PRESS PLATFORM
```

```
1206. FLOOR LOAD
1207. YRANGE 10 11 FLOAD -0.5 XRANGE 0 28  ZRANGE 58 62  GY
1208. YRANGE 10 11 FLOAD -0.5 XRANGE 0 28  ZRANGE 65.4749 68.4  GY
1209. YRANGE 10 11 FLOAD -0.5 XRANGE 0.3 3.67574  ZRANGE 61.52 65.4969  GY
1210. YRANGE 10 11 FLOAD -0.5 XRANGE 21.918 61.58  ZRANGE 27.357 65.4749  GY
1211. ************************************************************************
1212. YRANGE 13 14 FLOAD -0.5 XRANGE 0 28  ZRANGE 58 62  GY
1213. YRANGE 13 14 FLOAD -0.5 XRANGE 0 28  ZRANGE 65.4749 68.4  GY
1214. YRANGE 13 14 FLOAD -0.5 XRANGE 0.3 3.67574  ZRANGE 61.52 65.4969  GY
1215. YRANGE 13 14 FLOAD -0.5 XRANGE 21.918 61.58  ZRANGE 27.357 65.4749  GY
1216. FLOOR LOAD
1217. YRANGE 4 5 FLOAD -0.5 XRANGE 25.25 26.8  ZRANGE 52 55  GY
1218. YRANGE 4 5 FLOAD -0.5 XRANGE 26.8 32.8  ZRANGE 52 68.4  GY
1219. JOINT LOAD
1220. 1570 1571 FY -1.5
1221. 1572 1573 FY -2
1222. ************************************************************************
1223. *LIVE LOAD @ CRANE WALKWAY LEVEL @250KG/M2
1224. MEMBER LOAD
1225. 3477 TO 3482 4415 4416 4418 4420 4423 4425 4427 4430 UNI GY -0.165
1226. 3494 3495 3497 3498 3505 3506 3527 3528 3534 3535 3584 3585 3587 3588 3598 -
1227. 3599 3615 3616 3618 3619 3670 3671 3673 3674 3709 3710 3713 3714 3716 3717 -
1228. 3766 3767 3769 3770 3802 3803 3809 3810 3812 3813 3847 3848 3850 3851 3861 -
1229. 3862 3878 3879 3881 3882 3915 3916 3918 3919 3922 3923 3939 3940 3942 -
1230. 3943 UNI GY -0.19
1231. ************************************************************************
1232. LOAD 3 LOADTYPE LIVE  TITLE ROOF LIVE LOAD
1233. JOINT LOAD
1234. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1235. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1236. 1768 1770 FY -0.25
1237. 10 11 FY -0.125
1238. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1239. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1240. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1241. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1242. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1243. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1244. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1245. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1246. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY -0.53
1247. **LOAD ON FILTRATION BLDG*****************************************************
1248. *LOAD ON INTERNAL FRAMES
1249. MEMBER LOAD
1250. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.41 1.375
1251. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.41 0.249
1252. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.41 1.624
1253. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.41 0.51
1254. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.41 1.885
1255. JOINT LOAD
1256. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY -0.21
1257. 1242 1292 1348 1382 1415 FY -0.41
1258. *LOAD ON EXTERNAL FRAMES
```

```
1259. MEMBER LOAD
1260. 3489 3490 3993 3994 CON Y -0.21 1.375
1261. 4535 4537 4539 4541 CON Y -0.21 0.249
1262. 4535 4537 4539 4541 CON Y -0.21 1.624
1263. 3491 3492 3995 3996 CON Y -0.21 0.51
1264. 3491 3492 3995 3996 CON Y -0.21 1.885
1265. JOINT LOAD
1266. 1227 1228 1449 1450 FY -0.1
1267. ******************************************************************************
1268. *MEMBER LOAD
1269. *3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
1270. *4105 4107 4108 4110 4543 TO 4546 UNI GY -0.27
1271. *3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI GY -0.135
1272. ******************************************************************************
1273. LOAD 4 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 1
1274. ******************************************************************************
1275. *WHEEL LOAD = 1.25*(8) = 10T { 25% IMPACT)
1276. *LATERAL FORCE = 20% OF 8 = 1.6 T PER WHEEL
1277. JOINT LOAD
1278. 1255 FY -10 FZ 1.6
1279. ******************************************************************************
1280. LOAD 5 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 2
1281. ******************************************************************************
1282. JOINT LOAD
1283. 1307 FY -10 FZ 1.6
1284. ******************************************************************************
1285. LOAD 6 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 3
1286. ******************************************************************************
1287. JOINT LOAD
1288. 1341 FY -10 FZ 1.6
1289. ******************************************************************************
1290. ******************************************************************************
1291. LOAD 7 LOADTYPE WIND  TITLE WIND LOAD IN +X DIR (CP = +0.55)
1292. MEMBER LOAD
1293. *WIND ON STORAGE BLDG WALL
1294. 472 1748 5181 5202 UNI GX 0.31
1295. 460 UNI GX 0.31 2.57515 2.65015
1296. 460 UNI GX 0.31 0 2.57515
1297. 5 1747 UNI GX 0.091
1298. 439 UNI GX 0.091
1299. 439 UNI GX 0.091 0 0.1544
1300. 439 UNI GX 0.091 0 0.1544
1301. 439 UNI GX 0.091 0 0.1544
1302. 2016 2056 2096 2136 2176 2216 2257 UNI GX 0.62
1303. 1436 UNI GX 0.62 0 5.225
1304. 1160 UNI GX 0.62
1305. 1160 UNI GX 0.62 0 0.1544
1306. 274 UNI GX 0.62
1307. 274 UNI GX 0.62 0 0.1544
1308. 208 UNI GX 0.62
1309. 208 UNI GX 0.62 0 0.1544
1310. 1309 UNI GX 0.62
1311. 1309 UNI GX 0.62 0 0.1544
1312. 406 UNI GX 0.62
1313. 406 UNI GX 0.62 0 0.1544
1314. 340 UNI GX 0.62
```

```
1315. 1448 UNI GX 0.62
1316. 13 1388 2015 2055 2095 2135 2175 2215 2256 UNI GX 0.18
1317. 1126 UNI GX 0.18
1318. 1126 UNI GX 0.18 0 0.1544
1319. 175 UNI GX 0.18
1320. 175 UNI GX 0.18 0 0.1544
1321. 1275 UNI GX 0.18
1322. 1275 UNI GX 0.18 0 0.1544
1323. 373 UNI GX 0.18
1324. 373 UNI GX 0.18 0 0.1544
1325. 307 UNI GX 0.18
1326. 307 UNI GX 0.18 0 0.1544
1327. 241 UNI GX 0.18
1328. 241 UNI GX 0.18 0 0.1544
1329. 1414 UNI GX 0.18
1330. 1414 UNI GX 0.18 0 0.1544
1331. 5 439 472 5181 5202 UNI GZ -0.45
1332. 460 UNI GZ -0.45 2.57515 2.65015
1333. 460 UNI GZ -0.45 0 2.57515
1334. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 UNI GZ -0.9
1335. **WIND ON STORAGE BLDG ROOF
1336. JOINT LOAD
1337. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1338. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1339. 1768 1770 FY 0.87
1340. 10 11 FY 0.44
1341. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1342. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1343. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1344. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1345. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1346. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1347. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1348. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1349. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY 1.74
1350. *WIND ON FILTRATION BLDG WALL
1351. MEMBER LOAD
1352. 130 2298 3947 3948 3953 3956 3958 3964 3967 3975 3978 3989 3990 -
1353. 4358 UNI GX 0.56
1354. 3949 3957 3968 3979 3980 3987 3988 4066 4350 UNI GX 0.24
1355. 3441 3450 3462 3475 3483 3484 4064 4348 UNI GX 0.07
1356. 97 3437 3440 3446 3449 3451 3458 3461 3471 3474 3485 3486 4353 4360 UNI GX 0.17
1357. 2956 3544 3546 3554 3655 3658 3660 3661 3667 3759 3828 3831 3833 3834 3840 -
1358. 3908 4349 4354 4663 4665 4666 UNI GZ -0.77
1359. 3548 UNI GZ -0.77 1.475 1.6191
1360. 3548 UNI GZ -0.77 0 1.475
1361. 3900 UNI GZ -0.77 0.0854988 1.5605
1362. 3900 UNI GZ -0.77 0 0.0854988
1363. 97 130 2298 3451 3483 3958 3980 3987 4064 4066 4348 4350 4353 4358 -
1364. 4360 UNI GZ -0.39
1365. 3441 3450 3462 3475 3484 3949 3957 3968 3979 3988 UNI GZ 0.39
1366. 3541 TO 3543 3545 3547 3551 3555 3652 TO 3654 3656 3659 3664 3668 -
1367. 3746 TO 3748 3750 3752 3756 3760 3825 3826 3829 3832 3837 3841 3897 3899 -
1368. 3901 3905 3909 4092 4099 4347 4436 4438 UNI GZ 0.77
1369. *WIND ON FILTRATION BLDG ROOF
1370. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 1.45 1.625
```

```
1371. 4546 CON Y 1.45 0.761429
1372. 4545 CON Y 1.45 0.761433
1373. 4544 CON Y 1.45 0.761429
1374. 4543 CON Y 1.45 0.812911
1375. 4110 CON Y 1.45 0.761429
1376. 4108 CON Y 1.45 0.761429
1377. 4107 CON Y 1.45 0.761429
1378. 4105 CON Y 1.45 0.81293
1379. 4103 CON Y 1.45 0.761429
1380. 4102 CON Y 1.45 0.864431
1381. 4546 CON Y 1.45 2.38643
1382. 4545 CON Y 1.45 2.38643
1383. 4544 CON Y 1.45 2.38643
1384. 4543 CON Y 1.45 2.43791
1385. 4110 CON Y 1.45 2.38643
1386. 4108 CON Y 1.45 2.38643
1387. 4107 CON Y 1.45 2.38643
1388. 4105 CON Y 1.45 2.43793
1389. 4103 CON Y 1.45 2.38643
1390. 4102 CON Y 1.45 2.48943
1391. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.45 1.625
1392. 3538 3649 3764 3845 3913 CON Y 1.45 3.25
1393. JOINT LOAD
1394. 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 FY 0.72
1395. MEMBER LOAD
1396. 3489 3490 3993 3994 CON Y 0.72 1.625
1397. 4541 CON Y 0.72 0.761429
1398. 4539 CON Y 0.72 0.761429
1399. 4537 CON Y 0.72 0.761429
1400. 4535 CON Y 0.72 0.761429
1401. 4541 CON Y 0.72 2.38643
1402. 4539 CON Y 0.72 2.38643
1403. 4537 CON Y 0.72 2.38643
1404. 4535 CON Y 0.72 2.38643
1405. 3491 3492 3995 3996 CON Y 0.72 1.625
1406. 3491 3995 CON Y 0.72 3.25
1407. JOINT LOAD
1408. 1227 1228 1449 1450 FY 0.36
1409. MEMBER LOAD
1410. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2536 2540 2557 2559 2565 4709 -
1411. 4711 4714 4717 4901 4905 4992 TO 4994 4996 4997 UNI GZ -0.34
1412. *STAIR WIND LOAD
1413. ********************************************************************************
1414. ********************************************************************************
1415. LOAD 8 LOADTYPE WIND  TITLE WIND LOAD IN +X DIR (CP = -0.55)
1416. **WIND ON STORAGE BLDG ROOF
1417. JOINT LOAD
1418. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1419. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1420. 1768 1770 FY 0.23
1421. 10 11 FY 0.11
1422. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1423. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1424. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1425. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1426. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
```

```
1427. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1428. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1429. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1430. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY 0.46
1431. ********************************************************************************
1432. *WIND ON STORAGE BLDG WALL
1433. MEMBER LOAD
1434. *97 130 2297 2298 UNI GZ 0.07
1435. 5 1747 1748 5181 5202 UNI GZ -0.055
1436. 460 UNI GZ -0.055 2.57515 2.65015
1437. 460 UNI GZ -0.055 0 2.57515
1438. 472 UNI GZ -0.055
1439. 472 UNI GZ -0.055 0 0.1544
1440. 439 UNI GZ -0.055
1441. 439 UNI GZ -0.055 0 0.1544
1442. 439 UNI GZ -0.055 0 0.1544
1443. 439 UNI GZ -0.055 0 0.1544
1444. 13 175 241 307 373 1126 1275 1388 1414 2015 2055 2095 2135 2175 2215 -
1445. 2256 UNI GX 1
1446. 2016 2056 2096 2136 2176 2216 2257 UNI GX -0.18
1447. 1436 UNI GX -0.18 0 5.225
1448. 1160 UNI GX -0.18
1449. 1160 UNI GX -0.18 0 0.1544
1450. 274 UNI GX -0.18
1451. 274 UNI GX -0.18 0 0.1544
1452. 208 UNI GX -0.18
1453. 208 UNI GX -0.18 0 0.1544
1454. 1309 UNI GX -0.18
1455. 1309 UNI GX -0.18 0 0.1544
1456. 406 UNI GX -0.18
1457. 406 UNI GX -0.18 0 0.1544
1458. 340 UNI GX -0.18
1459. 340 UNI GX -0.18 0 0.1544
1460. 1448 UNI GX -0.18
1461. 1448 UNI GX -0.18 0 0.1544
1462. 1748 5181 5202 UNI GX -0.09
1463. 460 UNI GX -0.09 2.57515 2.65015
1464. 460 UNI GX -0.09 0 2.57515
1465. 130 UNI GX -0.09 0 0.1544
1466. 472 UNI GX -0.09
1467. 472 UNI GX -0.09 0 0.1544
1468. 5 1747 UNI GX 0.49
1469. 439 UNI GX 0.49
1470. 439 UNI GX 0.49 0 0.1544
1471. 439 UNI GX 0.49 0 0.1544
1472. 439 UNI GX 0.49 0 0.1544
1473. 97 UNI GX 0.49 0 0.1544
1474. 97 UNI GX 0.49 0 0.1544
1475. 97 UNI GX 0.49 0 0.1544
1476. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 UNI GZ -0.11
1477. ********************************************************************************
1478. *WIND ON FILTRATION BLDG WALL
1479. 3441 3450 3462 3475 3483 3484 4064 4348 UNI GX 0.38
1480. 97 3437 3440 3446 3449 3451 3458 3461 3471 3474 3485 3486 4353 4360 UNI GX 0.9
1481. 130 2298 3947 3948 3953 3956 3958 3964 3967 3975 3978 3989 3990 -
1482. 4358 UNI GX -0.16
```

```
1483. 3949 3957 3968 3979 3980 3987 3988 4066 4350 UNI GX -0.07
1484. 3541 TO 3543 3545 3547 3551 3555 3652 TO 3654 3656 3659 3664 3668 -
1485. 3746 TO 3748 3750 3752 3756 3760 3825 3826 3829 3832 3837 3841 3897 3899 -
1486. 3901 3905 3909 4092 4099 4347 4436 4438 UNI GZ 0.09
1487. 3441 3450 3462 3475 3484 3949 3957 3968 3979 3988 UNI GZ 0.045
1488. 2956 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 -
1489. 3840 3908 4349 4354 4663 4665 4666 UNI GZ -0.09
1490. 3548 UNI GZ -0.09 1.475 1.6191
1491. 3548 UNI GZ -0.09 0 1.475
1492. 3900 UNI GZ -0.09 0.0854988 1.5605
1493. 3900 UNI GZ -0.09 0 0.0854988
1494. 97 130 2298 3451 3483 3958 3980 3987 4064 4066 4348 4350 4353 4358 -
1495. 4360 UNI GZ -0.045
1496. *WIND ON FILTRATION BLDG ROOF
1497. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.37 1.625
1498. 4546 CON Y -0.37 0.761429
1499. 4545 CON Y -0.37 0.761433
1500. 4544 CON Y -0.37 0.761429
1501. 4543 CON Y -0.37 0.812911
1502. 4110 CON Y -0.37 0.761429
1503. 4108 CON Y -0.37 0.761429
1504. 4107 CON Y -0.37 0.761429
1505. 4105 CON Y -0.37 0.81293
1506. 4103 CON Y -0.37 0.761429
1507. 4102 CON Y -0.37 0.864431
1508. 4546 CON Y -0.37 2.38643
1509. 4545 CON Y -0.37 2.38643
1510. 4544 CON Y -0.37 2.38643
1511. 4543 CON Y -0.37 2.43791
1512. 4110 CON Y -0.37 2.38643
1513. 4108 CON Y -0.37 2.38643
1514. 4107 CON Y -0.37 2.38643
1515. 4105 CON Y -0.37 2.43793
1516. 4103 CON Y -0.37 2.38643
1517. 4102 CON Y -0.37 2.48943
1518. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.37 1.625
1519. 3538 3649 3764 3845 3913 CON Y -0.37 3.25
1520. JOINT LOAD
1521. 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 FY -0.19
1522. MEMBER LOAD
1523. 3489 3490 3993 3994 CON Y -0.19 1.625
1524. 4541 CON Y -0.19 0.761429
1525. 4539 CON Y -0.19 0.761429
1526. 4537 CON Y -0.19 0.761429
1527. 4535 CON Y -0.19 0.761429
1528. 4541 CON Y -0.19 2.38643
1529. 4539 CON Y -0.19 2.38643
1530. 4537 CON Y -0.19 2.38643
1531. 4535 CON Y -0.19 2.38643
1532. 3491 3492 3995 3996 CON Y -0.19 1.625
1533. 3491 3995 CON Y -0.19 3.25
1534. JOINT LOAD
1535. 1227 1228 1449 1450 FY -0.09
1536. MEMBER LOAD
1537. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2536 2540 2557 2559 2565 4709 -
1538. 4711 4714 4717 4901 4905 4992 TO 4994 4996 4997 UNI GZ -0.04
```

```
*STAIR WIND LOAD
5160 TO 5162 5164 5165 5168 5169 5172 5182 5199 5200 5206 UNI GX -0.04
*********************************************************************
*********************************************************************
LOAD 9 LOADTYPE WIND  TITLE WIND LOAD IN +Z DIR (CP = +0.55)
MEMBER LOAD
*WINDWARD WALL
3441 3450 3462 3475 3484 3949 3957 3968 3979 3988 UNI GZ -0.077
3541 TO 3543 3545 3547 3551 3555 3897 3899 3901 3905 3909 4092 -
4436 UNI GZ -0.155
3652 TO 3654 3656 3659 3664 3668 3825 3826 3829 3832 3837 3841 4347 -
4438 UNI GZ -0.155
3746 TO 3748 3750 3752 3756 3760 4099 UNI GZ -0.155
*LEEWARD WALL
97 130 2298 3451 3483 3958 3980 3987 4064 4066 4348 4350 4353 4358 -
4360 UNI GZ -0.26
2956 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 -
3840 3908 4349 4354 4663 4665 4666 UNI GZ -0.53
3548 UNI GZ -0.53 1.475 1.6191
3548 UNI GZ -0.53 0 1.475
3900 UNI GZ -0.53 0.0854988 1.5605
3900 UNI GZ -0.53 0 0.0854988
*SIDEWALL
97 3441 3450 3451 3462 3475 3483 3484 4064 4348 4353 4360 UNI GX -0.35
3437 3440 3446 3449 3458 3461 3471 3474 3485 3486 UNI GX -0.82
130 2298 3949 3957 3958 3968 3979 3980 3987 3988 4066 4350 4358 UNI GX 0.35
3947 3948 3953 3956 3964 3967 3975 3978 3989 3990 UNI GX 0.82
*************************************************************************
*ROOF
*3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI Y 0.42
*3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
*4105 4107 4108 4110 4543 TO 4546 UNI Y 0.84
*********************************************************
*LOAD ON INTERNAL FRAMES
3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 1.4 1.375
4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 1.4 0.249
4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 1.4 1.624
3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.4 0.51
3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.4 1.885
JOINT LOAD
1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY 0.7
1242 1292 1348 1382 1415 FY 1.4
*LOAD ON EXTERNAL FRAMES
MEMBER LOAD
3489 3490 3993 3994 CON Y 0.7 1.375
4535 4537 4539 4541 CON Y 0.7 0.249
4535 4537 4539 4541 CON Y 0.7 1.624
3491 3492 3995 3996 CON Y 0.7 0.51
3491 3492 3995 3996 CON Y 0.7 1.885
*********************************************************************
*STAIR WIND LOAD
5160 5164 5165 5199 5206 UNI GZ 0.02
5163 5166 5175 5178 UNI GZ 0.04
5176 5177 5180 5207 UNI GZ 0.01
JOINT LOAD
1227 1228 1449 1450 FY 0.35
```

```
1595. ************************************************************************
1596. LOAD 10 LOADTYPE WIND  TITLE WIND LOAD IN +Z DIR (CP = -0.55)
1597. MEMBER LOAD
1598. *WINDWARD WALL
1599. 3441 3450 3462 3475 3484 3949 3957 3968 3979 3988 UNI GZ -0.42
1600. 3541 TO 3543 3545 3547 3551 3555 3897 3899 3901 3905 3909 4092 -
1601. 4436 UNI GZ -0.84
1602. 3652 TO 3654 3656 3659 3664 3668 3825 3826 3829 3832 3837 3841 4347 -
1603. 4438 UNI GZ -0.84
1604. 3746 TO 3748 3750 3752 3756 3760 4099 UNI GZ -0.84
1605. *LEEWARD WALL
1606. 97 130 2298 3451 3483 3958 3980 3987 4064 4066 4348 4350 4353 4358 -
1607. 4360 UNI GZ 0.076
1608. 2956 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 -
1609. 3840 3908 4349 4354 4663 4665 4666 UNI GZ 0.153
1610. 3548 UNI GZ 0.153 1.475 1.6191
1611. 3548 UNI GZ 0.153 0 1.475
1612. 3900 UNI GZ 0.153 0.0854988 1.5605
1613. 3900 UNI GZ 0.153 0 0.0854988
1614. *SIDEWALL
1615. 97 3441 3450 3451 3462 3475 3483 3484 4064 4348 4353 4360 UNI GX -0.042
1616. 3437 3440 3446 3449 3458 3461 3471 3474 3485 3486 UNI GX -0.098
1617. 130 2298 3949 3957 3958 3968 3979 3980 3987 3988 4066 4350 4358 UNI GX 0.042
1618. 3947 3948 3953 3956 3964 3967 3975 3978 3989 3990 UNI GX 0.098
1619. *ROOF
1620. *3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI Y 0.08
1621. *3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
1622. *4105 4107 4108 4110 4543 TO 4546 UNI Y 0.16
1623. ************************************************************************8
1624. ************************************************************
1625. *LOAD ON INTERNAL FRAMES
1626. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 0.4 1.375
1627. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 0.4 0.249
1628. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 0.4 1.624
1629. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 0.4 0.51
1630. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 0.4 1.885
1631. JOINT LOAD
1632. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY 0.2
1633. 1242 1292 1348 1382 1415 FY 0.4
1634. *LOAD ON EXTERNAL FRAMES
1635. MEMBER LOAD
1636. 3489 3490 3993 3994 CON Y 0.2 1.375
1637. 4535 4537 4539 4541 CON Y 0.2 0.249
1638. 4535 4537 4539 4541 CON Y 0.2 1.624
1639. 3491 3492 3995 3996 CON Y 0.2 0.51
1640. 3491 3492 3995 3996 CON Y 0.2 1.885
1641. ********************************************************************
1642. *STAIR WIND LOAD
1643. 5160 5164 5165 5199 5206 UNI GZ 0.02
1644. 5163 5166 5175 5178 UNI GZ 0.04
1645. 5176 5177 5180 5207 UNI GZ 0.01
1646. JOINT LOAD
1647. 1227 1228 1449 1450 FY 0.1
1648. ************************************************************************
1649. LOAD 11 LOADTYPE DEAD  TITLE EQUIPMENT DEAD LOAD
1650. **************CONC. STORAGE BLDG************************************************
```

```
1651. *3T CAP. MONORAIL LOAD FOR TRIPPER CONVEYOR
1652. JOINT LOAD
1653. 1626 1628 1630 1632 1634 1689 1695 FY -5
1654. MEMBER LOAD
1655. 4856 CON GY -5 1.9
1656. *3360-CNV-001 SHORT POST LOAD
1657. 5189 CON GY -0.65 0.55
1658. 5186 CON GY -0.65 0.55
1659. 5189 CON GZ 0.15 0.55
1660. 5186 CON GZ 0.15 0.55
1661. 5189 CON GX 0.1 0.55
1662. 5186 CON GX 0.1 0.55
1663. ************************************************************
1664. *HEAD PULLEY FRAME(3360-CNV-001) LOAD ON STORAGE BLDG
1665. JOINT LOAD
1666. 1580 1582 FY 1.52 FZ 2.23
1667. MEMBER LOAD
1668. 4515 4518 CON GY -4 1.5
1669. 4515 4518 CON GZ 1.6 1.5
1670. 4515 4518 CON GY -4 2.4
1671. 4515 4518 CON GZ 3.7 2.4
1672. *CONC. FILTRATION BLDG****************************************
1673. *FILTER PRESS EMPTY LOAD**************************
1674. JOINT LOAD
1675. 1236 1238 FY -5.2
1676. 1262 1266 FY -2.3
1677. MEMBER LOAD
1678. 3594 3596 CON GY -20 1.9
1679. 3776 3778 CON GY -7.6 2.2
1680. *CONVEYOR SHORT POST LOAD ASSUMED
1681. 3567 3636 3734 CON GY -2.75 1.1
1682. 3567 3636 3734 CON GY -2.75 2.85
1683. 3822 CON GY -2.75 3.985
1684. 3822 CON GY -2.75 5.735
1685. JOINT LOAD
1686. 1570 1571 FY -2.75
1687. 1572 1573 FY -2.75
1688. *TAIL PULLEY FRAME LOAD 3360-CNV-001
1689. MEMBER LOAD
1690. 4462 4464 CON GY -6.8 2.824
1691. 4462 4464 CON GZ -4.2 2.824
1692. 4462 4464 CON GY 4.7 3.824
1693. 4462 4464 CON GZ -3.5 3.824
1694. 4463 4465 CON GY -4.46 0.839
1695. 4463 4465 CON GZ 2.24 0.839
1696. 4463 4465 CON GX 0.2 0.839
1697. 4488 4489 CON GY -4.46 3.74
1698. 4488 4489 CON GZ -2.24 3.74
1699. 4488 4489 CON GX 0.2 3.74
1700. 4463 4465 CON GY -1 2.689
1701. 4463 4465 CON GZ 0.2 2.689
1702. 4463 4465 CON GX 0.2 2.689
1703. 4463 4465 CON GY -1 1.189
1704. 4463 4465 CON GX 0.2 1.189
1705. 4463 4465 CON GZ 0.2 1.189
1706. ************************************************
```

```
1707. *3360-CNV-001 SHORT POST LOAD
1708. 4488 4489 CON GY -0.65 3.024
1709. 4488 4489 CON GZ 0.15 3.024
1710. 4488 4489 CON GX 0.09 3.024
1711. 4488 4489 CON GY -0.65 1.024
1712. 4488 4489 CON GZ 0.15 1.024
1713. 4488 4489 CON GX 0.09 1.024
1714. 4462 4464 CON GY -0.65 0.33
1715. 4462 4464 CON GZ 0.1 0.33
1716. 4462 4464 CON GX 0.06 0.33
1717. 4472 4473 CON GY -0.65 0.3
1718. 4472 4473 CON GZ 0.1 0.3
1719. 4472 4473 CON GX 0.06 0.3
1720. ************************************************************
1721. LOAD 12 LOADTYPE DEAD  TITLE EQUIPMENT LIVE LOAD
1722. **************CONC. STORAGE BLDG***********************************************
1723. MEMBER LOAD
1724. *3360-CNV-001 SHORT POST LOAD
1725. 5189 CON GY -0.3 0.55
1726. 5186 CON GY -0.3 0.55
1727. 5189 CON GZ 0.15 0.55
1728. 5186 CON GZ 0.15 0.55
1729. 5189 CON GX 0.1 0.55
1730. 5186 CON GX 0.1 0.55
1731. *FILTER PRESS MAX CAKE LOAD*********************************************
1732. JOINT LOAD
1733. 1236 1238 FX 0.625 FY -4.4
1734. 1262 1266 FX 0.625 FY -4.3
1735. MEMBER LOAD
1736. 3594 3596 CON GY -24.4 1.9
1737. 3776 3778 CON GY -5.5 2.2
1738. 3594 3596 CON GX 0.625 1.9
1739. 3776 3778 CON GX 0.625 2.2
1740. ***********************************************
1741. *3360-CNV-001 SHORT POST LOAD
1742. 4488 4489 CON GY -0.3 3.024
1743. 4488 4489 CON GZ 0.15 3.024
1744. 4488 4489 CON GX 0.09 3.024
1745. 4488 4489 CON GY -0.3 1.024
1746. 4488 4489 CON GZ 0.15 1.024
1747. 4488 4489 CON GX 0.09 1.024
1748. 4462 4464 CON GY -0.3 0.33
1749. 4462 4464 CON GZ 0.1 0.33
1750. 4462 4464 CON GX 0.06 0.33
1751. 4472 4473 CON GY -0.3 0.3
1752. 4472 4473 CON GZ 0.1 0.3
1753. 4472 4473 CON GX 0.06 0.3
1754. ************************************************************************
1755. *3360-CNV-001 BUFFER LOAD
1756. JOINT LOAD
1757. 1567 1569 FZ 4
1758. ************************************************************************
1759. *LOAD COMBINATIONS FOR DESIGN*****************************************
1760. LOAD COMB 100 1.4*DL
1761. 1 1.4 11 1.4
1762. LOAD COMB 101 1.2*DL+1.6*LL+0.5*LR
```

```
1763. 1 1.2 2 1.6 3 0.5 11 1.2 12 1.6
1764. LOAD COMB 102 1.2DL+1.6LR+0.8WLX1
1765. 1 1.2 3 1.6 7 0.8 11 1.2
1766. LOAD COMB 103 1.2DL+1.6LR+0.8WLX2
1767. 1 1.2 3 1.6 8 0.8 11 1.2
1768. LOAD COMB 104 1.2DL+LL+0.5LR+1.6WLX1
1769. 1 1.2 2 1.0 3 0.5 7 1.6 11 1.2 12 1.0
1770. LOAD COMB 105 1.2DL+LL+0.5LR+1.6WLX2
1771. 1 1.2 2 1.0 3 0.5 8 1.6 11 1.2 12 1.0
1772. LOAD COMB 106 0.9DL+1.6WLX1
1773. 1 0.9 7 1.6
1774. LOAD COMB 107 0.9DL+1.6WLX2
1775. 1 0.9 8 1.6
1776. LOAD COMB 108 1.2*DL+1.6*LL+0.5*LR+CR1
1777. 1 1.2 2 1.6 3 0.5 4 1.0 11 1.2 12 1.6
1778. LOAD COMB 109 1.2*DL+1.6*LL+0.5*LR+CR2
1779. 1 1.2 2 1.6 3 0.5 5 1.0 11 1.2 12 1.6
1780. LOAD COMB 110 1.2*DL+1.6*LL+0.5*LR+CR3
1781. 1 1.2 2 1.6 3 0.5 6 1.0 11 1.2 12 1.6
1782. ****************************************
1783. LOAD COMB 111 1.2DL+1.6LR+0.8WLZ1
1784. 1 1.2 3 1.6 9 0.8 11 1.2
1785. LOAD COMB 112 1.2DL+1.6LR+0.8WLZ2
1786. 1 1.2 3 1.6 10 0.8 11 1.2
1787. LOAD COMB 113 1.2DL+LL+0.5LR+1.6WLZ1
1788. 1 1.2 2 1.0 3 0.5 9 1.6 11 1.2 12 1.0
1789. LOAD COMB 114 1.2DL+LL+0.5LR+1.6WLZ2
1790. 1 1.2 2 1.0 3 0.5 10 1.6 11 1.2 12 1.0
1791. LOAD COMB 115 0.9DL+1.6WLZ1
1792. 1 0.9 9 1.6
1793. LOAD COMB 116 0.9DL+1.6WLZ2
1794. 1 0.9 10 1.6
1795. ************************************************************
1796. *LOAD COMBINATIONS FOR DEFLECTION CHECK**************************
1797. LOAD COMB 201 DL+LL+LR
1798. 1 1.0 2 1.0 3 1.0 11 1.0 12 1.0
1799. LOAD COMB 202 DL+LR+WLX1
1800. 1 1.0 3 1.0 7 1.0 11 1.0
1801. LOAD COMB 203 DL+LR+WLX2
1802. 1 1.0 3 1.0 8 1.0 11 1.0
1803. LOAD COMB 204 DL+LL+LR+WLX1
1804. 1 1.0 2 1.0 3 1.0 7 1.0 11 1.0 12 1.0
1805. LOAD COMB 205 DL+LL+LR+WLX2
1806. 1 1.0 2 1.0 3 1.0 8 1.0 11 1.0 12 1.0
1807. LOAD COMB 206 DL+WLX1
1808. 1 1.0 7 1.0
1809. LOAD COMB 207 DL+WLX2
1810. 1 1.0 8 1.0
1811. ****************************************
1812. LOAD COMB 208 DL+LR+WLZ1
1813. 1 1.0 3 1.0 9 1.0 11 1.0
1814. LOAD COMB 209 DL+LR+WLZ2
1815. 1 1.0 3 1.0 10 1.0 11 1.0
1816. LOAD COMB 210 DL+LL+LR+WLZ1
1817. 1 1.0 2 1.0 3 1.0 9 1.0 11 1.0 12 1.0
1818. LOAD COMB 211 DL+LL+LR+WLZ2
```

```
1819. 1 1.0 2 1.0 3 1.0 10 1.0 11 1.0 12 1.0
1820. LOAD COMB 212 DL+WLZ1
1821. 1 1.0 9 1.0
1822. LOAD COMB 213 DL+WLZ2
1823. 1 1.0 10 1.0
1824. ********************************************
1825. PERFORM ANALYSIS PRINT STATICS CHECK
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**879**	**NUMBER OF MEMBERS**	**1865**
NUMBER OF PLATES	**24**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**49**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 874/ 64/ 384 DOF
TOTAL PRIMARY LOAD CASES = 12, TOTAL DEGREES OF FREEDOM = 5130
TOTAL LOAD COMBINATION CASES = 30 SO FAR.
SIZE OF STIFFNESS MATRIX = 1970 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 37.5/ 165285.9 MB

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE DEAD TITLE DEAD LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.167835901E+02
Y = 0.122332480E+02
Z = 0.475769078E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -573.25
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 27273.59 MY= 0.00 MZ= -9621.32

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 573.25
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -27273.59 MY= 0.00 MZ= 9621.32

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X	-2.35881E+00	1433
Y	-1.12502E+01	861
Z	-5.16103E-01	1415
RX	-1.09838E-02	1601
RY	4.49698E-03	1397
RZ	-3.72922E-02	289

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE LIVE TITLE LIVE LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.260250027E+02
Y = -0.622939489E+08
Z = 0.542499986E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.180764963E+02
Y = 0.110051676E+02
Z = 0.591653367E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.252499995E+02
Y = -0.880085245E+06
Z = 0.544909008E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -302.71
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 17910.12 MY= 0.00 MZ= -5471.99

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 302.71
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -17910.12 MY= 0.00 MZ= 5471.99

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	-2.75267E+00	1433
Y =	-2.29907E+01	1525
Z =	-1.77456E-01	1415
RX=	2.77986E-02	1521
RY=	5.21160E-03	1398
RZ=	-3.09961E-02	1232

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE LIVE TITLE ROOF LIVE LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165272847E+02
Y = 0.181267564E+02
Z = 0.329429962E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -124.87
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 4113.43 MY= 0.00 MZ= -2063.68

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 124.87
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -4113.43 MY= 0.00 MZ= 2063.68

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X	-5.85971E-01	1619
Y	-7.35760E+00	1413
Z	5.39853E-01	1412
RX	-1.03469E-02	1601
RY	-3.18131E-03	1618
RZ	-1.94835E-02	289

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 4
LOADTYPE CRANE HOOK TITLE CRANE LOAD 1

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.572460012E+01
Y = 0.181500005E+02
Z = 0.535000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.572460012E+01
Y = 0.181500005E+02
Z = 0.535000020E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -10.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 564.04 MY= -9.16 MZ= -57.25

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 10.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -564.04 MY= 9.16 MZ= 57.25

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 4)

	MAXIMUMS	AT NODE
X =	-1.75770E-02	1310
Y =	-6.80748E+01	1255
Z =	2.24247E-01	1310
RX=	-1.90839E-02	1525
RY=	3.69255E-04	1621
RZ=	1.74390E-01	1277

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 5
LOADTYPE CRANE HOOK TITLE CRANE LOAD 2

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.111492000E+02
Y = 0.181500005E+02
Z = 0.535000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.111492000E+02
Y = 0.181500005E+02
Z = 0.535000020E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 5)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -10.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 564.04 MY= -17.84 MZ= -111.49

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 5)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 10.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -564.04 MY= 17.84 MZ= 111.49

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 5)

	MAXIMUMS	AT NODE
X =	-3.86434E-02	1310
Y =	-6.08023E-01	1307
Z =	4.42641E-01	1310
RX=	3.74196E-03	1307
RY=	8.14819E-04	1621
RZ=	-5.60864E-04	1277

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 6
LOADTYPE CRANE HOOK TITLE CRANE LOAD 3

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165490005E+02
Y = 0.181500005E+02
Z = 0.535000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165490005E+02
Y = 0.181500005E+02
Z = 0.535000020E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 6)

SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -10.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 564.04 MY= -26.48 MZ= -165.49

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 6)

SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 10.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -564.04 MY= 26.48 MZ= 165.49

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 6)

	MAXIMUMS	AT NODE
X =	-3.51041E-02	1430
Y =	-6.62270E+01	1341
Z =	3.98807E-01	1378
RX=	5.30744E-03	1340
RY=	9.73856E-04	1621
RZ=	-1.71082E-01	1312

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 7
LOADTYPE WIND TITLE WIND LOAD IN +X DIR (CP = +0.55)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.251024215E+02
Y = 0.109601508E+02
Z = 0.382631613E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165293746E+02
Y = 0.179988537E+02
Z = 0.321227011E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 7)
SUMMATION FORCE-X = 112.06
SUMMATION FORCE-Y = 401.37
SUMMATION FORCE-Z = -28.68

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -13300.25 MY= 4706.05 MZ= 5406.20

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 7)
SUMMATION FORCE-X = -112.06
SUMMATION FORCE-Y = -401.37
SUMMATION FORCE-Z = 28.68

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 13300.25 MY= -4706.05 MZ= -5406.20

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 7)

	MAXIMUMS	AT NODE
X =	1.20742E+01	1439
Y =	2.12497E+01	1413
Z =	6.39861E+00	1411
RX=	2.96067E-02	1601
RY=	-2.25990E-02	1397
RZ=	5.74560E-02	289

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 8
LOADTYPE WIND TITLE WIND LOAD IN +X DIR (CP = -0.55)

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 8)
SUMMATION FORCE-X = 117.92
SUMMATION FORCE-Y = 61.03
SUMMATION FORCE-Z = -4.81

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -761.20 MY= 4496.67 MZ= -249.91

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 8)
SUMMATION FORCE-X = -117.92
SUMMATION FORCE-Y = -61.03
SUMMATION FORCE-Z = 4.81

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 761.20 MY= -4496.67 MZ= 249.91

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 8)

	MAXIMUMS	AT NODE
X =	-2.97803E+00	1868
Y =	-5.57712E+00	1413
Z =	1.62681E+00	1392
RX=	-7.84324E-03	1601
RY=	-9.50301E-03	1198
RZ=	-1.91938E-02	676

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 9
LOADTYPE WIND TITLE WIND LOAD IN +Z DIR (CP = +0.55)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.164536671E+02
Y = 0.226891053E+02
Z = 0.601951623E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.156288448E+02
Y = 0.138543949E+02
Z = 0.574713283E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 9)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 100.34
SUMMATION FORCE-Z = -64.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -6934.15 MY= 1008.72 MZ= 1650.99

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 9)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -100.34
SUMMATION FORCE-Z = 64.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 6934.15 MY= -1008.72 MZ= -1650.99

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 9)

	MAXIMUMS	AT NODE
X =	1.65936E+01	1433
Y =	2.50743E+01	1413
Z =	-4.56412E+01	1259
RX=	3.51797E-02	1601
RY=	-3.39713E-02	1398
RZ=	6.66705E-02	289

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 10
LOADTYPE WIND TITLE WIND LOAD IN +Z DIR (CP = -0.55)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.164536671E+02
Y = 0.226891053E+02
Z = 0.602099229E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 10)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 28.67
SUMMATION FORCE-Z = -98.34

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2777.38 MY= 1618.15 MZ= 471.71

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 10)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -28.67
SUMMATION FORCE-Z = 98.34

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2777.38 MY= -1618.15 MZ= -471.71

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 10)

	MAXIMUMS	AT NODE
X =	2.73954E+00	1868
Y =	7.44341E+00	1413
Z =	-4.53658E+01	1259
RX=	1.11108E-02	1850
RY=	-1.55294E-02	1844
RZ=	1.91536E-02	289

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 11
LOADTYPE DEAD TITLE EQUIPMENT DEAD LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.287700785E+02
Y = 0.628652074E+01
Z = 0.535896149E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.199312623E+02
Y = 0.906854742E+01
Z = 0.486334468E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 11)
SUMMATION FORCE-X = 2.40
SUMMATION FORCE-Y = -188.70
SUMMATION FORCE-Z = 1.76

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 9202.85 MY= 77.98 MZ= -3773.06

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 11)
SUMMATION FORCE-X = -2.40
SUMMATION FORCE-Y = 188.70
SUMMATION FORCE-Z = -1.76

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -9202.85 MY= -77.98 MZ= 3773.06

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 11)

	MAXIMUMS	AT NODE
X =	-2.12198E+00	1433
Y =	-2.74827E+00	1530
Z =	-3.08562E+00	1540
RX=	8.97283E-03	1609
RY=	-1.27410E-02	1427
RZ=	5.37704E-03	1547

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 12
LOADTYPE DEAD TITLE EQUIPMENT LIVE LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.122329880E+02
Y = 0.955313772E+01
Z = 0.609284770E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.104114623E+02
Y = 0.100589350E+02
Z = 0.629353956E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.285872043E+02
Y = 0.495583873E+01
Z = 0.517699430E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 12)
SUMMATION FORCE-X = 5.80
SUMMATION FORCE-Y = -80.20
SUMMATION FORCE-Z = 9.30

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 5093.51 MY= 87.52 MZ= -890.41

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 12)
SUMMATION FORCE-X = -5.80
SUMMATION FORCE-Y = 80.20
SUMMATION FORCE-Z = -9.30

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -5093.51 MY= -87.52 MZ= 890.41

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 12)

	MAXIMUMS	AT NODE
X =	1.36528E+00	1565
Y =	-3.97800E-01	1286
Z =	1.43909E+00	1566
RX=	1.22929E-03	1389
RY=	6.47603E-03	1427
RZ=	-1.27750E-03	1327

********** END OF DATA FROM INTERNAL STORAGE **********

1826. LOAD LIST 1 TO 12
1827. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
6	1	-0.31	12.38	0.61	0.00	0.00	0.00
	2	0.00	-0.10	-0.01	0.00	0.00	0.00
	3	-0.22	4.63	0.49	0.00	0.00	0.00
	4	-0.01	-0.69	-0.12	0.00	0.00	0.00
	5	-0.01	-0.52	-0.05	0.00	0.00	0.00
	6	0.00	-0.69	-0.09	0.00	0.00	0.00
	7	2.21	6.74	5.47	0.00	0.00	0.00
	8	1.47	2.77	1.57	0.00	0.00	0.00
	9	-0.04	9.50	2.07	0.00	0.00	0.00
	10	0.00	8.18	1.64	0.00	0.00	0.00
	11	-0.09	1.57	0.06	0.00	0.00	0.00
	12	0.01	0.03	0.02	0.00	0.00	0.00
8	1	0.21	14.20	0.05	0.00	0.00	0.00
	2	0.00	4.32	0.00	0.00	0.00	0.00
	3	0.11	3.26	0.06	0.00	0.00	0.00
	4	-0.01	-0.14	-0.01	0.00	0.00	0.00
	5	0.00	-0.25	-0.01	0.00	0.00	0.00
	6	0.01	-0.28	-0.01	0.00	0.00	0.00
	7	0.73	-16.28	1.32	0.00	0.00	0.00
	8	2.23	-2.66	0.08	0.00	0.00	0.00
	9	-0.03	1.16	0.21	0.00	0.00	0.00
	10	-0.02	1.49	0.11	0.00	0.00	0.00
	11	0.29	13.70	-0.42	0.00	0.00	0.00
	12	0.01	0.13	-0.02	0.00	0.00	0.00
19	1	0.21	11.32	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.24	6.29	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-2.11	-21.02	-0.04	0.00	0.00	0.00
	8	-6.20	-5.51	-0.03	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.06	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
607	1	0.24	12.35	-0.26	0.00	0.00	0.00
	2	0.00	0.10	-0.01	0.00	0.00	0.00
	3	0.23	4.74	0.16	0.00	0.00	0.00
	4	0.00	0.70	-0.12	0.00	0.00	0.00
	5	0.00	0.52	-0.05	0.00	0.00	0.00
	6	0.00	0.68	-0.09	0.00	0.00	0.00
	7	-2.06	-38.94	6.50	0.00	0.00	0.00
	8	-6.20	-12.09	1.97	0.00	0.00	0.00
	9	0.01	-9.47	2.10	0.00	0.00	0.00
	10	0.01	-8.17	1.65	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.10	1.76	-0.07	0.00	0.00	0.00
	12	0.00	-0.03	0.02	0.00	0.00	0.00
609	1	-0.29	15.63	0.01	0.00	0.00	0.00
	2	-0.01	2.68	0.00	0.00	0.00	0.00
	3	-0.28	6.16	0.01	0.00	0.00	0.00
	4	0.00	0.14	0.00	0.00	0.00	0.00
	5	0.01	0.26	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	-2.91	-13.93	0.10	0.00	0.00	0.00
	8	0.46	-3.08	0.00	0.00	0.00	0.00
	9	-0.03	-1.78	0.04	0.00	0.00	0.00
	10	-0.04	-1.87	0.02	0.00	0.00	0.00
	11	-0.70	2.82	-0.08	0.00	0.00	0.00
	12	-0.10	0.11	0.00	0.00	0.00	0.00
729	1	0.02	2.46	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.01	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-0.18	0.00	6.16	0.00	0.00	0.00
	8	-0.22	0.00	0.75	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
730	1	-0.01	4.56	-0.04	0.00	0.00	0.00
	2	0.00	4.76	0.00	0.00	0.00	0.00
	3	-0.01	0.00	-0.03	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-0.15	0.00	5.31	0.00	0.00	0.00
	8	-0.14	0.00	0.56	0.00	0.00	0.00
	9	0.00	0.00	-0.24	0.00	0.00	0.00
	10	0.00	0.00	-0.25	0.00	0.00	0.00
	11	-0.01	2.06	-5.18	0.00	0.00	0.00
	12	0.00	0.04	-0.11	0.00	0.00	0.00
737	1	0.08	3.49	0.00	0.00	0.00	0.00
	2	0.01	0.03	0.00	0.00	0.00	0.00
	3	0.08	0.43	0.00	0.00	0.00	0.00
	4	0.02	0.06	0.00	0.00	0.00	0.00
	5	0.02	0.06	0.00	0.00	0.00	0.00
	6	-0.01	-0.03	0.00	0.00	0.00	0.00
	7	-8.87	-20.23	6.17	0.00	0.00	0.00
	8	-9.15	-22.37	0.75	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.17	0.37	0.00	0.00	0.00	0.00
	10	0.06	0.11	0.00	0.00	0.00	0.00
	11	0.07	0.07	0.00	0.00	0.00	0.00
	12	-0.07	-0.14	0.00	0.00	0.00	0.00
739	1	0.22	2.69	0.00	0.00	0.00	0.00
	2	0.01	-0.03	0.00	0.00	0.00	0.00
	3	0.26	-0.43	0.00	0.00	0.00	0.00
	4	0.03	-0.06	0.00	0.00	0.00	0.00
	5	0.03	-0.06	0.00	0.00	0.00	0.00
	6	-0.01	0.03	0.00	0.00	0.00	0.00
	7	-8.94	20.23	6.16	0.00	0.00	0.00
	8	-10.09	22.37	0.75	0.00	0.00	0.00
	9	0.16	-0.37	0.00	0.00	0.00	0.00
	10	0.04	-0.11	0.00	0.00	0.00	0.00
	11	0.12	-0.07	0.00	0.00	0.00	0.00
	12	-0.06	0.14	0.00	0.00	0.00	0.00
1841	1	-0.05	0.91	0.02	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.01	0.00	0.00	0.00
	4	0.00	-0.01	0.00	0.00	0.00	0.00
	5	0.00	-0.02	0.00	0.00	0.00	0.00
	6	0.00	-0.02	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.13	0.00	0.00	0.00
	8	0.35	-0.37	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.01	0.00	0.00	0.00
	10	0.00	0.37	-0.02	0.00	0.00	0.00
	11	0.00	-0.75	-0.08	0.00	0.00	0.00
	12	0.00	-0.03	0.00	0.00	0.00	0.00
1844	1	0.05	0.77	0.00	0.00	0.00	0.00
	2	0.00	1.52	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.13	0.00	0.00	0.00
	8	0.35	0.34	0.01	0.00	0.00	0.00
	9	0.01	0.01	-0.05	0.00	0.00	0.00
	10	0.01	0.01	-0.05	0.00	0.00	0.00
	11	0.00	0.00	-0.17	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
659	1	0.59	9.80	0.00	0.00	0.00	0.00
	2	0.01	0.00	0.00	0.00	0.00	0.00
	3	0.67	6.35	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.01	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.01	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	-3.30	-21.12	0.13	0.00	0.00	0.00
	8	-4.58	-5.77	0.08	0.00	0.00	0.00
	9	0.05	0.01	0.01	0.00	0.00	0.00
	10	0.00	0.01	-0.02	0.00	0.00	0.00
	11	0.11	0.58	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
660	1	0.64	11.21	0.46	0.00	0.00	0.00
	2	0.01	-0.07	0.12	0.00	0.00	0.00
	3	0.57	6.00	0.00	0.00	0.00	0.00
	4	0.02	-0.93	-0.15	0.00	0.00	0.00
	5	0.03	-1.08	-0.36	0.00	0.00	0.00
	6	0.01	-1.18	-0.36	0.00	0.00	0.00
	7	-2.98	1.49	6.65	0.00	0.00	0.00
	8	-4.45	6.84	4.13	0.00	0.00	0.00
	9	0.05	16.77	6.48	0.00	0.00	0.00
	10	-0.03	18.30	7.82	0.00	0.00	0.00
	11	0.04	-1.31	-0.46	0.00	0.00	0.00
	12	0.00	0.21	0.17	0.00	0.00	0.00
661	1	0.59	9.73	0.00	0.00	0.00	0.00
	2	0.01	0.00	0.00	0.00	0.00	0.00
	3	0.69	6.35	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.01	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.01	0.00	0.00	0.00
	7	-3.69	-21.25	0.14	0.00	0.00	0.00
	8	-4.90	-5.91	0.10	0.00	0.00	0.00
	9	0.03	0.01	0.01	0.00	0.00	0.00
	10	0.00	0.01	-0.02	0.00	0.00	0.00
	11	0.15	0.59	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
662	1	0.60	9.74	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.71	6.36	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-4.28	-21.47	0.11	0.00	0.00	0.00
	8	-5.53	-6.17	0.07	0.00	0.00	0.00
	9	0.01	0.00	0.01	0.00	0.00	0.00
	10	0.01	0.00	-0.01	0.00	0.00	0.00
	11	0.16	0.59	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
663	1	0.59	9.74	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.70	6.35	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.01	0.00	0.00	0.00
	7	-4.01	-21.37	0.13	0.00	0.00	0.00
	8	-5.23	-6.05	0.09	0.00	0.00	0.00
	9	0.01	0.00	0.01	0.00	0.00	0.00
	10	0.01	0.01	-0.02	0.00	0.00	0.00
	11	0.16	0.59	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
676	1	0.01	7.43	-0.81	0.00	0.00	0.00
	2	0.00	2.21	-0.06	0.00	0.00	0.00
	3	0.01	1.00	-0.46	0.00	0.00	0.00
	4	0.00	4.31	-0.41	0.00	0.00	0.00
	5	-0.01	0.87	-0.19	0.00	0.00	0.00
	6	-0.01	0.88	-0.23	0.00	0.00	0.00
	7	-0.56	-23.88	13.75	0.00	0.00	0.00
	8	-2.78	-12.21	6.74	0.00	0.00	0.00
	9	1.07	-17.33	7.54	0.00	0.00	0.00
	10	0.15	-17.72	6.27	0.00	0.00	0.00
	11	0.00	1.27	-0.72	0.00	0.00	0.00
	12	0.00	-0.26	0.13	0.00	0.00	0.00
679	1	-0.58	9.79	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.66	6.34	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.01	0.00	0.00	0.00
	6	-0.01	0.00	0.01	0.00	0.00	0.00
	7	-0.64	-20.64	0.00	0.00	0.00	0.00
	8	0.52	-5.27	-0.06	0.00	0.00	0.00
	9	-0.03	-0.01	0.01	0.00	0.00	0.00
	10	0.06	-0.01	-0.03	0.00	0.00	0.00
	11	-0.28	4.42	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
680	1	-0.62	13.34	1.24	0.00	0.00	0.00
	2	0.00	0.51	0.29	0.00	0.00	0.00
	3	-0.56	7.67	0.61	0.00	0.00	0.00
	4	0.00	-0.57	-0.15	0.00	0.00	0.00
	5	-0.01	-1.08	-0.29	0.00	0.00	0.00
	6	-0.02	-0.99	-0.25	0.00	0.00	0.00
	7	-0.83	-5.04	5.25	0.00	0.00	0.00
	8	0.59	-9.90	-1.72	0.00	0.00	0.00
	9	-0.03	15.25	5.85	0.00	0.00	0.00
	10	0.10	12.15	4.80	0.00	0.00	0.00
	11	0.00	-6.31	-2.22	0.00	0.00	0.00
	12	-0.01	-1.08	-0.45	0.00	0.00	0.00
681	1	-0.56	9.72	0.01	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	-0.67	6.34	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	-0.01	0.00	0.01	0.00	0.00	0.00
	7	-0.78	-20.51	-0.01	0.00	0.00	0.00
	8	0.25	-5.13	-0.07	0.00	0.00	0.00
	9	0.00	-0.01	0.01	0.00	0.00	0.00
	10	0.04	-0.01	-0.02	0.00	0.00	0.00
	11	-0.30	4.41	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
682	1	-0.54	9.71	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.65	6.33	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-1.16	-20.29	0.03	0.00	0.00	0.00
	8	-0.24	-4.87	-0.04	0.00	0.00	0.00
	9	0.01	0.00	0.01	0.00	0.00	0.00
	10	0.01	0.00	-0.01	0.00	0.00	0.00
	11	-0.30	4.41	-0.03	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
683	1	-0.55	9.72	0.01	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.66	6.34	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.01	0.00	0.00	0.00
	7	-0.99	-20.39	0.00	0.00	0.00	0.00
	8	-0.03	-4.99	-0.06	0.00	0.00	0.00
	9	0.01	0.00	0.01	0.00	0.00	0.00
	10	0.02	-0.01	-0.02	0.00	0.00	0.00
	11	-0.30	4.41	-0.02	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
684	1	-0.57	10.16	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.65	6.40	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-1.24	-20.74	0.07	0.00	0.00	0.00
	8	-0.30	-5.53	-0.01	0.00	0.00	0.00
	9	0.02	0.00	0.02	0.00	0.00	0.00
	10	0.01	0.00	0.00	0.00	0.00	0.00
	11	-0.35	5.43	-0.04	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
696	1	0.00	7.28	-0.28	0.00	0.00	0.00
	2	0.00	1.25	0.11	0.00	0.00	0.00
	3	0.00	0.54	0.10	0.00	0.00	0.00
	4	0.00	0.41	-0.13	0.00	0.00	0.00
	5	0.00	0.78	-0.23	0.00	0.00	0.00
	6	0.01	0.72	-0.16	0.00	0.00	0.00
	7	-1.62	-20.81	8.98	0.00	0.00	0.00
	8	0.47	5.48	-2.73	0.00	0.00	0.00
	9	-1.04	-19.76	7.40	0.00	0.00	0.00
	10	-0.14	-12.65	4.45	0.00	0.00	0.00
	11	0.00	6.25	-2.87	0.00	0.00	0.00
	12	0.00	1.06	-0.50	0.00	0.00	0.00
1196	1	0.00	13.16	-0.01	-0.02	0.00	0.00
	2	0.00	9.29	0.00	-0.01	0.00	0.00
	3	0.00	0.41	0.00	-0.01	0.00	0.00
	4	0.00	0.01	-0.01	-0.05	0.00	0.00
	5	0.00	0.03	0.00	-0.02	0.00	0.00
	6	0.00	0.02	0.00	-0.02	0.00	0.00
	7	-0.13	-1.14	-1.09	-1.20	0.00	0.00
	8	-0.72	0.49	-0.05	0.25	0.00	0.00
	9	0.66	-1.83	0.29	0.50	0.00	0.00
	10	0.08	-0.79	1.36	2.13	0.00	0.00
	11	0.00	0.81	-0.02	-0.10	0.00	0.00
	12	0.00	0.75	0.01	0.08	0.00	0.00
1245	1	0.01	26.75	-0.39	-0.73	0.00	0.00
	2	0.01	19.18	-0.33	-0.54	0.00	0.00
	3	0.00	2.51	-0.05	-0.30	0.00	0.00
	4	0.00	0.02	-0.02	-0.11	0.00	0.00
	5	0.00	0.03	-0.02	-0.11	0.00	0.00
	6	0.00	0.03	-0.02	-0.10	0.00	0.00
	7	-0.02	-6.55	-5.80	-14.63	0.00	0.00
	8	-0.04	2.04	-0.85	-2.43	0.00	0.00
	9	0.01	-9.00	1.79	5.89	0.00	0.00
	10	-0.01	-3.64	6.94	19.00	0.00	0.00
	11	0.01	15.23	-0.07	0.69	0.00	0.00
	12	0.01	15.75	-0.55	-1.19	0.00	0.00
1295	1	1.97	28.60	-0.44	-1.01	0.00	0.00
	2	1.46	20.46	-0.34	-0.61	0.00	0.00
	3	0.27	3.21	-0.15	-0.73	0.00	0.00
	4	-0.04	-0.26	-0.03	-0.14	0.00	0.00
	5	-0.12	-0.66	-0.04	-0.20	0.00	0.00
	6	0.10	0.33	-0.04	-0.20	0.00	0.00
	7	-8.19	-29.46	-7.73	-23.21	0.00	0.00
	8	-13.86	-29.42	-1.61	-5.68	0.00	0.00
	9	3.85	-5.30	2.80	10.50	0.00	0.00
	10	-2.09	-9.25	9.24	29.52	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.25	15.51	0.23	2.18	0.00	0.00
	12	-1.97	11.68	-0.89	-2.46	0.00	0.00
1331	1	0.00	22.24	-0.44	-1.34	0.00	0.00
	2	0.00	15.53	-0.30	-0.65	0.00	0.00
	3	0.00	2.07	-0.24	-1.19	0.00	0.00
	4	0.00	0.08	-0.03	-0.18	0.00	0.00
	5	0.00	0.17	-0.06	-0.32	0.00	0.00
	6	0.00	0.16	-0.06	-0.32	0.00	0.00
	7	0.03	-1.29	-9.42	-31.47	0.00	0.00
	8	0.05	1.46	-2.29	-9.03	0.00	0.00
	9	-0.02	-7.55	3.76	15.35	0.00	0.00
	10	0.00	-7.42	11.32	39.88	0.00	0.00
	11	0.00	5.55	0.86	4.31	0.00	0.00
	12	0.01	3.29	-0.84	-3.19	0.00	0.00
1363	1	-1.15	31.13	-0.20	-1.18	0.00	0.00
	2	-0.76	23.85	0.04	-0.10	0.00	0.00
	3	-0.03	3.01	-0.31	-1.64	0.00	0.00
	4	-0.05	0.43	-0.04	-0.22	0.00	0.00
	5	-0.14	0.99	-0.08	-0.44	0.00	0.00
	6	0.07	-0.01	-0.08	-0.44	0.00	0.00
	7	-8.01	15.62	-10.14	-37.35	0.00	0.00
	8	-14.07	36.43	-2.68	-11.84	0.00	0.00
	9	4.93	-20.36	4.31	19.33	0.00	0.00
	10	-1.02	-3.57	12.28	47.48	0.00	0.00
	11	-0.54	7.19	0.76	4.93	0.00	0.00
	12	-2.44	7.08	-0.83	-4.04	0.00	0.00
1397	1	0.00	26.94	-1.28	-2.60	0.00	0.00
	2	0.00	23.18	-1.32	-1.63	0.00	0.00
	3	0.00	2.87	-0.42	-2.05	0.00	0.00
	4	0.00	0.08	-0.05	-0.26	0.00	0.00
	5	0.00	0.16	-0.11	-0.54	0.00	0.00
	6	0.00	0.16	-0.11	-0.54	0.00	0.00
	7	-0.03	-6.91	-11.78	-44.33	0.00	0.00
	8	-0.03	3.47	-3.83	-15.61	0.00	0.00
	9	-0.01	-14.10	6.46	25.04	0.00	0.00
	10	0.00	-7.42	15.08	56.93	0.00	0.00
	11	0.01	5.69	4.53	16.75	0.00	0.00
	12	0.00	-0.07	-4.00	-12.52	0.00	0.00
1424	1	0.00	6.53	0.00	0.01	0.00	0.00
	2	0.00	5.28	0.01	0.02	0.00	0.00
	3	0.00	0.36	0.00	0.01	0.00	0.00
	4	0.00	0.00	0.00	-0.01	0.00	0.00
	5	0.00	0.01	0.00	-0.01	0.00	0.00
	6	0.00	0.01	0.00	-0.01	0.00	0.00
	7	-0.46	-1.38	-1.01	-0.98	0.00	0.00
	8	0.13	0.26	-0.14	-0.22	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	-0.66	-1.34	0.27	0.60	0.00	0.00
	10	-0.08	-0.27	1.19	1.60	0.00	0.00
	11	0.00	0.98	0.13	0.36	0.00	0.00
	12	0.00	0.00	-0.11	-0.32	0.00	0.00
1194	1	0.02	13.24	0.29	0.00	0.00	0.00
	2	0.03	7.65	0.15	0.00	0.00	0.00
	3	-0.02	0.45	-0.01	0.00	0.00	0.00
	4	-0.01	0.09	-0.20	0.00	0.00	0.00
	5	-0.01	-0.86	-0.10	0.00	0.00	0.00
	6	-0.01	-0.70	-0.08	0.00	0.00	0.00
	7	-1.48	-1.39	-0.57	0.00	0.00	0.00
	8	-4.38	5.59	1.82	0.00	0.00	0.00
	9	3.73	8.75	1.26	0.00	0.00	0.00
	10	0.90	19.22	4.50	0.00	0.00	0.00
	11	0.06	0.04	-0.41	0.00	0.00	0.00
	12	-0.10	1.39	0.49	0.00	0.00	0.00
1195	1	0.02	19.25	-0.04	0.00	0.00	0.00
	2	0.02	13.25	0.11	0.00	0.00	0.00
	3	0.00	1.25	-0.02	0.00	0.00	0.00
	4	0.00	1.44	-0.20	0.00	0.00	0.00
	5	0.00	0.87	-0.10	0.00	0.00	0.00
	6	0.00	0.70	-0.08	0.00	0.00	0.00
	7	-1.04	-3.70	-0.56	0.00	0.00	0.00
	8	-4.30	-4.76	1.82	0.00	0.00	0.00
	9	3.81	-13.95	1.27	0.00	0.00	0.00
	10	0.60	-20.60	4.50	0.00	0.00	0.00
	11	0.03	3.10	-0.41	0.00	0.00	0.00
	12	-0.04	1.20	0.48	0.00	0.00	0.00
1268	1	0.04	20.56	0.27	0.00	0.00	0.00
	2	0.04	17.61	0.23	0.00	0.00	0.00
	3	0.00	-0.06	0.03	0.00	0.00	0.00
	4	0.00	-0.02	0.01	0.00	0.00	0.00
	5	0.00	-0.03	0.01	0.00	0.00	0.00
	6	0.00	-0.03	0.01	0.00	0.00	0.00
	7	-0.29	-0.66	-0.34	0.00	0.00	0.00
	8	0.06	-0.20	0.03	0.00	0.00	0.00
	9	-0.40	0.65	-0.14	0.00	0.00	0.00
	10	-0.06	1.25	0.18	0.00	0.00	0.00
	11	-0.01	15.41	0.28	0.00	0.00	0.00
	12	0.00	15.50	0.33	0.00	0.00	0.00
1279	1	0.04	18.46	0.26	0.00	0.00	0.00
	2	0.04	15.56	0.22	0.00	0.00	0.00
	3	0.00	-0.12	0.03	0.00	0.00	0.00
	4	0.00	-0.03	0.01	0.00	0.00	0.00
	5	0.00	-0.04	0.01	0.00	0.00	0.00
	6	0.00	-0.04	0.01	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	-0.29	-1.45	-0.35	0.00	0.00	0.00
	8	0.06	-0.55	0.01	0.00	0.00	0.00
	9	-0.41	1.16	-0.08	0.00	0.00	0.00
	10	-0.06	2.27	0.24	0.00	0.00	0.00
	11	-0.01	15.88	0.34	0.00	0.00	0.00
	12	0.00	15.55	0.34	0.00	0.00	0.00
1318	1	0.04	18.33	0.20	0.00	0.00	0.00
	2	0.04	15.65	0.18	0.00	0.00	0.00
	3	0.00	-0.17	0.02	0.00	0.00	0.00
	4	0.00	-0.03	0.00	0.00	0.00	0.00
	5	0.00	-0.05	0.01	0.00	0.00	0.00
	6	0.00	-0.05	0.01	0.00	0.00	0.00
	7	-0.29	-1.98	-0.46	0.00	0.00	0.00
	8	0.06	-0.80	-0.05	0.00	0.00	0.00
	9	-0.41	1.60	0.03	0.00	0.00	0.00
	10	-0.06	3.06	0.41	0.00	0.00	0.00
	11	-0.02	6.16	0.20	0.00	0.00	0.00
	12	0.00	1.97	0.08	0.00	0.00	0.00
1355	1	0.04	21.95	-0.07	0.00	0.00	0.00
	2	0.04	25.57	-0.09	0.00	0.00	0.00
	3	0.00	-0.60	0.00	0.00	0.00	0.00
	4	0.00	-0.11	0.00	0.00	0.00	0.00
	5	0.00	-0.22	0.00	0.00	0.00	0.00
	6	0.00	-0.22	0.00	0.00	0.00	0.00
	7	-0.29	-2.87	-0.42	0.00	0.00	0.00
	8	0.07	-1.55	-0.09	0.00	0.00	0.00
	9	-0.42	4.41	0.13	0.00	0.00	0.00
	10	-0.06	6.63	0.46	0.00	0.00	0.00
	11	-0.02	7.35	0.30	0.00	0.00	0.00
	12	0.00	3.06	-0.07	0.00	0.00	0.00
1389	1	0.04	28.07	0.53	0.00	0.00	0.00
	2	0.04	31.84	0.82	0.00	0.00	0.00
	3	0.00	-0.33	0.00	0.00	0.00	0.00
	4	0.00	-0.07	0.00	0.00	0.00	0.00
	5	0.00	-0.14	0.00	0.00	0.00	0.00
	6	0.00	-0.14	0.00	0.00	0.00	0.00
	7	-0.30	-5.30	-0.75	0.00	0.00	0.00
	8	0.07	0.47	-0.11	0.00	0.00	0.00
	9	-0.43	-4.23	0.04	0.00	0.00	0.00
	10	-0.06	2.06	0.68	0.00	0.00	0.00
	11	-0.02	16.64	1.50	0.00	0.00	0.00
	12	0.00	1.09	-0.67	0.00	0.00	0.00
1422	1	-0.59	13.34	1.28	0.00	0.00	0.00
	2	-0.52	9.97	1.94	0.00	0.00	0.00
	3	-0.01	0.96	0.05	0.00	0.00	0.00
	4	0.00	-0.23	-0.04	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	-0.45	-0.07	0.00	0.00	0.00
	6	0.00	-0.48	-0.07	0.00	0.00	0.00
	7	-4.68	-0.15	-0.41	0.00	0.00	0.00
	8	0.95	-3.35	-0.55	0.00	0.00	0.00
	9	-6.22	14.02	2.01	0.00	0.00	0.00
	10	-0.55	15.60	3.07	0.00	0.00	0.00
	11	-1.68	8.90	2.18	0.00	0.00	0.00
	12	-0.41	-1.24	-1.11	0.00	0.00	0.00
1423	1	-0.67	13.68	-1.17	0.00	0.00	0.00
	2	-0.77	11.52	-1.79	0.00	0.00	0.00
	3	-0.01	0.81	0.04	0.00	0.00	0.00
	4	0.00	0.23	-0.04	0.00	0.00	0.00
	5	0.00	0.46	-0.07	0.00	0.00	0.00
	6	0.00	0.48	-0.07	0.00	0.00	0.00
	7	-6.26	2.32	-0.42	0.00	0.00	0.00
	8	1.61	3.18	-0.55	0.00	0.00	0.00
	9	-8.83	-10.44	2.00	0.00	0.00	0.00
	10	-0.94	-16.60	3.08	0.00	0.00	0.00
	11	-0.81	6.47	0.22	0.00	0.00	0.00
	12	-0.19	2.16	-1.22	0.00	0.00	0.00
1247	1	0.00	5.79	0.05	0.00	0.00	0.00
	2	0.00	1.29	0.02	0.00	0.00	0.00
	3	0.00	2.45	0.03	0.00	0.00	0.00
	4	0.00	0.01	0.06	0.00	0.00	0.00
	5	0.00	0.02	0.09	0.00	0.00	0.00
	6	0.00	0.01	0.07	0.00	0.00	0.00
	7	-0.03	-7.17	2.43	0.00	0.00	0.00
	8	-0.02	1.87	0.19	0.00	0.00	0.00
	9	0.00	-8.38	1.63	0.00	0.00	0.00
	10	0.01	-2.42	-0.70	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.01	0.00	0.00	0.00
1297	1	0.87	8.22	0.06	0.00	0.00	0.00
	2	0.32	3.63	0.00	0.00	0.00	0.00
	3	0.26	2.70	0.03	0.00	0.00	0.00
	4	0.06	4.94	0.01	0.00	0.00	0.00
	5	0.20	10.06	0.01	0.00	0.00	0.00
	6	0.07	4.68	0.04	0.00	0.00	0.00
	7	-17.38	-35.78	2.39	0.00	0.00	0.00
	8	-15.24	-21.24	0.17	0.00	0.00	0.00
	9	-0.66	-12.11	1.67	0.00	0.00	0.00
	10	1.40	-0.37	-0.65	0.00	0.00	0.00
	11	0.74	1.15	0.00	0.00	0.00	0.00
	12	-0.19	-0.39	0.01	0.00	0.00	0.00
1333	1	0.00	5.16	-0.01	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.93	-0.01	0.00	0.00	0.00
	4	0.00	0.38	-0.01	0.00	0.00	0.00
	5	0.00	0.75	-0.01	0.00	0.00	0.00
	6	0.00	0.76	-0.03	0.00	0.00	0.00
	7	-0.01	-8.51	-0.06	0.00	0.00	0.00
	8	-0.01	-0.80	0.34	0.00	0.00	0.00
	9	0.00	-5.29	1.91	0.00	0.00	0.00
	10	0.00	-0.91	-0.51	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
1365	1	-0.63	9.06	0.07	0.00	0.00	0.00
	2	-0.05	3.03	0.01	0.00	0.00	0.00
	3	-0.37	3.90	0.03	0.00	0.00	0.00
	4	-0.07	-0.20	0.04	0.00	0.00	0.00
	5	-0.04	-0.55	0.07	0.00	0.00	0.00
	6	-0.18	4.91	0.05	0.00	0.00	0.00
	7	-14.58	17.76	2.51	0.00	0.00	0.00
	8	-14.98	28.38	0.33	0.00	0.00	0.00
	9	1.07	-12.34	1.63	0.00	0.00	0.00
	10	1.69	-7.32	-0.65	0.00	0.00	0.00
	11	0.66	-1.36	-0.04	0.00	0.00	0.00
	12	-0.19	0.44	0.01	0.00	0.00	0.00
1707	1	0.00	2.08	0.00	0.00	0.00	0.00
	2	0.00	2.48	0.00	0.00	0.00	0.00
	3	0.00	-0.26	0.00	0.00	0.00	0.00
	4	0.00	0.01	0.00	0.00	0.00	0.00
	5	0.00	0.01	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	-1.64	0.00	0.00	0.00	0.00
	8	0.00	-1.86	0.00	0.00	0.00	0.00
	9	0.00	0.01	0.00	0.00	0.00	0.00
	10	0.00	-0.01	0.00	0.00	0.00	0.00
	11	0.00	6.19	0.00	0.00	0.00	0.00
	12	0.00	0.34	0.00	0.00	0.00	0.00
1867	1	0.00	0.40	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.05	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1563	1	0.00	2.83	0.00	0.00	0.00	0.00
	2	0.00	2.67	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.14	0.00	0.00	0.00	0.00
1569	1	0.00	10.63	0.00	0.00	0.00	0.00
	2	0.00	5.66	0.00	0.00	0.00	0.00
	3	0.00	-0.08	0.00	0.00	0.00	0.00
	4	0.00	-0.01	0.00	0.00	0.00	0.00
	5	0.00	-0.02	0.00	0.00	0.00	0.00
	6	0.00	-0.02	0.00	0.00	0.00	0.00
	7	0.00	-1.71	0.00	0.00	0.00	0.00
	8	0.00	-0.45	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	1.73	0.00	0.00	0.00	0.00
	11	0.00	3.38	0.00	0.00	0.00	0.00
	12	0.00	0.43	0.00	0.00	0.00	0.00
1868	1	0.00	-1.27	0.00	0.00	0.00	0.00
	2	0.00	-0.45	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.00	0.00	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	-0.34	0.00	0.00	0.00	0.00
	12	0.00	-0.09	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

1828. LOAD LIST 101 TO 116
1829. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
6	101	-0.57	18.95	1.06	0.00	0.00	0.00
	102	0.95	29.53	5.97	0.00	0.00	0.00
	103	0.36	26.36	2.84	0.00	0.00	0.00
	104	2.97	29.77	9.81	0.00	0.00	0.00
	105	1.78	23.41	3.56	0.00	0.00	0.00
	106	3.26	21.92	9.31	0.00	0.00	0.00
	107	2.08	15.57	3.06	0.00	0.00	0.00
	108	-0.58	18.26	0.94	0.00	0.00	0.00
	109	-0.58	18.43	1.01	0.00	0.00	0.00
	110	-0.57	18.26	0.97	0.00	0.00	0.00
	111	-0.86	31.74	3.24	0.00	0.00	0.00
	112	-0.83	30.69	2.90	0.00	0.00	0.00
	113	-0.65	34.18	4.36	0.00	0.00	0.00
	114	-0.58	32.08	3.68	0.00	0.00	0.00
	115	-0.35	26.34	3.86	0.00	0.00	0.00
	116	-0.28	24.24	3.18	0.00	0.00	0.00
8	101	0.68	42.23	-0.44	0.00	0.00	0.00
	102	1.37	25.66	0.71	0.00	0.00	0.00
	103	2.56	36.56	-0.28	0.00	0.00	0.00
	104	1.84	13.51	1.69	0.00	0.00	0.00
	105	4.24	35.30	-0.31	0.00	0.00	0.00
	106	1.36	-13.27	2.16	0.00	0.00	0.00
	107	3.76	8.52	0.17	0.00	0.00	0.00
	108	0.67	42.09	-0.45	0.00	0.00	0.00
	109	0.67	41.98	-0.45	0.00	0.00	0.00
	110	0.68	41.95	-0.45	0.00	0.00	0.00
	111	0.76	39.62	-0.17	0.00	0.00	0.00
	112	0.77	39.88	-0.26	0.00	0.00	0.00
	113	0.63	41.42	-0.09	0.00	0.00	0.00
	114	0.64	41.95	-0.26	0.00	0.00	0.00
	115	0.14	14.64	0.38	0.00	0.00	0.00
	116	0.16	15.17	0.21	0.00	0.00	0.00
19	101	0.44	17.48	0.00	0.00	0.00	0.00
	102	-0.99	7.59	-0.03	0.00	0.00	0.00
	103	-4.26	20.00	-0.02	0.00	0.00	0.00
	104	-2.94	-16.16	-0.06	0.00	0.00	0.00
	105	-9.49	8.67	-0.04	0.00	0.00	0.00
	106	-3.19	-23.45	-0.06	0.00	0.00	0.00
	107	-9.74	1.38	-0.04	0.00	0.00	0.00
	108	0.44	17.48	0.00	0.00	0.00	0.00
	109	0.44	17.48	0.00	0.00	0.00	0.00
	110	0.44	17.48	0.00	0.00	0.00	0.00
	111	0.71	24.41	0.00	0.00	0.00	0.00
	112	0.71	24.41	0.01	0.00	0.00	0.00
	113	0.44	17.49	-0.01	0.00	0.00	0.00
	114	0.44	17.49	0.01	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	115	0.19	10.20	-0.01	0.00	0.00	0.00
	116	0.19	10.20	0.00	0.00	0.00	0.00
607	101	0.52	19.41	-0.31	0.00	0.00	0.00
	102	-0.88	-6.64	5.06	0.00	0.00	0.00
	103	-4.19	14.84	1.43	0.00	0.00	0.00
	104	-2.78	-42.94	10.10	0.00	0.00	0.00
	105	-9.40	0.03	2.84	0.00	0.00	0.00
	106	-3.08	-51.19	10.17	0.00	0.00	0.00
	107	-9.71	-8.23	2.92	0.00	0.00	0.00
	108	0.52	20.10	-0.42	0.00	0.00	0.00
	109	0.51	19.93	-0.35	0.00	0.00	0.00
	110	0.51	20.09	-0.39	0.00	0.00	0.00
	111	0.78	16.94	1.53	0.00	0.00	0.00
	112	0.78	17.97	1.18	0.00	0.00	0.00
	113	0.53	4.21	3.04	0.00	0.00	0.00
	114	0.54	6.29	2.34	0.00	0.00	0.00
	115	0.23	-4.04	3.12	0.00	0.00	0.00
	116	0.23	-1.96	2.41	0.00	0.00	0.00
609	101	-1.50	29.70	-0.09	0.00	0.00	0.00
	102	-3.96	20.86	0.01	0.00	0.00	0.00
	103	-1.26	29.54	-0.07	0.00	0.00	0.00
	104	-6.10	5.73	0.08	0.00	0.00	0.00
	105	-0.71	23.10	-0.08	0.00	0.00	0.00
	106	-4.92	-8.22	0.17	0.00	0.00	0.00
	107	0.47	9.14	0.01	0.00	0.00	0.00
	108	-1.50	29.84	-0.09	0.00	0.00	0.00
	109	-1.50	29.96	-0.09	0.00	0.00	0.00
	110	-1.50	30.00	-0.09	0.00	0.00	0.00
	111	-1.66	30.59	-0.04	0.00	0.00	0.00
	112	-1.66	30.51	-0.05	0.00	0.00	0.00
	113	-1.49	25.18	-0.03	0.00	0.00	0.00
	114	-1.49	25.03	-0.05	0.00	0.00	0.00
	115	-0.32	11.23	0.06	0.00	0.00	0.00
	116	-0.32	11.08	0.04	0.00	0.00	0.00
729	101	0.03	2.95	0.00	0.00	0.00	0.00
	102	-0.10	2.95	4.93	0.00	0.00	0.00
	103	-0.12	2.95	0.60	0.00	0.00	0.00
	104	-0.26	2.95	9.86	0.00	0.00	0.00
	105	-0.31	2.95	1.21	0.00	0.00	0.00
	106	-0.28	2.21	9.86	0.00	0.00	0.00
	107	-0.33	2.21	1.21	0.00	0.00	0.00
	108	0.03	2.95	0.00	0.00	0.00	0.00
	109	0.03	2.95	0.00	0.00	0.00	0.00
	110	0.03	2.95	0.00	0.00	0.00	0.00
	111	0.05	2.95	0.00	0.00	0.00	0.00
	112	0.05	2.95	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	113	0.04	2.95	0.00	0.00	0.00	0.00
	114	0.04	2.95	0.00	0.00	0.00	0.00
	115	0.02	2.21	0.00	0.00	0.00	0.00
	116	0.02	2.21	0.00	0.00	0.00	0.00
730	101	-0.03	15.62	-6.46	0.00	0.00	0.00
	102	-0.15	7.94	-2.07	0.00	0.00	0.00
	103	-0.14	7.94	-5.87	0.00	0.00	0.00
	104	-0.27	12.74	2.11	0.00	0.00	0.00
	105	-0.24	12.74	-5.49	0.00	0.00	0.00
	106	-0.25	4.10	8.47	0.00	0.00	0.00
	107	-0.23	4.10	0.87	0.00	0.00	0.00
	108	-0.03	15.62	-6.46	0.00	0.00	0.00
	109	-0.03	15.62	-6.46	0.00	0.00	0.00
	110	-0.03	15.62	-6.46	0.00	0.00	0.00
	111	-0.03	7.94	-6.50	0.00	0.00	0.00
	112	-0.03	7.94	-6.52	0.00	0.00	0.00
	113	-0.02	12.74	-6.77	0.00	0.00	0.00
	114	-0.02	12.74	-6.79	0.00	0.00	0.00
	115	-0.01	4.10	-0.41	0.00	0.00	0.00
	116	-0.01	4.10	-0.43	0.00	0.00	0.00
737	101	0.14	4.31	0.00	0.00	0.00	0.00
	102	-6.79	-11.23	4.93	0.00	0.00	0.00
	103	-7.02	-12.93	0.60	0.00	0.00	0.00
	104	-14.02	-28.00	9.86	0.00	0.00	0.00
	105	-14.47	-31.41	1.21	0.00	0.00	0.00
	106	-14.12	-29.23	9.86	0.00	0.00	0.00
	107	-14.57	-32.65	1.21	0.00	0.00	0.00
	108	0.16	4.37	0.00	0.00	0.00	0.00
	109	0.16	4.36	0.00	0.00	0.00	0.00
	110	0.12	4.28	0.00	0.00	0.00	0.00
	111	0.43	5.25	0.00	0.00	0.00	0.00
	112	0.35	5.05	0.00	0.00	0.00	0.00
	113	0.43	4.96	0.00	0.00	0.00	0.00
	114	0.27	4.55	0.00	0.00	0.00	0.00
	115	0.34	3.72	0.00	0.00	0.00	0.00
	116	0.17	3.31	0.00	0.00	0.00	0.00
739	101	0.46	3.10	0.00	0.00	0.00	0.00
	102	-6.34	18.64	4.93	0.00	0.00	0.00
	103	-7.26	20.34	0.60	0.00	0.00	0.00
	104	-13.82	35.41	9.86	0.00	0.00	0.00
	105	-15.66	38.82	1.21	0.00	0.00	0.00
	106	-14.11	34.79	9.86	0.00	0.00	0.00
	107	-15.95	38.21	1.21	0.00	0.00	0.00
	108	0.49	3.04	0.00	0.00	0.00	0.00
	109	0.49	3.05	0.00	0.00	0.00	0.00
	110	0.45	3.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	111	0.94	2.16	0.00	0.00	0.00	0.00
	112	0.85	2.36	0.00	0.00	0.00	0.00
	113	0.74	2.45	0.00	0.00	0.00	0.00
	114	0.55	2.86	0.00	0.00	0.00	0.00
	115	0.45	1.83	0.00	0.00	0.00	0.00
	116	0.26	2.25	0.00	0.00	0.00	0.00
1841	101	-0.06	0.91	-0.07	0.00	0.00	0.00
	102	-0.06	1.22	0.05	0.00	0.00	0.00
	103	0.22	0.08	-0.06	0.00	0.00	0.00
	104	-0.06	2.35	0.14	0.00	0.00	0.00
	105	0.50	0.07	-0.07	0.00	0.00	0.00
	106	-0.04	2.50	0.22	0.00	0.00	0.00
	107	0.52	0.23	0.02	0.00	0.00	0.00
	108	-0.06	0.90	-0.07	0.00	0.00	0.00
	109	-0.06	0.89	-0.08	0.00	0.00	0.00
	110	-0.06	0.89	-0.08	0.00	0.00	0.00
	111	-0.06	0.83	-0.05	0.00	0.00	0.00
	112	-0.06	0.67	-0.07	0.00	0.00	0.00
	113	-0.06	1.58	-0.06	0.00	0.00	0.00
	114	-0.06	1.25	-0.10	0.00	0.00	0.00
	115	-0.04	1.73	0.03	0.00	0.00	0.00
	116	-0.04	1.41	-0.01	0.00	0.00	0.00
1844	101	0.06	3.35	-0.22	0.00	0.00	0.00
	102	0.06	0.92	-0.10	0.00	0.00	0.00
	103	0.34	1.20	-0.20	0.00	0.00	0.00
	104	0.06	2.44	0.00	0.00	0.00	0.00
	105	0.63	2.99	-0.19	0.00	0.00	0.00
	106	0.04	0.69	0.21	0.00	0.00	0.00
	107	0.61	1.24	0.02	0.00	0.00	0.00
	108	0.06	3.35	-0.22	0.00	0.00	0.00
	109	0.06	3.35	-0.22	0.00	0.00	0.00
	110	0.06	3.35	-0.22	0.00	0.00	0.00
	111	0.07	0.93	-0.25	0.00	0.00	0.00
	112	0.07	0.93	-0.25	0.00	0.00	0.00
	113	0.08	2.45	-0.29	0.00	0.00	0.00
	114	0.08	2.45	-0.29	0.00	0.00	0.00
	115	0.06	0.70	-0.08	0.00	0.00	0.00
	116	0.06	0.70	-0.08	0.00	0.00	0.00
659	101	1.18	15.62	0.00	0.00	0.00	0.00
	102	-0.73	5.71	0.09	0.00	0.00	0.00
	103	-1.75	17.99	0.05	0.00	0.00	0.00
	104	-4.10	-18.17	0.20	0.00	0.00	0.00
	105	-6.15	6.39	0.12	0.00	0.00	0.00
	106	-4.75	-24.98	0.21	0.00	0.00	0.00
	107	-6.79	-0.42	0.13	0.00	0.00	0.00
	108	1.18	15.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	109	1.19	15.63	0.01	0.00	0.00	0.00
	110	1.18	15.62	0.00	0.00	0.00	0.00
	111	1.96	22.61	0.00	0.00	0.00	0.00
	112	1.92	22.62	-0.03	0.00	0.00	0.00
	113	1.26	15.63	0.01	0.00	0.00	0.00
	114	1.18	15.65	-0.04	0.00	0.00	0.00
	115	0.62	8.83	0.02	0.00	0.00	0.00
	116	0.54	8.84	-0.04	0.00	0.00	0.00
660	101	1.11	15.10	0.46	0.00	0.00	0.00
	102	-0.65	22.66	5.31	0.00	0.00	0.00
	103	-1.83	26.94	3.29	0.00	0.00	0.00
	104	-3.66	17.40	10.93	0.00	0.00	0.00
	105	-6.02	25.96	6.89	0.00	0.00	0.00
	106	-4.19	12.47	11.05	0.00	0.00	0.00
	107	-6.55	21.03	7.01	0.00	0.00	0.00
	108	1.13	14.16	0.31	0.00	0.00	0.00
	109	1.13	14.02	0.10	0.00	0.00	0.00
	110	1.12	13.91	0.10	0.00	0.00	0.00
	111	1.77	34.88	5.18	0.00	0.00	0.00
	112	1.71	36.11	6.25	0.00	0.00	0.00
	113	1.18	41.84	10.66	0.00	0.00	0.00
	114	1.06	44.29	12.80	0.00	0.00	0.00
	115	0.65	36.91	10.78	0.00	0.00	0.00
	116	0.53	39.36	12.93	0.00	0.00	0.00
661	101	1.23	15.55	0.00	0.00	0.00	0.00
	102	-0.96	5.55	0.11	0.00	0.00	0.00
	103	-1.93	17.81	0.07	0.00	0.00	0.00
	104	-4.68	-18.44	0.22	0.00	0.00	0.00
	105	-6.62	6.10	0.15	0.00	0.00	0.00
	106	-5.38	-25.23	0.23	0.00	0.00	0.00
	107	-7.31	-0.70	0.16	0.00	0.00	0.00
	108	1.23	15.56	0.00	0.00	0.00	0.00
	109	1.24	15.56	0.01	0.00	0.00	0.00
	110	1.23	15.55	0.00	0.00	0.00	0.00
	111	2.01	22.55	0.00	0.00	0.00	0.00
	112	1.99	22.55	-0.02	0.00	0.00	0.00
	113	1.27	15.56	0.01	0.00	0.00	0.00
	114	1.23	15.57	-0.04	0.00	0.00	0.00
	115	0.57	8.77	0.02	0.00	0.00	0.00
	116	0.54	8.78	-0.03	0.00	0.00	0.00
662	101	1.26	15.57	0.00	0.00	0.00	0.00
	102	-1.37	5.39	0.08	0.00	0.00	0.00
	103	-2.37	17.63	0.05	0.00	0.00	0.00
	104	-5.58	-18.78	0.18	0.00	0.00	0.00
	105	-7.58	5.69	0.11	0.00	0.00	0.00
	106	-6.31	-25.59	0.18	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	107	-8.31	-1.11	0.12	0.00	0.00	0.00
	108	1.27	15.57	0.00	0.00	0.00	0.00
	109	1.27	15.57	0.00	0.00	0.00	0.00
	110	1.26	15.57	0.00	0.00	0.00	0.00
	111	2.06	22.57	0.00	0.00	0.00	0.00
	112	2.06	22.57	-0.02	0.00	0.00	0.00
	113	1.28	15.58	0.01	0.00	0.00	0.00
	114	1.28	15.58	-0.02	0.00	0.00	0.00
	115	0.55	8.77	0.02	0.00	0.00	0.00
	116	0.56	8.77	-0.02	0.00	0.00	0.00
663	101	1.24	15.56	0.00	0.00	0.00	0.00
	102	-1.19	5.46	0.10	0.00	0.00	0.00
	103	-2.16	17.71	0.07	0.00	0.00	0.00
	104	-5.18	-18.63	0.21	0.00	0.00	0.00
	105	-7.11	5.88	0.14	0.00	0.00	0.00
	106	-5.89	-25.43	0.22	0.00	0.00	0.00
	107	-7.83	-0.92	0.15	0.00	0.00	0.00
	108	1.25	15.57	0.00	0.00	0.00	0.00
	109	1.26	15.57	0.01	0.00	0.00	0.00
	110	1.24	15.56	0.00	0.00	0.00	0.00
	111	2.03	22.56	0.00	0.00	0.00	0.00
	112	2.03	22.56	-0.02	0.00	0.00	0.00
	113	1.27	15.57	0.01	0.00	0.00	0.00
	114	1.26	15.58	-0.03	0.00	0.00	0.00
	115	0.55	8.77	0.02	0.00	0.00	0.00
	116	0.54	8.77	-0.03	0.00	0.00	0.00
676	101	0.01	14.07	-1.96	0.00	0.00	0.00
	102	-0.43	-7.05	8.43	0.00	0.00	0.00
	103	-2.20	2.28	2.82	0.00	0.00	0.00
	104	-0.89	-25.30	20.00	0.00	0.00	0.00
	105	-4.43	-6.65	8.78	0.00	0.00	0.00
	106	-0.89	-31.51	21.27	0.00	0.00	0.00
	107	-4.43	-12.85	10.06	0.00	0.00	0.00
	108	0.01	18.38	-2.37	0.00	0.00	0.00
	109	0.00	14.94	-2.15	0.00	0.00	0.00
	110	0.00	14.95	-2.19	0.00	0.00	0.00
	111	0.88	-1.81	3.46	0.00	0.00	0.00
	112	0.14	-2.13	2.44	0.00	0.00	0.00
	113	1.73	-14.82	10.07	0.00	0.00	0.00
	114	0.24	-15.46	8.03	0.00	0.00	0.00
	115	1.72	-21.03	11.34	0.00	0.00	0.00
	116	0.24	-21.66	9.30	0.00	0.00	0.00
679	101	-1.37	20.23	0.00	0.00	0.00	0.00
	102	-2.60	10.69	-0.01	0.00	0.00	0.00
	103	-1.67	22.99	-0.05	0.00	0.00	0.00
	104	-2.39	-12.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	105	-0.54	11.80	-0.10	0.00	0.00	0.00
	106	-1.54	-24.21	0.00	0.00	0.00	0.00
	107	0.31	0.39	-0.09	0.00	0.00	0.00
	108	-1.37	20.22	0.00	0.00	0.00	0.00
	109	-1.37	20.22	0.01	0.00	0.00	0.00
	110	-1.38	20.23	0.01	0.00	0.00	0.00
	111	-2.11	27.20	0.00	0.00	0.00	0.00
	112	-2.04	27.19	-0.02	0.00	0.00	0.00
	113	-1.41	20.22	0.01	0.00	0.00	0.00
	114	-1.28	20.20	-0.04	0.00	0.00	0.00
	115	-0.57	8.80	0.01	0.00	0.00	0.00
	116	-0.43	8.79	-0.04	0.00	0.00	0.00
680	101	-1.02	11.36	-1.13	0.00	0.00	0.00
	102	-2.29	16.67	4.00	0.00	0.00	0.00
	103	-1.16	12.79	-1.58	0.00	0.00	0.00
	104	-2.34	3.63	7.36	0.00	0.00	0.00
	105	-0.08	-4.13	-3.78	0.00	0.00	0.00
	106	-1.88	3.94	9.51	0.00	0.00	0.00
	107	0.39	-3.83	-1.64	0.00	0.00	0.00
	108	-1.03	10.80	-1.28	0.00	0.00	0.00
	109	-1.03	10.28	-1.42	0.00	0.00	0.00
	110	-1.04	10.37	-1.37	0.00	0.00	0.00
	111	-1.66	32.91	4.48	0.00	0.00	0.00
	112	-1.56	30.43	3.64	0.00	0.00	0.00
	113	-1.07	36.10	8.33	0.00	0.00	0.00
	114	-0.87	31.14	6.66	0.00	0.00	0.00
	115	-0.60	36.40	10.48	0.00	0.00	0.00
	116	-0.40	31.44	8.80	0.00	0.00	0.00
681	101	-1.37	20.14	0.00	0.00	0.00	0.00
	102	-2.72	10.69	-0.01	0.00	0.00	0.00
	103	-1.90	23.00	-0.06	0.00	0.00	0.00
	104	-2.61	-12.69	-0.02	0.00	0.00	0.00
	105	-0.97	11.93	-0.12	0.00	0.00	0.00
	106	-1.75	-24.08	-0.01	0.00	0.00	0.00
	107	-0.10	0.54	-0.11	0.00	0.00	0.00
	108	-1.37	20.13	0.00	0.00	0.00	0.00
	109	-1.37	20.13	0.00	0.00	0.00	0.00
	110	-1.38	20.14	0.01	0.00	0.00	0.00
	111	-2.10	27.10	0.01	0.00	0.00	0.00
	112	-2.07	27.10	-0.02	0.00	0.00	0.00
	113	-1.38	20.13	0.01	0.00	0.00	0.00
	114	-1.31	20.12	-0.04	0.00	0.00	0.00
	115	-0.51	8.74	0.02	0.00	0.00	0.00
	116	-0.44	8.73	-0.03	0.00	0.00	0.00
682	101	-1.35	20.12	-0.02	0.00	0.00	0.00
	102	-2.99	10.85	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	103	-2.26	23.19	-0.05	0.00	0.00	0.00
	104	-3.20	-12.34	0.03	0.00	0.00	0.00
	105	-1.74	12.33	-0.08	0.00	0.00	0.00
	106	-2.34	-23.72	0.06	0.00	0.00	0.00
	107	-0.88	0.95	-0.06	0.00	0.00	0.00
	108	-1.35	20.12	-0.02	0.00	0.00	0.00
	109	-1.35	20.12	-0.02	0.00	0.00	0.00
	110	-1.36	20.12	-0.02	0.00	0.00	0.00
	111	-2.05	27.08	-0.01	0.00	0.00	0.00
	112	-2.05	27.08	-0.03	0.00	0.00	0.00
	113	-1.33	20.11	-0.01	0.00	0.00	0.00
	114	-1.33	20.11	-0.04	0.00	0.00	0.00
	115	-0.47	8.74	0.02	0.00	0.00	0.00
	116	-0.47	8.73	-0.01	0.00	0.00	0.00
683	101	-1.35	20.13	-0.01	0.00	0.00	0.00
	102	-2.86	10.78	-0.01	0.00	0.00	0.00
	103	-2.10	23.10	-0.06	0.00	0.00	0.00
	104	-2.93	-12.50	-0.01	0.00	0.00	0.00
	105	-1.40	12.15	-0.11	0.00	0.00	0.00
	106	-2.07	-23.88	0.01	0.00	0.00	0.00
	107	-0.55	0.77	-0.10	0.00	0.00	0.00
	108	-1.35	20.12	-0.01	0.00	0.00	0.00
	109	-1.35	20.12	-0.01	0.00	0.00	0.00
	110	-1.36	20.13	0.00	0.00	0.00	0.00
	111	-2.07	27.09	0.00	0.00	0.00	0.00
	112	-2.06	27.09	-0.02	0.00	0.00	0.00
	113	-1.34	20.12	0.01	0.00	0.00	0.00
	114	-1.32	20.11	-0.04	0.00	0.00	0.00
	115	-0.48	8.74	0.02	0.00	0.00	0.00
	116	-0.46	8.73	-0.02	0.00	0.00	0.00
684	101	-1.45	21.91	-0.04	0.00	0.00	0.00
	102	-3.15	12.35	0.01	0.00	0.00	0.00
	103	-2.40	24.51	-0.04	0.00	0.00	0.00
	104	-3.43	-11.27	0.07	0.00	0.00	0.00
	105	-1.93	13.05	-0.05	0.00	0.00	0.00
	106	-2.50	-24.04	0.11	0.00	0.00	0.00
	107	-1.00	0.29	-0.01	0.00	0.00	0.00
	108	-1.45	21.91	-0.04	0.00	0.00	0.00
	109	-1.45	21.91	-0.04	0.00	0.00	0.00
	110	-1.45	21.91	-0.04	0.00	0.00	0.00
	111	-2.14	28.94	-0.03	0.00	0.00	0.00
	112	-2.15	28.94	-0.04	0.00	0.00	0.00
	113	-1.42	21.90	-0.02	0.00	0.00	0.00
	114	-1.43	21.90	-0.05	0.00	0.00	0.00
	115	-0.49	9.13	0.03	0.00	0.00	0.00
	116	-0.50	9.14	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
696	101	0.00	20.22	-4.36	0.00	0.00	0.00
	102	-1.31	0.45	3.56	0.00	0.00	0.00
	103	0.37	21.49	-5.81	0.00	0.00	0.00
	104	-2.60	-14.47	10.24	0.00	0.00	0.00
	105	0.75	27.59	-8.50	0.00	0.00	0.00
	106	-2.59	-26.74	14.11	0.00	0.00	0.00
	107	0.75	15.32	-4.63	0.00	0.00	0.00
	108	0.00	20.63	-4.48	0.00	0.00	0.00
	109	0.00	21.00	-4.58	0.00	0.00	0.00
	110	0.01	20.94	-4.51	0.00	0.00	0.00
	111	-0.84	1.29	2.30	0.00	0.00	0.00
	112	-0.12	6.98	-0.06	0.00	0.00	0.00
	113	-1.66	-12.80	7.72	0.00	0.00	0.00
	114	-0.23	-1.42	3.00	0.00	0.00	0.00
	115	-1.66	-25.07	11.59	0.00	0.00	0.00
	116	-0.22	-13.69	6.86	0.00	0.00	0.00
1196	101	0.01	33.04	-0.03	-0.03	0.00	0.00
	102	-0.10	16.51	-0.92	-1.12	0.00	0.00
	103	-0.57	17.81	-0.08	0.04	0.00	0.00
	104	-0.21	25.19	-1.78	-2.00	0.00	0.00
	105	-1.15	27.80	-0.12	0.32	0.00	0.00
	106	-0.21	10.02	-1.76	-1.95	0.00	0.00
	107	-1.15	12.63	-0.10	0.38	0.00	0.00
	108	0.01	33.04	-0.04	-0.08	0.00	0.00
	109	0.01	33.06	-0.03	-0.05	0.00	0.00
	110	0.01	33.06	-0.03	-0.05	0.00	0.00
	111	0.54	15.95	0.19	0.24	0.00	0.00
	112	0.07	16.79	1.05	1.55	0.00	0.00
	113	1.07	24.08	0.43	0.72	0.00	0.00
	114	0.13	25.75	2.15	3.33	0.00	0.00
	115	1.06	8.91	0.45	0.78	0.00	0.00
	116	0.13	10.58	2.17	3.39	0.00	0.00
1245	101	0.06	107.52	-2.00	-2.98	0.00	0.00
	102	0.02	49.15	-5.28	-12.23	0.00	0.00
	103	0.00	56.02	-1.33	-2.47	0.00	0.00
	104	0.02	76.08	-10.74	-25.35	0.00	0.00
	105	-0.02	89.82	-2.83	-5.82	0.00	0.00
	106	-0.01	13.59	-9.63	-24.07	0.00	0.00
	107	-0.05	27.33	-1.72	-4.55	0.00	0.00
	108	0.06	107.54	-2.02	-3.09	0.00	0.00
	109	0.06	107.54	-2.01	-3.08	0.00	0.00
	110	0.06	107.54	-2.01	-3.08	0.00	0.00
	111	0.04	47.19	0.79	4.18	0.00	0.00
	112	0.02	51.48	4.91	14.68	0.00	0.00
	113	0.07	72.16	1.40	7.48	0.00	0.00
	114	0.03	80.73	9.64	28.47	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	115	0.03	9.67	2.51	8.76	0.00	0.00
	116	-0.01	18.25	10.75	29.74	0.00	0.00
1295	101	1.98	105.96	-2.29	-3.87	0.00	0.00
	102	-3.47	34.51	-6.67	-18.33	0.00	0.00
	103	-8.00	34.53	-1.78	-4.31	0.00	0.00
	104	-10.81	39.55	-13.92	-39.17	0.00	0.00
	105	-19.89	39.60	-4.13	-11.12	0.00	0.00
	106	-11.33	-21.39	-12.76	-38.05	0.00	0.00
	107	-20.40	-21.33	-2.98	-10.00	0.00	0.00
	108	1.94	105.71	-2.32	-4.02	0.00	0.00
	109	1.86	105.30	-2.33	-4.08	0.00	0.00
	110	2.08	106.29	-2.33	-4.07	0.00	0.00
	111	6.16	53.83	1.76	8.64	0.00	0.00
	112	1.41	50.67	6.91	23.85	0.00	0.00
	113	8.45	78.21	2.93	14.77	0.00	0.00
	114	-1.06	71.88	13.24	45.20	0.00	0.00
	115	7.94	17.27	4.09	15.90	0.00	0.00
	116	-1.57	10.94	14.39	46.32	0.00	0.00
1331	101	0.01	64.49	-1.44	-3.17	0.00	0.00
	102	0.02	35.62	-7.41	-23.52	0.00	0.00
	103	0.03	37.83	-1.71	-5.57	0.00	0.00
	104	0.04	51.13	-15.82	-51.22	0.00	0.00
	105	0.07	55.54	-4.42	-15.32	0.00	0.00
	106	0.04	17.94	-15.47	-51.55	0.00	0.00
	107	0.07	22.36	-4.07	-15.65	0.00	0.00
	108	0.01	64.57	-1.47	-3.35	0.00	0.00
	109	0.01	64.65	-1.50	-3.49	0.00	0.00
	110	0.00	64.65	-1.50	-3.49	0.00	0.00
	111	-0.02	30.62	3.13	13.94	0.00	0.00
	112	0.00	30.72	9.18	33.56	0.00	0.00
	113	-0.02	41.12	5.26	23.70	0.00	0.00
	114	0.01	41.33	17.37	62.93	0.00	0.00
	115	-0.03	7.94	5.62	23.36	0.00	0.00
	116	0.00	8.15	17.72	62.60	0.00	0.00
1363	101	-7.18	96.98	-0.75	-2.94	0.00	0.00
	102	-8.49	63.29	-7.94	-28.00	0.00	0.00
	103	-13.34	79.93	-1.98	-7.59	0.00	0.00
	104	-18.07	103.42	-16.50	-60.21	0.00	0.00
	105	-27.76	136.70	-4.57	-19.39	0.00	0.00
	106	-13.85	53.01	-16.40	-60.81	0.00	0.00
	107	-23.54	86.30	-4.48	-19.99	0.00	0.00
	108	-7.22	97.41	-0.79	-3.16	0.00	0.00
	109	-7.32	97.97	-0.83	-3.37	0.00	0.00
	110	-7.10	96.98	-0.83	-3.38	0.00	0.00
	111	1.85	34.51	3.62	17.35	0.00	0.00
	112	-2.91	47.94	9.99	39.86	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	113	2.63	45.85	6.61	30.48	0.00	0.00
	114	-6.89	72.71	19.37	75.51	0.00	0.00
	115	6.85	-4.56	6.71	29.88	0.00	0.00
	116	-2.67	22.31	19.46	74.91	0.00	0.00
1397	101	0.01	77.56	-4.83	-6.68	0.00	0.00
	102	-0.02	38.21	-6.20	-21.77	0.00	0.00
	103	-0.01	46.52	0.15	1.20	0.00	0.00
	104	-0.04	52.63	-20.48	-69.12	0.00	0.00
	105	-0.03	69.25	-7.77	-23.18	0.00	0.00
	106	-0.05	13.18	-20.00	-73.26	0.00	0.00
	107	-0.04	29.80	-7.28	-27.32	0.00	0.00
	108	0.01	77.63	-4.88	-6.94	0.00	0.00
	109	0.01	77.71	-4.94	-7.23	0.00	0.00
	110	0.01	77.71	-4.94	-7.23	0.00	0.00
	111	0.00	32.46	8.38	33.72	0.00	0.00
	112	0.01	37.81	15.28	59.24	0.00	0.00
	113	0.00	41.13	8.70	41.87	0.00	0.00
	114	0.01	51.83	22.50	92.90	0.00	0.00
	115	-0.01	1.68	9.18	37.72	0.00	0.00
	116	0.00	12.38	22.98	88.76	0.00	0.00
1424	101	0.00	17.65	0.00	-0.03	0.00	0.00
	102	-0.36	8.48	-0.64	-0.33	0.00	0.00
	103	0.10	9.79	0.06	0.28	0.00	0.00
	104	-0.73	12.27	-1.55	-1.42	0.00	0.00
	105	0.21	14.89	-0.15	-0.20	0.00	0.00
	106	-0.73	3.67	-1.61	-1.56	0.00	0.00
	107	0.20	6.29	-0.22	-0.34	0.00	0.00
	108	0.00	17.65	0.00	-0.04	0.00	0.00
	109	0.00	17.65	0.00	-0.05	0.00	0.00
	110	0.00	17.65	0.00	-0.05	0.00	0.00
	111	-0.53	8.51	0.38	0.94	0.00	0.00
	112	-0.06	9.37	1.11	1.74	0.00	0.00
	113	-1.05	12.33	0.50	1.10	0.00	0.00
	114	-0.13	14.05	1.96	2.71	0.00	0.00
	115	-1.06	3.73	0.44	0.96	0.00	0.00
	116	-0.13	5.45	1.90	2.57	0.00	0.00
1194	101	-0.02	30.64	0.86	0.00	0.00	0.00
	102	-1.12	15.55	-0.62	0.00	0.00	0.00
	103	-3.44	21.13	1.29	0.00	0.00	0.00
	104	-2.35	22.99	-0.43	0.00	0.00	0.00
	105	-6.99	34.15	3.40	0.00	0.00	0.00
	106	-2.35	9.69	-0.65	0.00	0.00	0.00
	107	-6.99	20.85	3.17	0.00	0.00	0.00
	108	-0.03	30.73	0.67	0.00	0.00	0.00
	109	-0.03	29.77	0.77	0.00	0.00	0.00
	110	-0.03	29.94	0.78	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	111	3.04	23.66	0.85	0.00	0.00	0.00
	112	0.78	32.03	3.43	0.00	0.00	0.00
	113	5.99	39.22	2.51	0.00	0.00	0.00
	114	1.46	55.96	7.68	0.00	0.00	0.00
	115	5.99	25.92	2.28	0.00	0.00	0.00
	116	1.45	42.66	7.45	0.00	0.00	0.00
1195	101	0.02	50.57	0.39	0.00	0.00	0.00
	102	-0.78	25.87	-1.02	0.00	0.00	0.00
	103	-3.39	25.02	0.89	0.00	0.00	0.00
	104	-1.63	35.98	-0.86	0.00	0.00	0.00
	105	-6.84	34.28	2.94	0.00	0.00	0.00
	106	-1.65	11.41	-0.93	0.00	0.00	0.00
	107	-6.87	9.71	2.87	0.00	0.00	0.00
	108	0.02	52.01	0.19	0.00	0.00	0.00
	109	0.02	51.44	0.29	0.00	0.00	0.00
	110	0.02	51.28	0.30	0.00	0.00	0.00
	111	3.10	17.67	0.45	0.00	0.00	0.00
	112	0.53	12.35	3.03	0.00	0.00	0.00
	113	6.13	19.58	2.07	0.00	0.00	0.00
	114	0.99	8.95	7.24	0.00	0.00	0.00
	115	6.11	-4.99	2.00	0.00	0.00	0.00
	116	0.97	-15.63	7.17	0.00	0.00	0.00
1268	101	0.10	96.11	1.56	0.00	0.00	0.00
	102	-0.20	42.55	0.42	0.00	0.00	0.00
	103	0.08	42.91	0.72	0.00	0.00	0.00
	104	-0.38	75.20	0.68	0.00	0.00	0.00
	105	0.17	75.93	1.26	0.00	0.00	0.00
	106	-0.42	17.46	-0.30	0.00	0.00	0.00
	107	0.13	18.19	0.28	0.00	0.00	0.00
	108	0.10	96.09	1.56	0.00	0.00	0.00
	109	0.10	96.09	1.57	0.00	0.00	0.00
	110	0.10	96.09	1.57	0.00	0.00	0.00
	111	-0.29	43.59	0.59	0.00	0.00	0.00
	112	-0.01	44.07	0.84	0.00	0.00	0.00
	113	-0.57	77.29	1.01	0.00	0.00	0.00
	114	-0.02	78.25	1.51	0.00	0.00	0.00
	115	-0.61	19.55	0.03	0.00	0.00	0.00
	116	-0.05	20.51	0.53	0.00	0.00	0.00
1279	101	0.09	90.94	1.64	0.00	0.00	0.00
	102	-0.20	39.87	0.49	0.00	0.00	0.00
	103	0.08	40.59	0.78	0.00	0.00	0.00
	104	-0.39	69.95	0.74	0.00	0.00	0.00
	105	0.17	71.39	1.32	0.00	0.00	0.00
	106	-0.42	14.30	-0.32	0.00	0.00	0.00
	107	0.14	15.73	0.25	0.00	0.00	0.00
	108	0.09	90.91	1.65	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	109	0.09	90.89	1.65	0.00	0.00	0.00
	110	0.09	90.89	1.65	0.00	0.00	0.00
	111	-0.30	41.95	0.71	0.00	0.00	0.00
	112	-0.02	42.84	0.97	0.00	0.00	0.00
	113	-0.59	74.12	1.18	0.00	0.00	0.00
	114	-0.02	75.90	1.69	0.00	0.00	0.00
	115	-0.62	18.47	0.11	0.00	0.00	0.00
	116	-0.06	20.25	0.62	0.00	0.00	0.00
1318	101	0.08	57.49	0.92	0.00	0.00	0.00
	102	-0.20	27.53	0.14	0.00	0.00	0.00
	103	0.08	28.47	0.47	0.00	0.00	0.00
	104	-0.40	43.75	0.03	0.00	0.00	0.00
	105	0.17	45.64	0.68	0.00	0.00	0.00
	106	-0.43	13.32	-0.55	0.00	0.00	0.00
	107	0.14	15.22	0.10	0.00	0.00	0.00
	108	0.08	57.46	0.92	0.00	0.00	0.00
	109	0.08	57.44	0.93	0.00	0.00	0.00
	110	0.08	57.44	0.93	0.00	0.00	0.00
	111	-0.30	30.39	0.53	0.00	0.00	0.00
	112	-0.02	31.57	0.84	0.00	0.00	0.00
	113	-0.60	49.48	0.80	0.00	0.00	0.00
	114	-0.03	51.82	1.42	0.00	0.00	0.00
	115	-0.63	19.06	0.22	0.00	0.00	0.00
	116	-0.06	21.40	0.84	0.00	0.00	0.00
1355	101	0.09	80.66	0.03	0.00	0.00	0.00
	102	-0.20	31.90	-0.05	0.00	0.00	0.00
	103	0.08	32.96	0.21	0.00	0.00	0.00
	104	-0.40	58.89	-0.55	0.00	0.00	0.00
	105	0.17	61.01	-0.02	0.00	0.00	0.00
	106	-0.43	15.16	-0.73	0.00	0.00	0.00
	107	0.14	17.28	-0.20	0.00	0.00	0.00
	108	0.09	80.55	0.03	0.00	0.00	0.00
	109	0.09	80.44	0.03	0.00	0.00	0.00
	110	0.09	80.44	0.03	0.00	0.00	0.00
	111	-0.31	37.73	0.39	0.00	0.00	0.00
	112	-0.02	39.50	0.65	0.00	0.00	0.00
	113	-0.61	70.55	0.33	0.00	0.00	0.00
	114	-0.03	74.09	0.86	0.00	0.00	0.00
	115	-0.64	26.82	0.14	0.00	0.00	0.00
	116	-0.06	30.36	0.67	0.00	0.00	0.00
1389	101	0.09	106.18	2.69	0.00	0.00	0.00
	102	-0.21	48.90	1.84	0.00	0.00	0.00
	103	0.09	53.51	2.35	0.00	0.00	0.00
	104	-0.40	77.95	1.39	0.00	0.00	0.00
	105	0.18	87.18	2.41	0.00	0.00	0.00
	106	-0.44	16.79	-0.73	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	107	0.15	26.02	0.30	0.00	0.00	0.00
	108	0.09	106.11	2.69	0.00	0.00	0.00
	109	0.09	106.04	2.69	0.00	0.00	0.00
	110	0.09	106.04	2.69	0.00	0.00	0.00
	111	-0.31	49.75	2.47	0.00	0.00	0.00
	112	-0.02	54.78	2.99	0.00	0.00	0.00
	113	-0.61	79.66	2.65	0.00	0.00	0.00
	114	-0.03	89.72	3.69	0.00	0.00	0.00
	115	-0.65	18.50	0.54	0.00	0.00	0.00
	116	-0.06	28.57	1.58	0.00	0.00	0.00
1422	101	-4.21	41.13	5.50	0.00	0.00	0.00
	102	-6.49	28.10	3.89	0.00	0.00	0.00
	103	-1.98	25.54	3.78	0.00	0.00	0.00
	104	-11.14	35.65	4.34	0.00	0.00	0.00
	105	-2.13	30.53	4.12	0.00	0.00	0.00
	106	-8.01	11.76	0.49	0.00	0.00	0.00
	107	0.99	6.64	0.27	0.00	0.00	0.00
	108	-4.22	40.90	5.46	0.00	0.00	0.00
	109	-4.22	40.68	5.43	0.00	0.00	0.00
	110	-4.22	40.65	5.43	0.00	0.00	0.00
	111	-7.72	39.44	5.83	0.00	0.00	0.00
	112	-3.19	40.70	6.68	0.00	0.00	0.00
	113	-13.61	58.33	8.21	0.00	0.00	0.00
	114	-4.55	60.85	9.92	0.00	0.00	0.00
	115	-10.48	34.44	4.36	0.00	0.00	0.00
	116	-1.42	36.96	6.06	0.00	0.00	0.00
1423	101	-3.31	46.47	-5.93	0.00	0.00	0.00
	102	-6.80	27.34	-1.40	0.00	0.00	0.00
	103	-0.51	28.02	-1.50	0.00	0.00	0.00
	104	-12.76	41.98	-4.79	0.00	0.00	0.00
	105	-0.17	43.35	-5.00	0.00	0.00	0.00
	106	-10.62	16.03	-1.72	0.00	0.00	0.00
	107	1.97	17.39	-1.93	0.00	0.00	0.00
	108	-3.31	46.71	-5.96	0.00	0.00	0.00
	109	-3.31	46.93	-6.00	0.00	0.00	0.00
	110	-3.31	46.96	-6.00	0.00	0.00	0.00
	111	-8.86	17.13	0.54	0.00	0.00	0.00
	112	-2.54	12.20	1.40	0.00	0.00	0.00
	113	-16.87	21.56	-0.92	0.00	0.00	0.00
	114	-4.24	11.71	0.80	0.00	0.00	0.00
	115	-14.74	-4.39	2.15	0.00	0.00	0.00
	116	-2.10	-14.24	3.87	0.00	0.00	0.00
1247	101	0.01	10.24	0.11	0.00	0.00	0.00
	102	-0.01	5.12	2.05	0.00	0.00	0.00
	103	0.00	12.36	0.26	0.00	0.00	0.00
	104	-0.03	-2.01	3.99	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	105	-0.02	12.46	0.40	0.00	0.00	0.00
	106	-0.04	-6.26	3.94	0.00	0.00	0.00
	107	-0.02	8.21	0.35	0.00	0.00	0.00
	108	0.00	10.25	0.17	0.00	0.00	0.00
	109	0.00	10.25	0.20	0.00	0.00	0.00
	110	0.00	10.25	0.18	0.00	0.00	0.00
	111	0.01	4.15	1.41	0.00	0.00	0.00
	112	0.02	8.92	-0.45	0.00	0.00	0.00
	113	0.01	-3.95	2.70	0.00	0.00	0.00
	114	0.02	5.59	-1.02	0.00	0.00	0.00
	115	0.01	-8.20	2.65	0.00	0.00	0.00
	116	0.02	1.34	-1.07	0.00	0.00	0.00
1297	101	2.28	17.79	0.09	0.00	0.00	0.00
	102	-11.54	-13.05	2.03	0.00	0.00	0.00
	103	-9.83	-1.42	0.25	0.00	0.00	0.00
	104	-25.60	-41.41	3.91	0.00	0.00	0.00
	105	-22.19	-18.15	0.36	0.00	0.00	0.00
	106	-27.02	-49.85	3.88	0.00	0.00	0.00
	107	-23.60	-26.59	0.33	0.00	0.00	0.00
	108	2.34	22.72	0.11	0.00	0.00	0.00
	109	2.48	27.85	0.10	0.00	0.00	0.00
	110	2.34	22.47	0.14	0.00	0.00	0.00
	111	1.83	5.88	1.46	0.00	0.00	0.00
	112	3.48	15.27	-0.40	0.00	0.00	0.00
	113	1.14	-3.54	2.77	0.00	0.00	0.00
	114	4.44	15.25	-0.95	0.00	0.00	0.00
	115	-0.28	-11.98	2.73	0.00	0.00	0.00
	116	3.03	6.81	-0.98	0.00	0.00	0.00
1333	101	0.00	9.27	-0.02	0.00	0.00	0.00
	102	0.00	2.78	-0.07	0.00	0.00	0.00
	103	0.00	8.94	0.25	0.00	0.00	0.00
	104	-0.01	-5.02	-0.11	0.00	0.00	0.00
	105	-0.01	7.30	0.52	0.00	0.00	0.00
	106	-0.01	-8.97	-0.10	0.00	0.00	0.00
	107	-0.01	3.36	0.54	0.00	0.00	0.00
	108	0.00	9.65	-0.03	0.00	0.00	0.00
	109	0.00	10.02	-0.03	0.00	0.00	0.00
	110	0.00	10.03	-0.05	0.00	0.00	0.00
	111	0.00	5.35	1.51	0.00	0.00	0.00
	112	0.00	8.85	-0.43	0.00	0.00	0.00
	113	0.00	0.13	3.04	0.00	0.00	0.00
	114	0.00	7.13	-0.83	0.00	0.00	0.00
	115	0.00	-3.82	3.06	0.00	0.00	0.00
	116	0.00	3.18	-0.82	0.00	0.00	0.00
1365	101	-0.53	16.73	0.07	0.00	0.00	0.00
	102	-12.22	29.68	2.09	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	103	-12.54	38.17	0.35	0.00	0.00	0.00
	104	-23.71	43.07	4.08	0.00	0.00	0.00
	105	-24.35	60.06	0.58	0.00	0.00	0.00
	106	-23.89	36.57	4.08	0.00	0.00	0.00
	107	-24.53	53.56	0.58	0.00	0.00	0.00
	108	-0.60	16.53	0.10	0.00	0.00	0.00
	109	-0.58	16.18	0.14	0.00	0.00	0.00
	110	-0.71	21.64	0.11	0.00	0.00	0.00
	111	0.29	5.60	1.39	0.00	0.00	0.00
	112	0.79	9.61	-0.44	0.00	0.00	0.00
	113	1.32	-5.09	2.67	0.00	0.00	0.00
	114	2.32	2.93	-0.98	0.00	0.00	0.00
	115	1.14	-11.59	2.67	0.00	0.00	0.00
	116	2.14	-3.56	-0.98	0.00	0.00	0.00
1707	101	0.00	14.30	0.00	0.00	0.00	0.00
	102	0.00	8.19	0.00	0.00	0.00	0.00
	103	0.00	8.02	0.00	0.00	0.00	0.00
	104	0.00	9.98	0.00	0.00	0.00	0.00
	105	0.00	9.63	0.00	0.00	0.00	0.00
	106	0.00	-0.76	0.00	0.00	0.00	0.00
	107	0.00	-1.11	0.00	0.00	0.00	0.00
	108	0.00	14.31	0.00	0.00	0.00	0.00
	109	0.00	14.31	0.00	0.00	0.00	0.00
	110	0.00	14.30	0.00	0.00	0.00	0.00
	111	0.00	9.51	0.00	0.00	0.00	0.00
	112	0.00	9.50	0.00	0.00	0.00	0.00
	113	0.00	12.63	0.00	0.00	0.00	0.00
	114	0.00	12.60	0.00	0.00	0.00	0.00
	115	0.00	1.89	0.00	0.00	0.00	0.00
	116	0.00	1.86	0.00	0.00	0.00	0.00
1867	101	0.00	1.92	0.00	0.00	0.00	0.00
	102	0.00	1.87	0.00	0.00	0.00	0.00
	103	0.00	1.90	0.00	0.00	0.00	0.00
	104	0.00	2.35	0.00	0.00	0.00	0.00
	105	0.00	2.40	0.00	0.00	0.00	0.00
	106	0.00	0.93	0.00	0.00	0.00	0.00
	107	0.00	0.99	0.00	0.00	0.00	0.00
	108	0.00	1.92	0.00	0.00	0.00	0.00
	109	0.00	1.92	0.00	0.00	0.00	0.00
	110	0.00	1.92	0.00	0.00	0.00	0.00
	111	0.00	1.59	0.00	0.00	0.00	0.00
	112	0.00	1.59	0.00	0.00	0.00	0.00
	113	0.00	1.77	0.00	0.00	0.00	0.00
	114	0.00	1.78	0.00	0.00	0.00	0.00
	115	0.00	0.36	0.00	0.00	0.00	0.00
	116	0.00	0.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1563	101	0.00	8.54	0.00	0.00	0.00	0.00
	102	0.00	4.04	0.00	0.00	0.00	0.00
	103	0.00	4.04	0.00	0.00	0.00	0.00
	104	0.00	6.85	0.00	0.00	0.00	0.00
	105	0.00	6.85	0.00	0.00	0.00	0.00
	106	0.00	2.55	0.00	0.00	0.00	0.00
	107	0.00	2.55	0.00	0.00	0.00	0.00
	108	0.00	8.54	0.00	0.00	0.00	0.00
	109	0.00	8.54	0.00	0.00	0.00	0.00
	110	0.00	8.54	0.00	0.00	0.00	0.00
	111	0.00	4.04	0.00	0.00	0.00	0.00
	112	0.00	4.04	0.00	0.00	0.00	0.00
	113	0.00	6.85	0.00	0.00	0.00	0.00
	114	0.00	6.85	0.00	0.00	0.00	0.00
	115	0.00	2.55	0.00	0.00	0.00	0.00
	116	0.00	2.55	0.00	0.00	0.00	0.00
1569	101	0.00	26.51	0.00	0.00	0.00	0.00
	102	0.00	15.32	0.00	0.00	0.00	0.00
	103	0.00	16.33	0.00	0.00	0.00	0.00
	104	0.00	20.13	0.00	0.00	0.00	0.00
	105	0.00	22.15	0.00	0.00	0.00	0.00
	106	0.00	6.84	0.00	0.00	0.00	0.00
	107	0.00	8.86	0.00	0.00	0.00	0.00
	108	0.00	26.50	0.00	0.00	0.00	0.00
	109	0.00	26.49	0.00	0.00	0.00	0.00
	110	0.00	26.49	0.00	0.00	0.00	0.00
	111	0.00	16.97	0.00	0.00	0.00	0.00
	112	0.00	18.08	0.00	0.00	0.00	0.00
	113	0.00	23.42	0.00	0.00	0.00	0.00
	114	0.00	25.64	0.00	0.00	0.00	0.00
	115	0.00	10.13	0.00	0.00	0.00	0.00
	116	0.00	12.34	0.00	0.00	0.00	0.00
1868	101	0.00	-2.80	0.00	0.00	0.00	0.00
	102	0.00	-1.94	0.00	0.00	0.00	0.00
	103	0.00	-1.94	0.00	0.00	0.00	0.00
	104	0.00	-2.48	0.00	0.00	0.00	0.00
	105	0.00	-2.48	0.00	0.00	0.00	0.00
	106	0.00	-1.15	0.00	0.00	0.00	0.00
	107	0.00	-1.15	0.00	0.00	0.00	0.00
	108	0.00	-2.80	0.00	0.00	0.00	0.00
	109	0.00	-2.80	0.00	0.00	0.00	0.00
	110	0.00	-2.80	0.00	0.00	0.00	0.00
	111	0.00	-1.94	0.00	0.00	0.00	0.00
	112	0.00	-1.94	0.00	0.00	0.00	0.00
	113	0.00	-2.48	0.00	0.00	0.00	0.00
	114	0.00	-2.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	115	0.00	-1.15	0.00	0.00	0.00	0.00
	116	0.00	-1.15	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

1830. LOAD LIST 100 TO 116
1831. LOAD LIST 1 TO 12
1832. PRINT JOINT DISPLACEMENTS LIST 3 14 23 32 41 442 445 447

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
3	1	-0.0518	-0.8768	-0.0367	-0.0001	0.0000	0.0000
	2	-0.0031	-0.0037	0.0049	0.0000	0.0000	0.0000
	3	-0.0549	-0.5221	-0.0412	-0.0001	0.0000	0.0000
	4	-0.0067	-0.0010	0.0296	0.0001	0.0000	0.0000
	5	-0.0061	-0.0028	0.0457	0.0001	0.0000	0.0000
	6	0.0033	-0.0021	0.0488	0.0001	0.0000	0.0000
	7	1.9851	1.6750	-0.4523	0.0016	0.0001	-0.0001
	8	2.3087	0.5684	-0.0830	0.0003	0.0000	-0.0001
	9	-0.0369	-0.0282	-0.2742	-0.0001	0.0000	0.0000
	10	-0.0099	-0.0020	-0.2600	-0.0004	-0.0001	0.0000
	11	0.0372	-0.4957	0.0756	-0.0002	0.0000	0.0000
	12	0.0142	-0.0010	0.0107	0.0000	0.0000	0.0000
14	1	-0.0437	-0.9766	-0.0519	0.0000	0.0000	0.0000
	2	-0.0025	0.0001	0.0065	0.0000	0.0000	0.0000
	3	-0.0426	-1.1251	-0.0620	0.0000	0.0000	0.0000
	4	-0.0065	-0.0005	0.0344	0.0000	0.0000	0.0000
	5	-0.0081	-0.0008	0.0551	0.0001	0.0000	0.0000
	6	0.0032	-0.0006	0.0592	0.0001	0.0000	0.0000
	7	2.0064	3.7841	-0.3558	0.0004	0.0001	-0.0001
	8	2.2135	1.3845	-0.0640	0.0001	0.0000	-0.0001
	9	-0.0110	0.0068	-0.2941	-0.0001	0.0000	0.0000
	10	-0.0091	0.0027	-0.2899	-0.0003	0.0000	0.0000
	11	-0.0317	-0.2988	0.0707	-0.0001	0.0000	0.0000
	12	0.0104	-0.0002	0.0119	0.0000	0.0000	0.0000
23	1	-0.0349	-0.9327	-0.0621	0.0000	0.0000	0.0000
	2	-0.0031	0.0001	0.0075	0.0000	0.0000	0.0000
	3	-0.0334	-1.1104	-0.0759	0.0000	0.0000	0.0000
	4	-0.0073	-0.0001	0.0377	0.0000	0.0000	0.0000
	5	-0.0100	0.0000	0.0614	0.0001	0.0000	0.0000
	6	0.0022	0.0001	0.0662	0.0001	0.0000	0.0000
	7	1.8353	3.6346	-0.2938	0.0003	0.0001	-0.0001
	8	1.9960	1.1493	-0.0516	0.0001	0.0000	-0.0001
	9	-0.0066	0.0024	-0.3074	-0.0001	0.0000	0.0000
	10	-0.0094	0.0001	-0.3100	-0.0003	0.0000	0.0000
	11	-0.0462	-0.2568	0.0674	0.0000	-0.0001	0.0000
	12	0.0096	0.0000	0.0127	0.0000	0.0000	0.0000
32	1	-0.0167	-0.9353	-0.0827	0.0000	0.0000	0.0000
	2	-0.0044	-0.0016	0.0097	0.0000	0.0000	0.0000
	3	-0.0132	-1.1089	-0.1040	0.0000	0.0000	0.0000
	4	-0.0072	-0.0020	0.0442	0.0001	0.0000	0.0000
	5	-0.0105	-0.0038	0.0742	0.0001	0.0000	0.0000
	6	0.0017	-0.0037	0.0804	0.0001	0.0000	0.0000
	7	1.2241	3.5410	-0.1681	0.0003	0.0002	-0.0001
	8	1.2890	1.0849	-0.0266	0.0001	0.0001	-0.0001
	9	-0.0093	-0.0133	-0.3346	-0.0002	0.0000	0.0000
	10	-0.0232	0.0143	-0.3508	-0.0005	0.0000	0.0000

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	11	-0.0392	-0.2454	0.0606	0.0000	-0.0001	0.0000
	12	0.0096	-0.0002	0.0144	0.0000	0.0000	0.0000
41	1	-0.0092	-0.9493	-0.0933	0.0000	0.0000	0.0000
	2	-0.0049	-0.0026	0.0108	0.0000	0.0000	0.0000
	3	-0.0050	-1.0960	-0.1183	0.0000	0.0000	0.0000
	4	-0.0053	-0.0024	0.0476	0.0001	0.0000	0.0000
	5	-0.0082	-0.0043	0.0807	0.0001	0.0000	0.0000
	6	0.0016	-0.0037	0.0877	0.0001	0.0000	0.0000
	7	0.8887	3.4332	-0.1038	0.0003	0.0001	-0.0001
	8	0.9169	1.0616	-0.0139	0.0000	0.0001	-0.0001
	9	-0.0118	-0.0361	-0.3485	-0.0002	0.0000	0.0000
	10	-0.0347	0.0223	-0.3718	-0.0005	0.0000	0.0000
	11	-0.0270	-0.2215	0.0570	0.0000	-0.0001	0.0000
	12	0.0099	0.0001	0.0152	0.0000	0.0000	0.0000
442	1	-0.0462	-1.1614	-0.0418	0.0000	0.0000	0.0000
	2	-0.0022	-0.0011	0.0055	0.0000	0.0000	0.0000
	3	-0.0487	-1.0758	-0.0481	-0.0002	0.0000	0.0000
	4	-0.0056	-0.0007	0.0312	0.0001	0.0000	0.0000
	5	-0.0066	-0.0003	0.0488	0.0001	0.0000	0.0000
	6	0.0034	-0.0006	0.0522	0.0002	0.0000	0.0000
	7	2.0255	3.5515	-0.4175	0.0008	0.0001	-0.0001
	8	2.2972	1.3104	-0.0764	0.0003	0.0000	-0.0001
	9	-0.0243	0.0186	-0.2808	-0.0002	0.0000	0.0000
	10	-0.0110	0.0067	-0.2700	-0.0005	0.0000	0.0000
	11	-0.0016	-0.6505	0.0740	-0.0001	-0.0001	0.0000
	12	0.0115	-0.0028	0.0111	0.0000	0.0000	0.0000
445	1	0.0012	-1.1256	-0.1040	-0.0005	0.0000	0.0000
	2	-0.0040	-0.0019	0.0119	0.0000	0.0000	0.0000
	3	0.0036	-0.9933	-0.1328	-0.0005	0.0000	0.0000
	4	-0.0036	-0.0056	0.0510	0.0001	0.0000	0.0000
	5	-0.0058	-0.0065	0.0874	0.0001	0.0000	0.0000
	6	0.0022	-0.0003	0.0951	0.0001	0.0000	0.0000
	7	0.5802	3.0599	-0.0384	0.0015	0.0002	-0.0001
	8	0.5916	0.9871	-0.0010	0.0007	0.0001	-0.0001
	9	-0.0254	-0.0783	-0.3627	-0.0004	0.0000	0.0000
	10	-0.0548	0.0316	-0.3931	-0.0004	0.0000	0.0000
	11	-0.0104	-0.0037	0.0534	0.0000	-0.0001	0.0000
	12	0.0103	-0.0001	0.0161	0.0000	0.0000	0.0000
447	1	-0.0255	-0.9301	-0.0723	0.0000	0.0000	0.0000
	2	-0.0037	-0.0005	0.0086	0.0000	0.0000	0.0000
	3	-0.0230	-1.1093	-0.0899	0.0000	0.0000	0.0000
	4	-0.0077	-0.0008	0.0409	0.0001	0.0000	0.0000
	5	-0.0109	-0.0015	0.0677	0.0001	0.0000	0.0000
	6	0.0018	-0.0014	0.0733	0.0001	0.0000	0.0000
	7	1.5583	3.5899	-0.2313	0.0003	0.0002	-0.0001
	8	1.6676	1.1027	-0.0392	0.0001	0.0001	-0.0001

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
9		-0.0068	-0.0025	-0.3209	-0.0002	0.0000	0.0000
10		-0.0144	0.0047	-0.3303	-0.0004	0.0000	0.0000
11		-0.0471	-0.2518	0.0640	0.0000	-0.0001	0.0000
12		0.0094	-0.0001	0.0135	0.0000	0.0000	0.0000

********** END OF LATEST ANALYSIS RESULT **********

1833. LOAD LIST 201 TO 213
1834. PRINT JOINT DISPLACEMENTS LIST 3 14 23 32 41 442 445 447

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
3	201	-0.0585	-1.8993	0.0133	-0.0004	0.0000	0.0000
	202	1.9155	-0.2197	-0.4547	0.0011	0.0001	-0.0001
	203	2.2392	-1.3262	-0.0853	-0.0001	0.0000	-0.0001
	204	1.9267	-0.2243	-0.4390	0.0012	0.0001	-0.0001
	205	2.2503	-1.3308	-0.0697	-0.0001	0.0000	-0.0001
	206	1.9333	0.7982	-0.4891	0.0015	0.0001	-0.0001
	207	2.2569	-0.3083	-0.1198	0.0002	0.0000	-0.0001
	208	-0.1065	-1.9228	-0.2765	-0.0006	0.0000	0.0000
	209	-0.0794	-1.8966	-0.2623	-0.0008	-0.0001	0.0000
	210	-0.0954	-1.9275	-0.2609	-0.0006	0.0000	0.0000
	211	-0.0683	-1.9013	-0.2467	-0.0008	-0.0001	0.0000
	212	-0.0887	-0.9050	-0.3109	-0.0002	0.0000	0.0000
	213	-0.0617	-0.8788	-0.2967	-0.0004	0.0000	0.0000
14	201	-0.1101	-2.4006	-0.0248	-0.0001	0.0000	0.0000
	202	1.8884	1.3836	-0.3990	0.0002	0.0000	-0.0001
	203	2.0955	-1.0160	-0.1072	0.0000	0.0000	-0.0001
	204	1.8962	1.3835	-0.3806	0.0002	0.0000	-0.0001
	205	2.1034	-1.0161	-0.0888	0.0000	0.0000	-0.0001
	206	1.9627	2.8075	-0.4077	0.0004	0.0001	-0.0001
	207	2.1698	0.4079	-0.1159	0.0001	0.0000	-0.0001
	208	-0.1290	-2.3937	-0.3373	-0.0003	0.0000	0.0000
	209	-0.1271	-2.3978	-0.3331	-0.0004	-0.0001	0.0000
	210	-0.1212	-2.3938	-0.3189	-0.0002	0.0000	0.0000
	211	-0.1192	-2.3979	-0.3147	-0.0004	-0.0001	0.0000
	212	-0.0547	-0.9699	-0.3460	-0.0001	0.0000	0.0000
	213	-0.0528	-0.9739	-0.3418	-0.0003	0.0000	0.0000
23	201	-0.1080	-2.2999	-0.0504	-0.0001	-0.0001	0.0000
	202	1.7208	1.3346	-0.3645	0.0003	0.0001	-0.0001
	203	1.8815	-1.1507	-0.1223	0.0000	0.0000	-0.0001
	204	1.7273	1.3347	-0.3442	0.0003	0.0001	-0.0001
	205	1.8880	-1.1506	-0.1020	0.0001	0.0000	-0.0001
	206	1.8004	2.7019	-0.3559	0.0004	0.0001	-0.0001
	207	1.9610	0.2166	-0.1137	0.0001	0.0001	-0.0001
	208	-0.1211	-2.2976	-0.3781	-0.0002	0.0000	0.0000
	209	-0.1239	-2.2998	-0.3806	-0.0004	-0.0001	0.0000
	210	-0.1146	-2.2975	-0.3578	-0.0002	0.0000	0.0000
	211	-0.1174	-2.2998	-0.3604	-0.0004	-0.0001	0.0000
	212	-0.0415	-0.9304	-0.3695	-0.0001	0.0000	0.0000
	213	-0.0443	-0.9326	-0.3721	-0.0003	0.0000	0.0000
32	201	-0.0637	-2.2913	-0.1022	0.0000	-0.0001	0.0000
	202	1.1552	1.2514	-0.2943	0.0003	0.0001	-0.0001
	203	1.2200	-1.2047	-0.1528	0.0001	0.0000	-0.0001
	204	1.1604	1.2497	-0.2702	0.0003	0.0001	-0.0001
	205	1.2252	-1.2064	-0.1288	0.0001	0.0000	-0.0001
	206	1.2075	2.6057	-0.2508	0.0003	0.0002	-0.0001
	207	1.2723	0.1496	-0.1093	0.0001	0.0001	-0.0001

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	208	-0.0783	-2.3028	-0.4608	-0.0002	0.0000	0.0000
	209	-0.0922	-2.2752	-0.4770	-0.0005	-0.0001	0.0000
	210	-0.0731	-2.3046	-0.4367	-0.0001	0.0000	0.0000
	211	-0.0869	-2.2770	-0.4530	-0.0004	-0.0001	0.0000
	212	-0.0260	-0.9486	-0.4173	-0.0001	0.0000	0.0000
	213	-0.0399	-0.9210	-0.4336	-0.0004	0.0000	0.0000
41	201	-0.0361	-2.2694	-0.1285	0.0000	-0.0001	0.0000
	202	0.8476	1.1664	-0.2584	0.0003	0.0001	-0.0001
	203	0.8757	-1.2052	-0.1684	0.0000	0.0000	-0.0001
	204	0.8526	1.1639	-0.2324	0.0003	0.0001	-0.0001
	205	0.8808	-1.2078	-0.1424	0.0001	0.0000	-0.0001
	206	0.8795	2.4839	-0.1971	0.0003	0.0002	-0.0001
	207	0.9077	0.1123	-0.1071	0.0001	0.0001	-0.0001
	208	-0.0529	-2.3030	-0.5030	-0.0002	0.0000	0.0000
	209	-0.0758	-2.2445	-0.5263	-0.0005	-0.0001	0.0000
	210	-0.0479	-2.3055	-0.4770	-0.0001	0.0000	0.0000
	211	-0.0708	-2.2471	-0.5003	-0.0005	-0.0001	0.0000
	212	-0.0210	-0.9855	-0.4417	-0.0001	0.0000	0.0000
	213	-0.0439	-0.9270	-0.4650	-0.0005	0.0000	0.0000
442	201	-0.0871	-2.8917	0.0007	-0.0002	-0.0001	0.0000
	202	1.9291	0.6638	-0.4334	0.0005	0.0000	-0.0001
	203	2.2007	-1.5773	-0.0923	0.0000	-0.0001	-0.0001
	204	1.9384	0.6599	-0.4168	0.0006	0.0000	-0.0001
	205	2.2101	-1.5812	-0.0757	0.0001	-0.0001	-0.0001
	206	1.9794	2.3901	-0.4592	0.0008	0.0001	-0.0001
	207	2.2510	0.1490	-0.1181	0.0003	0.0000	-0.0001
	208	-0.1207	-2.8691	-0.2967	-0.0005	0.0000	0.0000
	209	-0.1075	-2.8810	-0.2859	-0.0008	-0.0001	0.0000
	210	-0.1114	-2.8731	-0.2801	-0.0005	-0.0001	0.0000
	211	-0.0981	-2.8850	-0.2693	-0.0007	-0.0001	0.0000
	212	-0.0704	-1.1428	-0.3226	-0.0003	0.0000	0.0000
	213	-0.0572	-1.1547	-0.3117	-0.0005	0.0000	0.0000
445	201	0.0007	-2.1245	-0.1554	-0.0009	0.0000	0.0000
	202	0.5746	0.9374	-0.2218	0.0006	0.0001	-0.0001
	203	0.5860	-1.1355	-0.1843	-0.0002	0.0001	-0.0001
	204	0.5809	0.9354	-0.1938	0.0006	0.0001	-0.0001
	205	0.5923	-1.1375	-0.1563	-0.0002	0.0000	-0.0001
	206	0.5814	1.9344	-0.1424	0.0011	0.0002	-0.0001
	207	0.5928	-0.1385	-0.1050	0.0003	0.0001	-0.0001
	208	-0.0310	-2.2009	-0.5460	-0.0013	0.0000	0.0000
	209	-0.0604	-2.0909	-0.5765	-0.0014	0.0000	0.0000
	210	-0.0247	-2.2029	-0.5180	-0.0013	0.0000	0.0000
	211	-0.0541	-2.0929	-0.5485	-0.0013	-0.0001	0.0000
	212	-0.0242	-1.2039	-0.4666	-0.0008	0.0000	0.0000
	213	-0.0536	-1.0939	-0.4971	-0.0009	0.0000	0.0000
447	201	-0.0900	-2.2917	-0.0761	0.0000	-0.0001	0.0000

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
	202	1.4627	1.2988	-0.3296	0.0003	0.0001	-0.0001
	203	1.5720	-1.1884	-0.1374	0.0001	0.0000	-0.0001
	204	1.4684	1.2982	-0.3074	0.0003	0.0001	-0.0001
	205	1.5777	-1.1890	-0.1153	0.0001	0.0000	-0.0001
	206	1.5328	2.6598	-0.3037	0.0003	0.0002	-0.0001
	207	1.6421	0.1726	-0.1115	0.0001	0.0001	-0.0001
	208	-0.1024	-2.2936	-0.4192	-0.0002	0.0000	0.0000
	209	-0.1100	-2.2864	-0.4286	-0.0004	-0.0001	0.0000
	210	-0.0968	-2.2942	-0.3970	-0.0002	0.0000	0.0000
	211	-0.1044	-2.2869	-0.4064	-0.0004	-0.0001	0.0000
	212	-0.0323	-0.9326	-0.3933	-0.0001	0.0000	0.0000
	213	-0.0399	-0.9253	-0.4026	-0.0004	0.0000	0.0000

********** END OF LATEST ANALYSIS RESULT **********

```
1835. LOAD LIST 101 TO 116
1836. PARAMETER 1
1837. CODE LRFD
1838. ************************************
1839. FYLD 27500 MEMB 5 13 97 130 175 208 241 274 307 340 373 406 439 472 551 552 -
1840. 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 681 686 -
1841. 687 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 802 -
1842. 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 -
1843. 1019 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 -
1844. 1317 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 -
1845. 1546 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 -
1846. 1596 TO 1602 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 -
1847. 1690 TO 1691 1693 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 -
1848. 1966 1968 1970 1971 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 -
1849. 2004 TO 2006 2015 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 -
1850. 2063 TO 2067 2076 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 -
1851. 2125 TO 2127 2135 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 -
1852. 2183 TO 2187 2196 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 -
1853. 2245 TO 2247 2256 2257 2260 2264 TO 2268 2277 2281 TO 2284 2298 2471 2473 -
1854. 2475 2476 2499 2501 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 -
1855. 2588 TO 2596 2598 2599 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 -
1856. 2654 TO 2655 2672 TO 2683
1857. FYLD 27500 MEMB 2691 TO 2693 2695 TO 2697 2714 TO 2725 2733 TO 2735 -
1858. 2737 TO 2739 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 -
1859. 2817 TO 2819 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 -
1860. 2917 TO 2944 2949 TO 2956 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 -
```

```
1861. 2999 TO 3002 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 -
1862. 3029 TO 3032 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 -
1863. 3059 TO 3062 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 -
1864. 3170 3215 3217 3269 3276 3277 3307 TO 3312 3437 TO 3462 3464 TO 3469 3471 -
1865. 3472 TO 3475 3477 TO 3507 3510 TO 3517 3520 TO 3548 3551 TO 3602 3607 TO 3656 -
1866. 3658 TO 3683 3686 3689 3690 3693 TO 3750 3752 3756 TO 3785 3787 TO 3793 3796 -
1867. 3797 TO 3799 3802 3803 3806 TO 3826 3828 3829 3831 TO 3868 3873 TO 3893 3897 -
1868. 3899 TO 3901 3905 TO 3929 3934 TO 3962 3964 TO 3968 3971 TO 3973 -
1869. 3975 TO 3996 4024 4025 4028 TO 4034 4036 4037 4040 4042 4043 4046 4049 4052 -
1870. 4064 4066 4076 4080 4092 4093 4096 4099 4100 4102 TO 4111 4117 4118 4120 -
1871. 4122 4124 4126 4128 4129 4131 4132 4134 TO 4149 4347 TO 4350 4353 4354 4358 -
1872. 4359 TO 4366 4369 TO 4409 4415 TO 4432 4436 TO 4445 4449 4450 4452 -
1873. 4454 TO 4484 4487 TO 4491 4493 TO 4506 4513 4515 4516 4518 4519 4521 4522 -
1874. 4524 TO 4532 4535 TO 4550 4555 TO 4560 4567 TO 4579 4585 TO 4599 4602 4603 -
1875. 4605
1876. FYLD 27500 MEMB 4606 TO 4611 4614 TO 4620 4623 TO 4634
1877. FYLD 27500 MEMB 4659 4660 4663 4665 4666 4669 TO 4672 4674 TO 4679 -
1878. 4681 TO 4688 4690 4691 4693 4694 4705 TO 4715 4717 TO 4721 4723 4724 4728 -
1879. 4729 TO 4731 4733 4734 4738 TO 4741 4743 4744 4748 TO 4751 4753 4754 4758 -
1880. 4759 TO 4761 4763 4764 4768 TO 4771 4773 4774 4778 TO 4781 4783 4784 4788 -
1881. 4789 TO 4817 4822 TO 4825 4829 4832 4836 TO 4838 4840 4842 TO 4847 4849 4851 -
1882. 4852 TO 4859 4861 TO 4870 4875 TO 4877 4879 4880 4882 TO 5158 5160 TO 5169 -
1883. 5172 5175 TO 5178 5180 TO 5207
1884. FU 41000 MEMB 5 13 97 130 175 208 241 274 307 340 373 406 439 472 551 552 -
1885. 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 681 686 -
1886. 687 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 802 -
1887. 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 -
1888. 1019 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 -
1889. 1317 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 -
1890. 1546 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 -
1891. 1596 TO 1602 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 -
1892. 1690 TO 1691 1693 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 -
1893. 1966 1968 1970 1971 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 -
1894. 2004 TO 2006 2015 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 -
1895. 2063 TO 2067 2076 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 -
1896. 2125 TO 2127 2135 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 -
1897. 2183 TO 2187 2196 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 -
1898. 2245 TO 2247 2256 2257 2260 2264 TO 2268 2277 2281 TO 2284 2298 2471 2473 -
1899. 2475 2476 2499 2501 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 -
1900. 2588 TO 2596 2598 2599 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 -
1901. 2654 TO 2655 2672 TO 2683
1902. FU 41000 MEMB 2691 TO 2693 2695 TO 2697 2714 TO 2725 2733 TO 2735 -
1903. 2737 TO 2739 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 -
1904. 2817 TO 2819 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 -
1905. 2917 TO 2944 2949 TO 2956 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 -
1906. 2999 TO 3002 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 -
1907. 3029 TO 3032 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 -
1908. 3059 TO 3062 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 -
1909. 3170 3215 3217 3269 3276 3277 3307 TO 3312 3437 TO 3462 3464 TO 3469 3471 -
1910. 3472 TO 3475 3477 TO 3507 3510 TO 3517 3520 TO 3548 3551 TO 3602 3607 TO 3656 -
1911. 3658 TO 3683 3686 3689 3690 3693 TO 3750 3752 3756 TO 3785 3787 TO 3793 3796 -
1912. 3797 TO 3799 3802 3803 3806 TO 3826 3828 3829 3831 TO 3868 3873 TO 3893 3897 -
1913. 3899 TO 3901 3905 TO 3929 3934 TO 3962 3964 TO 3968 3971 TO 3973 -
1914. 3975 TO 3996 4024 4025 4028 TO 4034 4036 4037 4040 4042 4043 4046 4049 4052 -
1915. 4064 4066 4076 4080 4092 4093 4096 4099 4100 4102 TO 4111 4117 4118 4120 -
1916. 4122 4124 4126 4128 4129 4131 4132 4134 TO 4149 4347 TO 4350 4353 4354 4358 -
```

```
1917. 4359 TO 4366 4369 TO 4409 4415 TO 4432 4436 TO 4445 4449 4450 4452 -
1918. 4454 TO 4484 4487 TO 4491 4493 TO 4506 4513 4515 4516 4518 4519 4521 4522 -
1919. 4524 TO 4532 4535 TO 4550 4555 TO 4560 4567 TO 4579 4585 TO 4599 4602 4603 -
1920. 4605
1921. FU 41000 MEMB 4606 TO 4611 4614 TO 4620 4623 TO 4634
1922. FU 41000 MEMB 4659 4660 4663 4665 4666 4669 TO 4672 4674 TO 4679 4681 TO 4688 -
1923. 4690 4691 4693 4694 4705 TO 4715 4717 TO 4721 4723 4724 4728 TO 4731 4733 -
1924. 4734 4738 TO 4741 4743 4744 4748 TO 4751 4753 4754 4758 TO 4761 4763 4764 -
1925. 4768 TO 4771 4773 4774 4778 TO 4781 4783 4784 4788 TO 4817 4822 TO 4825 4829 -
1926. 4832 4836 TO 4838 4840 4842 TO 4847 4849 4851 TO 4859 4861 TO 4870 -
1927. 4875 TO 4877 4879 4880 4882 TO 5158 5160 TO 5169 5172 5175 TO 5178 -
1928. 5180 TO 5207
1929. ****************************************
1930. KZ 0.85 MEMB 97 130 1005 2298 4353 4374 TO 4377 4406 TO 4409 4593 TO 4596 -
1931. 4598 4599 4602 4603 4817 4822 TO 4825 4829 4845 4851 4852 4862 4865 4875 -
1932. 4876 4892 TO 4895
1933. KY 0.425 MEMB 4817 4829
1934. MAIN 250 MEMB 853 855 TO 858 890 898 903 1005 1537 1540 1544 1546 1547 1549 -
1935. 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 1596 TO 1602 1604 TO 1611 -
1936. 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 TO 1691 1693 1697 1842 -
1937. 1843 TO 1845 1940 1941 2471 2473 2475 2476 2499 2501 2502 2521 3085 3088 3106 -
1938. 3166 3170 3215 3217 3307 TO 3312 4362 TO 4366 4369 TO 4407 4409 4555 TO 4560 -
1939. 4567 TO 4573 4575 TO 4578 4585 TO 4596 4598 4599 4602 4603 4605 TO 4611 4614 -
1940. 4615 TO 4620 4623 TO 4634 4659 4660 4669 TO 4672 4674 TO 4679 4682 TO 4687 -
1941. 4817 4822 TO 4825 4829 4851 4852 4855 4862 TO 4865 4868 4875 TO 4877 4879 -
1942. 4880 4882 TO 4885 4889 4891 TO 4897 5176 5177 5180 5201 5203 TO 5205 5207 -
1943. 5216 TO 5221
1944. KZ 0.425 MEMB 3307 TO 3312 4362 TO 4365 4863 4864
1945. KZ 0.85 MEMB 800 1629 1637 1661 1670 1677 1690 1697 1968 1970 1971 1989 1996 -
1946. 1997 TO 1998 2592 2634 2676 2718 2760 2802 2844 2917 TO 2944 2949 TO 2956 -
1947. 2959 TO 2970 3088 3097 3102 4354 4715 4817 4829 4912 4924 4936 4948 4960 -
1948. 4972 4984 4998 5004 5019 5025 5040 5046 5061 5067 5082 5088 5103 5109 5124 -
1949. 5130 5145 5151 5176 5177 5180 5201 5203 TO 5205 5207
1950. KY 0.85 MEMB 800 1629 1637 1661 1670 1677 1690 1697 1968 1970 1971 1989 1996 -
1951. 1997 TO 1998 2592 2634 2676 2718 2760 2802 2844 2917 TO 2944 2949 TO 2956 -
1952. 2959 TO 2970 3088 3097 3102 4354 4406 TO 4409 4593 TO 4596 4598 4599 4602 -
1953. 4603 4715 4822 TO 4825 4845 4851 4852 4912 4924 4936 4948 4960 4972 4984 -
1954. 4998 5004 5019 5025 5040 5046 5061 5067 5082 5088 5103 5109 5124 5130 5145 -
1955. 5151 5176 5177 5180 5201 5203 TO 5205 5207
1956. KZ 0.425 MEMB 4370 TO 4373 4378 TO 4405 4591 4592
1957. KY 0.85 MEMB 4370 TO 4373 4378 TO 4405 4591 4592
1958. LZ 14 MEMB 5 13 373 439 472 1388 1414 1448 1747 1748 2015 2016 2055 2056 2095 -
1959. 2096 2135 2136 2175 2176 2215 2216 2256 2257 2298 5164 5181 5199 5202 5206
1960. KY 0.85 MEMB 853 855 TO 858 890 898 903 1537 1540 1544 1546 1547 1549 1551 -
1961. 1556 1573 1576 1577 1580 1582 1583 1585 1587 1596 TO 1602 1604 TO 1611 1629 -
1962. 1633 1637 1644 1652 1661 1670 1673 1677 1689 TO 1691 1693 1697 1842 TO 1845 -
1963. 1940 1941 2471 2473 2475 2476 2499 2501 2502 2521 2535 2537 2539 2541 2543 -
1964. 2567 TO 2571 2595 2599 2611 2613 2637 2639 2641 2653 TO 2655 2679 2681 2683 -
1965. 2695 TO 2697 2721 2723 2725 2737 TO 2739 2763 2765 2767 2779 TO 2781 2805 -
1966. 2807 2809 2821 TO 2823 2847 2849 2851 2863 TO 2865 2995 2996 2999 3000 3007 -
1967. 3008 3011 3012 3019 3020 3023 3024 3031 3032 3035 3036 3043 3044 3047 3048 -
1968. 3055 3056 3059 3060 3067 3068 3071 3072 3085 3088 3096 3101 3106 3166 3170 -
1969. 3215 3217 4366 4369 4503 4504 4555 TO 4560 4567 TO 4579 4585 TO 4590 4605 -
1970. 4606 TO 4611 4614 TO 4620 4659 4660 4669 TO 4672 4708 4712 4718 4724 4728 -
1971. 4734 4738 4744 4748 4754 4758 4764 4768 4774 4778 4784 4788 4804 4806 4808 -
1972. 4810 4812 4814 4816 4846 4855 4862 TO 4865 4868 4875 TO 4877 4900 4902 4904 -
```

```
1973. 4906 4914 4915 4917 4918 4926 4927 4929 4930 4938 4939 4941 4942 4950 4951 -
1974. 4953 4954 4962 4963 4965 4966 4974 4975 4977 4978 4986 4987 4989 4990 5002 -
1975. 5005 5007 5008 5010 5011 5023 5026 5028 5029 5031 5032 5044 5047 5049 5050 -
1976. 5052 5053 5065 5068 5070 5071 5073 5074 5086 5089 5091 5092 5094 5095 5107 -
1977. 5110 5112 5113 5115 5116 5128 5131 5133 5134 5136 5137 5149 5152 5154 5155 -
1978. 5157 5158 5183
1979. KZ 0.85 MEMB 853 855 TO 858 890 898 903 1537 1540 1544 1546 1547 1549 1551 -
1980. 1573 1576 1577 1580 1582 1583 1585 1587 1596 TO 1602 1604 TO 1611 1629 1633 -
1981. 1637 1644 1652 1661 1670 1673 1677 1689 TO 1691 1693 1697 1842 TO 1845 1940 -
1982. 1941 2298 2471 2473 2475 2476 2499 2501 2502 2521 2535 2537 2539 2541 2543 -
1983. 2567 TO 2571 2595 2599 2611 2613 2637 2639 2641 2653 TO 2655 2679 2681 2683 -
1984. 2695 TO 2697 2721 2723 2725 2737 TO 2739 2763 2765 2767 2779 TO 2781 2805 -
1985. 2807 2809 2821 TO 2823 2847 2849 2851 2863 TO 2865 2995 2996 2999 3000 3007 -
1986. 3008 3011 3012 3019 3020 3023 3024 3031 3032 3035 3036 3043 3044 3047 3048 -
1987. 3055 3056 3059 3060 3067 3068 3071 3072 3085 3088 3096 3101 3106 3166 3170 -
1988. 3215 3217 4366 4369 4555 TO 4560 4567 TO 4579 4585 TO 4590 4605 TO 4611 4614 -
1989. 4615 TO 4620 4659 4660 4669 TO 4672 4708 4712 4718 4724 4728 4734 4738 4744 -
1990. 4748 4754 4758 4764 4768 4774 4778 4784 4788 4804 4806 4808 4810 4812 4814 -
1991. 4816 4846 4855 4868 4877 4900 4902 4904 4906 4914 4915 4917 4918 4926 4927 -
1992. 4929 4930 4938 4939 4941 4942 4950 4951 4953 4954 4962 4963 4965 4966 4974 -
1993. 4975 4977 4978 4986 4987 4989 4990 5002 5005 5007 5008 5010 5011 5023 5026 -
1994. 5028 5029 5031 5032 5044 5047 5049 5050 5052 5053 5065 5068 5070 5071 5073 -
1995. 5074 5086 5089 5091 5092 5094 5095 5107 5110 5112 5113 5115 5116 5128 5131 -
1996. 5133 5134 5136 5137 5149 5152 5154 5155 5157 5158
1997. LY 3.25 MEMB 1966 1995 2019 2036 2059 2076 2099 2116 2139 2156 2179 2196 2219 -
1998. 2236 2260 2277 2536 2557 2989 2993 3001 3005 3013 3017 3025 3029 3037 3041 -
1999. 3049 3053 3061 3065 4681
2000. LX 6.5 MEMB 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 -
2001. 648 673 674 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 -
2002. 795 796 803 809 810 827 828 831 1019 TO 1024 1047 1049 1072 1128 1162 1202 -
2003. 1206 1283 1317 1337 1341 1422 1476 1480 1497 1596 1604 1611 1633 1652 1673 -
2004. 1693 1973 1974 1976 1979 1981 1999 TO 2002 2004 TO 2006 2023 TO 2027 2040 -
2005. 2041 TO 2043 2063 TO 2067 2080 TO 2083 2103 TO 2107 2120 TO 2123 2125 TO 2127 -
2006. 2143 TO 2147 2160 TO 2163 2183 TO 2187 2200 TO 2203 2223 TO 2227 -
2007. 2240 TO 2243 2245 TO 2247 2264 TO 2268 2281 TO 2284 2540 2559 2565 2588 2630 -
2008. 2672 2714 2756 2798 2840 2990 2994 3002 3006 3014 3018 3026 3030 3038 3042 -
2009. 3050 3054 3062 3066 3085 4688 4690 4691 4693 4694 4709 4711 4714 4717 4719 -
2010. 4720 4729 4730 4739 4740 4749 4750 4759 4760 4769 4770 4779 4780 4789 4791 -
2011. 4793 4795 4797 4799 4801 4803 4805 4807 4809 4811 4813 4815 4888 4890 4898 -
2012. 4901 4905 4907 TO 4909 4919 TO 4921 4931 TO 4933 4943 TO 4945 4955 TO 4957 -
2013. 4967 TO 4969 4979 TO 4981 4991 TO 4997 5012 TO 5018 5033 TO 5039 -
2014. 5054 TO 5060 5075 TO 5081 5096 TO 5102 5117 TO 5123 5138 TO 5144
2015. LY 6.5 MEMB 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 -
2016. 648 673 674 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 -
2017. 795 796 803 809 810 827 828 831 1019 TO 1024 1047 1049 1072 1128 1162 1202 -
2018. 1206 1283 1317 1337 1341 1422 1476 1480 1497 1596 1604 1611 1633 1652 1673 -
2019. 1693 1973 1974 1976 1979 1981 1999 TO 2002 2004 TO 2006 2023 TO 2027 2040 -
2020. 2041 TO 2043 2063 TO 2067 2080 TO 2083 2103 TO 2107 2120 TO 2123 2125 TO 2127 -
2021. 2143 TO 2147 2160 TO 2163 2183 TO 2187 2200 TO 2203 2223 TO 2227 -
2022. 2240 TO 2243 2245 TO 2247 2264 TO 2268 2281 TO 2284 2540 2559 2565 2588 2630 -
2023. 2672 2714 2756 2798 2840 2990 2994 3002 3006 3014 3018 3026 3030 3038 3042 -
2024. 3050 3054 3062 3066 3085 4688 4690 4691 4693 4694 4709 4711 4714 4717 4719 -
2025. 4720 4729 4730 4739 4740 4749 4750 4759 4760 4769 4770 4779 4780 4789 4791 -
2026. 4793 4795 4797 4799 4801 4803 4805 4807 4809 4811 4813 4815 4888 4890 4898 -
2027. 4901 4905 4907 TO 4909 4919 TO 4921 4931 TO 4933 4943 TO 4945 4955 TO 4957 -
2028. 4967 TO 4969 4979 TO 4981 4991 TO 4997 5012 TO 5018 5033 TO 5039 -
```

```
2029. 5054 TO 5060 5075 TO 5081 5096 TO 5102 5117 TO 5123 5138 TO 5144
2030. LX 3.25 MEMB 1966 1995 2019 2036 2059 2076 2099 2116 2139 2156 2179 2196 2219 -
2031. 2236 2260 2277 2536 2557 2989 2993 3001 3005 3013 3017 3025 3029 3037 3041 -
2032. 3049 3053 3061 3065 4681
2033. KY 2 MEMB 802 806 818 1987 1988 1991 2534 2538 2542 2556 2558 2560 -
2034. 2589 TO 2591 2593 2594 2596 2598 2607 TO 2609 2631 TO 2633 2635 2636 2638 -
2035. 2640 2649 TO 2651 2673 TO 2675 2677 2678 2680 2682 2691 TO 2693 2715 TO 2717 -
2036. 2719 2720 2722 2724 2733 TO 2735 2757 TO 2759 2761 2762 2764 2766 -
2037. 2775 TO 2777 2799 TO 2801 2803 2804 2806 2808 2817 TO 2819 2841 TO 2843 2845 -
2038. 2846 2848 2850 2859 TO 2861 2973 TO 2986 4705 TO 4707 4713 4721 4723 4731 -
2039. 4733 4741 4743 4751 4753 4761 4763 4771 4773 4781 4783 4879 4880 4899 4903 -
2040. 4910 4911 4913 4916 4922 4923 4925 4928 4934 4935 4937 4940 4946 4947 4949 -
2041. 4952 4958 4959 4961 4964 4970 4971 4973 4976 4982 4983 4985 4988 -
2042. 4999 TO 5001 5003 5006 5009 5020 TO 5022 5024 5027 5030 5041 TO 5043 5045 -
2043. 5048 5051 5062 TO 5064 5066 5069 5072 5083 TO 5085 5087 5090 5093 -
2044. 5104 TO 5106 5108 5111 5114 5125 TO 5127 5129 5132 5135 5146 TO 5148 5150 -
2045. 5153 5156
2046. LZ 6.5 MEMB 1942 3276 3277 4597 4817 4829 4832 4838 4840 4842 4847 4849 4853 -
2047. 4856
2048. KY 0.1 MEMB 3307 TO 3312 4362 TO 4365 4862 TO 4865 4875 4876
2049. KZ 0.63 MEMB 4623 TO 4626 4631 TO 4634 4674 TO 4679 4682 TO 4687 4882 TO 4885 -
2050. 5176 5177 5180 5201 5203 TO 5205 5207
2051. KY 1.07 MEMB 4623 TO 4626 4631 TO 4634 4674 TO 4679 4682 TO 4687 4882 TO 4885 -
2052. 5176 5177 5180 5201 5203 TO 5205 5207
2053. TRACK 0 MEMB 5 13 175 208 241 274 307 340 373 406 439 460 472 551 552 559 -
2054. 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 681 -
2055. 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 802 -
2056. 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 -
2057. 1019 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 -
2058. 1317 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 -
2059. 1546 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 -
2060. 1596 TO 1602 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 -
2061. 1690 TO 1691 1693 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 -
2062. 1966 1968 1970 1971 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 -
2063. 2004 TO 2006 2015 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 -
2064. 2063 TO 2067 2076 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 -
2065. 2125 TO 2127 2135 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 -
2066. 2183 TO 2187 2196 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 -
2067. 2245 TO 2247 2256 2257 2260 2264 TO 2268 2277 2281 TO 2284 2471 2473 2475 -
2068. 2476 2499 2501 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 2588 -
2069. 2589 TO 2596 2598 2599 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 -
2070. 2654 TO 2655 2672 TO 2683 2691
2071. TRACK 0 MEMB 2692 2693 2695 TO 2697 2714 TO 2725 2733 TO 2735 2737 TO 2739 -
2072. 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 2817 TO 2819 -
2073. 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 2917 TO 2944 -
2074. 2949 TO 2955 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 2999 TO 3002 -
2075. 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 3029 TO 3032 -
2076. 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 3059 TO 3062 -
2077. 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 3170 3215 -
2078. 3217 3269 3276 3277 3307 TO 3312 4362 TO 4366 4369 TO 4409 4502 TO 4506 4513 -
2079. 4515 4516 4518 4519 4521 4522 4524 TO 4532 4555 TO 4560 4567 TO 4579 4585 -
2080. 4586 TO 4599 4602 4603 4605 TO 4611 4614 TO 4620 4623 TO 4634 4659 4660 4669 -
2081. 4670 TO 4672 4674 TO 4679 4682 TO 4688 4690 4691 4693 4694 4705 TO 4715 4717 -
2082. 4718 TO 4721 4723 4724 4728 TO 4731 4733 4734 4738 TO 4741 4743 4744 4748 -
2083. 4749 TO 4751 4753 4754 4758 TO 4761 4763 4764 4768 TO 4771 4773 4774 4778 -
2084. 4779 TO 4781 4783 4784 4788 TO 4817 4822 TO 4825 4829 4832 4836 TO 4838 4840 -
```

```
2085. 4842 TO 4847 4849 4851 TO 4859 4861 TO 4870 4875 TO 4877 4879 4880 -
2086. 4882 TO 5158 5160 TO 5169 5172 5175 TO 5178 5180 TO 5214 5216 TO 5221
2087. CHECK CODE MEMB 5 13 175 208 241 274 307 340 373 406 439 460 472 551 552 559 -
2088. 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 681 -
2089. 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 802 -
2090. 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 -
2091. 1019 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 -
2092. 1317 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 -
2093. 1546 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 -
2094. 1596 TO 1602 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 -
2095. 1690 TO 1691 1693 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 -
2096. 1966 1968 1970 1971 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 -
2097. 2004 TO 2006 2015 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 -
2098. 2063 TO 2067 2076 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 -
2099. 2125 TO 2127 2135 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 -
2100. 2183 TO 2187 2196 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 -
2101. 2245 TO 2247 2256 2257 2260 2264 TO 2268 2277 2281 TO 2284 2471 2473 2475 -
2102. 2476 2499 2501 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 2588 -
2103. 2589 TO 2596 2598 2599 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 -
2104. 2654 TO 2655 2672 TO 2683 2691
```

STAAD.Pro CODE CHECKING - (LRFD 3RD EDITION) v1.0
****

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.379	106
		14.03 C	-3.73	19.34	5.30
13	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.331	107
		0.21 C	-0.22	-29.14	5.30
175	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.428	106
		26.64 T	1.59	27.64	0.00
208	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.262	103
		20.77 C	-0.39	16.75	0.00
241	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.492	106
		26.90 T	1.74	32.40	0.00
274	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.285	103
		20.78 C	-0.45	18.46	0.00
307	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.564	106
		27.25 T	1.37	39.44	0.00
340	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.316	103
		20.97 C	-0.39	21.16	0.00
373	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.385	107
		0.03 T	-0.16	29.63	7.70
406	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.330	103
		22.29 C	-0.33	22.27	0.00
439	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.496	106
		3.48 T	-3.67	27.35	0.00
460	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.210	106
		14.24 T	3.20	-5.34	0.00
472	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.414	105
		15.67 C	-0.41	28.36	0.00
551	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.712	106
		47.40 C	-0.02	0.17	3.25
552	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.067	106
		3.45 C	-0.05	0.08	2.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
559	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.721	106
		46.53 C	0.12	0.17	0.00
564	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.424	106
		24.44 C	0.17	0.15	0.00
565	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.580	106
		35.83 C	-0.17	0.15	0.00
566	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.700	106
		45.05 C	0.12	0.17	3.25
583	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.706	106
		47.00 C	-0.02	0.17	0.00
584	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.100	106
		8.99 C	-0.02	0.09	2.01
587	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.602	106
		39.20 C	0.06	0.16	3.25
612	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.809	106
		54.16 C	-0.04	0.17	3.25
620	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.814	106
		52.85 C	0.14	0.17	0.00
624	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.077	106
		4.31 C	0.06	0.09	1.24
625	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.453	106
		25.83 C	0.20	0.16	0.00
626	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.666	106
		41.38 C	-0.20	0.16	0.00
627	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.789	106
		51.04 C	0.14	0.17	3.25
644	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.807	106
		53.98 C	-0.04	0.17	0.00
645	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.132	106
		12.87 C	-0.02	0.10	2.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
648	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.709	106
		46.47 C	0.08	0.17	3.25
673	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.889	106
		60.24 C	-0.02	0.18	3.25
674	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.066	106
		3.19 C	-0.05	0.08	2.01
681	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.883	106
		58.14 C	0.12	0.18	0.00
686	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.441	106
		25.47 C	0.17	0.17	0.00
687	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.714	106
		45.37 C	-0.17	0.17	0.00
688	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.850	106
		55.77 C	0.12	0.18	3.25
705	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.893	106
		60.51 C	-0.02	0.18	0.00
706	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.276	106
		17.19 C	-0.01	0.11	2.01
709	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.803	106
		53.57 C	0.05	0.17	3.25
734	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.884	106
		59.93 C	0.01	0.18	3.25
735	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.279	107
		18.26 C	-0.03	0.07	2.01
742	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.893	106
		59.39 C	0.08	0.18	0.00
747	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.560	106
		35.00 C	0.11	0.17	0.00
748	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.768	106
		50.09 C	-0.11	0.17	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
749	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.881	106
		58.53 C	0.08	0.18	3.25
766	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.881	106
		59.73 C	0.01	0.18	0.00
767	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.282	106
		17.73 C	-0.01	0.11	2.01
770	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.777	106
		52.18 C	0.02	0.17	3.25
795	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.712	106
		20.43 C	0.04	1.30	3.25
796	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.073	106
		1.72 T	0.00	0.19	2.01
800	ST UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.026	106
		2.36 C	0.00	0.00	3.20
802	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.099	107
		1.93 C	0.00	0.01	2.17
803	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.531	106
		17.65 C	0.05	-1.28	0.00
806	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.253	106
		2.81 C	0.00	0.01	2.06
808	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.904	106
		10.50 C	0.00	2.36	0.00
809	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.521	106
		15.09 C	0.00	-1.45	0.00
810	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.761	106
		21.21 C	0.05	1.41	3.25
818	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.315	106
		7.37 C	0.00	0.03	1.97
827	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.555	106
		20.91 C	0.04	-1.19	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
828	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.104	107
		11.78 C	-0.01	-0.09	2.01
831	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.588	106
		19.65 C	0.02	0.97	3.25
853	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.088	112
		0.01 T	0.00	0.07	3.25
855	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.785	112
		4.03 C	0.00	-0.11	3.25
856	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.803	112
		4.14 C	0.00	-0.11	3.25
857	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.815	112
		4.21 C	0.00	-0.11	3.25
858	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.780	112
		4.00 C	0.00	-0.11	3.25
890	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.776	112
		3.98 C	0.00	-0.11	3.25
898	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.380	106
		1.76 C	0.00	-0.08	3.25
903	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.793	112
		4.08 C	0.00	-0.11	3.25
1005	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.465	111
		3.93 C	0.00	-0.14	3.25
1019	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.738	106
		48.52 C	-0.02	0.21	0.00
1020	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.560	106
		36.47 C	0.09	0.12	0.00
1021	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.824	106
		53.59 C	0.14	0.18	3.25
1022	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.454	106
		25.97 C	0.20	0.16	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1023	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.773	106
		51.99 C	-0.02	0.17	3.25
1024	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.502	106
		32.58 C	0.01	0.16	0.00
1047	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.345	106
		21.45 C	0.08	0.10	0.00
1049	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.449	106
		27.86 C	-0.01	0.20	0.00
1072	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.539	106
		34.08 C	0.07	0.17	0.00
1126	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.319	106
		2.10 T	0.76	23.43	0.00
1128	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.283	106
		17.50 C	-0.03	0.11	2.01
1160	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.208	111
		25.22 C	-0.12	12.51	0.00
1162	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.053	106
		2.79 C	-0.03	0.07	2.01
1202	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.560	106
		32.72 C	0.17	0.22	0.00
1206	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.633	106
		40.92 C	-0.02	0.21	3.25
1275	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.536	106
		27.09 T	1.63	36.29	0.00
1283	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	106
		4.03 C	-0.06	0.09	2.01
1309	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.303	103
		20.88 C	-0.44	19.97	0.00
1317	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.248	106
		15.10 C	-0.02	0.11	2.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1337	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.853	106
		55.71 C	0.14	0.18	0.00
1341	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.695	106
		43.52 C	-0.20	0.16	0.00
1388	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.329	107
		7.12 T	-0.05	-28.98	5.30
1414	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.380	107
		2.88 T	-0.04	29.45	7.70
1422	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.277	107
		18.44 C	-0.01	0.07	2.01
1436	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.230	104
		4.18 C	0.44	18.77	0.00
1448	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.267	106
		17.24 T	-0.37	-18.38	0.00
1476	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.795	106
		53.64 C	-0.02	0.17	0.00
1480	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.673	106
		45.05 C	-0.01	0.16	0.00
1497	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.115	107
		13.08 C	-0.02	0.06	2.01
1523	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.114	111
		2.21 T	0.00	-0.19	3.25
1537	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.638	114
		9.93 C	0.00	-0.19	3.25
1540	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.148	104
		8.79 T	0.00	-0.19	3.25
1544	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.633	107
		10.24 C	0.00	-0.14	3.25
1546	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.728	106
		11.97 C	0.00	-0.14	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1547	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.345	104
		24.18 T	0.00	-0.19	3.25
1549	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.409	107
		6.18 C	0.00	-0.14	3.25
1551	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.354	106
		5.18 C	0.00	-0.14	3.25
1556	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.109	104
		0.18 C	0.00	-0.19	3.25
1573	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.423	105
		6.03 C	0.00	-0.19	3.25
1576	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.404	105
		5.69 C	0.00	-0.19	3.25
1577	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.318	109
		4.12 C	0.00	-0.19	3.25
1580	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.412	110
		5.83 C	0.00	-0.19	3.25
1582	D UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.132	104
		8.80 T	0.00	-1.97	1.43
1583	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.794	105
		12.76 C	0.00	-0.19	3.25
1585	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.374	110
		5.13 C	0.00	-0.19	3.25
1587	D UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.069	104
		5.92 T	-0.17	-0.33	1.00
1596	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.539	116
		7.11 C	0.00	0.03	3.25
1597	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.362	114
		1.47 C	0.00	-0.11	3.25
1598	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.338	116
		1.50 C	0.00	-0.08	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1599	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.309	107
		1.33 C	0.00	-0.08	3.25
1600	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.362	107
		1.65 C	0.00	-0.08	3.25
1601	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.397	114
		1.68 C	0.00	-0.11	3.25
1602	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.318	116
		1.38 C	0.00	-0.08	3.25
1604	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.571	114
		7.48 C	0.00	0.03	3.25
1605	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.520	114
		2.43 C	0.00	-0.11	3.25
1606	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.492	114
		2.25 C	0.00	-0.11	3.25
1607	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.434	114
		1.90 C	0.00	-0.11	3.25
1608	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.396	114
		1.68 C	0.00	-0.11	3.25
1609	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.552	114
		2.62 C	0.00	-0.11	3.25
1610	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.464	114
		2.09 C	0.00	-0.11	3.25
1611	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.249	114
		3.04 C	0.00	0.03	3.25
1629	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.067	114
		4.96 T	0.00	-0.04	1.80
1633	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.068	114
		2.80 T	0.00	0.03	0.00
1637	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.113	114
		5.39 C	0.00	-0.04	1.80

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1644	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.128	113
		0.92 C	0.00	-0.19	3.25
1652	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.229	106
		2.81 C	0.00	0.02	0.00
1661	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.053	114
		3.00 T	0.00	-0.04	1.80
1670	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.070	114
		5.27 T	0.00	-0.04	1.80
1673	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.062	114
		2.42 T	0.00	0.03	0.00
1677	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.118	114
		5.70 C	0.00	-0.04	1.80
1689	D UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.078	104
		5.82 T	0.14	-0.45	4.58
1690	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.094	114
		4.16 C	0.00	-0.04	1.80
1691	D UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.375	110
		5.28 C	-0.04	-5.27	0.00
1693	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.238	106
		3.02 C	0.00	0.02	0.00
1697	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.070	106
		3.05 C	0.00	-0.03	1.80
1709	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.539	106
		0.59 C	-6.06	-28.73	4.20
1747	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.424	106
		0.99 C	-3.66	-27.35	0.00
1748	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.307	105
		1.28 T	-0.41	-28.36	0.00
1823	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.522	106
		0.59 C	-5.63	-28.73	4.20

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1824	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.514	104
		0.78 C	-5.41	-28.73	4.20
1837	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.221	110
		2.57 T	-0.03	-3.14	1.09
1838	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.413	106
		1.47 C	1.48	-32.05	0.00
1839	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.409	105
		11.70 C	1.58	32.58	0.00
1840	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.421	106
		18.76 T	1.24	-32.06	0.00
1841	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.435	104
		23.19 C	1.22	-32.05	0.00
1842	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.501	107
		14.51 C	0.00	-0.20	3.25
1843	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.738	107
		12.16 C	0.00	-0.14	3.25
1844	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.155	105
		1.90 C	0.00	-0.19	3.25
1845	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.151	104
		9.32 T	0.00	-0.19	3.25
1940	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.416	112
		5.90 C	0.00	-0.19	3.25
1941	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.826	111
		7.81 C	0.00	-0.14	3.25
1942	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.113	111
		8.00 C	0.03	-0.56	3.49
1966	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.242	111
		26.29 C	-0.01	-0.10	1.63
1968	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.237	112
		1.53 C	0.00	0.00	2.87

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1970	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.436	112
		3.65 C	0.00	0.00	2.54
1971	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.521	112
		5.84 C	0.00	0.00	2.21
1973	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.758	106
		18.10 T	2.58	-0.21	0.00
1974	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.762	106
		19.57 T	-2.58	-0.21	0.00
1976	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.401	111
		25.62 C	0.02	0.14	0.00
1979	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.653	106
		18.59 C	1.68	-0.10	0.39
1981	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.513	106
		10.61 T	1.61	0.21	0.00
1987	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.070	106
		3.94 T	0.00	0.01	2.17
1988	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.061	105
		3.74 T	0.00	0.00	0.86
1989	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.528	112
		7.21 C	0.00	0.00	0.00
1991	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.064	103
		5.62 T	0.00	-0.01	1.15
1995	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.239	111
		26.31 C	0.01	-0.08	1.63
1996	ST UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.017	105
		1.74 C	0.00	0.00	2.87
1997	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.355	103
		2.98 C	0.00	0.00	2.54
1998	ST UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.037	112
		4.93 C	0.00	0.00	2.21

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
1999	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.763	106
		23.96 T	-2.59	-0.16	0.00
2000	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.761	106
		23.44 T	2.58	-0.16	0.00
2001	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.405	111
		26.52 C	-0.02	0.11	0.00
2002	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.353	104
		9.14 T	-1.12	0.12	1.01
2004	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.785	106
		52.71 C	0.01	0.18	0.00
2005	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.644	106
		41.99 C	0.01	0.20	0.00
2006	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.751	106
		50.29 C	0.01	0.18	3.25
2015	ST	HE500A	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.222	105
		0.83 T	0.08	21.31	0.00
2016	ST	HE500A	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.203	106
		0.90 T	-0.37	18.38	0.00
2019	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.491	112
		53.84 C	0.01	-0.19	1.63
2023	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.647	111
		40.19 C	-0.01	-0.43	1.24
2024	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.751	112
		48.08 C	0.02	0.27	0.00
2025	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.765	112
		50.22 C	0.00	0.23	0.00
2026	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.121	106
		9.14 C	-0.01	-0.23	0.16
2027	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.505	112
		28.97 C	0.01	0.32	0.78

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2036	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.484	112
		53.88 C	-0.01	-0.16	1.63
2040	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.731	111
		46.27 C	0.01	-0.42	1.24
2041	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.797	112
		52.00 C	-0.02	0.24	0.00
2042	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.770	112
		51.89 C	0.00	0.17	0.00
2043	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.142	106
		11.91 C	0.00	-0.25	1.01
2055	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.226	105
		0.81 T	0.47	20.16	0.00
2056	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.250	105
		1.05 T	-0.38	-22.84	0.00
2059	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.488	106
		61.75 T	-0.03	0.30	1.63
2063	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.575	106
		55.61 T	0.03	0.68	1.24
2064	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.620	112
		39.59 C	0.02	0.22	0.00
2065	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.616	111
		40.67 C	0.00	0.17	0.00
2066	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.128	106
		9.16 C	-0.01	-0.26	0.00
2067	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.435	112
		24.73 C	0.01	0.28	0.78
2076	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.485	106
		61.76 T	0.03	0.29	1.63
2080	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.631	112
		39.93 C	0.02	-0.36	1.24

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2081	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.655	112
		43.02 C	-0.03	0.18	0.00
2082	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.627	112
		42.19 C	0.02	-0.20	1.63
2083	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.150	103
		13.46 T	0.00	0.29	1.01
2095	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.458	106
		0.51 C	1.37	-39.44	0.00
2096	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.244	105
		0.95 T	-0.62	-21.34	0.00
2099	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.473	106
		58.16 T	-0.05	0.31	1.63
2103	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.525	106
		47.33 T	0.04	0.68	1.24
2104	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.595	112
		37.60 C	0.03	0.22	0.00
2105	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.596	111
		38.99 C	-0.01	0.18	0.00
2106	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.392	106
		23.73 C	-0.01	-0.29	0.00
2107	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.399	112
		21.90 C	0.02	0.29	0.78
2116	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.462	106
		58.20 T	0.05	0.27	1.63
2120	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.606	112
		38.27 C	0.03	-0.35	1.24
2121	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.635	112
		41.46 C	-0.03	0.18	0.00
2122	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		40.71 C	0.03	-0.20	1.63

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2123	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.145	103
		12.75 T	0.00	0.29	1.01
2125	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.854	106
		57.45 C	0.03	0.18	0.00
2126	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.763	106
		50.33 C	-0.07	0.17	0.00
2127	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.855	106
		57.53 C	0.03	0.18	3.25
2135	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.435	106
		0.31 C	1.63	-36.29	0.00
2136	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.226	105
		0.79 T	-0.84	-18.83	0.00
2139	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.478	106
		58.34 T	-0.07	0.30	1.63
2143	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.534	106
		48.29 T	0.05	0.68	1.24
2144	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.598	112
		37.66 C	0.04	0.22	0.00
2145	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.599	112
		39.04 C	-0.02	0.18	0.00
2146	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.365	106
		21.72 C	-0.02	-0.29	0.00
2147	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.401	112
		22.01 C	0.02	0.29	0.78
2156	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.469	106
		58.37 T	0.07	0.27	1.63
2160	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.608	112
		38.29 C	0.03	-0.35	1.24
2161	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.637	112
		41.48 C	-0.04	0.18	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2162	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.613	112
		40.74 C	0.05	-0.20	1.63
2163	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.141	103
		11.99 T	0.00	0.28	1.01
2175	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.400	106
		0.06 C	1.74	-32.40	0.00
2176	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.207	103
		0.14 C	-0.45	-18.46	0.00
2179	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.483	106
		58.56 T	-0.08	0.30	1.63
2183	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.543	106
		49.48 T	0.06	0.68	1.24
2184	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.600	112
		37.72 C	0.04	0.22	0.00
2185	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.601	112
		39.08 C	-0.03	0.18	0.00
2186	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.330	106
		19.23 C	-0.02	-0.29	0.00
2187	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.404	112
		22.12 C	0.03	0.29	0.78
2196	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.476	106
		58.59 T	0.09	0.28	1.63
2200	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		38.28 C	0.04	-0.35	1.24
2201	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.639	112
		41.49 C	-0.04	0.18	0.00
2202	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.617	112
		40.76 C	0.06	-0.20	1.63
2203	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.135	111
		9.21 T	-0.01	0.29	1.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2215	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.345	106
		0.24 T	1.59	-27.64	0.00
2216	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.187	103
		0.25 C	-0.39	-16.75	0.00
2219	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.489	106
		58.94 T	-0.10	0.30	1.63
2223	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.554	106
		50.89 T	0.07	0.68	1.24
2224	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.608	112
		38.11 C	0.05	0.23	0.00
2225	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		39.39 C	-0.08	-0.24	1.63
2226	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.289	106
		16.19 C	-0.02	-0.29	0.00
2227	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.411	112
		22.54 C	0.03	0.29	0.78
2236	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.485	106
		58.95 T	0.11	0.29	1.63
2240	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.616	112
		38.64 C	0.04	-0.35	1.24
2241	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.647	112
		41.81 C	-0.05	0.19	0.00
2242	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.625	112
		41.06 C	0.08	-0.20	1.63
2243	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.136	111
		9.25 T	-0.01	0.29	1.01
2245	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.445	106
		24.50 C	-0.17	0.21	0.00
2246	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.306	106
		16.42 C	0.06	0.21	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2247	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.407	106
		23.76 C	0.06	0.21	0.00
2256	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.270	106
		0.51 T	0.76	-23.43	0.00
2257	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.153	106
		1.16 T	0.18	14.15	0.00
2260	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.510	106
		51.20 T	-0.45	0.28	1.63
2264	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.564	112
		33.80 C	0.07	-0.39	1.24
2265	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.593	111
		36.65 C	-0.07	0.23	0.00
2266	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.633	111
		37.96 C	0.26	-0.24	1.63
2267	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.273	106
		15.80 C	0.03	-0.22	0.00
2268	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.427	111
		23.16 C	-0.04	0.30	0.78
2277	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.529	106
		53.71 T	0.45	0.28	1.63
2281	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.575	112
		34.50 C	-0.07	-0.40	1.24
2282	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.594	111
		36.51 C	0.07	0.24	0.00
2283	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.648	112
		37.75 C	-0.34	-0.25	1.63
2284	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.128	112
		11.10 T	0.01	0.25	1.01
2471	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.150	114
		0.83 C	0.00	-0.13	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2473	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.154	114
		0.90 C	0.00	-0.13	3.25
2475	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.160	114
		1.00 C	0.00	-0.13	3.25
2476	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.162	114
		1.03 C	0.00	-0.13	3.25
2499	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.156	114
		0.92 C	0.00	-0.13	3.25
2501	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.162	114
		1.03 C	0.00	-0.13	3.25
2502	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.164	114
		1.06 C	0.00	-0.13	3.25
2521	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.151	114
		0.85 C	0.00	-0.13	3.25
2534	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.060	106
		3.22 T	0.00	0.01	0.00
2535	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.098	106
		0.78 C	0.00	0.00	1.20
2536	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.420	106
		23.34 T	-1.33	-0.05	1.63
2537	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.050	111
		0.47 C	0.00	0.00	0.00
2538	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.059	105
		3.60 T	0.00	0.00	1.20
2539	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.346	106
		0.74 C	0.00	0.00	1.14
2540	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.416	106
		22.06 T	1.33	-0.05	1.63
2541	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.034	106
		0.97 T	0.00	0.00	1.44

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2542	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.067	106
		2.14 C	0.00	0.02	0.00
2543	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.279	106
		0.65 C	0.00	0.00	1.08
2556	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.103	107
		2.02 C	0.00	0.01	0.00
2557	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.433	106
		23.30 T	1.33	-0.10	1.63
2558	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.298	106
		3.37 C	0.00	0.01	0.00
2559	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.428	106
		21.79 T	-1.33	-0.10	1.63
2560	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.334	106
		7.88 C	0.00	0.03	0.00
2565	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.631	106
		18.59 C	-1.53	-0.16	0.00
2567	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.091	106
		0.71 C	0.00	0.00	1.20
2568	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.048	111
		0.44 C	0.00	0.00	0.00
2569	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.284	106
		0.60 C	0.00	0.00	1.14
2570	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.028	106
		0.80 T	0.00	0.00	1.44
2571	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.234	104
		0.53 C	0.00	0.00	1.08
2588	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.121	106
		9.14 C	0.01	-0.23	0.00
2589	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.065	104
		2.57 T	0.00	0.01	2.06

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2590	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.430	112
		4.73 C	0.00	-0.01	0.90
2591	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.087	104
		1.25 C	0.00	0.01	2.06
2592	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.834	111
		11.38 C	0.00	0.00	0.00
2593	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.438	106
		10.00 C	0.00	0.05	1.96
2594	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.373	112
		4.10 C	0.00	-0.01	1.08
2595	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.343	106
		1.54 C	0.00	0.00	1.20
2596	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.132	104
		2.37 C	0.00	0.01	0.00
2598	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.480	106
		11.08 C	0.00	0.05	0.00
2599	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.472	106
		1.13 C	0.00	0.00	1.08
2607	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.097	104
		5.47 T	0.00	0.01	0.00
2608	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.079	106
		0.97 C	0.00	0.02	0.00
2609	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.418	106
		9.53 C	0.00	0.04	0.00
2611	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.348	106
		1.57 C	0.00	0.00	1.20
2613	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.512	106
		1.23 C	0.00	0.00	1.08
2630	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.128	106
		9.16 C	0.01	-0.26	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2631	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.090	106
		1.09 C	0.00	0.02	2.06
2632	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.432	111
		4.73 C	0.00	0.01	2.17
2633	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.124	104
		1.96 C	0.00	0.02	2.06
2634	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.658	112
		8.99 C	0.00	0.00	0.00
2635	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.433	104
		9.90 C	0.00	0.05	1.96
2636	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.373	111
		4.06 C	0.00	0.01	0.00
2637	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.352	106
		1.58 C	0.00	0.00	1.20
2638	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.284	104
		3.03 C	0.00	0.02	0.00
2639	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.631	106
		1.37 C	0.00	0.00	1.14
2640	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.469	104
		10.82 C	0.00	0.05	0.00
2641	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.480	106
		1.15 C	0.00	0.00	1.08
2649	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.105	112
		2.11 C	0.00	0.00	0.00
2650	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.140	106
		2.33 C	0.00	0.02	0.00
2651	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.489	106
		11.24 C	0.00	0.05	0.00
2653	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.349	106
		1.57 C	0.00	0.00	1.20

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2654	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.620	106
		1.35 C	0.00	0.00	1.14
2655	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.469	106
		1.12 C	0.00	0.00	1.08
2672	LD L130X130X13	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.406	106
		23.73 C	0.01	-0.36	0.62
2673	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.285	106
		3.00 C	0.00	0.02	2.06
2674	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.424	112
		4.64 C	0.00	0.01	2.17
2675	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.093	104
		1.23 C	0.00	0.02	2.06
2676	ST L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.617	111
		8.42 C	0.00	0.00	0.00
2677	LD L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.396	104
		9.00 C	0.00	0.04	1.96
2678	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.365	112
		3.97 C	0.00	0.01	0.00
2679	ST ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.356	106
		1.60 C	0.00	0.00	1.20
2680	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.137	104
		2.34 C	0.00	0.02	0.00
2681	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.649	106
		1.41 C	0.00	0.00	1.14
2682	LD L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.433	104
		9.97 C	0.00	0.04	0.00
2683	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.500	106
		1.20 C	0.00	0.00	1.08
2691	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.099	103
		1.93 C	0.00	0.01	0.00

********** END OF TABULATED RESULT OF DESIGN **********

```
2105. CHECK CODE MEMB 2692 2693 2695 TO 2697 2714 TO 2725 2733 TO 2735 2737 TO 2739 -
2106. 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 2817 TO 2819 -
2107. 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 2917 TO 2944 -
2108. 2949 TO 2955 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 2999 TO 3002 -
2109. 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 3029 TO 3032 -
2110. 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 3059 TO 3062 -
2111. 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 3170 3215 -
2112. 3217 3269 3276 3277 3307 TO 3312 4362 TO 4366 4369 TO 4409 4502 TO 4506 4513 -
2113. 4515 4516 4518 4519 4521 4522 4524 TO 4532 4555 TO 4560 4567 TO 4579 4585 -
2114. 4586 TO 4599 4602 4603 4605 TO 4611 4614 TO 4620 4623 TO 4634 4659 4660 4669 -
2115. 4670 TO 4672 4674 TO 4679 4682 TO 4688 4690 4691 4693 4694 4705 TO 4715 4717 -
2116. 4718 TO 4721 4723 4724 4728 TO 4731 4733 4734 4738 TO 4741 4743 4744 4748 -
2117. 4749 TO 4751 4753 4754 4758 TO 4761 4763 4764 4768 TO 4771 4773 4774 4778 -
2118. 4779 TO 4781 4783 4784 4788 TO 4817 4822 TO 4825 4829 4832 4836 TO 4838 4840 -
2119. 4842 TO 4847 4849 4851 TO 4859 4861 TO 4870 4875 TO 4877 4879 4880 -
2120. 4882 TO 5158 5160 TO 5169 5172 5175 TO 5178 5180 TO 5214 5216 TO 5221
```

STAAD.Pro CODE CHECKING - (LRFD 3RD EDITION) v1.0
****

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2692	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.383	106
		4.21 C	0.00	0.02	0.00
2693	LD L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.581	106
		13.59 C	0.00	0.05	0.00
2695	ST ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.345	106
		1.55 C	0.00	0.00	1.20
2696	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.605	106
		1.31 C	0.00	0.00	1.14
2697	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.457	106
		1.09 C	0.00	0.00	1.08
2714	LD L130X130X13	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.375	106
		21.72 C	0.01	-0.34	0.62
2715	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.259	106
		2.68 C	0.00	0.02	2.06
2716	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.424	112
		4.64 C	0.00	0.01	2.17
2717	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.103	104
		1.49 C	0.00	0.02	2.06
2718	ST L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.619	111
		8.44 C	0.00	0.00	0.00
2719	LD L75X75X8	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.408	104
		9.31 C	0.00	0.04	1.96
2720	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.364	112
		3.97 C	0.00	0.01	0.00
2721	ST ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.355	106
		1.59 C	0.00	0.00	1.20
2722	LD ISA65X65X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.246	104
		2.58 C	0.00	0.02	0.00
2723	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.642	106
		1.40 C	0.00	0.00	1.14

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2724	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.445	104
		10.26 C	0.00	0.04	0.00
2725	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.493	106
		1.18 C	0.00	0.00	1.08
2733	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.093	103
		1.80 C	0.00	0.01	0.00
2734	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.357	106
		3.89 C	0.00	0.02	0.00
2735	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.566	106
		13.19 C	0.00	0.05	0.00
2737	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.346	106
		1.55 C	0.00	0.00	1.20
2738	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.605	106
		1.31 C	0.00	0.00	1.14
2739	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.457	106
		1.09 C	0.00	0.00	1.08
2756	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.337	106
		19.23 C	0.01	-0.32	0.62
2757	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.139	106
		2.29 C	0.00	0.02	2.06
2758	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.423	112
		4.63 C	0.00	0.01	2.17
2759	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.116	104
		1.79 C	0.00	0.02	2.06
2760	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.620	111
		8.46 C	0.00	0.00	0.00
2761	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.423	104
		9.69 C	0.00	0.04	1.96
2762	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.363	112
		3.95 C	0.00	0.01	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2763	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.353	106
		1.59 C	0.00	0.00	1.20
2764	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.270	104
		2.86 C	0.00	0.02	0.00
2765	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.634	106
		1.38 C	0.00	0.00	1.14
2766	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.459	104
		10.62 C	0.00	0.04	0.00
2767	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.484	106
		1.16 C	0.00	0.00	1.08
2775	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.091	112
		1.81 C	0.00	0.00	0.00
2776	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.324	106
		3.50 C	0.00	0.02	0.00
2777	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.546	106
		12.70 C	0.00	0.05	0.00
2779	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.346	106
		1.55 C	0.00	0.00	1.20
2780	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.607	106
		1.32 C	0.00	0.00	1.14
2781	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.458	106
		1.09 C	0.00	0.00	1.08
2798	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.290	106
		16.19 C	0.02	-0.30	0.41
2799	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.122	106
		1.87 C	0.00	0.02	2.06
2800	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.425	112
		4.65 C	0.00	0.01	2.17
2801	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.128	104
		2.08 C	0.00	0.02	2.06

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2802	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.625	111
		8.53 C	0.00	0.00	0.00
2803	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.438	104
		10.04 C	0.00	0.04	1.96
2804	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.366	112
		3.99 C	0.00	0.01	0.00
2805	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.350	106
		1.57 C	0.00	0.00	1.20
2806	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.292	104
		3.13 C	0.00	0.02	0.00
2807	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.622	106
		1.35 C	0.00	0.00	1.14
2808	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.473	104
		10.95 C	0.00	0.04	0.00
2809	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.471	106
		1.13 C	0.00	0.00	1.08
2817	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.094	112
		1.87 C	0.00	0.00	0.00
2818	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.289	106
		3.08 C	0.00	0.02	0.00
2819	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.525	106
		12.16 C	0.00	0.05	0.00
2821	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.346	106
		1.55 C	0.00	0.00	1.20
2822	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.604	106
		1.31 C	0.00	0.00	1.14
2823	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.453	106
		1.08 C	0.00	0.00	1.08
2840	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.280	106
		15.80 C	-0.02	-0.27	0.62

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2841	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	106
		0.81 C	0.00	0.02	2.06
2842	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.294	111
		3.19 C	0.00	0.00	2.17
2843	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.064	106
		0.56 C	0.00	0.02	2.06
2844	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.890	112
		12.15 C	0.00	0.00	0.00
2845	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.392	106
		8.84 C	0.00	0.05	1.96
2846	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.237	111
		2.54 C	0.00	0.00	0.00
2847	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.347	106
		1.56 C	0.00	0.00	1.20
2848	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.110	106
		1.69 C	0.00	0.02	0.00
2849	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.567	106
		1.23 C	0.00	0.00	1.14
2850	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.433	106
		9.89 C	0.00	0.05	0.00
2851	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.461	106
		1.10 C	0.00	0.00	1.08
2859	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.241	111
		2.59 C	0.00	0.00	0.00
2860	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.121	106
		1.98 C	0.00	0.02	0.00
2861	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.447	106
		10.31 C	0.00	0.04	0.00
2863	ST ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.351	106
		1.58 C	0.00	0.00	1.20

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2864	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.588	106
		1.27 C	0.00	0.00	1.14
2865	ST ISA50X50X6	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.504	106
		1.21 C	0.00	0.00	1.08
2917	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.511	111
		4.28 C	0.00	0.00	2.54
2918	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.704	111
		7.89 C	0.00	0.00	2.21
2919	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.266	111
		2.23 C	0.00	0.00	2.54
2920	ST UPN240	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1B-T	0.054	106
		11.36 T	0.00	0.00	0.00
2921	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.387	111
		3.24 C	0.00	0.00	2.54
2922	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.578	111
		6.48 C	0.00	0.00	2.21
2923	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-T	0.205	104
		5.78 T	0.00	0.00	0.00
2924	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.409	112
		4.58 C	0.00	0.00	2.21
2925	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.422	112
		3.53 C	0.00	0.00	2.54
2926	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.607	112
		6.81 C	0.00	0.00	2.21
2927	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.099	111
		1.66 C	0.00	0.00	2.54
2928	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.416	111
		4.67 C	0.00	0.00	2.21
2929	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.420	111
		3.52 C	0.00	0.00	2.54

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2930	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.606	111
		6.79 C	0.00	0.00	2.21
2931	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.100	111
		1.67 C	0.00	0.00	2.54
2932	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.417	111
		4.68 C	0.00	0.00	2.21
2933	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.418	111
		3.50 C	0.00	0.00	2.54
2934	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.604	111
		6.78 C	0.00	0.00	2.21
2935	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.202	111
		1.69 C	0.00	0.00	2.54
2936	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.419	111
		4.70 C	0.00	0.00	2.21
2937	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.413	111
		3.46 C	0.00	0.00	2.54
2938	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.600	111
		6.72 C	0.00	0.00	2.21
2939	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-T	0.208	104
		5.86 T	0.00	0.00	0.00
2940	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.418	111
		4.69 C	0.00	0.00	2.21
2941	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.421	112
		3.53 C	0.00	0.00	2.54
2942	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.666	112
		7.46 C	0.00	0.00	2.21
2943	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.450	112
		3.76 C	0.00	0.00	2.54
2944	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.689	112
		7.73 C	0.00	0.00	2.21

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2949	ST UPN240	(EUROPEAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.078	106
		7.04 C	0.00	0.00	3.20
2950	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.782	106
		7.43 C	0.00	0.00	3.20
2951	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.706	106
		6.70 C	0.00	0.00	3.20
2952	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.710	106
		6.74 C	0.00	0.00	3.20
2953	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.715	106
		6.79 C	0.00	0.00	3.20
2954	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.724	106
		6.87 C	0.00	0.00	3.20
2955	ST ISA90X90X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1A-C	0.670	106
		6.36 C	0.00	0.00	3.20
2959	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.058	105
		0.75 C	0.00	0.00	2.87
2960	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-T	0.030	104
		1.67 T	0.00	0.00	0.00
2961	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.054	112
		0.70 C	0.00	0.00	2.87
2962	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.064	107
		0.83 C	0.00	0.00	2.87
2963	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.053	111
		0.69 C	0.00	0.00	2.87
2964	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.050	107
		0.65 C	0.00	0.00	2.87
2965	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.052	111
		0.68 C	0.00	0.00	2.87
2966	ST ISA75X75X8	(INDIAN SECTIONS)			
		PASS	LRFD-H1-1B-C	0.032	107
		0.41 C	0.00	0.00	2.87

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2967	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.049	111
		0.64 C	0.00	0.00	2.87
2968	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.031	104
		1.73 T	0.00	0.00	0.00
2969	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.025	104
		1.39 T	0.00	0.00	0.00
2970	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.034	103
		0.43 C	0.00	0.00	2.87
2973	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.115	104
		6.79 T	0.00	0.01	2.17
2974	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.373	106
		8.37 C	0.00	0.04	1.97
2975	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.254	112
		2.75 C	0.00	0.00	2.17
2976	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.448	106
		10.17 C	0.00	0.05	1.97
2977	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.223	111
		2.41 C	0.00	0.00	2.17
2978	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.541	106
		12.54 C	0.00	0.05	1.97
2979	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.225	112
		2.42 C	0.00	0.00	2.17
2980	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.526	106
		12.15 C	0.00	0.05	1.97
2981	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.227	112
		2.45 C	0.00	0.00	2.17
2982	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.506	106
		11.65 C	0.00	0.05	1.97
2983	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.232	112
		2.51 C	0.00	0.00	2.17

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
2984	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.485	106
		11.12 C	0.00	0.05	1.97
2985	LD ISA65X65X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.298	111
		3.24 C	0.00	0.00	2.17
2986	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.403	106
		9.16 C	0.00	0.04	1.97
2989	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.484	112
		53.89 C	-0.01	-0.16	0.00
2990	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.768	112
		51.84 C	0.00	-0.26	0.00
2993	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.491	112
		53.86 C	0.01	-0.19	0.00
2994	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.754	112
		50.17 C	0.00	-0.30	0.00
2995	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.097	111
		0.90 C	0.00	0.00	0.00
2996	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.062	106
		1.75 T	0.00	0.00	1.44
2999	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.089	112
		0.83 C	0.00	0.00	0.00
3000	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.065	106
		1.82 T	0.00	0.00	1.44
3001	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.486	106
		61.81 T	0.03	0.29	0.00
3002	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.627	112
		42.16 C	0.02	-0.20	0.00
3005	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.489	106
		61.81 T	-0.03	0.30	0.00
3006	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.612	112
		40.62 C	-0.02	-0.23	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
3007	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.212	112
		0.98 C	0.00	0.00	0.00
3008	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.068	112
		0.79 C	0.00	0.00	0.00
3011	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.202	112
		0.93 C	0.00	0.00	0.00
3012	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.062	106
		1.75 T	0.00	0.00	1.44
3013	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.462	106
		58.25 T	0.05	0.27	0.00
3014	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		40.69 C	0.03	-0.20	0.00
3017	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.474	106
		58.22 T	-0.05	0.31	0.00
3018	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.593	112
		38.94 C	-0.03	-0.23	0.00
3019	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.213	112
		0.98 C	0.00	0.00	0.00
3020	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.069	112
		0.79 C	0.00	0.00	0.00
3023	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.201	112
		0.93 C	0.00	0.00	0.00
3024	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.061	106
		1.71 T	0.00	0.00	1.44
3025	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.469	106
		58.42 T	0.07	0.27	0.00
3026	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.613	112
		40.72 C	0.05	-0.20	0.00
3029	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.478	106
		58.39 T	-0.07	0.30	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
3030	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.597	112
		38.99 C	-0.05	-0.23	0.00
3031	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.212	111
		0.98 C	0.00	0.00	0.00
3032	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.069	111
		0.79 C	0.00	0.00	0.00
3035	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.201	111
		0.93 C	0.00	0.00	0.00
3036	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.061	106
		1.71 T	0.00	0.00	1.44
3037	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.476	106
		58.64 T	0.09	0.28	0.00
3038	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.617	112
		40.73 C	0.06	-0.20	0.00
3041	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.483	106
		58.62 T	-0.08	0.30	0.00
3042	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.600	112
		39.03 C	-0.06	-0.23	0.00
3043	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.212	111
		0.98 C	0.00	0.00	0.00
3044	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.069	111
		0.79 C	0.00	0.00	0.00
3047	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.201	111
		0.93 C	0.00	0.00	0.00
3048	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.061	106
		1.71 T	0.00	0.00	1.44
3049	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.485	106
		59.01 T	0.11	0.29	0.00
3050	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.625	112
		41.03 C	0.08	-0.20	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
3053	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.489	106
		58.99 T	-0.10	0.30	0.00
3054	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		39.36 C	-0.08	-0.24	0.00
3055	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.212	111
		0.98 C	0.00	0.00	0.00
3056	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.068	111
		0.79 C	0.00	0.00	0.00
3059	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.201	111
		0.93 C	0.00	0.00	0.00
3060	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.061	106
		1.70 T	0.00	0.00	1.44
3061	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.576	106
		53.75 T	0.91	-0.17	1.63
3062	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.646	112
		36.22 C	0.55	0.08	1.63
3065	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.553	106
		51.24 T	-0.90	-0.15	1.63
3066	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.636	111
		37.56 C	-0.44	0.07	1.63
3067	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.204	111
		0.95 C	0.00	0.00	0.00
3068	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.079	111
		0.91 C	0.00	0.00	0.00
3071	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.205	112
		0.95 C	0.00	0.00	0.00
3072	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.080	111
		0.92 C	0.00	0.00	0.00
3085	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.125	116
		2.75 C	0.00	0.02	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
3088	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.099	114
		3.41 C	0.00	0.05	0.00
3096	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.644	106
		1.40 C	0.00	0.00	0.00
3097	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.277	105
		1.80 C	0.00	0.00	2.87
3101	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.618	106
		1.34 C	0.00	0.00	0.00
3102	ST UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	106
		1.25 T	0.02	0.00	0.00
3106	LD ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.171	112
		3.97 C	0.00	0.07	0.00
3166	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.163	114
		1.05 C	0.00	-0.13	3.25
3170	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.165	114
		1.09 C	0.00	-0.13	3.25
3215	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.283	106
		1.84 C	0.00	-0.09	3.25
3217	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.295	106
		1.94 C	0.00	-0.09	3.25
3269	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.472	106
		0.59 C	-5.19	-25.58	4.20
3276	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.273	112
		7.25 C	-0.10	-0.62	3.49
3277	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.273	112
		7.25 C	-0.10	-0.62	0.00
3307	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.172	104
		11.30 T	0.00	-0.41	5.31
3308	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.210	104
		9.69 C	0.00	-0.41	5.31

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
3309	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.200	104
		13.05 T	0.00	-0.25	4.19
3310	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.381	104
		11.11 C	0.00	-0.25	4.19
3311	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.144	113
		4.21 T	0.00	-0.41	5.31
3312	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.212	111
		9.91 C	0.00	-0.41	5.31
4362	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.334	104
		28.49 T	0.00	-0.38	4.98
4363	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.418	114
		19.69 C	0.00	-0.38	4.98
4364	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.314	105
		13.12 C	0.00	-0.38	4.98
4365	LD L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.334	115
		16.07 C	0.00	-0.29	4.98
4366	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.633	104
		9.53 C	0.00	-0.20	3.29
4369	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.369	111
		5.02 C	0.00	-0.19	3.26
4370	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.429	106
		9.86 C	0.00	0.00	0.00
4371	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.376	105
		7.35 C	0.00	0.00	0.00
4372	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.488	106
		34.41 C	0.00	0.00	0.00
4373	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.054	106
		8.57 T	0.00	0.00	0.00
4374	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.567	106
		18.32 C	-0.02	-0.25	4.23

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4375	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.223	105
		6.54 T	-0.01	-0.34	4.23
4376	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.361	106
		9.30 C	-0.02	-0.27	4.22
4377	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.236	105
		9.38 T	0.00	-0.34	4.23
4378	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.130	106
		9.15 C	0.00	0.00	0.00
4379	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.079	105
		5.24 C	0.00	0.00	0.00
4380	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.323	112
		6.31 C	0.00	0.00	0.00
4381	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.831	106
		17.52 C	0.00	0.00	0.00
4382	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.064	107
		6.04 T	0.00	0.00	0.00
4383	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.442	107
		8.65 C	0.00	0.00	0.00
4384	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.232	106
		4.54 C	0.00	0.00	0.00
4385	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.294	107
		5.76 C	0.00	0.00	0.00
4386	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.409	106
		8.00 C	0.00	0.00	0.00
4387	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.033	104
		3.18 T	0.00	0.00	0.00
4388	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.284	106
		5.56 C	0.00	0.00	0.00
4389	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.034	105
		3.21 T	0.00	0.00	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4390	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.339	106
		6.63 C	0.00	0.00	0.00
4391	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.039	103
		3.75 T	0.00	0.00	0.00
4392	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.523	106
		10.23 C	0.00	0.00	0.00
4393	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.067	104
		6.35 T	0.00	0.00	0.00
4394	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.977	106
		19.10 C	0.00	0.00	0.00
4395	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.154	106
		14.62 T	0.00	0.00	0.00
4396	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.359	105
		7.02 C	0.00	0.00	0.00
4397	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.093	106
		1.82 C	0.00	0.00	0.00
4398	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.360	107
		7.04 C	0.00	0.00	0.00
4399	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.043	105
		4.07 T	0.00	0.00	0.00
4400	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.335	107
		6.55 C	0.00	0.00	0.00
4401	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.029	104
		2.74 T	0.00	0.00	0.00
4402	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.278	107
		5.43 C	0.00	0.00	0.00
4403	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.025	112
		2.35 T	0.00	0.00	0.00
4404	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.123	107
		2.41 C	0.00	0.00	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4405	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.193	106
		3.78 C	0.00	0.00	0.00
4406	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.075	107
		0.58 C	0.00	0.00	0.00
4407	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.508	106
		3.93 C	0.00	0.00	0.00
4408	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.027	111
		1.52 T	0.00	0.00	0.00
4409	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.585	107
		5.60 C	0.00	0.00	0.00
4502	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.600	101
		10.91 T	0.95	-17.44	2.50
4503	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.682	101
		5.94 T	0.84	-15.78	2.50
4504	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.687	101
		2.24 C	0.84	-15.78	0.00
4505	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.592	101
		1.92 C	0.95	-17.44	0.00
4506	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.191	101
		2.86 T	-0.06	-7.43	1.09
4513	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.283	101
		5.21 T	0.24	-9.96	0.00
4515	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.142	101
		2.94 T	0.00	-4.05	1.60
4516	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.394	101
		9.25 T	0.42	-13.08	0.00
4518	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.139	104
		1.50 T	0.00	-4.05	1.60
4519	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.353	101
		9.25 T	0.17	-12.97	0.40

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4521	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.188	101
		0.87 T	0.00	-0.85	1.38
4522	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.318	110
		2.86 T	-0.14	-12.21	1.11
4524	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.183	101
		0.11 T	0.00	-0.85	1.38
4525	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.366	108
		6.87 C	0.16	-4.41	0.00
4526	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.148	101
		0.27 T	0.00	-0.70	1.25
4527	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.406	108
		6.87 C	0.07	-5.49	0.00
4528	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.192	101
		7.32 T	0.00	-0.70	1.25
4529	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.395	108
		4.63 C	0.07	-5.49	1.10
4530	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.146	101
		0.01 T	0.00	-0.70	1.25
4531	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.348	108
		4.63 C	0.03	-4.97	1.11
4532	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.147	101
		0.09 T	0.00	-0.70	1.25
4555	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.193	104
		17.26 T	0.00	-0.19	3.25
4556	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.158	104
		10.55 T	0.00	-0.19	3.25
4557	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.498	105
		7.38 C	0.00	-0.19	3.25
4558	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.460	104
		20.25 C	0.00	-0.32	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4559	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.319	104
		21.72 T	0.00	-0.19	3.25
4560	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.156	113
		1.95 C	0.00	-0.19	3.25
4567	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4568	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4569	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4570	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4571	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4572	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		2.85 C	0.00	-0.14	3.25
4573	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.152	111
		7.63 C	0.00	-0.32	3.25
4574	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.645	105
		6.74 C	0.03	-2.51	1.37
4575	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.511	105
		7.63 C	0.00	-0.19	3.25
4576	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.463	105
		6.76 C	0.00	-0.19	3.25
4577	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.395	111
		5.51 C	0.00	-0.19	3.25
4578	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.310	110
		3.97 C	0.00	-0.19	3.25
4579	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.649	105
		6.74 C	0.03	-2.51	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4585	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.398	111
		3.21 C	0.00	-0.14	3.25
4586	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.401	111
		3.24 C	0.00	-0.14	3.25
4587	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.400	111
		3.23 C	0.00	-0.14	3.25
4588	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.399	111
		3.23 C	0.00	-0.14	3.25
4589	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.398	111
		3.21 C	0.00	-0.14	3.25
4590	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.399	111
		3.22 C	0.00	-0.14	3.25
4591	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.286	106
		5.58 C	0.00	0.00	0.00
4592	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.071	111
		6.73 T	0.00	0.00	0.00
4593	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.302	106
		3.39 C	0.00	0.00	0.00
4594	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.214	106
		2.81 C	0.00	0.00	0.00
4595	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.198	107
		2.23 C	0.00	0.00	0.00
4596	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.509	106
		5.73 C	0.00	0.00	0.00
4597	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.492	111
		0.04 T	0.01	-6.37	3.25
4598	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.049	104
		2.77 T	0.00	0.00	0.00
4599	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.345	106
		3.65 C	0.00	0.00	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4602	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.031	102
		1.75 T	0.00	0.00	0.00
4603	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.363	107
		5.57 C	0.00	0.00	0.00
4605	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.374	106
		2.63 C	0.00	-0.09	3.25
4606	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.324	114
		2.01 C	0.00	-0.13	3.25
4607	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.326	114
		2.02 C	0.00	-0.13	3.25
4608	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.328	114
		2.04 C	0.00	-0.13	3.25
4609	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.331	114
		2.07 C	0.00	-0.13	3.25
4610	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.335	114
		2.10 C	0.00	-0.13	3.25
4611	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.340	114
		2.14 C	0.00	-0.13	3.25
4614	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.437	106
		3.16 C	0.00	-0.09	3.25
4615	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.388	114
		2.55 C	0.00	-0.13	3.25
4616	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.390	114
		2.57 C	0.00	-0.13	3.25
4617	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.392	114
		2.59 C	0.00	-0.13	3.25
4618	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.395	114
		2.62 C	0.00	-0.13	3.25
4619	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.399	114
		2.65 C	0.00	-0.13	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4620	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.404	114
		2.69 C	0.00	-0.13	3.25
4623	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.627	114
		4.97 C	0.00	0.00	0.00
4624	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.136	109
		1.08 C	0.00	0.00	9.22
4625	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.897	112
		7.10 C	0.00	0.00	0.00
4626	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.416	111
		3.30 C	0.00	0.00	9.22
4627	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.201	114
		2.53 C	0.00	0.00	0.00
4628	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.281	106
		3.53 C	0.00	0.00	4.61
4629	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.207	112
		2.61 C	0.00	0.00	4.61
4630	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.149	104
		1.87 C	0.00	0.00	4.61
4631	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.435	111
		3.44 C	0.00	0.00	9.22
4632	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.945	112
		7.48 C	0.00	0.00	9.22
4633	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.158	110
		1.25 C	0.00	0.00	9.22
4634	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.749	114
		5.93 C	0.00	0.00	9.22
4659	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.158	114
		0.96 C	0.00	-0.13	3.25
4660	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.159	114
		0.98 C	0.00	-0.13	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4669	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.322	106
		2.10 C	0.00	-0.10	3.29
4670	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.146	114
		0.74 C	0.00	-0.13	3.26
4671	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.189	105
		1.47 C	0.00	-0.13	3.26
4672	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.336	106
		2.28 C	0.00	-0.09	3.26
4674	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.054	109
		0.43 C	0.00	0.00	9.22
4675	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.601	114
		6.59 C	0.00	0.00	0.00
4676	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.251	110
		2.16 C	0.00	0.00	8.83
4677	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.654	114
		6.11 C	0.00	0.00	0.00
4678	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.113	106
		1.78 C	-0.01	0.13	3.86
4679	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.175	106
		8.02 T	-0.05	0.12	4.02
4682	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.054	116
		3.39 T	0.00	0.00	0.00
4683	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.556	114
		6.09 C	0.00	0.00	0.00
4684	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.176	115
		1.66 C	0.00	0.00	8.45
4685	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.839	114
		7.18 C	0.00	0.00	0.00
4686	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.100	106
		1.45 T	0.00	0.13	3.86

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4687	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.144	106
		4.09 T	0.06	0.12	4.02
4688	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.573	105
		1.88 T	0.00	-2.33	2.47
4690	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.567	106
		36.88 C	-0.02	0.17	2.47
4691	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.560	106
		35.92 C	-0.05	0.17	2.47
4693	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.513	106
		32.18 C	-0.08	0.17	2.47
4694	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.455	106
		28.51 C	-0.06	0.16	2.47
4705	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.105	106
		5.13 C	0.00	0.02	1.58
4706	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.336	112
		16.82 T	0.00	-0.04	1.33
4707	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.111	106
		5.52 C	0.00	0.02	0.00
4708	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.069	104
		0.42 C	0.00	0.00	0.87
4709	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.364	111
		22.92 C	0.02	0.14	1.63
4710	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.025	104
		0.70 T	0.00	0.00	1.27
4711	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.386	111
		24.80 C	-0.02	-0.19	0.00
4712	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.029	106
		0.83 T	0.00	0.00	1.27
4713	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.512	112
		22.37 C	0.00	0.05	1.33

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4714	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.591	106
		19.88 T	-1.69	0.29	1.01
4715	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.010	105
		0.31 C	0.00	0.00	0.00
4717	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.411	112
		25.85 C	0.02	-0.24	0.00
4718	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.021	104
		0.60 T	0.00	0.00	1.10
4719	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.601	112
		36.00 C	-0.01	-0.48	1.01
4720	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.732	111
		46.37 C	0.01	-0.42	0.00
4721	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.556	106
		16.70 C	0.00	0.05	1.58
4723	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.573	106
		17.28 C	0.00	0.05	0.00
4724	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.094	104
		0.62 C	0.00	0.00	0.87
4728	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.032	104
		0.89 T	0.00	0.00	1.10
4729	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.547	112
		32.27 C	-0.01	-0.46	1.01
4730	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.632	112
		40.01 C	0.02	-0.36	0.00
4731	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.558	106
		16.17 C	0.00	0.06	1.58
4733	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.574	106
		16.71 C	0.00	0.06	0.00
4734	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.076	106
		0.50 C	0.00	0.00	0.87

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4738	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.028	106
		0.79 T	0.00	0.00	1.10
4739	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.531	112
		31.25 C	-0.01	-0.45	1.01
4740	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.608	112
		38.36 C	0.03	-0.35	0.00
4741	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.541	106
		15.66 C	0.00	0.06	1.58
4743	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.558	106
		16.25 C	0.00	0.06	0.00
4744	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.083	106
		0.56 C	0.00	0.00	0.87
4748	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.030	106
		0.84 T	0.00	0.00	1.10
4749	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.531	112
		31.26 C	-0.02	-0.45	1.01
4750	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		38.37 C	0.03	-0.35	0.00
4751	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.551	106
		16.00 C	0.00	0.06	1.58
4753	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.569	106
		16.57 C	0.00	0.06	0.00
4754	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.080	106
		0.54 C	0.00	0.00	0.87
4758	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.029	106
		0.82 T	0.00	0.00	1.10
4759	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.532	112
		31.23 C	-0.02	-0.45	1.01
4760	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.610	112
		38.36 C	0.04	-0.35	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4761	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.564	106
		16.41 C	0.00	0.06	1.58
4763	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.581	106
		16.96 C	0.00	0.06	0.00
4764	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.078	106
		0.52 C	0.00	0.00	0.87
4768	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.028	106
		0.80 T	0.00	0.00	1.10
4769	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.537	112
		31.52 C	-0.02	-0.46	1.01
4770	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.617	112
		38.72 C	0.04	-0.35	0.00
4771	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.573	106
		16.68 C	0.00	0.06	1.58
4773	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.589	106
		17.20 C	0.00	0.06	0.00
4774	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	106
		0.49 C	0.00	0.00	0.87
4778	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.027	106
		0.76 T	0.00	0.00	1.10
4779	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.483	106
		38.96 T	-0.07	0.69	1.01
4780	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.589	112
		34.61 C	-0.05	0.31	1.24
4781	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.540	106
		15.71 C	0.00	0.06	1.58
4783	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.556	106
		16.23 C	0.00	0.06	0.00
4784	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.077	104
		0.48 C	0.00	0.00	0.87

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4788	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.027	106
		0.76 T	0.00	0.00	1.10
4789	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.740	112
		48.00 C	0.01	-0.36	0.00
4790	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.055	106
		1.54 T	0.00	0.00	1.27
4791	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.611	112
		39.53 C	0.01	-0.30	0.00
4792	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.050	106
		1.42 T	0.00	0.00	1.27
4793	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.583	112
		37.53 C	0.01	-0.30	0.00
4794	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.049	106
		1.39 T	0.00	0.00	1.27
4795	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.584	112
		37.60 C	0.01	-0.30	0.00
4796	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.049	106
		1.39 T	0.00	0.00	1.27
4797	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.584	112
		37.66 C	0.01	-0.30	0.00
4798	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.049	106
		1.39 T	0.00	0.00	1.27
4799	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.590	112
		38.04 C	0.01	-0.30	0.00
4800	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.049	106
		1.37 T	0.00	0.00	1.27
4801	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.596	111
		36.57 C	0.15	0.18	1.63
4802	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.054	106
		1.51 T	0.00	0.00	1.27

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4803	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.789	112
		51.93 C	-0.01	-0.34	0.00
4804	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.051	106
		1.42 T	0.00	0.00	1.27
4805	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.653	112
		42.97 C	-0.01	-0.28	0.00
4806	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.051	106
		1.45 T	0.00	0.00	1.27
4807	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.630	112
		41.40 C	-0.01	-0.27	0.00
4808	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.053	106
		1.50 T	0.00	0.00	1.27
4809	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.631	112
		41.43 C	-0.01	-0.27	0.00
4810	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.053	106
		1.48 T	0.00	0.00	1.27
4811	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.631	112
		41.43 C	-0.01	-0.28	0.00
4812	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.052	106
		1.46 T	0.00	0.00	1.27
4813	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.635	112
		41.76 C	-0.01	-0.28	0.00
4814	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.051	106
		1.42 T	0.00	0.00	1.27
4815	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.603	112
		36.02 C	-0.20	0.20	1.63
4816	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.049	106
		1.39 T	0.00	0.00	1.27
4817	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.383	104
		0.03 C	-0.01	-0.46	3.25

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4822	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.277	106
		3.63 C	0.00	0.00	0.00
4823	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.223	106
		2.51 C	0.00	0.00	0.00
4824	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.176	107
		2.29 C	0.00	0.00	0.00
4825	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.449	106
		5.87 C	0.00	0.00	0.00
4829	LD ISA90X90X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.382	104
		0.01 C	-0.01	-0.46	0.00
4832	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.103	111
		8.01 C	0.03	-0.56	0.00
4836	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.815	111
		0.03 C	0.00	-10.28	3.50
4837	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.768	111
		0.08 C	0.00	-10.28	0.00
4838	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.835	102
		0.02 C	-0.12	-10.37	3.25
4840	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.751	102
		0.05 C	-0.12	-10.37	0.00
4842	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.313	102
		0.03 T	0.29	-3.34	0.00
4843	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	102
		0.19 C	-0.19	-0.16	1.80
4844	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.076	102
		0.48 T	-0.19	-0.16	0.00
4845	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.038	102
		2.17 T	0.00	0.00	0.00
4846	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.328	105
		8.11 C	-0.06	-1.16	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4847	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.119	106
		2.25 T	0.26	-0.33	2.47
4849	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.117	106
		1.79 C	0.26	-0.33	0.00
4851	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.218	106
		2.59 C	0.00	0.00	0.00
4852	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.055	106
		1.90 T	0.00	0.00	0.00
4853	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.098	106
		1.79 C	-0.17	-0.36	0.00
4854	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.010	106
		0.61 C	0.00	-0.06	1.85
4855	D UPN240		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.320	110
		5.28 C	0.04	-5.27	0.00
4856	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.655	111
		0.04 T	-0.01	-8.50	1.90
4857	ST IPE300		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.185	110
		1.08 T	-0.02	-2.73	0.00
4858	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.160	101
		5.21 T	0.04	-6.04	0.00
4859	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.162	101
		2.61 T	0.00	-0.70	1.25
4861	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.198	101
		2.43 T	0.00	-0.85	1.38
4862	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.167	101
		0.00 C	0.00	-0.31	0.00
4863	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.195	107
		18.52 T	0.00	0.00	0.00
4864	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.482	107
		20.33 C	0.00	0.00	8.39

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4865	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.167	101
		0.00 C	0.00	-0.31	0.00
4866	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.539	106
		0.67 C	-6.06	-28.73	0.00
4867	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.473	106
		0.67 C	-5.19	-25.58	0.00
4868	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.324	105
		4.23 C	0.00	-0.19	3.25
4869	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.523	106
		0.71 C	-5.63	-28.73	0.00
4870	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.515	104
		0.94 C	-5.41	-28.72	0.00
4875	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.565	105
		14.34 C	0.00	-0.08	2.66
4876	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.112	105
		13.43 T	0.00	-0.08	2.66
4877	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.126	105
		4.51 T	0.00	-0.19	3.25
4879	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.079	105
		8.60 T	0.00	0.05	0.00
4880	LD L100X100X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.334	107
		8.73 C	0.00	0.04	3.25
4882	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.131	106
		2.10 C	-0.02	0.13	0.00
4883	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.166	106
		7.90 T	-0.04	0.13	0.00
4884	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.107	106
		1.14 T	0.02	0.13	0.00
4885	ST L130X130X10		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.134	106
		3.96 T	0.04	0.13	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4886	ST	L130X130X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.052	104
		0.54 C	0.00	-0.04	2.16
4887	ST	L130X130X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.052	104
		0.54 C	0.00	-0.04	2.16
4888	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.540	106
		31.32 C	0.17	0.22	2.15
4889	LD	ISA90X90X8	(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.515	111
		3.23 C	0.00	-0.14	3.25
4890	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.425	106
		23.03 C	-0.17	0.21	2.15
4891	LD	ISA90X90X8	(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.488	102
		3.02 C	0.00	-0.14	3.25
4892	LD	L100X100X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.492	104
		13.28 C	0.03	-0.34	0.00
4893	LD	L100X100X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.239	104
		5.70 T	-0.04	-0.35	0.00
4894	LD	L100X100X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.272	105
		6.75 C	-0.01	-0.35	0.00
4895	LD	L100X100X10	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.235	105
		9.11 T	0.01	-0.34	0.00
4896	ST	L90X90X8	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.447	111
		2.62 C	0.00	-0.02	1.65
4897	ST	L90X90X8	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.508	111
		3.00 C	0.00	-0.02	1.65
4898	LD	L130X130X13	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.312	107
		11.78 C	-0.02	0.62	2.01
4899	LD	L75X75X8	(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.333	112
		16.70 T	0.00	-0.04	0.00
4900	ST	ISA50X50X6	(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.044	104
		0.37 C	0.00	0.00	0.74

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4901	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.591	106
		19.79 T	-1.69	0.29	0.00
4902	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.020	104
		0.56 T	0.00	0.00	0.98
4903	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.531	112
		23.27 C	0.00	0.05	0.00
4904	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.068	106
		0.93 C	0.00	0.00	0.61
4905	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.478	104
		9.10 T	-1.68	-0.11	1.01
4906	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.046	112
		1.01 C	0.00	0.00	0.00
4907	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.115	107
		13.08 C	-0.02	0.06	0.00
4908	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.599	112
		35.88 C	-0.01	-0.48	0.00
4909	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.145	106
		11.89 C	0.00	-0.26	0.76
4910	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.769	106
		25.34 C	0.00	0.09	1.33
4911	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.714	111
		31.65 C	0.00	0.06	1.34
4912	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.24 T	0.00	0.00	1.75
4913	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.780	106
		25.74 C	0.00	0.09	0.00
4914	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.055	104
		0.49 C	0.00	0.00	0.74
4915	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.028	104
		0.80 T	0.00	0.00	0.98

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4916	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.742	111
		32.99 C	0.00	0.06	0.00
4917	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.314	106
		2.30 C	0.00	0.00	0.61
4918	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.202	106
		2.84 T	0.00	0.00	0.77
4919	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.282	106
		17.73 C	-0.01	0.11	0.00
4920	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.545	112
		32.16 C	-0.01	-0.46	0.00
4921	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.150	103
		13.40 T	0.00	0.29	0.00
4922	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.771	106
		25.30 C	0.00	0.09	1.33
4923	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.723	112
		31.92 C	0.00	0.07	1.34
4924	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.005	104
		0.28 T	0.00	0.00	1.75
4925	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.778	106
		25.59 C	0.00	0.09	0.00
4926	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.036	104
		0.28 C	0.00	0.00	0.74
4927	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.019	104
		0.54 T	0.00	0.00	0.98
4928	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.753	112
		33.34 C	0.00	0.07	0.00
4929	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.303	106
		2.22 C	0.00	0.00	0.61
4930	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.098	106
		2.75 T	0.00	0.00	0.77

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4931	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.276	106
		17.19 C	-0.01	0.11	0.00
4932	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.529	112
		31.14 C	-0.01	-0.45	0.00
4933	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.145	103
		12.70 T	0.00	0.29	0.00
4934	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.754	106
		24.75 C	0.00	0.09	1.33
4935	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.699	111
		30.85 C	0.00	0.06	1.34
4936	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.005	104
		0.29 T	0.00	0.00	1.75
4937	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.763	106
		25.08 C	0.00	0.09	0.00
4938	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.038	104
		0.30 C	0.00	0.00	0.74
4939	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.020	104
		0.57 T	0.00	0.00	0.98
4940	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.728	111
		32.24 C	0.00	0.06	0.00
4941	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.303	106
		2.22 C	0.00	0.00	0.61
4942	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.098	106
		2.75 T	0.00	0.00	0.77
4943	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.248	106
		15.10 C	-0.02	0.11	0.00
4944	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.530	112
		31.14 C	-0.02	-0.45	0.00
4945	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.141	103
		11.93 T	0.00	0.28	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4946	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.764	106
		25.10 C	0.00	0.09	1.34
4947	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.700	111
		30.87 C	0.00	0.06	1.34
4948	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.005	104
		0.28 T	0.00	0.00	1.75
4949	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.772	106
		25.41 C	0.00	0.09	0.00
4950	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.037	104
		0.29 C	0.00	0.00	0.74
4951	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.020	104
		0.55 T	0.00	0.00	0.98
4952	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.729	111
		32.26 C	0.00	0.06	0.00
4953	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.305	106
		2.24 C	0.00	0.00	0.61
4954	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.098	106
		2.77 T	0.00	0.00	0.77
4955	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.132	106
		12.87 C	-0.02	0.10	0.00
4956	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.530	112
		31.12 C	-0.02	-0.45	0.00
4957	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.135	111
		9.16 T	-0.01	0.29	0.00
4958	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.776	106
		25.53 C	0.00	0.09	1.34
4959	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.701	111
		30.91 C	0.00	0.06	1.34
4960	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.005	104
		0.28 T	0.00	0.00	1.75

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4961	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.784	106
		25.83 C	0.00	0.09	0.00
4962	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.036	104
		0.28 C	0.00	0.00	0.74
4963	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.019	104
		0.54 T	0.00	0.00	0.98
4964	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.730	111
		32.31 C	0.00	0.06	0.00
4965	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.308	106
		2.26 C	0.00	0.00	0.61
4966	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.099	106
		2.79 T	0.00	0.00	0.77
4967	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.100	106
		8.99 C	-0.02	0.09	0.00
4968	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.535	112
		31.41 C	-0.02	-0.46	0.00
4969	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.136	111
		9.19 T	-0.01	0.29	0.00
4970	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.784	106
		25.81 C	0.00	0.09	1.33
4971	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.704	111
		31.07 C	0.00	0.06	1.34
4972	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.005	104
		0.27 T	0.00	0.00	1.75
4973	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.791	106
		26.09 C	0.00	0.09	0.00
4974	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.034	104
		0.26 C	0.00	0.00	0.74
4975	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.018	104
		0.51 T	0.00	0.00	0.98

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4976	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.733	111
		32.46 C	0.00	0.06	0.00
4977	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.308	106
		2.26 C	0.00	0.00	0.61
4978	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.099	106
		2.79 T	0.00	0.00	0.77
4979	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.053	106
		2.79 C	-0.03	0.07	0.00
4980	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.482	106
		38.73 T	-0.07	0.69	0.00
4981	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.141	106
		8.48 C	-0.05	-0.29	1.01
4982	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.749	106
		24.67 C	0.00	0.08	1.33
4983	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.607	112
		26.68 C	0.00	0.06	1.34
4984	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.003	104
		0.20 T	0.00	0.00	1.75
4985	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.757	106
		24.96 C	0.00	0.08	0.00
4986	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.031	104
		0.23 C	0.00	0.00	0.74
4987	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	104
		0.48 T	0.00	0.00	0.98
4988	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.634	112
		27.97 C	0.00	0.06	0.00
4989	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.303	106
		2.22 C	0.00	0.00	0.61
4990	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.098	106
		2.74 T	0.00	0.00	0.77

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
4991	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.163	107
		5.14 T	0.00	-0.60	0.00
4992	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.400	106
		18.18 T	1.13	-0.24	0.00
4993	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.582	106
		10.71 T	1.69	0.34	1.01
4994	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.365	112
		22.43 C	-0.01	-0.25	0.00
4995	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.098	107
		5.14 T	0.00	-0.33	1.24
4996	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.581	106
		10.61 T	1.69	0.34	0.00
4997	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.554	106
		18.63 C	-1.12	-0.22	0.00
4998	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.609	112
		8.32 C	0.00	0.00	0.00
4999	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.318	106
		9.33 C	0.00	0.03	1.58
5000	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.481	106
		16.16 C	0.00	0.05	1.33
5001	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.327	106
		9.60 C	0.00	0.03	0.00
5002	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.059	104
		0.34 C	0.00	0.00	0.87
5003	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.424	112
		18.46 C	0.00	0.04	1.34
5004	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.011	106
		0.61 T	0.00	0.00	1.75
5005	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.018	104
		0.52 T	0.00	0.00	1.10

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5006	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.486	106
		16.34 C	0.00	0.05	0.00
5007	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.031	104
		0.22 C	0.00	0.00	0.74
5008	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.014	104
		0.40 T	0.00	0.00	0.98
5009	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.441	112
		19.26 C	0.00	0.04	0.00
5010	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.095	106
		1.32 C	0.00	0.00	0.61
5011	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.058	106
		1.63 T	0.00	0.00	0.77
5012	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.270	107
		18.44 C	0.01	0.04	0.00
5013	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.661	111
		40.31 C	0.01	0.33	0.00
5014	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.494	112
		29.10 C	0.01	-0.43	1.01
5015	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.649	111
		40.30 C	-0.01	-0.43	0.00
5016	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.277	107
		18.44 C	-0.01	0.07	0.00
5017	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.492	112
		28.97 C	0.01	-0.43	0.00
5018	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.118	106
		9.16 C	0.00	-0.22	0.00
5019	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.897	111
		12.25 C	0.00	0.00	0.00
5020	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.524	106
		15.22 C	0.00	0.06	1.58

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5021	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.738	106
		24.29 C	0.00	0.08	1.33
5022	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.543	106
		15.84 C	0.00	0.06	0.00
5023	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.108	104
		0.72 C	0.00	0.00	0.87
5024	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.608	111
		26.91 C	0.00	0.05	1.34
5025	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.22 T	0.00	0.00	1.75
5026	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.037	104
		1.03 T	0.00	0.00	1.10
5027	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.748	106
		24.68 C	0.00	0.08	0.00
5028	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.051	104
		0.45 C	0.00	0.00	0.74
5029	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.027	104
		0.75 T	0.00	0.00	0.98
5030	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.634	111
		28.13 C	0.00	0.05	0.00
5031	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.309	106
		2.27 C	0.00	0.00	0.61
5032	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.200	106
		2.81 T	0.00	0.00	0.77
5033	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.275	107
		18.26 C	0.05	0.04	0.00
5034	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.564	112
		34.13 C	0.01	0.28	0.00
5035	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.497	106
		41.73 T	-0.02	0.72	1.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5036	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.577	106
		55.80 T	0.03	0.68	0.00
5037	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.279	107
		18.26 C	-0.03	0.07	0.00
5038	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.496	106
		41.51 T	-0.02	0.72	0.00
5039	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.126	106
		9.18 C	0.01	-0.25	0.00
5040	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.766	111
		10.47 C	0.00	0.00	0.00
5041	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.601	106
		17.53 C	0.00	0.07	1.58
5042	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.813	106
		26.80 C	0.00	0.09	1.33
5043	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.616	106
		18.05 C	0.00	0.07	0.00
5044	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.078	104
		0.49 C	0.00	0.00	0.87
5045	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.630	106
		39.99 T	0.00	-0.07	1.34
5046	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.24 T	0.00	0.00	1.75
5047	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.027	104
		0.76 T	0.00	0.00	1.10
5048	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.821	106
		27.08 C	0.00	0.09	0.00
5049	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.031	104
		0.23 C	0.00	0.00	0.74
5050	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	104
		0.48 T	0.00	0.00	0.98

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5051	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.666	106
		42.47 T	0.00	-0.07	0.00
5052	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.314	106
		2.31 C	0.00	0.00	0.61
5053	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.203	106
		2.85 T	0.00	0.00	0.77
5054	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.055	106
		3.19 C	0.10	-0.03	0.00
5055	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.534	112
		31.71 C	0.02	0.29	0.00
5056	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.387	112
		22.02 C	0.01	-0.38	1.01
5057	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.526	106
		47.52 T	0.04	0.68	0.00
5058	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.066	106
		3.19 C	-0.05	0.08	0.00
5059	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.385	112
		21.91 C	0.01	-0.38	0.00
5060	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.406	106
		23.77 C	0.01	-0.36	0.00
5061	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.794	112
		10.84 C	0.00	0.00	0.00
5062	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.676	106
		19.98 C	0.00	0.07	1.58
5063	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.886	106
		29.46 C	0.00	0.09	1.33
5064	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.691	106
		20.48 C	0.00	0.07	0.00
5065	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.075	104
		0.47 C	0.00	0.00	0.87

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5066	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.689	106
		43.12 T	0.00	-0.09	1.34
5067	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.23 T	0.00	0.00	1.75
5068	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.026	104
		0.73 T	0.00	0.00	1.10
5069	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.894	106
		29.75 C	0.00	0.09	0.00
5070	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.031	104
		0.23 C	0.00	0.00	0.74
5071	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	104
		0.49 T	0.00	0.00	0.98
5072	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.728	106
		45.80 T	0.00	-0.09	0.00
5073	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.342	106
		2.52 C	0.00	0.00	0.61
5074	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.219	106
		3.08 T	0.00	0.00	0.77
5075	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.065	106
		4.03 C	0.12	-0.03	0.00
5076	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.536	112
		31.79 C	0.02	0.29	0.00
5077	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.440	106
		32.82 T	-0.03	0.70	1.01
5078	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.535	106
		48.49 T	0.05	0.68	0.00
5079	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	106
		4.03 C	-0.06	0.09	0.00
5080	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.439	106
		32.59 T	-0.03	0.70	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5081	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.375	106
		21.76 C	0.01	-0.34	0.00
5082	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.792	111
		10.82 C	0.00	0.00	0.00
5083	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.664	106
		19.57 C	0.00	0.07	1.58
5084	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.874	106
		29.01 C	0.00	0.09	1.33
5085	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.679	106
		20.07 C	0.00	0.07	0.00
5086	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.075	104
		0.47 C	0.00	0.00	0.87
5087	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.680	106
		42.60 T	0.00	-0.08	1.34
5088	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.23 T	0.00	0.00	1.75
5089	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.026	104
		0.73 T	0.00	0.00	1.10
5090	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.882	106
		29.30 C	0.00	0.09	0.00
5091	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.031	104
		0.23 C	0.00	0.00	0.74
5092	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	104
		0.49 T	0.00	0.00	0.98
5093	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.718	106
		45.25 T	0.00	-0.08	0.00
5094	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.338	106
		2.48 C	0.00	0.00	0.61
5095	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.216	106
		3.04 T	0.00	0.00	0.77

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5096	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.067	106
		4.31 C	0.13	-0.02	0.00
5097	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.538	112
		31.88 C	0.03	0.29	0.00
5098	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.452	106
		34.40 T	-0.04	0.71	1.01
5099	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.544	106
		49.68 T	0.06	0.68	0.00
5100	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.077	106
		4.31 C	0.06	0.09	0.00
5101	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.451	106
		34.18 T	-0.04	0.71	0.00
5102	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.337	106
		19.26 C	0.01	-0.32	0.00
5103	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.791	111
		10.80 C	0.00	0.00	0.00
5104	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.648	106
		19.07 C	0.00	0.07	1.58
5105	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.858	106
		28.45 C	0.00	0.09	1.33
5106	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.663	106
		19.57 C	0.00	0.07	0.00
5107	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.075	104
		0.47 C	0.00	0.00	0.87
5108	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.668	106
		41.96 T	0.00	-0.08	1.34
5109	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.22 T	0.00	0.00	1.75
5110	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.026	104
		0.73 T	0.00	0.00	1.10

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5111	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.866	106
		28.74 C	0.00	0.09	0.00
5112	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.030	104
		0.22 C	0.00	0.00	0.74
5113	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.017	104
		0.48 T	0.00	0.00	0.98
5114	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.706	106
		44.57 T	0.00	-0.08	0.00
5115	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.332	106
		2.44 C	0.00	0.00	0.61
5116	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.213	106
		2.99 T	0.00	0.00	0.77
5117	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.055	106
		3.45 C	0.11	-0.02	0.00
5118	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.546	112
		32.34 C	0.03	0.29	0.00
5119	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.466	106
		36.31 T	-0.04	0.71	1.01
5120	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.556	106
		51.09 T	0.07	0.68	0.00
5121	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.067	106
		3.45 C	-0.05	0.08	0.00
5122	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.464	106
		36.08 T	-0.04	0.71	0.00
5123	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.290	106
		16.22 C	0.01	-0.30	0.00
5124	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.793	111
		10.83 C	0.00	0.00	0.00
5125	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.628	106
		18.44 C	0.00	0.06	1.58

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5126	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.838	106
		27.75 C	0.00	0.09	1.33
5127	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.643	106
		18.93 C	0.00	0.06	0.00
5128	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.074	104
		0.46 C	0.00	0.00	0.87
5129	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.654	106
		41.17 T	0.00	-0.08	1.34
5130	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.22 T	0.00	0.00	1.75
5131	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.026	104
		0.72 T	0.00	0.00	1.10
5132	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.846	106
		28.02 C	0.00	0.09	0.00
5133	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.029	104
		0.21 C	0.00	0.00	0.74
5134	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.016	104
		0.46 T	0.00	0.00	0.98
5135	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.691	106
		43.72 T	0.00	-0.08	0.00
5136	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.324	106
		2.38 C	0.00	0.00	0.61
5137	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.208	106
		2.93 T	0.00	0.00	0.77
5138	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.258	106
		17.50 C	0.04	0.03	0.78
5139	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.576	111
		34.03 C	-0.04	0.30	0.00
5140	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.426	106
		32.13 T	0.06	0.65	1.01

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5141	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.565	112
		33.90 C	0.07	-0.39	0.00
5142	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.283	106
		17.50 C	-0.03	0.11	0.00
5143	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.411	111
		23.17 C	-0.03	-0.40	0.00
5144	LD L130X130X13		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.280	106
		15.83 C	-0.02	-0.27	0.00
5145	ST L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.868	112
		11.86 C	0.00	0.00	0.00
5146	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.546	106
		15.96 C	0.00	0.06	1.58
5147	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.759	106
		25.07 C	0.00	0.08	1.33
5148	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.566	106
		16.61 C	0.00	0.06	0.00
5149	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.093	106
		0.63 C	0.00	0.00	0.87
5150	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.597	106
		37.65 T	0.00	-0.07	1.34
5151	ST ISA75X75X8		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.004	104
		0.23 T	0.00	0.00	1.75
5152	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.033	106
		0.93 T	0.00	0.00	1.10
5153	LD L75X75X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.771	106
		25.53 C	0.00	0.08	0.00
5154	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.046	104
		0.39 C	0.00	0.00	0.74
5155	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.025	104
		0.69 T	0.00	0.00	0.98

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5156	LD L90X90X8		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.634	106
		40.22 T	0.00	-0.07	0.00
5157	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.325	106
		2.39 C	0.00	0.00	0.61
5158	ST ISA50X50X6		(INDIAN SECTIONS)		
		PASS	LRFD-H1-1A-T	0.210	106
		2.96 T	0.00	0.00	0.77
5160	ST IPE200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.204	105
		2.18 C	0.06	0.50	2.65
5161	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.098	105
		0.08 C	-0.09	0.04	1.75
5162	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.504	101
		0.21 C	0.00	-2.63	1.75
5163	LD L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.904	116
		0.00 C	-0.43	0.01	3.25
5164	ST IPE200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.127	106
		0.09 C	0.00	-0.54	0.00
5165	ST IPE200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.201	105
		2.45 C	0.05	0.50	0.00
5166	LD L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.929	113
		0.01 T	0.44	0.02	3.25
5167	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.208	106
		3.73 C	0.67	-17.38	0.00
5168	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.109	105
		0.38 T	-0.10	-0.05	1.75
5169	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.504	101
		0.21 C	0.00	-2.63	0.00
5172	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.109	105
		0.38 T	-0.10	-0.05	0.00
5175	LD L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.885	114
		0.01 T	-0.42	0.02	0.00

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5176	ST L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.305	113
		0.09 C	-0.06	0.01	0.00
5177	ST L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.188	114
		0.06 C	-0.03	0.00	2.10
5178	LD L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.913	116
		0.03 T	0.44	0.01	0.00
5180	ST L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.324	105
		0.71 C	-0.01	0.01	4.20
5181	ST HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.333	104
		10.86 C	-3.76	16.73	2.61
5182	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.422	109
		0.30 C	0.00	-1.73	1.75
5183	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.482	101
		2.18 C	-0.29	-13.70	0.00
5184	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.032	101
		0.04 T	0.00	-0.18	0.62
5185	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.272	101
		0.64 T	-0.07	-10.94	1.09
5186	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.027	101
		0.01 C	0.08	-0.38	0.52
5187	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.047	101
		2.53 T	0.00	-0.18	0.62
5188	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.528	109
		0.95 T	0.20	-20.87	0.00
5189	ST IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.028	101
		0.56 C	0.08	-0.38	0.52
5190	ST IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.682	101
		0.79 T	0.48	-25.57	0.00
5191	ST UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.036	101
		0.64 T	0.00	-0.18	0.62

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5192 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.538	101
		0.64 T	0.03	-22.41	0.40
5193 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.483	101
		0.64 T	-0.07	-19.89	1.11
5194 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.598	106
		4.48 T	3.86	0.00	1.25
5195 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.301	104
		0.75 C	-0.34	-10.43	0.00
5196 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.394	101
		9.25 T	0.42	-13.08	0.70
5197 ST	IPE450		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.682	101
		0.64 T	0.48	-25.57	0.70
5198 ST	IPE400		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.075	101
		0.42 T	0.00	-2.22	1.38
5199 ST	IPE200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.130	106
		0.58 C	-0.01	-0.57	0.00
5200 ST	UPN200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.113	105
		0.95 T	-0.10	0.05	0.00
5201 ST	L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.538	115
		1.27 C	0.08	0.00	0.00
5202 ST	HE500A		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.200	105
		33.14 C	-1.09	10.87	0.04
5203 ST	L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1A-C	0.238	105
		1.00 C	-0.01	0.00	3.18
5204 ST	L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.153	115
		0.02 C	0.03	0.01	0.00
5205 ST	L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.156	114
		0.02 C	0.03	0.01	0.00
5206 ST	IPE200		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.210	106
		2.38 C	0.00	-0.57	2.65

ALL UNITS ARE - MTON METE (UNLESS OTHERWISE Noted)

MEMBER	TABLE	RESULT/ FX	CRITICAL COND/ MY	RATIO/ MZ	LOADING/ LOCATION
5207	ST L65X65X6		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.165	113
		0.06 C	-0.03	0.01	0.00
5208	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.268	105
		0.84 C	0.00	13.30	0.00
5209	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-T	0.587	106
		2.66 T	-3.86	-2.75	0.87
5210	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.104	109
		1.32 C	-0.10	4.38	0.87
5211	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.161	105
		0.74 C	0.55	4.19	0.00
5212	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.161	105
		0.84 C	0.55	4.19	1.10
5213	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.207	105
		0.84 C	-0.08	9.74	0.00
5214	ST IPE500		(EUROPEAN SECTIONS)		
		PASS	LRFD-H1-1B-C	0.173	105
		0.00 C	0.00	-7.75	0.00
5216	ST L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.568	113
		9.06 C	0.00	0.00	0.00
5217	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.281	113
		8.90 T	0.00	0.00	0.00
5218	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.751	113
		7.05 C	0.00	0.00	0.00
5219	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.411	104
		3.44 C	0.00	0.00	0.00
5220	ST L90X90X8		(EUROPEAN SECTIONS)		
		PASS	TENSION	0.357	104
		11.32 T	0.00	0.00	0.00
5221	ST L100X100X10		(EUROPEAN SECTIONS)		
		PASS	COMPRESSION	0.798	101
		13.54 C	0.00	0.00	0.00

********** END OF TABULATED RESULT OF DESIGN **********

2121. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 30,2020 TIME= 9:17:50 ****

```
************************************************************
*   For technical assistance on STAAD.Pro, please visit    *
*   http://selectservices.bentley.com/en-US/               *
*                                                          *
*   Details about additional assistance from               *
*   Bentley and Partners can be found at program menu      *
*   Help->Technical Support                                *
*                                                          *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                    *
************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01			Outotec / L&T Revision No.:	0	1	2	3		
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023			Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023		
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT		
Prepared By	SHD	SHD	SHD	SHD			Prepared By	SHD	SHD	SHD	SHD		
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC		
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI		

ATTACHMENT 14 LOAD DATA DRAWING OF TRIPPER CONVEYOR

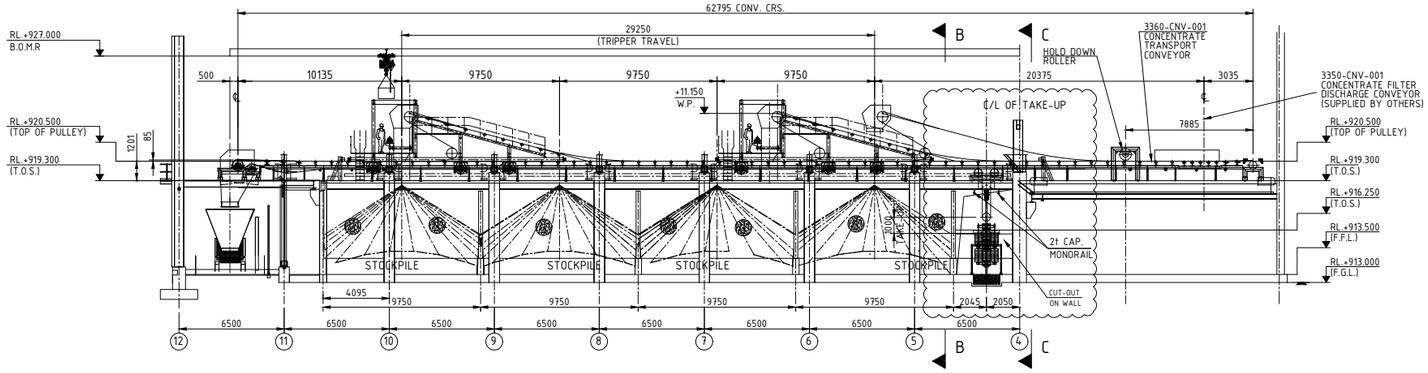

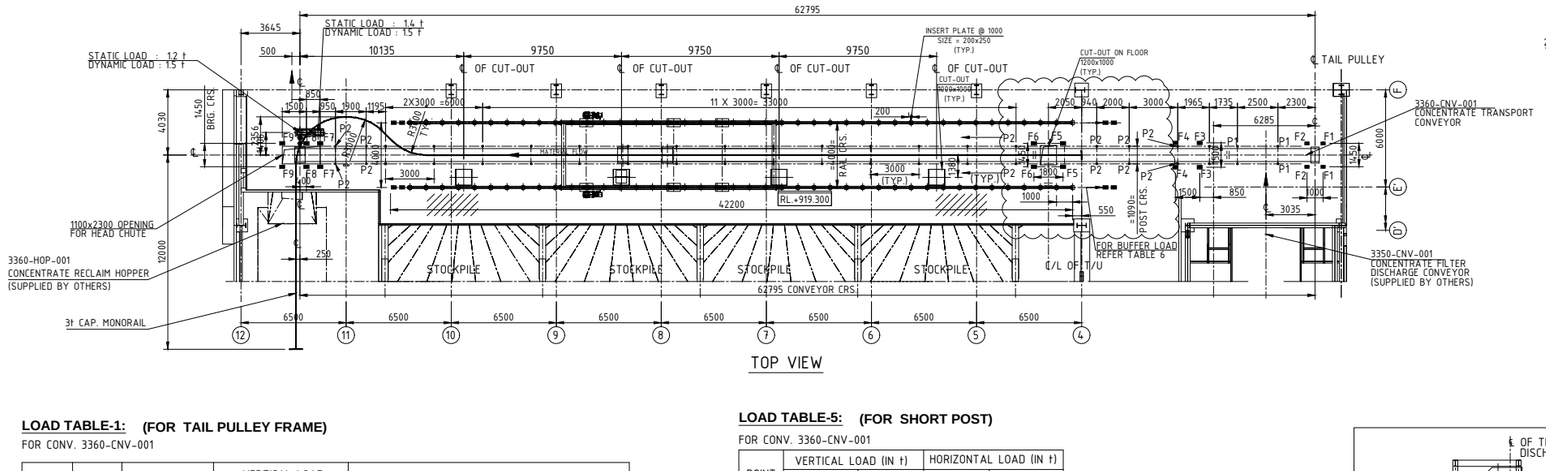

TOP VIEW



SECTION B-B



PLAN AT RL.+913.500



SECTION C-C



PLAN AT RL.+916.250

LOAD TABLE-1: **(FOR TAIL PULLEY FRAME)**

FOR CONV. 3360-CNV-001

POINTS	NOs.	ELEVATIONS IN "m"	VERTICAL LOAD (IN t.)	HORIZONTAL LOAD (IN t)	
				ALONG THE CONV.	ACROSS THE CONV.
F1	2	+5.800	(–)4.7	(+)3.5	(±)0.002
F2	2		(+)6.8	(+)4.15	(±)0.003

SIGN CONVENTION

UPWARD (–)
DOWNWARD (+)
TOWARDS HEAD PULLEY=(+)
TOWARDS TAIL PULLEY=(–)
REVERSIBLE LOAD (+/–)
ALL LOADS ARE ACTING AT TOP OF STEEL BEAM (ON INDIVIDUAL)

LOAD TABLE-2: **(FOR HOLD DOWN PULLEY FRAME)**

FOR CONV. 3360-CNV-001

POINTS	NOs.	ELEVATIONS IN "m"	VERTICAL LOAD (IN t)	HORIZONTAL LOAD (IN t)	
				ALONG THE CONV.	ACROSS THE CONV.
F3	2	+5.800	(+)1.0	(±)0.2	(±)0.2
F4	2		(+)1.0	(±)0.2	(±)0.2

LOAD TABLE-3: **(FOR BEND PULLEY FRAME)**

FOR CONV. 3360-CNV-001

POINTS	NOs.	ELEVATIONS IN "m"	VERTICAL LOAD (IN T.)	HORIZONTAL LOAD IN T.	
				ALONG THE CONV.	ACROSS THE CONV.
F5	2	+5.800	(+)4.46	(–)2.23	(±)0.2
F6	2		(+)4.46	(+)2.23	(±)0.2

LOAD TABLE-5: **(FOR SHORT POST)**

FOR CONV. 3360-CNV-001

POINT	VERTICAL LOAD (IN t)		HORIZONTAL LOAD (IN t)	
	DEAD LOAD	LIVE LOAD	ALONG	ACROSS
P1	(+) 0.65	(+) 0.3	(±) 0.10	(±) 0.06
P2	(+) 0.65	(+) 0.3	(±) 0.15	(±) 0.09
NOTE– TRAVELING TRIPPER WHEEL LOAD NOT INCLUDED				

LOAD TABLE-4: **(FOR HEAD PULLEY FRAME)**

FOR CONV. 3360-CNV-001

POINTS	NOs.	ELEVATIONS IN "m"	LOAD CASE I			LOAD CASE II	
			V (IN t)	H ALONG (IN t)	H ACCROSS (IN t)	V (IN t)	H (IN t)
F7	2	+5.800	(+)2.9	(–)2.70	(+)0.29	(+)4.03	(–)3.70
F8	2		(+)4.3	(–)1.50	(+)0.43	(+)3.92	(–)1.62
F9	2		(+)0.7	(–)0.95	(+)0.07	(–)1.52	(–)2.23

CONSIDER ACROSS CONV. LOAD OF 0.2 T(+/–) FOR DESIGN OF INDIVIDUAL FDN.
NOTE:CASE I :CONV. NORMAL RUNNING+CHUTE BLOCKED+DEAD
CASE II :CONV. STARTING +CHUTE EMPTY+DEAD

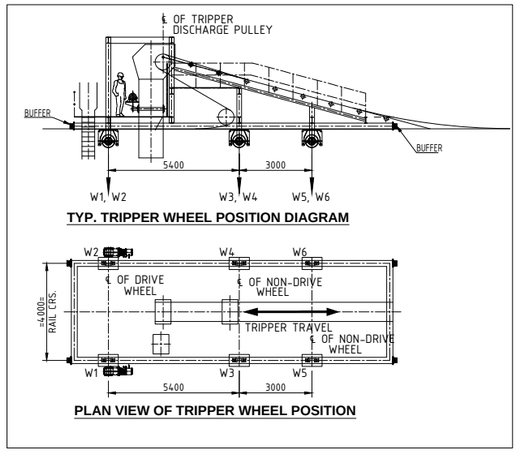

TABLE-6: **LOAD TABLE FOR TRAVELING TRIPPER**

FOR TRAVELING TRIPPER

WHEEL POSITION		MAX. LOAD / WHEEL(T)					
		WHEEL(W1)	WHEEL(W2)	WHEEL(W3)	WHEEL(W4)	WHEEL(W5)	WHEEL(W6)
VERTICAL	WITH CHUTE CLOGGING	8.00	8.00	7.00	7.00	5.20	5.20
	WITHOUT CHUTE CLOGGING	6.00	6.00	6.00	6.00	5.50	5.50
HORIZONTAL	ACROSS RAIL	0.60	0.60	0.60	0.60	0.60	0.60
	ALONG RAIL	0.60	0.60	0.60	0.60	0.60	0.60
DYNAMIC FACTOR TO BE CONSIDERED SUITABLY ON WITHOUT CHUTE CLOGGING CONDITION							
LOAD PER BUFFER – 4.0 T							
NOTE– SHORT POST LOAD NOT INCLUDED							

LOAD DATA FOR CONV. 3360-CNV-001

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17.03.20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	20-01-2020	03-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 17-03-20 & REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 15 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F6

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    APR  1, 2020                *
*           Time=    16:23:36                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3360-EG-GV-CAL-1231_F6.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     7. UNIT METER MTON
     8. JOINT COORDINATES
     9. 1 0 0 0; 2 0 3.5 0; 3 -1 0 0; 5 0 0 1; 6 -1 0 1; 8 0 0 -1; 9 -1 0 -1.
    10. 11 0 0 -0.75; 12 -0.25 0 -0.75; 13 -0.25 0 -1; 14 0 0 -0.5; 15 -0.25 0 -0.5
    11. 16 0 0 -0.25; 17 -0.25 0 -0.25; 18 -0.25 0 0; 19 -0.5 0 -0.75; 20 -0.5 0 -1.
    12. 21 -0.5 0 -0.5; 22 -0.5 0 -0.25; 23 -0.5 0 0; 24 -0.75 0 -0.75; 25 -0.75 0 -1.
    13. 26 -0.75 0 -0.5; 27 -0.75 0 -0.25; 28 -0.75 0 0; 29 -1 0 -0.75; 30 -1 0 -0.5
    14. 31 -1 0 -0.25; 32 0 0 0.25; 33 -0.25 0 0.25; 34 0 0 0.5; 35 -0.25 0 0.5
    15. 36 0 0 0.75; 37 -0.25 0 0.75; 38 -0.25 0 1; 39 -0.5 0 0.25; 40 -0.5 0 0.5
    16. 41 -0.5 0 0.75; 42 -0.5 0 1; 43 -0.75 0 0.25; 44 -0.75 0 0.5; 45 -0.75 0 0.75
    17. 46 -0.75 0 1; 47 -1 0 0.25; 48 -1 0 0.5; 49 -1 0 0.75; 63 1.25 0 -0.75
    18. 64 1.25 0 -1; 65 1.25 0 -0.5; 66 1.25 0 -0.25; 67 1.25 0 0; 68 1 0 -0.75
    19. 69 1 0 -1; 70 1 0 -0.5; 71 1 0 -0.25; 72 1 0 0; 73 0.75 0 -0.75; 74 0.75 0 -1.
    20. 75 0.75 0 -0.5; 76 0.75 0 -0.25; 77 0.75 0 0; 78 0.5 0 -0.75; 79 0.5 0 -1.
    21. 80 0.5 0 -0.5; 81 0.5 0 -0.25; 82 0.5 0 0; 83 0.25 0 -0.75; 84 0.25 0 -1.
    22. 85 0.25 0 -0.5; 86 0.25 0 -0.25; 87 0.25 0 0; 99 1.25 0 0.25; 100 1.25 0 0.5
    23. 101 1.25 0 0.75; 102 1.25 0 1; 103 1 0 0.25; 104 1 0 0.5; 105 1 0 0.75
    24. 106 1 0 1; 107 0.75 0 0.25; 108 0.75 0 0.5; 109 0.75 0 0.75; 110 0.75 0 1
    25. 111 0.5 0 0.25; 112 0.5 0 0.5; 113 0.5 0 0.75; 114 0.5 0 1; 115 0.25 0 0.25
    26. 116 0.25 0 0.5; 117 0.25 0 0.75; 118 0.25 0 1; 119 -1.25 0 -0.75
    27. 120 -1.25 0 -1; 121 -1.25 0 -0.5; 122 -1.25 0 -0.25; 123 -1.25 0 0
    28. 124 -1.25 0 0.25; 125 -1.25 0 0.5; 126 -1.25 0 0.75; 127 -1.25 0 1
    29. 128 -1.5 0 -0.75; 129 -1.5 0 -1; 130 -1.5 0 -0.5; 131 -1.5 0 -0.25
    30. 132 -1.5 0 0; 133 -1.5 0 0.25; 134 -1.5 0 0.5; 135 -1.5 0 0.75; 136 -1.5 0 1
    31. 185 1.5 0 -1; 186 1.5 0 -0.75; 187 1.5 0 -0.5; 188 1.5 0 -0.25; 189 1.5 0 0
    32. 190 1.5 0 0.25; 191 1.5 0 0.5; 192 1.5 0 0.75; 193 1.5 0 1; 194 0 0 -1.25
    33. 195 -0.25 0 -1.25; 196 -0.5 0 -1.25; 197 -0.75 0 -1.25; 198 -1 0 -1.25
    34. 199 1.25 0 -1.25; 200 1 0 -1.25; 201 0.75 0 -1.25; 202 0.5 0 -1.25
    35. 203 0.25 0 -1.25; 204 -1.25 0 -1.25; 205 -1.5 0 -1.25; 206 1.5 0 -1.25
    36. 207 0 0 1.25; 208 -0.25 0 1.25; 209 -0.5 0 1.25; 210 -0.75 0 1.25
    37. 211 -1 0 1.25; 212 1.25 0 1.25; 213 1 0 1.25; 214 0.75 0 1.25; 215 0.5 0 1.25
    38. 216 0.25 0 1.25; 217 -1.25 0 1.25; 218 -1.5 0 1.25; 219 1.5 0 1.25
    39. 220 -1.75 0 -0.75; 221 -1.75 0 -1; 222 -1.75 0 -0.5; 223 -1.75 0 -0.25
```

```
40. 224 -1.75 0 0; 225 -1.75 0 0.25; 226 -1.75 0 0.5; 227 -1.75 0 0.75
41. 228 -1.75 0 1; 229 -1.75 0 -1.25; 230 -1.75 0 1.25; 231 1.75 0 -1.
42. 232 1.75 0 -0.75; 233 1.75 0 -0.5; 234 1.75 0 -0.25; 235 1.75 0 0
43. 236 1.75 0 0.25; 237 1.75 0 0.5; 238 1.75 0 0.75; 239 1.75 0 1
44. 240 1.75 0 -1.25; 241 1.75 0 1.25; 242 0 0 -1.375; 243 -0.25 0 -1.375
45. 244 -0.5 0 -1.375; 245 -0.75 0 -1.375; 246 -1 0 -1.375; 247 1.25 0 -1.375
46. 248 1 0 -1.375; 249 0.75 0 -1.375; 250 0.5 0 -1.375; 251 0.25 0 -1.375
47. 252 -1.25 0 -1.375; 253 -1.5 0 -1.375; 254 1.5 0 -1.375; 255 -1.75 0 -1.375
48. 256 1.75 0 -1.375; 257 0 0 1.375; 258 -0.25 0 1.375; 259 -0.5 0 1.375
49. 260 -0.75 0 1.375; 261 -1 0 1.375; 262 1.25 0 1.375; 263 1 0 1.375
50. 264 0.75 0 1.375; 265 0.5 0 1.375; 266 0.25 0 1.375; 267 -1.25 0 1.375
51. 268 -1.5 0 1.375; 269 1.5 0 1.375; 270 -1.75 0 1.375; 271 1.75 0 1.375
52. MEMBER INCIDENCES
53. 101 2 1
54. ELEMENT INCIDENCES SHELL
55. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
56. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
57. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
58. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
59. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
60. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
61. 35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70
62. 52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76
63. 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84
64. 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11
65. 67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103
66. 83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107
67. 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111
68. 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115
69. 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32
70. 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119
71. 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124
72. 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128
73. 112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132
74. 115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135
75. 162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66
76. 166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100
77. 169 192 193 102 101; 170 194 8 13 195; 171 195 13 20 196; 172 196 20 25 197
78. 173 197 25 9 198; 174 199 64 69 200; 175 200 69 74 201; 176 201 74 79 202
79. 177 202 79 84 203; 178 203 84 8 194; 179 198 9 120 204; 180 204 120 129 205
80. 181 206 185 64 199; 182 5 207 208 38; 183 38 208 209 42; 184 42 209 210 46
81. 185 46 210 211 6; 186 102 212 213 106; 187 106 213 214 110
82. 188 110 214 215 114; 189 114 215 216 118; 190 118 216 207 5; 191 6 211 217 127
83. 192 127 217 218 136; 193 193 219 212 102; 194 129 128 220 221
84. 195 128 130 222 220; 196 130 131 223 222; 197 131 132 224 223
85. 198 132 133 225 224; 199 133 134 226 225; 200 134 135 227 226
86. 201 135 136 228 227; 202 205 129 221 229; 203 136 218 230 228
87. 204 231 232 186 185; 205 232 233 187 186; 206 233 234 188 187
88. 207 234 235 189 188; 208 235 236 190 189; 209 236 237 191 190
89. 210 237 238 192 191; 211 238 239 193 192; 212 240 231 185 206
90. 213 239 241 219 193; 214 242 194 195 243; 215 243 195 196 244
91. 216 244 196 197 245; 217 245 197 198 246; 218 247 199 200 248
92. 219 248 200 201 249; 220 249 201 202 250; 221 250 202 203 251
93. 222 251 203 194 242; 223 246 198 204 252; 224 252 204 205 253
94. 225 254 206 199 247; 226 253 205 229 255; 227 256 240 206 254
95. 228 207 257 258 208; 229 208 258 259 209; 230 209 259 260 210
```

```
 96. 231 210 260 261 211; 232 212 262 263 213; 233 213 263 264 214
 97. 234 214 264 265 215; 235 215 265 266 216; 236 216 266 257 207
 98. 237 211 261 267 217; 238 217 267 268 218; 239 219 269 262 212
 99. 240 218 268 270 230; 241 241 271 269 219
100. START GROUP DEFINITION
101. ELEMENT
102. _MAX_BM 5 TO 7 9 TO 11 13 TO 20 22 TO 24 26 TO 36 49 TO 67 81 TO 96 -
103. 98 TO 100 102 TO 117 162 TO 241
104. _MAX_SF 5 9 13 17 24 28 32 36 49 TO 57 61 65 81 TO 88 92 96 100 102 TO 117 -
105. 162 TO 241
106. END GROUP DEFINITION
107. ELEMENT PROPERTY
108. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 THICKNESS 0.5
109. DEFINE MATERIAL START
110. ISOTROPIC CONCRETE
111. E 2.21467E+006
112. POISSON 0.17
113. DENSITY 2.40262
114. ALPHA 1E-005
115. DAMP 0.05
116. TYPE CONCRETE
117. STRENGTH FCU 2812.28
118. END DEFINE MATERIAL
119. MEMBER PROPERTY AMERICAN
120. 101 PRIS YD 0.85 ZD 0.65
121. CONSTANTS
122. MATERIAL CONCRETE ALL
123. SUPPORTS
124. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 240 -
125. 241 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500

27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.062500
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.062500
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.062500
103	0.062500
104	0.062500
105	0.062500
106	0.062500

107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500
113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
128	0.062500
129	0.062500
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.062500
185	0.062500
186	0.062500
187	0.062500
188	0.062500
189	0.062500
190	0.062500
191	0.062500
192	0.062500
193	0.062500
194	0.046875
195	0.046875
196	0.046875
197	0.046875
198	0.046875
199	0.046875
200	0.046875
201	0.046875
202	0.046875
203	0.046875
204	0.046875
205	0.046875
206	0.046875
207	0.046875
208	0.046875
209	0.046875
210	0.046875

211	0.046875
212	0.046875
213	0.046875
214	0.046875
215	0.046875
216	0.046875
217	0.046875
218	0.046875
219	0.046875
220	0.031250
221	0.031250
222	0.031250
223	0.031250
224	0.031250
225	0.031250
226	0.031250
227	0.031250
228	0.031250
229	0.023437
230	0.023437
231	0.031250
232	0.031250
233	0.031250
234	0.031250
235	0.031250
236	0.031250
237	0.031250
238	0.031250
239	0.031250
240	0.023437
241	0.023437
242	0.015625
243	0.015625
244	0.015625
245	0.015625
246	0.015625
247	0.015625
248	0.015625
249	0.015625
250	0.015625
251	0.015625
252	0.015625
253	0.015625
254	0.015625
255	0.007812
256	0.007812
257	0.015625
258	0.015625
259	0.015625
260	0.015625
261	0.015625
262	0.015625
263	0.015625
264	0.015625
265	0.015625
266	0.015625

```
       267          0.015625
       268          0.015625
       269          0.015625
       270          0.007812
       271          0.007812
    TOTAL           9.625000
126. LOAD 1 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR
127. SELFWEIGHT Y -1
128. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 607
129. JOINT LOAD
130. 2 FX -0.5 FY -17.3 FZ 0.1
131. ELEMENT LOAD
132. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
133. LOAD 2 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
134. SELFWEIGHT Y -1
135. ELEMENT LOAD
136. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
137. JOINT LOAD
138. 2 FX 1 FY 11.7 FZ -4.7
139. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
140. SELFWEIGHT Y -1
141. ELEMENT LOAD
142. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
143. JOINT LOAD
144. 2 FX 4.1 FY -8.5 FZ -1.3
145. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
146. SELFWEIGHT Y -1
147. ELEMENT LOAD
148. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
149. JOINT LOAD
150. 2 FX -0.5 FY -10.3 FZ -1.4
151. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
152. SELFWEIGHT Y -1
153. ELEMENT LOAD
154. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
155. JOINT LOAD
156. 2 FX -0.5 FY -11.3 FZ -1.1
157. LOAD 6 LOADTYPE NONE  TITLE 0.6DL+WLX1
158. SELFWEIGHT Y -1
159. ELEMENT LOAD
160. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
161. JOINT LOAD
162. 2 FX 1.9 FY 31.3 FZ -6.3
163. LOAD 7 LOADTYPE NONE  TITLE 0.6DL+WLX2
164. SELFWEIGHT Y -1
165. JOINT LOAD
166. 2 FX 6.1 FY 4.4 FZ -1.8
167. ELEMENT LOAD
168. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
169. LOAD 8 LOADTYPE NONE  TITLE 0.6DL+WLZ1
170. SELFWEIGHT Y -1
171. ELEMENT LOAD
172. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
173. JOINT LOAD
174. 2 FX -0.2 FY 2 FZ -1.9
175. LOAD 9 LOADTYPE NONE  TITLE 0.6DL+WLZ2
```

```
176. SELFWEIGHT Y -1
177. ELEMENT LOAD
178. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -2.7
179. JOINT LOAD
180. 2 FX -0.2 FY 0.6 FZ -1.4
181. LOAD 10 LOADTYPE NONE  TITLE DL+LL
182. SELFWEIGHT Y -1
183. ELEMENT LOAD
184. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
185. JOINT LOAD
186. 2 FX -0.3 FY -13.8 FZ 0.2
187. LOAD 11 LOADTYPE NONE  TITLE DL+LR
188. SELFWEIGHT Y -1
189. ELEMENT LOAD
190. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4.5
191. JOINT LOAD
192. 2 FX -0.6 FY -18.4 FZ 0.1
193. ******************************************************************
194. *LOAD CASES FOR FOUNDATION DESIGN
195. LOAD 100 LOADTYPE NONE  TITLE 1.4(DL+LL)
196. SELFWEIGHT Y -1
197. ELEMENT LOAD
198. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -6.3
199. JOINT LOAD
200. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 607
201. 2 FX -0.5 FY -19.3 FZ 0.3
202. ************************************
203. LOAD 101 LOADTYPE NONE  TITLE 1.4DL+1.7LL + 0.5LR
204. SELFWEIGHT Y -1
205. ELEMENT LOAD
206. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -6.3
207. JOINT LOAD
208. 2 FX -0.6 FY -21.6 FZ 0.2
209. ******************************************
210. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
211. SELFWEIGHT Y -1
212. ELEMENT LOAD
213. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
214. JOINT LOAD
215. 2 FX 0.3 FY -4.7 FZ -3.2
216. ******************************************************
217. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
218. SELFWEIGHT Y -1
219. ELEMENT LOAD
220. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
221. JOINT LOAD
222. 2 FX 2.3 FY -18.1 FZ -0.9
223. ******************************************************
224. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
225. SELFWEIGHT Y -1
226. ELEMENT LOAD
227. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
228. JOINT LOAD
229. 2 FX -0.8 FY -19.3 FZ -1.
230. ******************************************************
231. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
```

```
232. SELFWEIGHT Y -1
233. ELEMENT LOAD
234. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
235. JOINT LOAD
236. 2 FX -0.8 FY -20 FZ -0.8
237. ******************************************************
238. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
239. SELFWEIGHT Y -1
240. ELEMENT LOAD
241. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
242. JOINT LOAD
243. 2 FX 6.0 FY -2.8 FZ -0.1
245. ******************************************************
246. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
247. SELFWEIGHT Y -1
248. ELEMENT LOAD
249. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
250. JOINT LOAD
251. 2 FX 0.6 FY -20.2 FZ 0.1
253. ******************************************************
254. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
255. SELFWEIGHT Y -1
256. ELEMENT LOAD
257. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
258. JOINT LOAD
259. 2 FX 1.3 FY -22.2 FZ 0.0
261. ******************************************************
262. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
263. SELFWEIGHT Y -1
264. ELEMENT LOAD
265. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -5.4
266. JOINT LOAD
267. 2 FX 1.4 FY -22.1 FZ 0.1
269. ******************************************************
270. LOAD 110 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
271. SELFWEIGHT Y -1
272. ELEMENT LOAD
273. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
274. JOINT LOAD
275. 2 FX 4.9 FY 8.2 FZ -0.2
277. ******************************************************
278. LOAD 111 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
279. SELFWEIGHT Y -1
280. ELEMENT LOAD
281. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
282. JOINT LOAD
283. 2 FX -0.5 FY -9.1 FZ 0.0
285. ******************************************************
286. LOAD 112 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
287. SELFWEIGHT Y -1
288. ELEMENT LOAD
289. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
290. JOINT LOAD
291. 2 FX 0.3 FY -11.2 FZ -0.1
293. ******************************************************
294. LOAD 113 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
```

```
295. SELFWEIGHT Y -1
296. ELEMENT LOAD
297. 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241 PR GY -4
298. JOINT LOAD
299. 2 FX 0.3 FY -11.1 FZ 0.0
301. ******************************************************
302. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	196	NUMBER OF MEMBERS	1
NUMBER OF PLATES	168	NUMBER OF SOLIDS	0
NUMBER OF SURFACES	0	NUMBER OF SUPPORTS	195

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 137/ 23/ 72 DOF
TOTAL PRIMARY LOAD CASES = 25, TOTAL DEGREES OF FREEDOM = 591
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 43 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 13.5/ 164799.0 MB

```
**NOTE-Tension/Compression converged after  1 iterations, Case=    1

**NOTE-Tension/Compression converged after  1 iterations, Case=    2

**NOTE-Tension/Compression converged after  1 iterations, Case=    3

**NOTE-Tension/Compression converged after  1 iterations, Case=    4

**NOTE-Tension/Compression converged after  1 iterations, Case=    5

**START ITERATION NO.           2
**START ITERATION NO.           3
**START ITERATION NO.           4

**NOTE-Tension/Compression converged after  4 iterations, Case=    6
```

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 100

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

303. LOAD LIST 1 TO 11
304. PRINT SUPPORT REACTION ALL

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.50	0.53	-0.10	0.00	0.00	0.00
	2	-1.00	0.30	4.70	0.00	0.00	0.00
	3	-4.10	0.46	1.30	0.00	0.00	0.00
	4	0.50	0.47	1.40	0.00	0.00	0.00
	5	0.50	0.48	1.10	0.00	0.00	0.00
	6	-1.90	0.09	6.30	0.00	0.00	0.00
	7	-6.10	0.24	1.80	0.00	0.00	0.00
	8	0.20	0.26	1.90	0.00	0.00	0.00
	9	0.20	0.28	1.40	0.00	0.00	0.00
	10	0.30	0.50	-0.20	0.00	0.00	0.00
	11	0.60	0.54	-0.10	0.00	0.00	0.00
3	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
5	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
6	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
8	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
9	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
11	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
12	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
13	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.42	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
14	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
15	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.26	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
16	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
17	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
18	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
19	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
20	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
21	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
22	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
23	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.07	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
24	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
25	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.51	0.00	0.00	0.00	0.00
26	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
27	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
28	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
29	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
30	1	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
31	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
32	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
33	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
34	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
35	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.40	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
36	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
37	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.16	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
38	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
39	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
40	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
41	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
42	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
43	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
44	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
45	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
46	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
47	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
48	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
49	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
63	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
65	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
66	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
67	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
68	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
69	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
70	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.42	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
71	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.27	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
72	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
73	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
74	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
75	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
76	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.25	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
77	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
78	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
79	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
80	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
81	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.28	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
82	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
83	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
84	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.51	0.00	0.00	0.00	0.00
85	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
86	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.31	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
87	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.29	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
99	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
100	1	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
101	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
102	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.21	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
103	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.29	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.11	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
104	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.25	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.35	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
105	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.33	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
106	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.17	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
107	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
108	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
109	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
110	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
111	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
112	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
113	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
114	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.15	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
115	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.03	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
116	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
117	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
118	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
119	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.29	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
120	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.45	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
122	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.33	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
123	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.05	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
124	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
125	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
126	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
127	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
128	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.33	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
129	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.33	0.00	0.00	0.00	0.00
	9	0.00	0.32	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
130	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
131	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
132	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.04	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
133	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
134	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
135	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
136	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.25	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.23	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
185	1	0.00	0.46	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.31	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
186	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.46	0.00	0.00	0.00	0.00
	5	0.00	0.46	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
187	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.45	0.00	0.00	0.00	0.00
	5	0.00	0.45	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.29	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
188	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.31	0.00	0.00	0.00	0.00
	7	0.00	0.46	0.00	0.00	0.00	0.00
	8	0.00	0.27	0.00	0.00	0.00	0.00
	9	0.00	0.27	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
189	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.35	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.43	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.45	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.47	0.00	0.00	0.00	0.00
190	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.31	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.43	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.43	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
191	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.27	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.40	0.00	0.00	0.00	0.00
	5	0.00	0.42	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.42	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
192	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.40	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	0.00	0.40	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
193	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.21	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
194	1	0.00	0.37	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
195	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
196	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.37	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
197	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.38	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
198	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.35	0.00	0.00	0.00	0.00
	7	0.00	0.14	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
199	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.45	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.45	0.00	0.00	0.00	0.00
	7	0.00	0.37	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.35	0.00	0.00	0.00	0.00
200	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.36	0.00	0.00	0.00	0.00
201	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.42	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.37	0.00	0.00	0.00	0.00
	6	0.00	0.43	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
202	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
203	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.40	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
204	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
205	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.33	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.26	0.00	0.00	0.00	0.00
	9	0.00	0.25	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
206	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.46	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.25	0.00	0.00	0.00	0.00
	9	0.00	0.24	0.00	0.00	0.00	0.00
	10	0.00	0.33	0.00	0.00	0.00	0.00
	11	0.00	0.35	0.00	0.00	0.00	0.00
207	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
208	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
209	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.25	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
210	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
211	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
212	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.37	0.00	0.00	0.00	0.00
	4	0.00	0.28	0.00	0.00	0.00	0.00
	5	0.00	0.29	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.36	0.00	0.00	0.00	0.00
213	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.35	0.00	0.00	0.00	0.00
	4	0.00	0.28	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00
214	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.09	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.37	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
215	1	0.00	0.37	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.17	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
216	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
217	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
218	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.30	0.00	0.00	0.00	0.00
	5	0.00	0.31	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
219	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.27	0.00	0.00	0.00	0.00
	5	0.00	0.29	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.35	0.00	0.00	0.00	0.00
220	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
221	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.25	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.17	0.00	0.00	0.00	0.00
	9	0.00	0.16	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
222	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.10	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
223	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
224	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
225	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
226	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
227	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
228	1	0.00	0.25	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.25	0.00	0.00	0.00	0.00
229	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.17	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
230	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.03	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.15	0.00	0.00	0.00	0.00
	5	0.00	0.16	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.07	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.18	0.00	0.00	0.00	0.00
	11	0.00	0.19	0.00	0.00	0.00	0.00
231	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.26	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.27	0.00	0.00	0.00	0.00
	8	0.00	0.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
232	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00
	3	0.00	0.31	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.26	0.00	0.00	0.00	0.00
	8	0.00	0.15	0.00	0.00	0.00	0.00
	9	0.00	0.15	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
233	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.14	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
234	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.25	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.14	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
235	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.13	0.00	0.00	0.00	0.00
	9	0.00	0.13	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.23	0.00	0.00	0.00	0.00
236	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.16	0.00	0.00	0.00	0.00
	3	0.00	0.29	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
237	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.11	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
238	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.02	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.10	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
239	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.10	0.00	0.00	0.00	0.00
	3	0.00	0.27	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.11	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
240	1	0.00	0.17	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.18	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.12	0.00	0.00	0.00	0.00
	10	0.00	0.16	0.00	0.00	0.00	0.00
	11	0.00	0.17	0.00	0.00	0.00	0.00
241	1	0.00	0.17	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.14	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.15	0.00	0.00	0.00	0.00
	8	0.00	0.06	0.00	0.00	0.00	0.00
	9	0.00	0.07	0.00	0.00	0.00	0.00
	10	0.00	0.17	0.00	0.00	0.00	0.00
	11	0.00	0.17	0.00	0.00	0.00	0.00
242	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
243	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
244	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
245	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
246	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.13	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.09	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
247	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
248	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.15	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.00	0.16	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
249	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.11	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
250	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.14	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.15	0.00	0.00	0.00	0.00
	7	0.00	0.10	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
251	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.13	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.14	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
252	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
253	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.13	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.13	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
254	1	0.00	0.11	0.00	0.00	0.00	0.00
	2	0.00	0.14	0.00	0.00	0.00	0.00
	3	0.00	0.16	0.00	0.00	0.00	0.00
	4	0.00	0.12	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.17	0.00	0.00	0.00	0.00
	7	0.00	0.13	0.00	0.00	0.00	0.00
	8	0.00	0.09	0.00	0.00	0.00	0.00
	9	0.00	0.08	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
255	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.06	0.00	0.00	0.00	0.00
	3	0.00	0.04	0.00	0.00	0.00	0.00
	4	0.00	0.06	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.06	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.04	0.00	0.00	0.00	0.00
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00
256	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.07	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.06	0.00	0.00	0.00	0.00
	5	0.00	0.06	0.00	0.00	0.00	0.00
	6	0.00	0.09	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	10	0.00	0.05	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00
257	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.04	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
258	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.09	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.03	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
259	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.02	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
260	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
261	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.07	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.01	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
262	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.03	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
263	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.03	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.07	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
264	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
265	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.11	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.06	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
266	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.10	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
267	1	0.00	0.13	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.07	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
268	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.06	0.00	0.00	0.00	0.00
	4	0.00	0.10	0.00	0.00	0.00	0.00
	5	0.00	0.10	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.12	0.00	0.00	0.00	0.00
	11	0.00	0.13	0.00	0.00	0.00	0.00
269	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.03	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.09	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.09	0.00	0.00	0.00	0.00
	8	0.00	0.04	0.00	0.00	0.00	0.00
	9	0.00	0.05	0.00	0.00	0.00	0.00
	10	0.00	0.11	0.00	0.00	0.00	0.00
	11	0.00	0.12	0.00	0.00	0.00	0.00
270	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.01	0.00	0.00	0.00	0.00
	3	0.00	0.03	0.00	0.00	0.00	0.00
	4	0.00	0.05	0.00	0.00	0.00	0.00
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.00	0.00	0.00	0.00	0.00
	8	0.00	0.02	0.00	0.00	0.00	0.00
	9	0.00	0.03	0.00	0.00	0.00	0.00
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00
271	1	0.00	0.06	0.00	0.00	0.00	0.00
	2	0.00	0.02	0.00	0.00	0.00	0.00
	3	0.00	0.06	0.00	0.00	0.00	0.00
	4	0.00	0.04	0.00	0.00	0.00	0.00
	5	0.00	0.05	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	0.00	0.05	0.00	0.00	0.00	0.00
	8	0.00	0.02	0.00	0.00	0.00	0.00
	9	0.00	0.02	0.00	0.00	0.00	0.00
	10	0.00	0.06	0.00	0.00	0.00	0.00
	11	0.00	0.06	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

305. PRINT JOINT DISPLACEMENTS LIST 2

JOINT DISPLACEMENT (CM RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
2	1	-0.0358	-0.1624	0.0099	0.0000	0.0000	0.0001
	2	0.0717	-0.0864	-0.4668	-0.0015	0.0000	-0.0002
	3	0.2939	-0.1393	-0.1291	-0.0004	0.0000	-0.0009
	4	-0.0358	-0.1441	-0.1390	-0.0005	0.0000	0.0001
	5	-0.0358	-0.1467	-0.1093	-0.0004	0.0000	0.0001
	6	0.1605	-0.0178	-0.7240	-0.0024	0.0000	-0.0005
	7	0.4389	-0.0720	-0.1804	-0.0006	0.0000	-0.0014
	8	-0.0143	-0.0785	-0.1887	-0.0006	0.0000	0.0000
	9	-0.0143	-0.0822	-0.1390	-0.0005	0.0000	0.0000
	10	-0.0215	-0.1532	0.0199	0.0001	0.0000	0.0001
	11	-0.0430	-0.1653	0.0099	0.0000	0.0000	0.0001

********** END OF LATEST ANALYSIS RESULT **********

306. LOAD LIST 100 TO 113
307. START CONCRETE DESIGN

```
308. CODE ACI
309. CLB 0.05 MEMB 101
310. CLS 0.05 ALL
311. CLT 0.05 MEMB 101
312. FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 194 TO 203 214 -
313. 215 TO 224 226 228 TO 238 240
314. FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 117 170 TO 180 182 TO 192 -
315. 194 TO 203 214 TO 224 226 228 TO 238 240
316. FYSEC 42813 ALL
317. MAXMAIN 32 ALL
318. MINMAIN 12 ALL
319. CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
320. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
321. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 117 162 TO 241
322. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, RECT SIZE - 650.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 5525.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
28 - 16 MM	1.019	100	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

323. END CONCRETE DESIGN
324. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= APR 1,2020 TIME= 16:24:58 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```