

DRAWING NUMBER MD-216-3410-EG-CV-DED-1242 REV D01

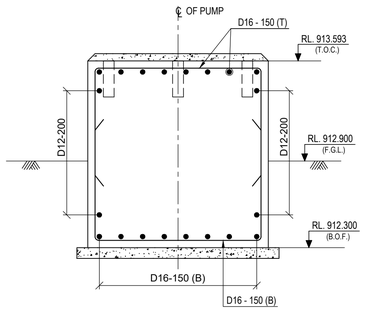

SECTION : A-A


SCALE 1:20

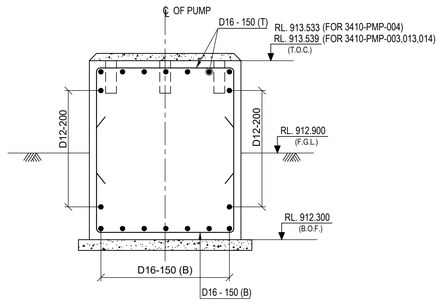

SECTION : B-B

(FOR 3410-PMP-003,3410-PMP-004,3410-PMP-013,3410-PMP-014)


SCALE 1:20

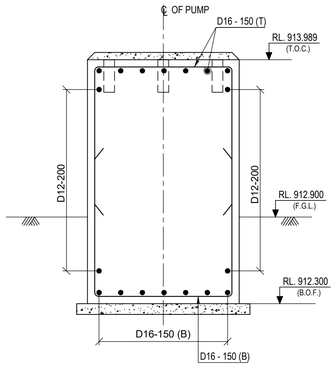

SECTION : B-B

(FOR 3410-PMP-009,3410-PMP-010)


SCALE 1:20



RC. DET. OF FDN. FOR PUMP MKD.
3410-PMP-001,3410-PMP-002

(BOTTOM VIEW)


SCALE 1:20



RC. DET. OF FDN. FOR PUMP MKD.
3410-PMP-001,3410-PMP-002

(TOP VIEW)


SCALE 1:20



RC. DET. OF FDN. FOR PUMP MKD.
3410-PMP-003,3410-PMP-004
3410-PMP-009,3410-PMP-010
3410-PMP-013,3410-PMP-014

(BOTTOM VIEW)

SCALE 1:20



RC. DET. OF FDN. FOR PUMP MKD.
3410-PMP-003,3410-PMP-004
3410-PMP-009,3410-PMP-010
3410-PMP-013,3410-PMP-014

(TOP VIEW)

SCALE 1:20

LEGEND :-

AUTOCL. - AUTOCLAVE
R.L. - REDUCED LEVEL
T.O.C. - TOP OF CONCRETE.
F.G.L. - FINISHED GROUND LEVEL.
TYP. - TYPICAL.
P.C.C - PLAIN CEMENT CONCRETE
BOTTOM REINF.(B) - – – – – –
TOP REINF.(T) - ————
MKD. - MARKED
℄ - CENTRE LINE
B.O.F. - BOTTOM OF FOUNDATION
THK. - THICK
FDN. - FOUNDATION
RCC - REINFORCED CEMENT CONCRETE
RC - REINFORCED CONCRETE

NOTES :-

1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS AND CO-ORDINATES ARE IN METRES. UNLESS OTHERWISE STATED.
2. GRADE OF CONCRETE SHALL BE C35 (35MPa) FOR FOUNDATION.
3. GRADE OF REINFORCEMENT SHALL BE DEFORMED BAR ASTM A615 - GRADE 60 (fy = 420 MPa).
4. NET SAFE BEARING CAPACITY OF SOIL AT BOTTOM OF FOUNDATION IS CONSIDERED AS 350 KN/SQ.M.
5. CLEAR COVER TO MAIN REINFORCEMENT SHALL BE AS FOLLOWS
   a) FOUNDATION = 50 mm (BOTTOM & SIDE) 50 mm. (TOP)
6. IF ANY PART OF FOUNDATION COMES ON BACKFILL ZONE OF ADJACENT FOUNDATION OR ANY LOOSE SOIL ARE ENCOUNTERED BELOW FOUNDATION LEVEL THE SAME SHALL BE REMOVED AND FILLED WITH PCC.
7. FOR STANDARD REINFORCEMENT DETAIL & GENERAL NOTES FOR CIVIL WORKS REFER DRAWING NO. MD-216-1000-EG-CV-DED-1005 &1001.

DOCUMENT NUMBER	REFERENCE DOCUMENTS	REV	DATE	REVISION DESCRIPTION	DRN	CHK	ENG	APP	EMP
		D01	15/03/2023	AS-BUILT	PML	SJM	SOR	AG	
MD-216-3420-EG-ME-GAD-1011	PRESSURE OXIDATION - FEED STORAGE	C01	13/11/2020	ISSUED FOR CONSTRUCTION	PML	SJM	SOR	AG	
	PLAN AT EL. +912.900	A01	29/09/2020	ISSUED FOR APPROVAL	PML	SJM	SOR	AG	

RESERVED FOR VENDOR LOGO AND DRAWING NUMBER

LARSEN & TOUBRO

This drawing is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Outotec

The content of these documents are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without prior written permission of Outotec is prohibited.

MA'ADEN معادن
Saudi Arabian Mining Company شركة التعدين العربية السعودية

This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.

LARSEN & TOUBRO DRAWING NUMBER: 019045_450_C_D_24425_001 — REVISION: 2

OUTOTEC DRAWING NUMBER: 900707__GAU01__HH12__CTB17__34102 — DOCUMENT ID: 0U100698186 — REVISION: 2

DRAWN	PML	21/09/2020
CHECKED	SJM	22/09/2020
ENGINEER	SOR	21/09/2020
APPROVED	AG	29/09/2020
EMPLOYER		
SCALE 1:50, 1:10		A1

MANSOURAH - MASSARAH GOLD PROJECT
DETAIL DRAWING
PRESSURE OXIDATION - AUTOCL. FEED STORAGE
RCC DETAILS OF PUMP FOUNDATION

DRAWING NUMBER: MD-216-3410-EG-CV-DED-1242 — REV: D01