

Unit 113 - Field Data Review

Mohawk Valley West Slope demonstration. Method **Tractor**, 73.2 ac, BAF 20 variable-radius cruise on a 300 ft grid, 36 plots, 411 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

Table 1. Stand summary from the BAF 20 cruise, per acre

STAND DENSITY		STAND INFO	
Basal area	228 sq ft/ac (1 SE of mean, BA 2.0 %)	Type	Sierran mixed conifer
Trees per acre	70	CWHR size / density	5 / D (cover 95 %)
QMD	24.5 in	SDI	283 (49 % of max 573)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	228 sq ft/ac 24.5 in	BA QMD	0 sq ft/ac 0.0 in
TPA	70	TPA	0
Volume	39.7 MBF/ac (7904 cu ft)	Volume	0.0 green tons/ac (0 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI = ~162 sq ft/ac BA	Sampling error (volume)	6.1 % at 95 % (CV 18 %, t = 2.03, n = 36)
Species (BA)	PP 70, WF 66, IC 36, DF 34, SP 23	Stratum standard	40 % of volume - MEETS; plots for standard: 1
		Sampling error (basal area)	4.1 % at 95 % (CV 12 %); secondary, not the standard
		Plot count	36 vs 20-plot local practice, not a handbook standard: ok

Cubic volume = total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium) net of defect; Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006); green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber, so applied to total-stem CVTS it overstates sawlog volume; merchantable cubic volume would be the consistent pairing. Sampling error at 95 % confidence with Student's t on plot net cubic volume per acre, the quantity the handbook standards apply to (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales; the basal-area error is secondary. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables exclude records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: cruise_data.xlsx, Standards and assumptions.

Table 2. Stand table by 4-inch DBH class, per acre

DBH class, in	Trees	TPA	BA	cu ft	MBF
8-11.9	3	2.7	1.7	42	0.2
12-15.9	18	9.2	10.0	259	1.3
16-19.9	45	13.9	25.0	676	3.4
20-23.9	81	17.3	45.0	1363	6.8
24-27.9	70	10.6	38.9	1290	6.5
28-31.9	50	5.8	27.8	943	4.7
32-35.9	49	4.3	27.2	1039	5.2
36-39.9	43	3.1	23.9	999	5.0
40-43.9	21	1.2	11.7	500	2.5
44-47.9	13	0.6	7.2	311	1.6
48-51.9	5	0.2	2.8	127	0.6
52-55.9	5	0.2	2.8	127	0.6
56-59.9	4	0.1	2.2	107	0.5
60-63.9	4	0.1	2.2	120	0.6
All	411	69.5	228.3	7904	39.7

Table 3. Stock table by species, per acre

Species	Trees	TPA	BA	QMD	cu ft	MBF
PP	126	20.3	70.0	25.2	2704	13.6
WF	118	19.6	65.6	24.8	2300	11.5
IC	64	10.7	35.6	24.6	999	5.0
DF	62	12.7	34.4	22.3	1093	5.5
SP	41	6.2	22.8	25.9	808	4.1
All	411	69.5	228.3	24.5	7904	39.7

Trees = trees tallied in the cruise; TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 113: plots on the 300 ft grid (orange = QA flag)

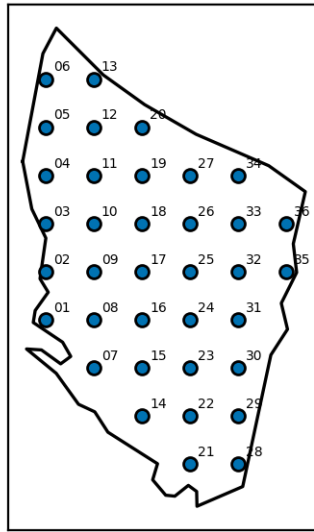


Figure 1. Plot locations with QA status.

QA findings: no issues found; unit accepted

Table 4. Plot list

Plot	Trees in	BA sq ft/ac	Slope %	Status
113-01	13	260	26	ok
113-02	14	280	27	ok
113-03	11	220	27	ok
113-04	11	220	24	ok
113-05	13	260	28	ok
113-06	13	260	31	ok
113-07	9	180	21	ok
113-08	13	260	16	ok
113-09	11	220	35	ok
113-10	12	240	21	ok
113-11	12	240	33	ok
113-12	11	220	20	ok
113-13	11	220	23	ok
113-14	12	240	23	ok
113-15	11	220	33	ok
113-16	13	260	25	ok
113-17	11	220	22	ok
113-18	12	240	11	ok
113-19	9	180	32	ok
113-20	10	200	19	ok
113-21	12	240	35	ok
113-22	10	200	30	ok
113-23	12	240	28	ok
113-24	12	240	27	ok
113-25	10	200	25	ok
113-26	10	200	27	ok
113-27	10	200	32	ok
113-28	10	200	21	ok
113-29	12	240	17	ok
113-30	12	240	10	ok
113-31	9	180	10	ok
113-32	11	220	9	ok
113-33	12	240	15	ok
113-34	15	300	17	ok
113-35	11	220	13	ok
113-36	11	220	11	ok