

Unit 106 Field Data Review

Mohawk Valley West Slope demonstration. **Tractor** unit, 88.6 ac. 41 plots, BAF 20, variable-radius cruise on a 300 ft grid, 437 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

TABLE 1. STAND SUMMARY, BAF 20 CRUISE, PER ACRE

STAND DENSITY		STAND INFO	
Basal area	213 sq ft/ac (1 SE of mean, BA 3.1 %)	Type	Sierran mixed conifer
Trees per acre	95	CWHR size / density	4 / D (cover 85 %)
QMD	20.3 in	SDI	272 (47 % of max 580)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	207 sq ft/ac 22.9 in	BA QMD	6 sq ft/ac 7.0 in
TPA	73	TPA	22
Volume	35.5 MBF/ac (7064 cu ft)	Volume	1.7 green tons/ac (77 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI, about 159 sq ft/ac	BASampling error (volume)	11.9 % at 95 % (CV 38 %, t = 2.02, n = 41)
Species (BA)	WF 68, PP 65, IC 32, DF 29, SP 19	Stratum standard	40 % of volume, MEETS; plots for standard 4
		Sampling error (basal area)	3 % at 95 % (CV 20 %); reference, not the standard
		Plot count	41; 20-plot local practice, not a handbook standard: ok

Cubic volume is total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium), net of defect. Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006). Green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber; applied to total-stem CVTS it overstates sawlog volume. Merchantable cubic volume is the consistent pairing. Sampling error at 95 % confidence, Student's t, on plot net cubic volume per acre, the quantity the handbook standards test (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales. The basal-area error is reference only. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables drop records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: [cruise_data.xlsx](#), Standards and assumptions.

TABLE 2. STAND TABLE BY 4-INCH DBH CLASS, PER ACRE

DBH class, in	Trees	TPA	BA	cu ft	MBF
4-7.9	9	18.8	4.4	56	0.3
8-11.9	12	10.2	5.9	96	0.5
12-15.9	39	18.5	19.0	427	2.1
16-19.9	55	15.2	26.8	714	3.6
20-23.9	49	9.3	23.9	682	3.4
24-27.9	64	8.6	31.2	1027	5.2
28-31.9	53	5.3	25.9	918	4.6
32-35.9	51	4.0	24.9	934	4.7
36-39.9	28	1.8	13.7	567	2.8
40-43.9	29	1.5	14.1	581	2.9
44-47.9	11	0.5	5.4	249	1.2
48-51.9	15	0.5	7.3	377	1.9
52-55.9	6	0.2	2.9	126	0.6
56-59.9	5	0.1	2.4	103	0.5
60-63.9	11	0.3	5.4	283	1.4
All	437	94.7	213.2	7140	35.8

TABLE 3. STOCK TABLE BY SPECIES, PER ACRE

Species	Trees	TPA	BA	QMD	cu ft	MBF
WF	139	29.2	67.8	20.6	2279	11.4
PP	134	27.8	65.4	20.7	2465	12.4
IC	66	11.9	32.2	22.2	891	4.5
DF	59	13.9	28.8	19.5	898	4.5
SP	39	11.8	19.0	17.2	608	3.0
All	437	94.7	213.2	20.3	7140	35.8

Trees: tally trees. TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species codes: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 106 plots, 300 ft grid (orange: QA flag)

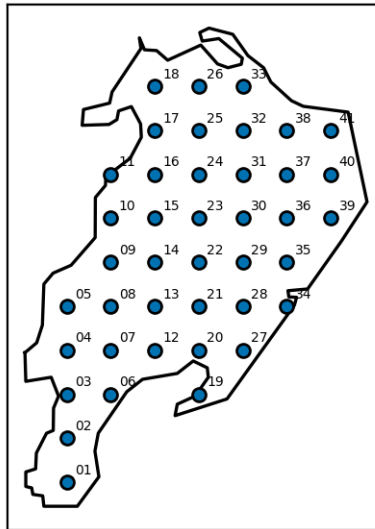


Figure 1. Plot locations with QA status.

QA findings: none; unit accepted

TABLE 4. PLOT LIST

Plot	Trees in	BA sq ft/ac	Slope %	Status
106-01	9	180	14	ok
106-02	7	140	9	ok
106-03	12	240	14	ok
106-04	13	260	10	ok
106-05	13	260	9	ok
106-06	11	220	12	ok
106-07	12	240	21	ok
106-08	8	160	6	ok
106-09	10	200	5	ok
106-10	14	280	11	ok
106-11	13	260	11	ok
106-12	8	160	33	ok
106-13	7	140	10	ok
106-14	10	200	11	ok
106-15	13	260	11	ok
106-16	11	220	8	ok
106-17	9	180	21	ok
106-18	11	220	19	ok
106-19	12	240	34	ok
106-20	12	240	28	ok
106-21	7	140	29	ok
106-22	12	240	18	ok
106-23	12	240	5	ok
106-24	11	220	6	ok
106-25	10	200	7	ok
106-26	13	260	18	ok
106-27	11	220	28	ok
106-28	10	200	28	ok
106-29	10	200	12	ok
106-30	10	200	12	ok
106-31	11	220	10	ok
106-32	11	220	2	ok
106-33	12	240	14	ok
106-34	11	220	28	ok
106-35	12	240	10	ok
106-36	12	240	9	ok
106-37	11	220	7	ok
106-38	11	220	8	ok
106-39	3	60	4	ok
106-40	10	200	10	ok
106-41	12	240	8	ok