

Unit 116 Field Data Review

Mohawk Valley West Slope demonstration. **Tractor** unit, 89.2 ac. 44 plots, BAF 20, variable-radius cruise on a 300 ft grid, 507 trees tallied. Simulated data with planted recording errors; see docs/methods.md.

TABLE 1. STAND SUMMARY, BAF 20 CRUISE, PER ACRE

STAND DENSITY		STAND INFO	
Basal area	230 sq ft/ac (1 SE of mean, BA 1.5 %)	Type	Sierran mixed conifer
Trees per acre	70	CWHR size / density	5 / D (cover 94 %)
QMD	24.6 in	SDI	283 (49 % of max 573)
SAWTIMBER (>= 10 in)		BIOMASS (< 10 in)	
BA QMD	230 sq ft/ac 24.9 in	BA QMD	1 sq ft/ac 9.4 in
TPA	68	TPA	2
Volume	40.1 MBF/ac (7993 cu ft)	Volume	0.5 green tons/ac (19 cu ft)
TREATMENT TARGET		CRUISE DESIGN	
Leave	35 % of max SDI, about 163 sq ft/ac	BA Sampling error (volume)	4.5 % at 95 % (CV 15 %, t = 2.02, n = 44)
Species (BA)	PP 65, WF 62, DF 42, IC 36, SP 25	Stratum standard	40 % of volume, MEETS; plots for standard 1
		Sampling error (basal area)	1 % at 95 % (CV 10 %); reference, not the standard
		Plot count	44; 20-plot local practice, not a handbook standard: ok

Cubic volume is total-stem CVTS by species (PNW-FIA California equations, MacLean and Berger 1976, CARB 2011 compendium), net of defect. Scribner board feet at 5.02 bf/cu ft (Keegan et al. 2010, table 2, California 2000-2006). Green tons at PP 45, WF 47, DF 38, SP 49, IC 45 lb/cu ft of wood (Miles and Smith 2009, NRS-38 table 1A). SDI in the summation form; maximum is the basal-area-weighted FVS Western Sierra species maximum (table 3.5.1, rev. 2025-09-23). The Keegan ratio is Scribner log scale per cubic foot of delivered sawlog fiber; applied to total-stem CVTS it overstates sawlog volume. Merchantable cubic volume is the consistent pairing. Sampling error at 95 % confidence, Student's t, on plot net cubic volume per acre, the quantity the handbook standards test (FSH 2409.12 ch. 40, 41.1(5)(a) and (b)); stratum standard 40 % of volume for tree-measurement sales. The basal-area error is reference only. Stand-summary BA counts every tallied tree (plot count x BAF); the stand and stock tables drop records flagged by QA, such as an out-of-range DBH, so the two can differ by a few tenths. Sources and URLs: [cruise_data.xlsx](#), Standards and assumptions.

TABLE 2. STAND TABLE BY 4-INCH DBH CLASS, PER ACRE

DBH class, in	Trees	TPA	BA	cu ft	MBF
8-11.9	6	4.9	2.7	54	0.3
12-15.9	27	10.5	12.3	294	1.5
16-19.9	57	14.7	25.9	689	3.5
20-23.9	71	12.3	32.3	946	4.7
24-27.9	86	10.7	39.1	1295	6.5
28-31.9	70	6.4	31.8	1147	5.8
32-35.9	58	4.3	26.4	1002	5.0
36-39.9	44	2.6	20.0	829	4.2
40-43.9	29	1.4	13.2	546	2.7
44-47.9	15	0.6	6.8	287	1.4
48-51.9	21	0.7	9.5	422	2.1
52-55.9	10	0.3	4.5	214	1.1
56-59.9	5	0.1	2.3	112	0.6
60-63.9	8	0.2	3.6	175	0.9
All	507	69.7	230.5	8012	40.2

TABLE 3. STOCK TABLE BY SPECIES, PER ACRE

Species	Trees	TPA	BA	QMD	cu ft	MBF
PP	144	17.6	65.5	26.1	2562	12.9
WF	136	19.6	61.8	24.0	2143	10.8
DF	93	13.1	42.3	24.4	1386	7.0
IC	79	11.8	35.9	23.6	1001	5.0
SP	55	7.6	25.0	24.6	919	4.6
All	507	69.7	230.5	24.6	8012	40.2

Trees: tally trees. TPA, BA (sq ft/ac), cubic feet and Scribner MBF per acre by BAF expansion. Species codes: PP ponderosa pine, WF white fir, DF Douglas-fir, SP sugar pine, IC incense-cedar.

Unit 116 plots, 300 ft grid (orange: QA flag)

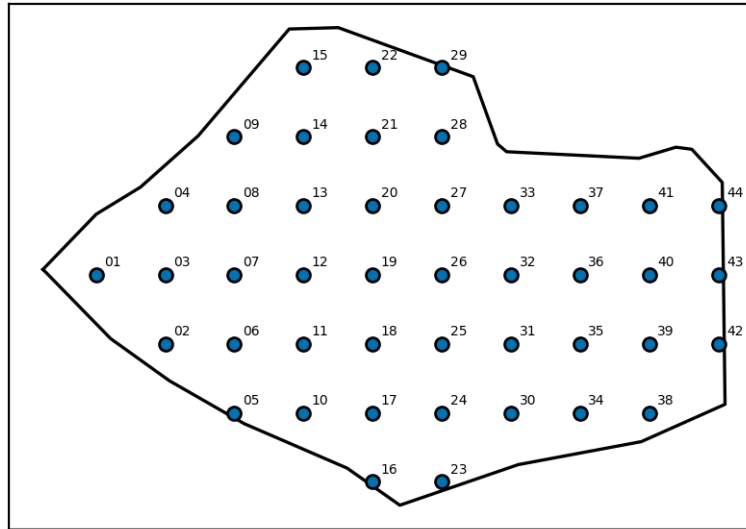


Figure 1. Plot locations with QA status.

QA findings: none; unit accepted

TABLE 4. PLOT LIST

Plot	Trees in	BA sq ft/ac	Slope %	Status
116-01	10	200	17	ok
116-02	12	240	17	ok
116-03	11	220	11	ok
116-04	10	200	20	ok
116-05	11	220	24	ok
116-06	12	240	15	ok
116-07	10	200	14	ok
116-08	10	200	11	ok
116-09	12	240	14	ok
116-10	11	220	19	ok
116-11	11	220	21	ok
116-12	14	280	12	ok
116-13	11	220	10	ok
116-14	11	220	4	ok
116-15	12	240	3	ok
116-16	10	200	15	ok
116-17	13	260	12	ok
116-18	11	220	16	ok
116-19	12	240	20	ok
116-20	12	240	12	ok
116-21	11	220	8	ok
116-22	10	200	4	ok
116-23	11	220	12	ok
116-24	13	260	12	ok
116-25	11	220	20	ok
116-26	11	220	14	ok
116-27	13	260	11	ok
116-28	13	260	16	ok
116-29	13	260	27	ok
116-30	11	220	22	ok
116-31	12	240	20	ok
116-32	14	280	12	ok
116-33	11	220	6	ok
116-34	10	200	10	ok
116-35	11	220	14	ok
116-36	11	220	11	ok
116-37	12	240	11	ok
116-38	13	260	13	ok
116-39	12	240	9	ok
116-40	13	260	10	ok
116-41	9	180	5	ok
116-42	11	220	11	ok
116-43	13	260	4	ok
116-44	12	240	19	ok