


r=1 (Phase 1) per-adapter A/B norm ( $\|A\|_{\text{tot}}=4.68$ ,  $\|B\|_{\text{tot}}=1.87$ )



r=8 (Phase 2b) per-adapter A/B norm ( $\|A\|_{\text{tot}}=9.07$ ,  $\|B\|_{\text{tot}}=2.13$ )

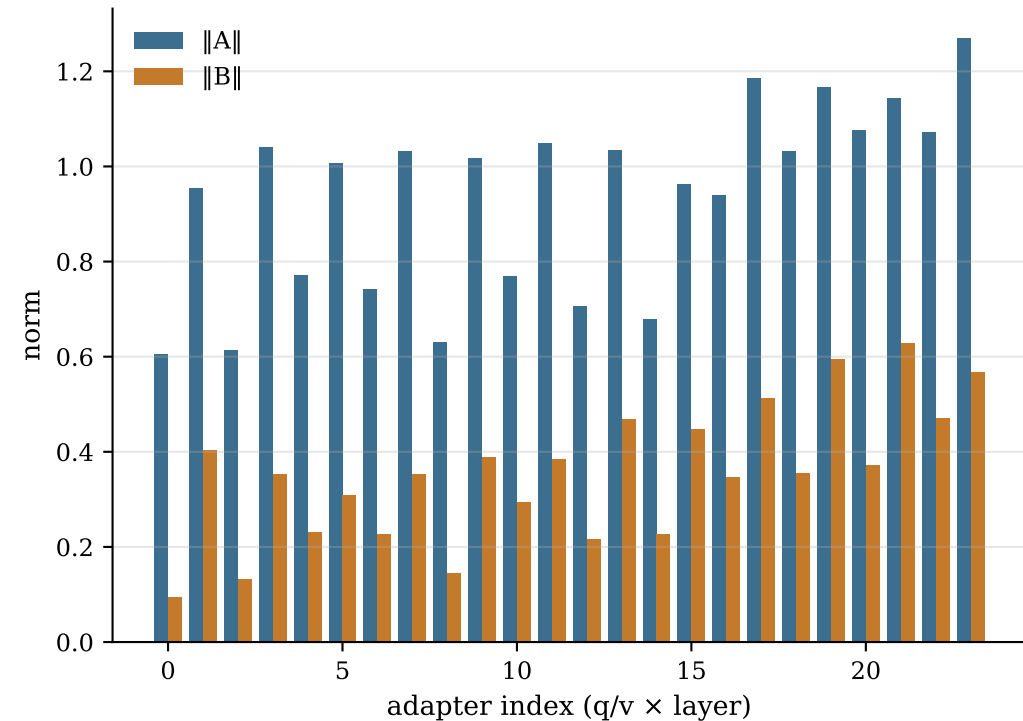