

ISO 25178 - Roughness (S-L)

S-filter (λ_s): Gaussian, 0.8 μm

F-operation: None

L-filter (λ_c): Gaussian, 0.25 mm

Height parameters

Sq	0.16	nm
----	------	----

Sa	0.12	nm
----	------	----

Spatial parameters


Sal	0.024	mm
-----	-------	----


Functional parameters (stratified surfaces)


Sk	0.35	nm
----	------	----

Spk	0.19	nm
-----	------	----

Svk	0.20	nm
-----	------	----

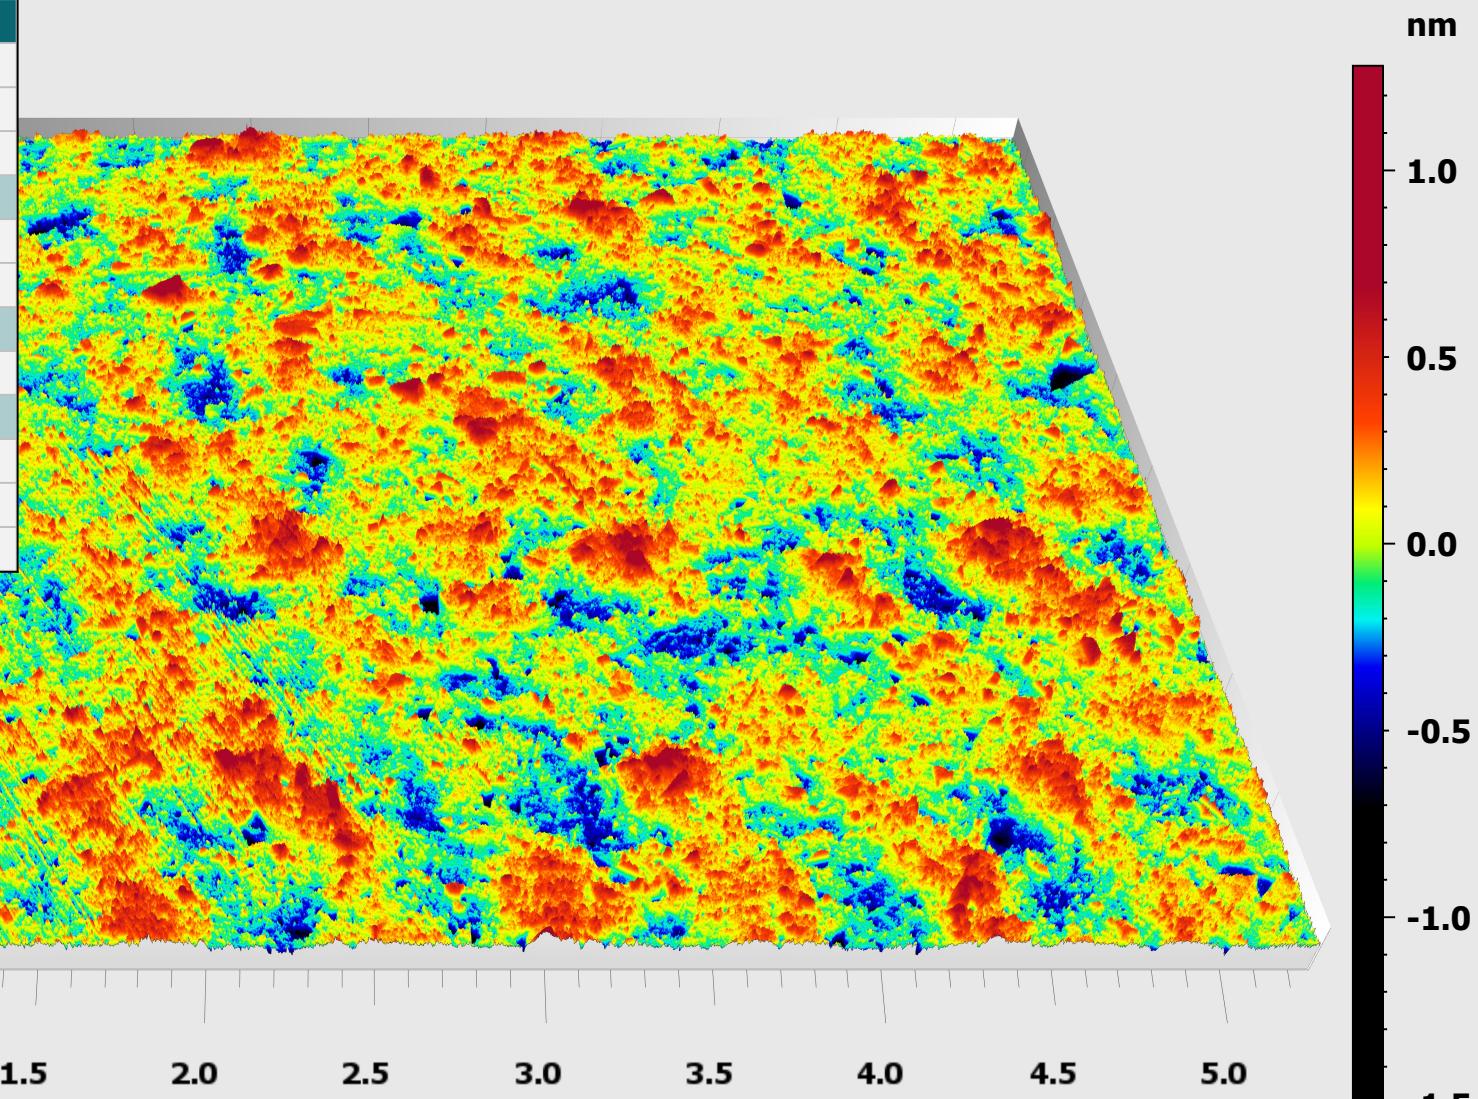

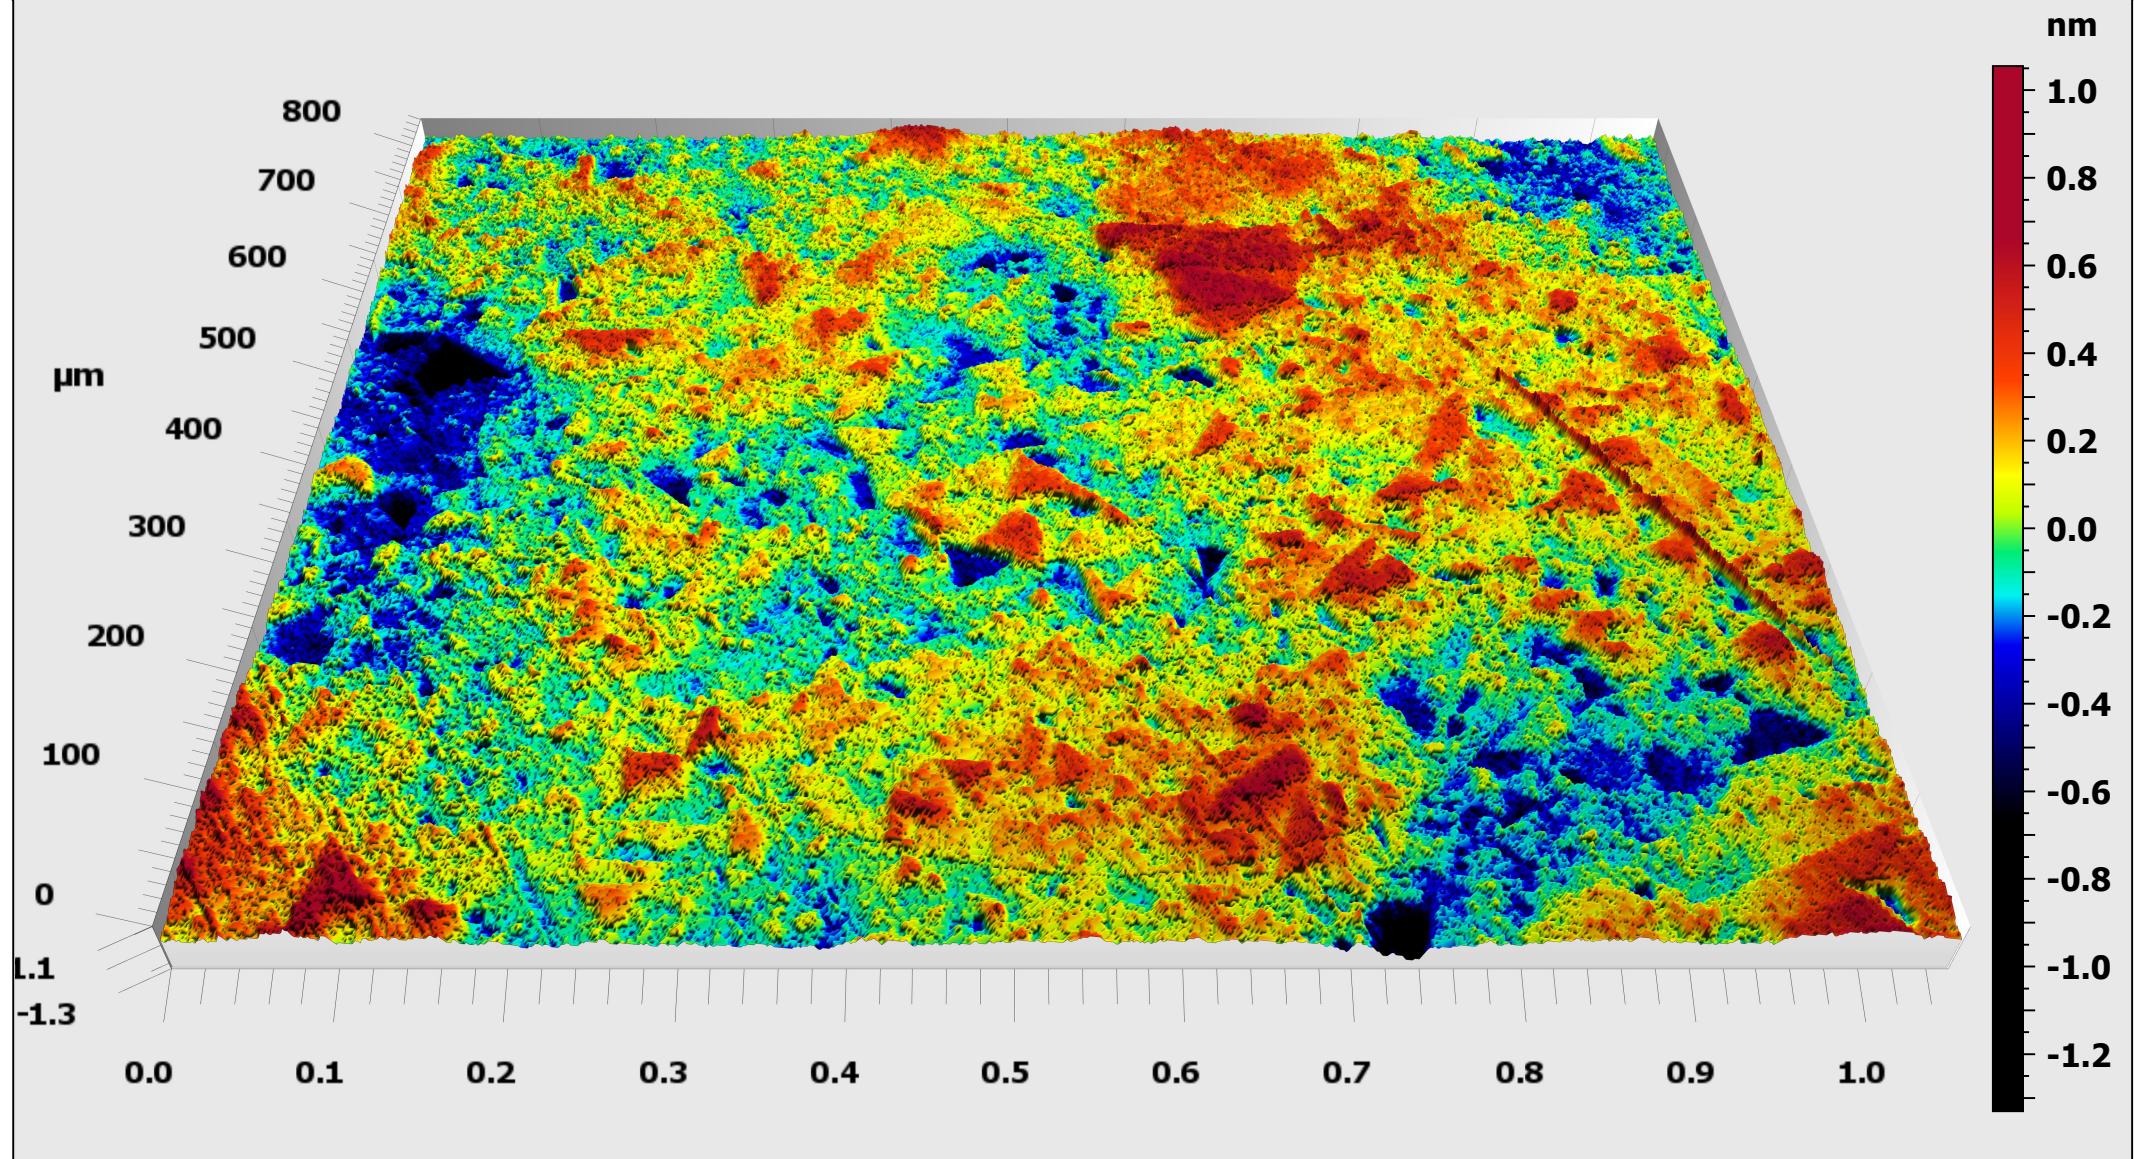

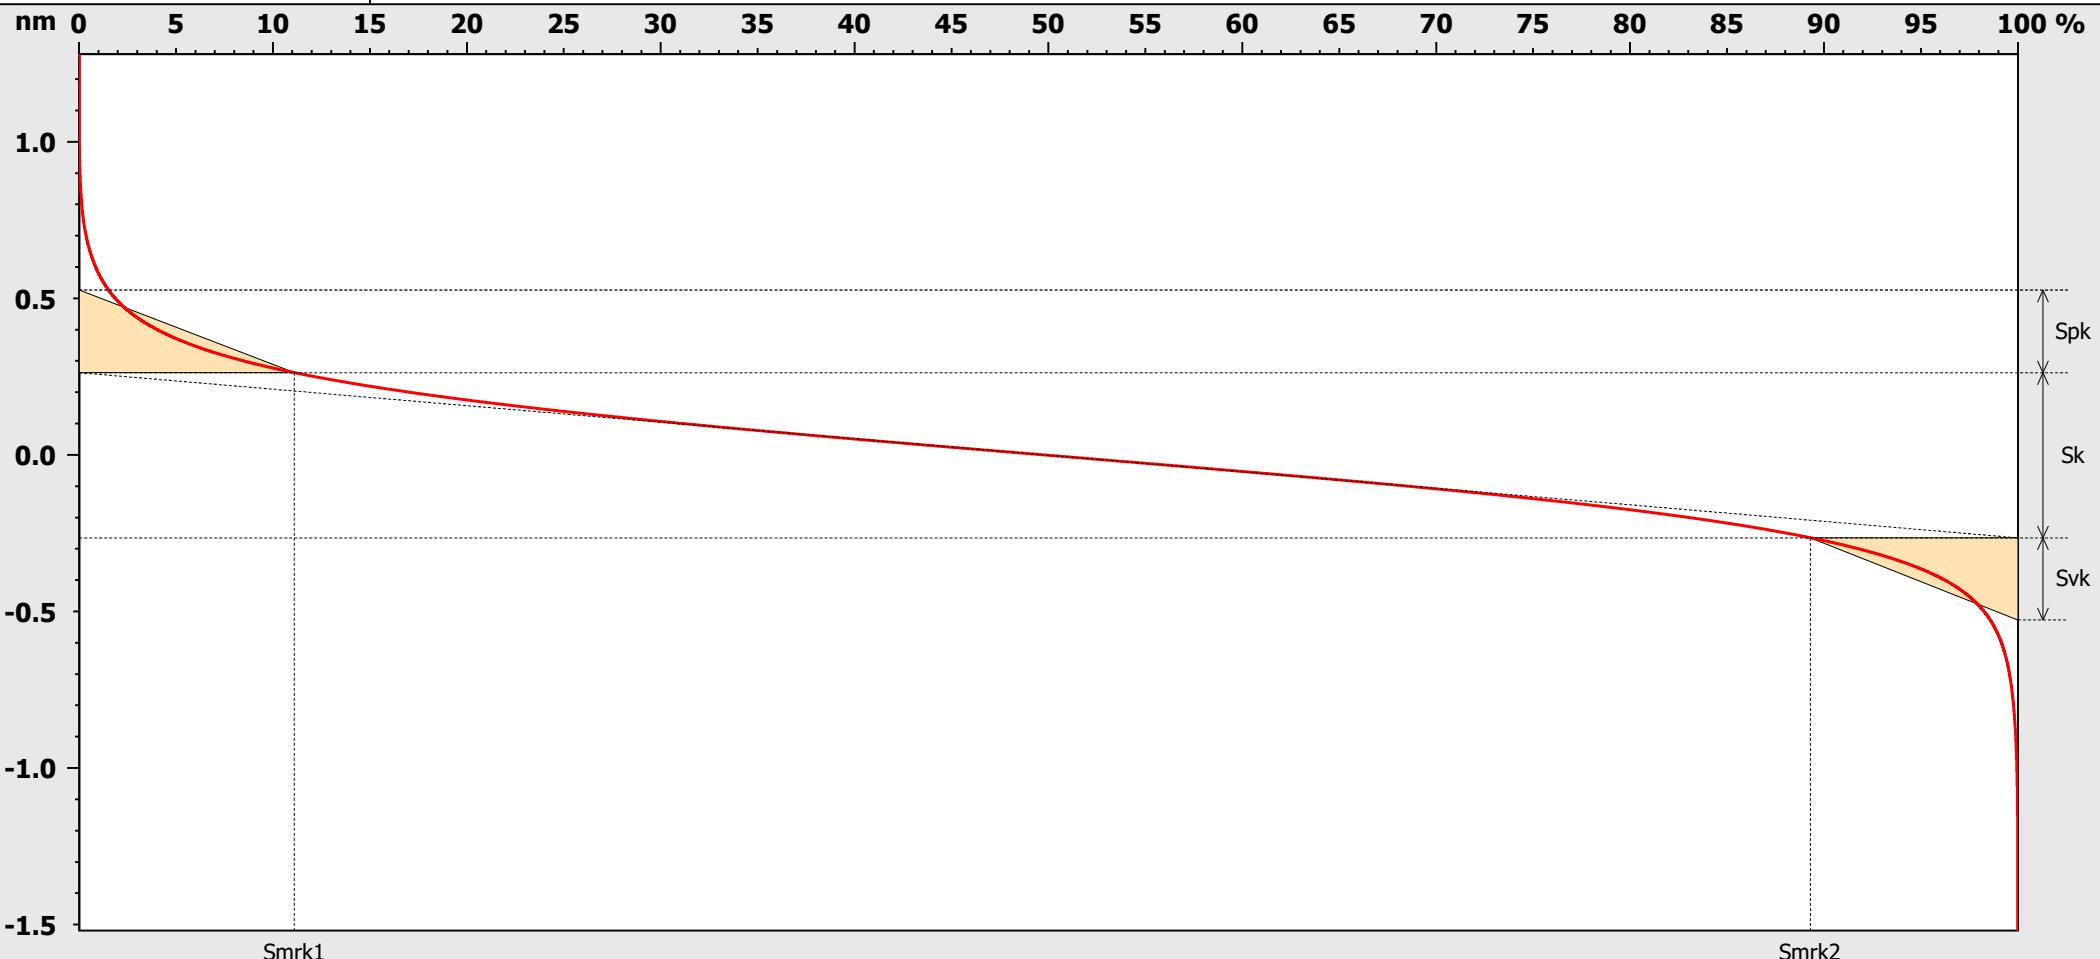

Parameters	Value	Unit
Sk	0.53	nm
Spk	0.26	nm
Svk	0.26	nm



Gesellschaft für Bild- und
Signalverarbeitung mbH

For demonstration purposes only!

Robert-Bosch-Ring 8, 98693 Ilmenau
Tel.: +49 (0) 3677-83710 - 50
Fax: +49 (0) 3677-83710 - 52
www.gbs-ilmenau.de, info@gbs-ilmenau.de

