

Accès à distance par VPN

VMware ESXi : 192.168.2.223

Pfsense : 192.168.2.203

Aruba : 192.168.2.213

PuTTY/ Aruba : username : **GSB3**

mdp : **FLI*Kebab!**

Adresse IP ESXi 3 :

serveur name : **192.168.2.223**

username : **root**

mdp : **btssio3&**

Création du certificat

3. VPN_SRV_CERT

Tunnel de rencontre des machine visiteurs :

Tunnel Settings

IPv4 Tunnel
Network

This is the virtual network used for private communications between this server and client hosts expressed using CIDR notation (eg. 10.0.8.0/24). The first network address will be assigned to the server virtual interface. The remaining network addresses will be assigned to connecting clients.

DNS :

Advanced Client Settings

DNS Default Domain

Provide a default domain name to clients.

DNS Server 1

DNS server IP to provide to connecting clients.

Ajouter l'adresse IP local sur Wizard

IPv4 Local Network

This is the network that will be accessible from the remote endpoint, e not adding a route to the local network through this tunnel on the remo

Traffic from clients to server

Firewall Rule ☒ Add a rule to permit connections to this OpenVPN server instance from clients anywhere on the Internet.

Traffic from clients through VPN

OpenVPN rule ☒ Add a rule to allow all traffic from connected clients to pass inside the VPN tunnel.

Connexion multiple autorisé :

Inter-client communication ☒ Allow communication between clients connected to this server

Permet de renforcer la connexion au serveur :

Strict User-CN Matching ☒ Enforce match
When authenticating users, enforce a match between the common name of the client certificate and the username given at login.

Certificat

OpenVPN Servers					
Interface	Protocol / Port	Tunnel Network	Mode / Crypto	Description	Actions
WAN	UDP4 / 1194 (TUN)	10.0.8.0/24	Mode: Remote Access (SSL/TLS + User Auth) Data Ciphers: AES-256-GCM, AES-128-GCM, CHACHA20-POLY1305, AES-256-CBC Digest: SHA256 D-H Params: 2048 bits	VPN_SRV_CERT	  
					 Add

Installation d'OpenVPN :

System / Package Manager / Available Packages

Installed Packages Available Packages

Search

Search term Both

Enter a search string or *nix regular expression to search package names and descriptions.

Packages

Name	Version	Description
acme	0.9_1	Automated Certificate Management Environment, for

pfSense
COMMUNITY EDITION

System / Package Manager / Installed Packages

Installed Packages Available Packages

Installed Packages

Name	Category	Version	Description	Actions
✓ openvpn-client-export	security	1.9.2	Exports pre-configured OpenVPN Client configurations directly from pfSense software.	  
Package Dependencies:  openvpn-client-export-2.6.7  openvpn-2.6.8_1  zip-3.0_1  7-zip-23.01				

 = Update  = Current

 = Remove  = Information  = Reinstall

Newer version available

Package is configured but not (fully) installed or deprecated

Wizard : Création de certificat pour le pfSense,

Wizard / OpenVPN Remote Access Server Setup / Finished!

Step 11 of 11

Finished!

OpenVPN Remote Access Server Setup Wizard

Configuration Complete!

The configuration is now complete.

Adding users for the VPN depends on the chosen authentication method. For example, add local users with certificates under [System > User Manager](#). For remote authentication servers, add certificates directly in [System > Certificate Manager](#).

To easily export client configurations, browse to [System > Packages](#) and install the OpenVPN Client Export package.

>> Finish

Création du compte utilisateur :

User Properties

Defined by

USER

Disabled

☐ This user cannot login

Username

idris

Password

.....

.....

Full name

User's full name, for administrative information only

Expiration date

Leave blank if the account shouldn't expire, otherwise enter the expiration date as MM/DD/YYYY

Custom Settings

☐ Use individual customized GUI options and dashboard layout for this user.

Group membership

admins

Not member of

Member of

>> Move to "Member of" list

<< Move to "Not member of" list

Hold down CTRL (PC)/COMMAND (Mac) key to select multiple items.

Certificate

☒ Click to create a user certificate

Create Certificate for User

Descriptive name

Certificate authority

VPN_Certificat

Key type

RSA

2048

The length to use when generating a new RSA key, in bits.

The Key Length

MDP : btssio

System / User Manager / Users

Users Groups Settings Authentication Servers

Users

	Username	Full name	Status	Groups	Actions
☐	 admin	System Administrator	✓	admins	
☐	 idris		✓		 

Uniquement pour l'utilisateur souhaité Certificat_utilisateur :

[Authorities](#) [Certificates](#) [Certificate Revocation](#)

Add/Sign a New Certificate

Method

Create an internal Certificate

Descriptive name

Certificat_Idris

The name of this entry as displayed in the GUI for reference.
This name can contain spaces but it cannot contain any of the following characters: ?, >, <, &, /, \, ", '.

Internal Certificate

Certificate authority

VPN_Certificat

Key type

RSA

2048

The length to use when generating a new RSA key, in bits.
The Key Length should not be lower than 2048 or some platforms may consider the certificate invalid.

Digest Algorithm

sha256



The digest method used when the certificate is signed.

Certificat utilisateur apparent :

User Certificates		
Name	CA	
Certificat_Idris	VPN_Certificat	
 Add		

Sur OpenVPN>Client Export Utility, installer le fichier .ovpn :

OpenVPN Clients		
User	Certificate Name	Export
idris	Certificat_Idris	- Inline Configurations: Most Clients Android OpenVPN Connect (iOS/Android) - Bundled Configurations: Archive Config File Only - Current Windows Installers (2.6.7-lx001): 64-bit 32-bit - Previous Windows Installers (2.5.9-lx601): 64-bit 32-bit - Legacy Windows Installers (2.4.12-lx601): 10/2016/2019 7/8/8.1/2012r2 - Viscosity (Mac OS X and Windows): Viscosity Bundle Viscosity Inline Config

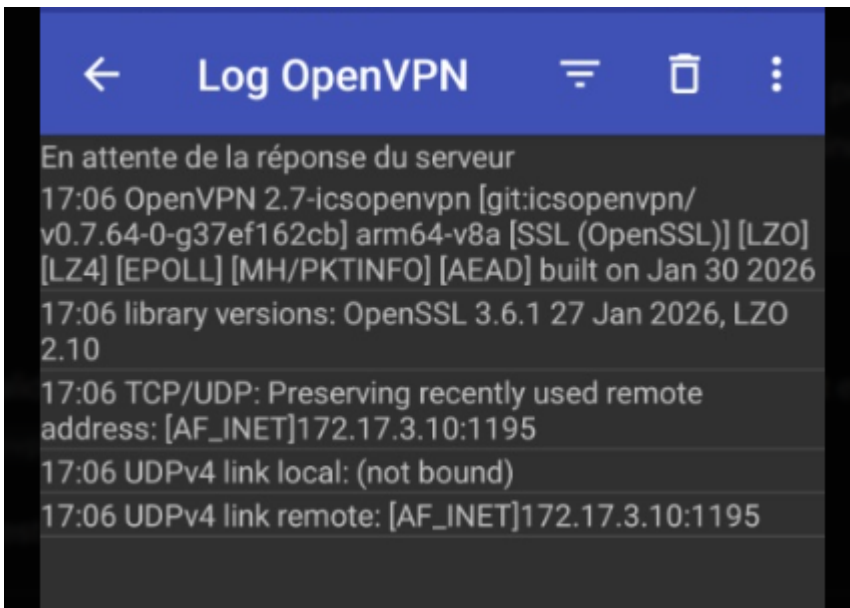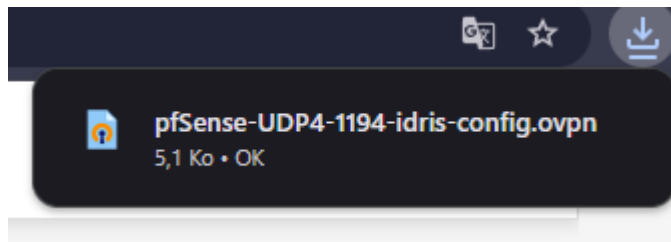

VLAN Test accès uniquement au Rezolab,Intralab via le VLAN 800 :

VLAN 800



Name:	ACCES_VPN	Untagged:	None	IP Config:	Manu
Status:	Port Based	Tagged:	None	IP Address:	192.1
Jumbo:	No	Tagged (GVRP):	None	IPv4 Default Gateway:	192.1
Voice:	No	Forbid:	None	IPv4 Subnet Mask:	255.2

VLAN Table

Display ▼ 🔍 + 🗑️

ID ▲	Name	Status	IP Confi...	IP Address	Untagg...	Tagged...
200	DEMO	Port B...	Disabled		36-40	48
300	SERVE...	Port B...	Disabled		41-44	48
400	SORTIE	Port B...	Disabled		45-47,...	48
800	ACCES...	Port B...	Manual	192.168.8.80	None	None

Ports

Add

Tagged



e.g. 1-25,27,30



IPv4

Default Gateway

192.168.2.1

IP Configuration

Manual



IP Address

192.168.8.80

Subnet Mask

255.255.255.0

Primary VLAN:	VLAN 1		Name:	DEMO	Untagged:	36-40	IP Config:	Enabled
Management VLAN:	NONE		Status:	Port Based	Tagged:	48	IP Address:	192.168.2.1
Max VLANs:	256		Jumbo:	No	Tagged (GVRP):	None	IPv4 Default Gateway:	192.168.2.1
GVRP:	Disabled		Voice:	No	Forbid:	None	IPv4 Subnet Mask:	255.255.255.0
VLAN Table								
ID	Name	Status	IP Config	IP Address				
200	DEMO	Port Based	Disabled					

Remove

36



Port 36



IPv4

Default Gateway

192.168.2.1

Je libère le port **36** du **VLAN DEMO** :

VLAN 800 :

Ports

Add

Tagged

36

+

Port 36 - Tagged X

