FROM ABOVE

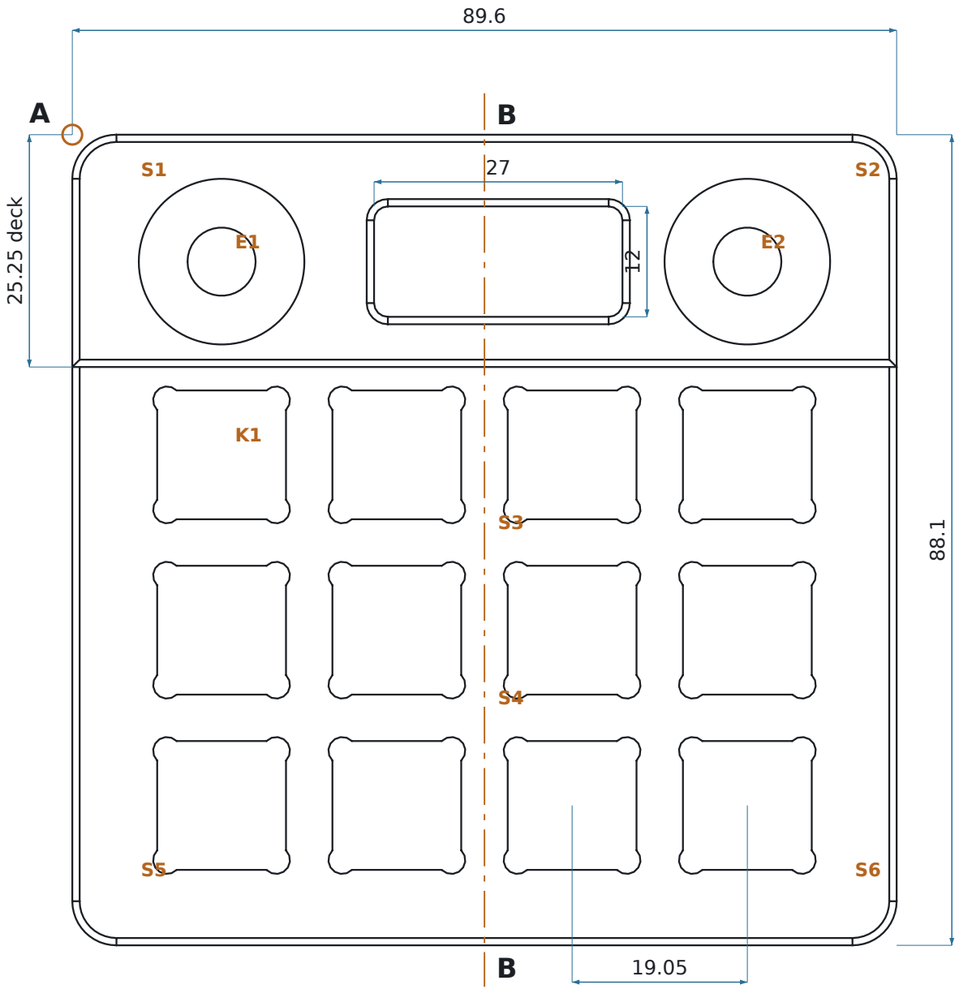

FROM BELOW (mirrored left to right)

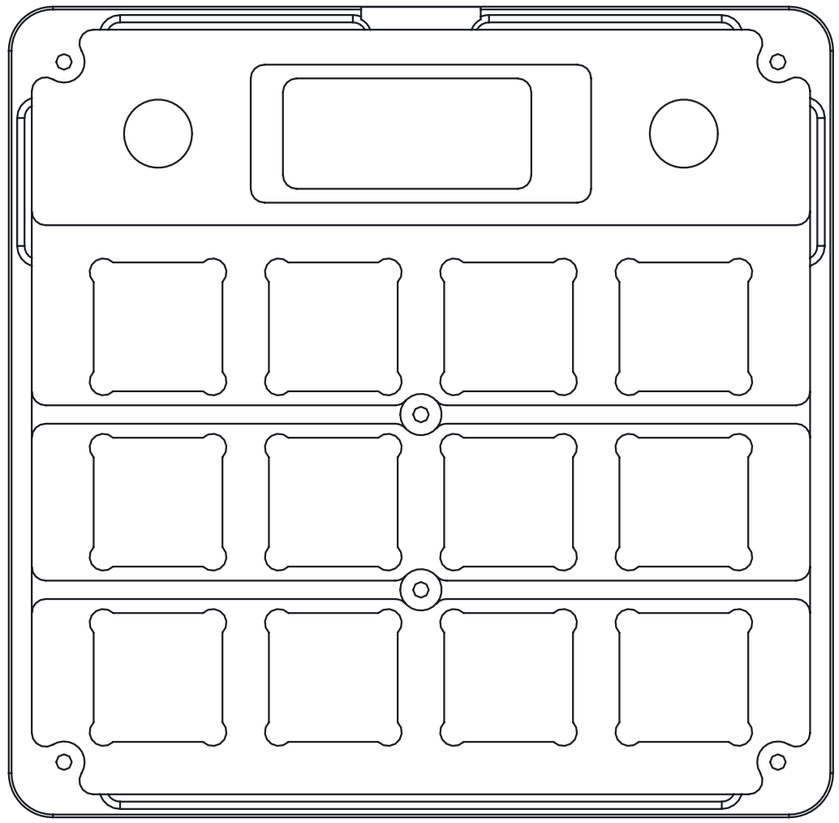

macropad case: top, CNC variant

Holes, from datum A

tag	X	Y
ø1.7 x 4.2 deep from below		
S1	6	6
S2	83.6	6
S3	44.8	44.325
S4	44.8	63.375
S5	6	82.1
S6	83.6	82.1
ø7.4 through; well ø18 x 0.5 deep from above		
E1	16.225	13.8
E2	73.375	13.8
14 square through, first of 12 on a 19.05 grid		
K1	16.225	34.8

SECTION B-B

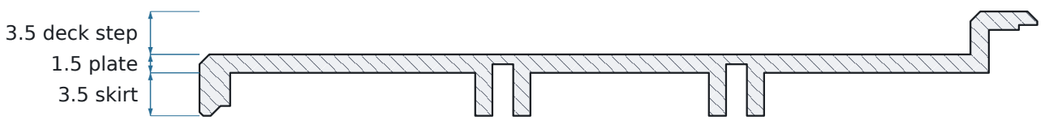

LAP JOINT, front wall, 8:1

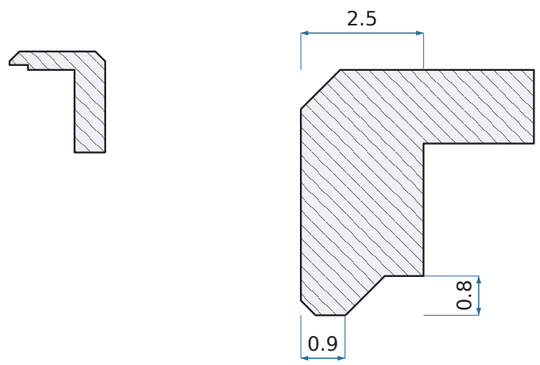

Scale 1.5:1 plans, 2:1 section, 8:1 detail, on A3. Dimensions in mm, computed from the model.
Datum A: back-left outer corner seen from above. X to the right, Y toward the front.
3-axis, two setups: underside up, then top side up.
Every pocket corner is R1.5; the switch cut-outs have corner reliefs of that radius.
Switch cut-outs 14 square in a 1.5 mm plate. Take their tolerance from the Cherry MX datasheet.
Pilot holes are for self-tapping M2 in plastic. In aluminium drill 1.6 and tap M2.
General tolerance: ISO 2768-m is a proposal. Nothing has been made or measured.