FROM ABOVE

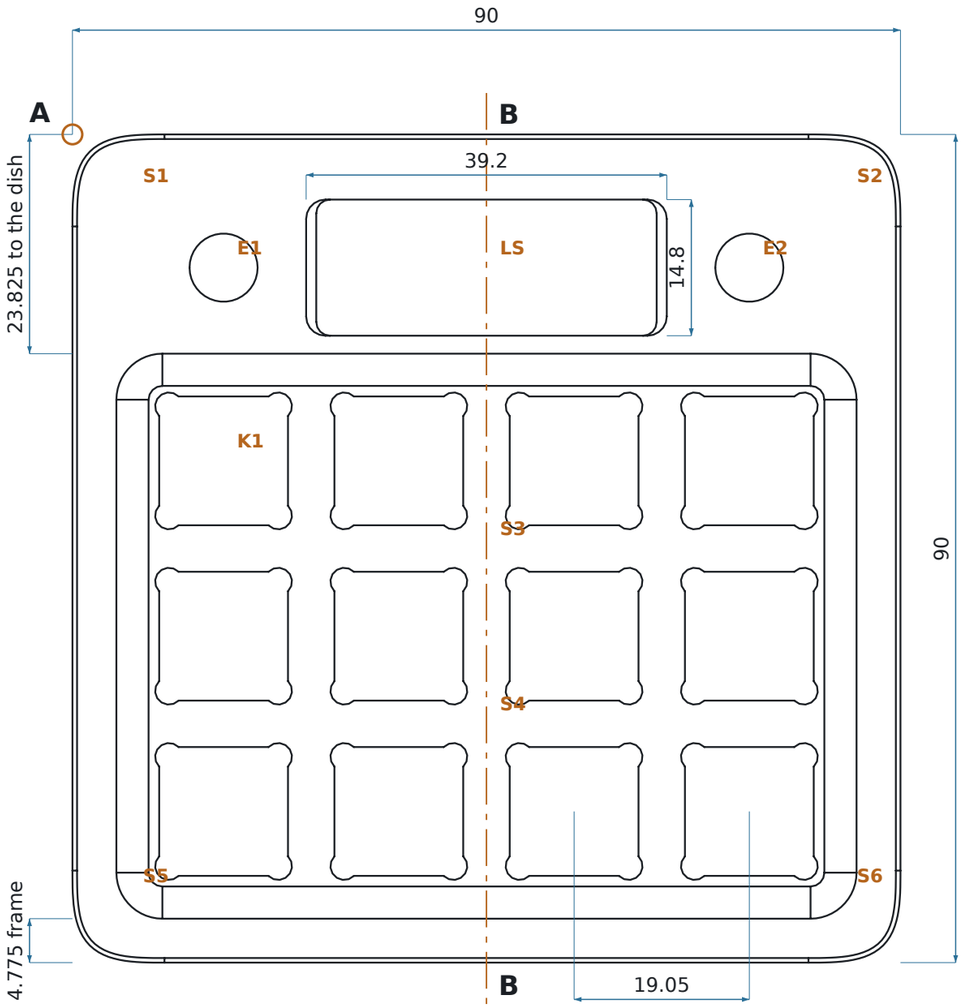

FROM BELOW (mirrored left to right)

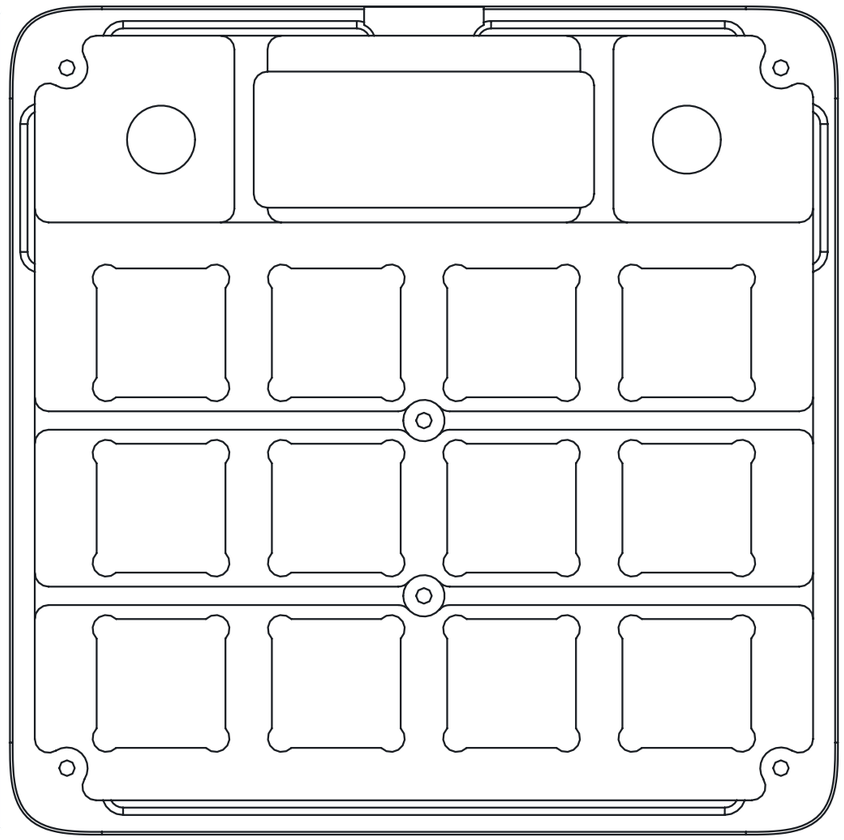

macropad case: top, CNC variant

Holes and recesses, from datum A

tag	X	Y
ø1.7 x 4.2 deep from below		
S1	6.2	6.675
S2	83.8	6.675
S3	45	45
S4	45	64.05
S5	6.2	82.775
S6	83.8	82.775
ø7.4 through		
E1	16.425	14.475
E2	73.575	14.475
14 square through, first of 12 on a 19.05 grid		
K1	16.425	35.475
lens recess 39.2 x 14.8, R2.1, 1.15 deep from above		
opening 37 x 14.8 through, in its middle		
LS	45	14.475

SECTION B-B

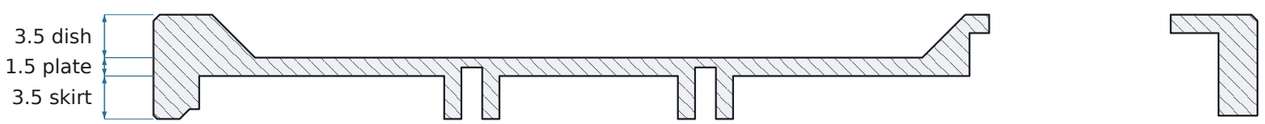

GAP AND LAP JOINT, front wall, 8:1

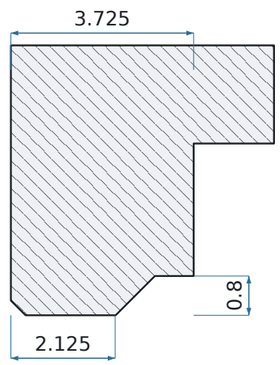

Scale 1.5:1 plans, 2:1 section, 8:1 detail, on A3. Dimensions in mm, computed from the model.
Datum A: back-left corner of the box round the outline, seen from above. X to the right, Y toward the front.
3-axis, two setups: underside up, then top side up.
Every pocket corner is R1.5 or larger; the switch cut-outs have corner reliefs of that radius.
Switch cut-outs 14 square in a 1.5 mm plate. Take their tolerance from the Cherry MX datasheet.
Key dish: flat floor on the plate, walls at 45 degrees, 3.5 deep. A 90 degree chamfer mill cuts the walls.
Pilot holes are for self-tapping M2 in plastic. In aluminium drill 1.6 and tap M2.
Outline corners: one quintic Bezier each, control points 10, 6 and 2 mm from the box corner on both sides. Take the curve from the STEP file.
General tolerance: ISO 2768-m is a proposal. Nothing has been made or measured.