


priv->disp\_fd = open("/dev/snsdisp", 0\_RDWR);

```
clientManager = e client manager get();
                     supportedList = e_output_manager_get_supported interface_list();
                     eg: dss server set output mode(*output, outputMode);
                       -->dssServerSetOutputMode(self, outputInfo, outputMode);
                                                                                 eoutputmanager.c
utputManage
                               outputhal.c
                                                              → 1、priv->outputHal = output hal get();
                               HDMI or LCD
                                2.1 or 2.2
                                  1, e output manager get video timing();
                                  2\ e output manager_set_output_mode();
                                  3, e dss manager open device();
                                  4, e_dss_manager_set_video_timing();
                                     e output interface set output mode();
                                     lcd interface class init();
               Hdmiinterface.c
                                       -->output hal set output mode();
                                                                        1cdinterface.c
                                         output hal set output mode();
                         priv->outputMgr fb = open("/dev/sns-output-mgr", 0 RDWR);
```

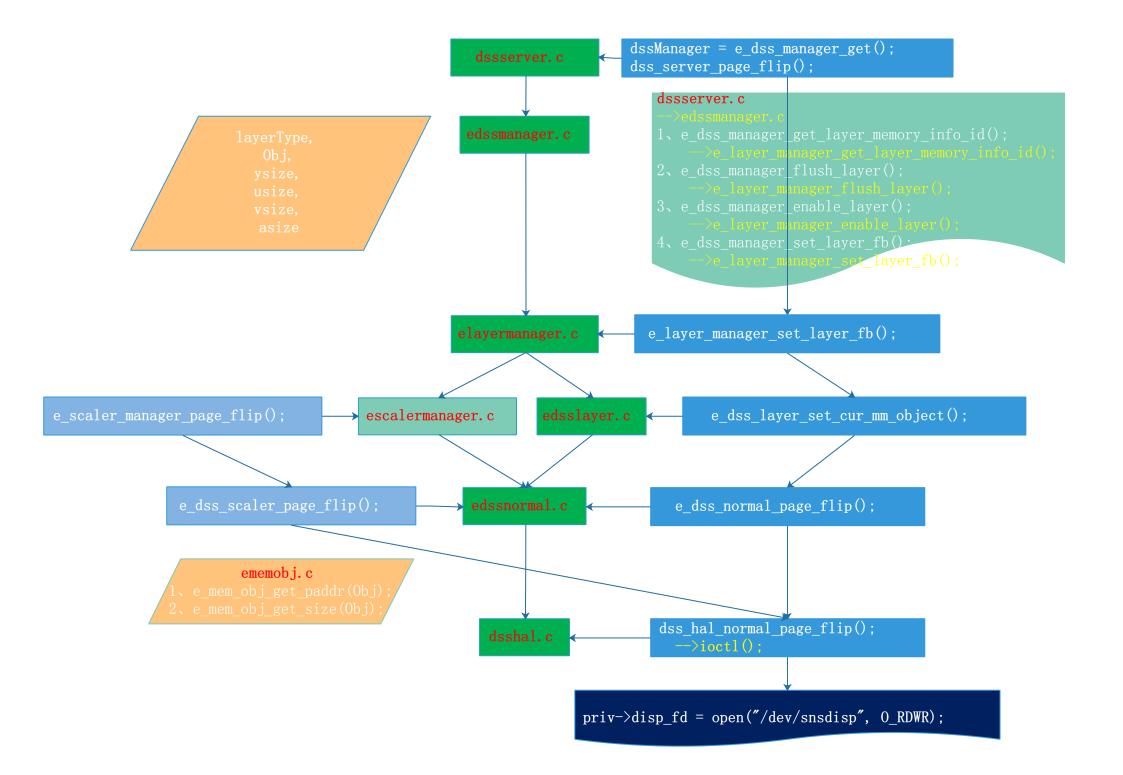

```
main ()
                                                       exserver.c
display
Device,
Mode,
ysize,
usize,
vsize,
 asize
                   e_dss_layer_set_cur_mm_object();
                       e_dss_normal_page_flip();
                                                 ememobj.c
                     dss_hal_normal_page_flip();
```

```
dssserver.c (init)
clientManager = e_client_manager_get();
outputManager = e_output_manager_get();
    -->outputHal = output_hal_get();
    -->outputInterface = lcd_interface_new();
dssManager = e_dss_manager_get();
memoryManager = e_memory_manager_get();
ipc = e_ipc_new();
e_ipc_register(priv->ipc, DSS_SERVER_NAME);
```